

FCC PART 15.247

TEST REPORT

For

SHENZHEN IP-COM NETWORKS CO.,LTD.

Unit A, First Floor, Tower E3, No. 1001, Zhongshanyuan Road, Nanshan District, Shenzhen, China

FCC ID: 2ABZMAP355

Report Type: Original Report	Product Type: Wireless Access Point
Test Engineer:	Lion Xiao <i>Lion Xiao</i>
Report Number:	RDG160310003-00A
Report Date:	2016-04-06
Reviewed By:	Jerry Zhang <i>Jerry Zhang</i> EMC Manager
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	4
SYSTEM TEST CONFIGURATION.....	5
DESCRIPTION OF TEST CONFIGURATION	5
EQUIPMENT MODIFICATIONS	5
EUT EXERCISE SOFTWARE	5
SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS	8
FCC §15.247 (i) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	9
APPLICABLE STANDARD	9
FCC §15.203 - ANTENNA REQUIREMENT.....	10
APPLICABLE STANDARD	10
ANTENNA CONNECTOR CONSTRUCTION	10
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	11
APPLICABLE STANDARD	11
MEASUREMENT UNCERTAINTY.....	11
EUT SETUP.....	11
EMI TEST RECEIVER SETUP.....	12
TEST PROCEDURE	12
CORRECTED AMPLITUDE & MARGIN CALCULATION	12
TEST EQUIPMENT LIST AND DETAILS.....	13
TEST RESULTS SUMMARY	13
TEST DATA	13
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	18
APPLICABLE STANDARD	18
MEASUREMENT UNCERTAINTY.....	18
EUT SETUP	18
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	19
TEST PROCEDURE	19
CORRECTED AMPLITUDE & MARGIN CALCULATION	20
TEST EQUIPMENT LIST AND DETAILS.....	20
TEST RESULTS SUMMARY	20
TEST DATA	20
FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....	37
APPLICABLE STANDARD	37
TEST PROCEDURE	37
TEST EQUIPMENT LIST AND DETAILS.....	37
TEST DATA	37
FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....	51

APPLICABLE STANDARD	51
TEST PROCEDURE-	51
TEST EQUIPMENT LIST AND DETAILS.....	51
TEST DATA	51
FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	53
APPLICABLE STANDARD	53
TEST PROCEDURE	53
TEST EQUIPMENT LIST AND DETAILS.....	53
TEST DATA	53
FCC §15.247(e) - POWER SPECTRAL DENSITY	62
APPLICABLE STANDARD	62
TEST PROCEDURE	62
TEST EQUIPMENT LIST AND DETAILS.....	62
TEST DATA	62

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The SHENZHEN IP-COM NETWORKS CO.,LTD. 's product, model number: AP355 (FCC ID: 2ABZMAP355) (the "EUT") in this report was a *Wireless Access Point*, which was measured approximately: 20.0 cm (L) x 20.0 cm (W) x 3.7 cm (H), rated input voltage: DC12V from adapter or DC 48V from POE.

Adapter information:
Model: BN050-A18012U
Input: 100-240V~ 50/60Hz 0.6A
Output: DC 12V, 1.5A

All measurement and test data in this report was gathered from production sample serial number: 160310003 (Assigned by BACL, Dongguan). The EUT was received on 2016-03-10.

Objective

This report is prepared on behalf of SHENZHEN IP-COM NETWORKS CO.,LTD. in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communications Commission's rules

The tests were performed in order to determine the compliance of the EUT with FCC Part 15-Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15E NII submissions with FCC ID: 2ABZMAP355.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communications Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 06, 2015.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in testing mode, which was provided by manufacturer.
For 2.4GHz band, 11 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

For 802.11b, 802.11g, and 802.11n ht20 modes were tested with channel 1, 6 and 11.
For 802.11n ht40 mode were tested with Channel 3, 6 and 9.

The worst-case data rates are determined to be as follows for each mode based upon investigations by measuring the average power and PSD across all data rates bandwidths, and modulations.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

The worst condition (maximum power with 100% duty cycle) was setting by the software as following table:

Test Mode	Test Software Version	M_Tool V2.0.0.3					
802.11b	Test Frequency	2412MHz		2437MHz		2462MHz	
	Data Rate	1Mbps		1Mbps		1Mbps	
	ANT	Chain0	chain1	Chain0	chain1	Chain0	chain1
	Power Level Setting	72	72	72	72	72	72
802.11g	Test Frequency	2412MHz		2437MHz		2462MHz	
	Data Rate	6Mbps		6Mbps		6Mbps	
	ANT	Chain0	chain1	Chain0	chain1	Chain0	chain1
	Power Level Setting	60	60	60	60	60	60
802.11n ht20	Test Frequency	2412MHz		2437MHz		2462MHz	
	Data Rate	MCS8		MCS8		MCS8	
	ANT	Chain0	chain1	Chain0	chain1	Chain0	chain1
	Power Level Setting	52	52	52	52	53	53
802.11n ht40	Test Frequency	2422MHz		2437MHz		2452MHz	
	Data Rate	MCS8		MCS8		MCS8	
	ANT	Chain0	chain1	Chain0	chain1	Chain0	chain1
	Power Level Setting	54	54	54	54	54	54

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
DELL	Laptop	PP11L	QDS-BRCM1017
I.T.E	SWITCHING MODE POWER SUPPLY	C0548B-480-050	N/A

External Cable


Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
RJ45 Cable*1	no	no	10	EUT	Laptop
DC Power Cable	No	No	1.2	Adapter	EUT

Block Diagram of Test Setup

Test Mode: Supply by adapter

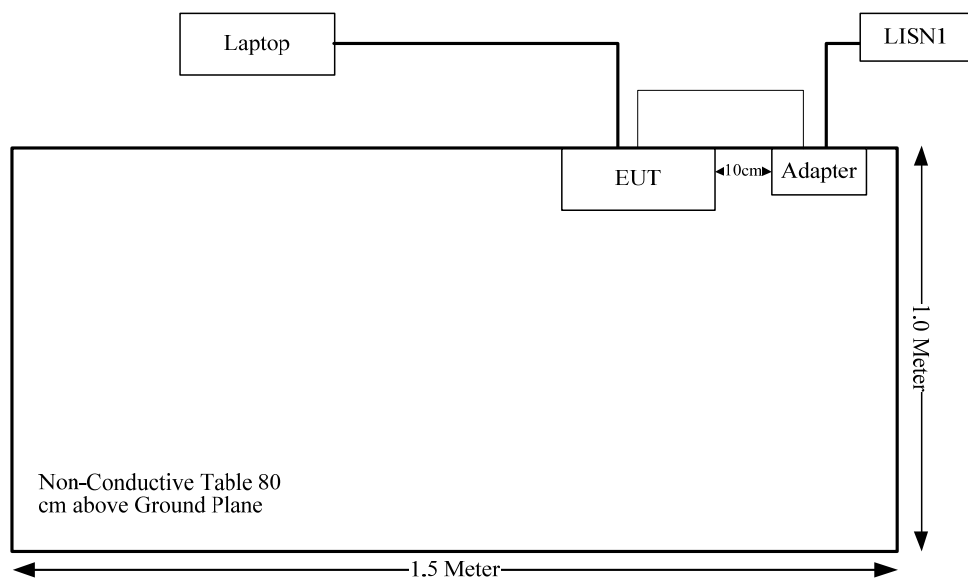

Test Mode: Supply by PoE

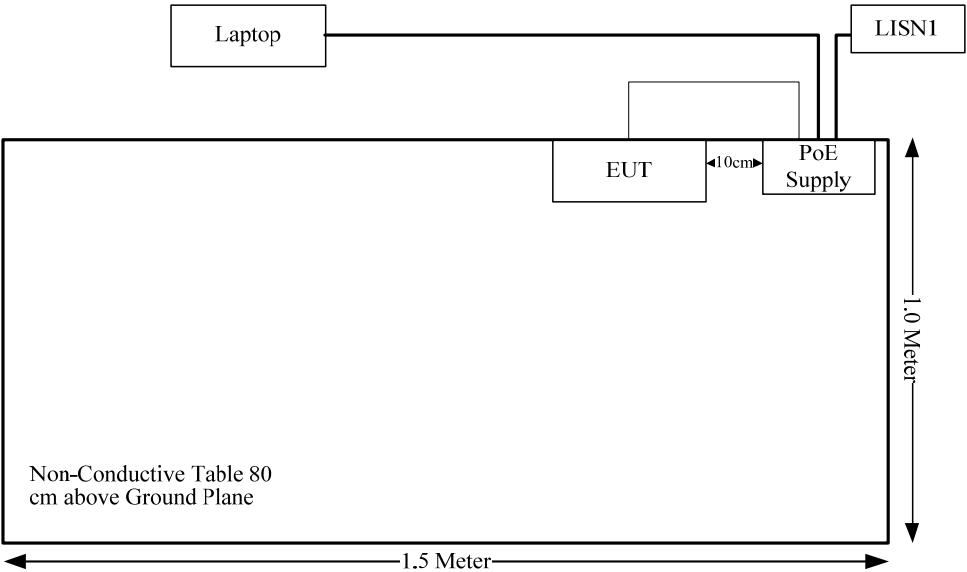

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.247 (i) & §1.1310 & §2.1091	Maximum Permissible Exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.247(d)	Spurious Emissions at Antenna Port	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum conducted output power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

FCC §15.247 (i) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247(i) and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary:

Predication of MPE limit at a given distance

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

Frequency (MHz)	Antenna Gain		Tune-up Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
	(dBi)	(numeric)	(dBm)	(mW)			
2412-2462	3.00	2.00	24	251.19	20.00	0.10	1.0

Note: The tune-up power is 23+/-1dBm.

Result: The device meet FCC MPE at 20 cm distance

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

Antenna Connector Construction

The EUT has two internal antennas, which was permanently attached and the antenna gain is 3dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cisp} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cisp} of Table 1, then:


- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{cisp})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{cisp})$, exceeds the disturbance limit.

Based on CISPR 16-4-2-2011, measurement uncertainty of conducted disturbance at mains port using AMN at Bay Area Compliance Laboratories Corp. (Dongguan) is 3.12 dB (150 kHz to 30 MHz).

Table 1 – Values of U_{cisp}

Measurement	U_{cisp}
Conducted disturbance at mains port using AMN (150 kHz to 30 MHz)	3.4 dB

EUT Setup

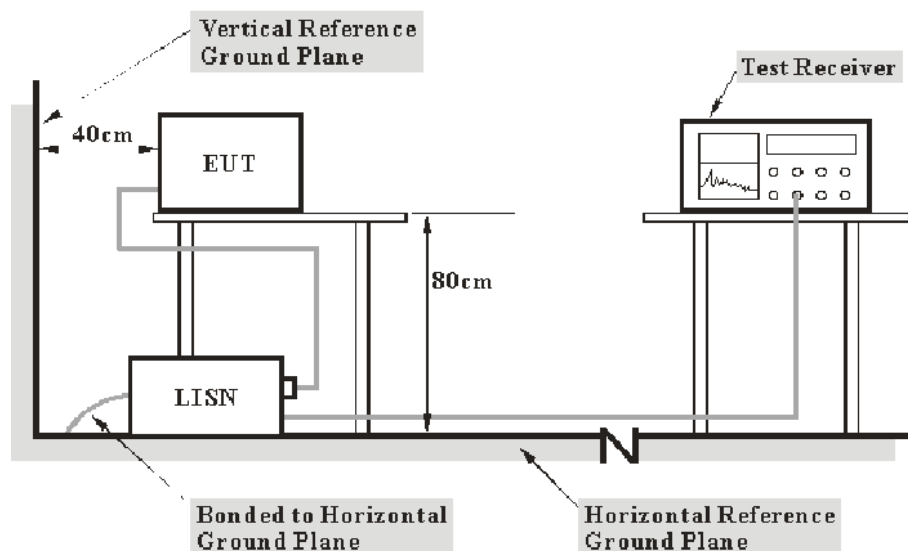

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

V_C (cord. Reading): corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF: voltage division factor of AMN

C_f : Correction Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2015-10-20	2016-10-20
R&S	L.I.S.N	ESH2-Z5	892107/021	2015-06-09	2016-06-09
R&S	Two-line V-network	ENV 216	3560.6550.12	2015-11-26	2016-11-25
N/A	Coaxial Cable	1.8m	N/A	2015-05-06	2016-05-06
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

7.8 dB at 0.436318 MHz in the **Neutral** conducted mode *for adapter*

Test Data**Environmental Conditions**


Temperature:	21.4°C
Relative Humidity:	51 %
ATM Pressure:	101.4kPa

The testing was performed by Lion Xiao on 2016-03-14.

Test Mode: Transmitting


Supply by adapter:

AC120 V, 60 Hz, Line:

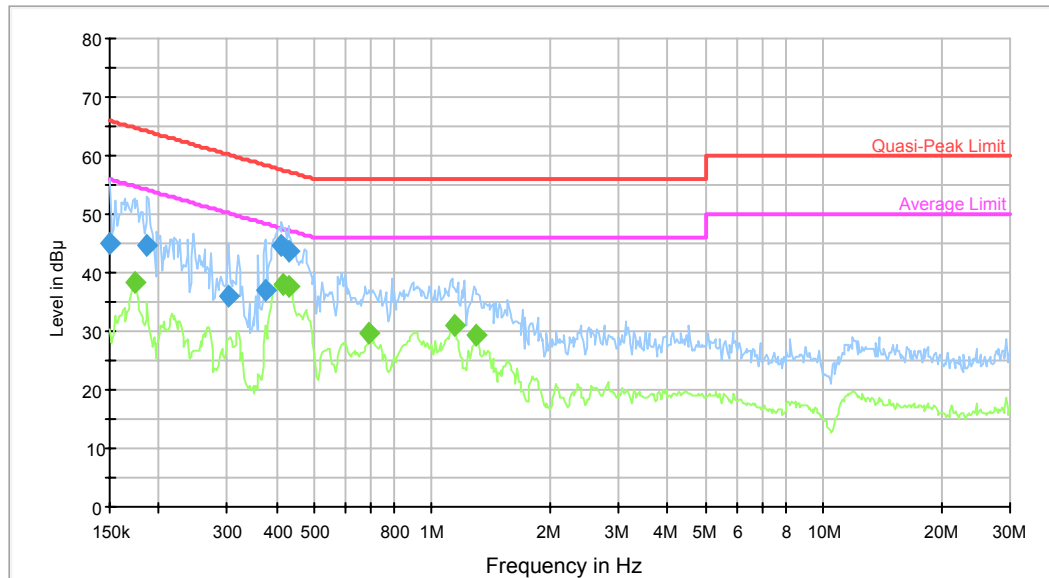

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	44.9	9.000	L1	9.8	21.1	66.0	Compliance
0.187494	44.6	9.000	L1	9.7	19.5	64.1	Compliance
0.302425	36.1	9.000	L1	9.7	24.1	60.2	Compliance
0.375019	37.1	9.000	L1	9.7	21.3	58.4	Compliance
0.412647	44.8	9.000	L1	9.8	12.8	57.6	Compliance
0.432855	43.8	9.000	L1	9.8	13.4	57.2	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.173134	38.2	9.000	L1	9.7	16.6	54.8	Compliance
0.415949	38.1	9.000	L1	9.8	9.4	47.5	Compliance
0.432855	37.6	9.000	L1	9.8	9.6	47.2	Compliance
0.692650	29.6	9.000	L1	9.8	16.4	46.0	Compliance
1.144267	31.1	9.000	L1	9.8	14.9	46.0	Compliance
1.289541	29.3	9.000	L1	9.8	16.7	46.0	Compliance

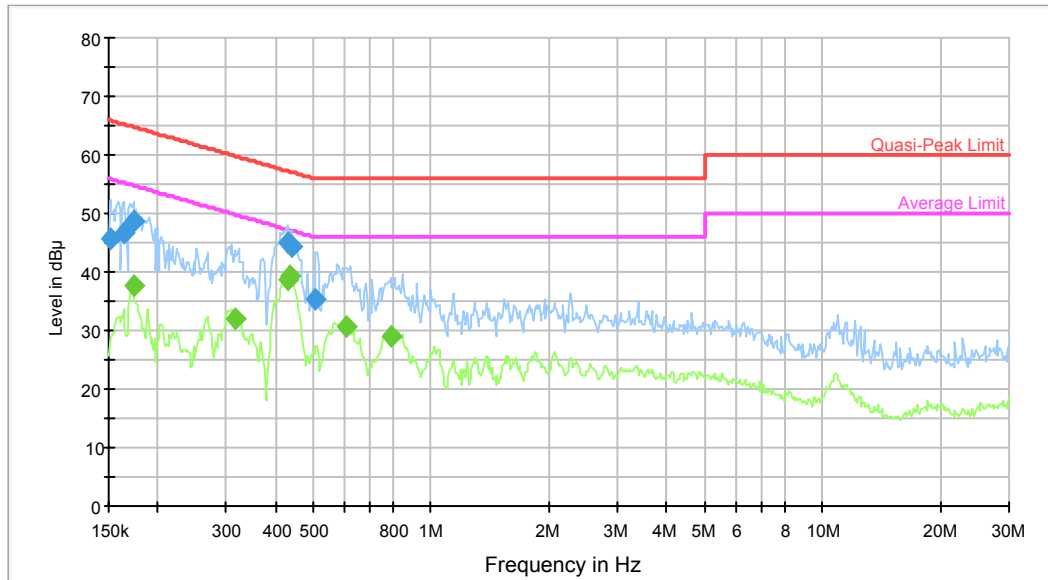
AC120 V, 60 Hz, Neutral:

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.151200	45.5	9.000	N	9.7	20.4	65.9	Compliance
0.163741	46.6	9.000	N	9.7	18.7	65.3	Compliance
0.173134	48.8	9.000	N	9.7	16.0	64.8	Compliance
0.429420	45.0	9.000	N	9.7	12.3	57.3	Compliance
0.439808	44.4	9.000	N	9.7	12.7	57.1	Compliance
0.507637	35.4	9.000	N	9.7	20.6	56.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.173134	37.7	9.000	N	9.7	17.1	54.8	Compliance
0.317235	32.1	9.000	N	9.7	17.7	49.8	Compliance
0.429420	38.6	9.000	N	9.7	8.7	47.3	Compliance
0.436318	39.3	9.000	N	9.7	7.8	47.1	Compliance
0.604902	30.5	9.000	N	9.7	15.5	46.0	Compliance
0.793127	29.0	9.000	N	9.7	17.0	46.0	Compliance


Supply by PoE:

AC120 V, 60 Hz, Line:

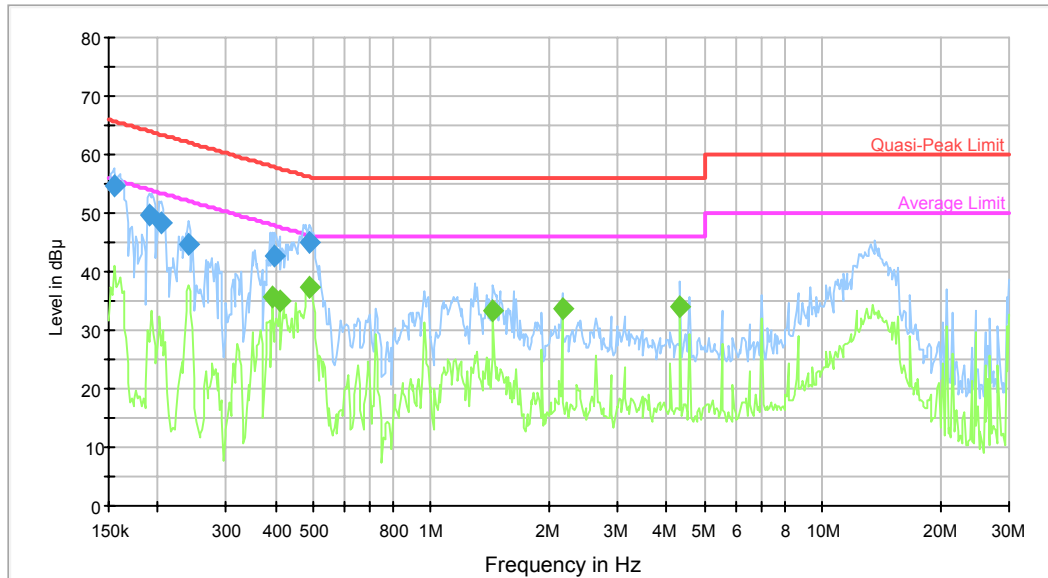

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.154858	54.6	9.000	L1	9.8	11.1	65.7	Compliance
0.190505	49.7	9.000	L1	9.7	14.3	64.0	Compliance
0.204669	48.3	9.000	L1	9.7	15.1	63.4	Compliance
0.240029	44.7	9.000	L1	9.7	17.4	62.1	Compliance
0.399703	42.7	9.000	L1	9.8	15.2	57.9	Compliance
0.487810	45.1	9.000	L1	9.8	11.1	56.2	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.393383	35.6	9.000	L1	9.8	12.4	48.0	Compliance
0.409372	35.0	9.000	L1	9.8	12.7	47.7	Compliance
0.487810	37.4	9.000	L1	9.8	8.8	46.2	Compliance
1.441726	33.2	9.000	L1	9.8	12.8	46.0	Compliance
2.164561	33.7	9.000	L1	9.8	12.3	46.0	Compliance
4.329484	34.1	9.000	L1	9.9	11.9	46.0	Compliance

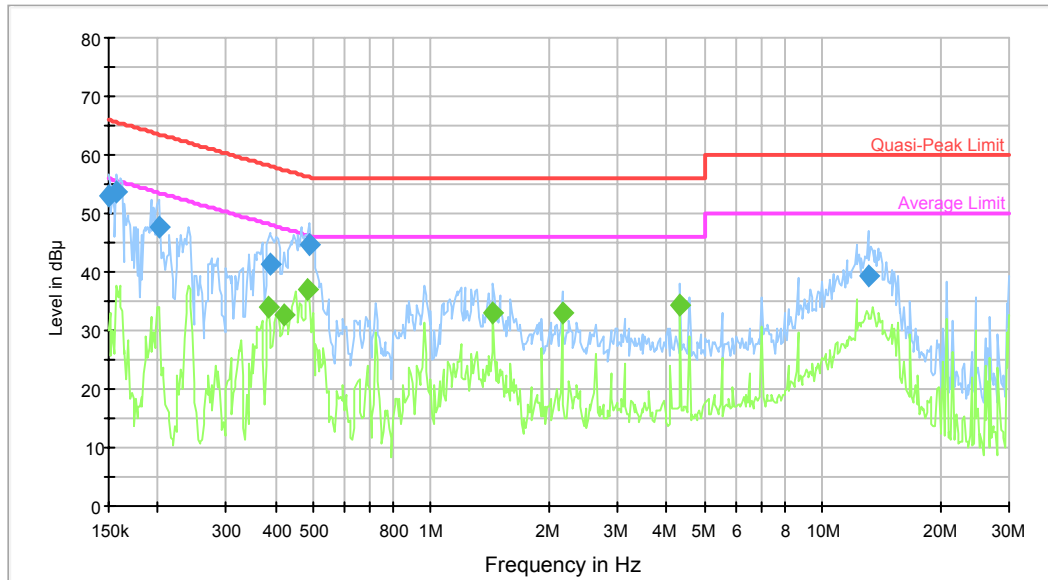AC120 V, 60 Hz, Neutral:

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	53.0	9.000	N	9.7	13.0	66.0	Compliance
0.157346	53.7	9.000	N	9.7	11.9	65.6	Compliance
0.201433	47.6	9.000	N	9.7	16.0	63.6	Compliance
0.387164	41.3	9.000	N	9.7	16.8	58.1	Compliance
0.487810	44.7	9.000	N	9.7	11.5	56.2	Compliance
13.105393	39.5	9.000	N	10.1	20.5	60.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.384091	34.2	9.000	N	9.7	14.0	48.2	Compliance
0.422630	32.7	9.000	N	9.7	14.7	47.4	Compliance
0.483938	36.9	9.000	N	9.7	9.4	46.3	Compliance
1.441726	32.8	9.000	N	9.8	13.2	46.0	Compliance
2.164561	33.1	9.000	N	9.8	12.9	46.0	Compliance
4.329484	34.4	9.000	N	9.9	11.6	46.0	Compliance

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard

FCC §15.247 (d); §15.209; §15.205;

Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cisp} of Table 2, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cisp} of Table 2, then:

- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{cisp})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{cisp})$, exceeds the disturbance limit.


Based on CISPR 16-4-2-2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Dongguan) is: 30M~200MHz: 4.58 dB for Horizontal, 4.59 dB for Vertical; 200M~1GHz: 4.83 dB for Horizontal, 5.85 dB for Vertical; 1G~6GHz: 4.45 dB, 6G~18GHz: 5.23 dB


Table 2 – Values of U_{cisp}

Measurement	U_{cisp}
Radiated disturbance (electric field strength at an OATS or in a SAC) (30 MHz to 1000 MHz)	6.3 dB
Radiated disturbance (electric field strength in a FAR) (1 GHz to 6 GHz)	5.2 dB
Radiated disturbance (electric field strength in a FAR) (6 GHz to 18 GHz)	5.5 dB

EUT Setup

Below 1GHz:

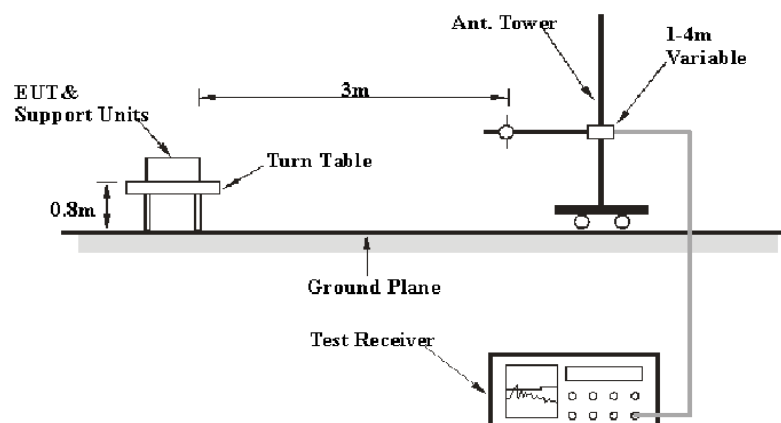

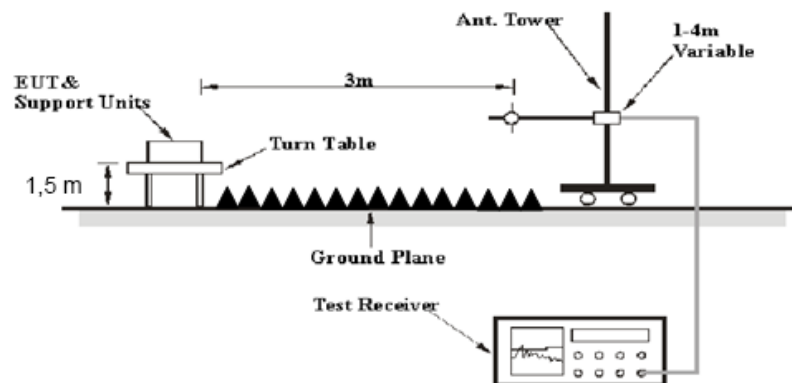Above 1GHz:

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits. The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	AV

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Loss} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2015-08-03	2016-08-02
Sunol Sciences	Antenna	JB3	A060611-3	2014-11-06	2017-11-05
HP	Amplifier	8447E	2434A02181	2015-09-01	2016-09-01
Agilent	Spectrum Analyzer	E4440A	SG43360054	2015-11-23	2016-11-22
ETS-Lindgren	Horn Antenna	3115	9808-5557	2015-09-06	2018-09-06
Mini-Circuit	Amplifier	ZVA-213-S+	054201245	2016-02-19	2017-02-19
R&S	Spectrum Analyzer	FSP 38	100478	2015-05-09	2016-05-09
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2014-06-16	2017-06-15
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2015-09-06	2016-09-06
N/A	Coaxial Cable	14m	N/A	2015-05-06	2016-05-06
N/A	Coaxial Cable	8m	N/A	2015-05-06	2016-05-06
N/A	Coaxial Cable	0.1m	N/A	2015-05-06	2016-05-06
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2015-05-06	2016-05-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Section 15.205, 15.209 and 15.247, with the worst margin reading of:

1.52 dB at 4924 MHz in the Vertical polarization for 802.11b Mode

Test Data

Environmental Conditions

Temperature:	24.4~24.7 °C
Relative Humidity:	50~68 %
ATM Pressure:	100.9~101.2kPa

* The testing was performed by Lion Xiao from 2016-03-21 to 2016-04-06.

Test Mode: Transmitting
802.11b Mode

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)					
Low Channel: 2412 MHz									
2412	72.66	PK	H	25.67	3.68	0.00	102.01	N/A	N/A
2412	68.69	AV	H	25.67	3.68	0.00	98.04	N/A	N/A
2412	77.75	PK	V	25.67	3.68	0.00	107.10	N/A	N/A
2412	74.21	AV	V	25.67	3.68	0.00	103.56	N/A	N/A
2390	29.91	PK	V	25.61	3.63	0.00	59.15	74.00	14.85
2390	18.26	AV	V	25.61	3.63	0.00	47.50	54.00	6.50
4824	47.09	PK	V	30.64	5.03	27.41	55.35	74.00	18.65
4824	43.84	AV	V	30.64	5.03	27.41	52.10	54.00	1.90
7236	37.13	PK	V	34.17	6.65	25.90	52.05	74.00	21.95
7236	28.88	AV	V	34.17	6.65	25.90	43.80	54.00	10.20
9648	30.44	PK	V	36.06	8.55	27.46	47.59	74.00	26.41
9648	19.27	AV	V	36.06	8.55	27.46	36.42	54.00	17.58
3055	35.64	PK	V	27.38	6.66	27.49	42.19	74.00	31.81
3055	23.21	AV	V	27.38	6.66	27.49	29.76	54.00	24.24
295.7	34.1	QP	V	13.96	2.08	21.52	28.62	46.00	17.38
Middle Channel: 2437 MHz									
2437	72.45	PK	H	25.74	3.75	0.00	101.94	N/A	N/A
2437	68.46	AV	H	25.74	3.75	0.00	97.95	N/A	N/A
2437	77.49	PK	V	25.74	3.75	0.00	106.98	N/A	N/A
2437	74.62	AV	V	25.74	3.75	0.00	104.11	N/A	N/A
4874	47.33	PK	V	30.77	5.14	27.42	55.82	74.00	18.18
4874	43.81	AV	V	30.77	5.14	27.42	52.30	54.00	1.70
7311	36.12	PK	V	34.35	6.74	25.88	51.33	74.00	22.67
7311	27.34	AV	V	34.35	6.74	25.88	42.55	54.00	11.45
9748	29.42	PK	V	36.30	8.61	27.24	47.09	74.00	26.91
9748	17.72	AV	V	36.30	8.61	27.24	35.39	54.00	18.61
3055	35.54	PK	V	27.38	6.66	27.49	42.09	74.00	31.91
3055	23.03	AV	V	27.38	6.66	27.49	29.58	54.00	24.42
3805	32.17	PK	V	29.47	4.66	27.38	38.92	74.00	35.08
3805	19.66	AV	V	29.47	4.66	27.38	26.41	54.00	27.59
295.7	34.4	QP	V	13.96	2.08	21.52	28.92	46.00	17.08
High Channel: 2462 MHz									
2462	72.11	PK	H	25.80	3.75	0.00	101.66	N/A	N/A
2462	68.32	AV	H	25.80	3.75	0.00	97.87	N/A	N/A
2462	77.23	PK	V	25.80	3.75	0.00	106.78	N/A	N/A
2462	74.48	AV	V	25.80	3.75	0.00	104.03	N/A	N/A
2483.5	28.86	PK	V	25.86	3.67	0.00	58.39	74.00	15.61
2483.5	17.23	AV	V	25.86	3.67	0.00	46.76	54.00	7.24
4924	47.87	PK	V	30.90	5.34	27.43	56.68	74.00	17.32
4924	43.67	AV	V	30.90	5.34	27.43	52.48	54.00	1.52
7386	34.92	PK	V	34.53	6.83	25.86	50.42	74.00	23.58
7386	24.16	AV	V	34.53	6.83	25.86	39.66	54.00	14.34
9848	29.78	PK	V	36.54	8.66	26.94	48.04	74.00	25.96
9848	16.77	AV	V	36.54	8.66	26.94	35.03	54.00	18.97
3055	35.51	PK	V	27.38	6.66	27.49	42.06	74.00	31.94
3055	23.02	AV	V	27.38	6.66	27.49	29.57	54.00	24.43
295.7	34.8	QP	V	13.96	2.08	21.52	29.32	46.00	16.68

802.11g Mode

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)					
Low Channel: 2412 MHz									
2412	71.74	PK	H	25.67	3.68	0.00	101.09	N/A	N/A
2412	60.91	AV	H	25.67	3.68	0.00	90.26	N/A	N/A
2412	77.21	PK	V	25.67	3.68	0.00	106.56	N/A	N/A
2412	66.6	AV	V	25.67	3.68	0.00	95.95	N/A	N/A
2390	34.88	PK	V	25.61	3.63	0.00	64.12	74.00	9.88
2390	22.4	AV	V	25.61	3.63	0.00	51.64	54.00	2.36
4824	40.26	PK	V	30.64	5.03	27.41	48.52	74.00	25.48
4824	25.8	AV	V	30.64	5.03	27.41	34.06	54.00	19.94
7236	36.35	PK	V	34.17	6.65	25.90	51.27	74.00	22.73
7236	21.56	AV	V	34.17	6.65	25.90	36.48	54.00	17.52
9648	29.4	PK	V	36.06	8.55	27.46	46.55	74.00	27.45
9648	15.99	AV	V	36.06	8.55	27.46	33.14	54.00	20.86
3055	35.62	PK	V	27.38	6.66	27.49	42.17	74.00	31.83
3055	23.25	AV	V	27.38	6.66	27.49	29.80	54.00	24.20
295.7	34.5	QP	V	13.96	2.08	21.52	29.02	46.00	16.98
Middle Channel: 2437 MHz									
2437	71.39	PK	H	25.74	3.75	0.00	100.88	N/A	N/A
2437	60.76	AV	H	25.74	3.75	0.00	90.25	N/A	N/A
2437	76.81	PK	V	25.74	3.75	0.00	106.30	N/A	N/A
2437	66.43	AV	V	25.74	3.75	0.00	95.92	N/A	N/A
4874	40.28	PK	V	30.77	5.14	27.42	48.77	74.00	25.23
4874	25.57	AV	V	30.77	5.14	27.42	34.06	54.00	19.94
7311	34.31	PK	V	34.35	6.74	25.88	49.52	74.00	24.48
7311	21.08	AV	V	34.35	6.74	25.88	36.29	54.00	17.71
9748	29.39	PK	V	36.30	8.61	27.24	47.06	74.00	26.94
9748	16.14	AV	V	36.30	8.61	27.24	33.81	54.00	20.19
3055	35.91	PK	V	27.38	6.66	27.49	42.46	74.00	31.54
3055	23.46	AV	V	27.38	6.66	27.49	30.01	54.00	23.99
3805	32.43	PK	V	29.47	4.66	27.38	39.18	74.00	34.82
3805	19.88	AV	V	29.47	4.66	27.38	26.63	54.00	27.37
295.7	34.9	QP	V	13.96	2.08	21.52	29.42	46.00	16.58
High Channel: 2462 MHz									
2462	71.05	PK	H	25.80	3.75	0.00	100.60	N/A	N/A
2462	60.64	AV	H	25.80	3.75	0.00	90.19	N/A	N/A
2462	76.56	PK	V	25.80	3.75	0.00	106.11	N/A	N/A
2462	66.21	AV	V	25.80	3.75	0.00	95.76	N/A	N/A
2483.5	33.43	PK	V	25.86	3.67	0.00	62.96	74.00	11.04
2483.5	21.47	AV	V	25.86	3.67	0.00	51.00	54.00	3.00
4924	36.21	PK	V	30.90	5.34	27.43	45.02	74.00	28.98
4924	22.17	AV	V	30.90	5.34	27.43	30.98	54.00	23.02
7386	33.51	PK	V	34.53	6.83	25.86	49.01	74.00	24.99
7386	19.88	AV	V	34.53	6.83	25.86	35.38	54.00	18.62
9848	29.58	PK	V	36.54	8.66	26.94	47.84	74.00	26.16
9848	16.31	AV	V	36.54	8.66	26.94	34.57	54.00	19.43
3055	35.55	PK	V	27.38	6.66	27.49	42.10	74.00	31.90
3055	23.06	AV	V	27.38	6.66	27.49	29.61	54.00	24.39
295.7	34.2	QP	V	13.96	2.08	21.52	28.72	46.00	17.28

802.11 n ht20 Mode


Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)					
Low Channel: 2412 MHz									
2412	68.4	PK	H	25.67	3.68	0.00	97.75	N/A	N/A
2412	57.41	AV	H	25.67	3.68	0.00	86.76	N/A	N/A
2412	75.71	PK	V	25.67	3.68	0.00	105.06	N/A	N/A
2412	64.8	AV	V	25.67	3.68	0.00	94.15	N/A	N/A
2390	34.51	PK	V	25.61	3.63	0.00	63.75	74.00	10.25
2390	22.76	AV	V	25.61	3.63	0.00	52.00	54.00	2.00
4824	36.32	PK	V	30.64	5.03	27.41	44.58	74.00	29.42
4824	20.75	AV	V	30.64	5.03	27.41	29.01	54.00	24.99
7236	33.93	PK	V	34.17	6.65	25.90	48.85	74.00	25.15
7236	20.09	AV	V	34.17	6.65	25.90	35.01	54.00	18.99
9648	29.32	PK	V	36.06	8.55	27.46	46.47	74.00	27.53
9648	15.95	AV	V	36.06	8.55	27.46	33.10	54.00	20.90
3055	35.46	PK	V	27.38	6.66	27.49	42.01	74.00	31.99
3055	23.02	AV	V	27.38	6.66	27.49	29.57	54.00	24.43
295.7	34.4	QP	V	13.96	2.08	21.52	28.92	46.00	17.08
Middle Channel: 2437 MHz									
2437	68.45	PK	H	25.74	3.75	0.00	97.94	N/A	N/A
2437	57.25	AV	H	25.74	3.75	0.00	86.74	N/A	N/A
2437	75.74	PK	V	25.74	3.75	0.00	105.23	N/A	N/A
2437	64.43	AV	V	25.74	3.75	0.00	93.92	N/A	N/A
4874	34.18	PK	V	30.77	5.14	27.42	42.67	74.00	31.33
4874	20.37	AV	V	30.77	5.14	27.42	28.86	54.00	25.14
7311	33.31	PK	V	34.35	6.74	25.88	48.52	74.00	25.48
7311	19.81	AV	V	34.35	6.74	25.88	35.02	54.00	18.98
9748	29.27	PK	V	36.30	8.61	27.24	46.94	74.00	27.06
9748	16.11	AV	V	36.30	8.61	27.24	33.78	54.00	20.22
3055	35.03	PK	V	27.38	6.66	27.49	41.58	74.00	32.42
3055	23.59	AV	V	27.38	6.66	27.49	30.14	54.00	23.86
3805	32.34	PK	V	29.47	4.66	27.38	39.09	74.00	34.91
3805	19.95	AV	V	29.47	4.66	27.38	26.70	54.00	27.30
295.7	34.6	QP	V	13.96	2.08	21.52	29.12	46.00	16.88
High Channel: 2462 MHz									
2462	68.14	PK	H	25.80	3.75	0.00	97.69	N/A	N/A
2462	57.08	AV	H	25.80	3.75	0.00	86.63	N/A	N/A
2462	75.47	PK	V	25.80	3.75	0.00	105.02	N/A	N/A
2462	64.27	AV	V	25.80	3.75	0.00	93.82	N/A	N/A
2483.5	32.81	PK	V	25.86	3.67	0.00	62.34	74.00	11.66
2483.5	21.57	AV	V	25.86	3.67	0.00	51.10	54.00	2.90
4924	35.51	PK	V	30.90	5.34	27.43	44.32	74.00	29.68
4924	21.34	AV	V	30.90	5.34	27.43	30.15	54.00	23.85
7386	33.07	PK	V	34.53	6.83	25.86	48.57	74.00	25.43
7386	19.16	AV	V	34.53	6.83	25.86	34.66	54.00	19.34
9848	29.89	PK	V	36.54	8.66	26.94	48.15	74.00	25.85
9848	16.25	AV	V	36.54	8.66	26.94	34.51	54.00	19.49
3055	35.49	PK	V	27.38	6.66	27.49	42.04	74.00	31.96
3055	23.98	AV	V	27.38	6.66	27.49	30.53	54.00	23.47
295.7	34	QP	V	13.96	2.08	21.52	28.52	46.00	17.48

802.11 n ht40 Mode


Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)					
Low Channel: 2422 MHz									
2422	68.71	PK	H	25.70	3.71	0.00	98.12	N/A	N/A
2422	57.12	AV	H	25.70	3.71	0.00	86.53	N/A	N/A
2422	75.6	PK	V	25.70	3.71	0.00	105.01	N/A	N/A
2422	64.22	AV	V	25.70	3.71	0.00	93.63	N/A	N/A
2390	34.72	PK	V	25.61	3.63	0.00	63.96	74.00	10.04
2390	22.96	AV	V	25.61	3.63	0.00	52.20	54.00	1.80
4844	33.15	PK	V	30.69	4.99	27.42	41.41	74.00	32.59
4844	19.7	AV	V	30.69	4.99	27.42	27.96	54.00	26.04
7266	32.92	PK	V	34.24	6.68	25.89	47.95	74.00	26.05
7266	19.52	AV	V	34.24	6.68	25.89	34.55	54.00	19.45
9688	29.57	PK	V	36.15	8.58	27.37	46.93	74.00	27.07
9688	15.94	AV	V	36.15	8.58	27.37	33.30	54.00	20.70
3055	35.69	PK	V	27.38	6.66	27.49	42.24	74.00	31.76
3055	23.21	AV	V	27.38	6.66	27.49	29.76	54.00	24.24
295.7	34.7	QP	V	13.96	2.08	21.52	29.22	46.00	16.78
Middle Channel: 2437 MHz									
2437	69.68	PK	H	25.74	3.75	0.00	99.17	N/A	N/A
2437	57.9	AV	H	25.74	3.75	0.00	87.39	N/A	N/A
2437	76.3	PK	V	25.74	3.75	0.00	105.79	N/A	N/A
2437	64.8	AV	V	25.74	3.75	0.00	94.29	N/A	N/A
4874	33.15	PK	V	30.77	5.14	27.42	41.64	74.00	32.36
4874	19.18	AV	V	30.77	5.14	27.42	27.67	54.00	26.33
7311	32.82	PK	V	34.35	6.74	25.88	48.03	74.00	25.97
7311	19.2	AV	V	34.35	6.74	25.88	34.41	54.00	19.59
9748	29.64	PK	V	36.30	8.61	27.24	47.31	74.00	26.69
9748	16.09	AV	V	36.30	8.61	27.24	33.76	54.00	20.24
3055	35.02	PK	V	27.38	6.66	27.49	41.57	74.00	32.43
3055	23.58	AV	V	27.38	6.66	27.49	30.13	54.00	23.87
3805	32.36	PK	V	29.47	4.66	27.38	39.11	74.00	34.89
3805	19.77	AV	V	29.47	4.66	27.38	26.52	54.00	27.48
295.7	34.3	QP	V	13.96	2.08	21.52	28.82	46.00	17.18
High Channel: 2452 MHz									
2452	69.23	PK	H	25.78	3.78	0.00	98.79	N/A	N/A
2452	57.67	AV	H	25.78	3.78	0.00	87.23	N/A	N/A
2452	76.19	PK	V	25.78	3.78	0.00	105.75	N/A	N/A
2452	64.53	AV	V	25.78	3.78	0.00	94.09	N/A	N/A
2483.5	33.68	PK	V	25.86	3.67	0.00	63.21	74.00	10.79
2483.5	21.57	AV	V	25.86	3.67	0.00	51.10	54.00	2.90
4904	32.74	PK	V	30.85	5.31	27.43	41.47	74.00	32.53
4904	19.56	AV	V	30.85	5.31	27.43	28.29	54.00	25.71
7356	32.54	PK	V	34.45	6.79	25.87	47.91	74.00	26.09
7356	19.02	AV	V	34.45	6.79	25.87	34.39	54.00	19.61
9808	29.75	PK	V	36.44	8.64	27.09	47.74	74.00	26.26
9808	16.22	AV	V	36.44	8.64	27.09	34.21	54.00	19.79
3055	35.74	PK	V	27.38	6.66	27.49	42.29	74.00	31.71
3055	23.23	AV	V	27.38	6.66	27.49	29.78	54.00	24.22
295.7	34.8	QP	V	13.96	2.08	21.52	29.32	46.00	16.68

Conducted Spurious Emissions at Antenna Port


Chain 0, 802.11b Low Channel

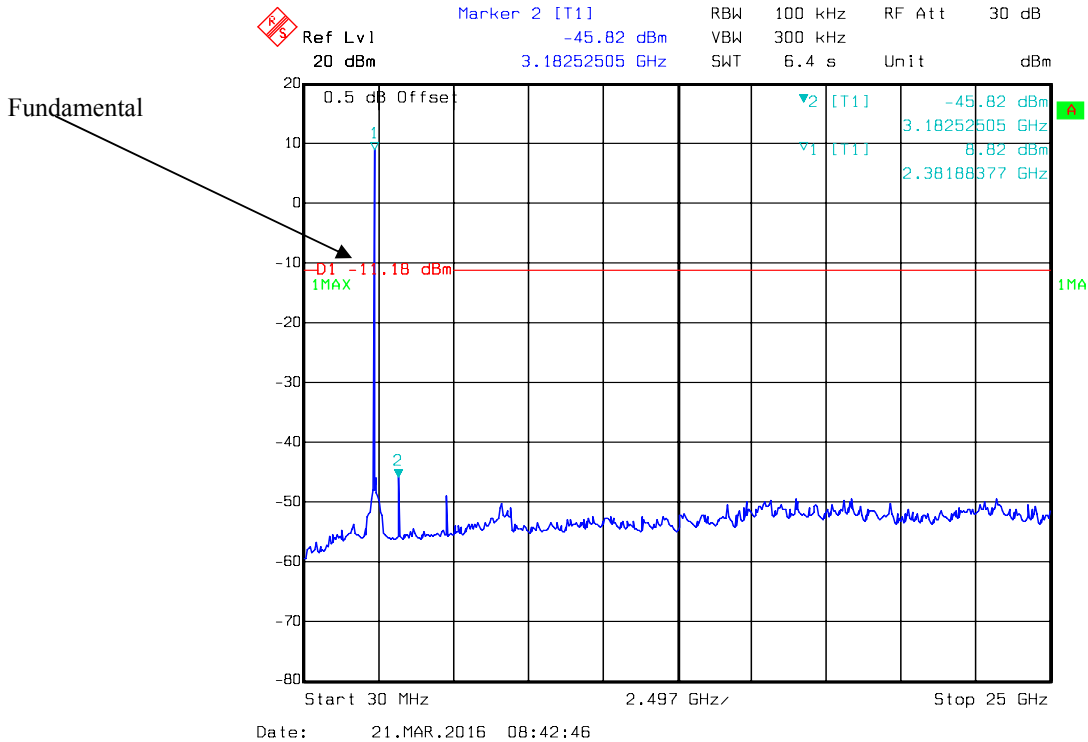


Chain 0, 802.11b Middle Channel

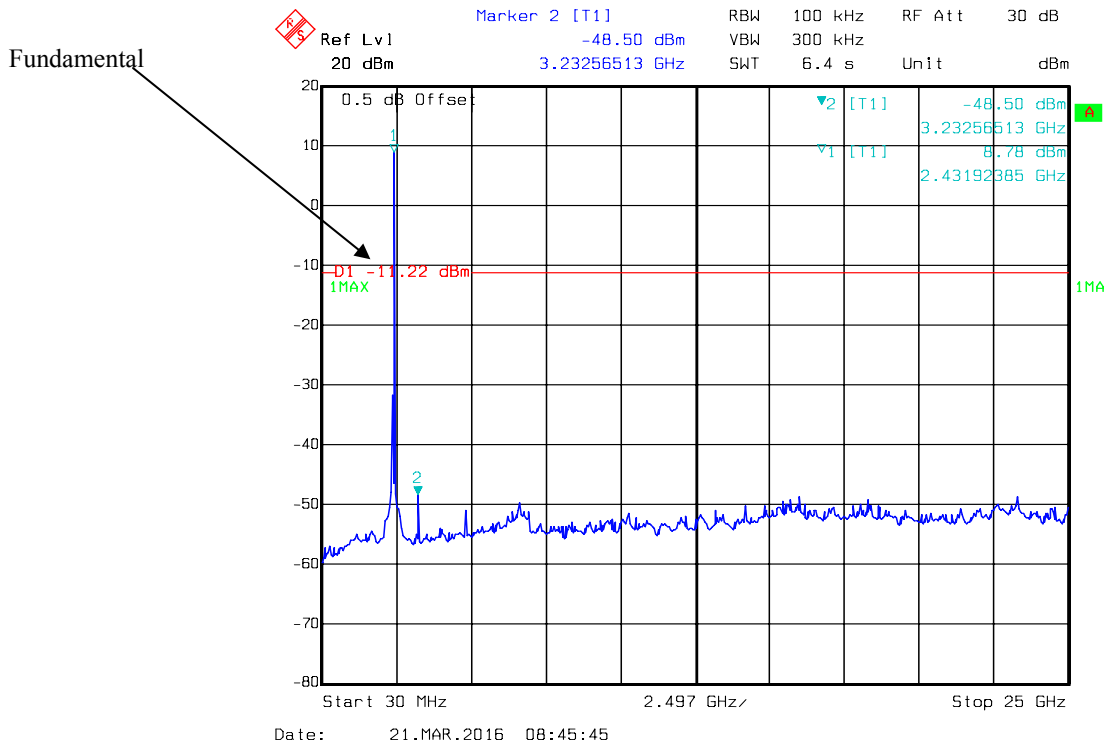


Chain 0, 802.11b High Channel

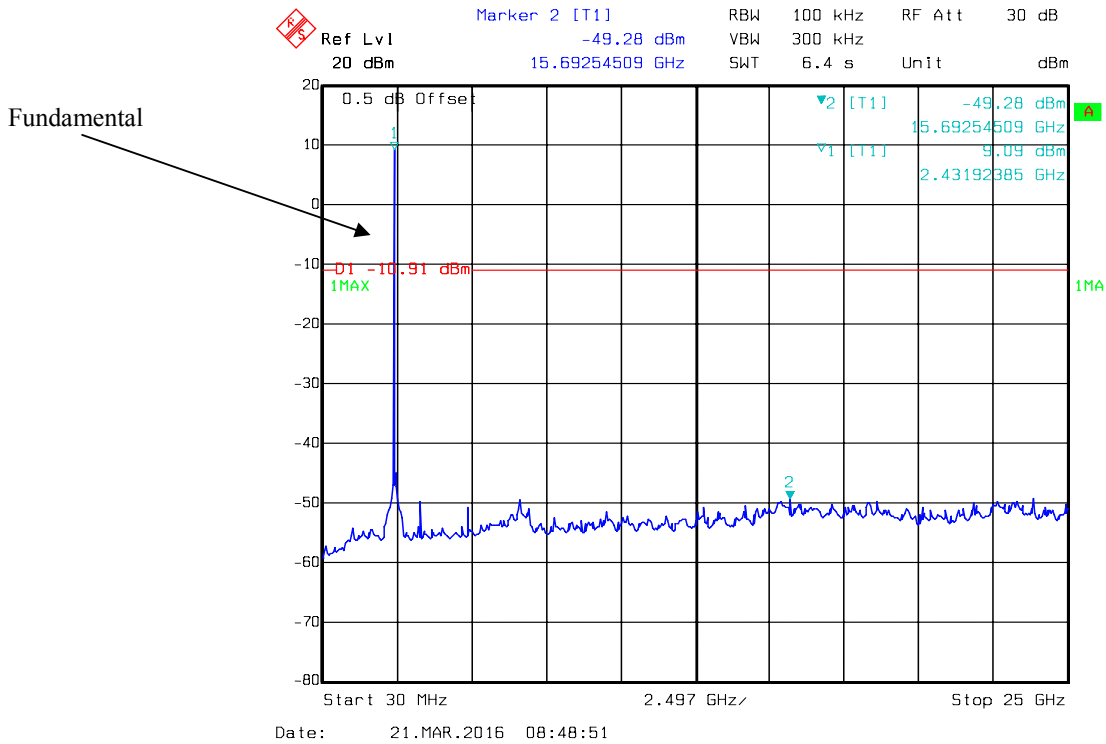


Chain 0, 802.11g Low Channel

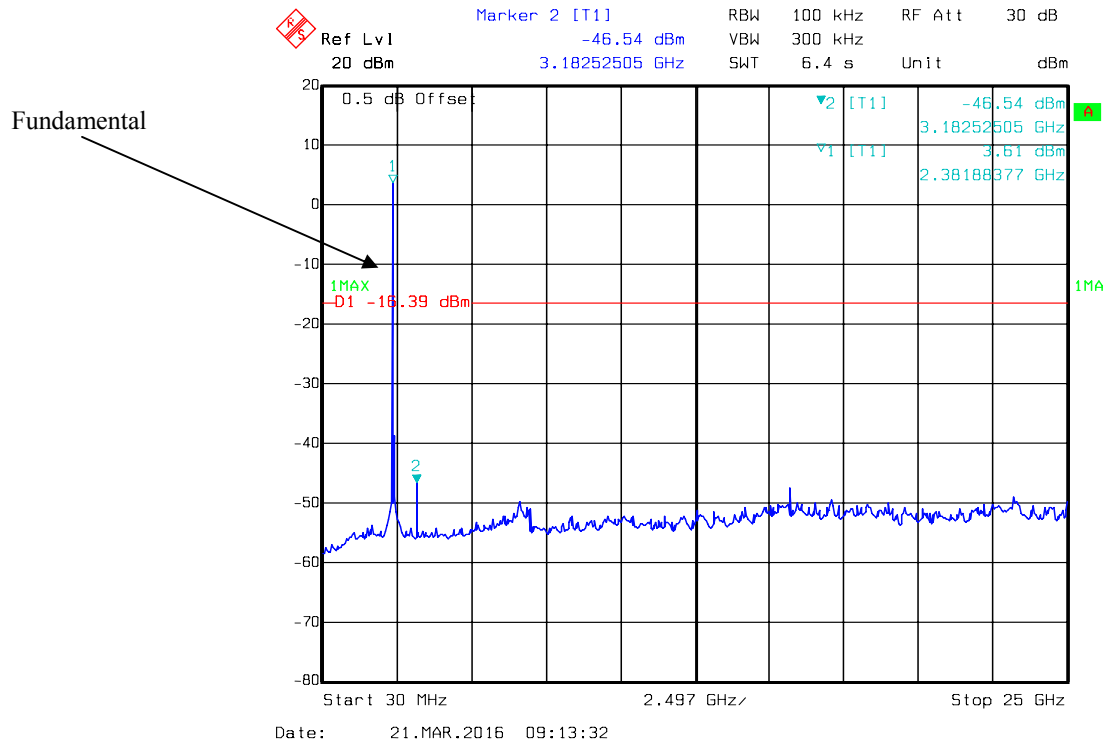


Chain 0, 802.11g Middle Channel

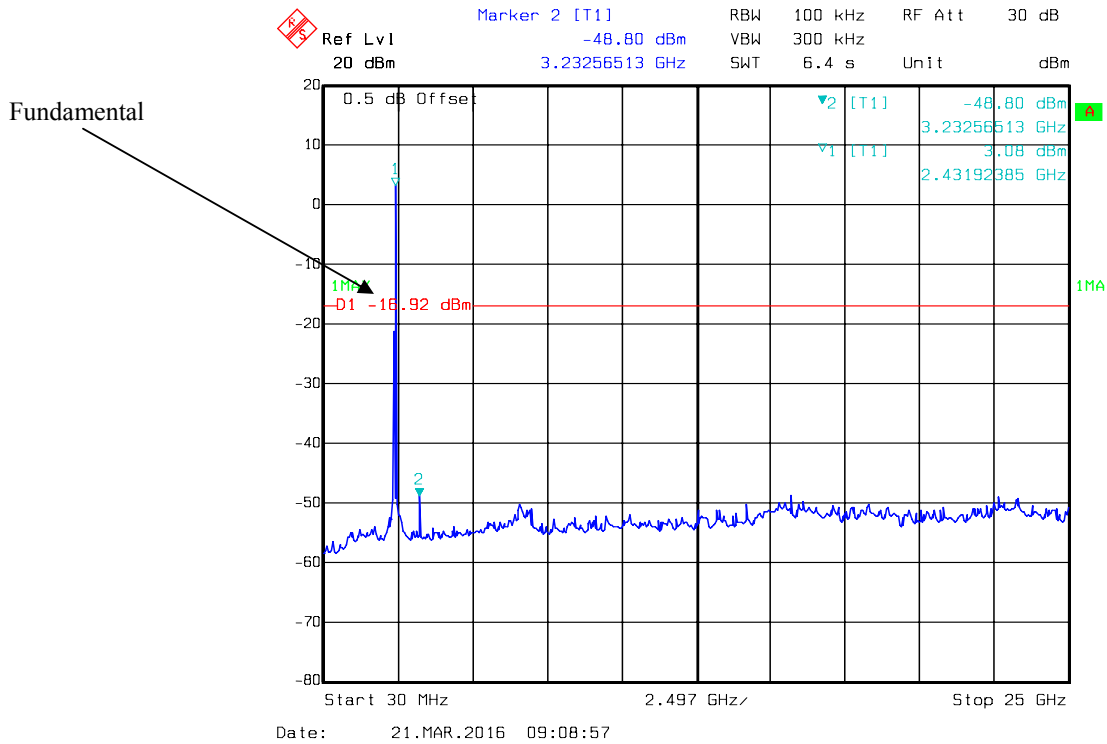


Chain 0, 802.11g High Channel

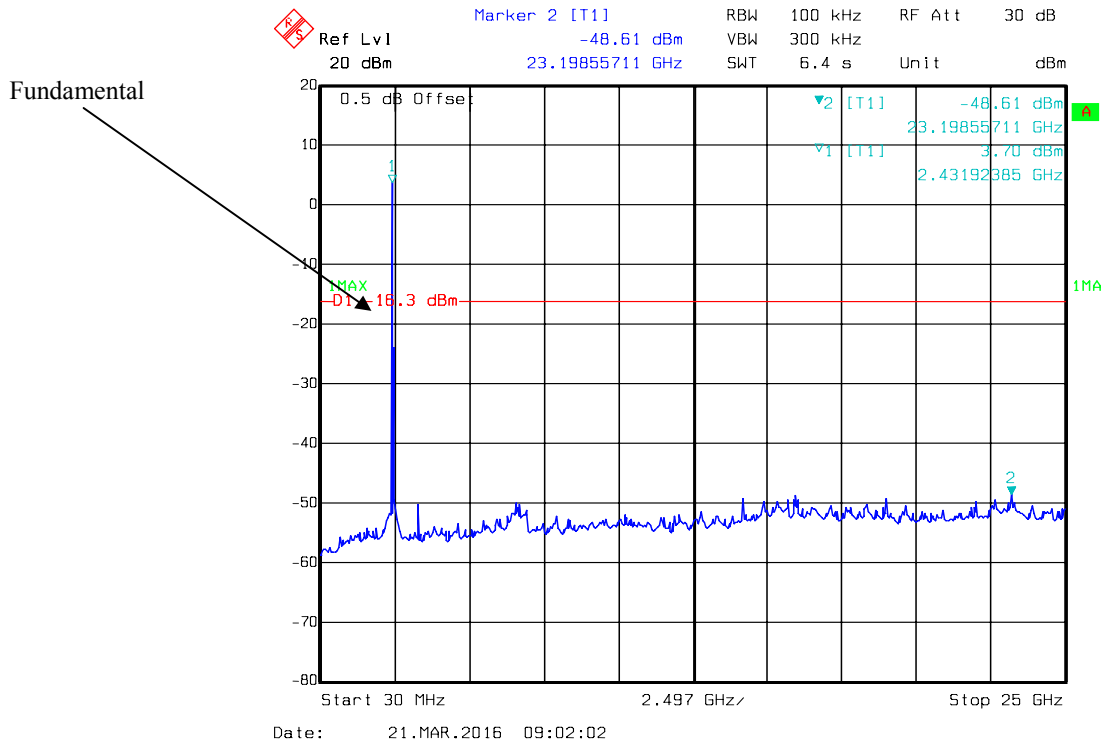


Chain 0, 802.11n ht20 Low Channel

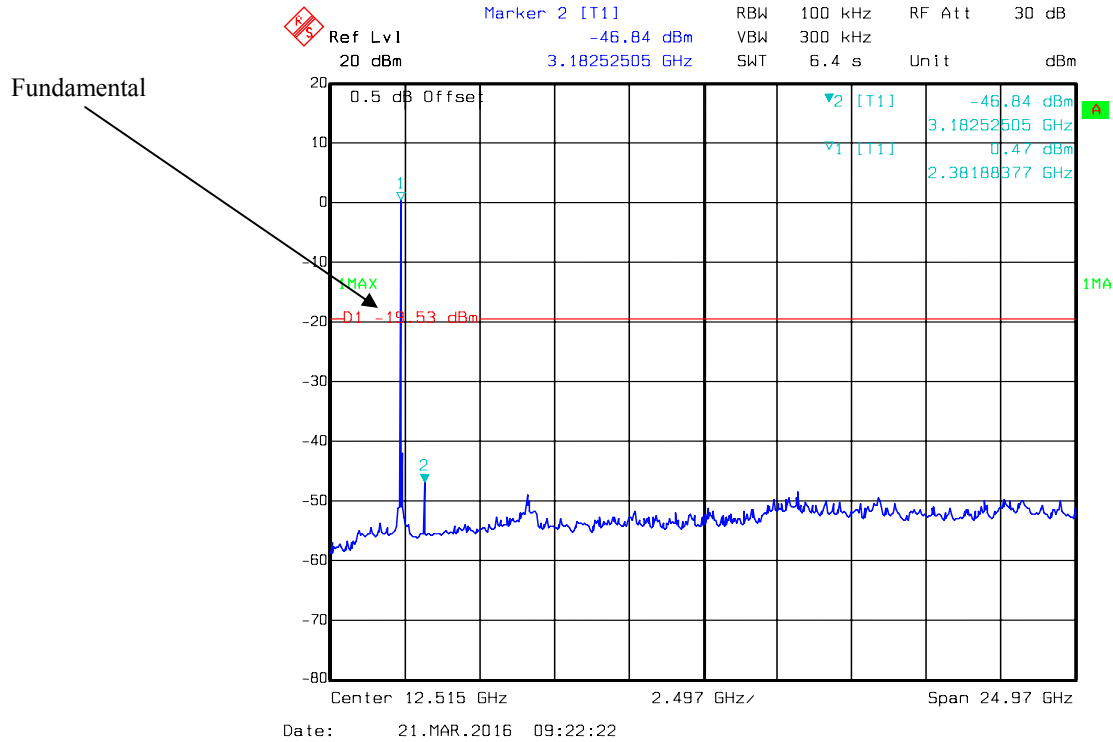


Chain 0, 802.11n ht20 Middle Channel

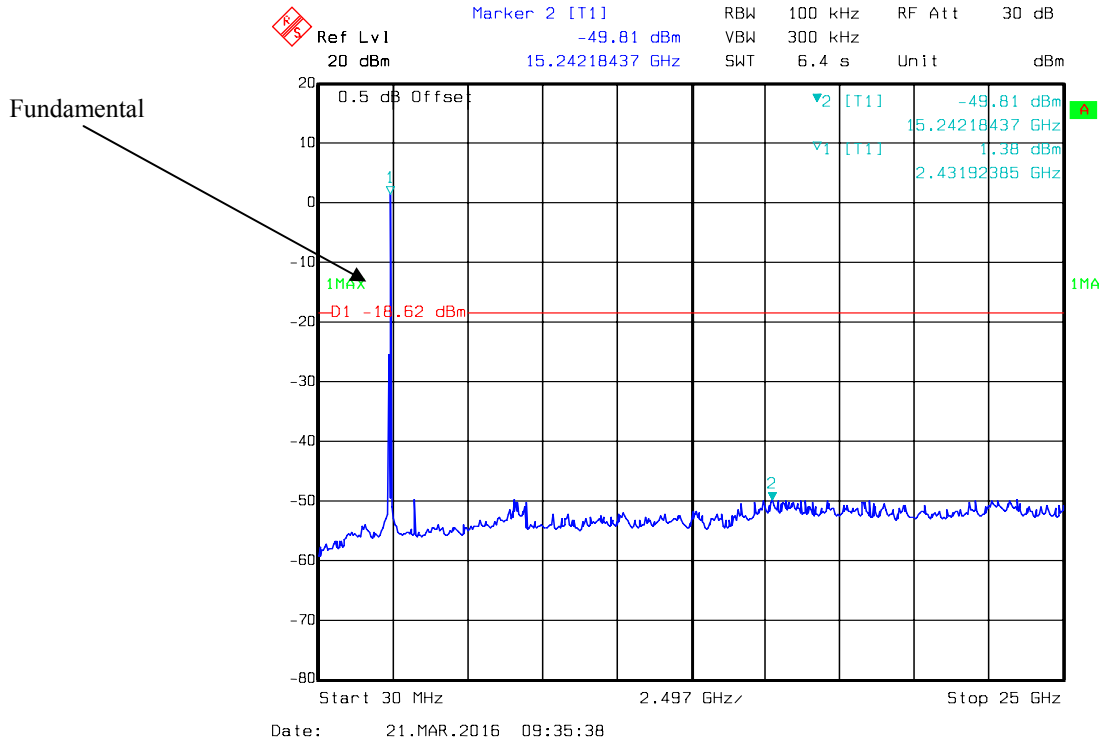


Chain 0, 802.11n ht20 High Channel

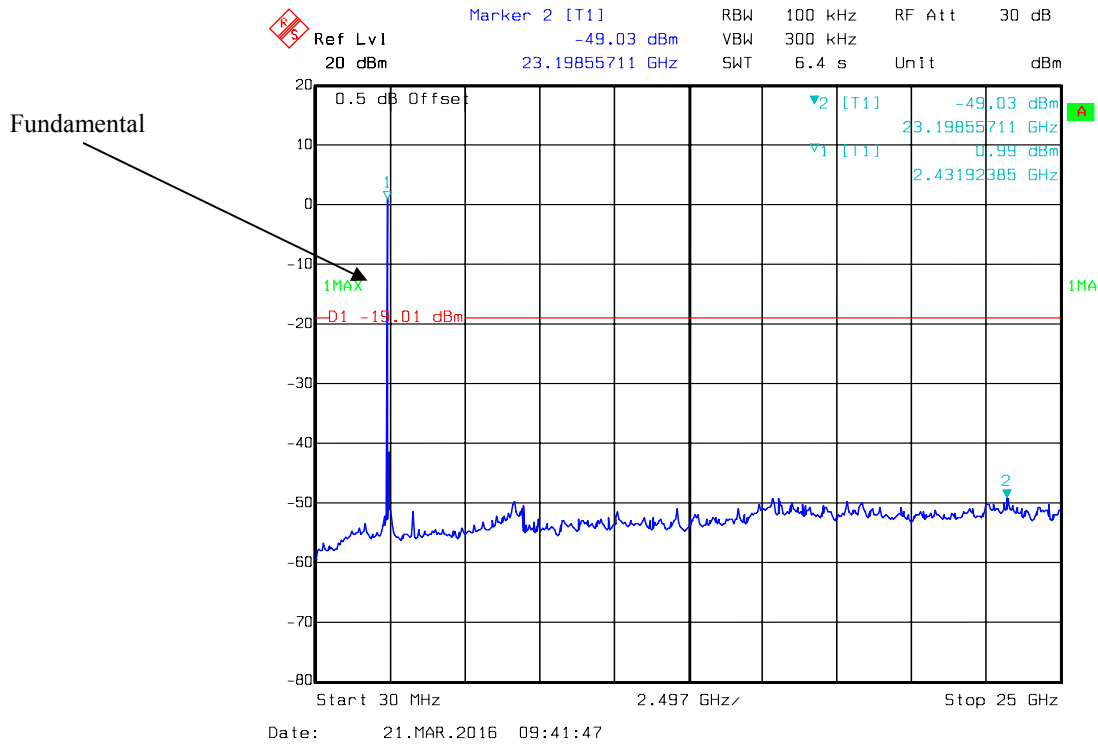


Chain 0, 802.11n ht40 Low Channel

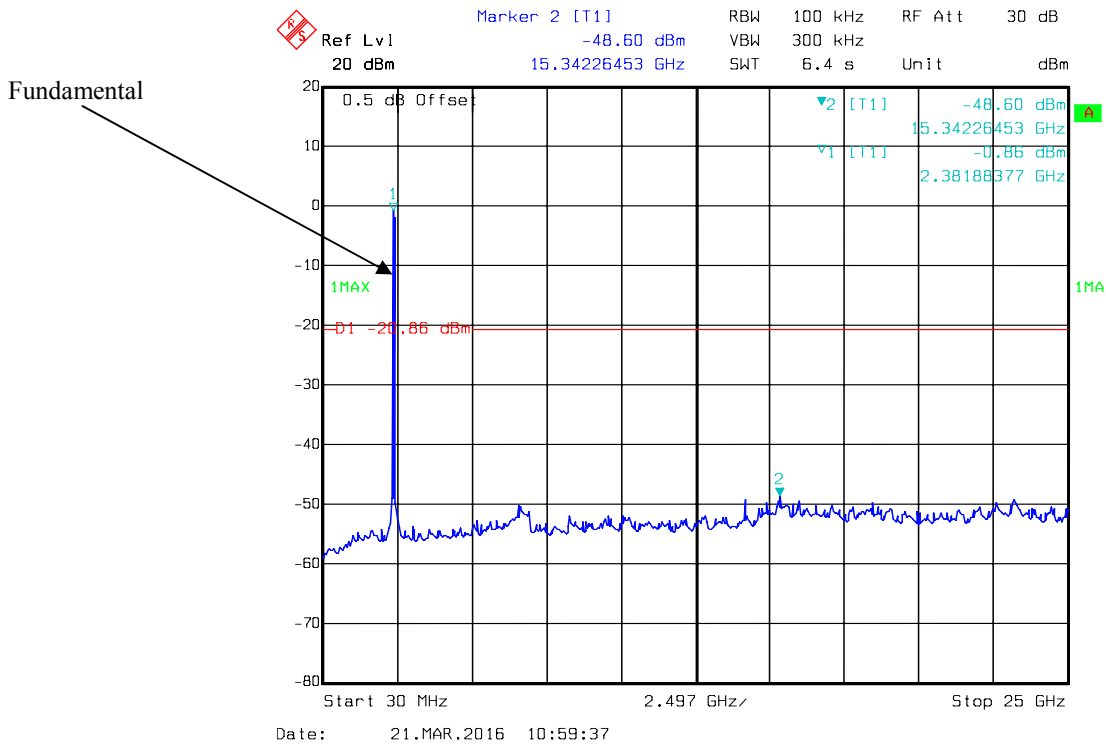


Chain 0, 802.11n ht40 Middle Channel

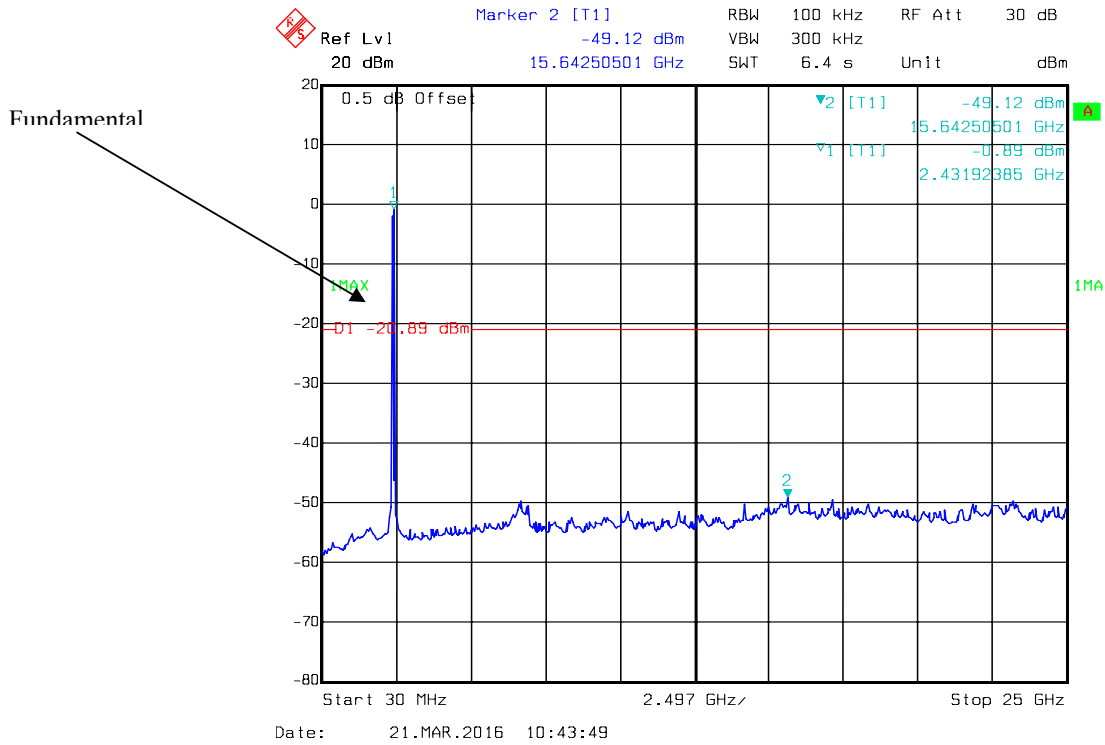


Chain 0, 802.11n ht40 High Channel

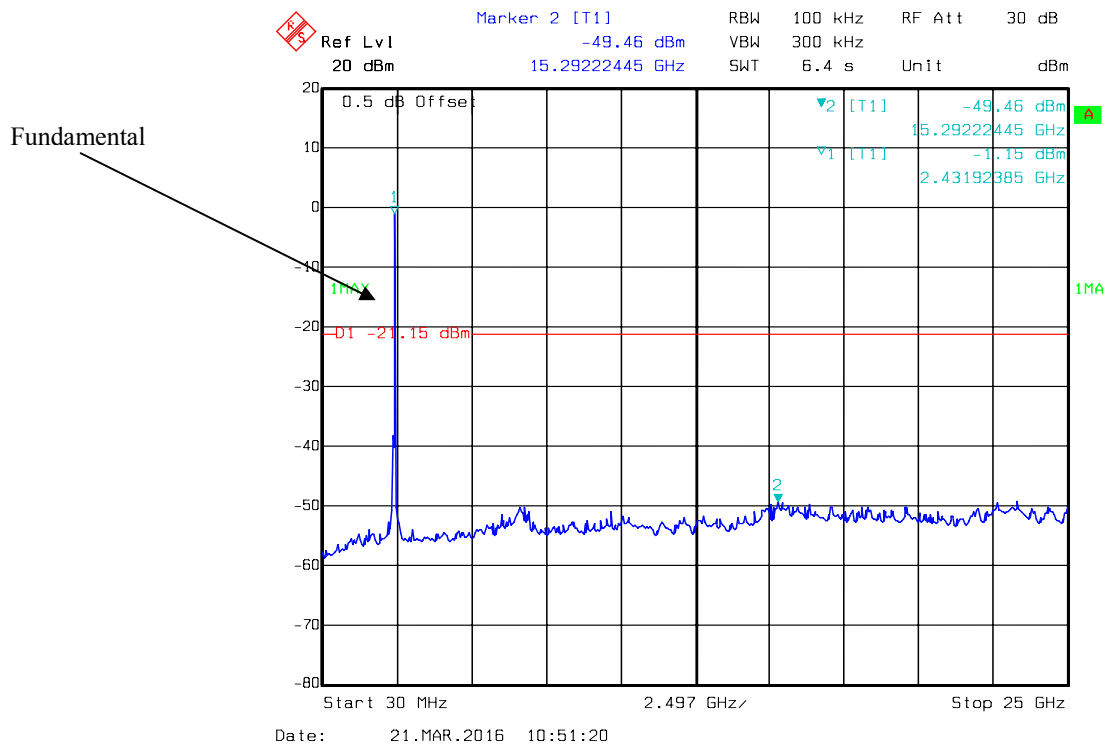


Chain 1, 802.11b Low Channel

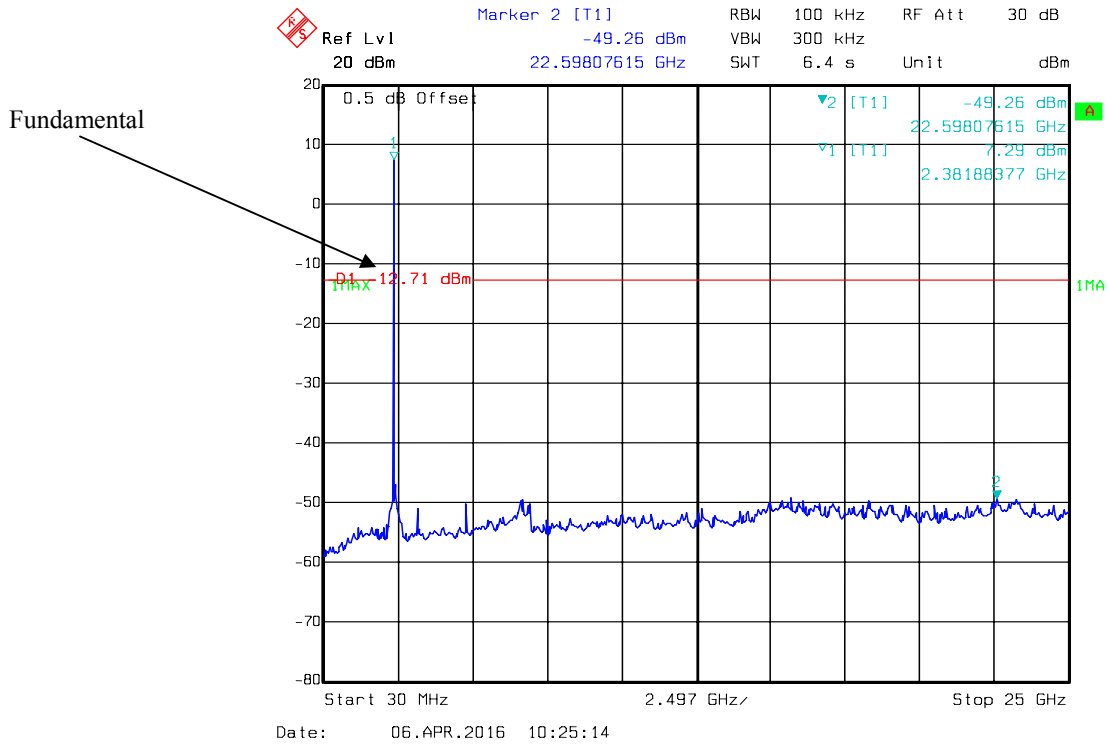


Chain 1, 802.11b Middle Channel

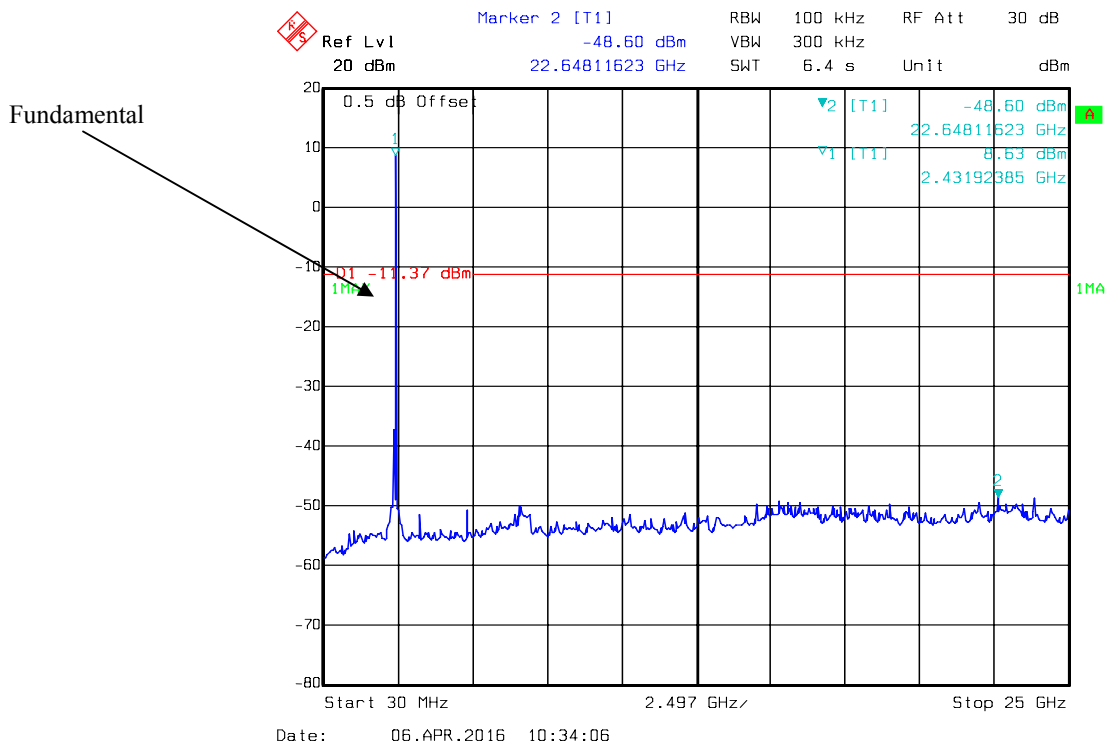


Chain 1, 802.11b High Channel

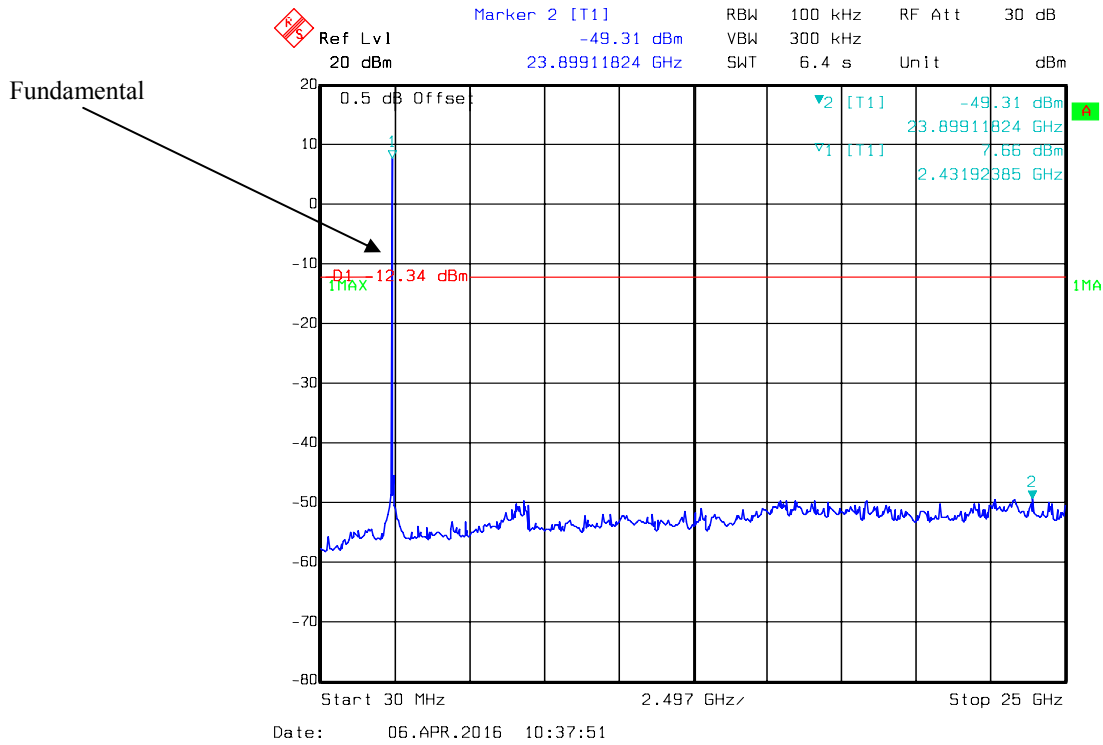


Chain 1, 802.11g Low Channel

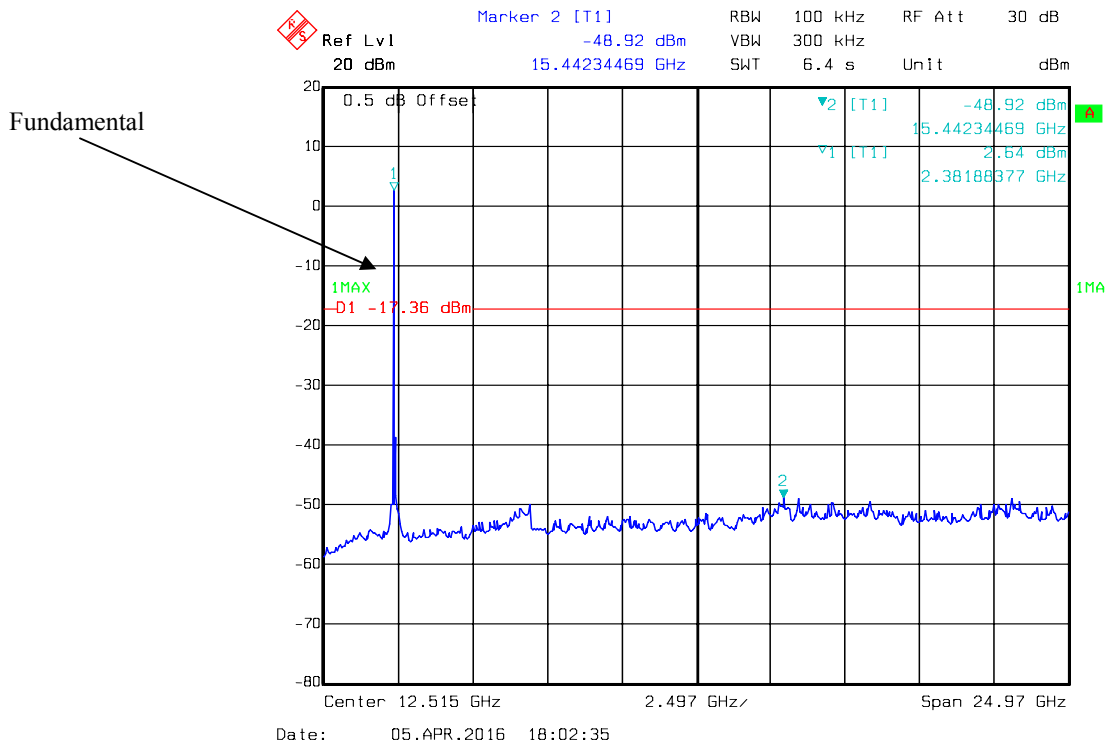


Chain 1, 802.11g Middle Channel

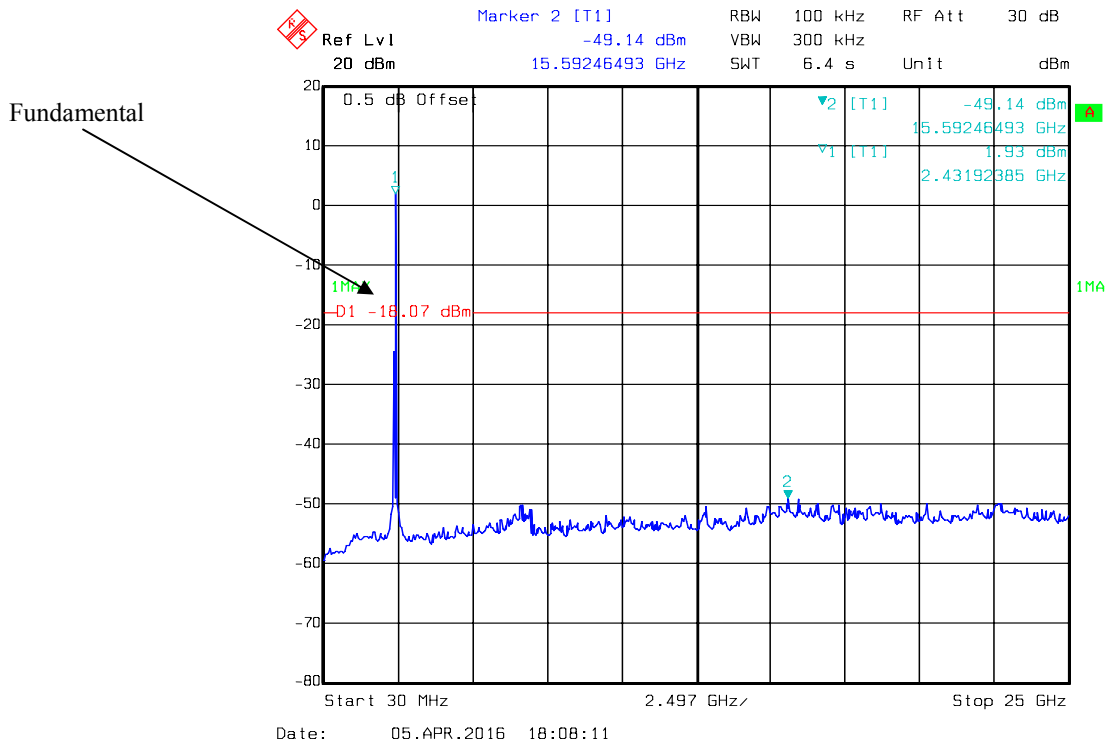


Chain 1, 802.11g High Channel

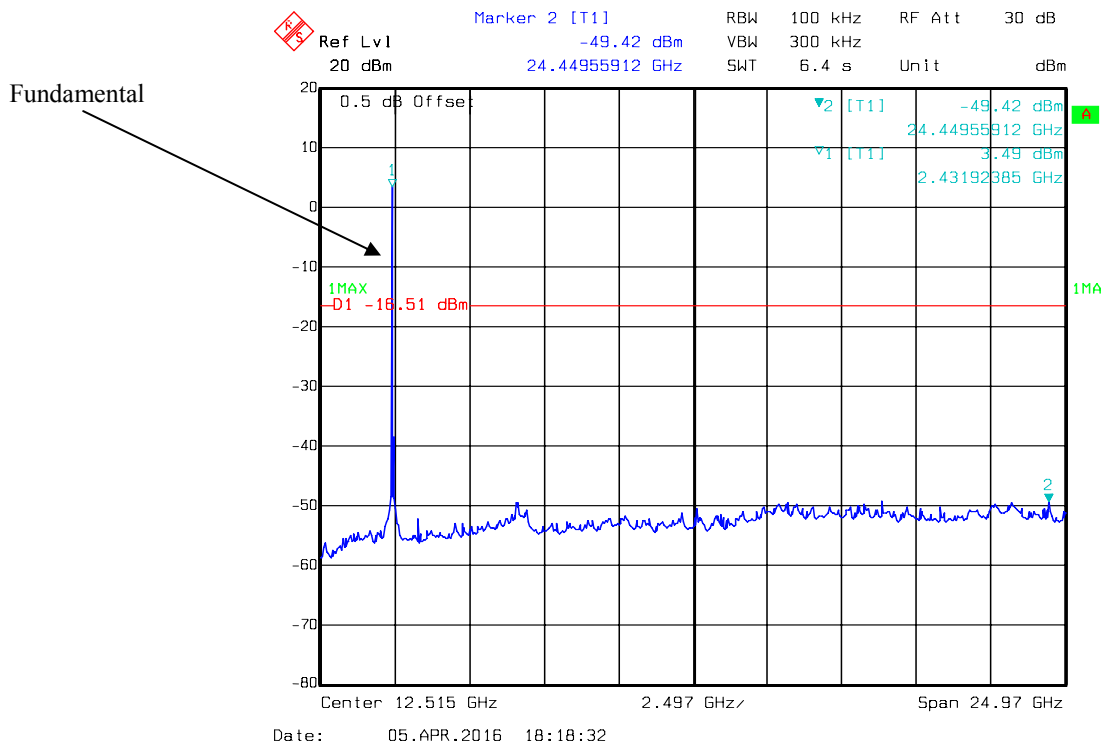


Chain 1, 802.11n ht20 Low Channel

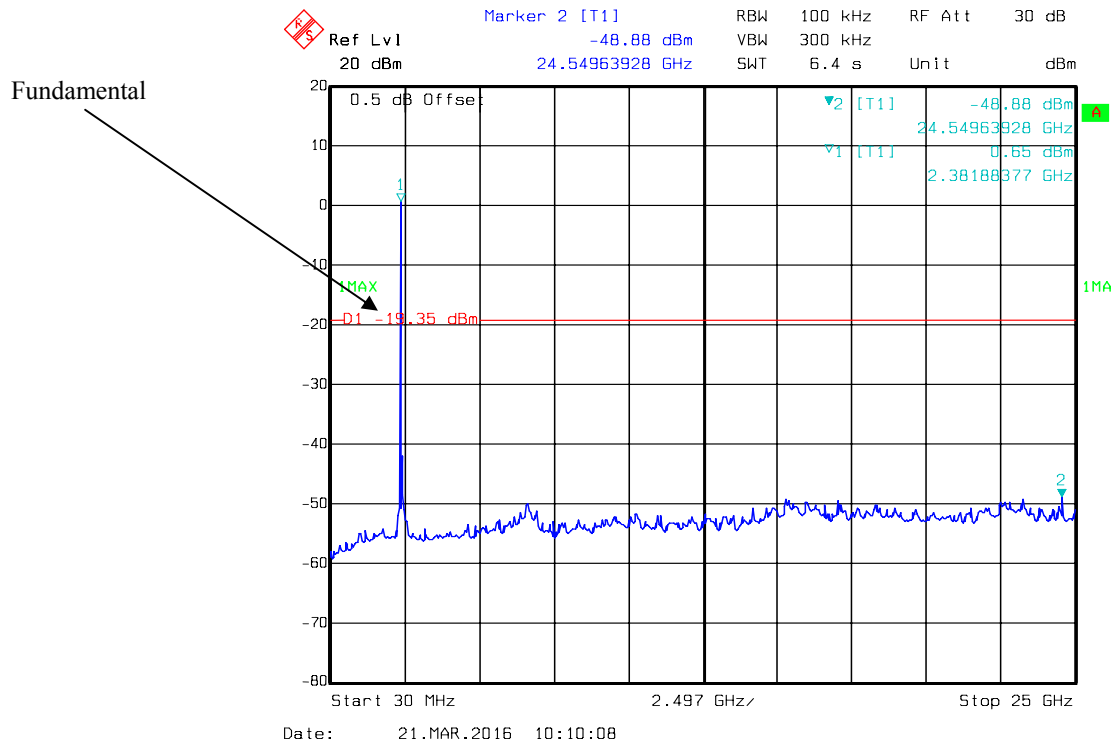


Chain 1, 802.11n ht20 Middle Channel

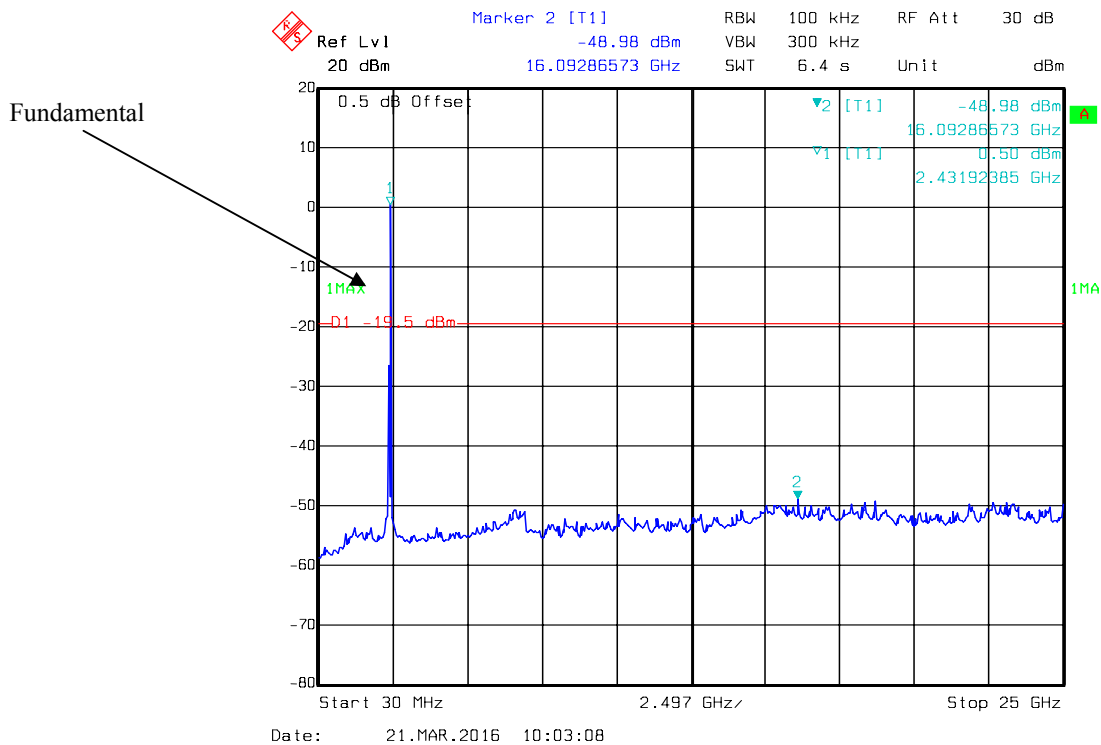


Chain 1, 802.11n ht20 High Channel

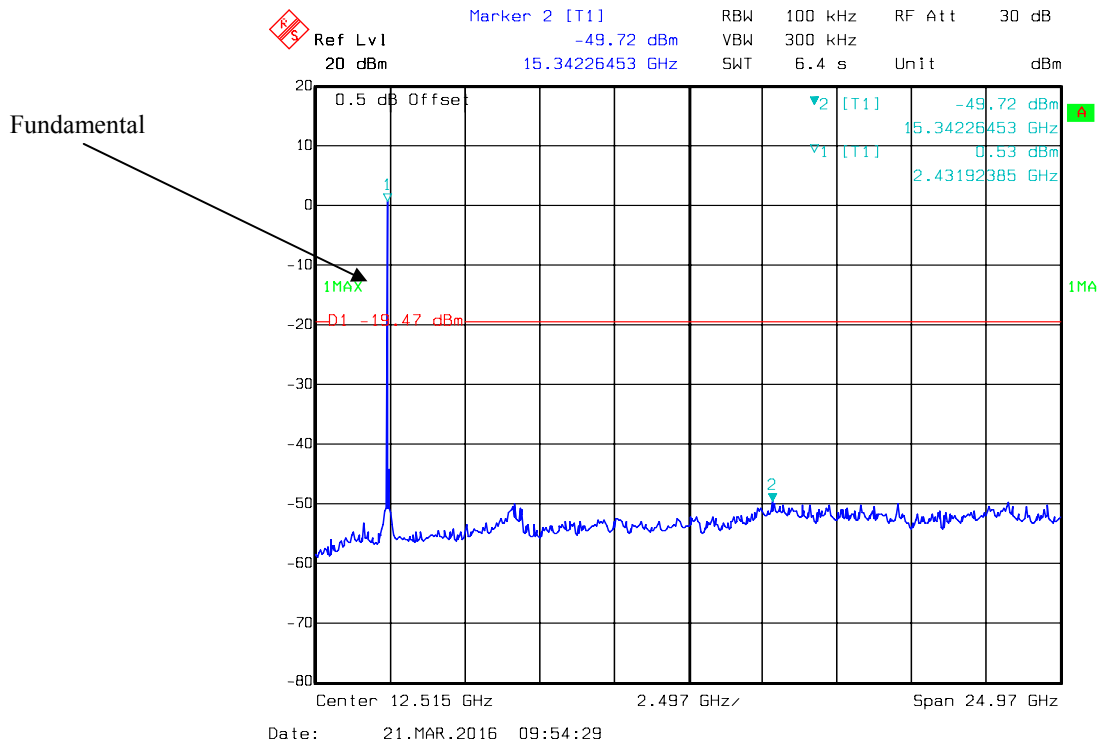


Chain 1, 802.11n ht40 Low Channel

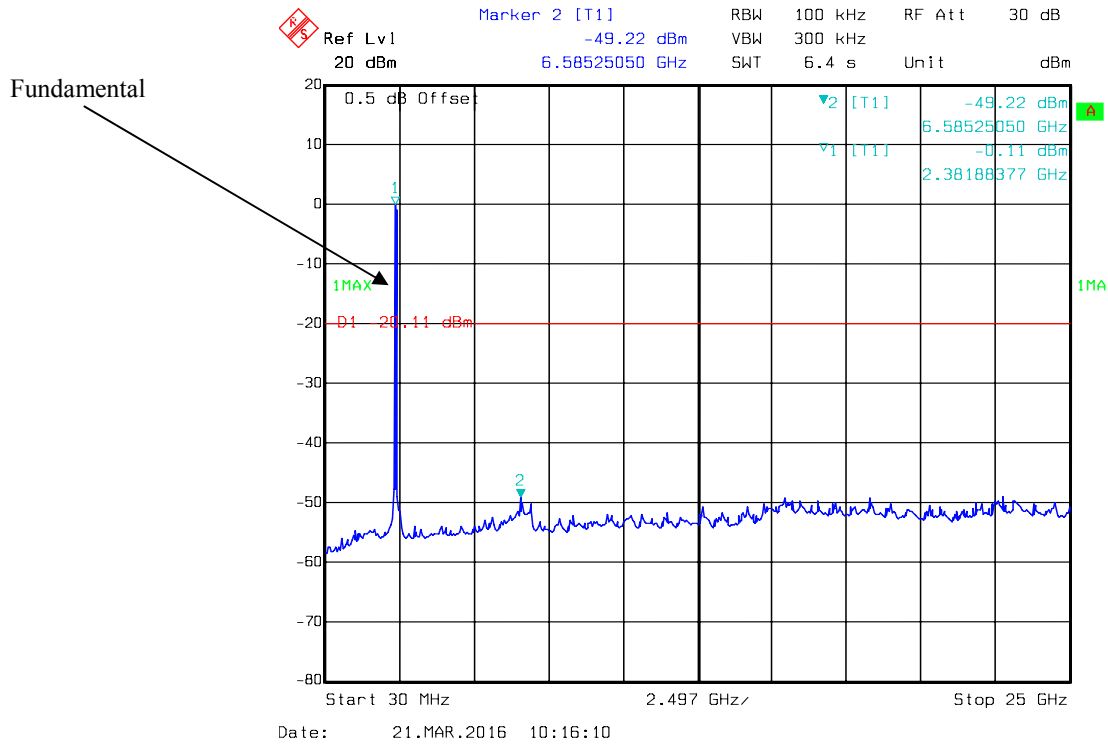

Chain 1, 802.11n ht40 Middle Channel

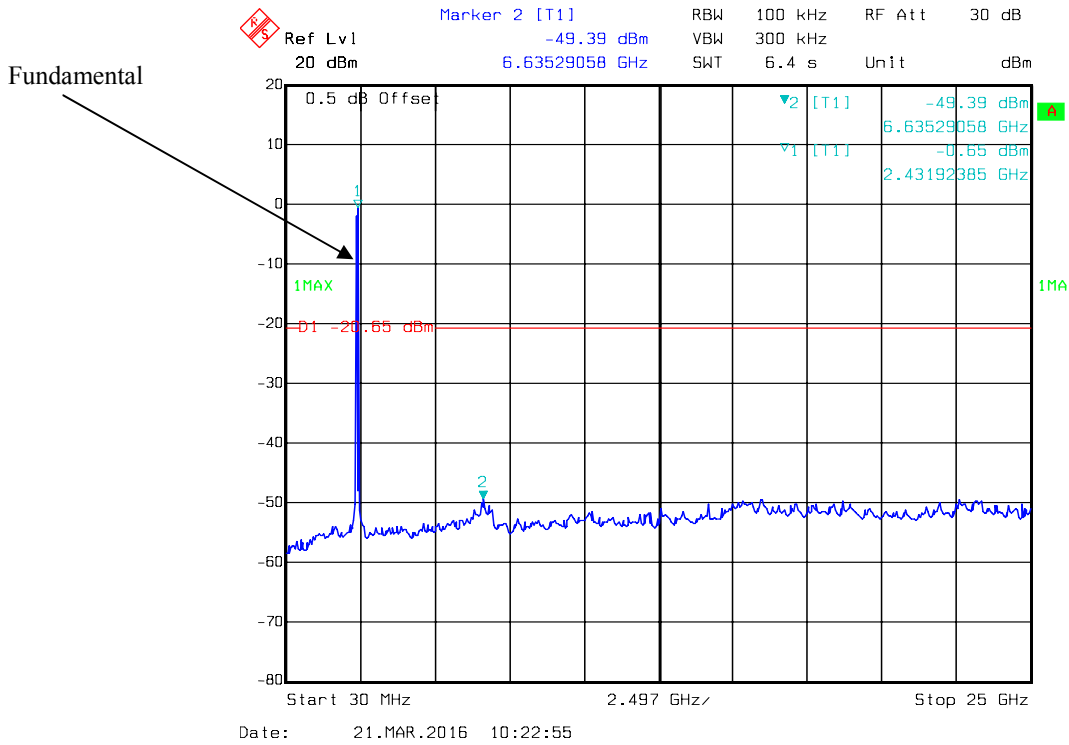

Chain 1, 802.11n ht40 High Channel

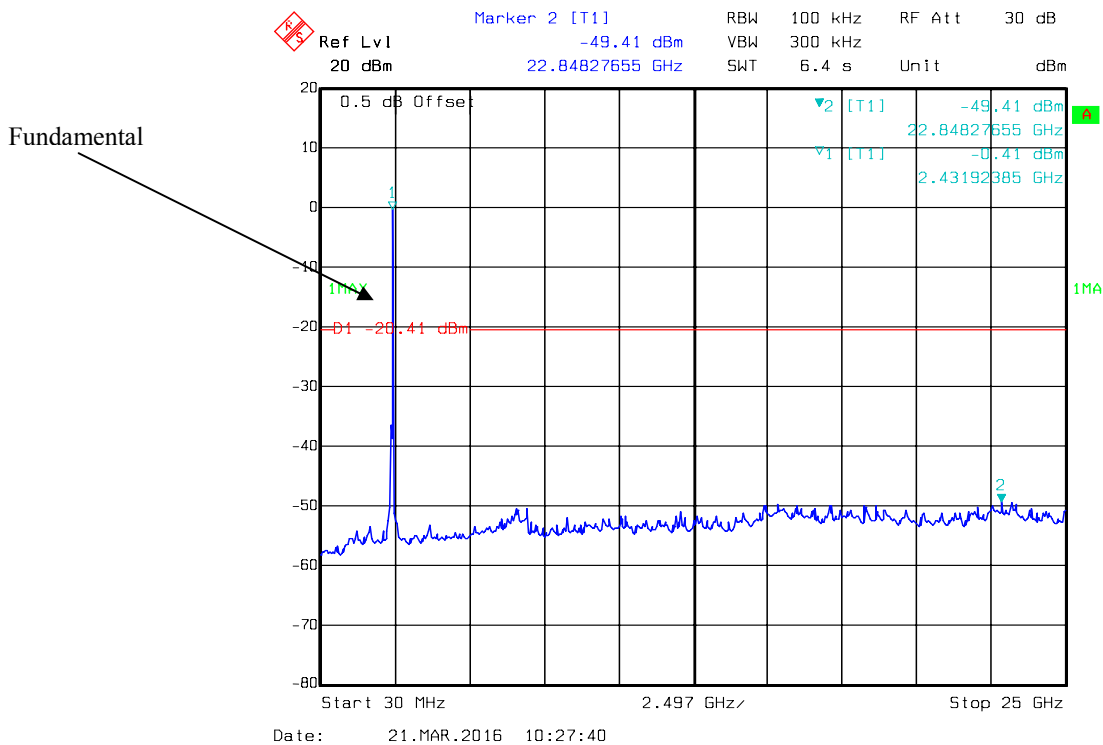

FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH


Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

According to KDB 558074 D01 DTS Meas Guidance

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSEM	DE31388	2015-05-09	2016-05-09
N/A	Coaxial Cable	0.1m	N/A	2015-05-06	2016-05-06
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2015-05-06	2016-05-06

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	24.4~24.7 °C
Relative Humidity:	50~68 %
ATM Pressure:	100.9~101.2kPa


** The testing was performed by Lion Xiao from 2016-03-21 to 2016-04-06.*

Test Mode: Transmitting

Test Result: Compliant. Please refer to the following table and plots.

Test mode	Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Limit (MHz)
			Chain 0	Chain 1	
802.11b	Low	2412	8.18	8.10	≥ 0.5
	Middle	2437	8.10	8.10	≥ 0.5
	High	2462	8.10	8.10	≥ 0.5
802.11g	Low	2412	16.51	16.59	≥ 0.5
	Middle	2437	16.51	16.59	≥ 0.5
	High	2462	16.51	16.51	≥ 0.5
802.11n20	Low	2412	17.72	17.72	≥ 0.5
	Middle	2437	17.72	17.8	≥ 0.5
	High	2462	17.72	17.72	≥ 0.5
802.11 n40	Low	2422	35.59	35.91	≥ 0.5
	Middle	2437	36.39	36.39	≥ 0.5
	High	2452	35.75	36.07	≥ 0.5

Chain 0, 802.11b Low Channel

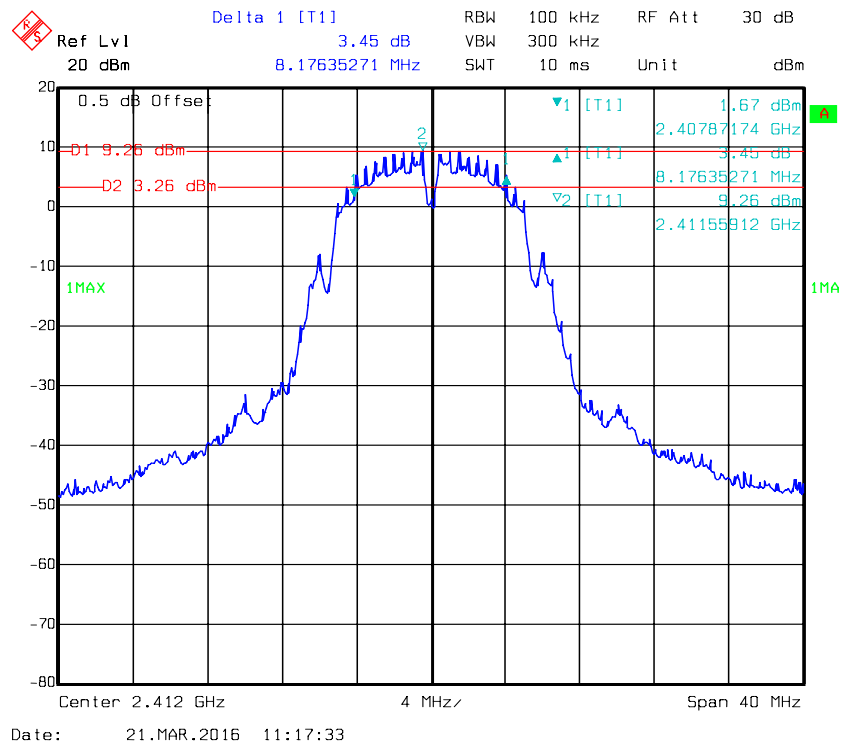

Delta 1 [T1] 0.03 dB RBW 100 kHz RF Att 30 dB

Ref Lvl 20 dBm VBW 300 kHz

0.5 dB Offset 8.09619238 MHz SWT 10 ms Unit dBm

0.5 dB Offset

D1 9.26 dBm

D2 3.26 dBm

Ref Lvl 20 dBm

RBW 100 kHz

RF Att 30 dB

VBW 300 kHz

SWT 10 ms

Unit dBm

Center 2.437 GHz 4 MHz/ Span 40 MHz

1MAX

2.43752104 GHz

4.91 dBm

2.43295190 GHz

0.03 dB

8.09619238 MHz

9.26 dBm

2.43752104 GHz

Date: 21.MAR.2016 11:09:35

Ref Lvl 20 dBm

Delta 1 [T1] -0.03 dB

RBW 100 kHz RF Att 30 dB

VBW 300 kHz Unit dBm

Span 40 MHz

Center 2.462 GHz

4 MHz/

0.5 dB Offset

D1 9.51 dBm

D2 3.51 dBm

1MAX

1 [T1] 3.99 dBm

2 [T1] 2.45795190 GHz

3 [T1] -0.03 dB

4 [T1] 8.09619238 MHz


5 [T1] 9.51 dBm

6 [T1] 2.46147896 GHz


1MAX

Date: 21.MAR.2016 11:18:54

Chain 0, 802.11g Low Channel

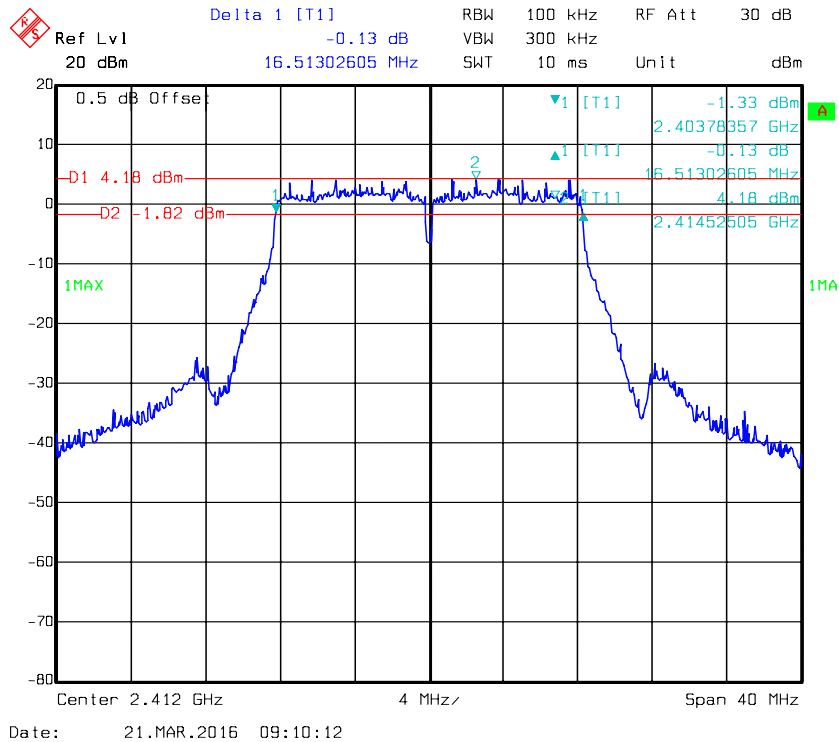

Chain 0, 802.11g Middle Channel

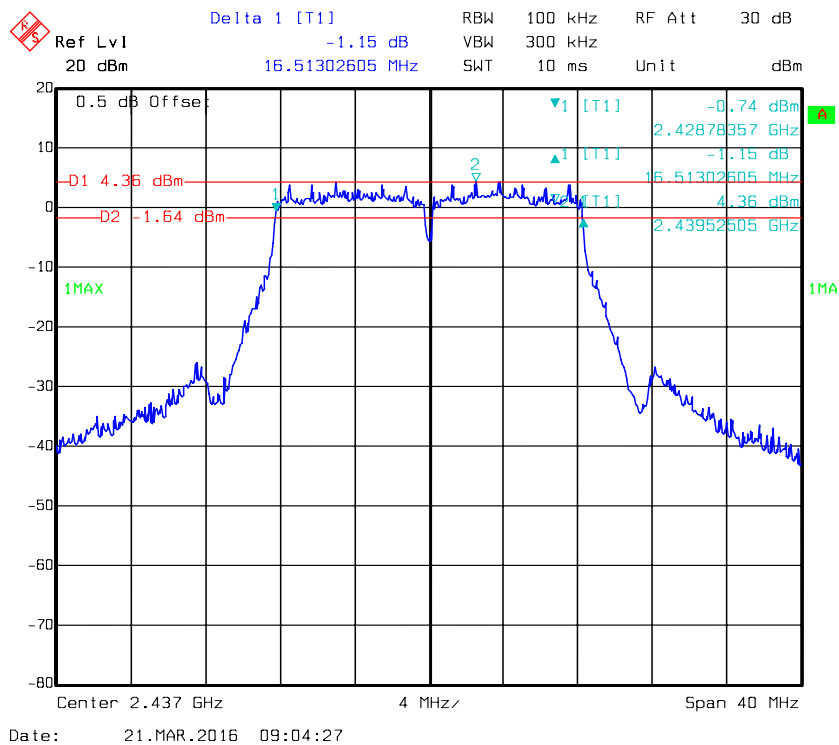

Delta 1 [T1] -0.98 dB RBW 100 kHz RF Att 30 dB
 Ref Lvl 20 dBm 16.51302605 MHz SWT 10 ms Unit dBm
 0.5 dB Offset
 -D1 4.49 dBm
 -D2 -1.51 dBm
 1MAX
 1MA
 [T1] -1.10 dBm
 2.45378357 GHz
 [T1] -0.98 dBm
 16.51302605 MHz
 [T1] 4.49 dBm
 2.45827255 GHz
 Center 2.462 GHz 4 MHz/ Span 40 MHz
 Date: 21.MAR.2016 08:57:18

Delta 1 [T1] 0.85 dB
 RBW 100 kHz RF Att 30 dB
 Ref Lvl 20 dBm VBW 300 kHz
 20 dBm 17.71543086 MHz SWT 10 ms Unit dBm

0.5 dB Offset
 -D1 1.91 dBm
 -D2 -4.09 dBm
 1MAX
 1 [T1] -5.22 dBm
 2.40314228 GHz 0.85 dB
 17.71543086 MHz 1.91 dBm
 2.41452505 GHz
 1MA

Center 2.412 GHz 4 MHz/ Span 40 MHz

Date: 21.MAR.2016 09:19:35

Delta 1 [T1] -0.04 dB

Ref Lvl 20 dBm

RBW 100 kHz

VBW 300 kHz

SWT 10 ms

RF Att 30 dB

Unit dBm

0.5 dB Offset

D1 1.35 dBm

D2 -4.65 dBm

1MAX

Center 2.437 GHz

4 MHz

Span 40 MHz

Date: 21.MAR.2016 09:28:53

Delta 1 [T1] -0.32 dB
 Ref Lvl 20 dBm
 17.71543086 MHz
 RBW 100 kHz
 VBW 300 kHz
 SWT 10 ms
 RF Att 30 dB
 Unit dBm

0.5 dB Offset

-D1 1.67 dBm
 -D2 -4.33 dBm

1MAX

Center 2.462 GHz
 4 MHz
 Span 40 MHz

Date: 21.MAR.2016 09:36:35

[illegible]

Ref Lvl 20 dBm

Delta 1 [T1] 0.04 dB

RBW 100 kHz

VBW 300 kHz

SWT 20 ms

RF Att 30 dB

Unit dBm

0.5 dB Offset

D1 0.02 dBm

D2 -5.98 dBm

1MAX

1MA


Center 2.437 GHz

8 MHz


Span 80 MHz

Date: 21.MAR.2016 10:40:00


Chain 0, 802.11n ht40 High Channel

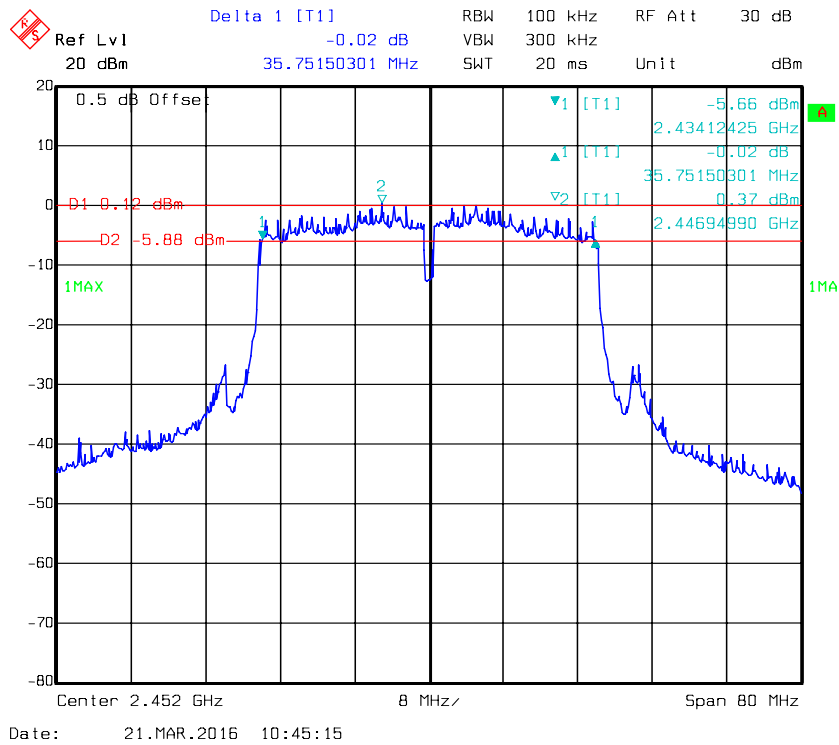


Chain 1, 802.11 b Low Channel

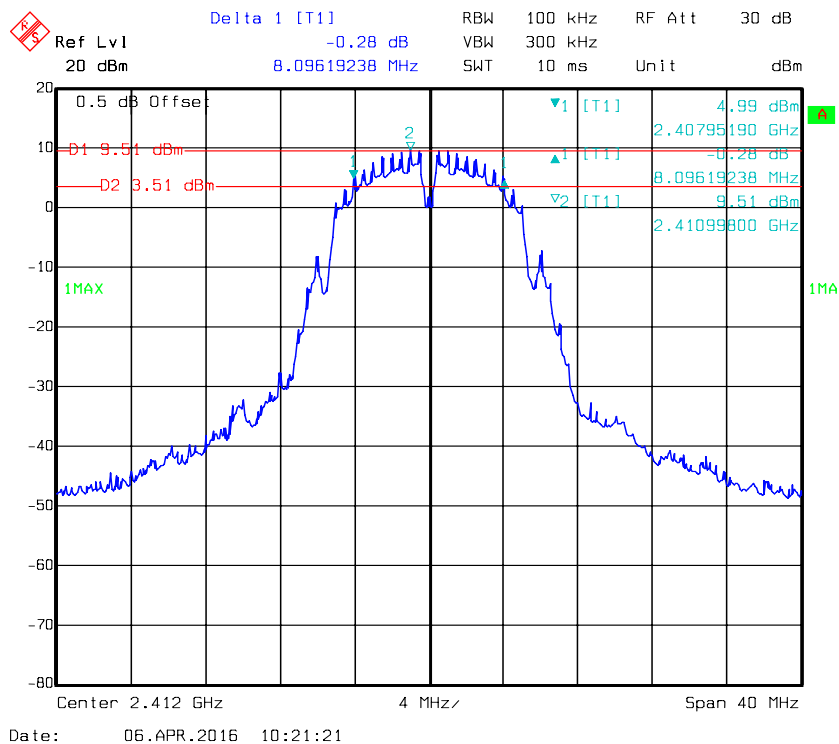

Chain 1, 802.11b Middle Channel

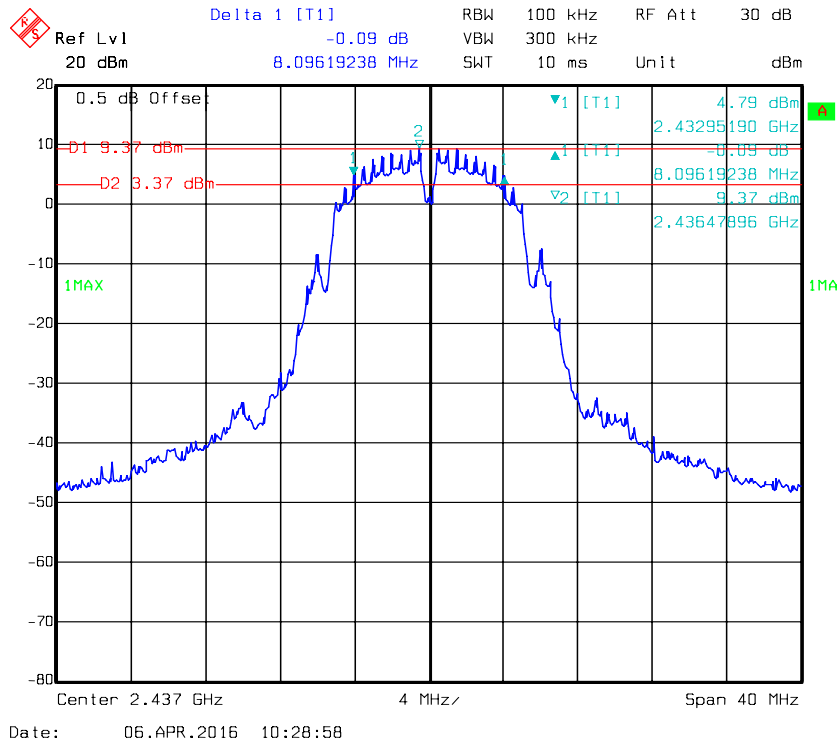

Chain 1, 802.11b High Channel

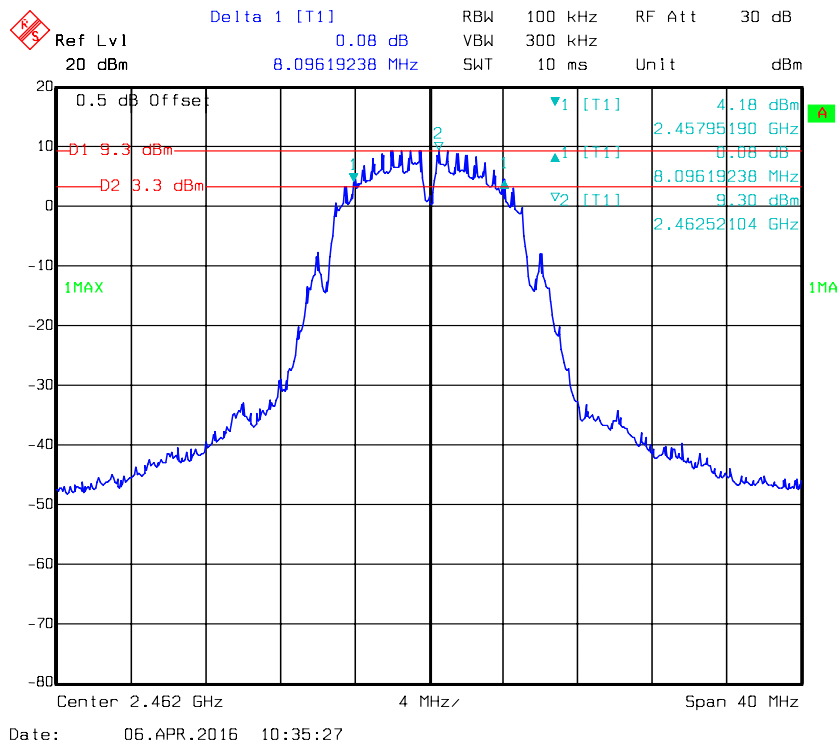

Delta 1 [T1] 0.72 dB RBW 100 kHz RF Att 30 dB
 Ref Lvl 20 dBm 16.59318637 MHz VBW 300 kHz SWT 10 ms Unit dBm

0.5 dB Offset

-D1 4.26 dBm
 -D2 -1.74 dBm

1MAX

Center 2.412 GHz 4 MHz/ Span 40 MHz

Date: 05.APR.2016 17:58:27


Ref Lvl 20 dBm
Delta 1 [T1] -0.08 dB
RBW 100 kHz
VBW 300 kHz
RF Att 30 dB
Unit dBm
Span 40 MHz

D1 4.43 dBm
D2 -1.57 dBm


Center 2.437 GHz
Span 40 MHz

Date: 05.APR.2016 18:04:47


Chain 1, 802.11 g High Channel

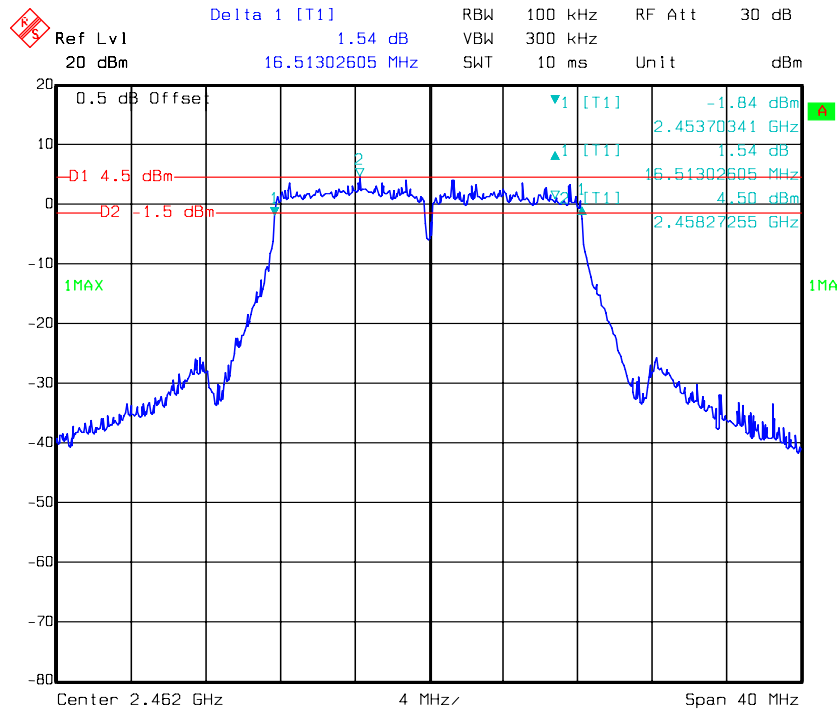

Chain 1, 802.11n ht20 Low Channel

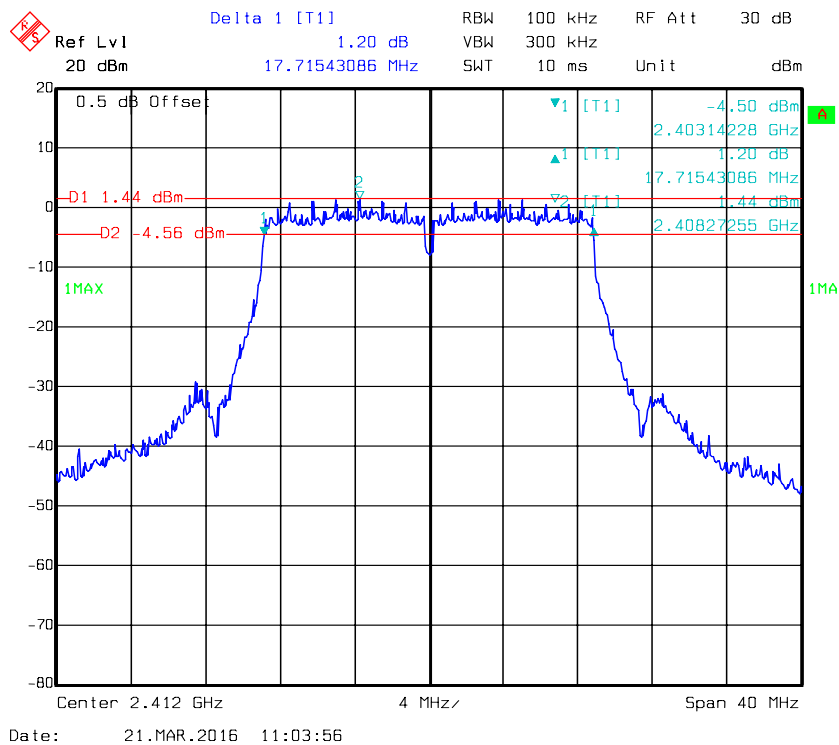


Chain 1, 802.11n ht20 Middle Channel

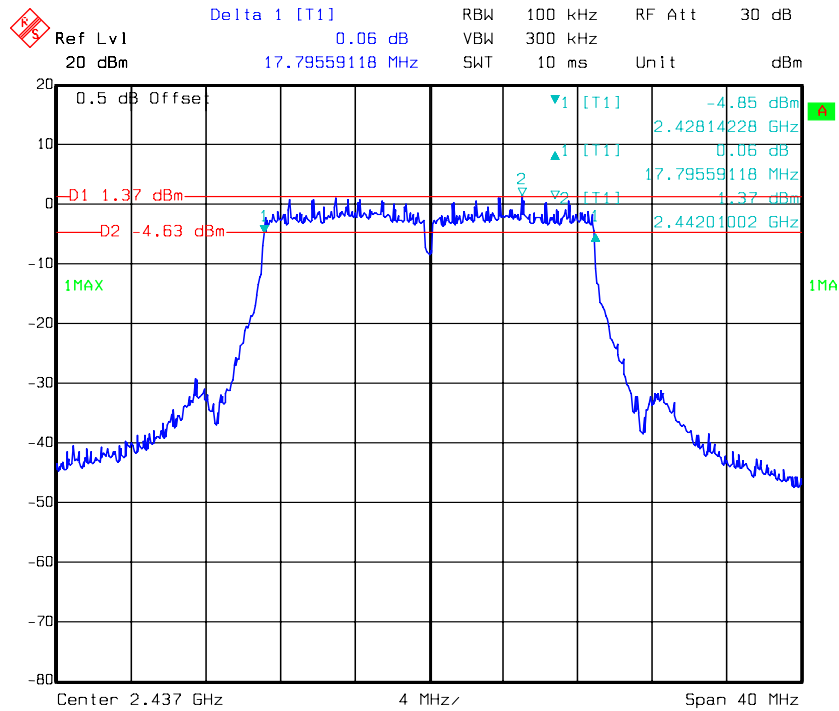


Date: 21.MAR.2016 09:55:36

Chain 1, 802.11n ht20 High Channel

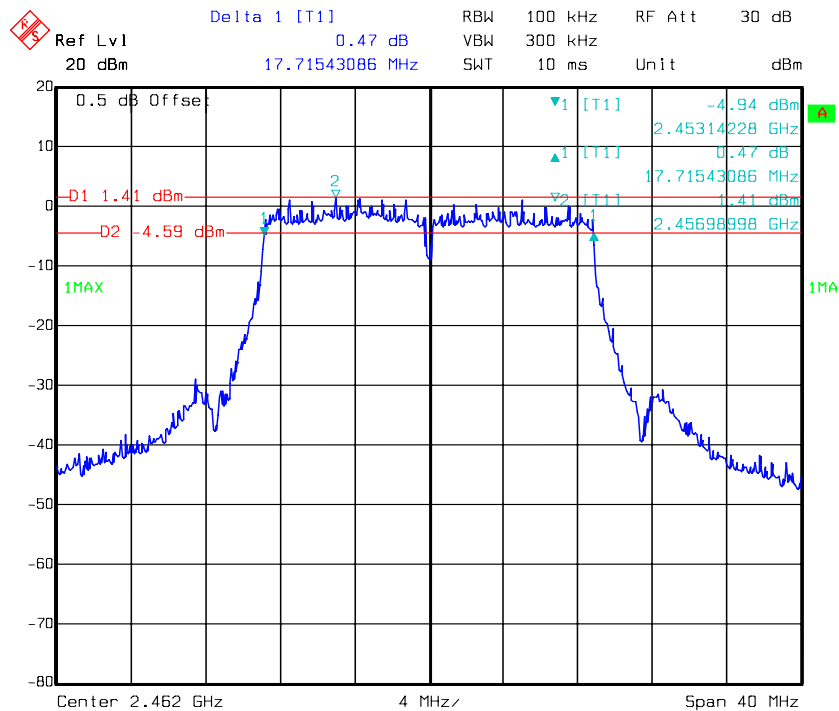


Date: 21.MAR.2016 09:43:26


Chain 1, 802.11n ht40 Low Channel

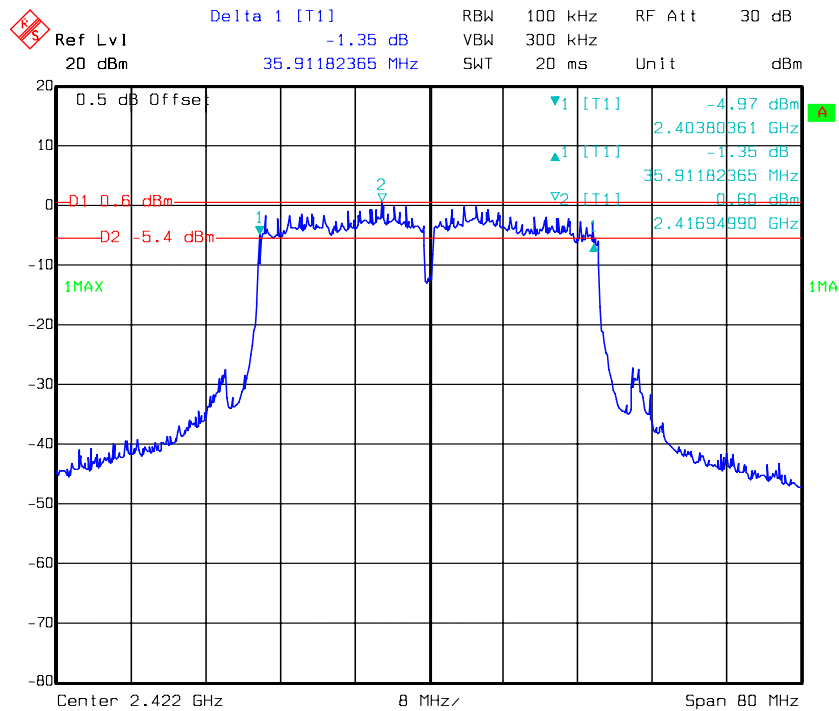

Chain 1, 802.11n ht40 Middle Channel

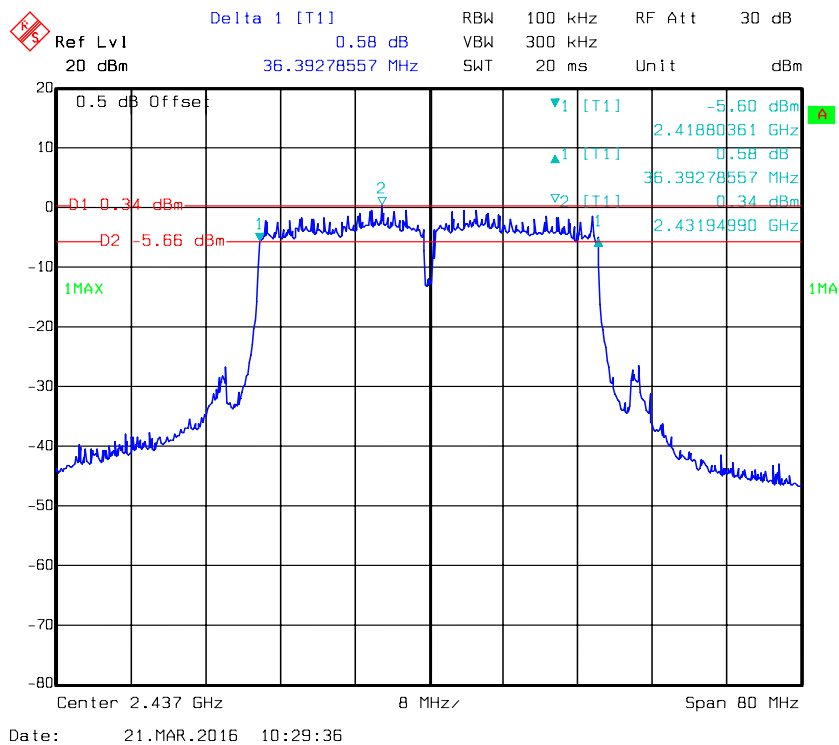

Chain 1, 802.11n ht40 High Channel

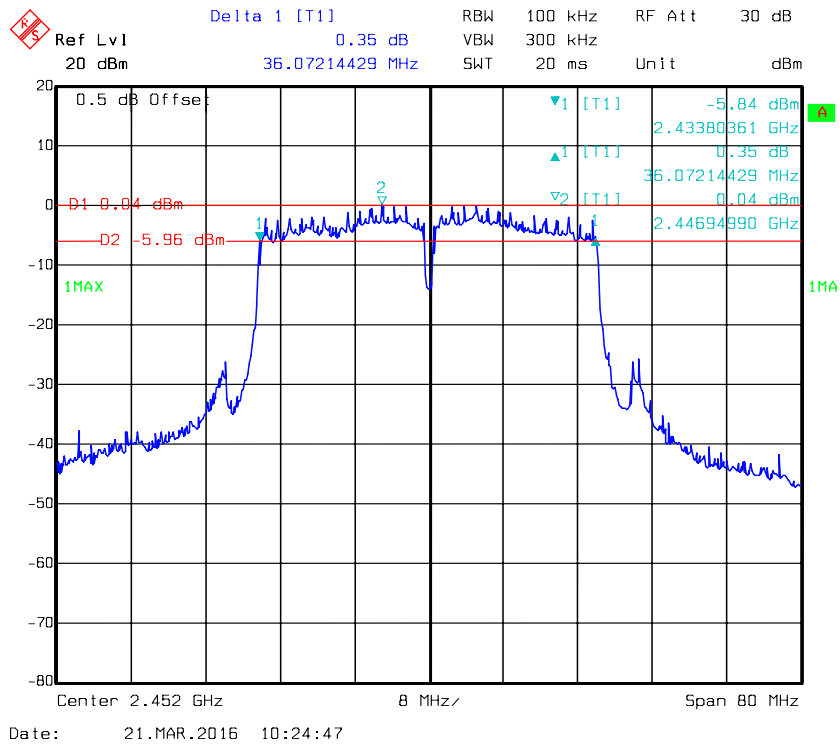

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER


Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure-

According to KDB 558074 D01 DTS Meas Guidance v03r04

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to test equipment.
3. Add a correction factor to the display.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	Wideband Power Sensor	N1921A	MY54210016	2015-11-03	2016-11-03
Agilent	Wideband Power Sensor	N1921A	MY54170013	2015-11-03	2016-11-03
Agilent	P-Series Power Meter	N1912A	MY5000448	2015-11-03	2016-11-03
N/A	Coaxial Cable	0.1m	N/A	2015-05-06	2016-05-06
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2015-05-06	2016-05-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	24.4~24.7 °C
Relative Humidity:	50~68 %
ATM Pressure:	100.9~101.2kPa

* The testing was performed by Lion Xiao from 2016-03-21 to 2016-04-06.

Test Mode: Transmitting

Test Result: Compliant. Please refer to the following table.

Test mode	Channel	Frequency	Max Peak Conducted Output Power (dBm)		Total	Limit
		(MHz)	Chain 0	Chain 1	(dBm)	(dBm)
802.11b	Low	2412	21.95	21.97	/	30
	Middle	2437	21.82	21.78	/	30
	High	2462	21.68	21.86	/	30
802.11g	Low	2412	22.75	22.72	/	30
	Middle	2437	22.81	22.79	/	30
	High	2462	22.77	22.73	/	30
802.11n20	Low	2412	20.67	20.49	23.59	30
	Middle	2437	20.43	20.37	23.41	30
	High	2462	20.80	20.55	23.69	30
802.11n40	Low	2422	20.66	20.84	23.76	30
	Middle	2437	20.89	20.95	23.93	30
	High	2452	21.03	20.78	23.92	30

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSEM	DE31388	2015-05-09	2016-05-09
N/A	Coaxial Cable	0.1m	N/A	2015-05-06	2016-05-06
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2015-05-06	2016-05-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions


Temperature:	24.4~24.7 °C
Relative Humidity:	50~68 %
ATM Pressure:	100.9~101.2kPa

* The testing was performed by Lion Xiao from 2016-03-21 to 2016-04-06.


Test mode: Transmitting

Test Result: Compliant. Please refer to following plots.


Chain 0, 802.11b: Band Edge, Left Side

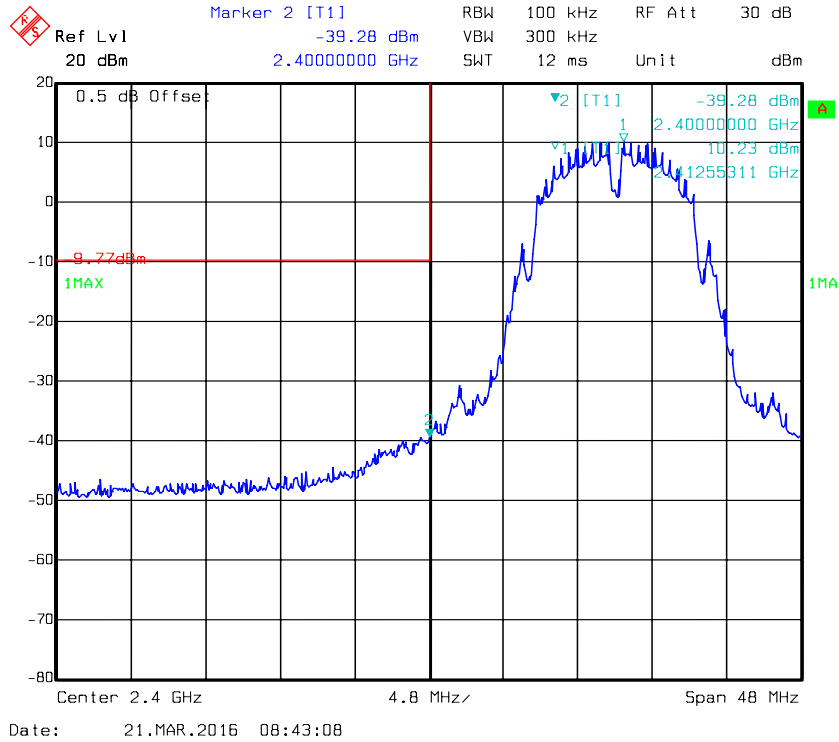


Chain 0, 802.11b: Band Edge, Right Side

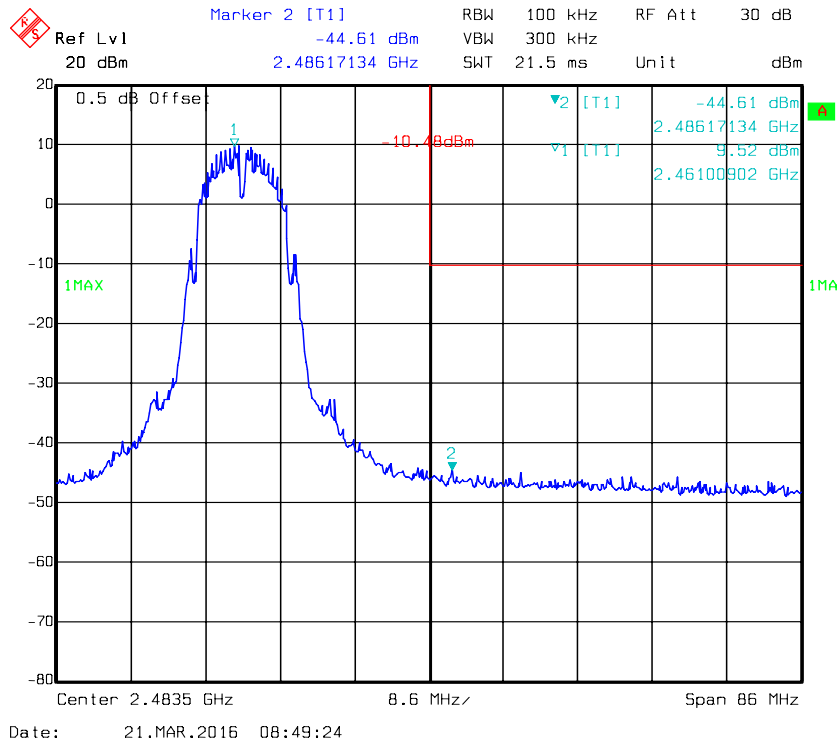


Chain 0, 802.11g: Band Edge, Left Side

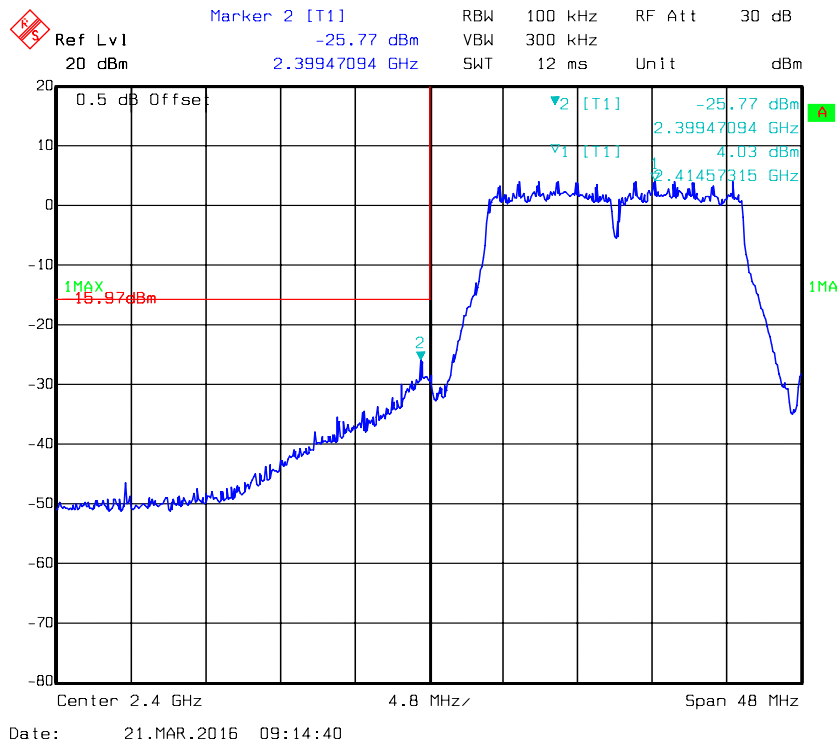


Chain 0, 802.11g: Band Edge, Right Side

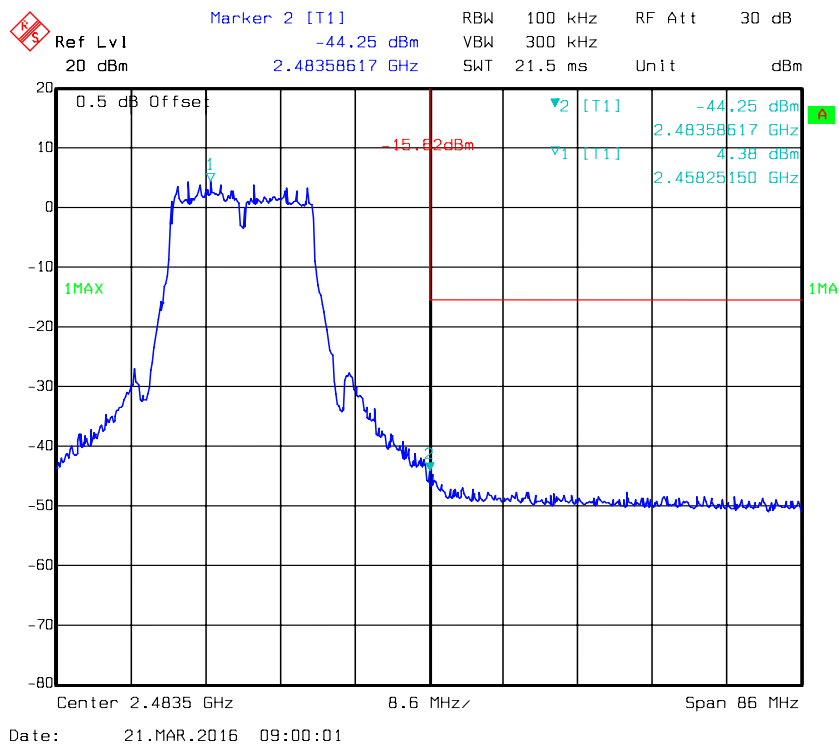


Chain 0, 802.11n ht20 Band Edge, Left Side

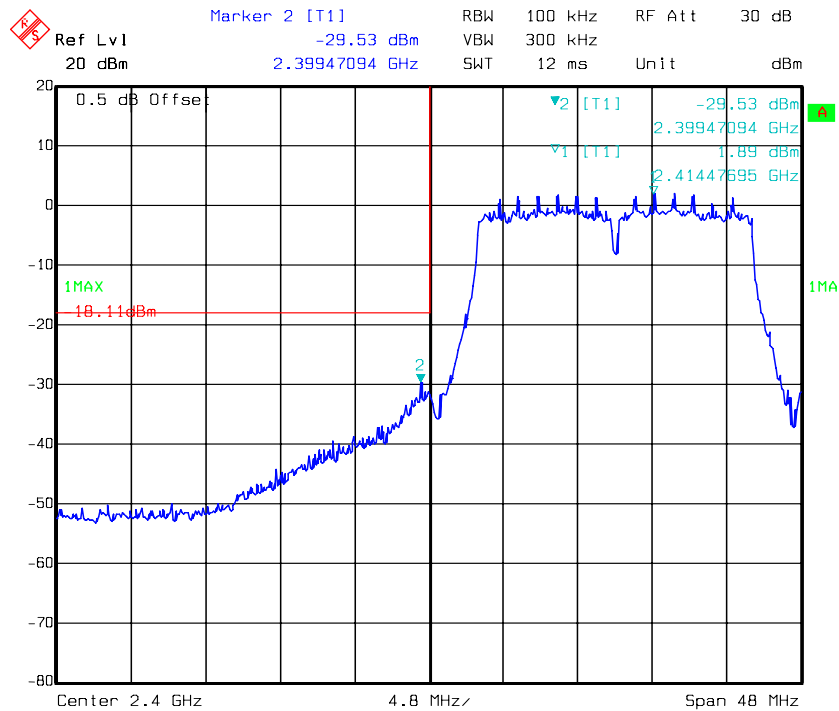


Chain 0, 802.11n ht20 Band Edge, Right Side

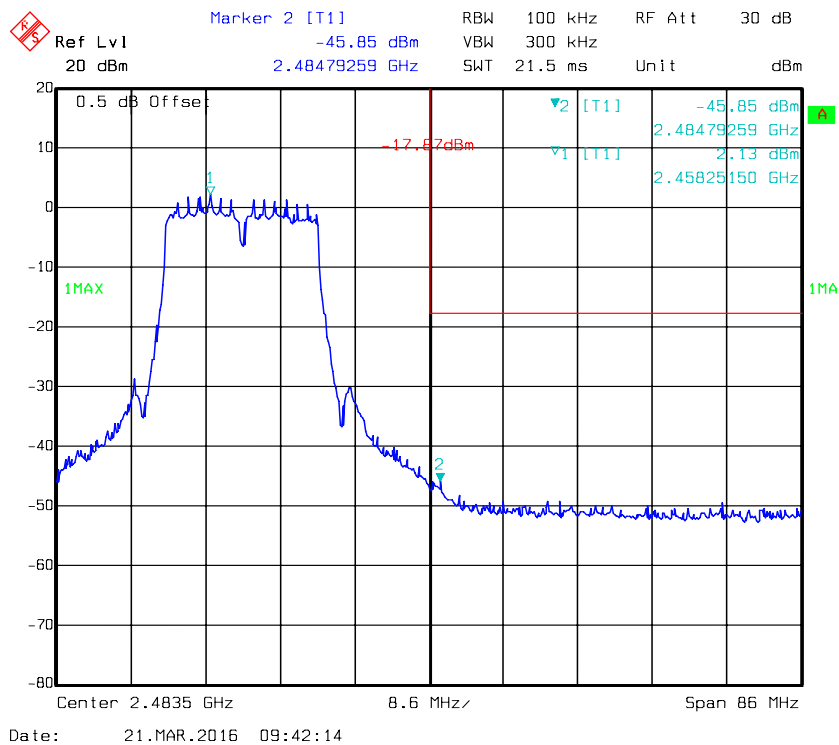


Chain 0, 802.11n ht40 Band Edge, Left Side

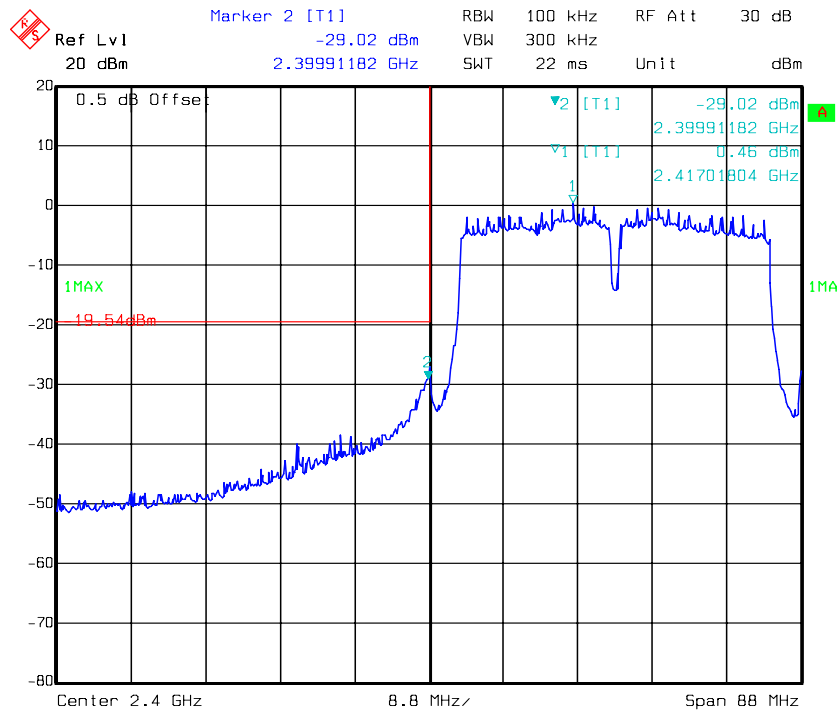


Chain 0, 802.11n ht40 Band Edge, Right Side

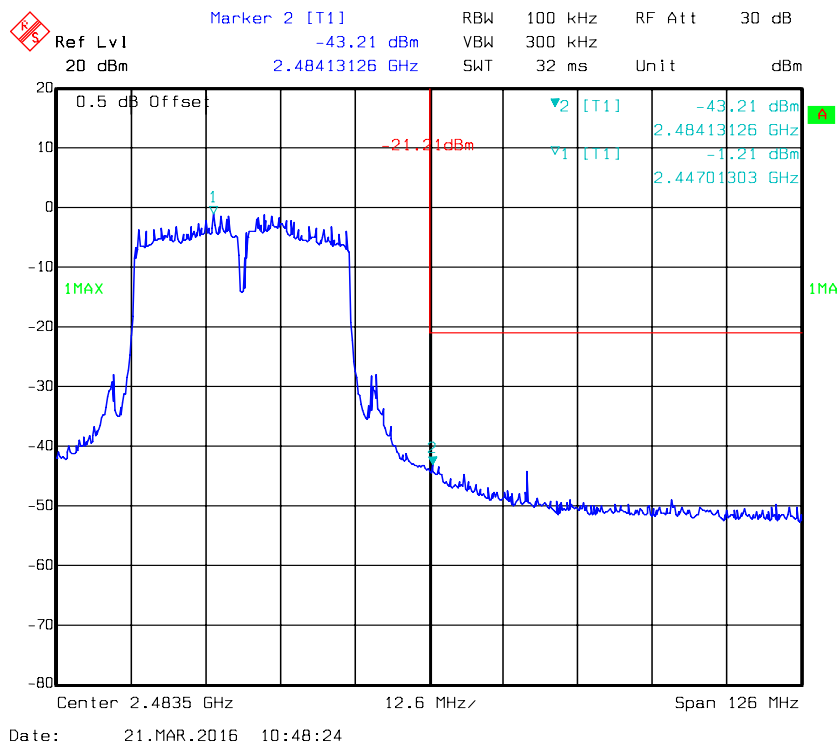


Chain 1, 802.11b: Band Edge, Left Side

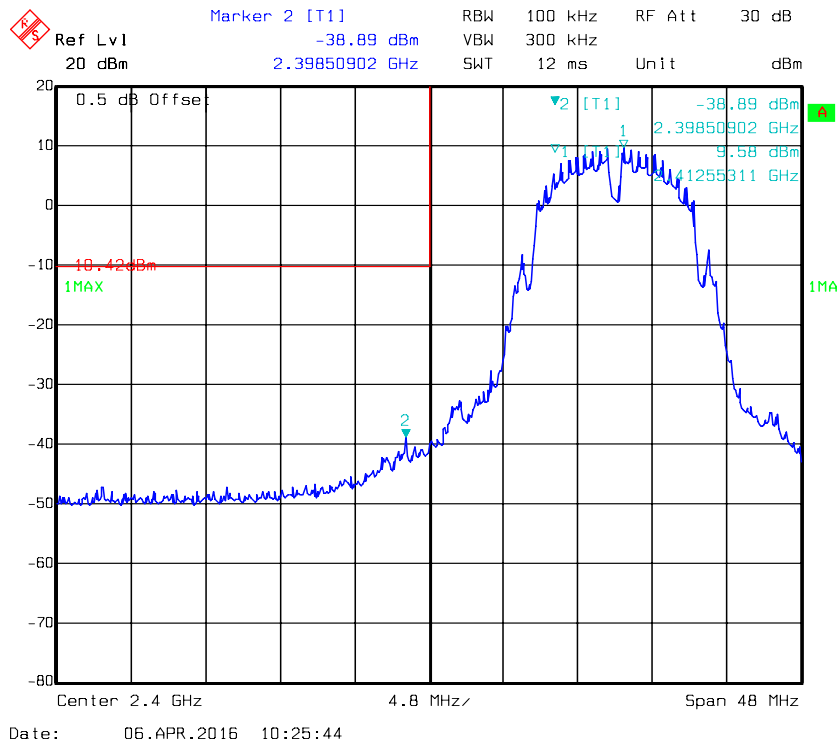


Chain 1, 802.11b: Band Edge, Right Side

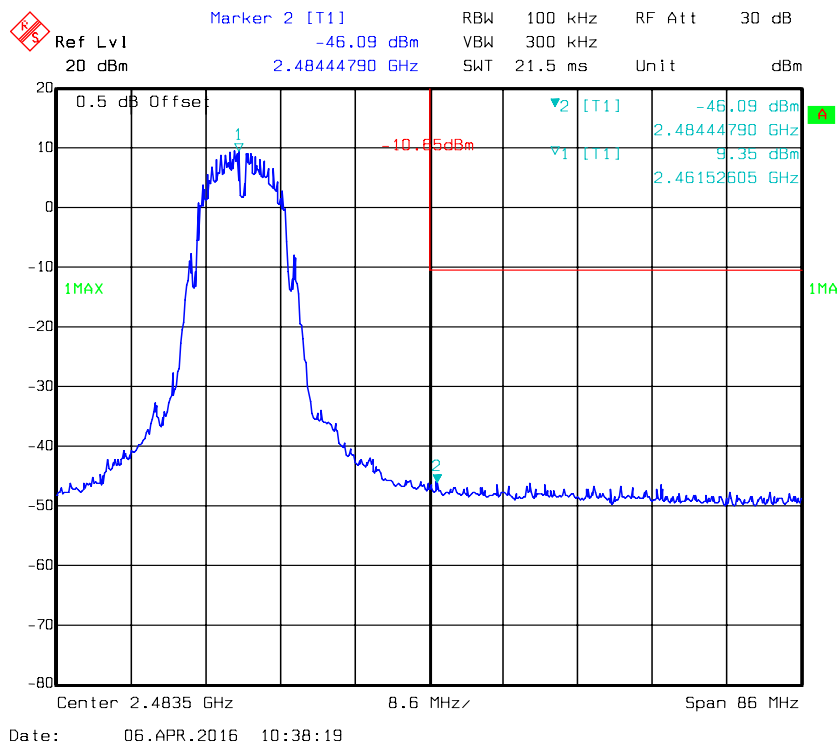


Chain 1, 802.11g: Band Edge, Left Side

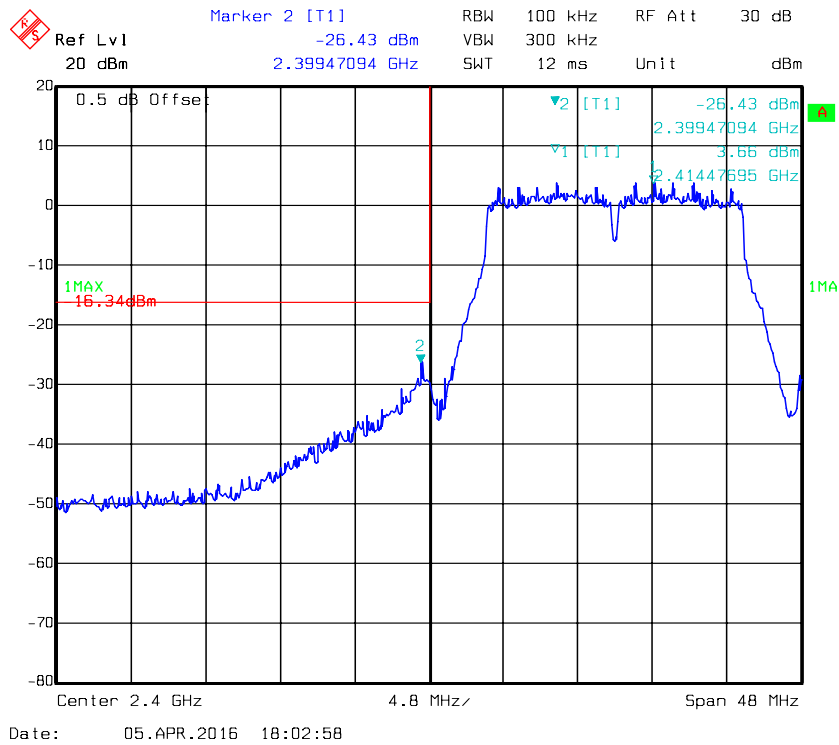


Chain 1, 802.11g: Band Edge, Right Side

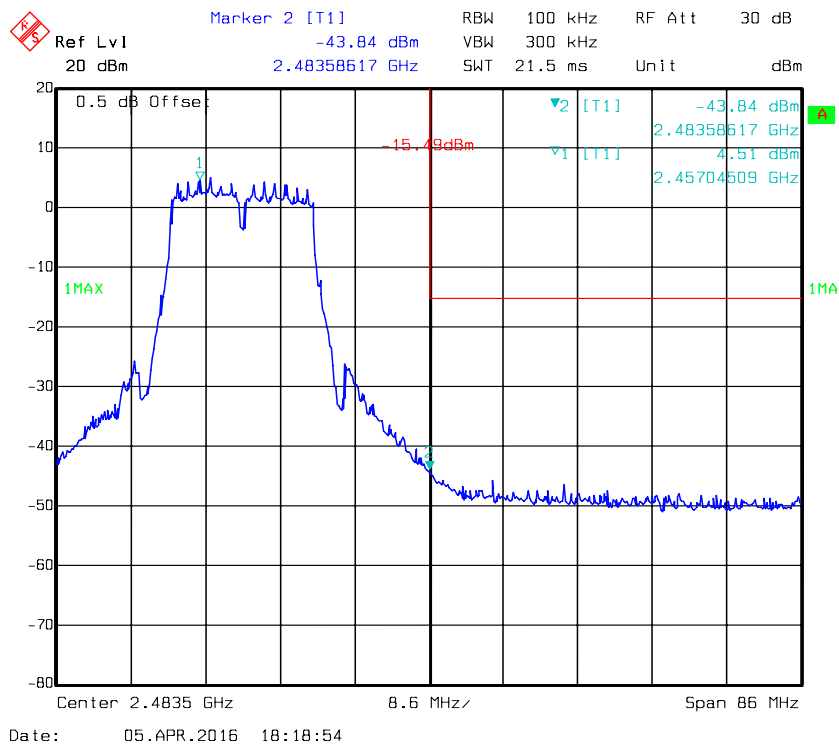


Chain 1, 802.11n ht20 Band Edge, Left Side

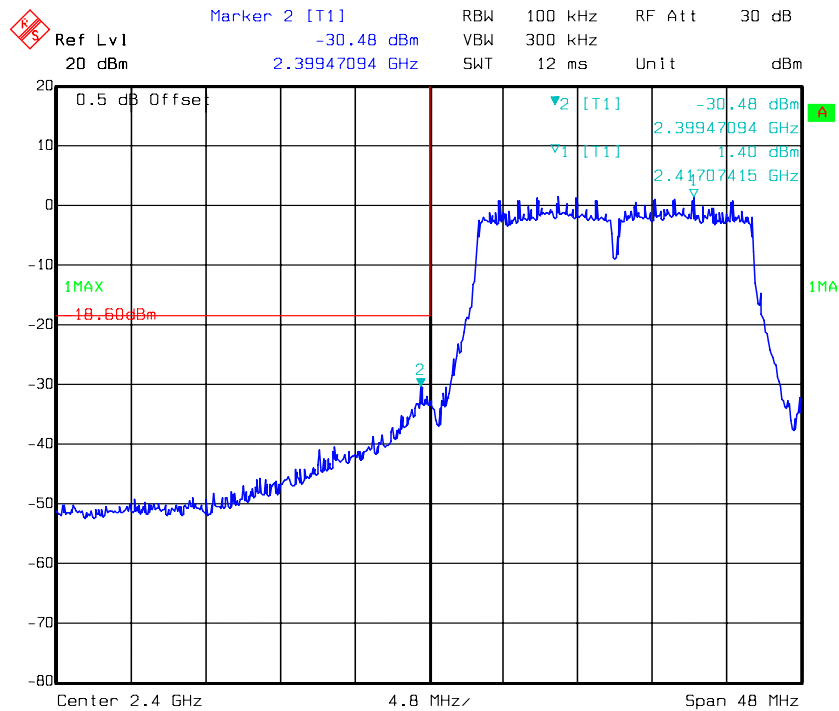


Chain 1, 802.11n ht20 Band Edge, Right Side

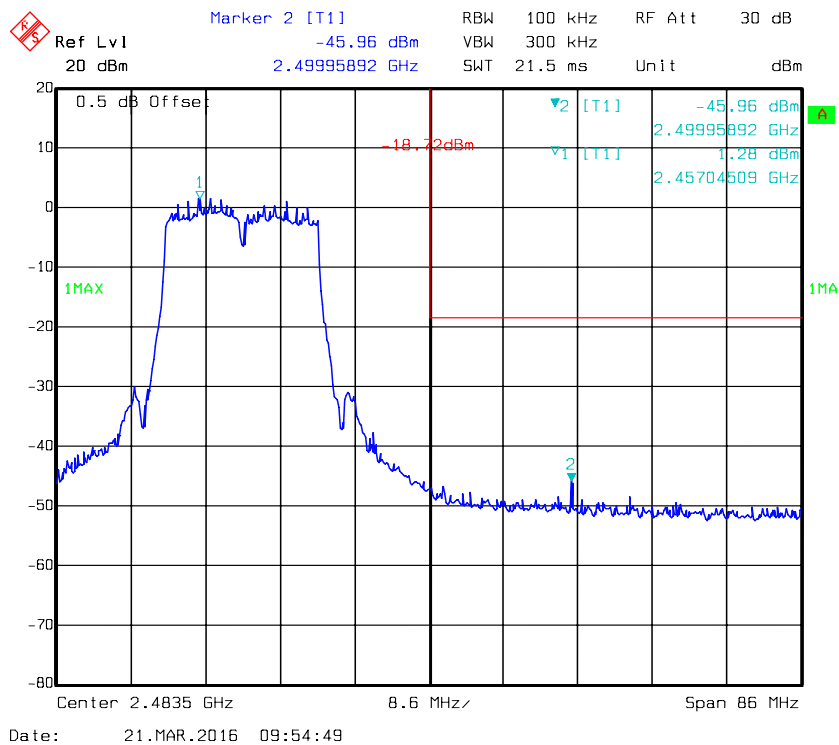

Chain 1, 802.11n ht40 Band Edge, Left Side

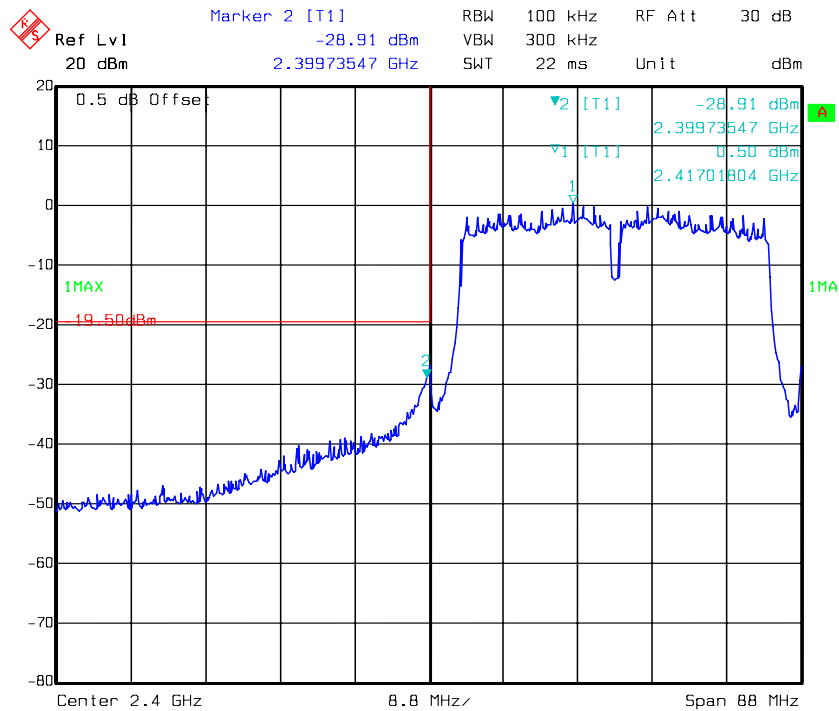

Chain 1, 802.11n ht40 Band Edge, Right Side

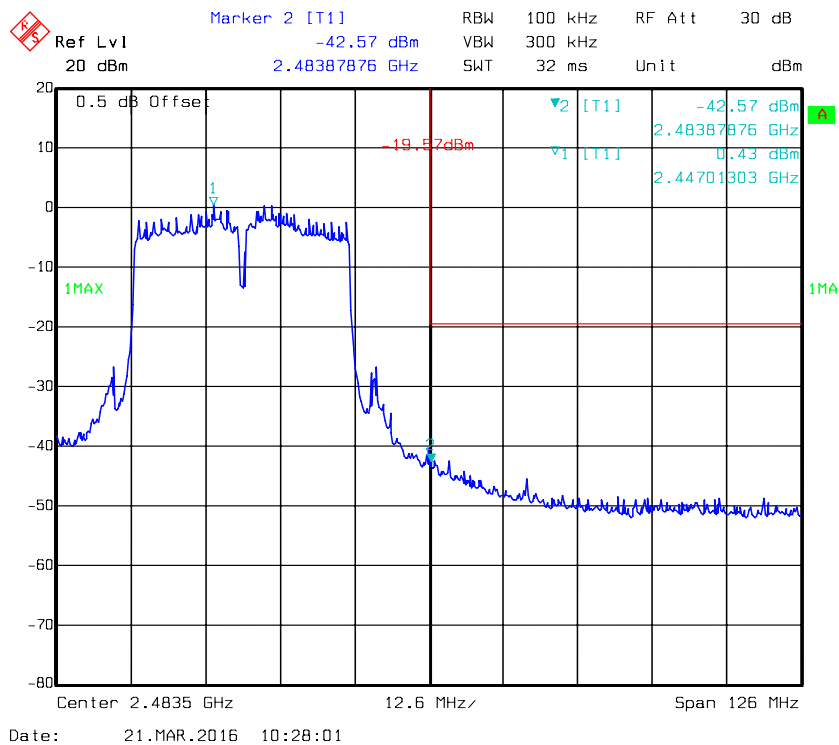

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

According to KDB 558074 D01 DTS Meas Guidance v03r04

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set the VBW $\geq 3 \times \text{RBW}$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.
- If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSEM	DE31388	2015-05-09	2016-05-09
N/A	Coaxial Cable	0.1m	N/A	2015-05-06	2016-05-06
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2015-05-06	2016-05-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	24.4~24.7 °C
Relative Humidity:	50~68 %
ATM Pressure:	100.9~101.2kPa


* The testing was performed by Lion Xiao from 2016-03-21 to 2016-04-06.

Test Mode: Transmitting


Test Result: Compliant. Please refer to the following table and plots

Test mode	Channel	Frequency (MHz)	PSD (dBm/3kHz)		Total (dBm/3kHz)	Limit (dBm/3kHz)
			Chain 0	Chain 1		
802.11b	Low	2412	-4.45	-4.42	/	≤8
	Middle	2437	-4.52	-4.56	/	≤8
	High	2462	-4.66	-4.49	/	≤8
802.11g	Low	2412	-9.49	-9.5	/	≤8
	Middle	2437	-9.45	-9.46	/	≤8
	High	2462	-9.48	-9.5	/	≤8
802.11n20	Low	2412	-12.23	-12.33	-9.27	≤8
	Middle	2437	-12.35	-12.39	-9.36	≤8
	High	2462	-12.11	-12.30	-9.19	≤8
802.11n40	Low	2422	-14.29	-14.15	-11.21	≤8
	Middle	2437	-14.14	-14.12	-11.12	≤8
	High	2452	-14.09	-14.20	-11.13	≤8

Chain 0

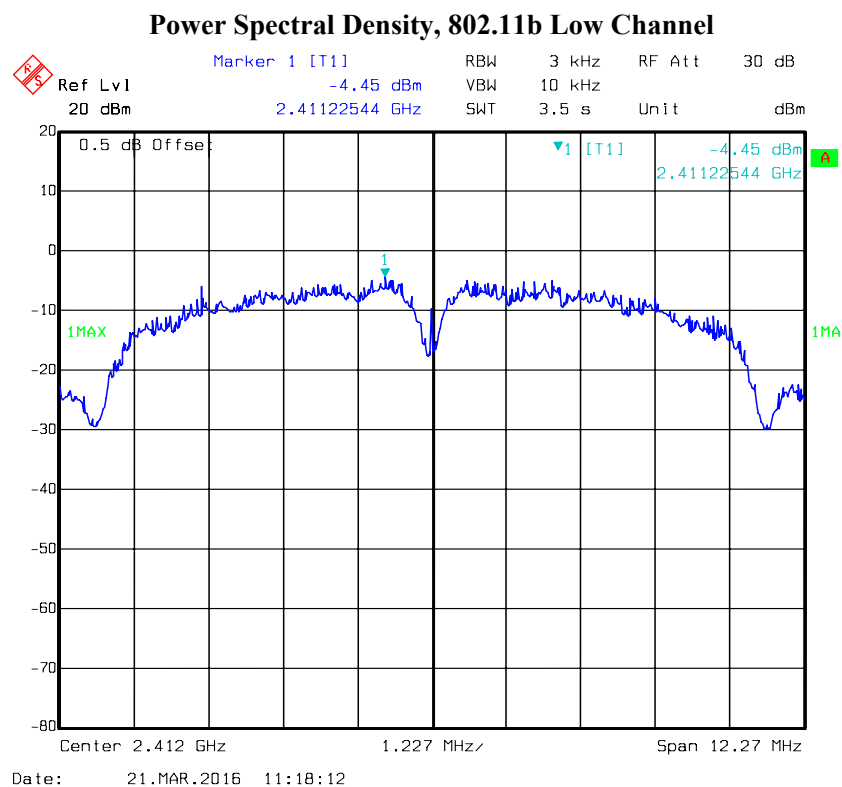


Power Spectral Density, 802.11b Middle Channel

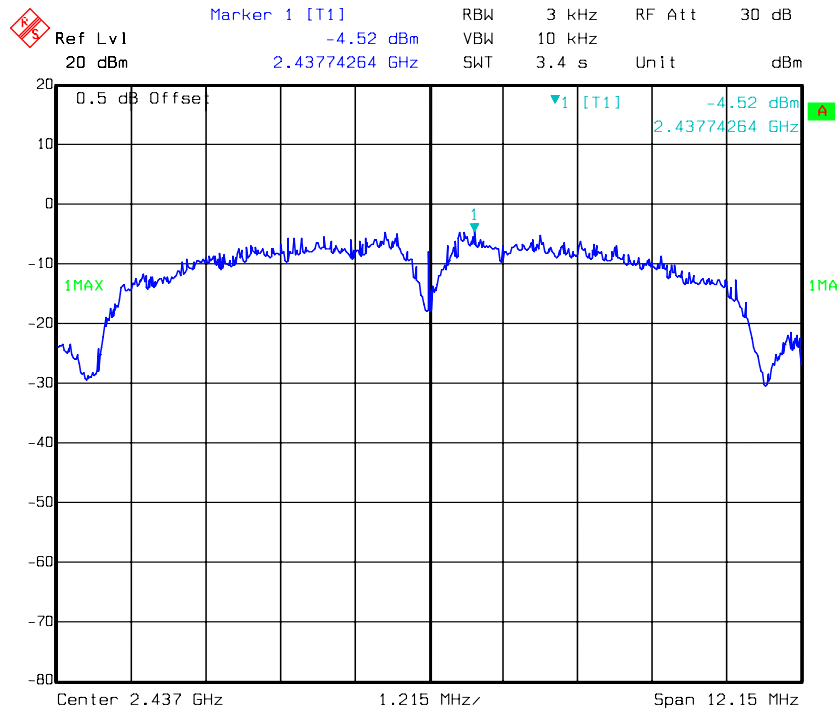


Date: 21.MAR.2016 11:10:58

Power Spectral Density, 802.11b High Channel

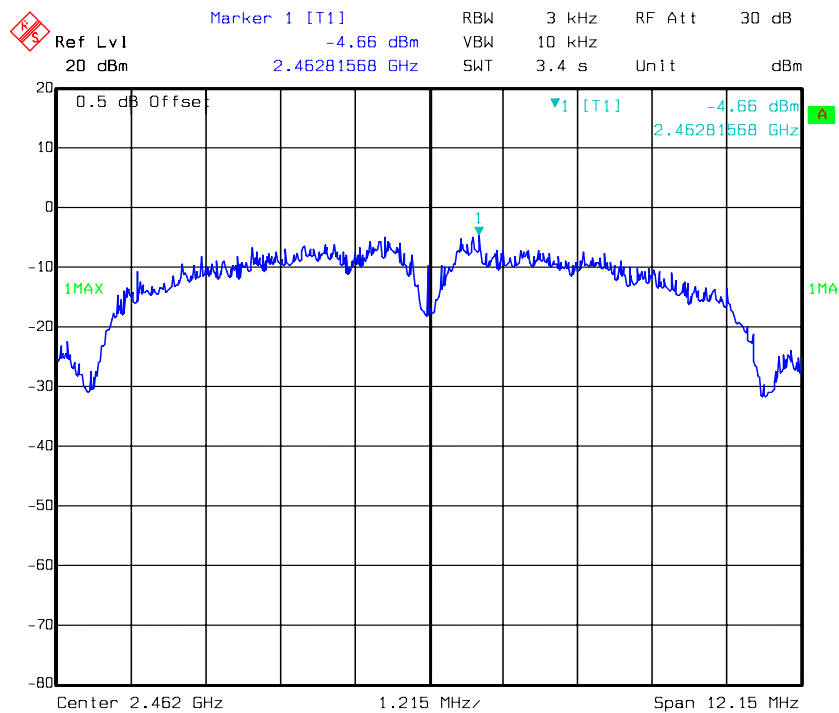


Date: 21.MAR.2016 11:19:09

Power Spectral Density, 802.11g Low Channel

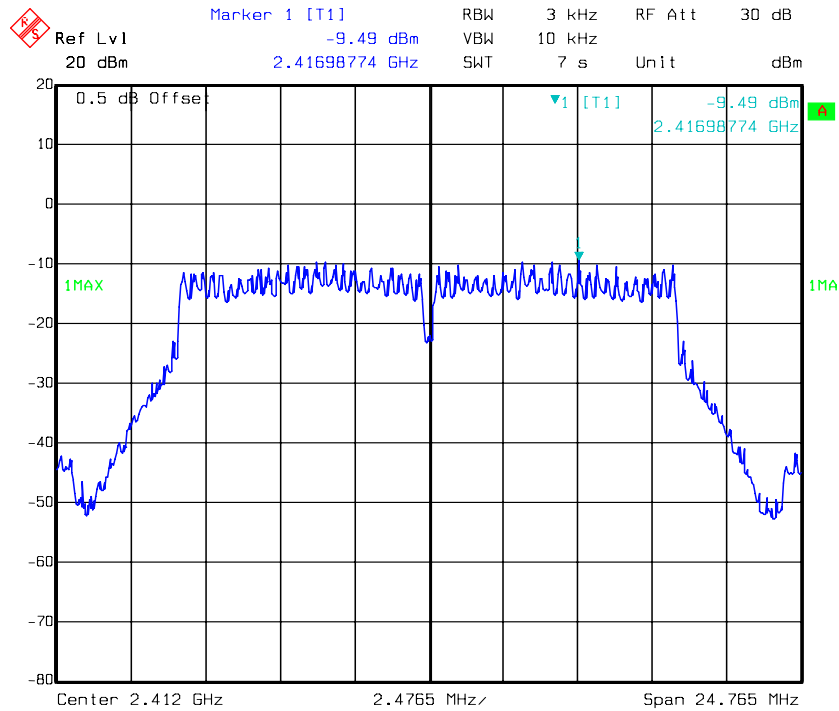


Date: 21.MAR.2016 09:12:46

Power Spectral Density, 802.11g Middle Channel

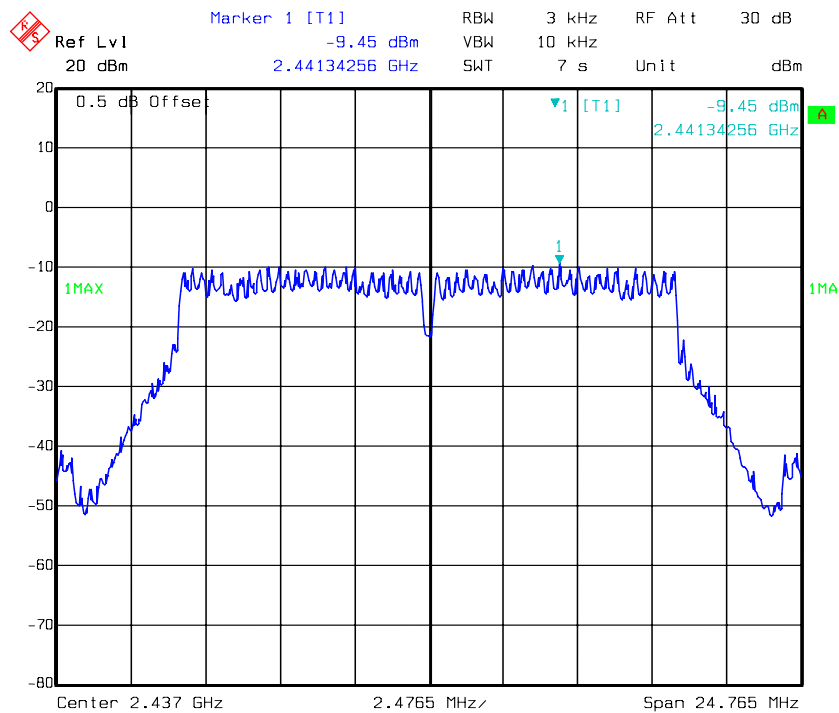


Date: 21.MAR.2016 09:07:13


Power Spectral Density, 802.11g High Channel

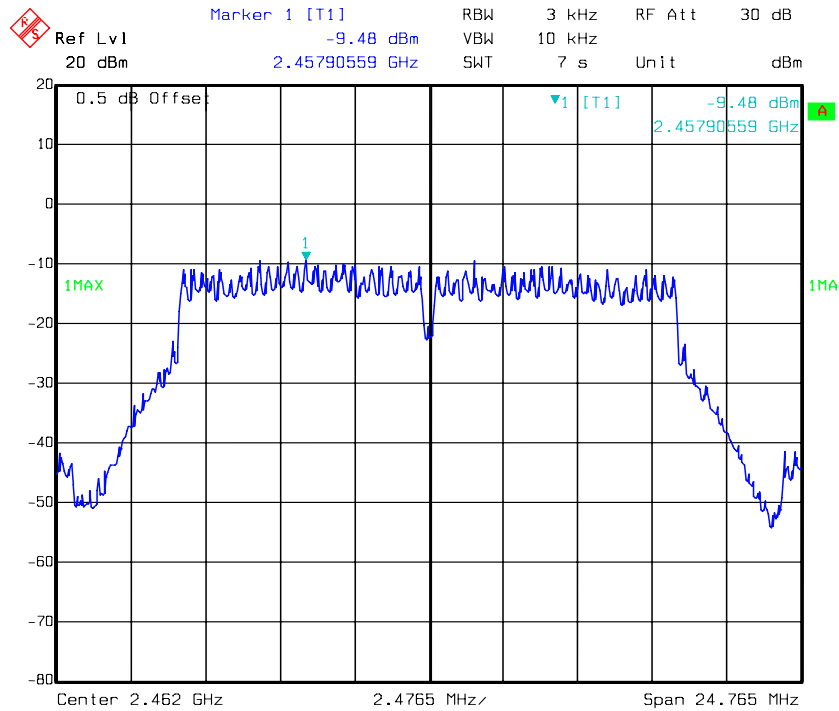


Power Spectral Density, 802.11n ht20 Low Channel


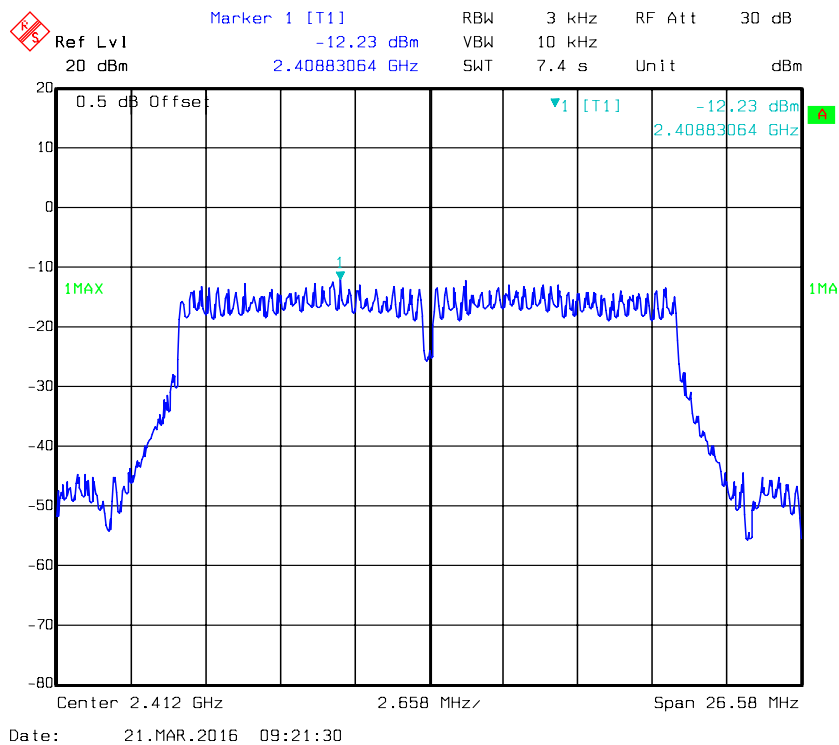


Power Spectral Density, 802.11n ht20 Middle Channel

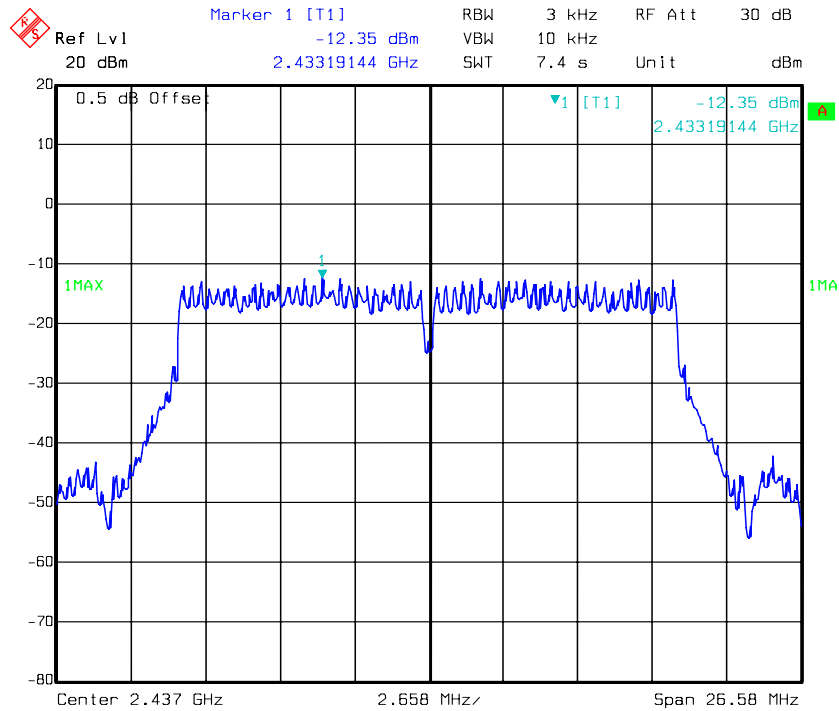


Power Spectral Density, 802.11n ht20 High Channel

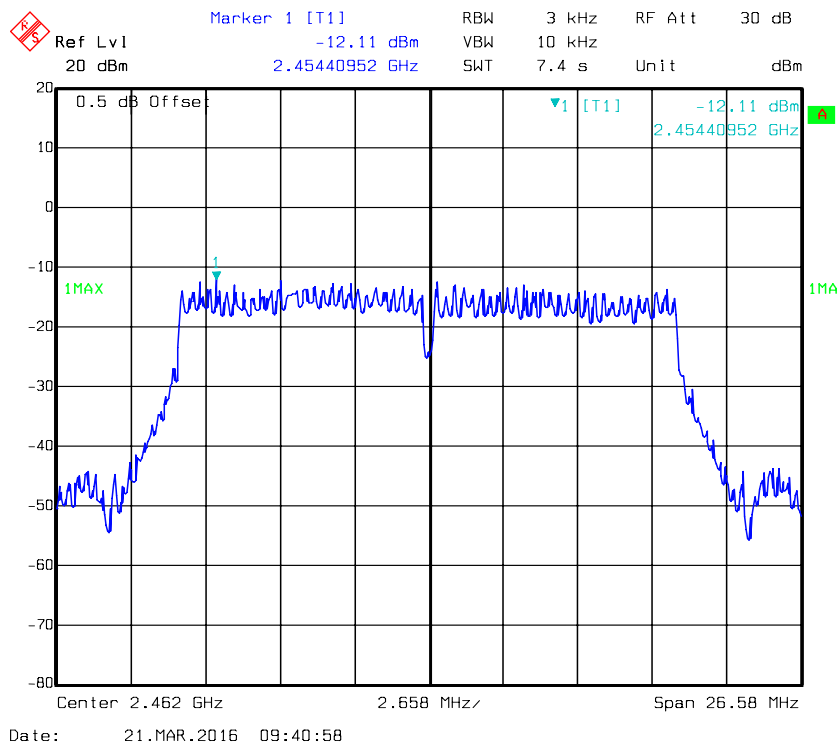

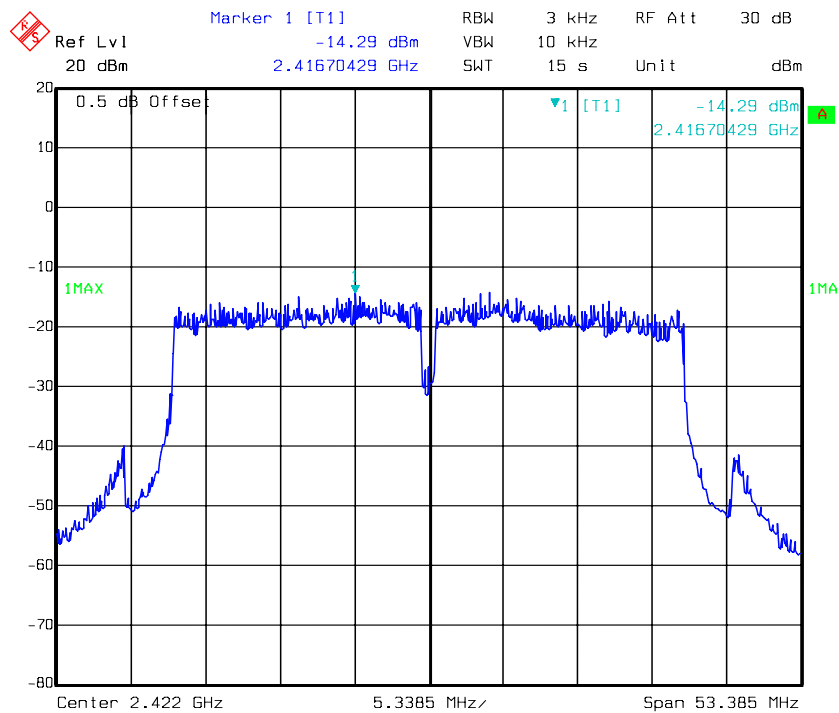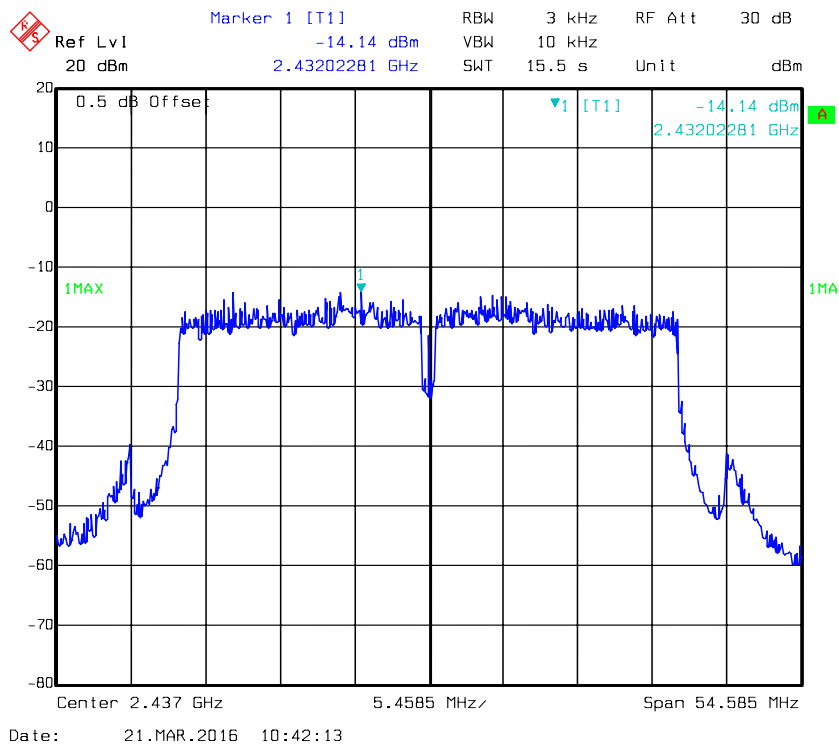
Power Spectral Density, 802.11n ht40 Low Channel**Power Spectral Density, 802.11n ht40 Middle Channel**

Power Spectral Density, 802.11n ht40 High Channel

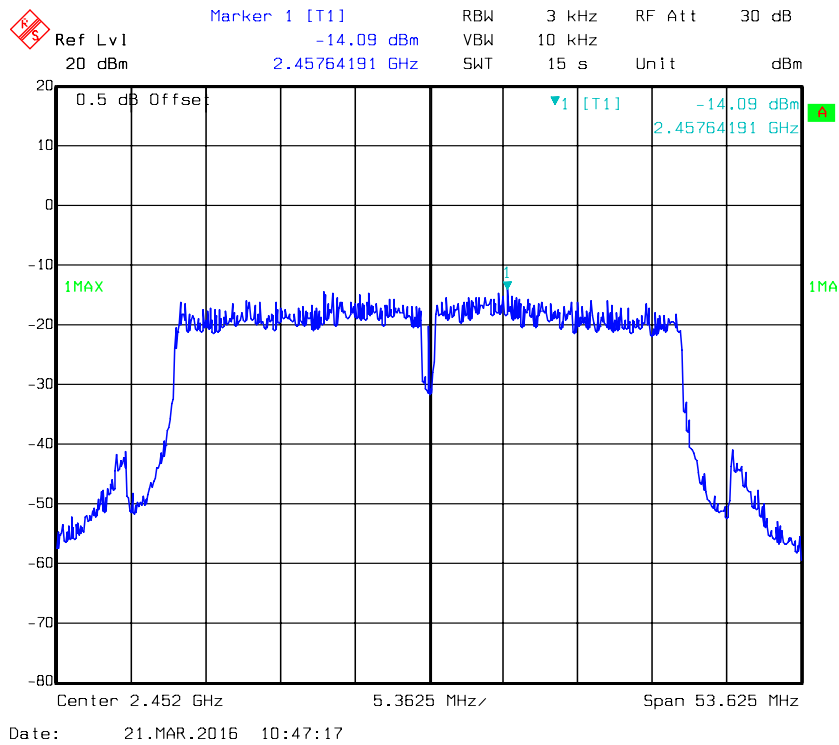


Chain 1


Power Spectral Density, 802.11b Low Channel

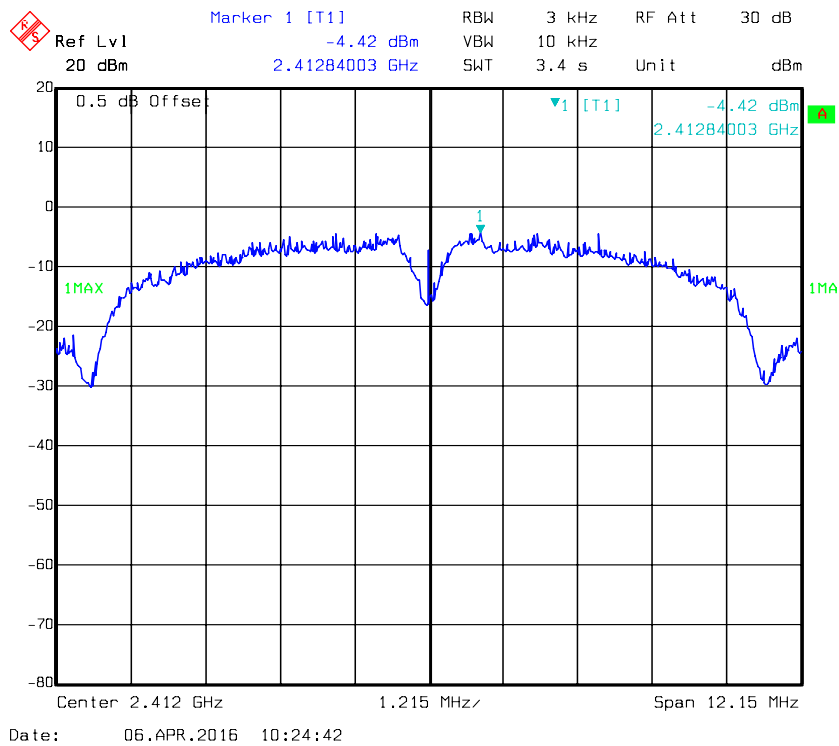


Power Spectral Density, 802.11b Middle Channel

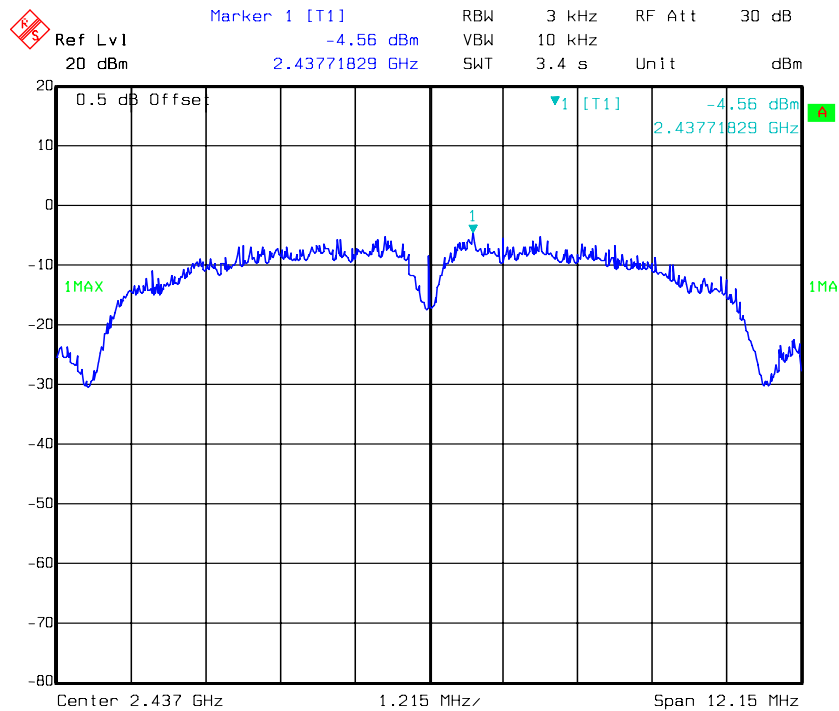


Power Spectral Density, 802.11b High Channel

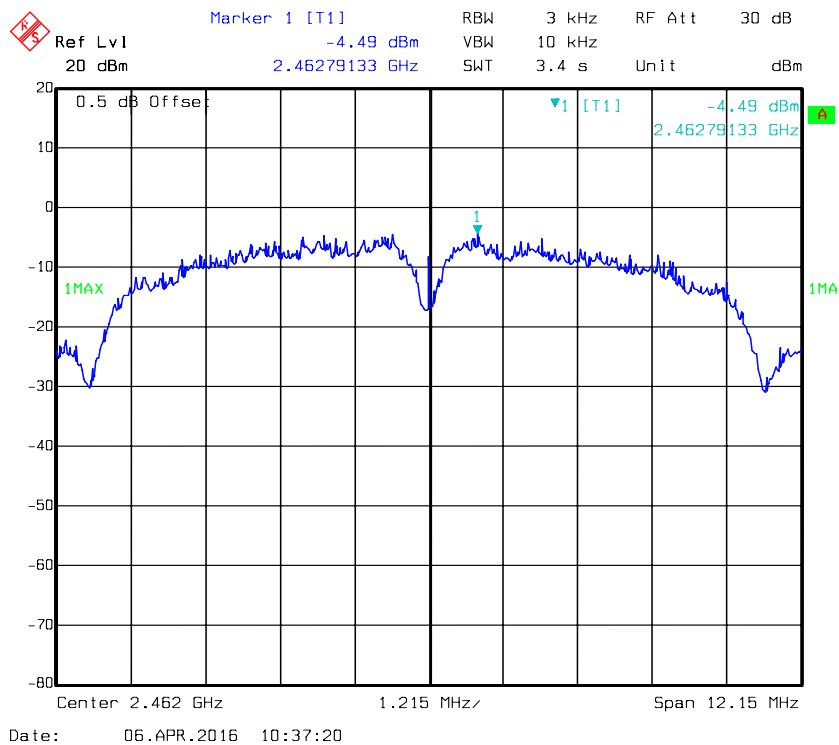


Power Spectral Density, 802.11g Low Channel

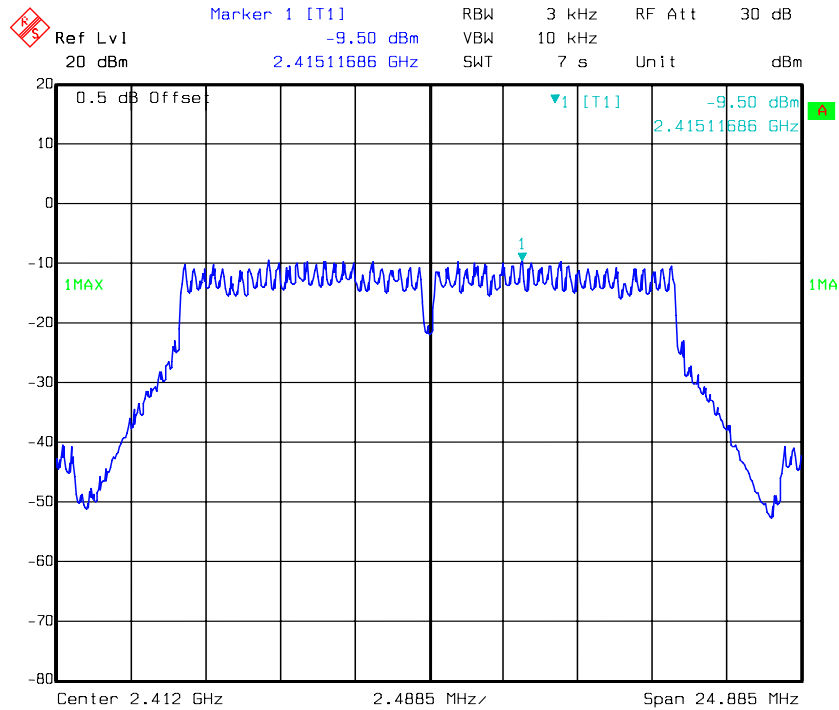


Power Spectral Density, 802.11g Middle Channel

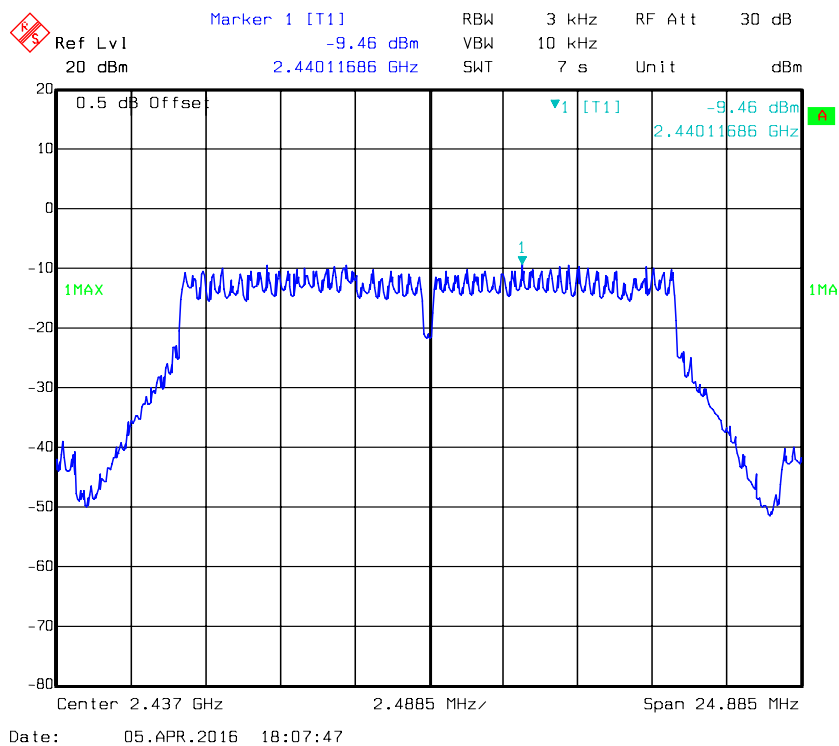


Power Spectral Density, 802.11g High Channel

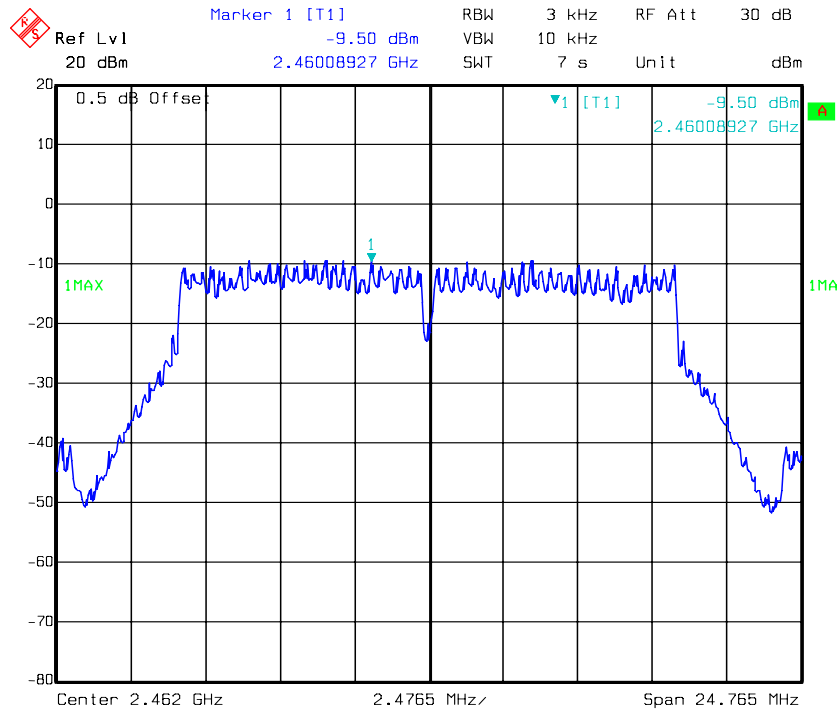


Power Spectral Density, 802.11n ht20 Low Channel

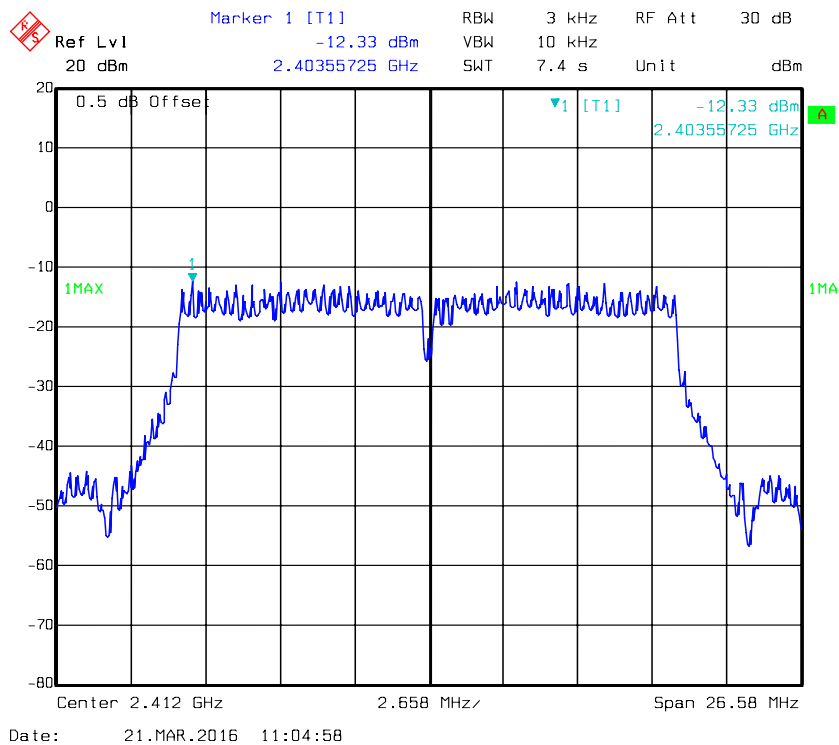


Power Spectral Density, 802.11n ht20 Middle Channel

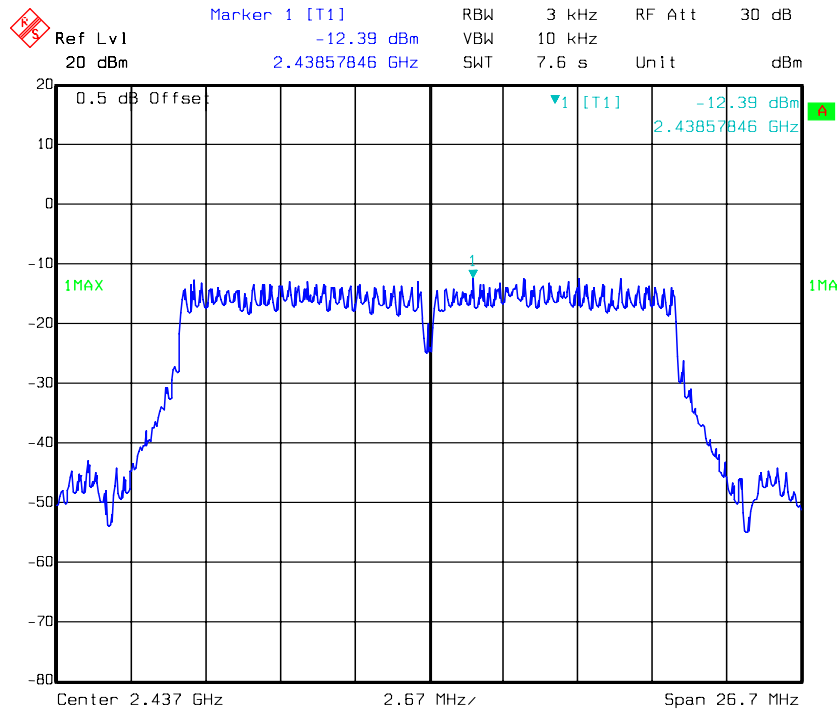


Power Spectral Density, 802.11n ht20 High Channel

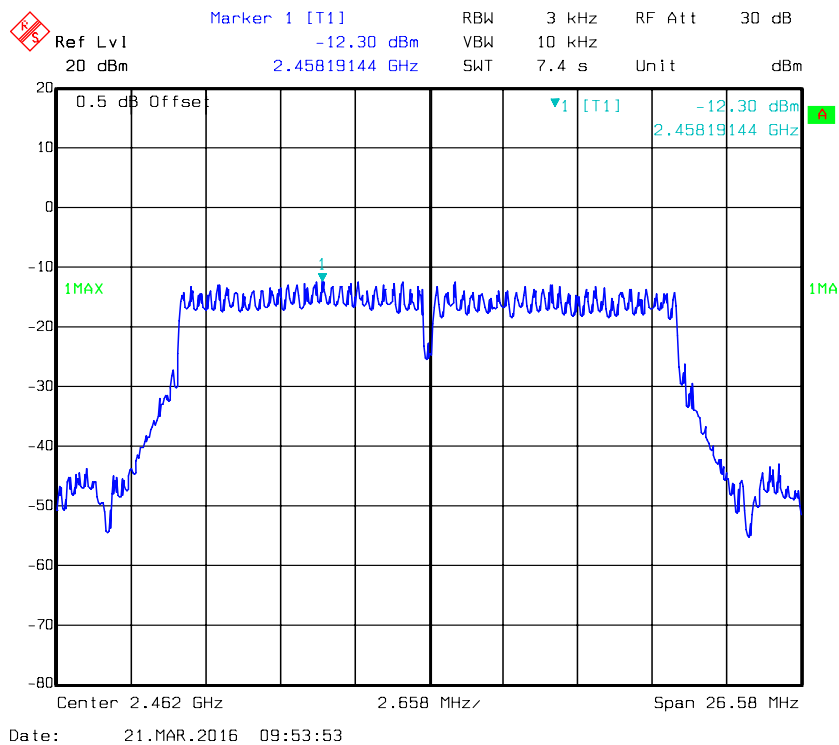


Power Spectral Density, 802.11n ht40 Low Channel

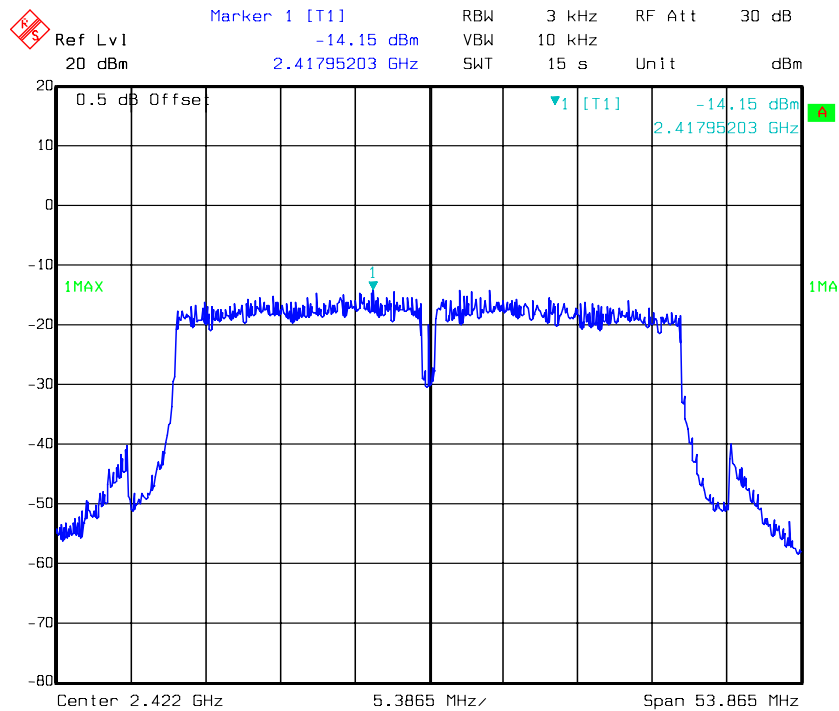

Power Spectral Density, 802.11n ht40 Middle Channel

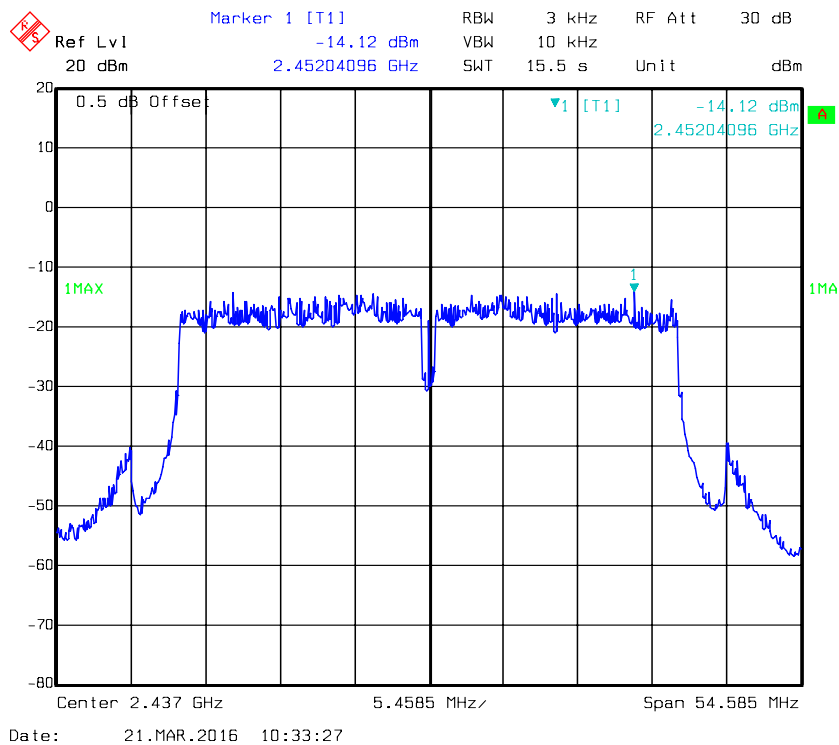

Power Spectral Density, 802.11n ht40 High Channel

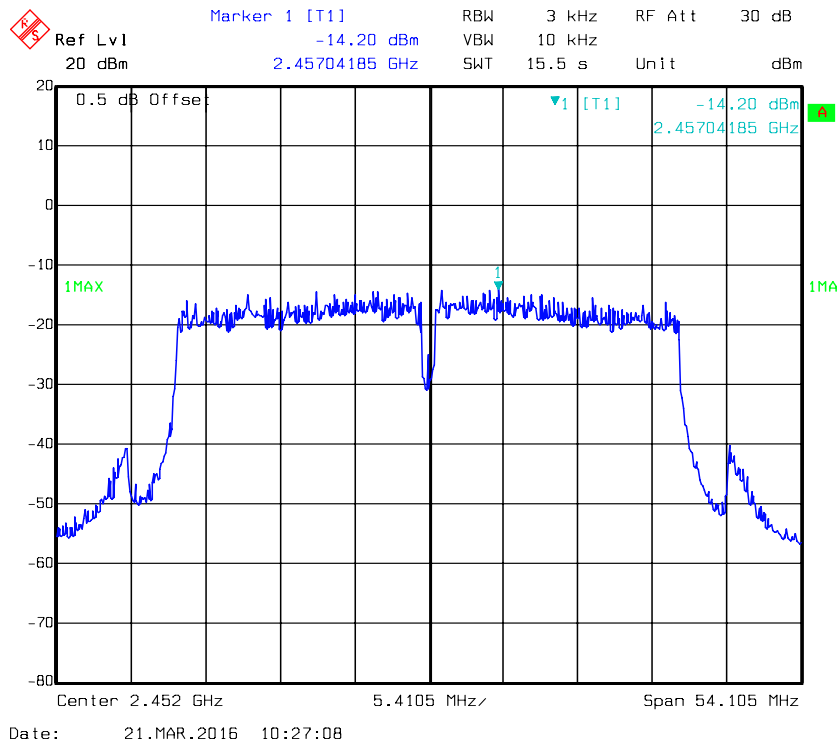

***** END OF REPORT *****