

# FCC Part 15C

## Measurement And Test Report

For

**CODIS CO.,LIMITED**

FLAT/RM H BLK 2 3/F ROYAL PENINSULA HUNG HOM KL

**FCC ID: 2AC3JCB-100**

Aug.22, 2014

|                                                                                     |                                                                                                                                                                        |
|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>This Report Concerns:</b><br><input checked="" type="checkbox"/> Original Report | <b>Equipment Type:</b><br>SMART PICO PROJECTOR                                                                                                                         |
| <b>Report Number:</b>                                                               | MTI140805003RF-1                                                                                                                                                       |
| <b>Test Engineer:</b>                                                               | David Chen <i>David Chen</i>                                                                                                                                           |
| <b>Reviewed By:</b>                                                                 | Tim Zhang <i>Tim Zhang</i>                                                                                                                                             |
| <b>Approved &amp; Authorized By:</b>                                                | Hebe Lee <i>Hebe Lee</i>                                                                                                                                               |
| <b>Test Date:</b>                                                                   | Aug.10- Aug.22,2014                                                                                                                                                    |
| <b>Prepared By:</b>                                                                 | <b>Shenzhen Microtest Technology Co.,Ltd</b><br>6F, Zhongbao Building, Gushu, Bao'an District, Shenzhen, P.R.China<br>Tel: +86-755-8885 0135<br>Fax: +86-755-8885 0136 |



**Note:** This test report is limited to the above client company and the product model only. It may not be duplicated without prior written consent of Shenzhen Microtest Technology Co.,Ltd.

**VERIFICATION OF COMPLIANCE**

|                      |                                                                                                                                                              |
|----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Applicant:           | CODIS CO.,LIMITED                                                                                                                                            |
| Address              | FLAT/RM H BLK 2 3/F ROYAL PENINSULA HUNG HOM KL                                                                                                              |
| Manufacturer Name:   | CODIS CO.,LIMITED                                                                                                                                            |
| Address:             | FLAT/RM H BLK 2 3/F ROYAL PENINSULA HUNG HOM KL                                                                                                              |
| Product Description: | SMART PICO PROJECTOR                                                                                                                                         |
| Brand Name:          | ICODIS                                                                                                                                                       |
| Model Name:          | CB-100, ICODES CB-100, ICODES CB-101, ICODES CB-102, ICODES CB-103, ICODES CB-105, ICODES CB-200, ICODES CB-201, ICODES CB-202, ICODES CB-203, ICODES CB-205 |
| Model difference:    | All the same, Only model name is different                                                                                                                   |
| Test procedure       | ANSI C63.4:2003, DA 00-705                                                                                                                                   |
| Standards            | FCC Part15.247:2012                                                                                                                                          |

## Table of Contents

|                                                             | Page      |
|-------------------------------------------------------------|-----------|
| <b>1 . SUMMARY OF TEST RESULTS</b>                          | <b>5</b>  |
| 1.1 TEST FACILITY                                           | 6         |
| 1.2 MEASUREMENT UNCERTAINTY                                 | 6         |
| <b>2 . GENERAL INFORMATION</b>                              | <b>7</b>  |
| 2.1 GENERAL DESCRIPTION OF EUT                              | 7         |
| 2.2 DESCRIPTION OF TEST MODES                               | 9         |
| 2.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING            | 9         |
| 2.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED | 10        |
| 2.5 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)            | 11        |
| 2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS                      | 12        |
| <b>3 . EMC EMISSION TEST</b>                                | <b>13</b> |
| 3.1 CONDUCTED EMISSION MEASUREMENT                          | 13        |
| 3.1.1 POWER LINE CONDUCTED EMISSION LIMITS                  | 13        |
| 3.1.2 TEST PROCEDURE                                        | 14        |
| 3.1.3 DEVIATION FROM TEST STANDARD                          | 14        |
| 3.1.4 TEST SETUP                                            | 14        |
| 3.1.5 EUT OPERATING CONDITIONS                              | 14        |
| 3.1.6 TEST RESULTS                                          | 15        |
| 3.2 RADIATED EMISSION MEASUREMENT                           | 17        |
| 3.2.1 RADIATED EMISSION LIMITS                              | 17        |
| 3.2.2 TEST PROCEDURE                                        | 17        |
| 3.2.3 DEVIATION FROM TEST STANDARD                          | 18        |
| 3.2.4 TEST SETUP                                            | 19        |
| 3.2.5 EUT OPERATING CONDITIONS                              | 20        |
| 3.2.6 TEST RESULTS (BELOW 30 MHZ)                           | 21        |
| 3.2.7 TEST RESULTS (BETWEEN 30M – 1000 MHZ)                 | 22        |
| 3.2.8 TEST RESULTS (ABOVE 1000 MHZ)                         | 24        |
| 3.2.9 TEST RESULTS (RESTRICTED BANDS REQUIREMENTS)          | 42        |
| <b>4 . NUMBER OF HOPPING CHANNEL</b>                        | <b>54</b> |
| 4.1 APPLIED PROCEDURES / LIMIT                              | 54        |
| 4.1.1 TEST PROCEDURE                                        | 54        |
| 4.1.2 DEVIATION FROM STANDARD                               | 54        |
| 4.1.3 TEST SETUP                                            | 54        |
| 4.1.4 EUT OPERATION CONDITIONS                              | 54        |
| 4.1.5 TEST RESULTS                                          | 55        |
| <b>5 . AVERAGE TIME OF OCCUPANCY</b>                        | <b>56</b> |
| 5.1 APPLIED PROCEDURES / LIMIT                              | 56        |

| <b>Table of Contents</b>                                  | <b>Page</b> |
|-----------------------------------------------------------|-------------|
| 5.1.1 TEST PROCEDURE                                      | 56          |
| 5.1.2 DEVIATION FROM STANDARD                             | 56          |
| 5.1.3 TEST SETUP                                          | 57          |
| 5.1.4 EUT OPERATION CONDITIONS                            | 57          |
| 5.1.5 TEST RESULTS                                        | 58          |
| <b>6 . HOPPING CHANNEL SEPARATION MEASUREMENT</b>         | <b>64</b>   |
| 6.1 APPLIED PROCEDURES / LIMIT                            | 64          |
| 6.1.1 TEST PROCEDURE                                      | 64          |
| 6.1.2 DEVIATION FROM STANDARD                             | 64          |
| 6.1.3 TEST SETUP                                          | 64          |
| 6.1.4 EUT OPERATION CONDITIONS                            | 64          |
| 6.1.5 TEST RESULTS                                        | 65          |
| <b>7 . BANDWIDTH TEST</b>                                 | <b>71</b>   |
| 7.1 APPLIED PROCEDURES / LIMIT                            | 71          |
| 7.1.1 TEST PROCEDURE                                      | 71          |
| 7.1.2 DEVIATION FROM STANDARD                             | 71          |
| 7.1.3 TEST SETUP                                          | 71          |
| 7.1.4 EUT OPERATION CONDITIONS                            | 71          |
| 7.1.5 TEST RESULTS                                        | 72          |
| <b>8 . PEAK OUTPUT POWER TEST</b>                         | <b>78</b>   |
| 8.1 APPLIED PROCEDURES / LIMIT                            | 78          |
| 8.1.1 TEST PROCEDURE                                      | 78          |
| 8.1.2 DEVIATION FROM STANDARD                             | 78          |
| 8.1.3 TEST SETUP                                          | 78          |
| 8.1.4 EUT OPERATION CONDITIONS                            | 78          |
| 8.1.5 TEST RESULTS                                        | 79          |
| <b>9 . EUT TEST PHOTO</b>                                 | <b>85</b>   |
| <b>APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS</b> |             |

**1. SUMMARY OF TEST RESULTS**

Test procedures according to the technical standards:

| <b>FCC Part15 (15.247) , Subpart C</b> |                             |                 |               |
|----------------------------------------|-----------------------------|-----------------|---------------|
| <b>Standard Section</b>                | <b>Test Item</b>            | <b>Judgment</b> | <b>Remark</b> |
| 15.207                                 | Conducted Emission          | PASS            |               |
| 15.247(a)(1)                           | Hopping Channel Separation  | PASS            |               |
| 15.247(b)(1)                           | Peak Output Power           | PASS            |               |
| 15.247(c)                              | Radiated Spurious Emission  | PASS            |               |
| 15.247(a)(iii)                         | Number of Hopping Frequency | PASS            |               |
| 15.247(a)(iii)                         | Dwell Time                  | PASS            |               |
| 15.247(a)(1)                           | Bandwidth                   | PASS            |               |
| 15.205                                 | Band Edge Emission          | PASS            |               |
| 15.203                                 | Antenna Requirement         | PASS            |               |

**NOTE:**

(1)" N/A" denotes test is not applicable in this Test Report

## 1.1 TEST FACILITY

Shenzhen Toby Technology Co., Ltd.

Add. : 10/F.,A Block, Jiada R&D Bldg., No.5 Songpingshan, Road, Science&Technology Park, Shenzhen, 518057.

FCC Registration No.:811562

## 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

| No. | Item                          | Uncertainty               |
|-----|-------------------------------|---------------------------|
| 1   | Conducted Emission Test       | $\pm 1.38\text{dB}$       |
| 2   | RF power, conducted           | $\pm 0.16\text{dB}$       |
| 3   | Spurious emissions, conducted | $\pm 0.21\text{dB}$       |
| 4   | All emissions, radiated(<1G)  | $\pm 4.68\text{dB}$       |
| 5   | All emissions, radiated(>1G)  | $\pm 4.89\text{dB}$       |
| 6   | Temperature                   | $\pm 0.5^{\circ}\text{C}$ |
| 7   | Humidity                      | $\pm 2\%$                 |

## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

|                        |                                                                                                                                                                                                                    |                                                                             |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|
| Equipment              | SMART PICO PROJECTOR                                                                                                                                                                                               |                                                                             |
| Trade Name             | ICODIS                                                                                                                                                                                                             |                                                                             |
| Model Name             | CB-100                                                                                                                                                                                                             |                                                                             |
| Serial Model           | ICODIS CB-100, ICODIS CB-101, ICODIS CB-102, ICODIS CB-103, ICODIS CB-105, ICODIS CB-200, ICODIS CB-201, ICODIS CB-202, ICODIS CB-203, ICODIS CB-205                                                               |                                                                             |
| Model Difference       | All the same, Only model name is different                                                                                                                                                                         |                                                                             |
| Product Description    | The EUT is a SMART PICO PROJECTOR                                                                                                                                                                                  |                                                                             |
|                        | Operation Frequency:                                                                                                                                                                                               | 2402~2480 MHz                                                               |
|                        | Modulation Type:                                                                                                                                                                                                   | BT(1Mbps): GFSK<br>BT EDR(2Mbps): $\pi/4$ -DQPSK<br>BT EDR(3Mbps): 8-DPSK   |
|                        | Bit Rate of Transmitter                                                                                                                                                                                            | 1Mbps/2Mbps/3Mbps                                                           |
|                        | Number Of Channel                                                                                                                                                                                                  | 79 CH                                                                       |
|                        | Antenna Designation:                                                                                                                                                                                               | Please see Note 3.                                                          |
|                        | Output Power(Conducted):                                                                                                                                                                                           | BT(1Mbps): 0.435dBm<br>BT EDR(2Mbps): -0.135dBm<br>BT EDR(3Mbps): -0.363dBm |
|                        | Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual. |                                                                             |
|                        |                                                                                                                                                                                                                    |                                                                             |
| Channel List           | Please refer to the Note 2.                                                                                                                                                                                        |                                                                             |
| Adapter                | Model: GEO101U-050200W                                                                                                                                                                                             |                                                                             |
|                        | Input: AC 100-240V, 50/60Hz, 0.3A                                                                                                                                                                                  |                                                                             |
|                        | Output: DC 5V, 2A                                                                                                                                                                                                  |                                                                             |
| Battery                | Rated Voltage: 3.7V                                                                                                                                                                                                |                                                                             |
| Connecting I/O Port(s) | Please refer to the User's Manual                                                                                                                                                                                  |                                                                             |

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- 2.

| Channel List |                 |         |                 |         |                 |
|--------------|-----------------|---------|-----------------|---------|-----------------|
| Channel      | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 00           | 2402            | 27      | 2429            | 54      | 2456            |
| 01           | 2403            | 28      | 2430            | 55      | 2457            |
| 02           | 2404            | 29      | 2431            | 56      | 2458            |
| 03           | 2405            | 30      | 2432            | 57      | 2459            |
| 04           | 2406            | 31      | 2433            | 58      | 2460            |
| 05           | 2407            | 32      | 2434            | 59      | 2461            |
| 06           | 2408            | 33      | 2435            | 60      | 2462            |
| 07           | 2409            | 34      | 2436            | 61      | 2463            |
| 08           | 2410            | 35      | 2437            | 62      | 2464            |
| 09           | 2411            | 36      | 2438            | 63      | 2465            |
| 10           | 2412            | 37      | 2439            | 64      | 2466            |
| 11           | 2413            | 38      | 2440            | 65      | 2467            |
| 12           | 2414            | 39      | 2441            | 66      | 2468            |
| 13           | 2415            | 40      | 2442            | 67      | 2469            |
| 14           | 2416            | 41      | 2443            | 68      | 2470            |
| 15           | 2417            | 42      | 2444            | 69      | 2471            |
| 16           | 2418            | 43      | 2445            | 70      | 2472            |
| 17           | 2419            | 44      | 2446            | 71      | 2473            |
| 18           | 2420            | 45      | 2447            | 72      | 2474            |
| 19           | 2421            | 46      | 2448            | 73      | 2475            |
| 20           | 2422            | 47      | 2449            | 74      | 2476            |
| 21           | 2423            | 48      | 2450            | 75      | 2477            |
| 22           | 2424            | 49      | 2451            | 76      | 2478            |
| 23           | 2425            | 50      | 2452            | 77      | 2479            |
| 24           | 2426            | 51      | 2453            | 78      | 2480            |
| 25           | 2427            | 52      | 2454            |         |                 |
| 26           | 2428            | 53      | 2455            |         |                 |

- 3.

Table for Filed Antenna

| Ant | Brand | Model Name | Antenna Type       | Connector | Gain (dBi) | NOTE       |
|-----|-------|------------|--------------------|-----------|------------|------------|
| 1   | N/A   | N/A        | Integrated antenna | N/A       | 0          | BT Antenna |

## 2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

| Pretest Mode | Description  |
|--------------|--------------|
| Mode 1       | CH00         |
| Mode 2       | CH39         |
| Mode 3       | CH78         |
| Mode 4       | BT Link Mode |

| For Conducted Emission |              |
|------------------------|--------------|
| Final Test Mode        | Description  |
| Mode 4                 | BT Link Mode |

| For Radiated Emission |             |
|-----------------------|-------------|
| Final Test Mode       | Description |
| Mode 1                | CH00        |
| Mode 2                | CH39        |
| Mode 3                | CH78        |

Note:


- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) The EUT use new battery.
- (3) The data rate was set in 1Mbps for radiated emission due to the highest RF output power.

## 2.3 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of FHSS

| Test software Version | Test program: RK903 |          |          |
|-----------------------|---------------------|----------|----------|
| Frequency             | 2402 MHz            | 2441 MHz | 2480 MHz |
| Parameters(1Mbps)     | DEF                 | DEF      | DEF      |
| Parameters(2Mbps)     | DEF                 | DEF      | DEF      |
| Parameters(3Mbps)     | DEF                 | DEF      | DEF      |

2.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

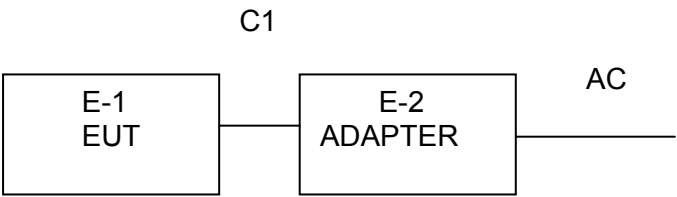

**2.5 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)**

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| Item | Equipment            | Mfr/Brand | Model/Type No. | Series No. | Note |
|------|----------------------|-----------|----------------|------------|------|
| E-1  | SMART PICO PROJECTOR | ICODIS    | CB-100         | N/A        | EUT  |
| E-2  | Adapter              | N/A       | CB-100         | N/A        |      |
|      |                      |           |                |            |      |
|      |                      |           |                |            |      |
|      |                      |           |                |            |      |
|      |                      |           |                |            |      |

| Item | Shielded Type | Ferrite Core | Length | Note |
|------|---------------|--------------|--------|------|
| C1   | No            | No           | 1.5M   |      |
|      |               |              |        |      |
|      |               |              |        |      |
|      |               |              |        |      |
|      |               |              |        |      |

**Note:**

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.

## 2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

### Radiation Test equipment

| Equipment              | Manufacturer    | Model No. | Serial No. | Last Cal.     | Cal. Due Date |
|------------------------|-----------------|-----------|------------|---------------|---------------|
| Spectrum Analyzer      | Agilent         | E4407B    | MY45106456 | Mar. 20, 2014 | Mar. 19, 2015 |
| Spectrum Analyzer      | Rohde & Schwarz | FSP30     | DE25181    | Aug. 10, 2013 | Aug.09, 2014  |
| EMI Test Receiver      | Rohde & Schwarz | ESCI      | 101165     | Aug. 10, 2013 | Aug.09, 2014  |
| Bilog Antenna          | ETS-LINDGREN    | 3142E     | 00117537   | Mar. 07, 2014 | Mar.06, 2015  |
| Bilog Antenna          | ETS-LINDGREN    | 3142E     | 00117542   | Mar. 07, 2014 | Mar.06, 2015  |
| Horn Antenna           | ETS-LINDGREN    | 3117      | 00143207   | Mar. 07, 2014 | Mar.06, 2015  |
| Horn Antenna           | ETS-LINDGREN    | 3117      | 00143209   | Mar. 07, 2014 | Mar.06, 2015  |
| Pre-amplifier          | HP              | 11909A    | 185903     | Mar. 07, 2014 | Mar.06, 2015  |
| Pre-amplifier          | HP              | 8447B     | 3008A00849 | Mar. 07, 2014 | Mar.06, 2015  |
| Cable                  | HUBER+SUHNE R   | 100       | SUCOFLEX   | Mar. 07, 2014 | Mar.06, 2015  |
| Signal Generator       | Rohde & Schwarz | SML03     | IKW682-054 | Feb. 11, 2014 | Feb.10, 2015  |
| Positioning Controller | ETS-LINDGREN    | 2090      | N/A        | N/A           | N/A           |

### Conduction Test equipment

| Description       | Manufacturer    | Model No.   | Serial No. | Cal. Date  | Cal. Due Date |
|-------------------|-----------------|-------------|------------|------------|---------------|
| EMI Test Receiver | ROHDE& SCHWARZ  | ESCI        | 100321     | 2014-08-10 | 2015-08-09    |
| 50ΩCoaxial Switch | Anritsu         | MP59B       | X10321     | 2014-08-10 | 2015-08-09    |
| L.I.S.N           | Rohde & Schwarz | ENV216      | 101131     | 2014-08-10 | 2015-08-09    |
| L.I.S.N           | SCHWARZBECK     | NNBL 8226-2 | 8226-2/164 | 2014-08-10 | 2015-08-09    |

### 3. EMC EMISSION TEST

#### 3.1 CONDUCTED EMISSION MEASUREMENT

##### 3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

| FREQUENCY (MHz) | Class A (dBuV) |         | Class B (dBuV) |           | Standard |
|-----------------|----------------|---------|----------------|-----------|----------|
|                 | Quasi-peak     | Average | Quasi-peak     | Average   |          |
| 0.15 -0.5       | 79.00          | 66.00   | 66 - 56 *      | 56 - 46 * | CISPR    |
| 0.50 -5.0       | 73.00          | 60.00   | 56.00          | 46.00     | CISPR    |
| 5.0 -30.0       | 73.00          | 60.00   | 60.00          | 50.00     | CISPR    |

|           |       |       |           |           |     |
|-----------|-------|-------|-----------|-----------|-----|
| 0.15 -0.5 | 79.00 | 66.00 | 66 - 56 * | 56 - 46 * | FCC |
| 0.50 -5.0 | 73.00 | 60.00 | 56.00     | 46.00     | FCC |
| 5.0 -30.0 | 73.00 | 60.00 | 60.00     | 50.00     | FCC |

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

| Receiver Parameters | Setting  |
|---------------------|----------|
| Attenuation         | 10 dB    |
| Start Frequency     | 0.15 MHz |
| Stop Frequency      | 30 MHz   |
| IF Bandwidth        | 9 kHz    |


### 3.1.2 TEST PROCEDURE

- The EUT was placed 0.4 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

### 3.1.3 DEVIATION FROM TEST STANDARD

No deviation

### 3.1.4 TEST SETUP

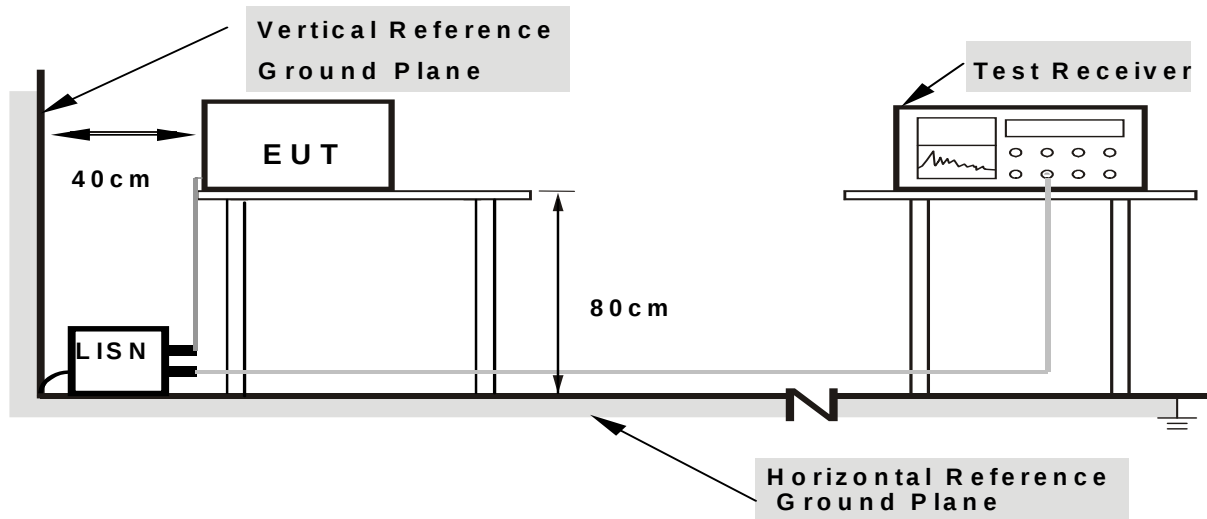

**Note: 1.**Support units were connected to second LISN.

**2.**Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

### 3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.


3.1.6 TEST RESULTS

|                |                                   |                     |        |
|----------------|-----------------------------------|---------------------|--------|
| EUT :          | SMART PICO PROJECTOR              | Model Name :        | CB-100 |
| Temperature :  | 26 °C                             | Relative Humidity : | 54%    |
| Pressure :     | 1010hPa                           | Phase :             | L      |
| Test Voltage : | DC 5.0V from adapter AC 120V/60Hz | Test Mode :         | Mode 4 |

| Frequency | Reading Level | Correct Factor | Measure-ment | Limits | Margin | Detector Type |
|-----------|---------------|----------------|--------------|--------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)           | (dBμV)       | (dBμV) | (dB)   |               |
| 0.19      | 32.86         | 10.4           | 43.26        | 64.03  | -20.77 | QP            |
| 0.194     | 21.54         | 10.41          | 31.95        | 53.86  | -21.91 | AVG           |
| 0.6058    | 19.92         | 10.4           | 30.32        | 46     | -15.68 | AVG           |
| 0.7378    | 33.61         | 10.41          | 44.02        | 56     | -11.98 | QP            |
| 5.0579    | 30.91         | 10.67          | 41.58        | 60     | -18.42 | QP            |
| 5.7458    | 15.89         | 10.67          | 26.56        | 50     | -23.44 | AVG           |
|           |               |                |              |        |        |               |
|           |               |                |              |        |        |               |
|           |               |                |              |        |        |               |
|           |               |                |              |        |        |               |

Remark:

- 1. All readings are Quasi-Peak and Average values.
- 2. Factor = Insertion Loss + Cable Loss.

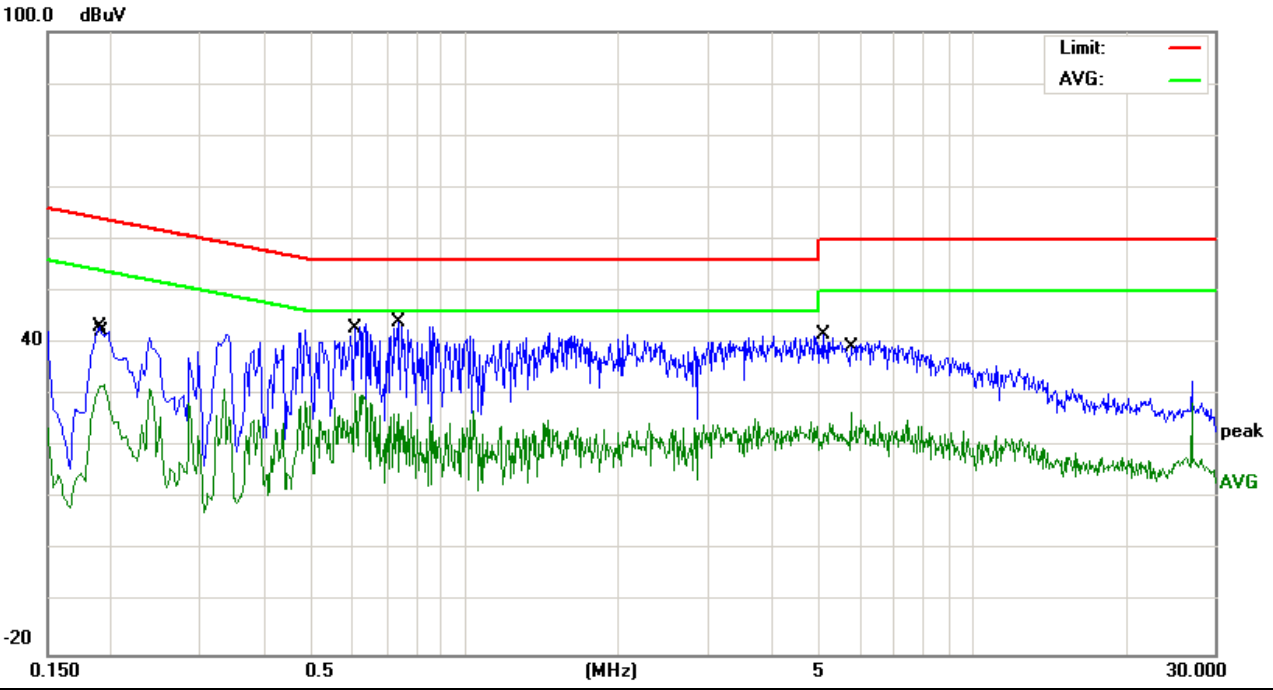


|                |                                   |                     |        |
|----------------|-----------------------------------|---------------------|--------|
| EUT :          | SMART PICO PROJECTOR              | Model Name :        | CB-100 |
| Temperature :  | 26 °C                             | Relative Humidity : | 54%    |
| Pressure :     | 1010hPa                           | Phase :             | N      |
| Test Voltage : | DC 5.0V from adapter AC 120V/60Hz | Test Mode :         | Mode 4 |

| Frequency | Reading Level | Correct Factor | Measure-ment | Limits | Margin | Detector Type |
|-----------|---------------|----------------|--------------|--------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)           | (dBμV)       | (dBμV) | (dB)   |               |
| 0.2099    | 28.01         | 10.44          | 38.45        | 63.21  | -24.76 | QP            |
| 0.2859    | 21.65         | 10.43          | 32.08        | 50.64  | -18.56 | AVG           |
| 0.626     | 31.99         | 10.41          | 42.4         | 56     | -13.6  | QP            |
| 0.626     | 21.76         | 10.41          | 32.17        | 46     | -13.83 | AVG           |
| 3.322     | 15.15         | 10.53          | 25.68        | 46     | -20.32 | AVG           |
| 3.5019    | 28.89         | 10.6           | 39.49        | 56     | -16.51 | QP            |
|           |               |                |              |        |        |               |
|           |               |                |              |        |        |               |

Remark:

1. All readings are Quasi-Peak and Average values.

2. Factor = Insertion Loss + Cable Loss.

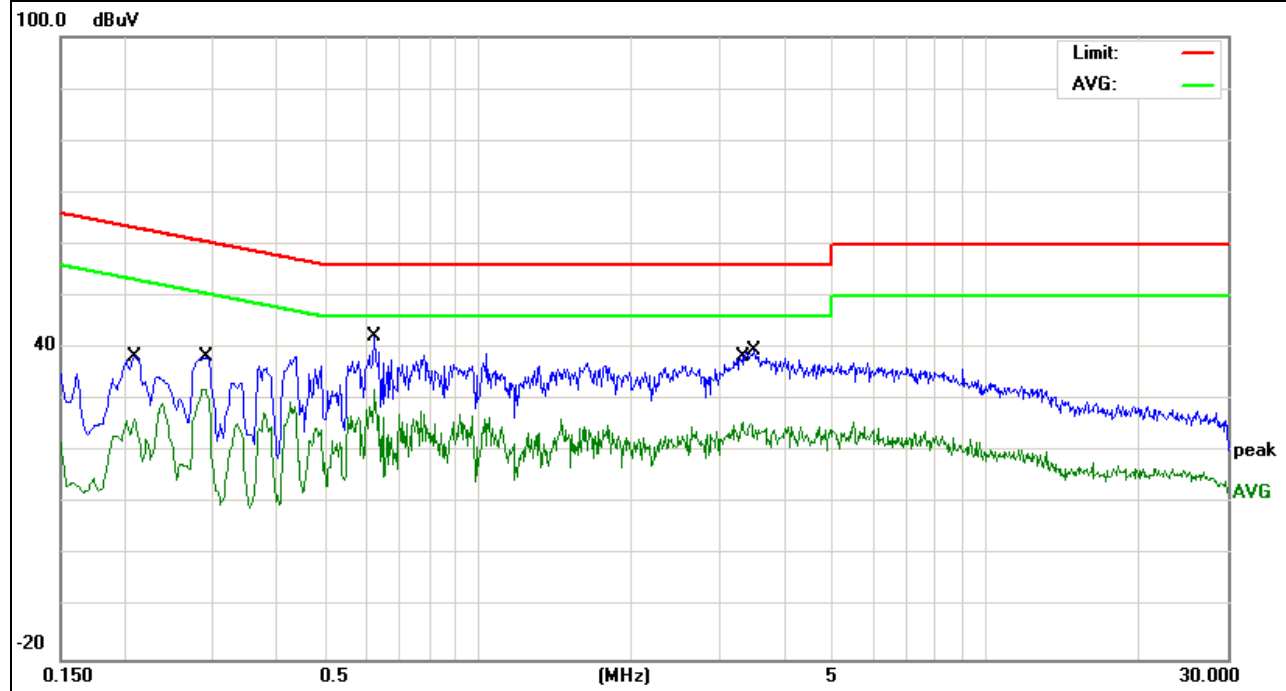

## 3.2 RADIATED EMISSION MEASUREMENT

### 3.2.1 RADIATED EMISSION LIMITS

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequencies<br>(MHz) | Field Strength<br>(micorvolts/meter) | Measurement Distance<br>(meters) |
|----------------------|--------------------------------------|----------------------------------|
| 0.009~0.490          | 2400/F(KHz)                          | 300                              |
| 0.490~1.705          | 24000/F(KHz)                         | 30                               |
| 1.705~30.0           | 30                                   | 30                               |
| 30~88                | 100                                  | 3                                |
| 88~216               | 150                                  | 3                                |
| 216~960              | 200                                  | 3                                |
| Above 960            | 500                                  | 3                                |

| Spectrum Parameter                    | Setting                                          |
|---------------------------------------|--------------------------------------------------|
| Attenuation                           | Auto                                             |
| Start Frequency                       | 1000 MHz                                         |
| Stop Frequency                        | 10th carrier harmonic                            |
| RB / VB (emission in restricted band) | 1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average |

| Receiver Parameter     | Setting                          |
|------------------------|----------------------------------|
| Attenuation            | Auto                             |
| Start ~ Stop Frequency | 9kHz~150kHz / RB 200Hz for QP    |
| Start ~ Stop Frequency | 150kHz~30MHz / RB 9kHz for QP    |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB 120kHz for QP |

### 3.2.2 TEST PROCEDURE

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.

e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.

f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

### **3.2.3 DEVIATION FROM TEST STANDARD**


No deviation


### 3.2.4 TEST SETUP

#### (A) Radiated Emission Test-Up Frequency Below 30MHz

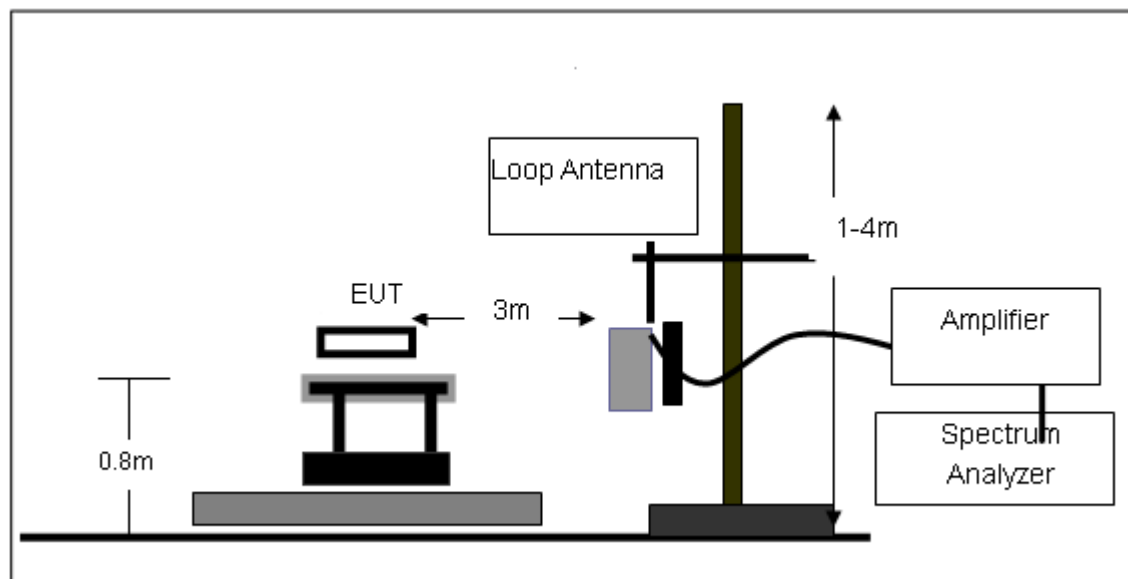

#### (B) Radiated Emission Test-Up Frequency 30MHz~1GHz

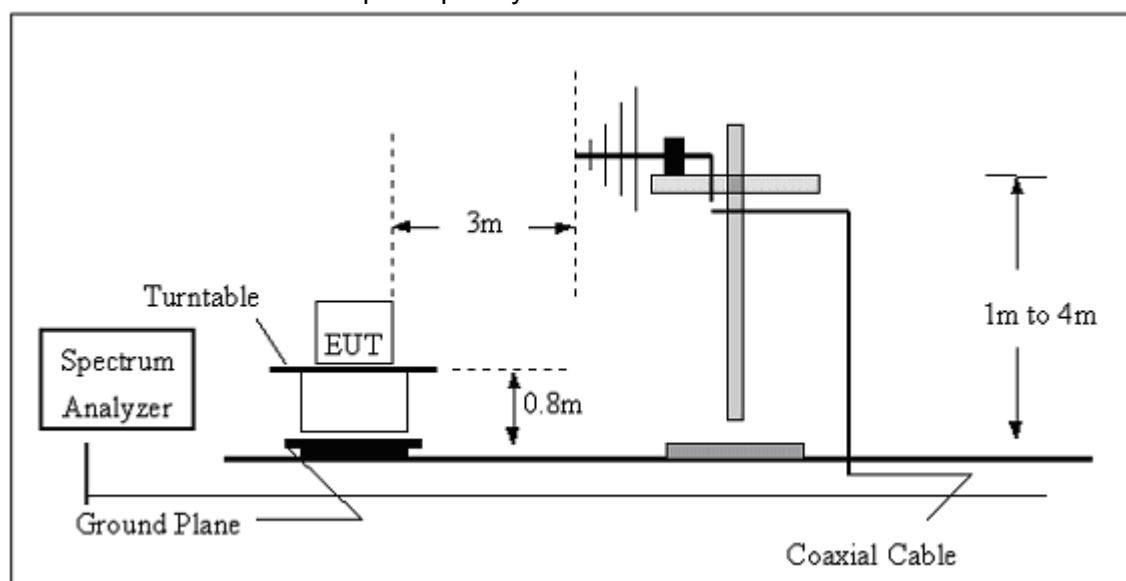

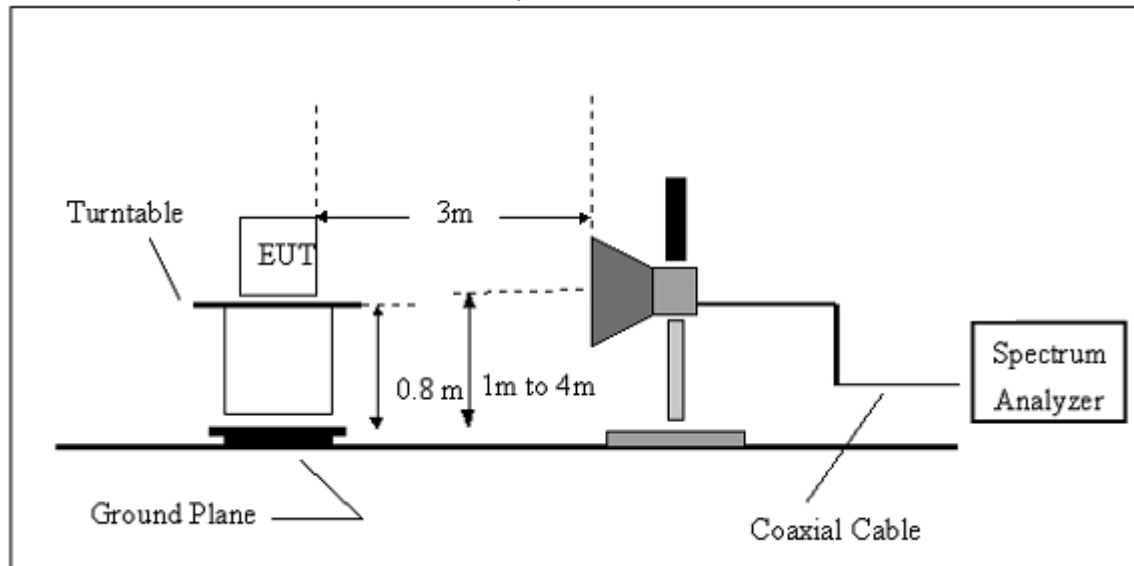**(C) Radiated Emission Test-Up Frequency Above 1GHz****3.2.5 EUT OPERATING CONDITIONS**

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**3.2.6 TEST RESULTS (BELOW 30 MHZ)**

|                |                      |                     |        |
|----------------|----------------------|---------------------|--------|
| EUT :          | SMART PICO PROJECTOR | Model Name :        | CB-100 |
| Temperature :  | 20 °C                | Relative Humidity : | 48%    |
| Pressure :     | 1010 hPa             | Polarization :      | ---    |
| Test Voltage : | AC 120V by battery   |                     |        |
| Test Mode :    | TX                   |                     |        |

| Freq. | Reading  | Limit    | Margin | State |
|-------|----------|----------|--------|-------|
| (MHz) | (dBuV/m) | (dBuV/m) | (dB)   | P/F   |
| --    | --       | --       | --     | PASS  |
| --    | --       | --       | --     | PASS  |

**NOTE:**

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log (\text{specific distance/test distance})(\text{dB})$ ;


Limit line = specific limits(dBuv) + distance extrapolation factor.

3.2.7 TEST RESULTS (BETWEEN 30M – 1000 MHZ)

|                |                      |                     |            |
|----------------|----------------------|---------------------|------------|
| EUT :          | SMART PICO PROJECTOR | Model Name :        | CB-100     |
| Temperature :  | 20 °C                | Relative Humidity : | 48%        |
| Pressure :     | 1010 hPa             | Polarization :      | Horizontal |
| Test Voltage : | AC 120V by battery   |                     |            |
| Test Mode :    | TX                   |                     |            |

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 88.0327   | 23.92         | 9.08   | 33             | 43.5     | -10.5  | QP            |
| 143.3258  | 24.47         | 11.93  | 36.4           | 43.5     | -7.1   | QP            |
| 311.0867  | 23.89         | 14.61  | 38.5           | 46       | -7.5   | QP            |
| 88.0327   | 23.92         | 9.08   | 33             | 43.5     | -10.5  | QP            |
|           |               |        |                |          |        |               |
|           |               |        |                |          |        |               |


Remark:  
Factor = Antenna Factor + Cable Loss – Pre-amplifier.  
All interfaces was connected, and BT TX mode was link.

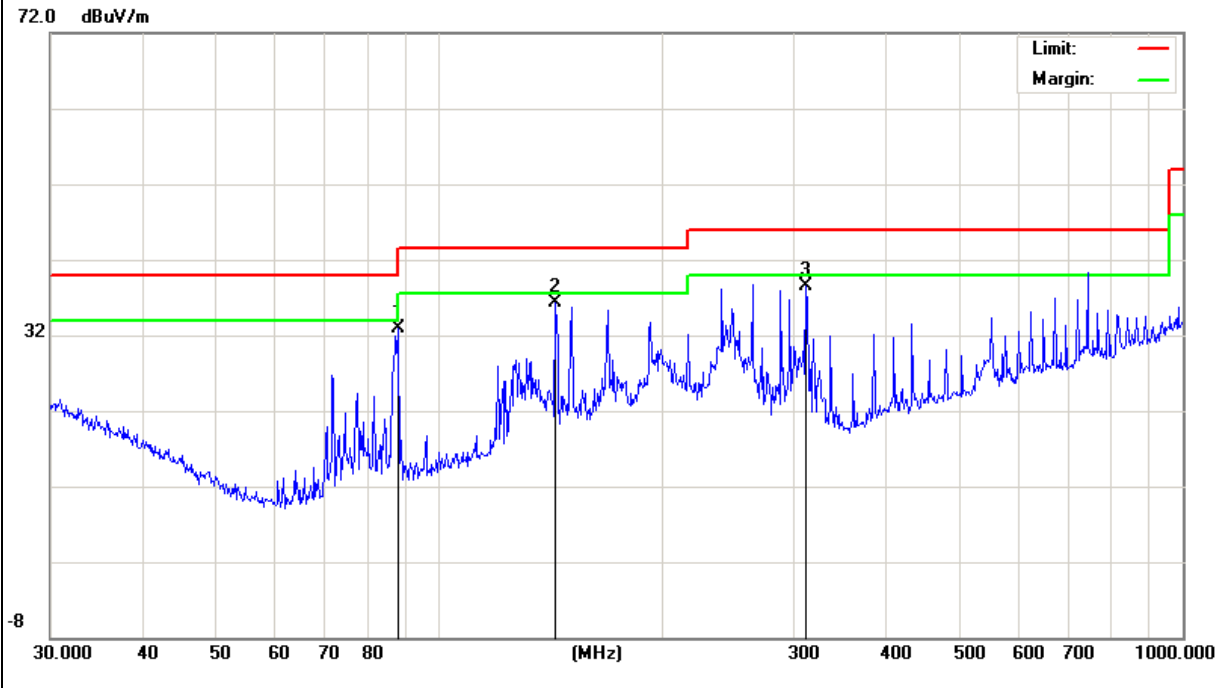

|                |                      |                     |          |
|----------------|----------------------|---------------------|----------|
| EUT :          | SMART PICO PROJECTOR | Model Name :        | CB-100   |
| Temperature :  | 20 °C                | Relative Humidity : | 48%      |
| Pressure :     | 1010 hPa             | Polarization :      | Vertical |
| Test Voltage : | AC 120V by battery   |                     |          |
| Test Mode :    | TX                   |                     |          |

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 87.4175   | 22.57         | 9.03   | 31.6           | 40       | -8.4   | QP            |
| 143.8292  | 16.41         | 11.93  | 28.34          | 43.5     | -15.16 | QP            |
| 301.4223  | 21.02         | 14.58  | 35.6           | 46       | -10.4  | QP            |
| 896.9963  | 15.01         | 25.59  | 40.6           | 46       | -5.4   | QP            |
|           |               |        |                |          |        |               |
|           |               |        |                |          |        |               |

Remark:  
Factor = Antenna Factor + Cable Loss – Pre-amplifier.  
All interfaces was connected, and BT TX mode was link.

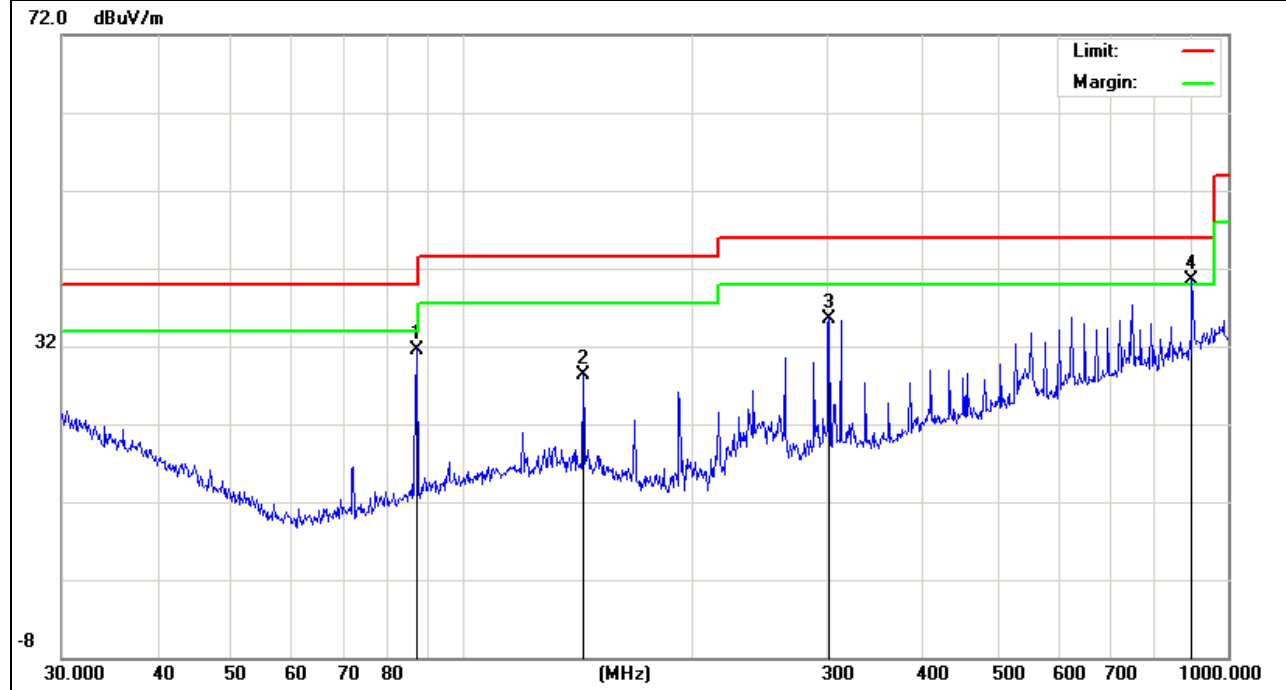


3.2.8 TEST RESULTS (ABOVE 1000 MHZ)

|               |                           |                     |            |
|---------------|---------------------------|---------------------|------------|
| EUT :         | SMART PICO PROJECTOR      | Model Name :        | CB-100     |
| Temperature : | 20 °C                     | Relative Humidity : | 48%        |
| Pressure :    | 1010 hPa                  | Test Voltage :      | AC 120V    |
| Test Mode :   | TX 2402MHz – CH 00(1Mbps) | Polarization :      | Horizontal |

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4804.256  | 63.01         | -3.64  | 59.37          | 74       | -14.63 | peak          |
| 4804.256  | 48.59         | -3.64  | 44.95          | 54       | -9.05  | AVG           |
| 7206.117  | 54.57         | -0.95  | 53.62          | 74       | -20.38 | peak          |
| 7206.117  | 44.28         | -0.95  | 43.33          | 54       | -10.67 | AVG           |
|           |               |        |                |          |        |               |
|           |               |        |                |          |        |               |


Remark:  
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

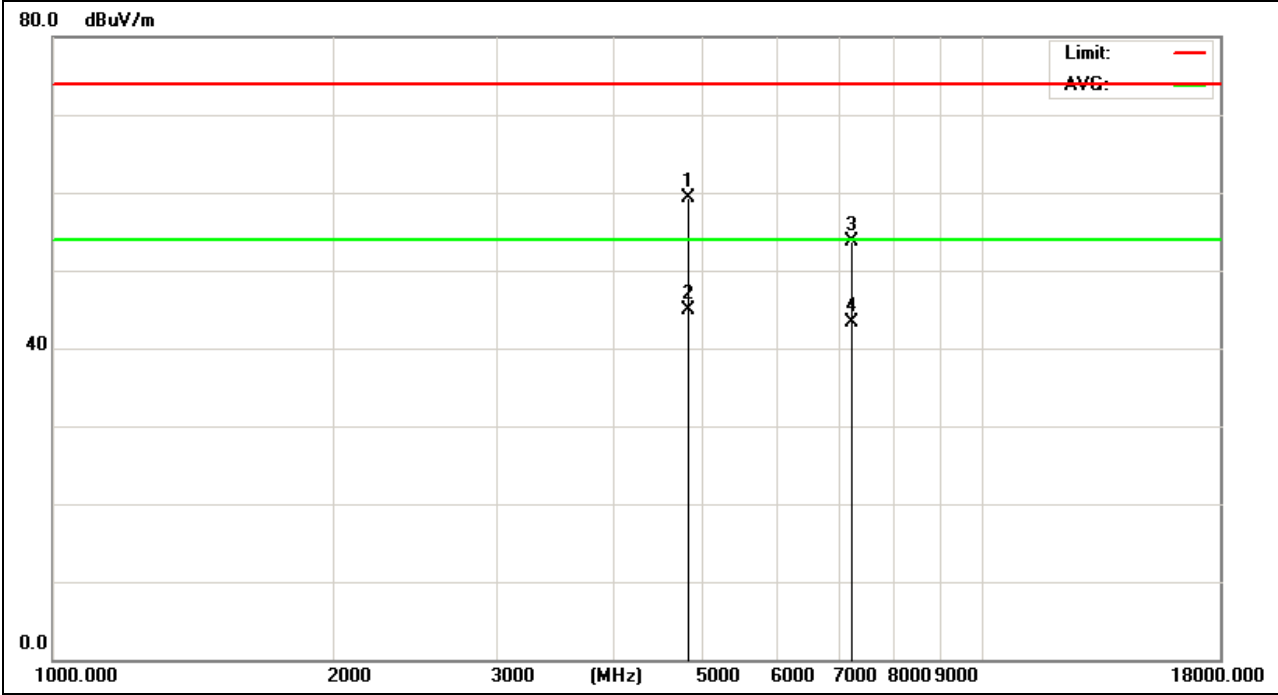

|               |                           |                     |          |
|---------------|---------------------------|---------------------|----------|
| EUT :         | SMART PICO PROJECTOR      | Model Name :        | CB-100   |
| Temperature : | 20 °C                     | Relative Humidity : | 48%      |
| Pressure :    | 1010 hPa                  | Test Voltage :      | AC 120V  |
| Test Mode :   | TX 2402MHz – CH 00(1Mbps) | Polarization :      | Vertical |

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4804.132  | 65.91         | -3.64  | 62.27          | 74       | -11.73 | peak          |
| 4804.132  | 51.97         | -3.64  | 48.33          | 54       | -5.67  | AVG           |
| 7206.884  | 58.32         | -0.96  | 57.36          | 74       | -16.64 | peak          |
| 7206.884  | 47.54         | -0.96  | 46.58          | 54       | -7.42  | AVG           |
|           |               |        |                |          |        |               |
|           |               |        |                |          |        |               |


Remark:  
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

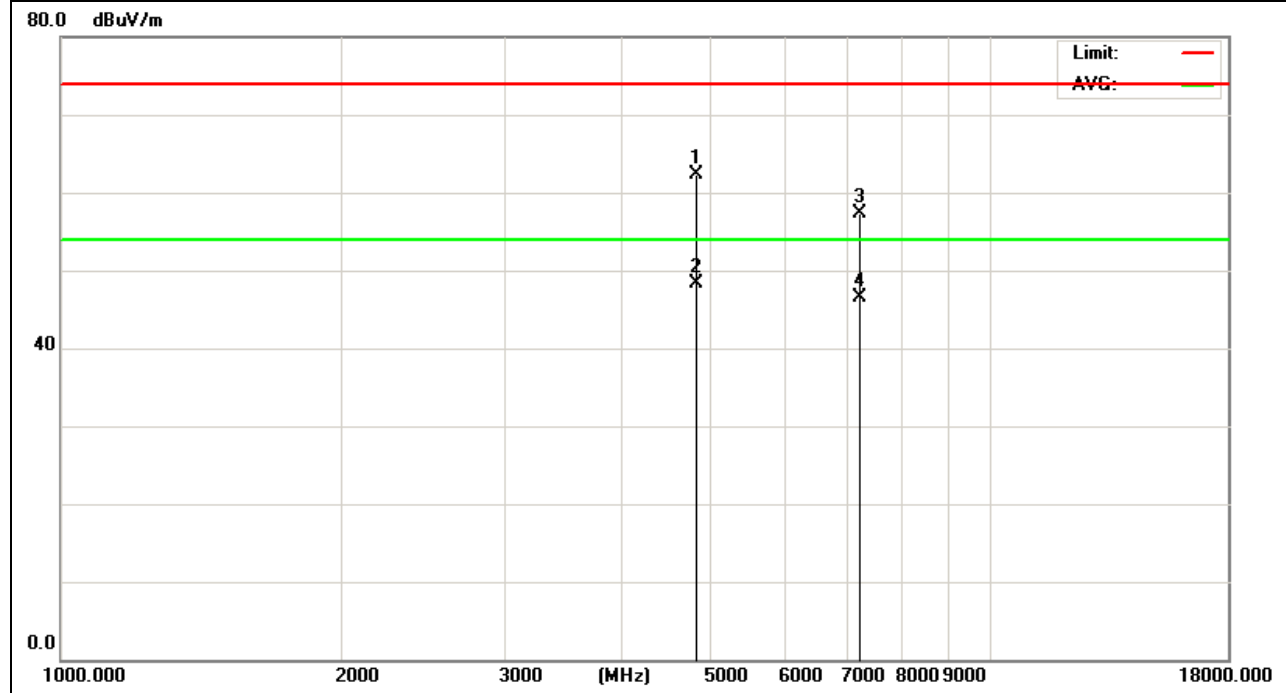

|               |                           |                     |          |
|---------------|---------------------------|---------------------|----------|
| EUT :         | SMART PICO PROJECTOR      | Model Name :        | CB-100   |
| Temperature : | 20 °C                     | Relative Humidity : | 48%      |
| Pressure :    | 1010 hPa                  | Test Voltage :      | AC 120V  |
| Test Mode :   | TX 2441MHz – CH 39(1Mbps) | Polarization :      | Vertical |

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4882.625  | 69.47         | -3.67  | 65.8           | 74       | -8.2   | peak          |
| 4882.625  | 49.74         | -3.67  | 46.07          | 54       | -7.93  | AVG           |
| 7323.547  | 59.21         | -0.82  | 58.39          | 74       | -15.61 | peak          |
| 7323.547  | 47.68         | -0.82  | 46.86          | 54       | -7.14  | AVG           |


Remark:  
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

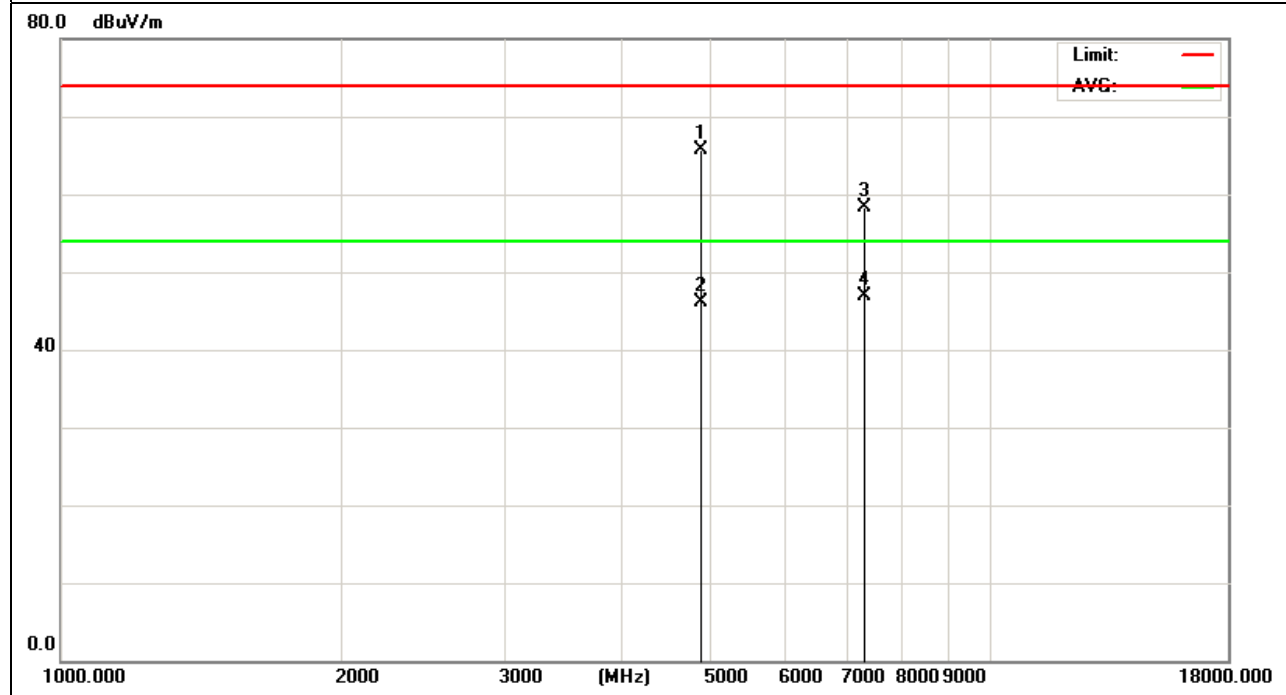

|               |                           |                     |            |
|---------------|---------------------------|---------------------|------------|
| EUT :         | SMART PICO PROJECTOR      | Model Name :        | CB-100     |
| Temperature : | 20 °C                     | Relative Humidity : | 48%        |
| Pressure :    | 1010 hPa                  | Test Voltage :      | AC 120V    |
| Test Mode :   | TX 2441MHz – CH 39(1Mbps) | Polarization :      | Horizontal |

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4882.223  | 60.7          | -3.67  | 57.03          | 74       | -16.97 | peak          |
| 4882.223  | 49.55         | -3.67  | 45.88          | 54       | -8.12  | AVG           |
| 7323.153  | 57.57         | -0.82  | 56.75          | 74       | -17.25 | peak          |
| 7323.153  | 45.45         | -0.82  | 44.63          | 54       | -9.37  | AVG           |


Remark:  
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

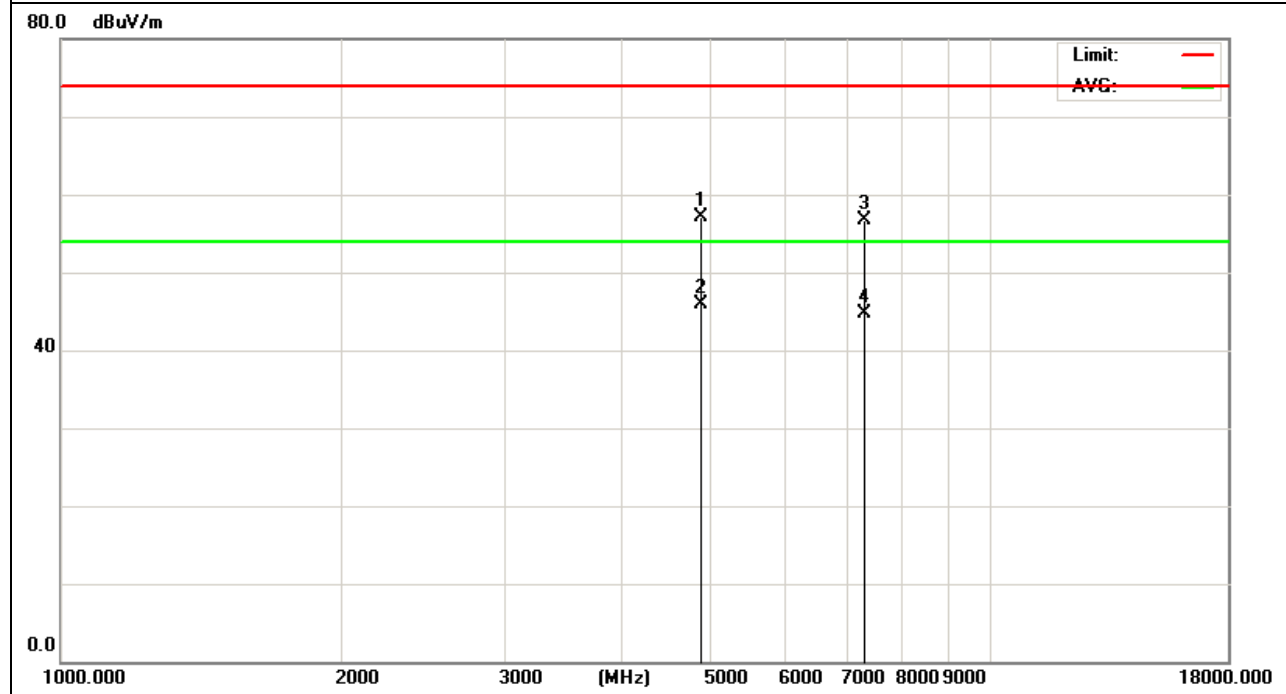

|               |                           |                     |            |
|---------------|---------------------------|---------------------|------------|
| EUT :         | SMART PICO PROJECTOR      | Model Name :        | CB-100     |
| Temperature : | 20 °C                     | Relative Humidity : | 48%        |
| Pressure :    | 1010 hPa                  | Test Voltage :      | AC 120V    |
| Test Mode :   | TX 2480MHz – CH 78(1Mbps) | Polarization :      | Horizontal |

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4960.41   | 59.53         | -3.59  | 55.94          | 74       | -18.06 | peak          |
| 4960.41   | 49.35         | -3.59  | 45.76          | 54       | -8.24  | AVG           |
| 7440.435  | 53.79         | -0.68  | 53.11          | 74       | -20.89 | peak          |
| 7440.435  | 45.3          | -0.68  | 44.62          | 54       | -9.38  | AVG           |
|           |               |        |                |          |        |               |
|           |               |        |                |          |        |               |


Remark:  
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

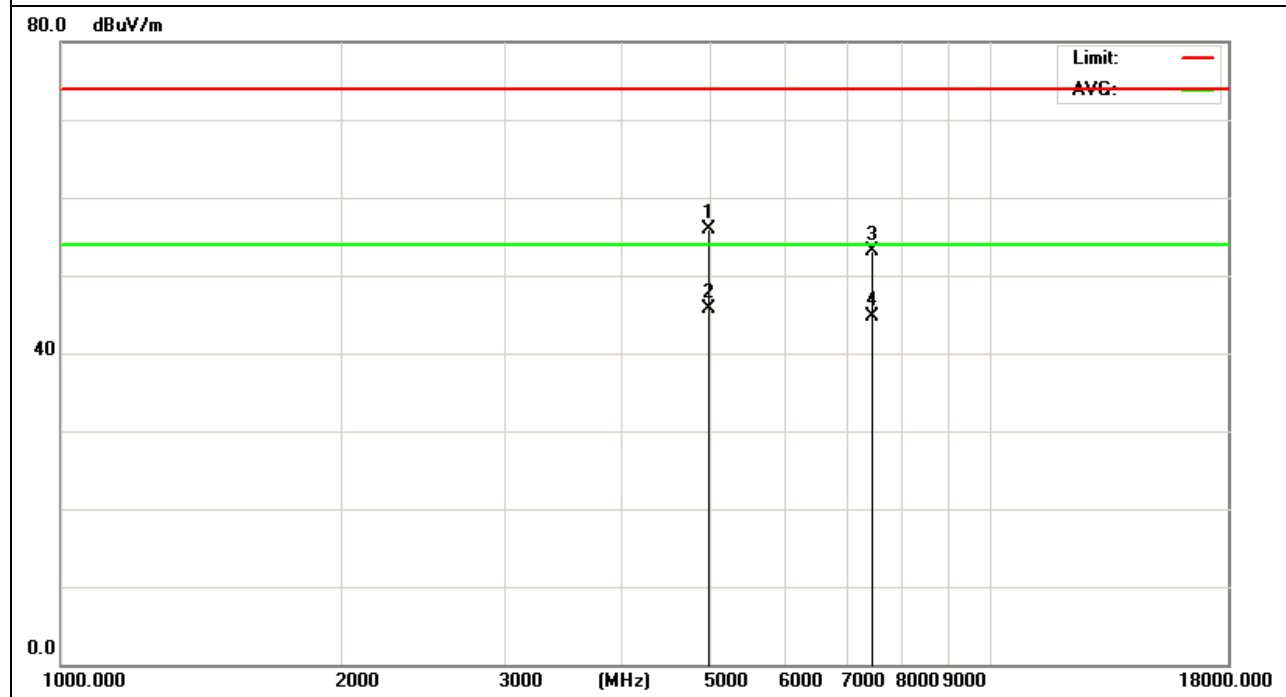

|               |                           |                     |          |
|---------------|---------------------------|---------------------|----------|
| EUT :         | SMART PICO PROJECTOR      | Model Name :        | CB-100   |
| Temperature : | 20 °C                     | Relative Humidity : | 48%      |
| Pressure :    | 1010 hPa                  | Test Voltage :      | AC 120V  |
| Test Mode :   | TX 2480MHz – CH 78(1Mbps) | Polarization :      | Vertical |

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4960.237  | 63.53         | -3.59  | 59.94          | 74       | -14.06 | peak          |
| 4960.237  | 50.98         | -3.59  | 47.39          | 54       | -6.61  | AVG           |
| 7440.658  | 56.24         | -0.68  | 55.56          | 74       | -18.44 | peak          |
| 7440.658  | 44.79         | -0.68  | 44.11          | 54       | -9.89  | AVG           |
|           |               |        |                |          |        |               |
|           |               |        |                |          |        |               |


Remark:  
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

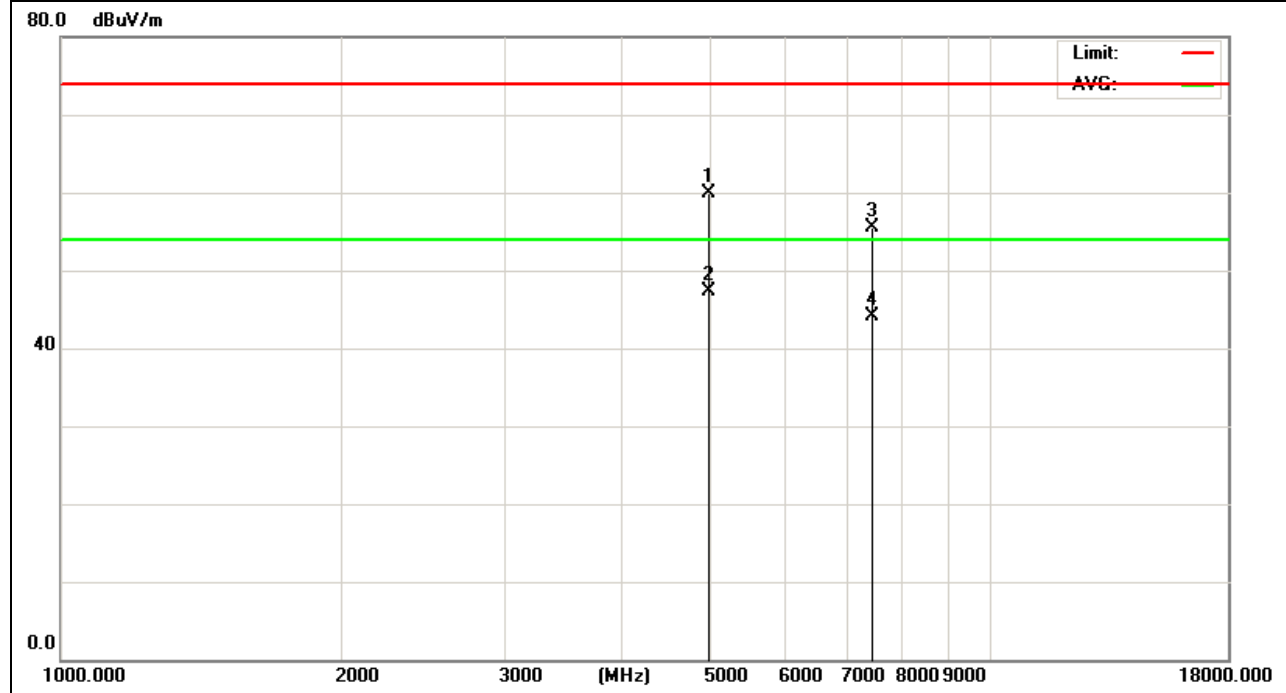

|               |                           |                     |            |
|---------------|---------------------------|---------------------|------------|
| EUT :         | SMART PICO PROJECTOR      | Model Name :        | CB-100     |
| Temperature : | 20 °C                     | Relative Humidity : | 48%        |
| Pressure :    | 1010 hPa                  | Test Voltage :      | AC 120V    |
| Test Mode :   | TX 2402MHz – CH 00(2Mbps) | Polarization :      | Horizontal |

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4804.259  | 61.9          | -3.64  | 58.26          | 74       | -15.74 | peak          |
| 4804.259  | 50.96         | -3.64  | 47.32          | 54       | -6.68  | AVG           |
| 7206.038  | 56.64         | -0.95  | 55.69          | 74       | -18.31 | peak          |
| 7206.038  | 47.2          | -0.95  | 46.25          | 54       | -7.75  | AVG           |
|           |               |        |                |          |        |               |
|           |               |        |                |          |        |               |


Remark:  
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

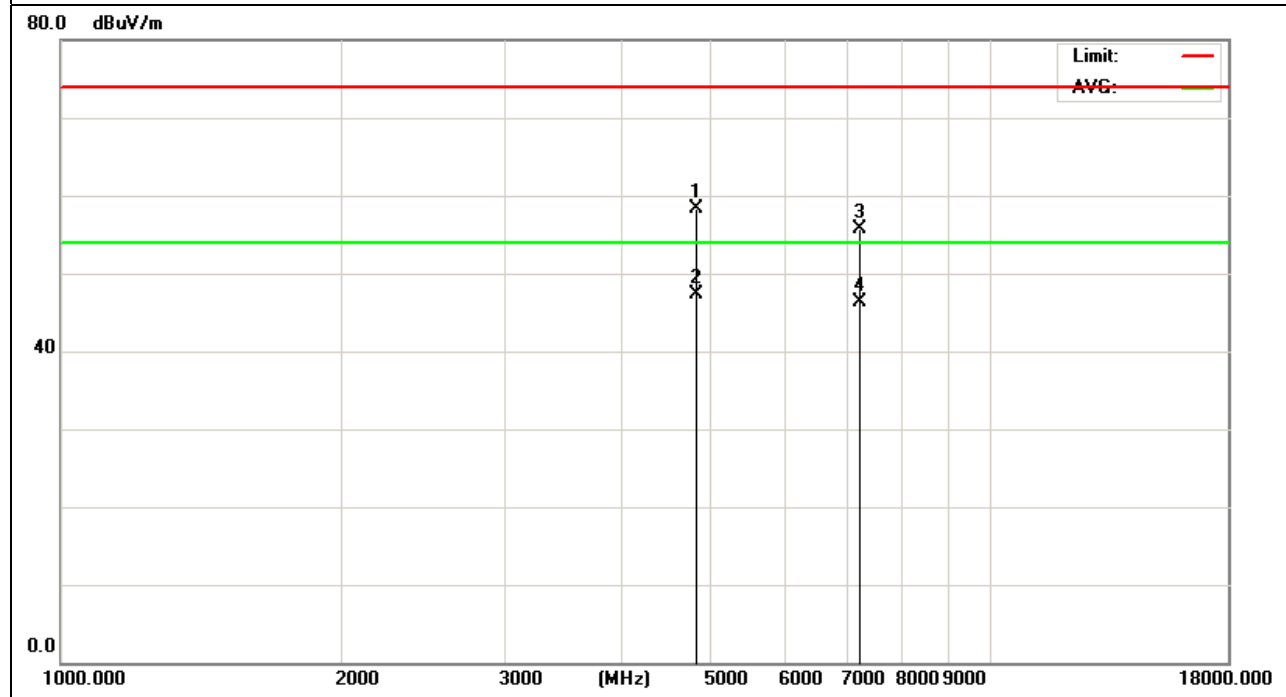

|               |                           |                     |          |
|---------------|---------------------------|---------------------|----------|
| EUT :         | SMART PICO PROJECTOR      | Model Name :        | CB-100   |
| Temperature : | 20 °C                     | Relative Humidity : | 48%      |
| Pressure :    | 1010 hPa                  | Test Voltage :      | AC 120V  |
| Test Mode :   | TX 2402MHz – CH 00(2Mbps) | Polarization :      | Vertical |

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4804.259  | 63.56         | -3.64  | 59.92          | 74       | -14.08 | peak          |
| 4804.259  | 49.72         | -3.64  | 46.08          | 54       | -7.92  | AVG           |
| 7206.362  | 54.43         | -0.95  | 53.48          | 74       | -20.52 | peak          |
| 7206.362  | 45.68         | -0.95  | 44.73          | 54       | -9.27  | AVG           |
|           |               |        |                |          |        |               |
|           |               |        |                |          |        |               |


Remark:  
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

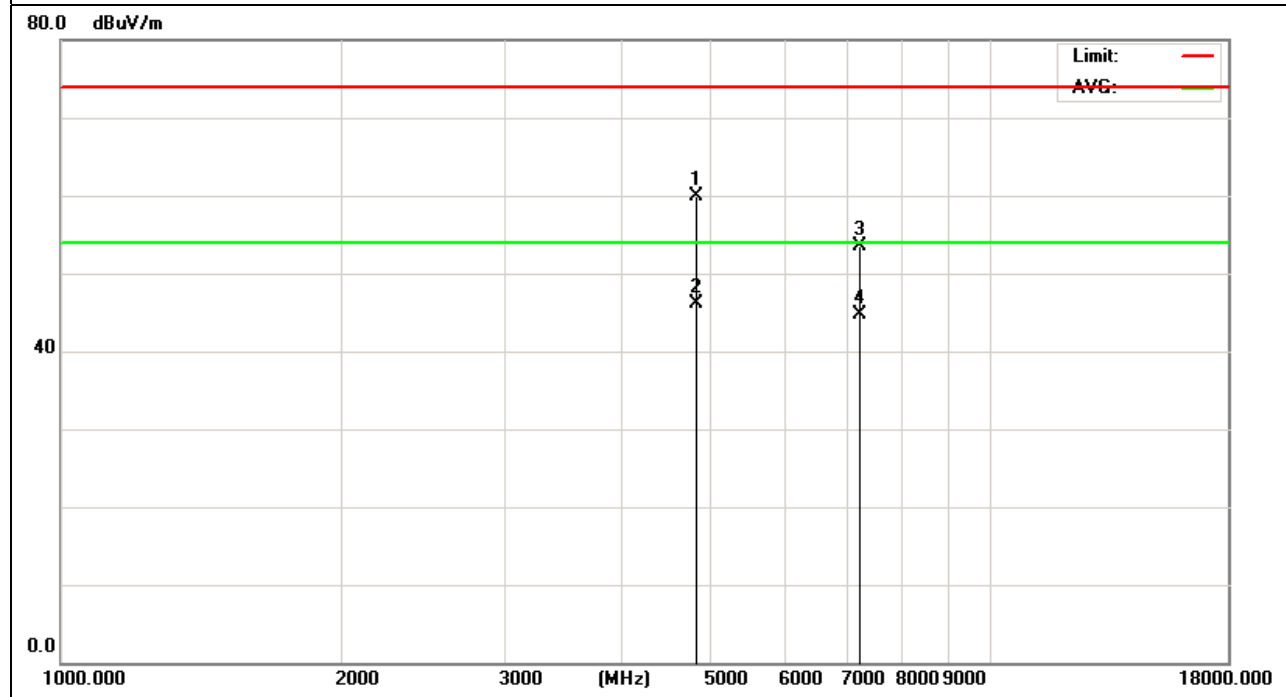

|               |                           |                     |            |
|---------------|---------------------------|---------------------|------------|
| EUT :         | SMART PICO PROJECTOR      | Model Name :        | CB-100     |
| Temperature : | 20 °C                     | Relative Humidity : | 48%        |
| Pressure :    | 1010 hPa                  | Test Voltage :      | AC 120V    |
| Test Mode :   | TX 2441MHz – CH 39(2Mbps) | Polarization :      | Horizontal |

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4882.21   | 59.51         | -3.67  | 55.84          | 74       | -18.16 | peak          |
| 4882.21   | 46.6          | -3.67  | 42.93          | 54       | -11.07 | AVG           |
| 7323.338  | 54.35         | -0.82  | 53.53          | 74       | -20.47 | peak          |
| 7323.338  | 44.53         | -0.82  | 43.71          | 54       | -10.29 | AVG           |
|           |               |        |                |          |        |               |
|           |               |        |                |          |        |               |


Remark:  
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

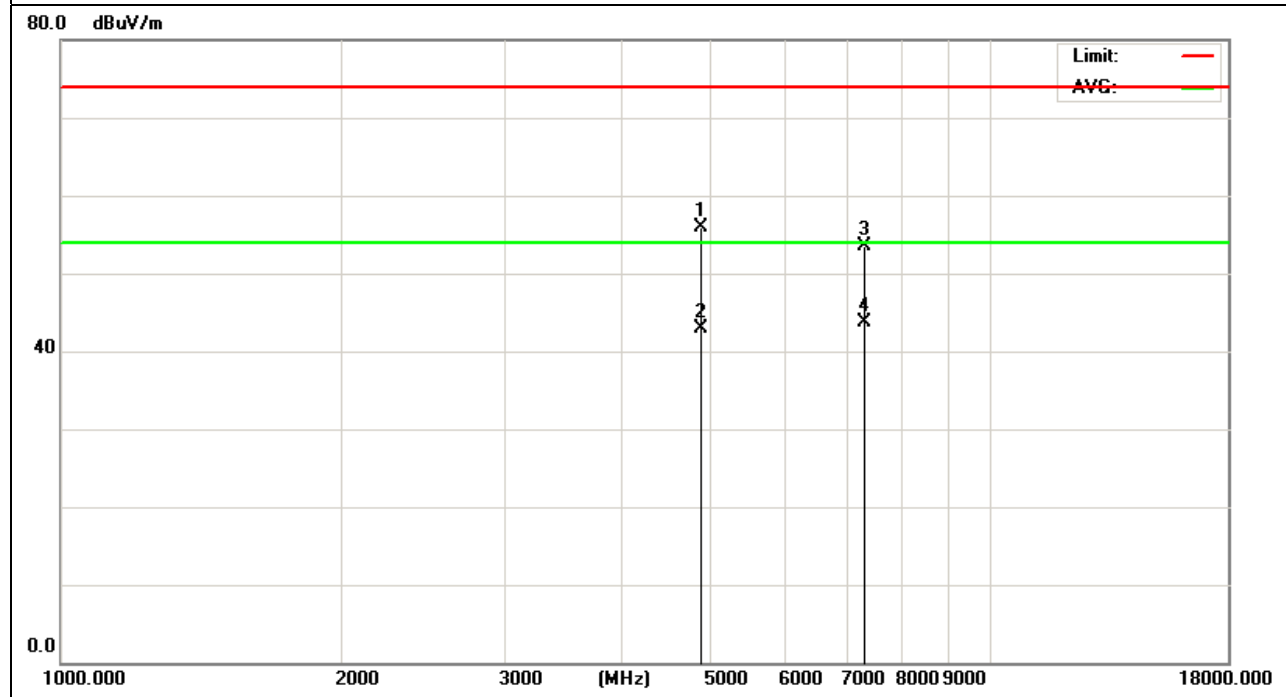

|               |                           |                     |          |
|---------------|---------------------------|---------------------|----------|
| EUT :         | SMART PICO PROJECTOR      | Model Name :        | CB-100   |
| Temperature : | 20 °C                     | Relative Humidity : | 48%      |
| Pressure :    | 1010 hPa                  | Test Voltage :      | AC 120V  |
| Test Mode :   | TX 2441MHz – CH 39(2Mbps) | Polarization :      | Vertical |

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4882.319  | 62.19         | -3.67  | 58.52          | 74       | -15.48 | peak          |
| 4882.319  | 49.64         | -3.67  | 45.97          | 54       | -8.03  | AVG           |
| 7323.115  | 57.46         | -0.82  | 56.64          | 74       | -17.36 | peak          |
| 7323.115  | 46.98         | -0.82  | 46.16          | 54       | -7.84  | AVG           |
|           |               |        |                |          |        |               |
|           |               |        |                |          |        |               |


Remark:  
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

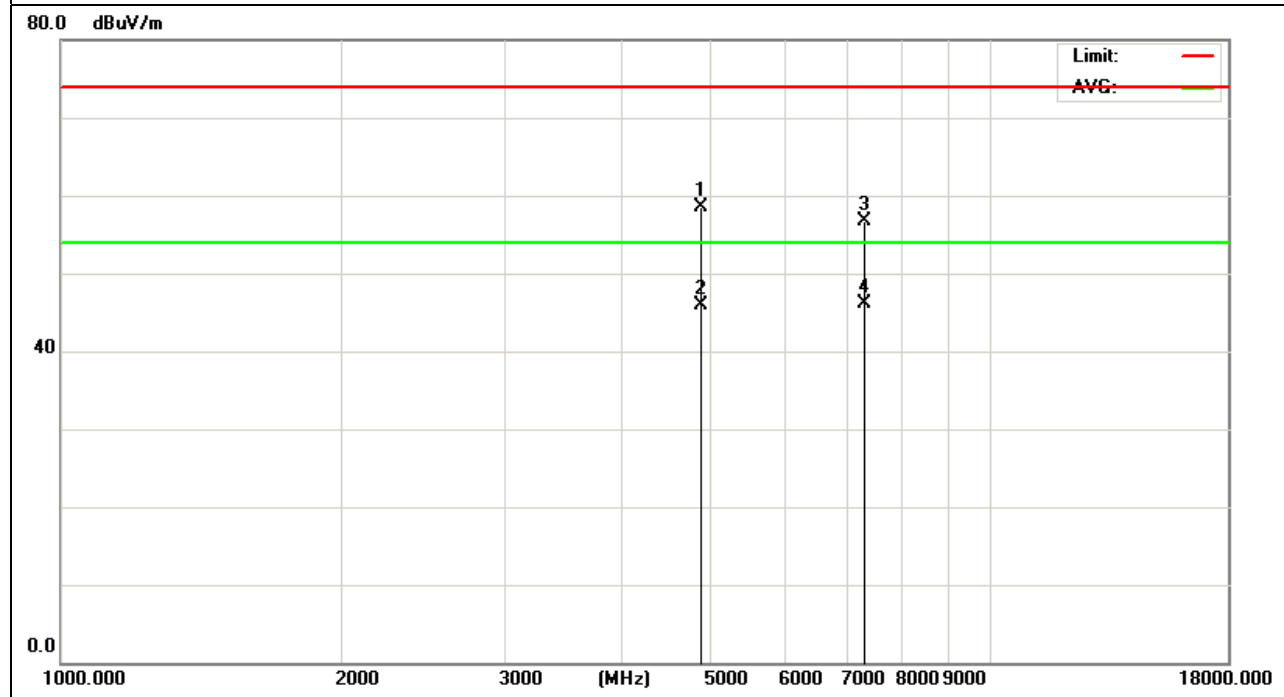

|               |                           |                     |            |
|---------------|---------------------------|---------------------|------------|
| EUT :         | SMART PICO PROJECTOR      | Model Name :        | CB-100     |
| Temperature : | 20 °C                     | Relative Humidity : | 48%        |
| Pressure :    | 1010 hPa                  | Test Voltage :      | AC 120V    |
| Test Mode :   | TX 2480MHz – CH 78(2Mbps) | Polarization :      | Horizontal |

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4960.56   | 62.63         | -3.6   | 59.03          | 74       | -14.97 | peak          |
| 4960.56   | 49.58         | -3.6   | 45.98          | 54       | -8.02  | AVG           |
| 7440.105  | 53.75         | -0.68  | 53.07          | 74       | -20.93 | peak          |
| 7440.105  | 44.69         | -0.68  | 44.01          | 54       | -9.99  | AVG           |
|           |               |        |                |          |        |               |
|           |               |        |                |          |        |               |


Remark:  
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

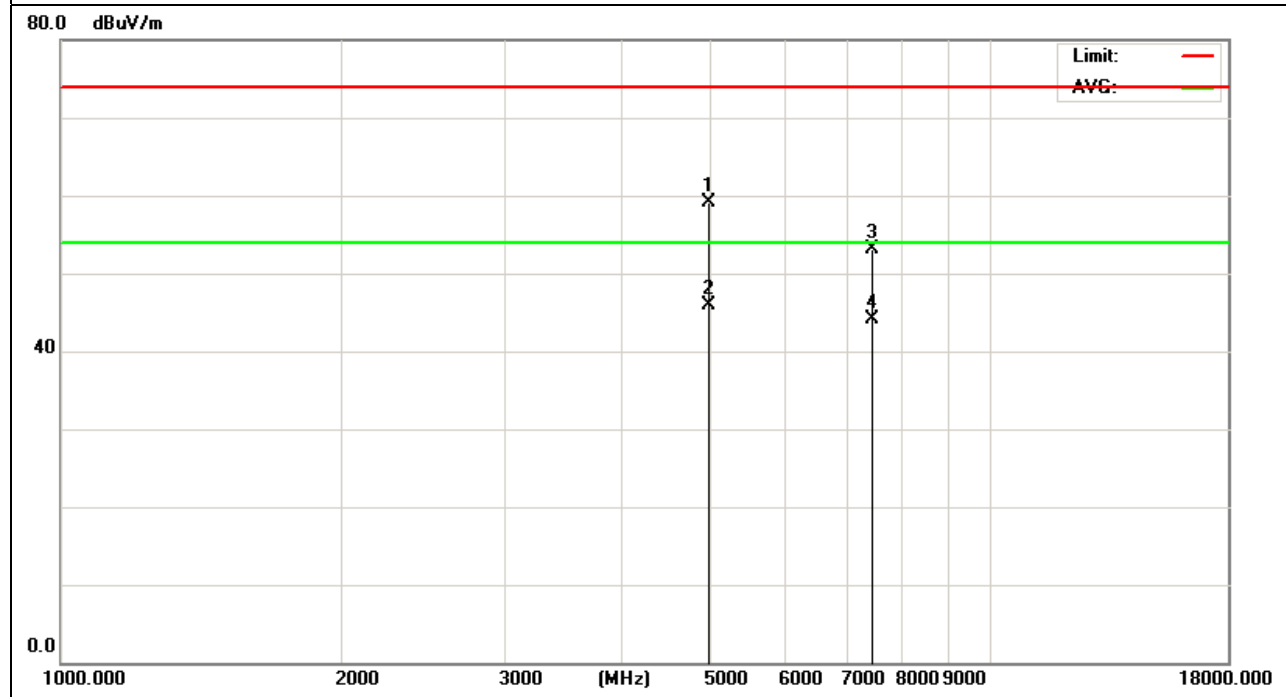

|               |                           |                     |          |
|---------------|---------------------------|---------------------|----------|
| EUT :         | SMART PICO PROJECTOR      | Model Name :        | CB-100   |
| Temperature : | 20 °C                     | Relative Humidity : | 48%      |
| Pressure :    | 1010 hPa                  | Test Voltage :      | AC 120V  |
| Test Mode :   | TX 2480MHz – CH 78(2Mbps) | Polarization :      | Vertical |

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4960.173  | 62.42         | -3.59  | 58.83          | 74       | -15.17 | peak          |
| 4960.173  | 50.46         | -3.59  | 46.87          | 54       | -7.13  | AVG           |
| 7440.241  | 54.73         | -0.68  | 54.05          | 74       | -19.95 | peak          |
| 7440.241  | 44.8          | -0.68  | 44.12          | 54       | -9.88  | AVG           |
|           |               |        |                |          |        |               |
|           |               |        |                |          |        |               |


Remark:  
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

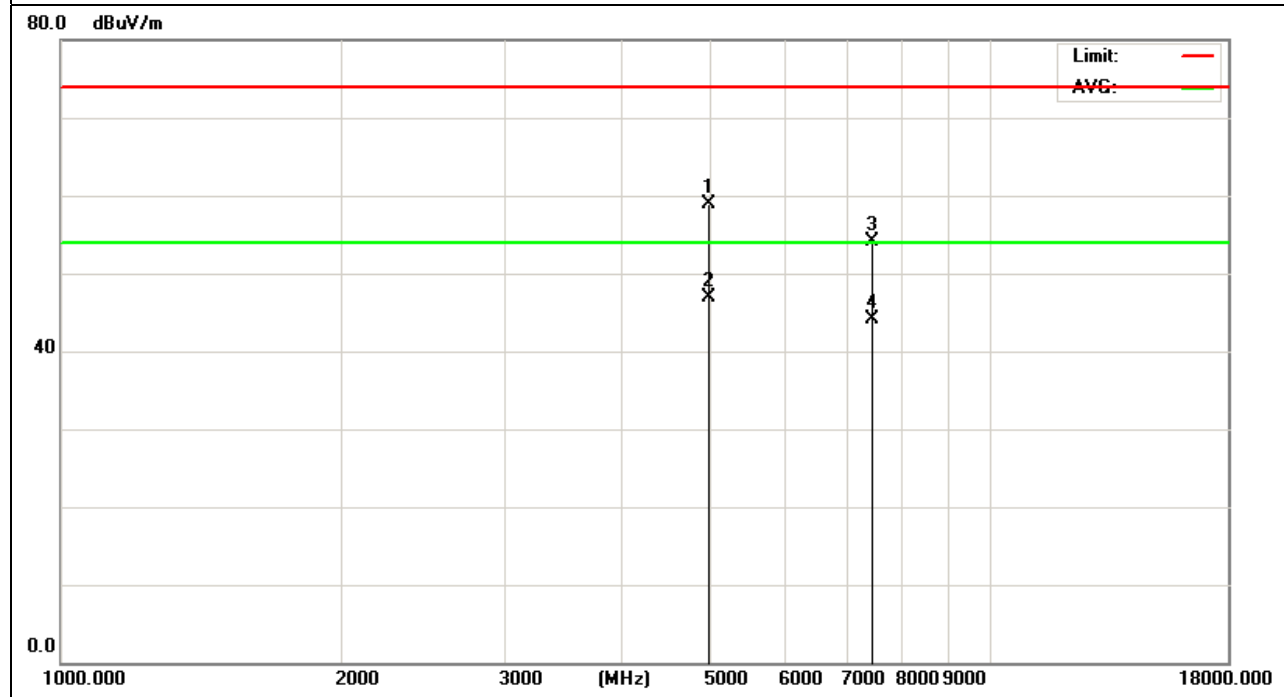

|               |                           |                     |            |
|---------------|---------------------------|---------------------|------------|
| EUT :         | SMART PICO PROJECTOR      | Model Name :        | CB-100     |
| Temperature : | 20 °C                     | Relative Humidity : | 48%        |
| Pressure :    | 1010 hPa                  | Test Voltage :      | AC 120V    |
| Test Mode :   | TX 2402MHz – CH00 (3Mbps) | Polarization :      | Horizontal |

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4804.236  | 61.71         | -3.64  | 58.07          | 74       | -15.93 | peak          |
| 4804.236  | 49.95         | -3.64  | 46.31          | 54       | -7.69  | AVG           |
| 7206.322  | 54.79         | -0.95  | 53.84          | 74       | -20.16 | peak          |
| 7206.322  | 44.37         | -0.95  | 43.42          | 54       | -10.58 | AVG           |
|           |               |        |                |          |        |               |
|           |               |        |                |          |        |               |


Remark:  
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

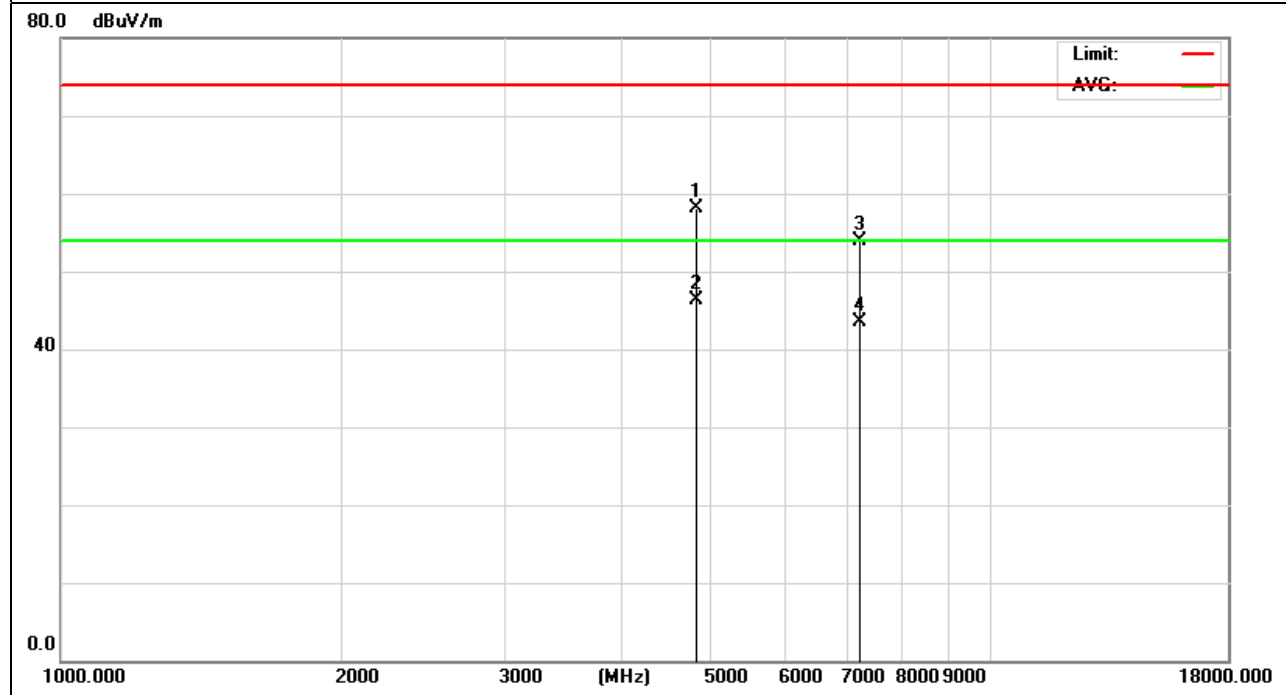

|               |                           |                     |          |
|---------------|---------------------------|---------------------|----------|
| EUT :         | SMART PICO PROJECTOR      | Model Name :        | CB-100   |
| Temperature : | 20 °C                     | Relative Humidity : | 48%      |
| Pressure :    | 1010 hPa                  | Test Voltage :      | AC 120V  |
| Test Mode :   | TX 2402MHz – CH00 (3Mbps) | Polarization :      | Vertical |

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4804.372  | 60.81         | -3.64  | 57.17          | 74       | -16.83 | peak          |
| 4804.372  | 51.58         | -3.64  | 47.94          | 54       | -6.06  | AVG           |
| 7206.146  | 56.49         | -0.95  | 55.54          | 74       | -18.46 | peak          |
| 7206.146  | 45.57         | -0.95  | 44.62          | 54       | -9.38  | AVG           |
|           |               |        |                |          |        |               |
|           |               |        |                |          |        |               |


Remark:  
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

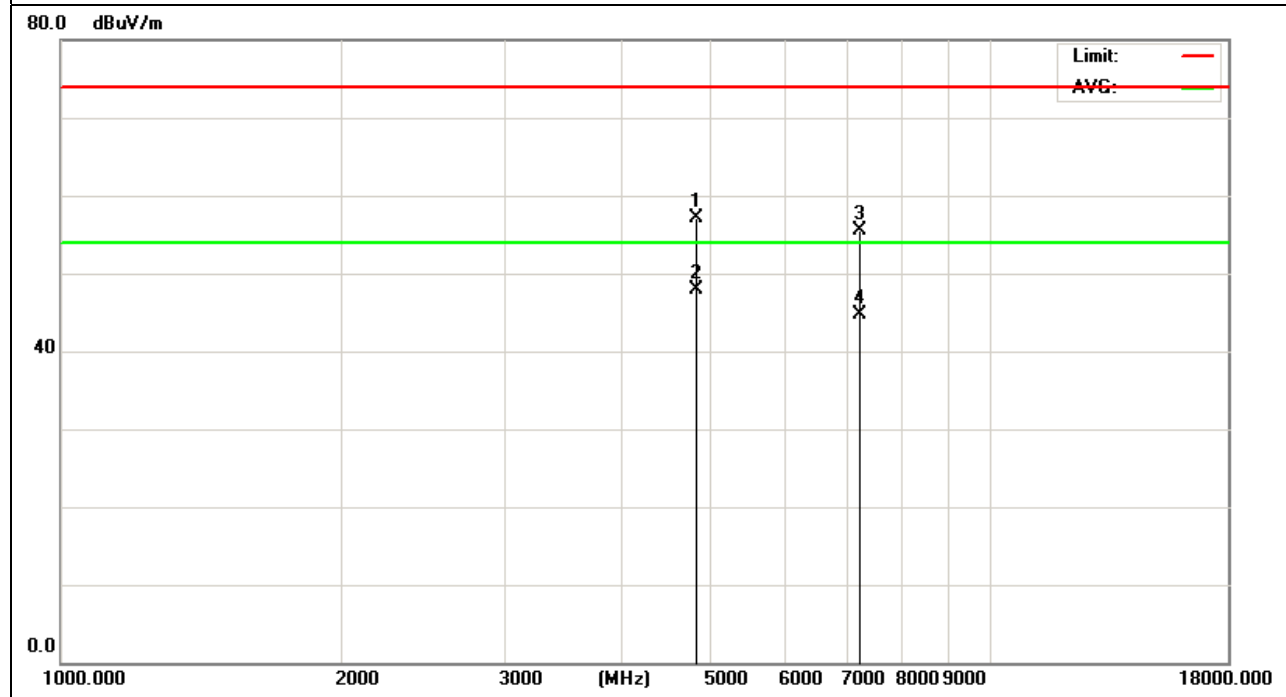

|               |                          |                     |            |
|---------------|--------------------------|---------------------|------------|
| EUT :         | SMART PICO PROJECTOR     | Model Name :        | CB-100     |
| Temperature : | 20 °C                    | Relative Humidity : | 48%        |
| Pressure :    | 1010 hPa                 | Test Voltage :      | AC 120V    |
| Test Mode :   | TX 2441MHz – CH39(3Mbps) | Polarization :      | Horizontal |

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4882.384  | 62.5          | -3.67  | 58.83          | 74       | -15.17 | peak          |
| 4882.384  | 49.66         | -3.67  | 45.99          | 54       | -8.01  | AVG           |
| 7323.448  | 53.87         | -0.82  | 53.05          | 74       | -20.95 | peak          |
| 7323.448  | 44.33         | -0.82  | 43.51          | 54       | -10.49 | AVG           |
|           |               |        |                |          |        |               |
|           |               |        |                |          |        |               |


Remark:  
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

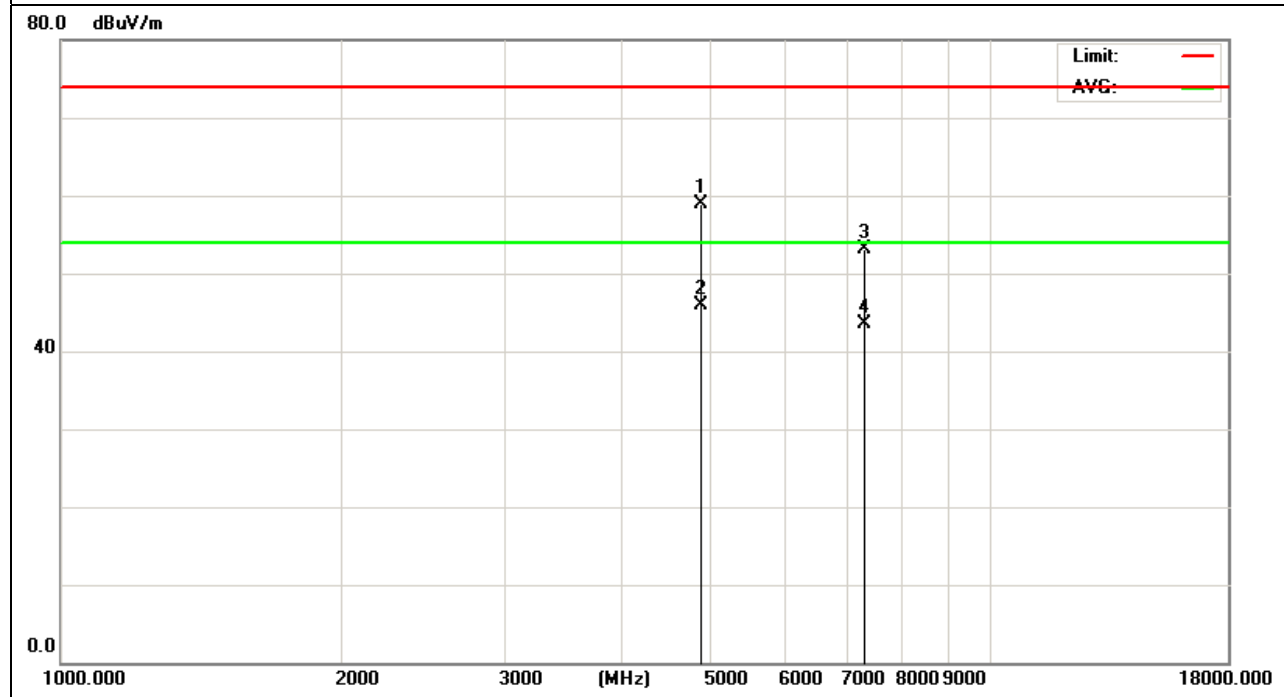

|               |                           |                     |          |
|---------------|---------------------------|---------------------|----------|
| EUT :         | SMART PICO PROJECTOR      | Model Name :        | CB-100   |
| Temperature : | 20 °C                     | Relative Humidity : | 48%      |
| Pressure :    | 1010 hPa                  | Test Voltage :      | AC 120V  |
| Test Mode :   | TX 2441MHz – CH39 (3Mbps) | Polarization :      | Vertical |

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4882.642  | 61.46         | -3.67  | 57.79          | 74       | -16.21 | peak          |
| 4882.642  | 47.58         | -3.67  | 43.91          | 54       | -10.09 | AVG           |
| 7323.213  | 54.46         | -0.82  | 53.64          | 74       | -20.36 | peak          |
| 7323.213  | 42.95         | -0.82  | 42.13          | 54       | -11.87 | AVG           |
|           |               |        |                |          |        |               |
|           |               |        |                |          |        |               |


Remark:  
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

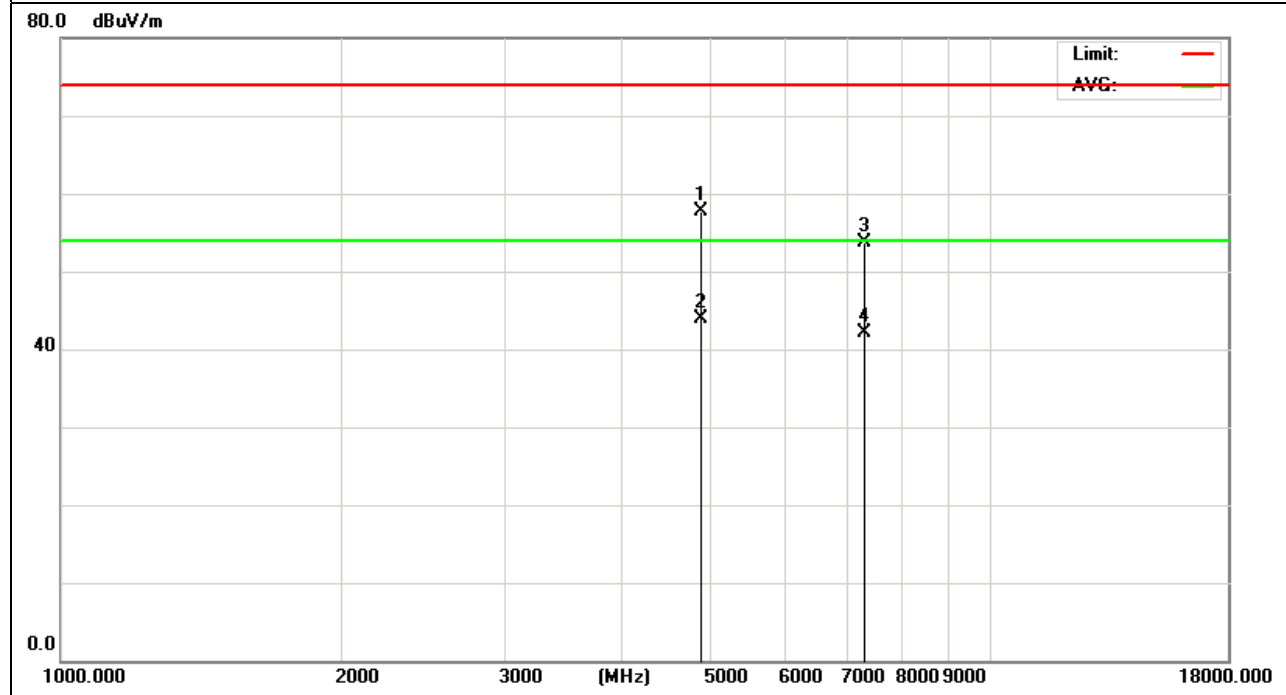

|               |                           |                     |            |
|---------------|---------------------------|---------------------|------------|
| EUT :         | SMART PICO PROJECTOR      | Model Name :        | CB-100     |
| Temperature : | 20 °C                     | Relative Humidity : | 48%        |
| Pressure :    | 1010 hPa                  | Test Voltage :      | AC 120V    |
| Test Mode :   | TX 2480MHz – CH78 (3Mbps) | Polarization :      | Horizontal |

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4960.372  | 61.47         | -3.59  | 57.88          | 74       | -16.12 | peak          |
| 4960.372  | 50.65         | -3.59  | 47.06          | 54       | -6.94  | AVG           |
| 7440.254  | 54.74         | -0.68  | 54.06          | 74       | -19.94 | peak          |
| 7440.254  | 44.84         | -0.68  | 44.16          | 54       | -9.84  | AVG           |
|           |               |        |                |          |        |               |
|           |               |        |                |          |        |               |


Remark:  
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

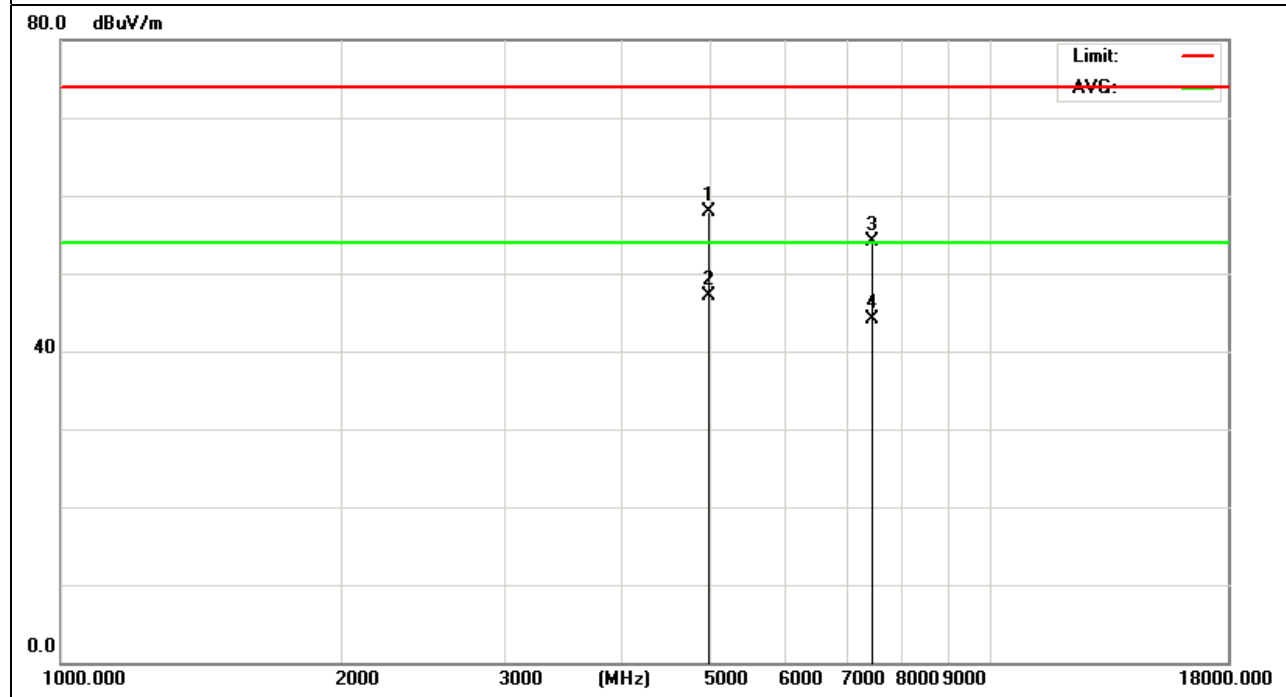

|               |                           |                     |          |
|---------------|---------------------------|---------------------|----------|
| EUT :         | SMART PICO PROJECTOR      | Model Name :        | CB-100   |
| Temperature : | 20 °C                     | Relative Humidity : | 48%      |
| Pressure :    | 1010 hPa                  | Test Voltage :      | AC 120V  |
| Test Mode :   | TX 2480MHz – CH78 (3Mbps) | Polarization :      | Vertical |

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4960.241  | 62.92         | -3.59  | 59.33          | 74       | -14.67 | peak          |
| 4960.241  | 51.89         | -3.59  | 48.3           | 54       | -5.7   | AVG           |
| 7440.864  | 59.06         | -0.68  | 58.38          | 74       | -15.62 | peak          |
| 7440.864  | 45.15         | -0.68  | 44.47          | 54       | -9.53  | AVG           |
|           |               |        |                |          |        |               |
|           |               |        |                |          |        |               |

Remark:  
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

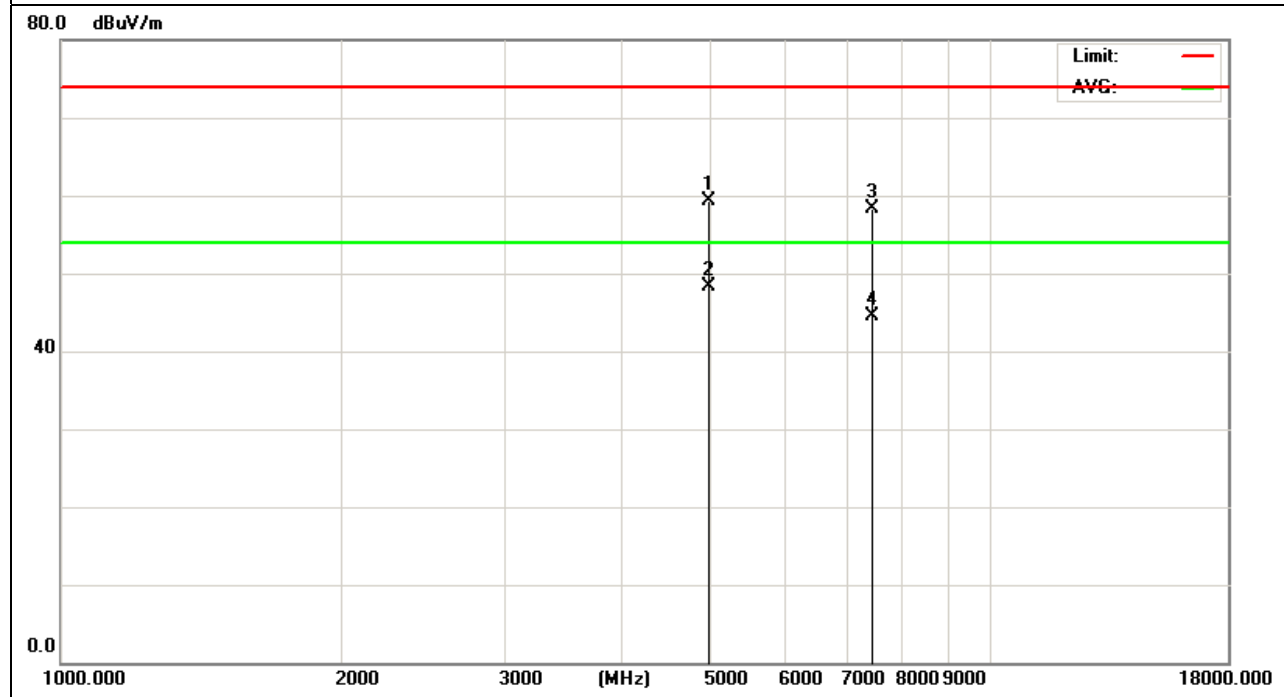


3.2.9 TEST RESULTS (RESTRICTED BANDS REQUIREMENTS)

|               |                      |                     |          |
|---------------|----------------------|---------------------|----------|
| EUT :         | SMART PICO PROJECTOR | Model Name :        | CB-100   |
| Temperature : | 20 °C                | Relative Humidity : | 48%      |
| Pressure :    | 1010 hPa             | Test Voltage :      | AC 120V  |
| Test Mode :   | TX /2402MHz-1Mbps    | Polarization :      | Vertical |

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2400      | 68.07         | -12.99 | 55.08          | 74       | -18.92 | peak          |
| 2400      | 58.74         | -12.99 | 45.75          | 54       | -8.25  | AVG           |
|           |               |        |                |          |        |               |
|           |               |        |                |          |        |               |


Remark:  
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

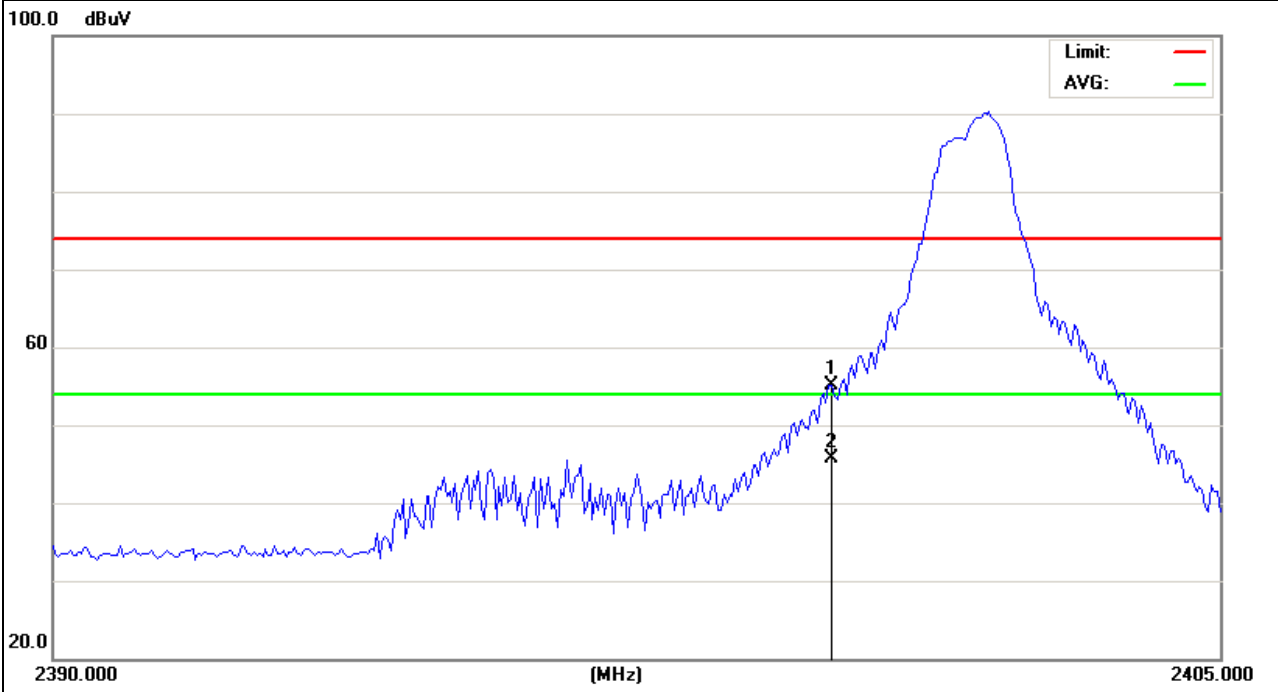

|               |                      |                     |            |
|---------------|----------------------|---------------------|------------|
| EUT :         | SMART PICO PROJECTOR | Model Name :        | CB-100     |
| Temperature : | 20 °C                | Relative Humidity : | 48%        |
| Pressure :    | 1010 hPa             | Test Voltage :      | AC 120V    |
| Test Mode :   | TX /2402MHz-1Mbps    | Polarization :      | Horizontal |

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2400      | 68.09         | -12.99 | 55.1           | 74       | -18.9  | peak          |
| 2400      | 57.21         | -12.99 | 44.22          | 54       | -9.78  | AVG           |
|           |               |        |                |          |        |               |
|           |               |        |                |          |        |               |


Remark:  
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

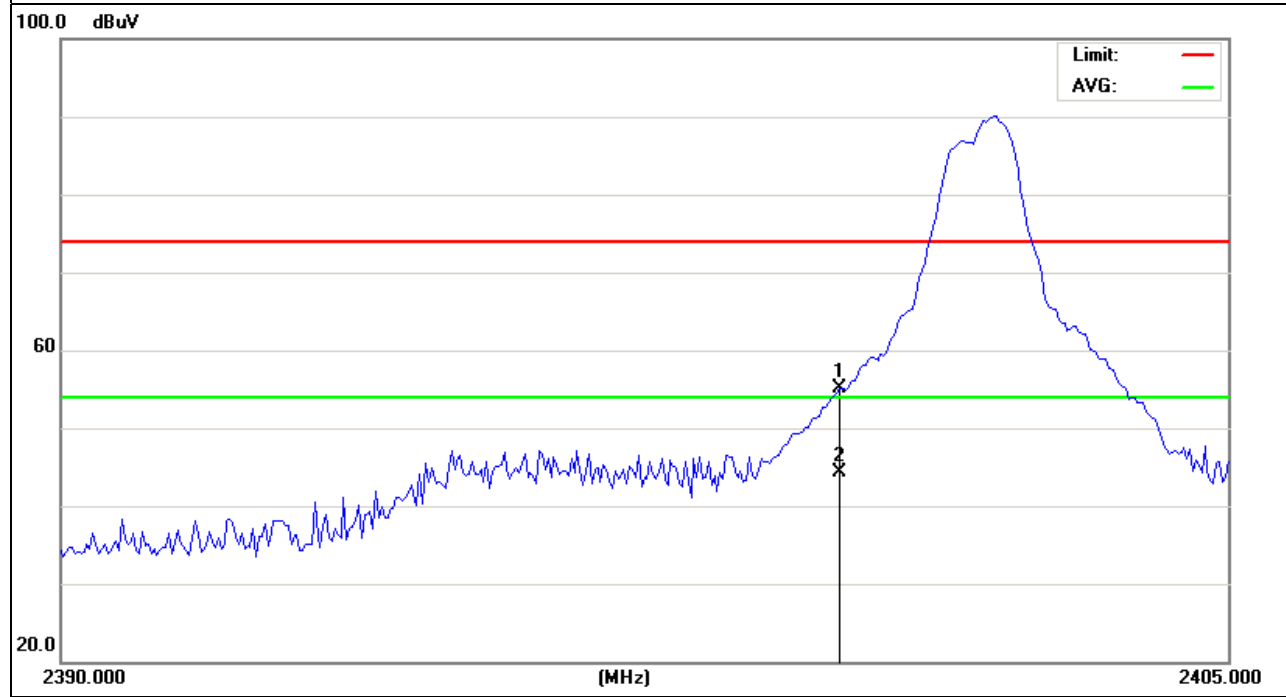

|               |                      |                     |          |
|---------------|----------------------|---------------------|----------|
| EUT :         | SMART PICO PROJECTOR | Model Name :        | CB-100   |
| Temperature : | 20 °C                | Relative Humidity : | 48%      |
| Pressure :    | 1010 hPa             | Test Voltage :      | AC 120V  |
| Test Mode :   | TX /2480MHz-1Mbps    | Polarization :      | Vertical |

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2483.5    | 48.06         | -12.78 | 35.28          | 74       | -38.72 | peak          |
|           |               |        |                |          |        |               |
|           |               |        |                |          |        |               |
|           |               |        |                |          |        |               |


Remark:  
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

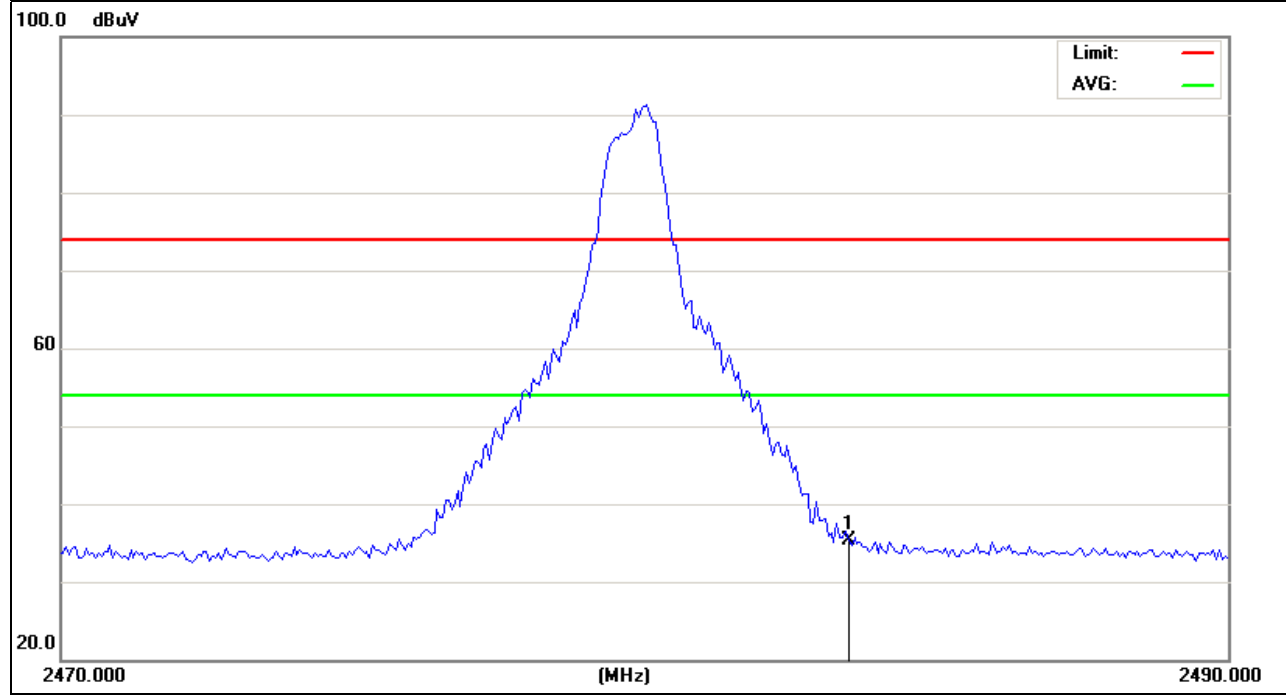

|               |                      |                     |            |
|---------------|----------------------|---------------------|------------|
| EUT :         | SMART PICO PROJECTOR | Model Name :        | CB-100     |
| Temperature : | 20 °C                | Relative Humidity : | 48%        |
| Pressure :    | 1010 hPa             | Test Voltage :      | AC 120V    |
| Test Mode :   | TX /2480MHz-1Mbps    | Polarization :      | Horizontal |

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2483.5    | 48.65         | -12.78 | 35.87          | 74       | -38.13 | peak          |
|           |               |        |                |          |        |               |
|           |               |        |                |          |        |               |
|           |               |        |                |          |        |               |


Remark:  
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

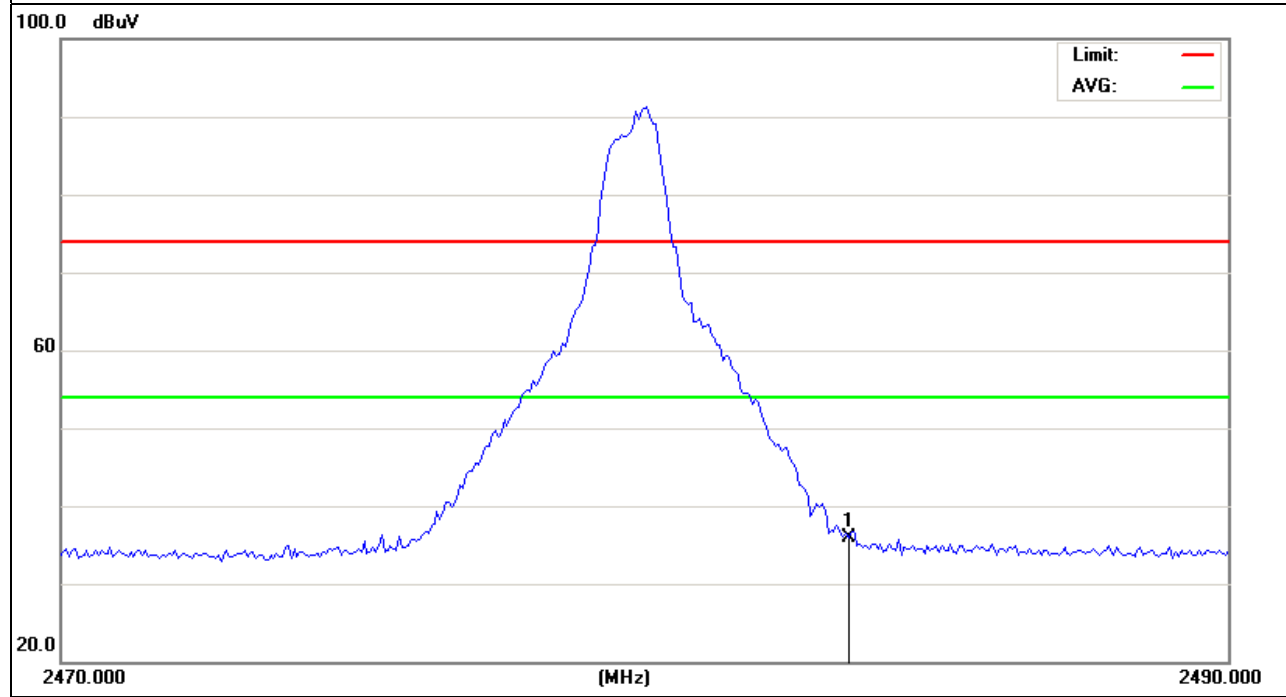

|               |                      |                     |          |
|---------------|----------------------|---------------------|----------|
| EUT :         | SMART PICO PROJECTOR | Model Name :        | CB-100   |
| Temperature : | 20 °C                | Relative Humidity : | 48%      |
| Pressure :    | 1010 hPa             | Test Voltage :      | AC 120V  |
| Test Mode :   | TX /2402MHz-2Mbps    | Polarization :      | Vertical |

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2400      | 68.07         | -12.99 | 55.08          | 74       | -18.92 | peak          |
| 2400      | 58.74         | -12.99 | 45.75          | 54       | -8.25  | AVG           |
|           |               |        |                |          |        |               |
|           |               |        |                |          |        |               |


Remark:  
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

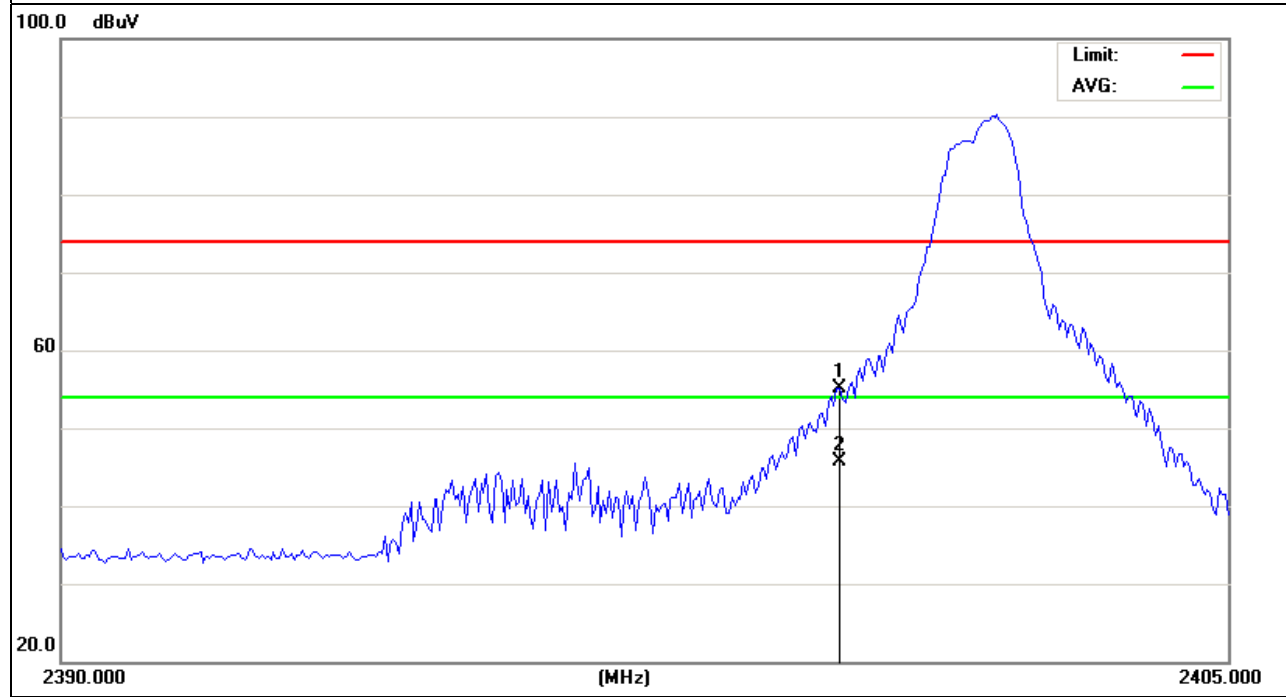

|               |                      |                     |            |
|---------------|----------------------|---------------------|------------|
| EUT :         | SMART PICO PROJECTOR | Model Name :        | CB-100     |
| Temperature : | 20 °C                | Relative Humidity : | 48%        |
| Pressure :    | 1010 hPa             | Test Voltage :      | AC 120V    |
| Test Mode :   | TX /2402MHz-2Mbps    | Polarization :      | Horizontal |

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2400      | 69.09         | -12.99 | 56.1           | 74       | -17.9  | peak          |
| 2400      | 58.88         | -12.99 | 45.89          | 54       | -8.11  | AVG           |
|           |               |        |                |          |        |               |
|           |               |        |                |          |        |               |


Remark:  
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

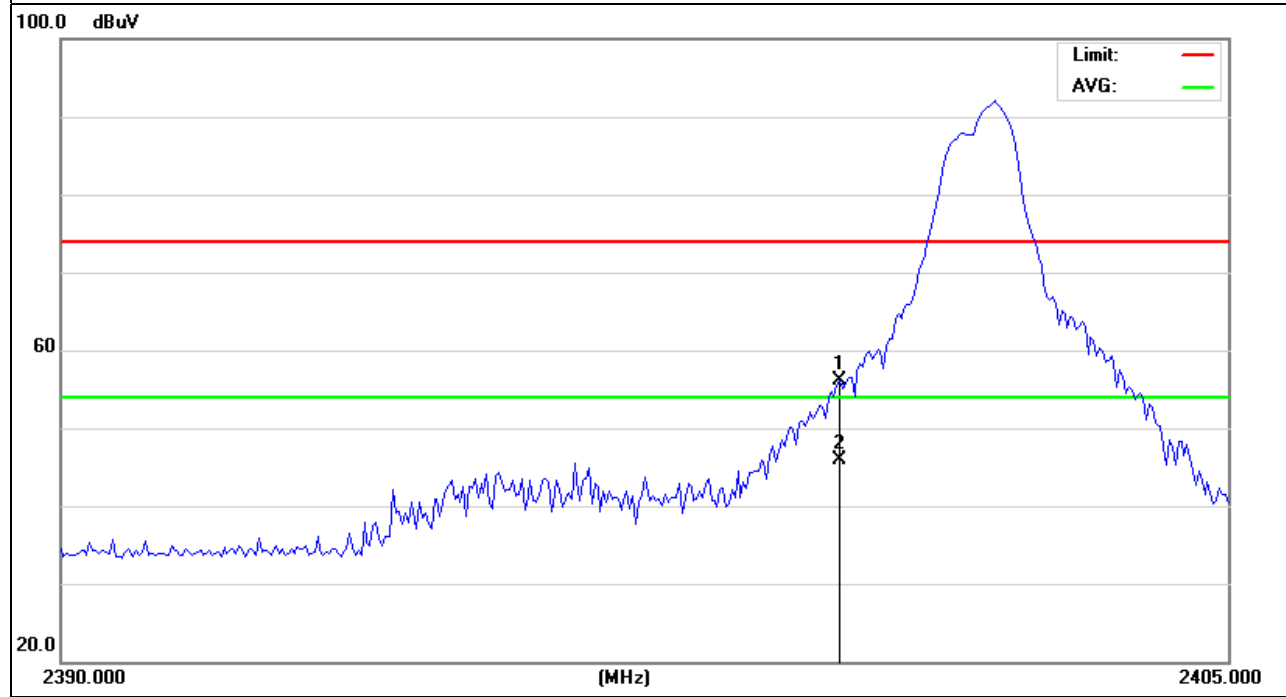

|               |                      |                     |          |
|---------------|----------------------|---------------------|----------|
| EUT :         | SMART PICO PROJECTOR | Model Name :        | CB-100   |
| Temperature : | 20 °C                | Relative Humidity : | 48%      |
| Pressure :    | 1010 hPa             | Test Voltage :      | AC 120V  |
| Test Mode :   | TX /2480MHz-2Mbps    | Polarization :      | Vertical |

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBµV)        | (dB)   | (dBµV/m)       | (dBµV/m) | (dB)   |               |
| 2483.5    | 47.85         | -12.78 | 35.07          | 74       | -38.93 | peak          |
|           |               |        |                |          |        |               |
|           |               |        |                |          |        |               |
|           |               |        |                |          |        |               |


Remark:  
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

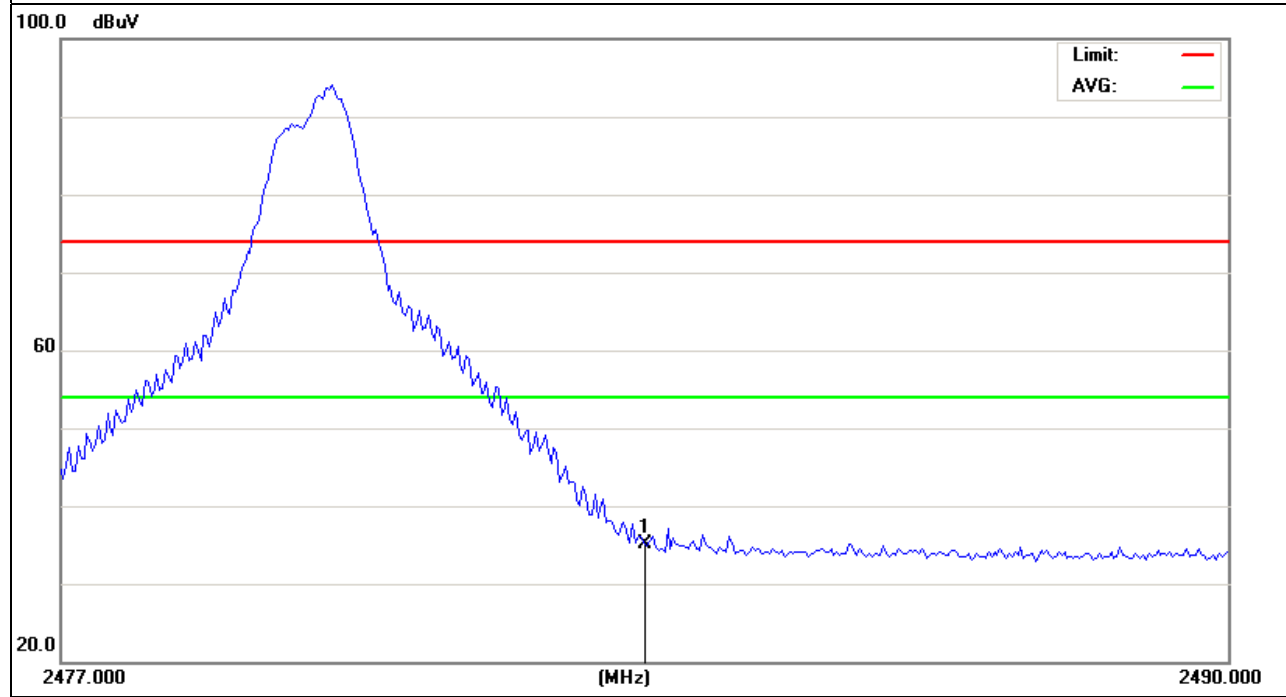

|               |                      |                     |            |
|---------------|----------------------|---------------------|------------|
| EUT :         | SMART PICO PROJECTOR | Model Name :        | CB-100     |
| Temperature : | 20 °C                | Relative Humidity : | 48%        |
| Pressure :    | 1010 hPa             | Test Voltage :      | AC 120V    |
| Test Mode :   | TX /2480MHz-2Mbps    | Polarization :      | Horizontal |

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBµV)        | (dB)   | (dBµV/m)       | (dBµV/m) | (dB)   |               |
| 2483.5    | 49.52         | -12.78 | 36.74          | 74       | -37.26 | peak          |
|           |               |        |                |          |        |               |
|           |               |        |                |          |        |               |
|           |               |        |                |          |        |               |


Remark:  
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

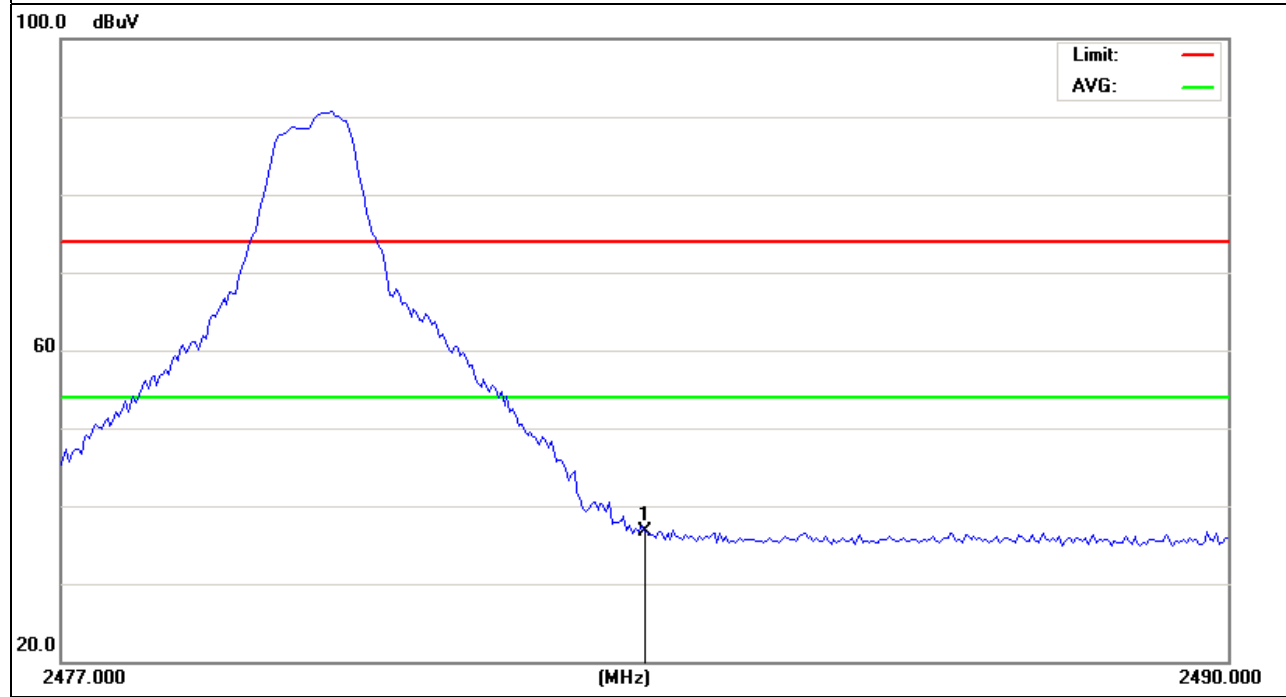

|               |                      |                     |          |
|---------------|----------------------|---------------------|----------|
| EUT :         | SMART PICO PROJECTOR | Model Name :        | CB-100   |
| Temperature : | 20 °C                | Relative Humidity : | 48%      |
| Pressure :    | 1010 hPa             | Test Voltage :      | AC 120V  |
| Test Mode :   | TX /2402MHz-3Mbps    | Polarization :      | Vertical |

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2400      | 68.93         | -12.99 | 55.94          | 74       | -18.06 | peak          |
| 2400      | 59.12         | -12.99 | 46.13          | 54       | -7.87  | AVG           |
|           |               |        |                |          |        |               |
|           |               |        |                |          |        |               |


Remark:  
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

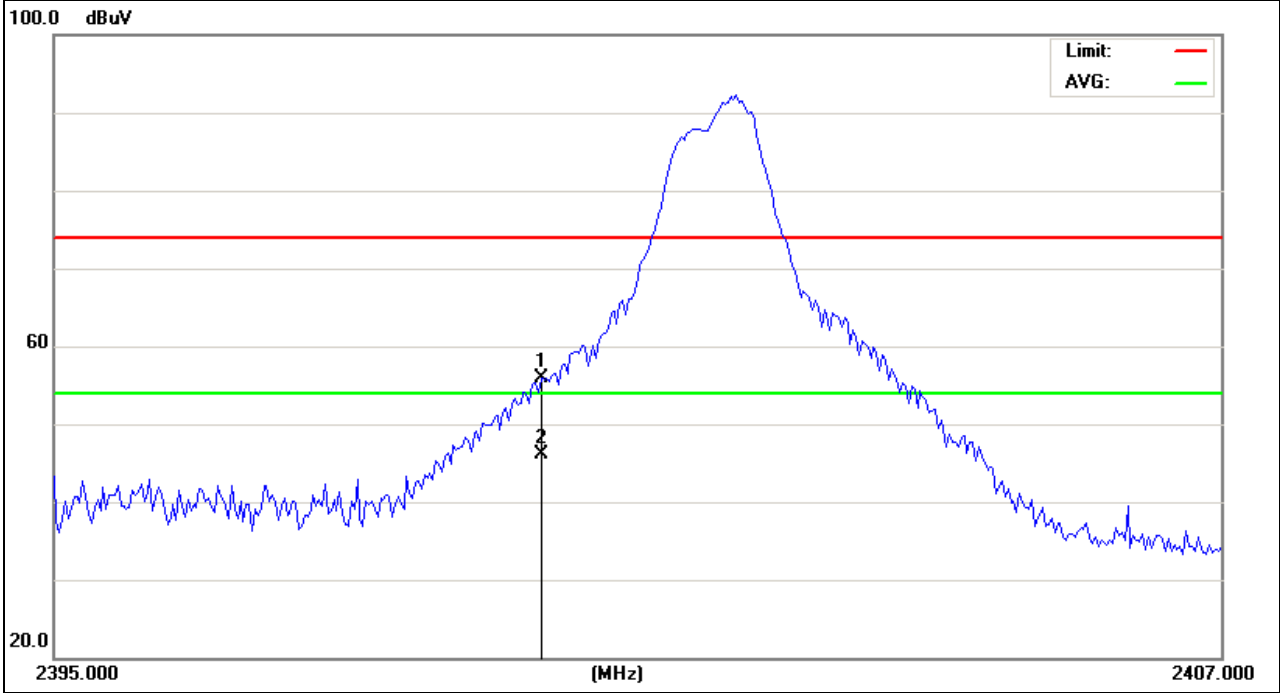

|               |                      |                     |            |
|---------------|----------------------|---------------------|------------|
| EUT :         | SMART PICO PROJECTOR | Model Name :        | CB-100     |
| Temperature : | 20 °C                | Relative Humidity : | 48%        |
| Pressure :    | 1010 hPa             | Test Voltage :      | AC 120V    |
| Test Mode :   | TX /2402MHz-3Mbps    | Polarization :      | Horizontal |

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2400      | 68.93         | -12.99 | 55.94          | 74       | -18.06 | peak          |
| 2400      | 59.84         | -12.99 | 46.85          | 54       | -7.15  | AVG           |
|           |               |        |                |          |        |               |
|           |               |        |                |          |        |               |


Remark:  
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

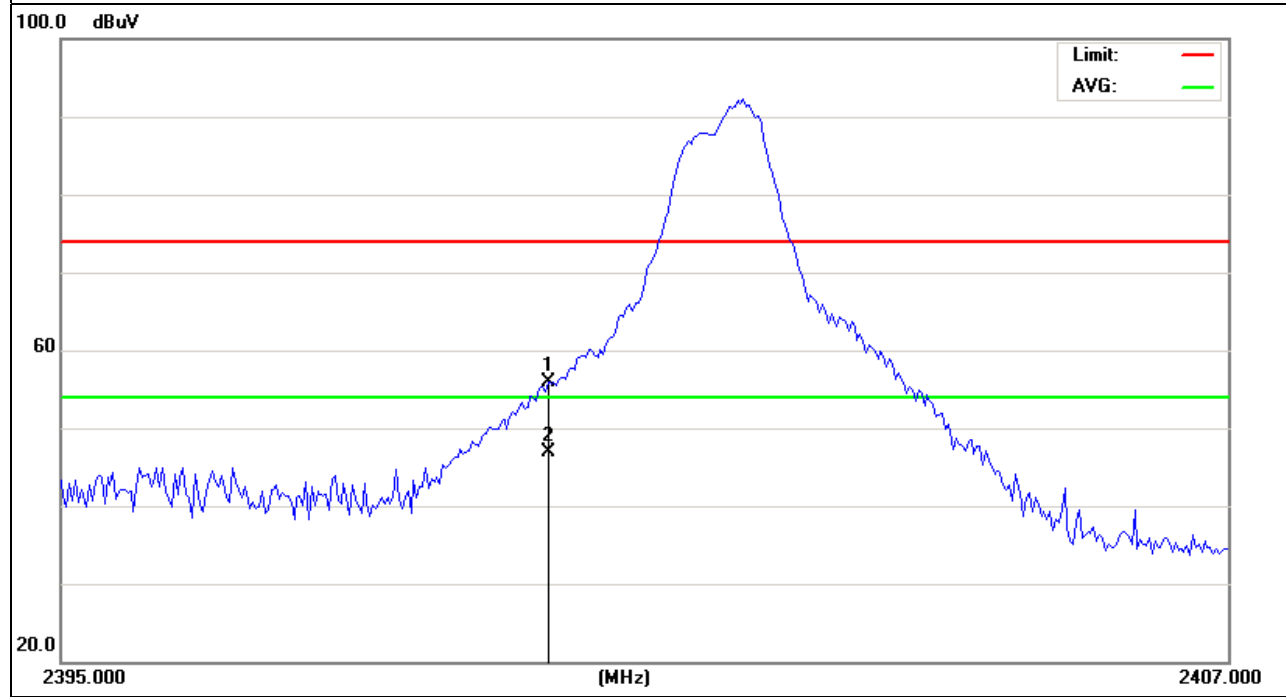

|               |                      |                     |          |
|---------------|----------------------|---------------------|----------|
| EUT :         | SMART PICO PROJECTOR | Model Name :        | CB-100   |
| Temperature : | 20 °C                | Relative Humidity : | 48%      |
| Pressure :    | 1010 hPa             | Test Voltage :      | AC 120V  |
| Test Mode :   | TX /2480MHz-3Mbps    | Polarization :      | Vertical |

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2483.5    | 48.33         | -12.78 | 35.55          | 74       | -38.45 | peak          |
|           |               |        |                |          |        |               |
|           |               |        |                |          |        |               |
|           |               |        |                |          |        |               |


Remark:  
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

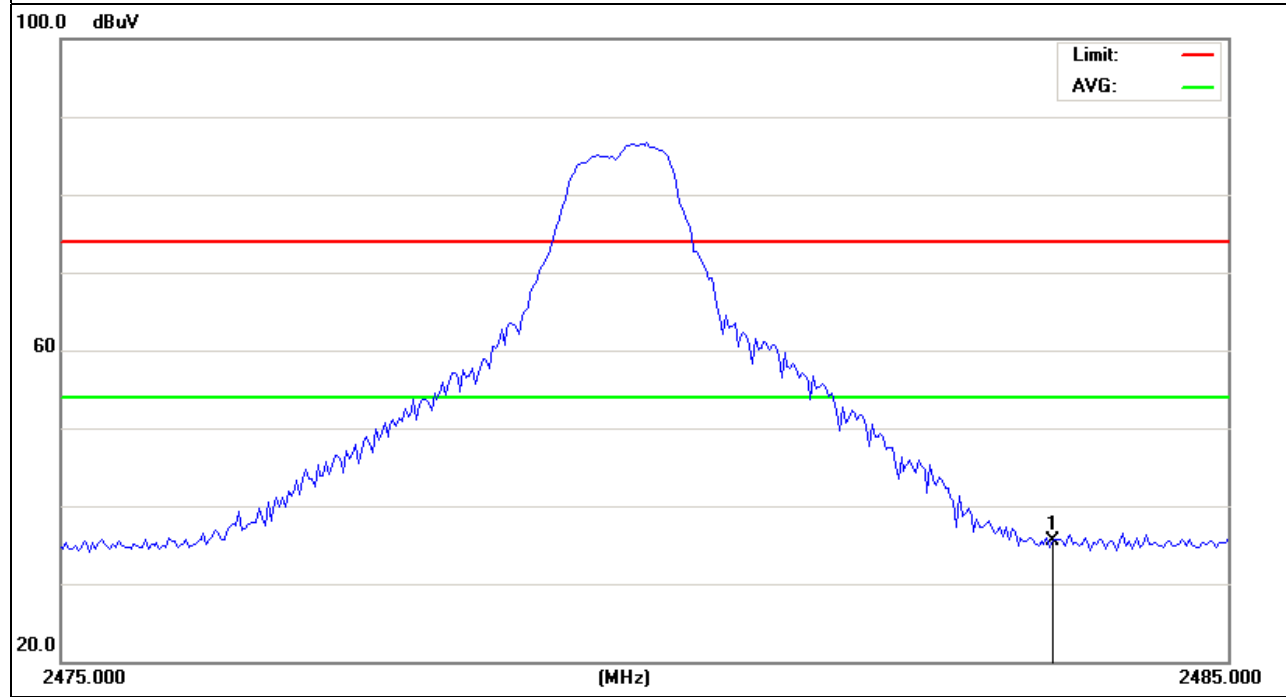

|               |                      |                     |            |
|---------------|----------------------|---------------------|------------|
| EUT :         | SMART PICO PROJECTOR | Model Name :        | CB-100     |
| Temperature : | 20 °C                | Relative Humidity : | 48%        |
| Pressure :    | 1010 hPa             | Test Voltage :      | AC 120V    |
| Test Mode :   | TX /2480MHz-3Mbps    | Polarization :      | Horizontal |

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2483.5    | 49.52         | -12.78 | 36.74          | 74       | -37.26 | peak          |
|           |               |        |                |          |        |               |
|           |               |        |                |          |        |               |
|           |               |        |                |          |        |               |

Remark:  
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

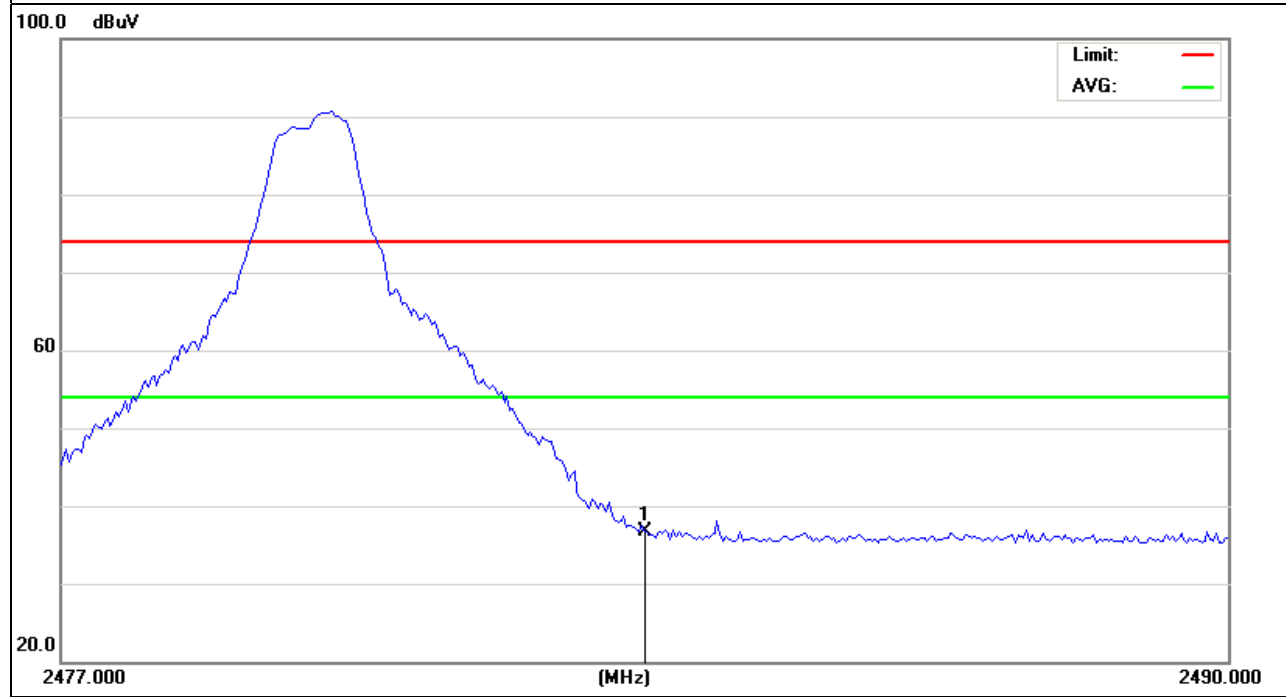

NOTE: Hopping enabled and disabled have evaluated,and the worrest data (disabled )was reported

#### 4. NUMBER OF HOPPING CHANNEL

##### 4.1 APPLIED PROCEDURES / LIMIT

| FCC Part15 (15.247) , Subpart C |                           |       |                       |        |
|---------------------------------|---------------------------|-------|-----------------------|--------|
| Section                         | Test Item                 | Limit | Frequency Range (MHz) | Result |
| 15.247 (a)(1)(iii)              | Number of Hopping Channel | ≥15   | 2400-2483.5           | PASS   |

| Spectrum Parameters | Setting                     |
|---------------------|-----------------------------|
| Attenuation         | Auto                        |
| Span Frequency      | > Operating Frequency Range |
| RB                  | 100 kHz                     |
| VB                  | 100 kHz                     |
| Detector            | Peak                        |
| Trace               | Max Hold                    |
| Sweep Time          | Auto                        |

##### 4.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW= 100KHz, VBW=100KHz, Sweep time = Auto.

##### 4.1.2 DEVIATION FROM STANDARD

No deviation.

##### 4.1.3 TEST SETUP




##### 4.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

4.1.5 TEST RESULTS

|               |                      |                     |         |
|---------------|----------------------|---------------------|---------|
| EUT :         | SMART PICO PROJECTOR | Model Name :        | CB-100  |
| Temperature : | 25 °C                | Relative Humidity : | 60%     |
| Pressure :    | 1015 hPa             | Test Voltage :      | AC 120V |
| Test Mode :   | Hopping Mode         |                     |         |

|                           |    |
|---------------------------|----|
| Number of Hopping Channel | 79 |
|---------------------------|----|

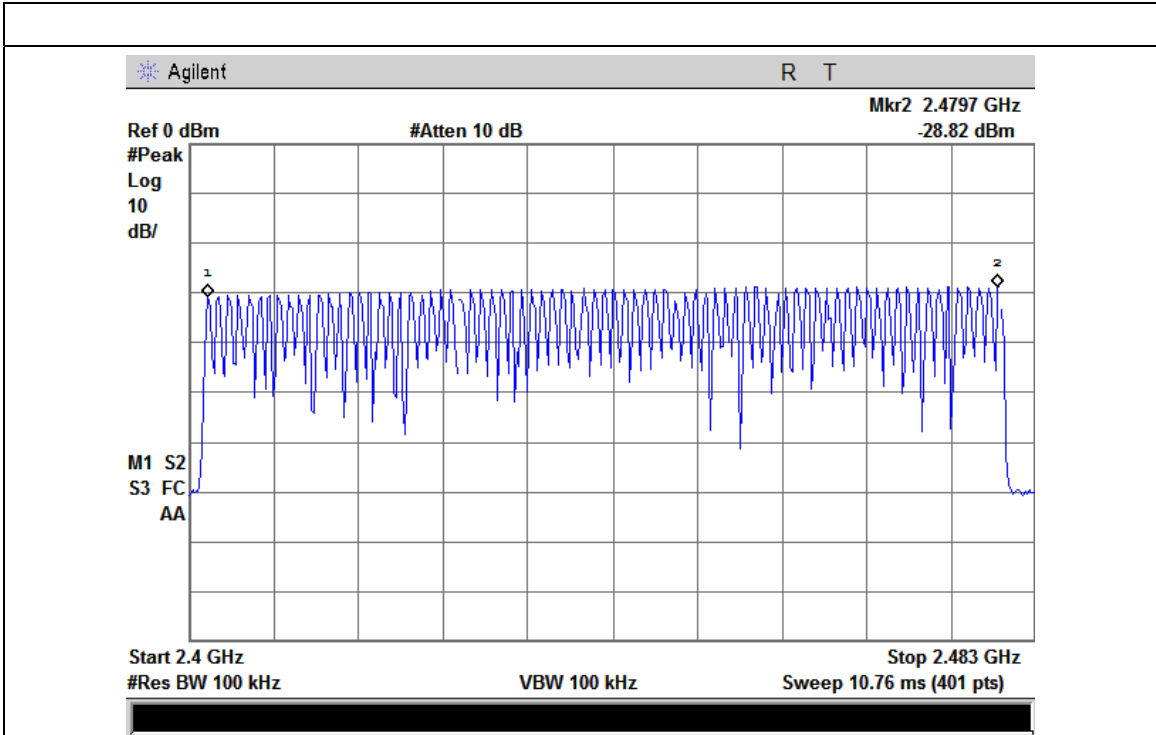

## 5. AVERAGE TIME OF OCCUPANCY

### 5.1 APPLIED PROCEDURES / LIMIT

| FCC Part15 (15.247) , Subpart C |                           |        |                       |        |
|---------------------------------|---------------------------|--------|-----------------------|--------|
| Section                         | Test Item                 | Limit  | Frequency Range (MHz) | Result |
| 15.247<br>(a)(1)(iii)           | Average Time of Occupancy | 0.4sec | 2400-2483.5           | PASS   |

#### 5.1.1 TEST PROCEDURE

- a. The transmitter output (antenna port) was connected to the spectrum analyzer
- b. Set RBW of spectrum analyzer to 1MHz and VBW to 1MHz.
- c. Use a video trigger with the trigger level set to enable triggering only on full pulses.
- d. Sweep Time is more than once pulse time.
- e. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- f. Measure the maximum time duration of one single pulse.
- g. Set the EUT for DH5, DH3 and DH1 packet transmitting.
- h. Measure the maximum time duration of one single pulse.
- i. A Period Time = (channel number)\*0.4  
 DH1 Time Slot: Reading \* (1600/2)\*31.6/(channel number)  
 DH3 Time Slot: Reading \* (1600/4)\*31.6/(channel number)  
 DH5 Time Slot: Reading \* (1600/6)\*31.6/(channel number)

#### 5.1.2 DEVIATION FROM STANDARD

No deviation.

### 5.1.3 TEST SETUP




### 5.1.4 EUT OPERATION CONDITIONS



The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

5.1.5 TEST RESULTS

|               |                      |                     |         |
|---------------|----------------------|---------------------|---------|
| EUT :         | SMART PICO PROJECTOR | Model Name :        | CB-100  |
| Temperature : | 25 °C                | Relative Humidity : | 60%     |
| Pressure :    | 1012 hPa             | Test Voltage :      | AC 120V |
| Test Mode :   | CH39-DH5 ,2DH5,3DH5  |                     |         |


| Data Packet | Frequency | Pulse Duration (ms) | Dwell Time (s) | Limits (s) |
|-------------|-----------|---------------------|----------------|------------|
| DH5         | 2441 MHz  | 2.95                | 0.31           | 0.4        |
| 2DH5        | 2441 MHz  | 3.10                | 0.33           | 0.4        |
| 3DH5        | 2441 MHz  | 3.15                | 0.34           | 0.4        |

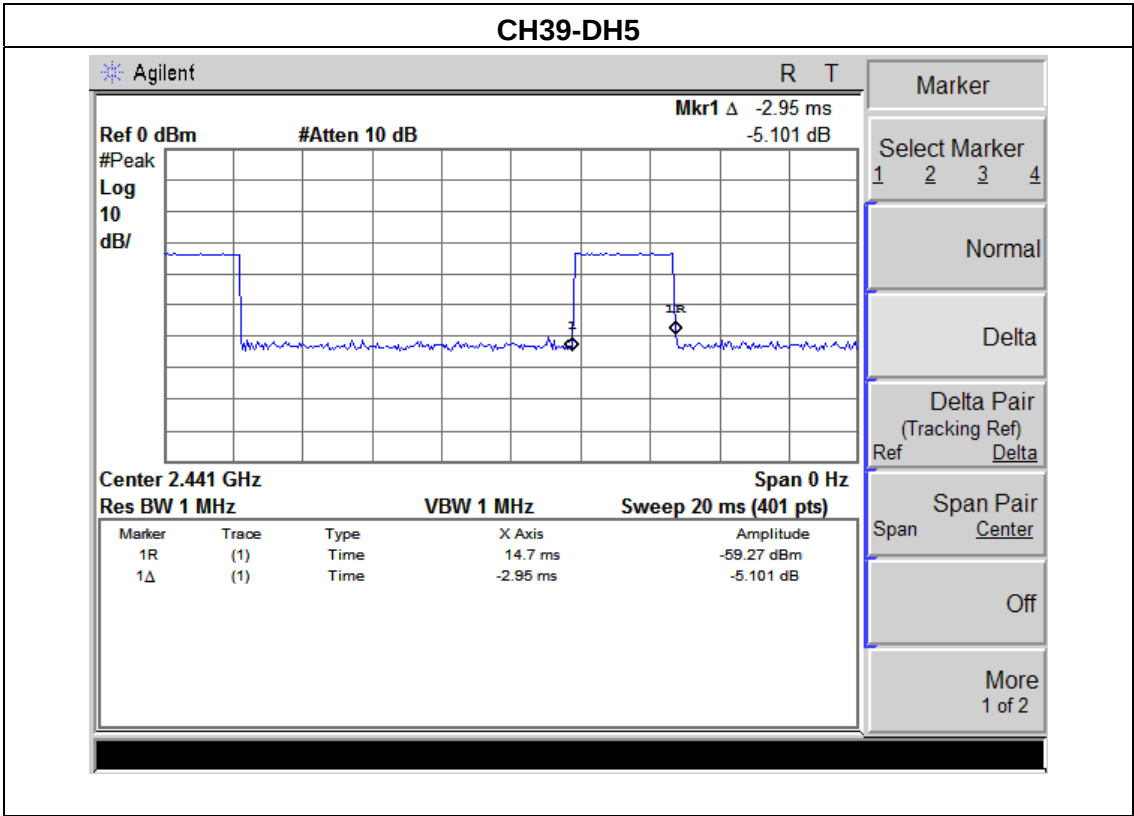


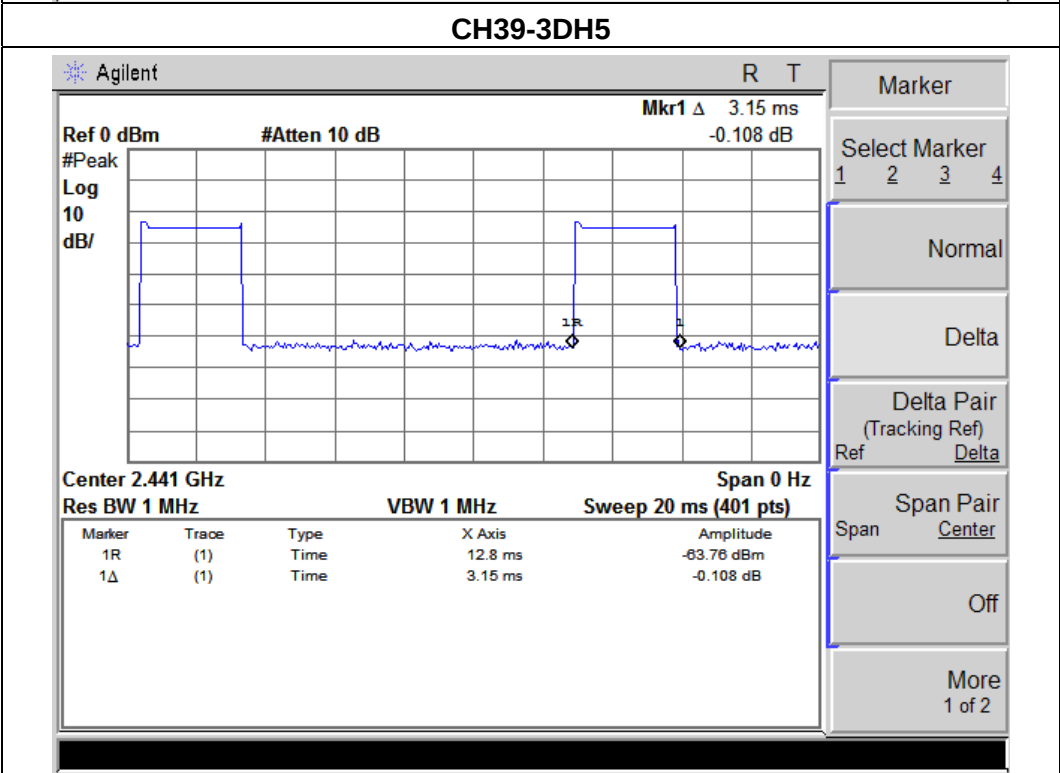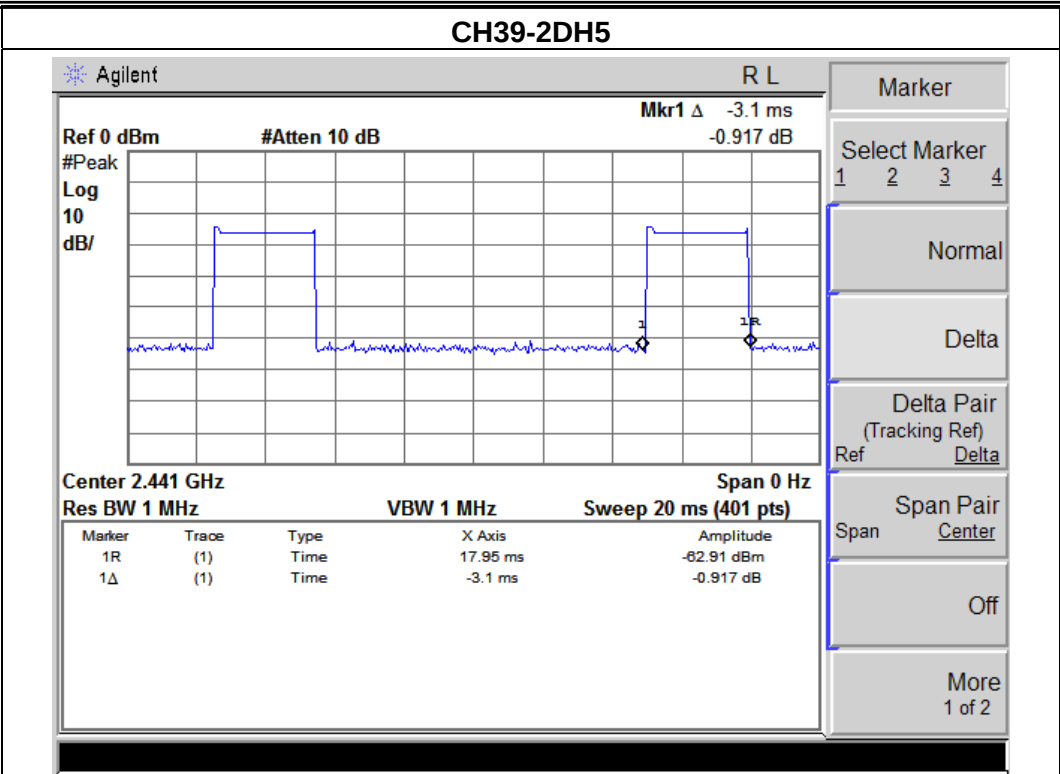

|               |                      |                     |         |
|---------------|----------------------|---------------------|---------|
| EUT :         | SMART PICO PROJECTOR | Model Name :        | CB-100  |
| Temperature : | 25 °C                | Relative Humidity : | 60%     |
| Pressure :    | 1012 hPa             | Test Voltage :      | AC 120V |
| Test Mode :   | CH39-DH3,2DH3,3DH3   |                     |         |


| Data Packet | Frequency | Pulse Duration (ms) | Dwell Time (s) | Limits (s) |
|-------------|-----------|---------------------|----------------|------------|
| DH3         | 2441 MHz  | 1.75                | 0.19           | 0.4        |
| 2DH3        | 2441 MHz  | 1.80                | 0.19           | 0.4        |
| 3DH3        | 2441 MHz  | 1.80                | 0.19           | 0.4        |


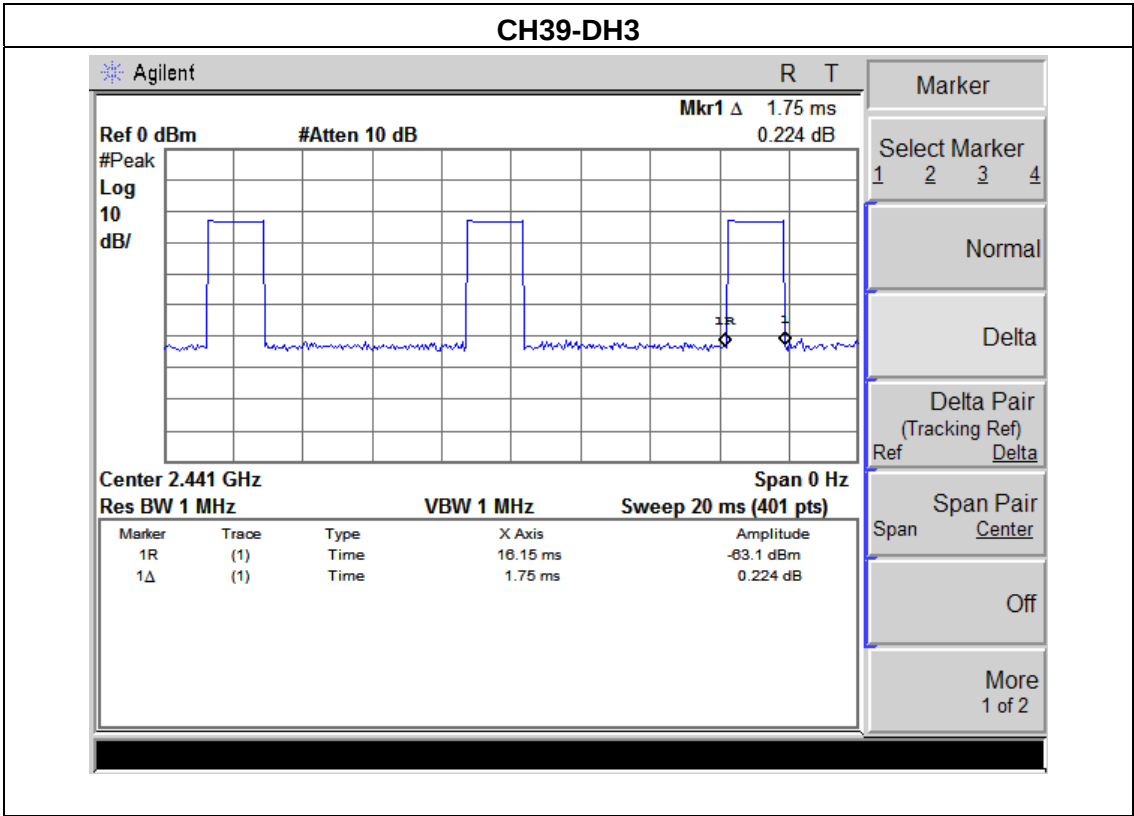


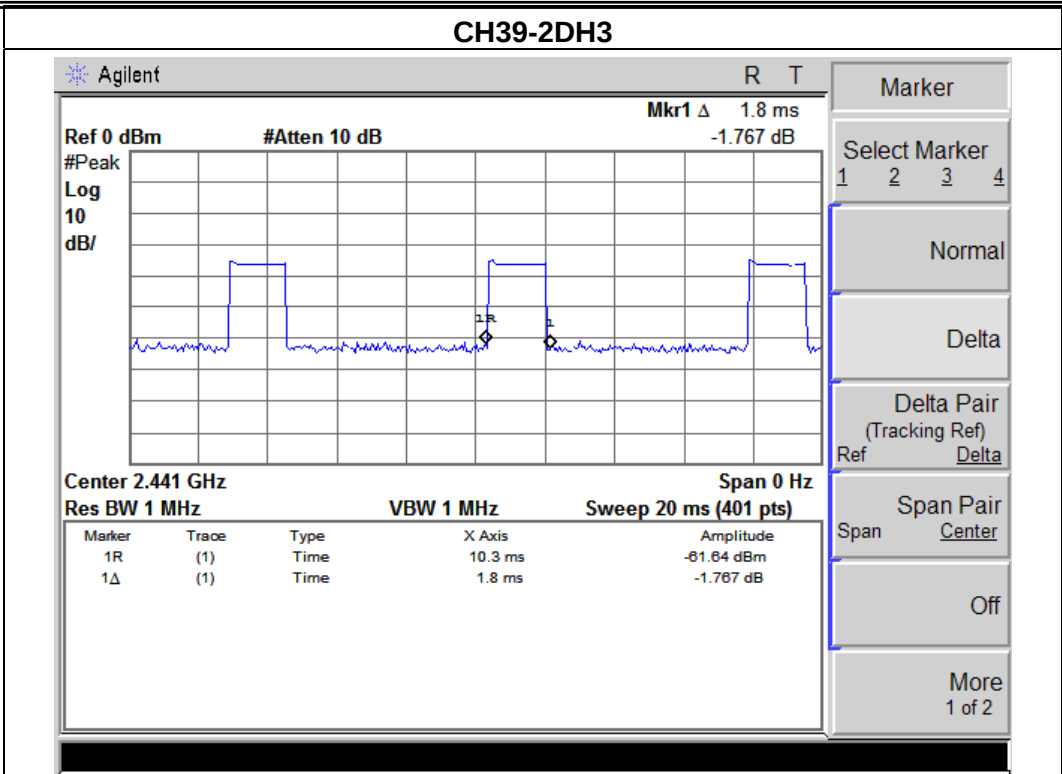

|               |                      |                     |         |
|---------------|----------------------|---------------------|---------|
| EUT :         | SMART PICO PROJECTOR | Model Name :        | CB-100  |
| Temperature : | 25 °C                | Relative Humidity : | 60%     |
| Pressure :    | 1012 hPa             | Test Voltage :      | AC 120V |
| Test Mode :   | CH39-DH1,2DH1,3DH1   |                     |         |

| Data Packet | Frequency | Pulse Duration (ms) | Dwell Time (s) | Limits (s) |
|-------------|-----------|---------------------|----------------|------------|
| DH1         | 2441 MHz  | 0.46                | 0.05           | 0.4        |
| 2DH1        | 2441 MHz  | 0.45                | 0.05           | 0.4        |
| 3DH1        | 2441 MHz  | 0.45                | 0.05           | 0.4        |

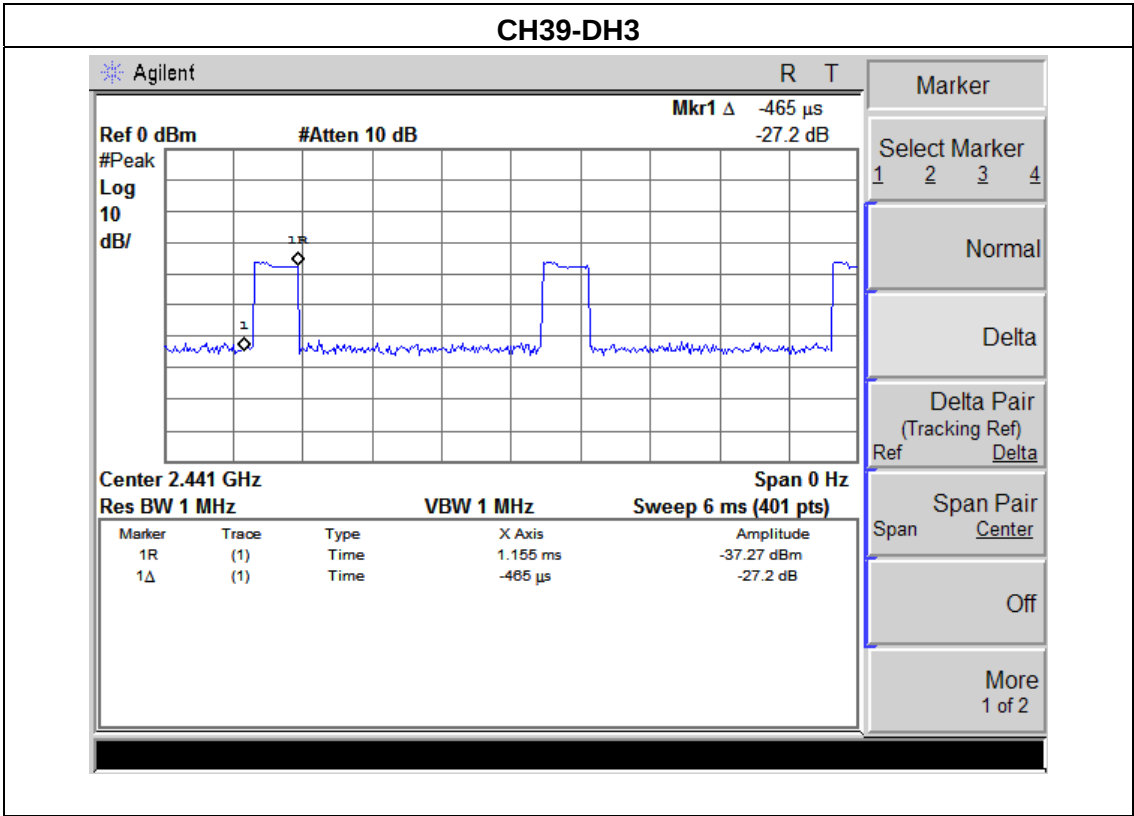

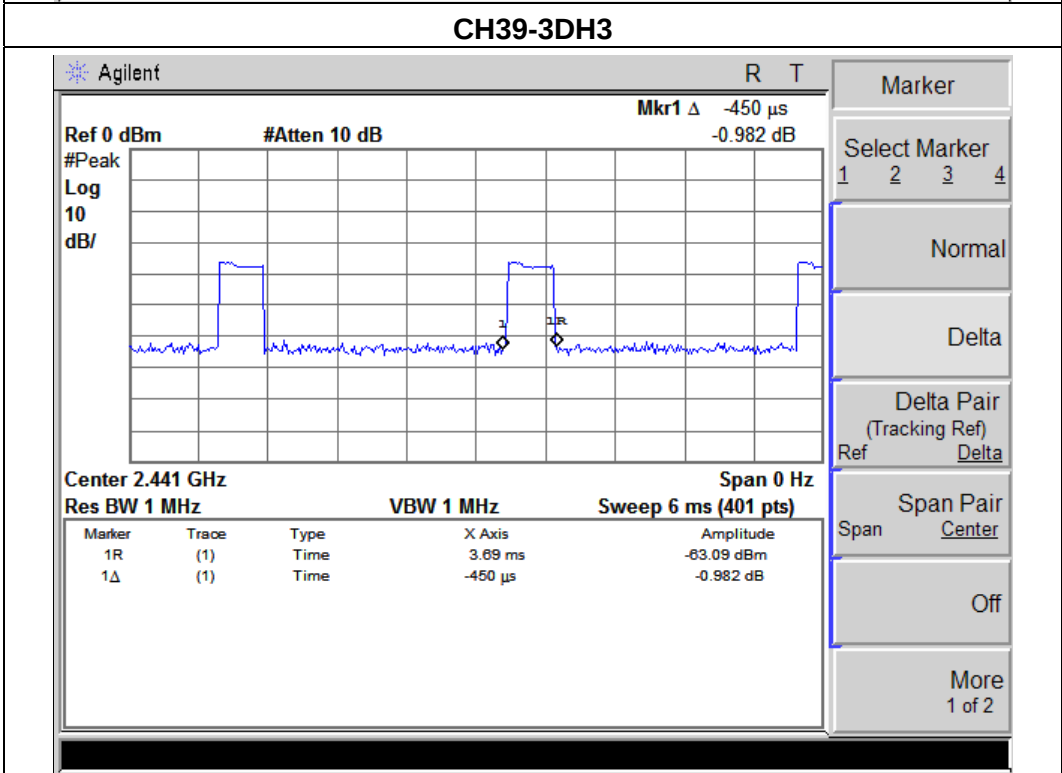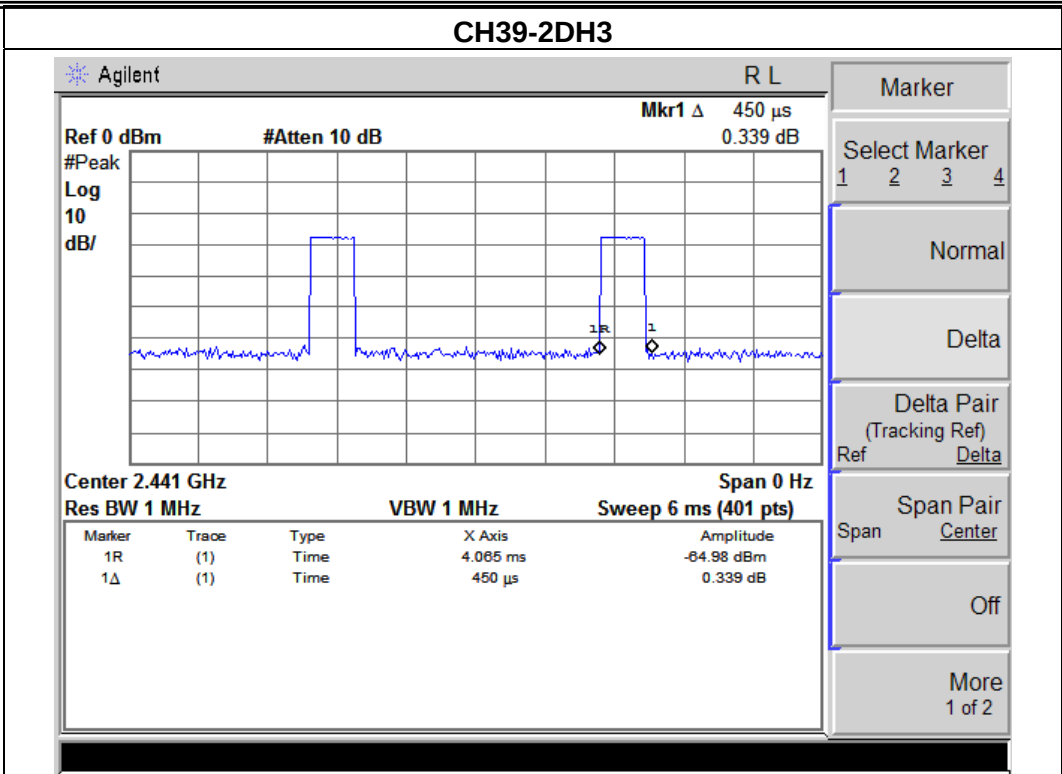

## 6. HOPPING CHANNEL SEPARATION MEASUREMENT

### 6.1 APPLIED PROCEDURES / LIMIT

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

| Spectrum Parameter | Setting                                       |
|--------------------|-----------------------------------------------|
| Attenuation        | Auto                                          |
| Span Frequency     | > Measurement Bandwidth or Channel Separation |
| RB                 | 100 kHz (Channel Separation)                  |
| VB                 | 300 kHz (Channel Separation)                  |
| Detector           | Peak                                          |
| Trace              | Max Hold                                      |
| Sweep Time         | Auto                                          |


#### 6.1.1 TEST PROCEDURE

- The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
- The resolution bandwidth of 100 kHz and the video bandwidth of 300 kHz were utilised for channel separation measurement.

#### 6.1.2 DEVIATION FROM STANDARD

No deviation.

#### 6.1.3 TEST SETUP

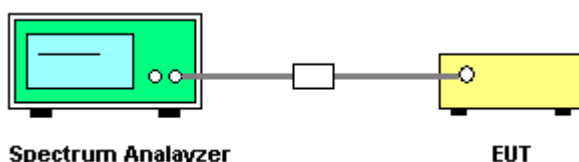

#### 6.1.4 EUT OPERATION CONDITIONS


The EUT was programmed to be in continuously transmitting mode.



6.1.5 TEST RESULTS

|               |                                |                     |         |
|---------------|--------------------------------|---------------------|---------|
| EUT :         | SMART PICO PROJECTOR           | Model Name :        | CB-100  |
| Temperature : | 25 °C                          | Relative Humidity : | 60%     |
| Pressure :    | 1012 hPa                       | Test Voltage :      | AC 120V |
| Test Mode :   | CH00 / CH39 /CH78 (1Mbps Mode) |                     |         |

| Frequency | Ch. Separation (MHz) | Result   |
|-----------|----------------------|----------|
| 2402 MHz  | 1.020                | Complies |
| 2441 MHz  | 1.010                | Complies |
| 2480 MHz  | 1.020                | Complies |

Ch. Separation Limits: >20dB bandwidth or >2/3 of 20dB bandwidth

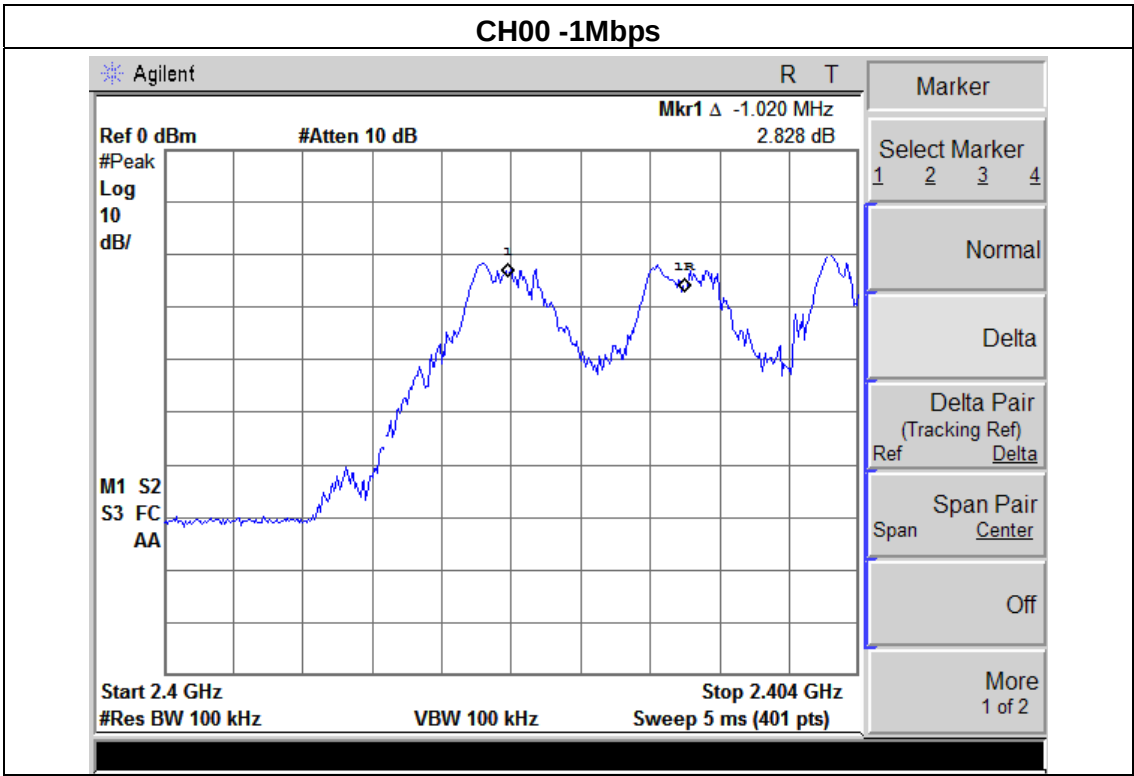


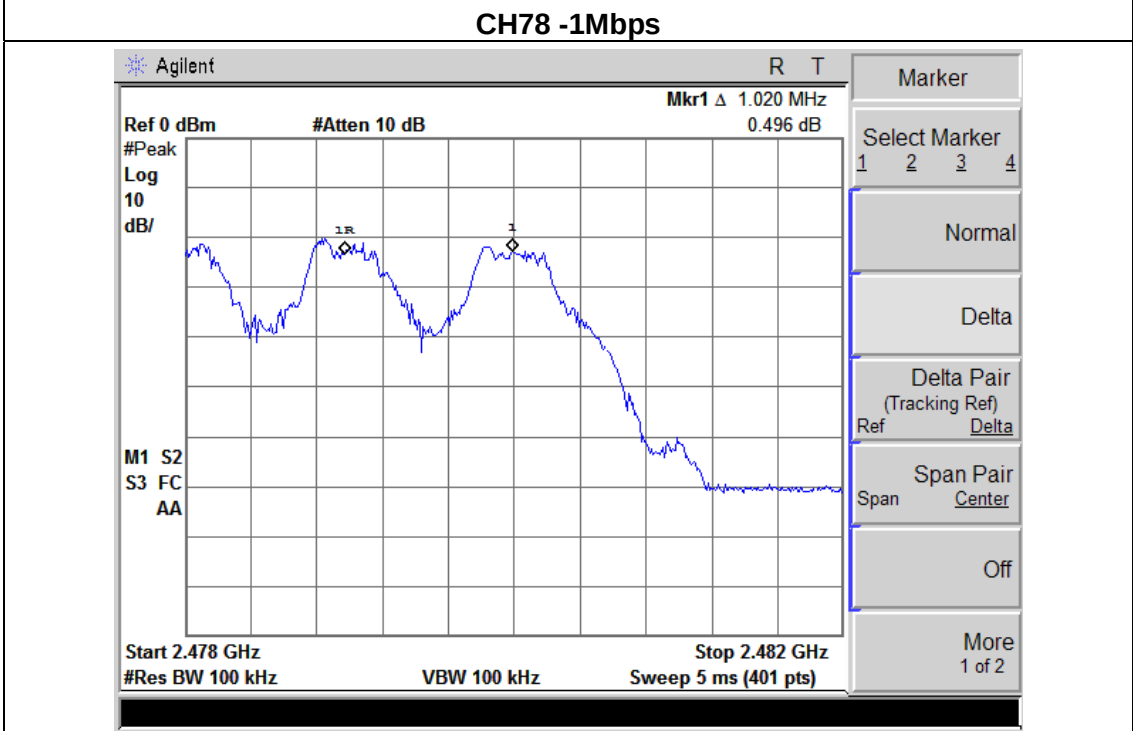
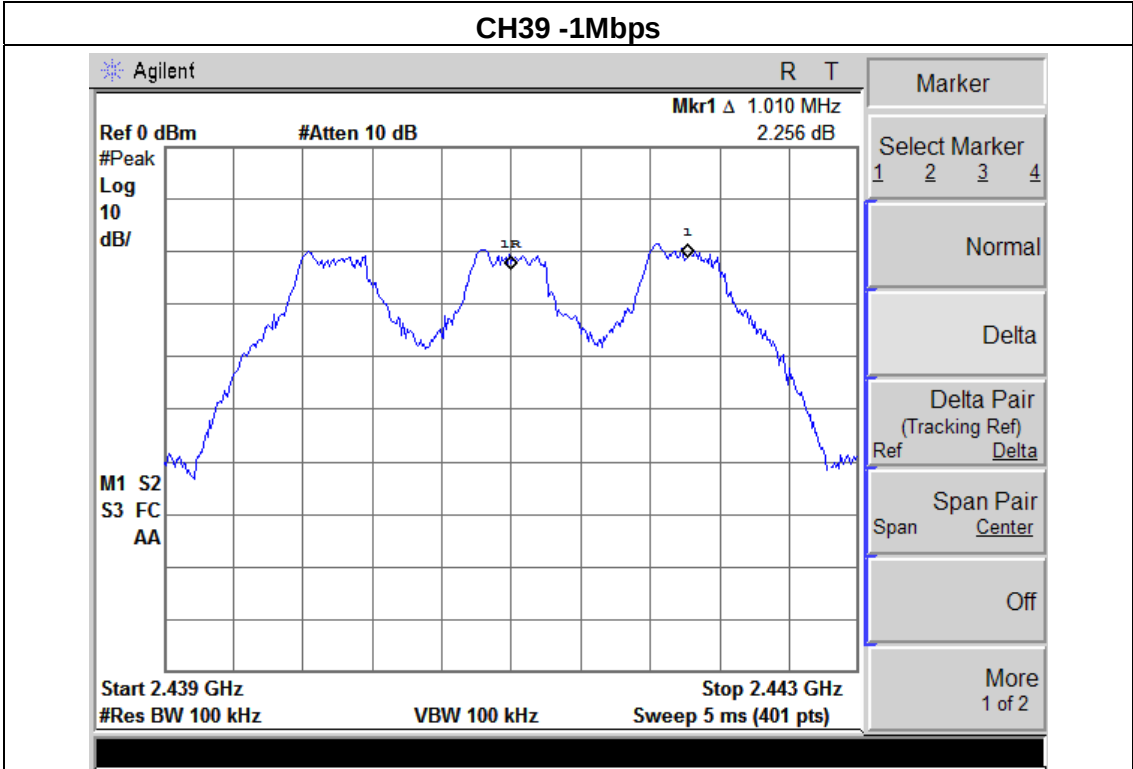


|               |                                |                     |         |
|---------------|--------------------------------|---------------------|---------|
| EUT :         | SMART PICO PROJECTOR           | Model Name :        | CB-100  |
| Temperature : | 25 °C                          | Relative Humidity : | 60%     |
| Pressure :    | 1012 hPa                       | Test Voltage :      | AC 120V |
| Test Mode :   | CH00 / CH39 /CH78 (2Mbps Mode) |                     |         |

| Frequency | Ch. Separation (MHz) | Result   |
|-----------|----------------------|----------|
| 2402 MHz  | 1.010                | Complies |
| 2441 MHz  | 1.050                | Complies |
| 2480 MHz  | 1.010                | Complies |

Ch. Separation Limits: >20dB bandwidth or >2/3 of 20dB bandwidth

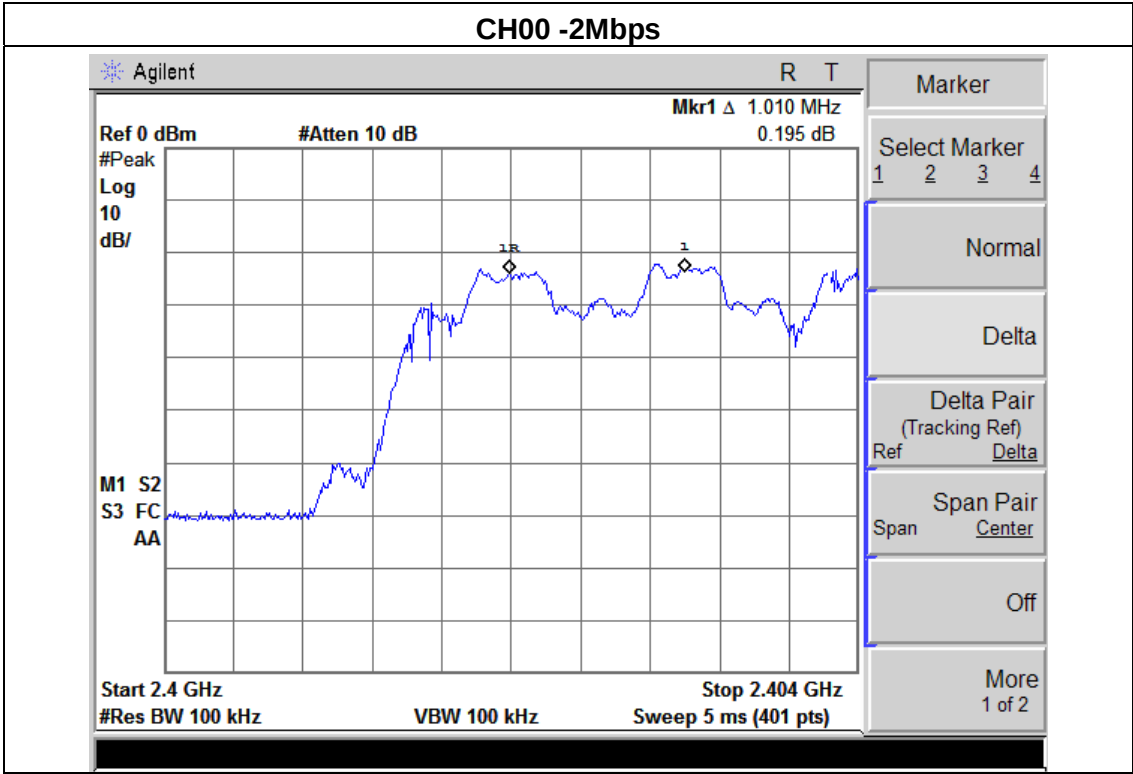


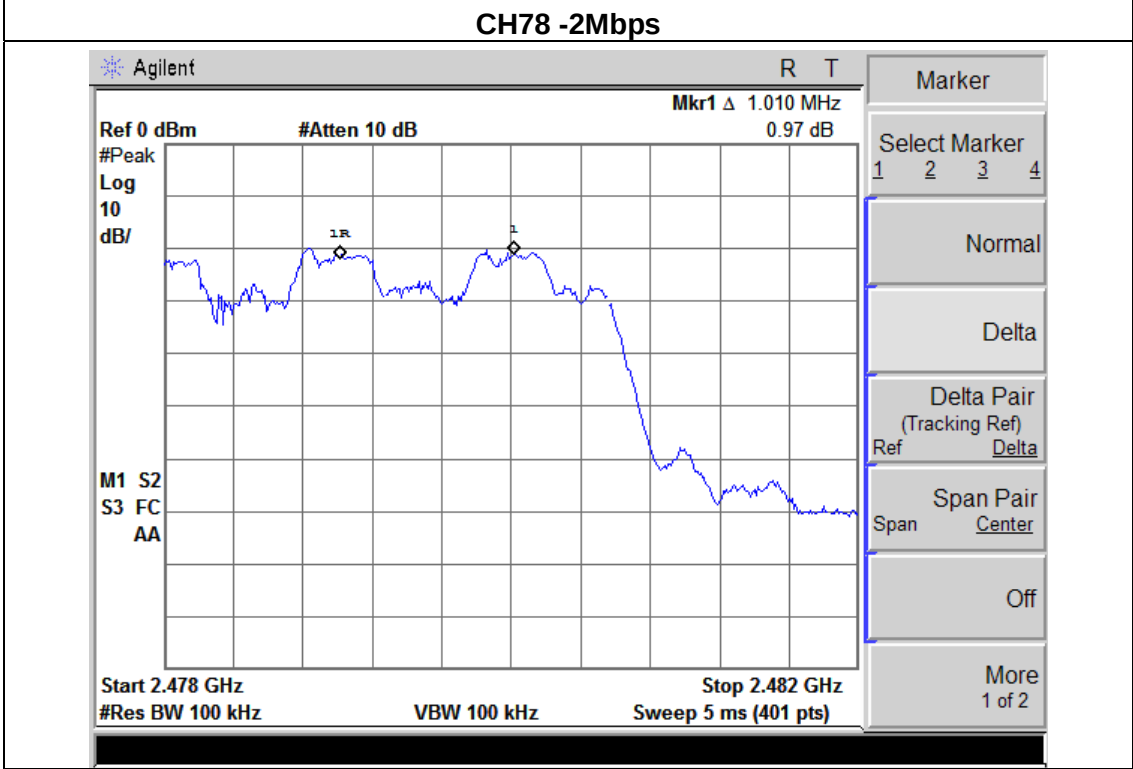
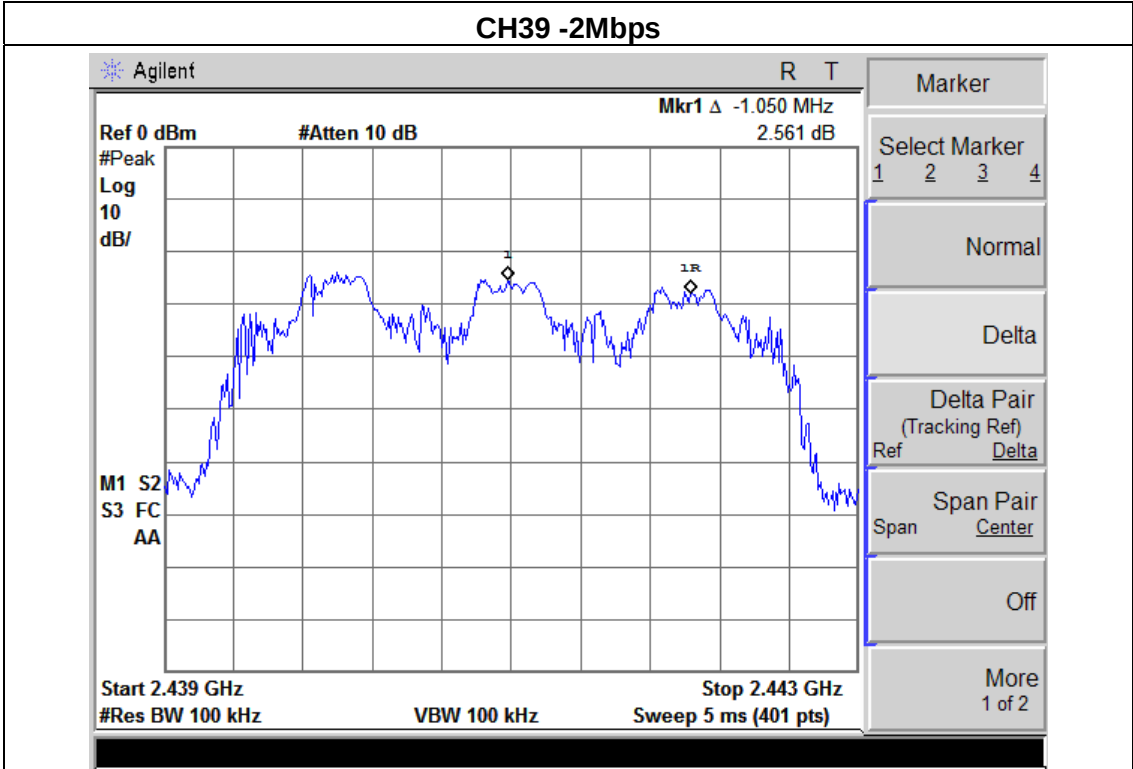


|               |                                |                     |         |
|---------------|--------------------------------|---------------------|---------|
| EUT :         | SMART PICO PROJECTOR           | Model Name :        | CB-100  |
| Temperature : | 25 °C                          | Relative Humidity : | 60%     |
| Pressure :    | 1012 hPa                       | Test Voltage :      | AC 120V |
| Test Mode :   | CH00 / CH39 /CH78 (3Mbps Mode) |                     |         |

| Frequency | Ch. Separation (MHz) | Result   |
|-----------|----------------------|----------|
| 2402 MHz  | 1.030                | Complies |
| 2441 MHz  | 1.010                | Complies |
| 2480 MHz  | 1.000                | Complies |

Ch. Separation Limits: >20dB bandwidth or >2/3 of 20dB bandwidth

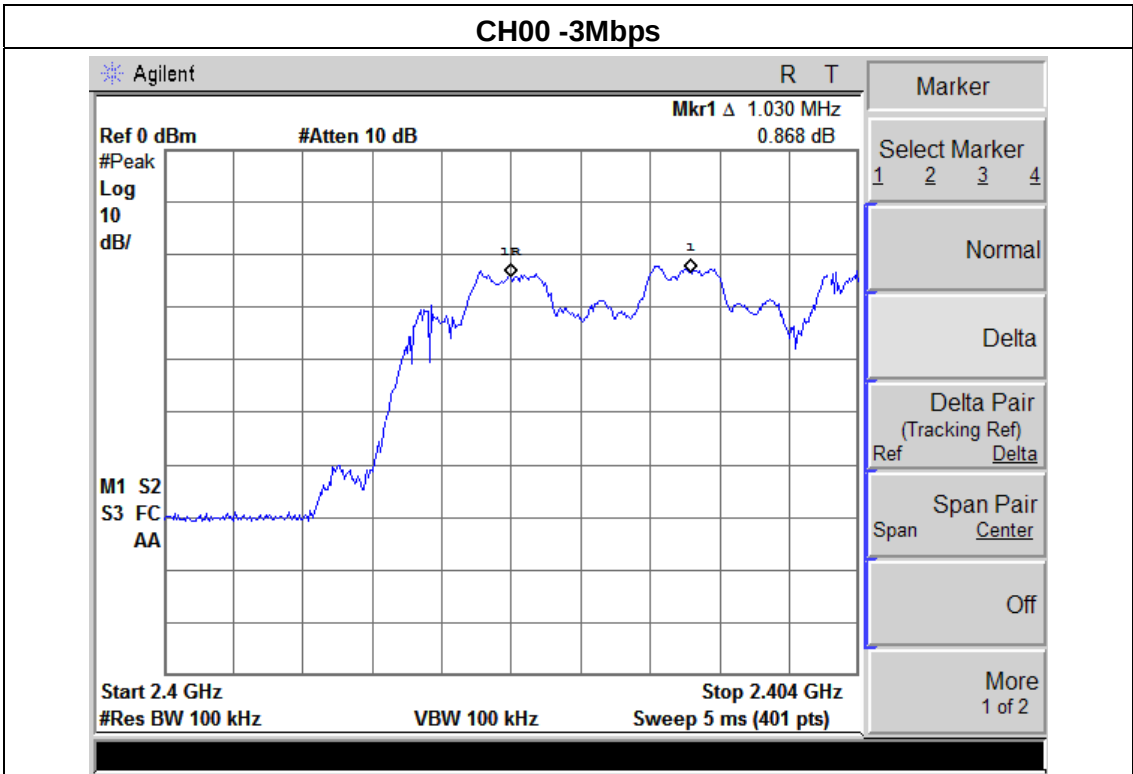

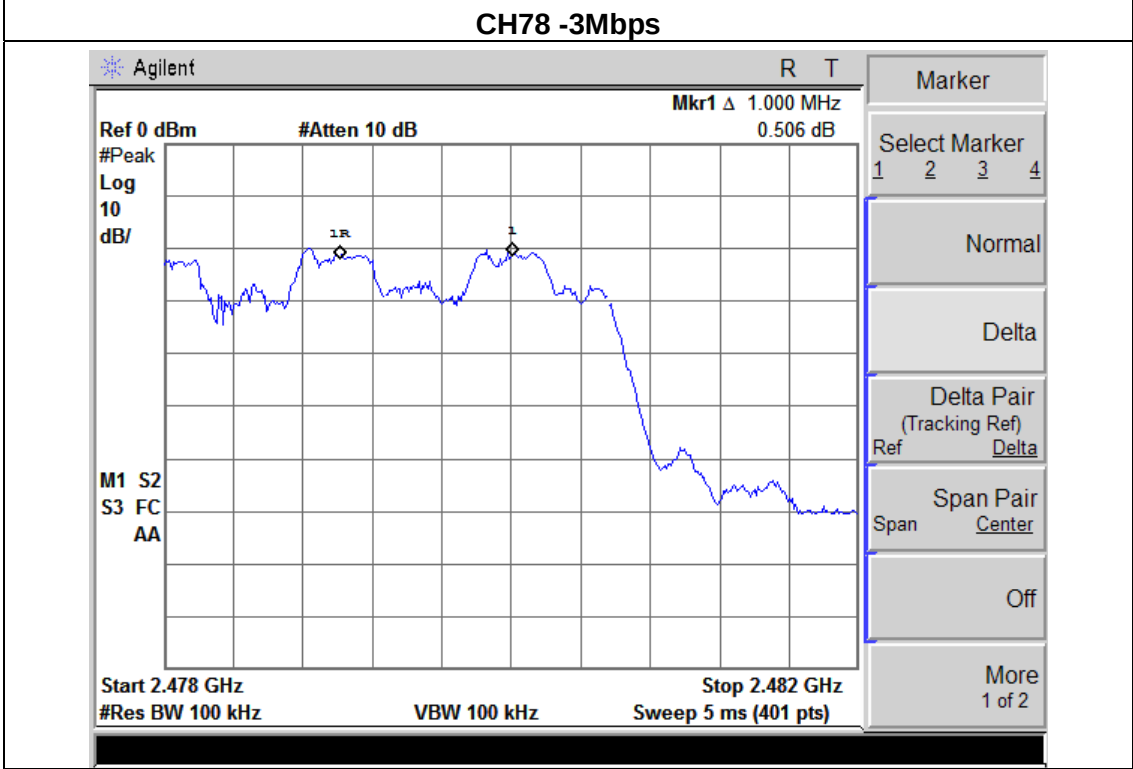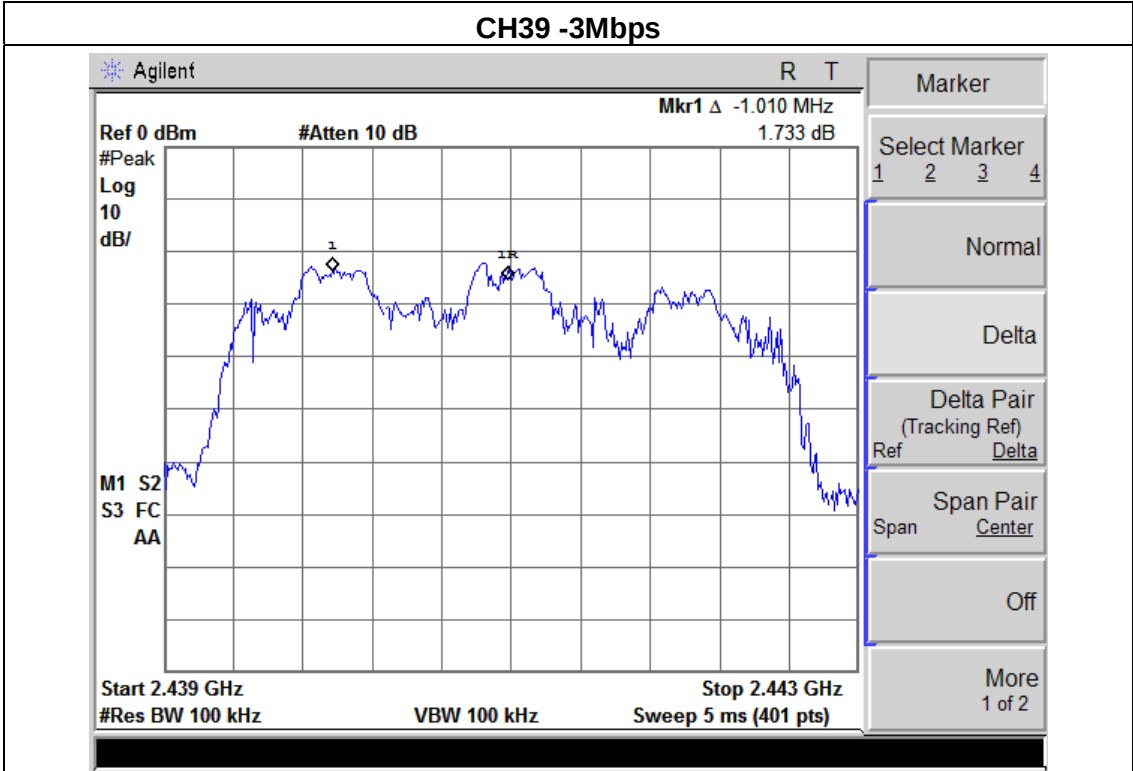

## 7. BANDWIDTH TEST

### 7.1 APPLIED PROCEDURES / LIMIT

| FCC Part15 (15.247) , Subpart C |           |                  |                       |        |
|---------------------------------|-----------|------------------|-----------------------|--------|
| Section                         | Test Item | Limit            | Frequency Range (MHz) | Result |
| 15.247<br>(a)(1)                | Bandwidth | (20dB bandwidth) | 2400-2483.5           | PASS   |

| Spectrum Parameter | Setting                                       |
|--------------------|-----------------------------------------------|
| Attenuation        | Auto                                          |
| Span Frequency     | > Measurement Bandwidth or Channel Separation |
| RB                 | 30 kHz                                        |
| VB                 | 100 kHz                                       |
| Detector           | Peak                                          |
| Trace              | Max Hold                                      |
| Sweep Time         | Auto                                          |


#### 7.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW= 100KHz, VBW=100KHz, Sweep time = Auto.

#### 7.1.2 DEVIATION FROM STANDARD

No deviation.

#### 7.1.3 TEST SETUP

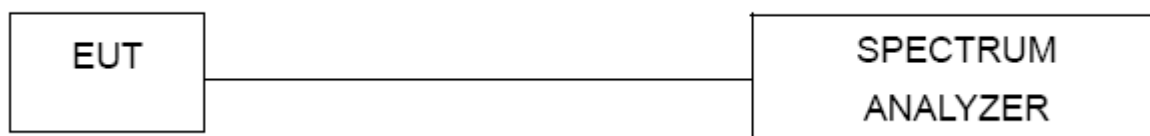


#### 7.1.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

7.1.5 TEST RESULTS

|               |                         |                     |         |
|---------------|-------------------------|---------------------|---------|
| EUT :         | SMART PICO PROJECTOR    | Model Name :        | CB-100  |
| Temperature : | 25 °C                   | Relative Humidity : | 60%     |
| Pressure :    | 1012 hPa                | Test Voltage :      | AC 120V |
| Test Mode :   | CH00 / CH39 /C78(1Mbps) |                     |         |


| Frequency | 20dB Bandwidth (kHz) | Result |
|-----------|----------------------|--------|
| 2402 MHz  | 811.21               | PASS   |
| 2441 MHz  | 765.78               | PASS   |
| 2480 MHz  | 828.75               | PASS   |

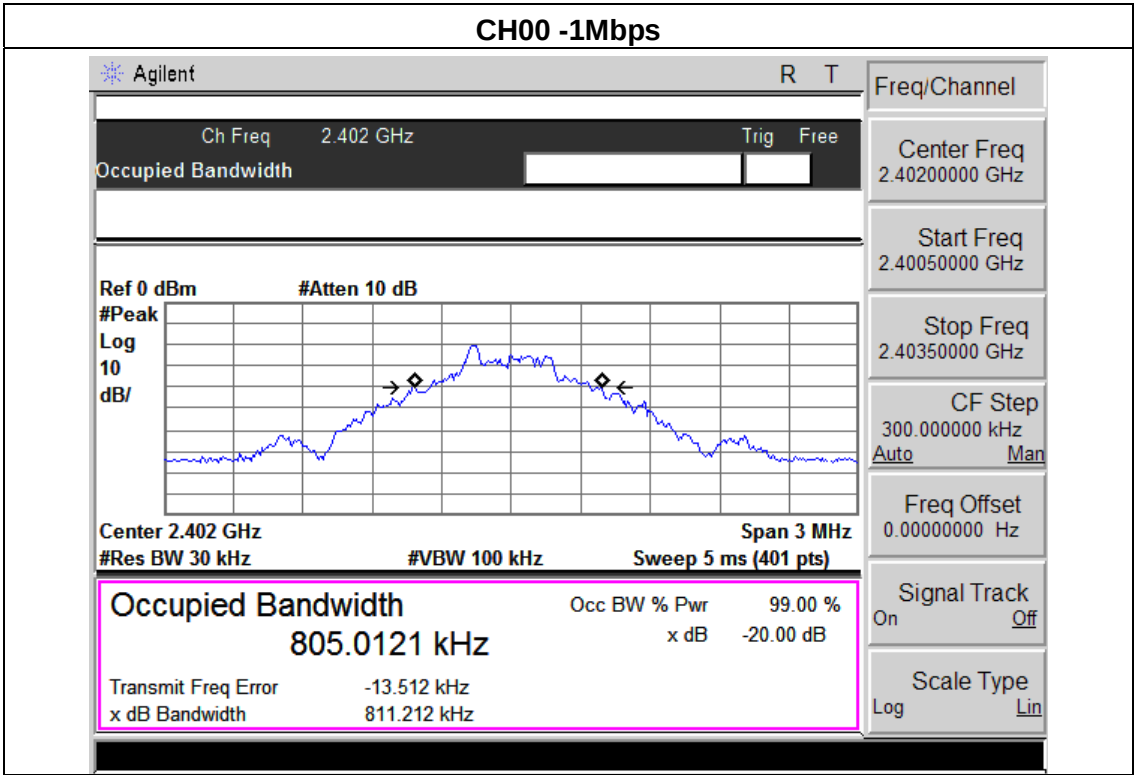


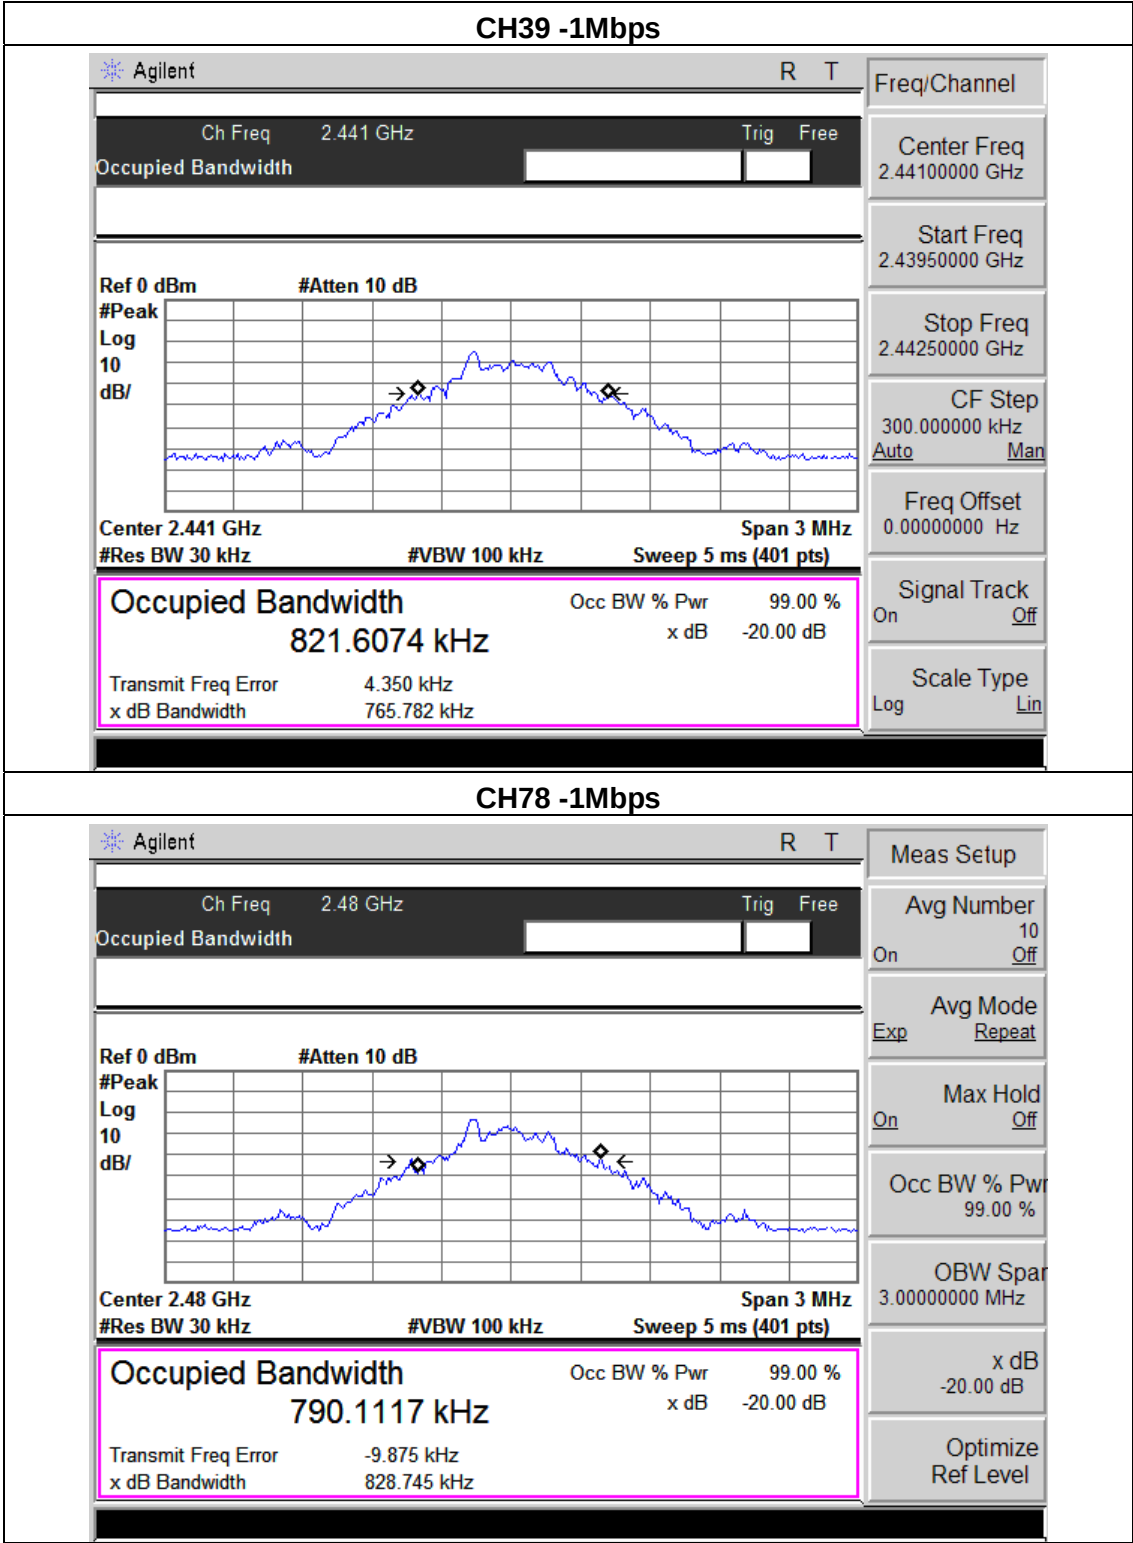

|               |                         |                     |         |
|---------------|-------------------------|---------------------|---------|
| EUT :         | SMART PICO PROJECTOR    | Model Name :        | CB-100  |
| Temperature : | 25 °C                   | Relative Humidity : | 60%     |
| Pressure :    | 1012 hPa                | Test Voltage :      | AC 120V |
| Test Mode :   | CH00 / CH39 /C78(2Mbps) |                     |         |


| Frequency | 20dB Bandwidth (kHz) | Result |
|-----------|----------------------|--------|
| 2402 MHz  | 1.126                | PASS   |
| 2441 MHz  | 1.124                | PASS   |
| 2480 MHz  | 1.129                | PASS   |

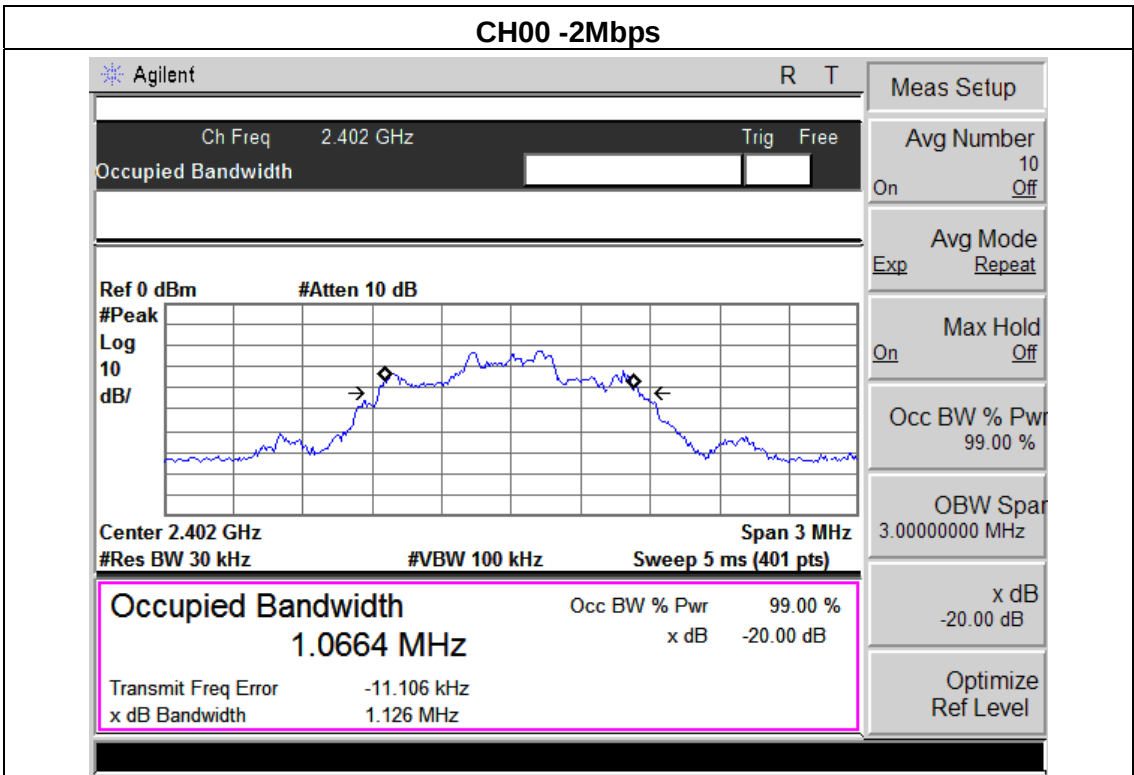


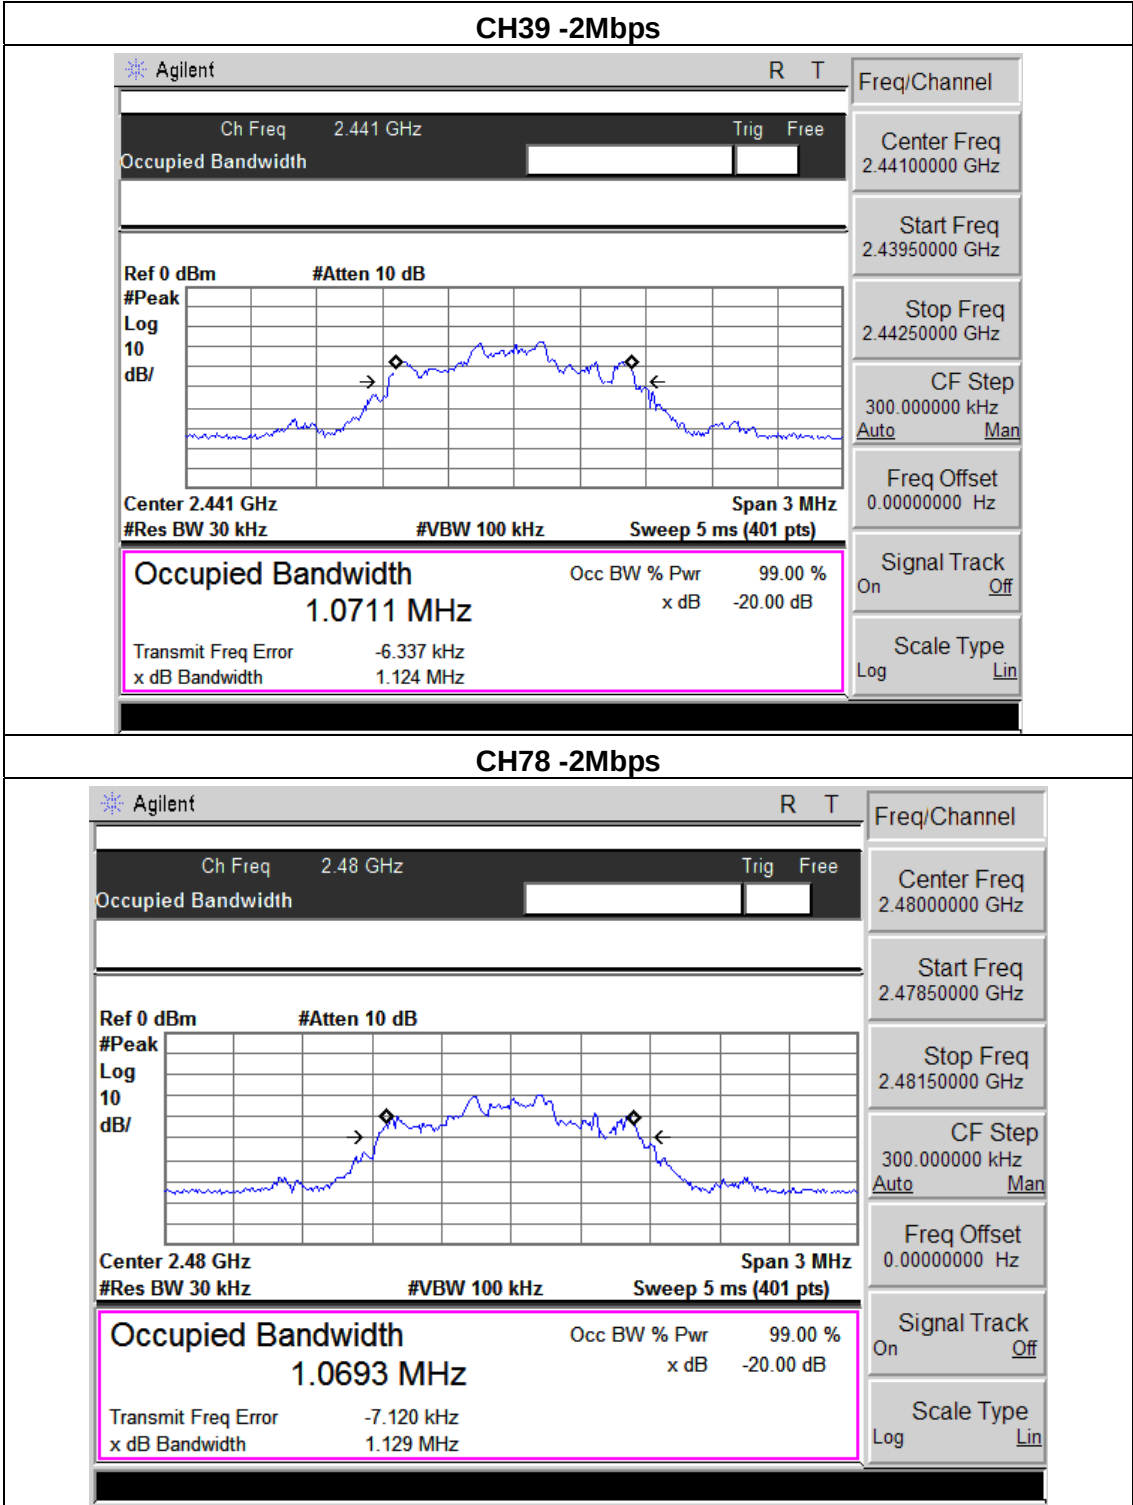

|               |                         |                     |         |
|---------------|-------------------------|---------------------|---------|
| EUT :         | SMART PICO PROJECTOR    | Model Name :        | CB-100  |
| Temperature : | 25 °C                   | Relative Humidity : | 60%     |
| Pressure :    | 1012 hPa                | Test Voltage :      | AC 120V |
| Test Mode :   | CH00 / CH39 /C78(3Mbps) |                     |         |

| Frequency | 20dB Bandwidth (kHz) | Result |
|-----------|----------------------|--------|
| 2402 MHz  | 1.137                | PASS   |
| 2441 MHz  | 1.115                | PASS   |
| 2480 MHz  | 1.107                | PASS   |

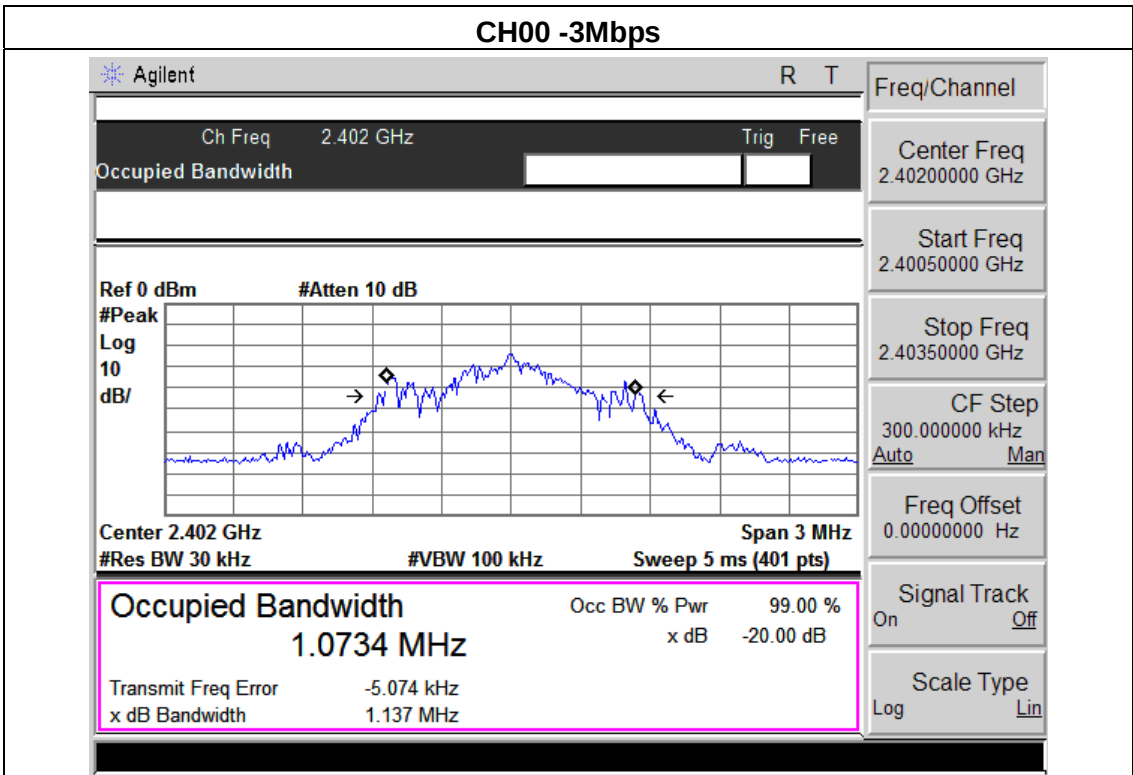

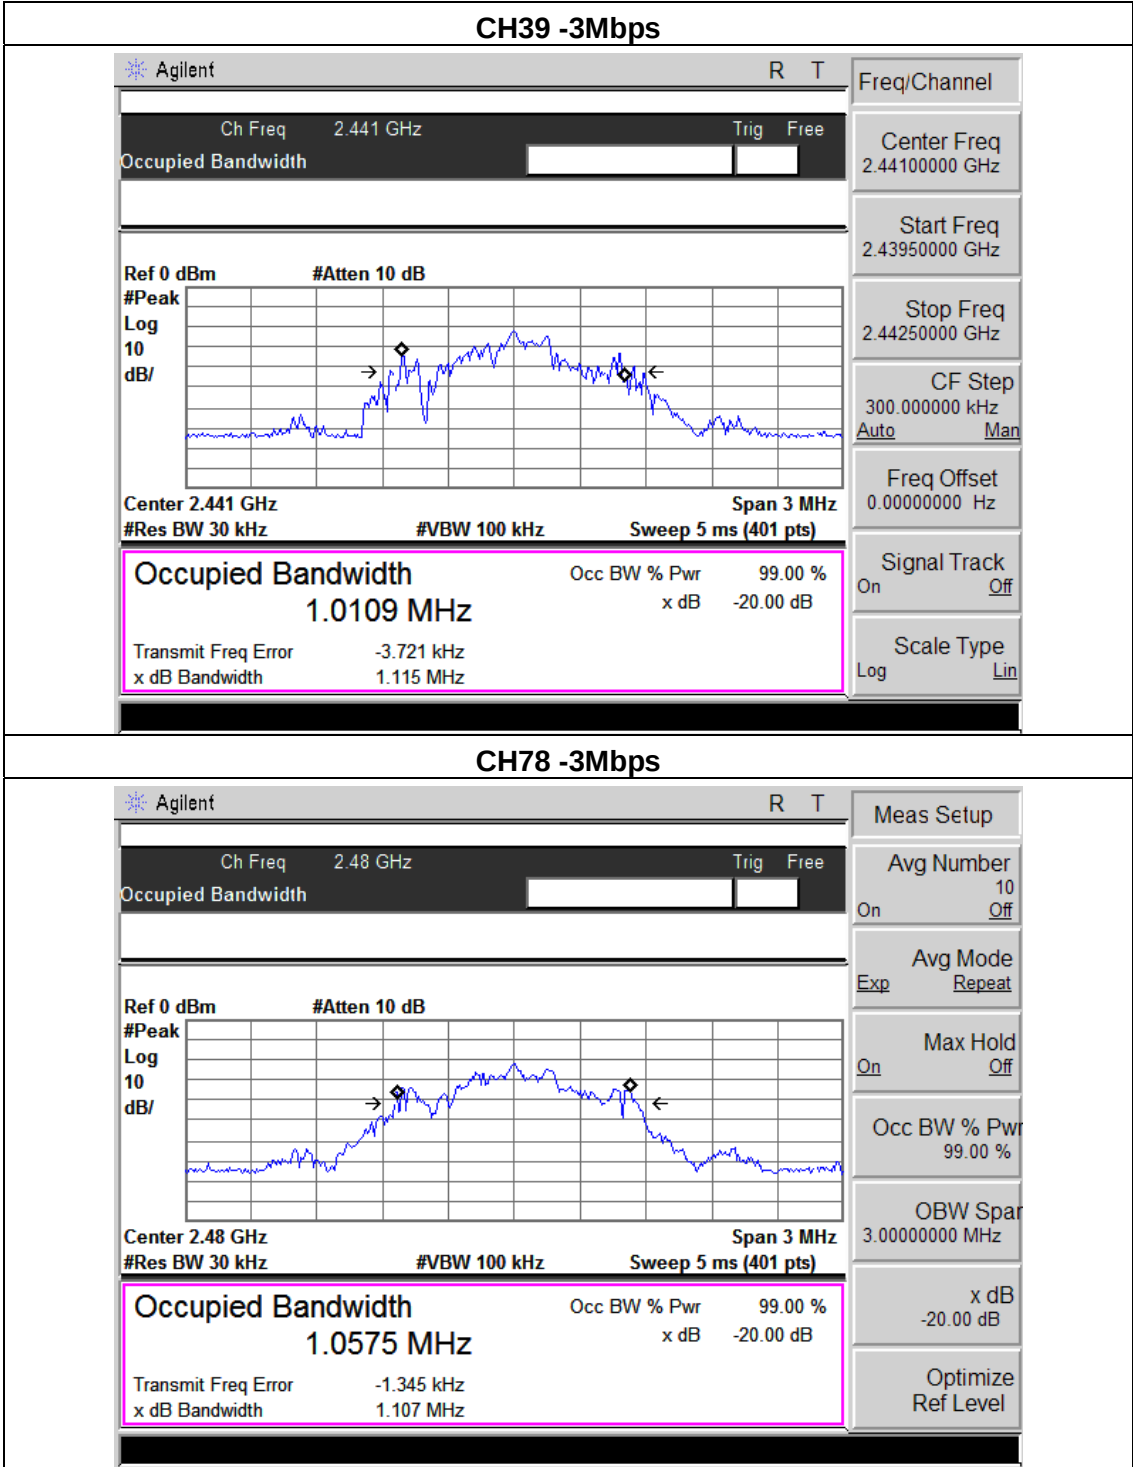

## 8. PEAK OUTPUT POWER TEST

### 8.1 APPLIED PROCEDURES / LIMIT

| FCC Part15 (15.247) , Subpart C |                   |                     |                       |        |
|---------------------------------|-------------------|---------------------|-----------------------|--------|
| Section                         | Test Item         | Limit               | Frequency Range (MHz) | Result |
| 15.247 (b)(i)                   | Peak Output Power | 0.125 w or 20.96dBm | 2400-2483.5           | PASS   |

#### 8.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting : RBW > the 20 dB bandwidth of the emission being measured
  - Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
  - VBW ≥ RBW
  - Sweep = auto
  - Detector function = peak
  - Trace = max hold

#### 8.1.2 DEVIATION FROM STANDARD

No deviation.

#### 8.1.3 TEST SETUP




#### 8.1.4 EUT OPERATION CONDITIONS



The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


8.1.5 TEST RESULTS



|               |                                     |                     |         |
|---------------|-------------------------------------|---------------------|---------|
| EUT :         | SMART PICO PROJECTOR                | Model Name :        | CB-100  |
| Temperature : | 25 °C                               | Relative Humidity : | 60%     |
| Pressure :    | 1012 hPa                            | Test Voltage :      | AC 120V |
| Test Mode :   | CH00/ CH39 /CH78 (1M/2M/3Mbps Mode) |                     |         |


| 1Mbps        |                 |                         |             |
|--------------|-----------------|-------------------------|-------------|
| Test Channel | Frequency (MHz) | Peak Output Power (dBm) | LIMIT (dBm) |
| CH00         | 2402            | 0.254                   | 20.96       |
| CH39         | 2441            | 0.435                   | 20.96       |
| CH78         | 2480            | 0.285                   | 20.96       |
| 2Mbps        |                 |                         |             |
| CH00         | 2402            | -0.393                  | 20.96       |
| CH39         | 2441            | -0.135                  | 20.96       |
| CH78         | 2480            | -0.736                  | 20.96       |
| 3Mbps        |                 |                         |             |
| CH00         | 2402            | -0.415                  | 20.96       |
| CH39         | 2441            | -0.363                  | 20.96       |
| CH78         | 2480            | -0.591                  | 20.96       |


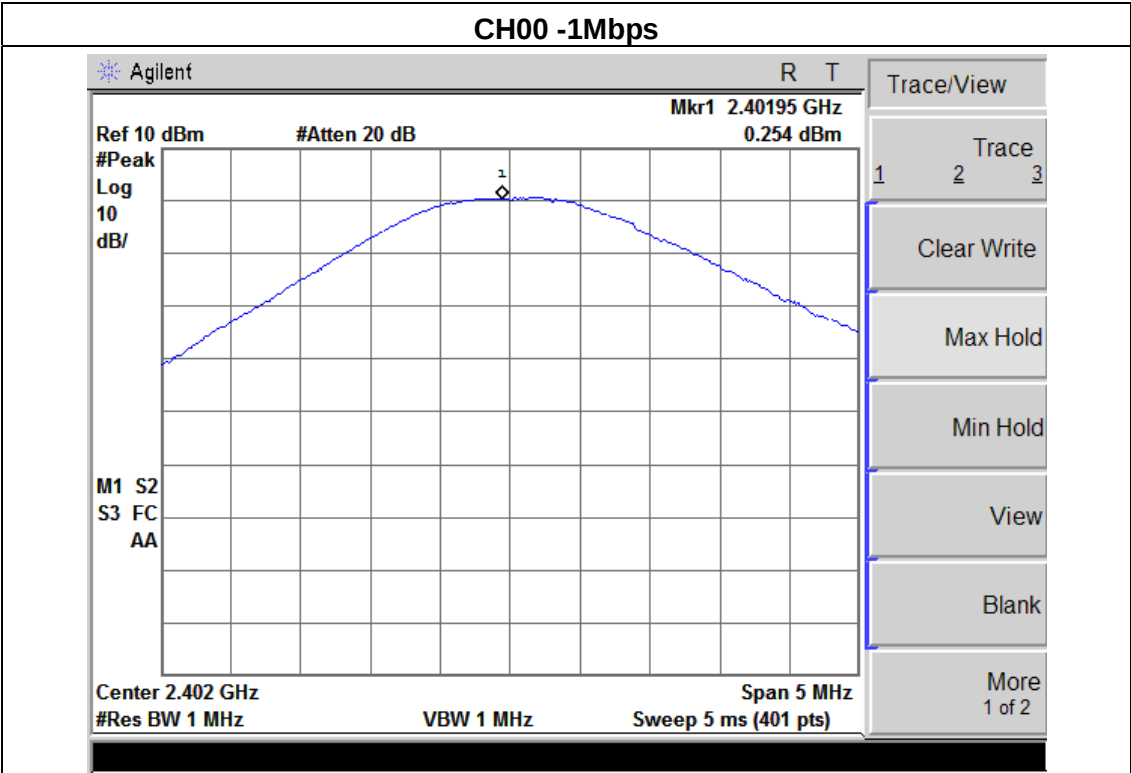


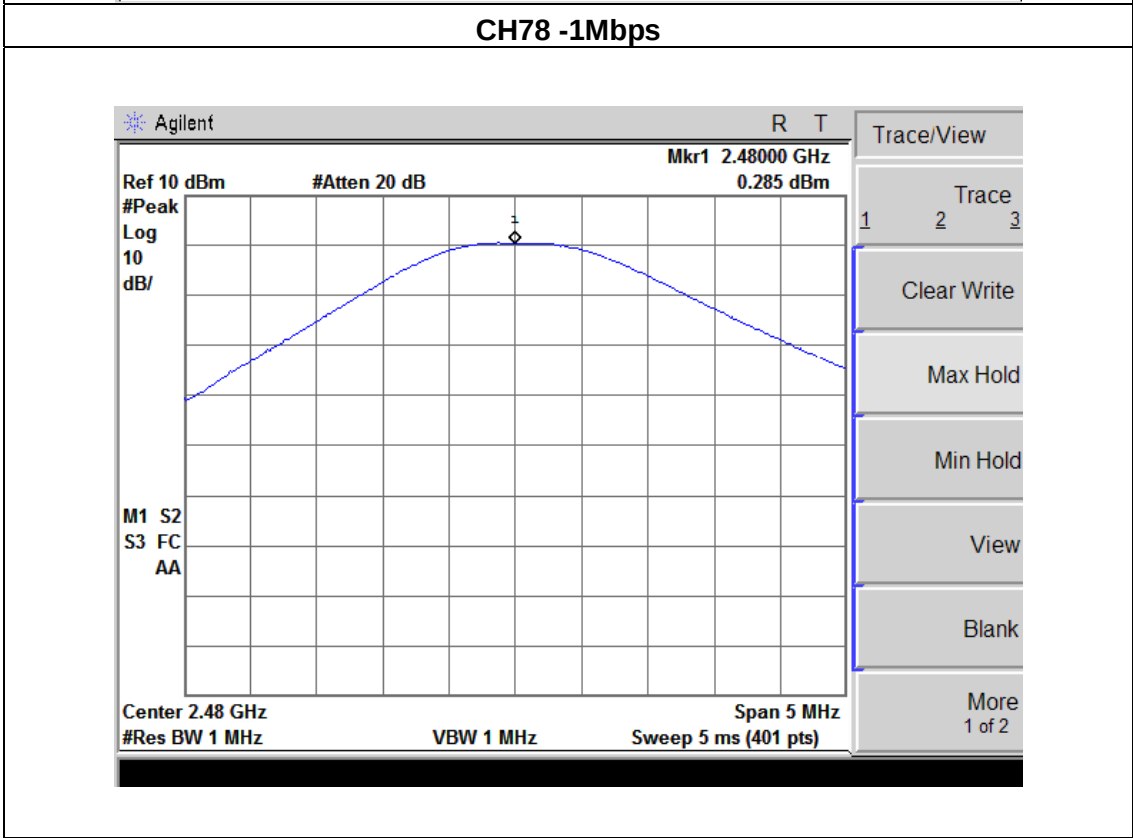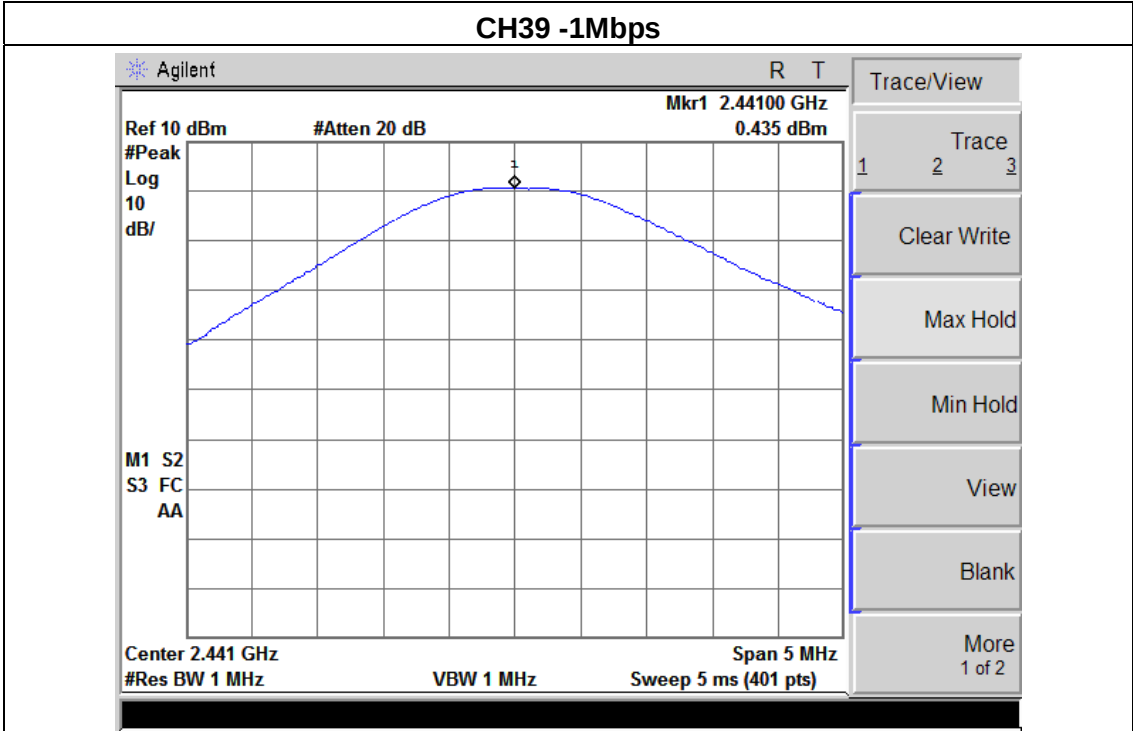

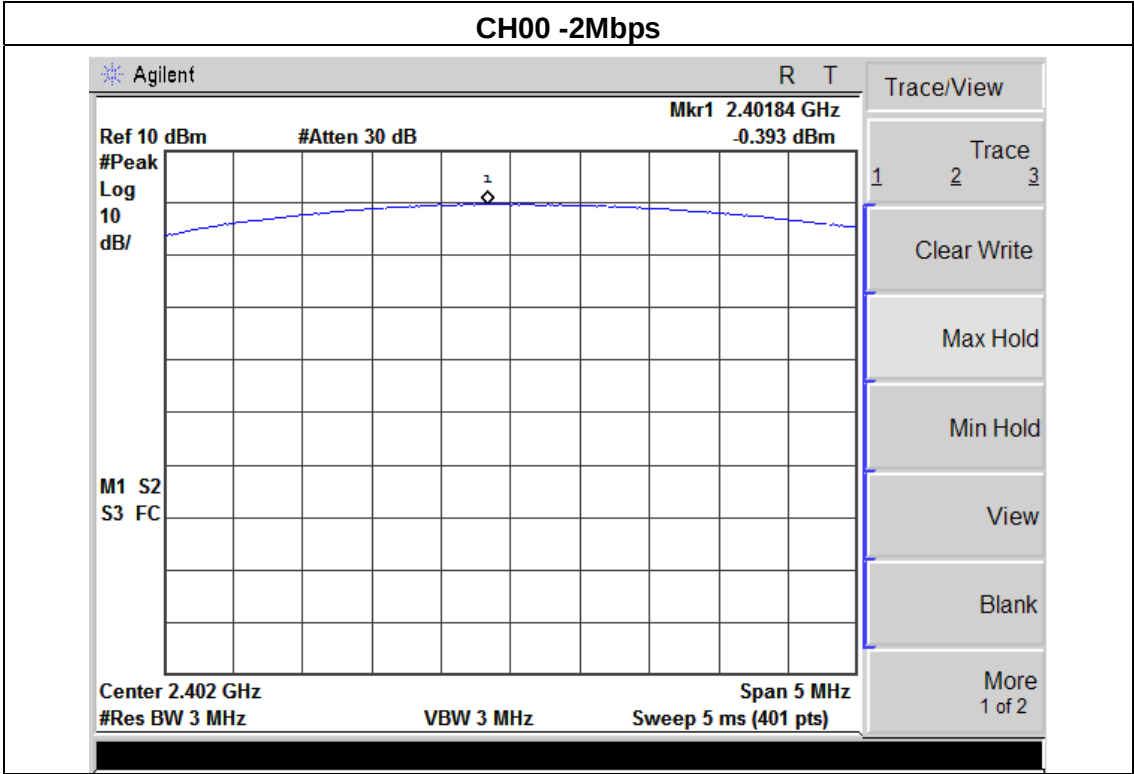

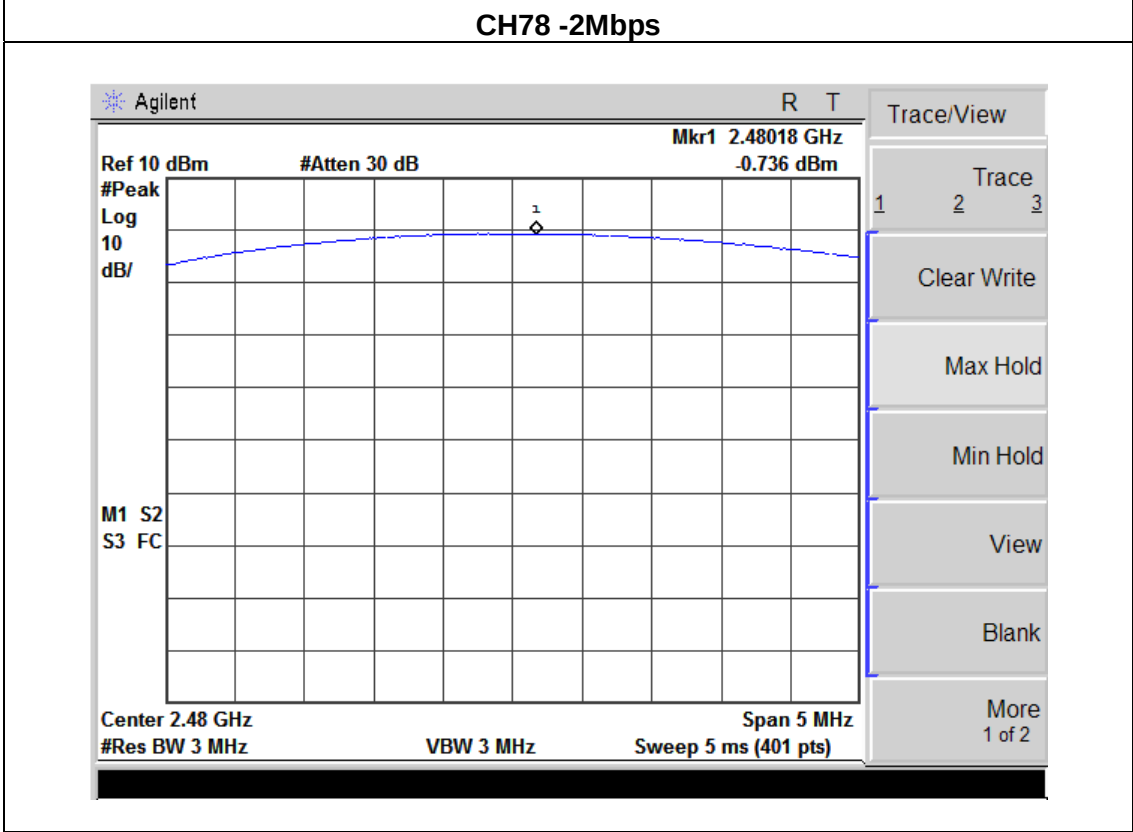
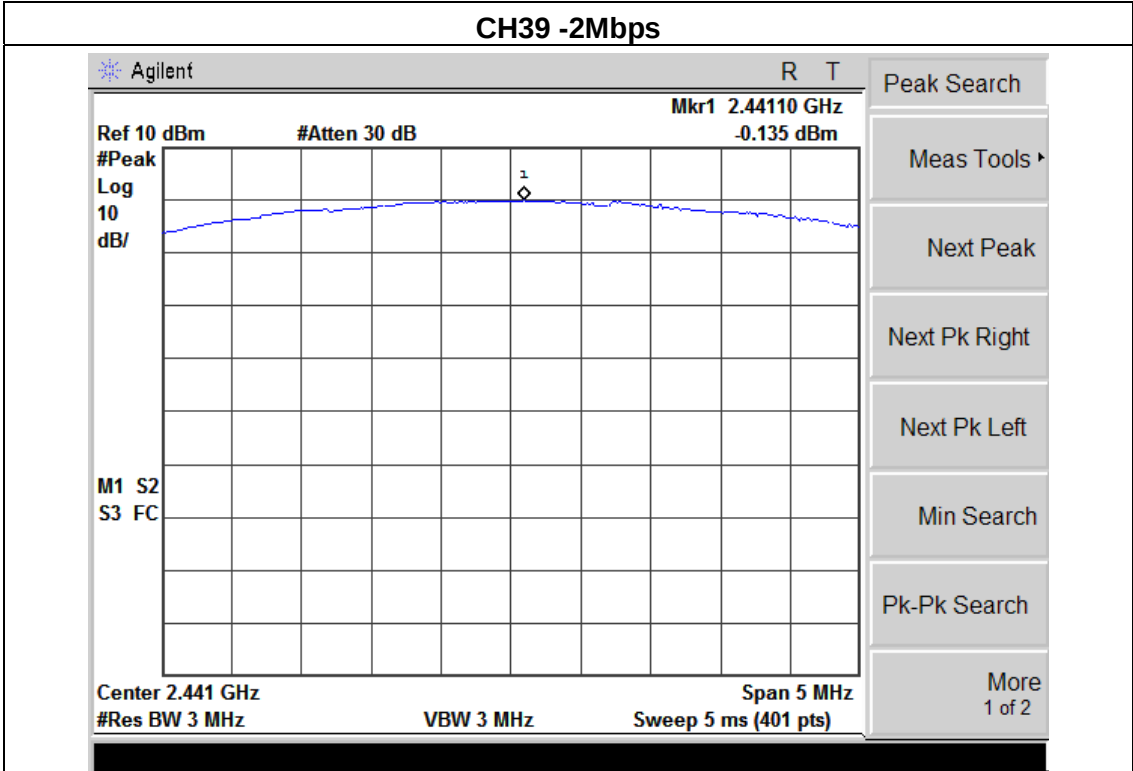


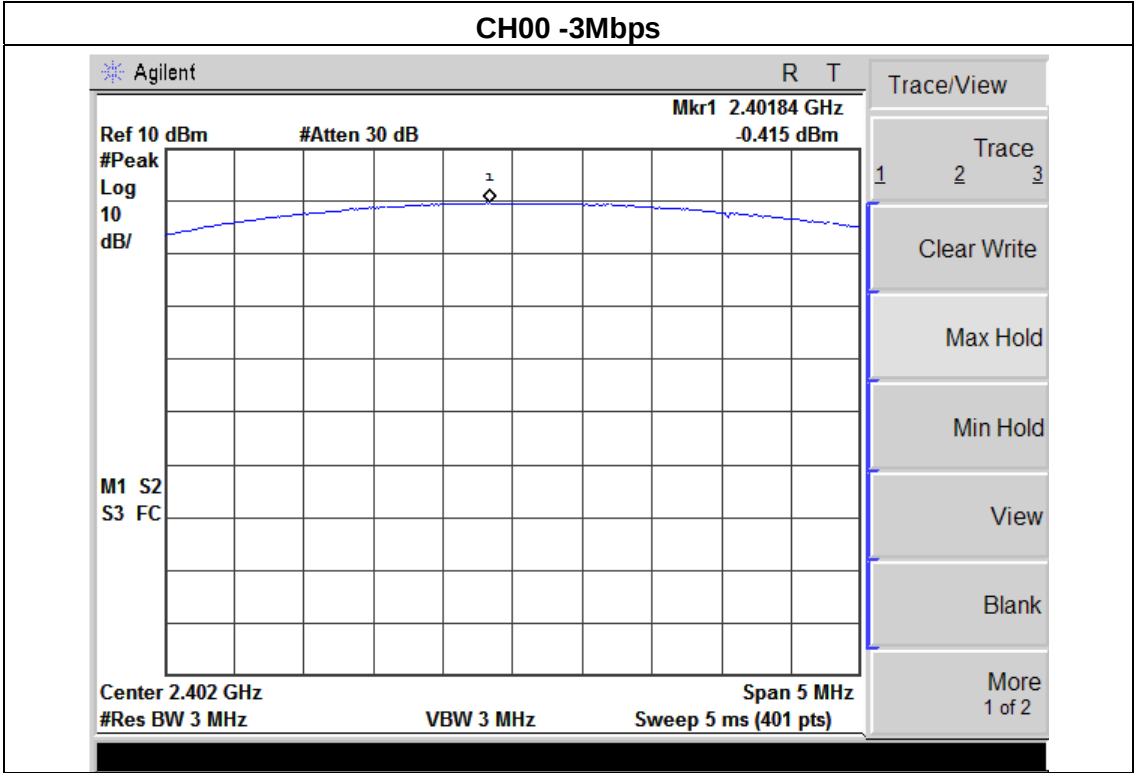

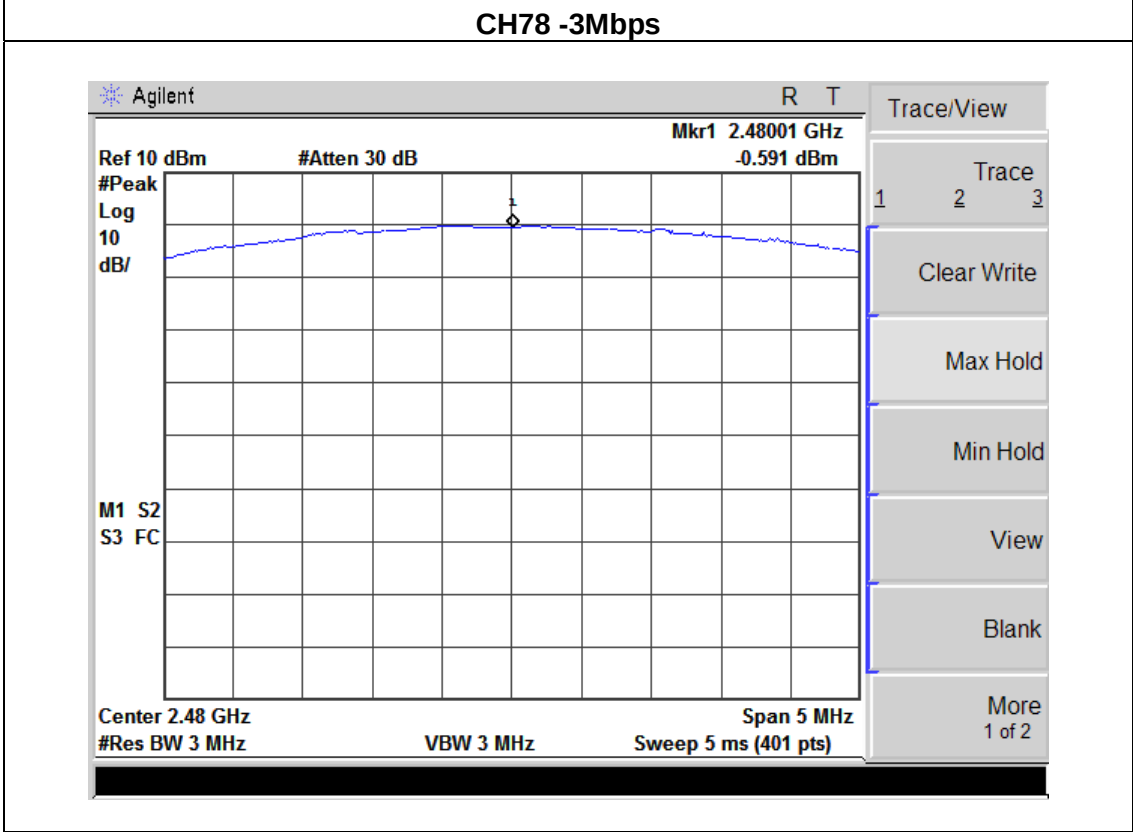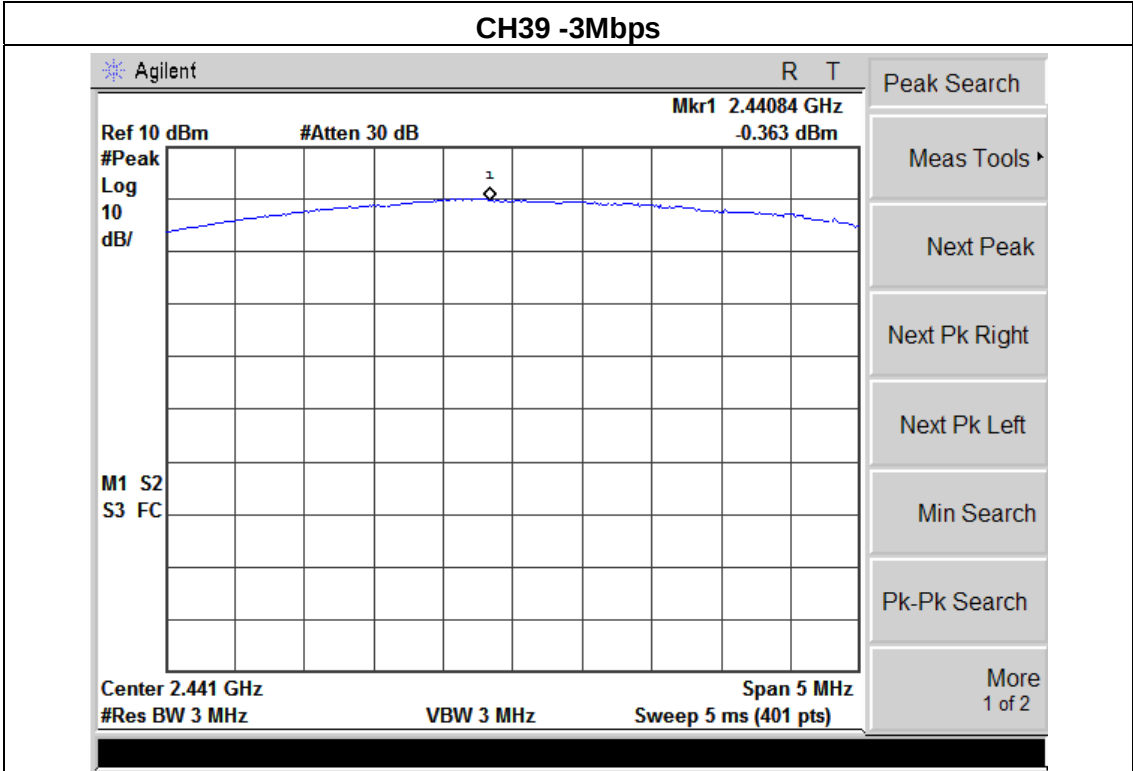

## 9. EUT TEST PHOTO

### Radiated Measurement Photos

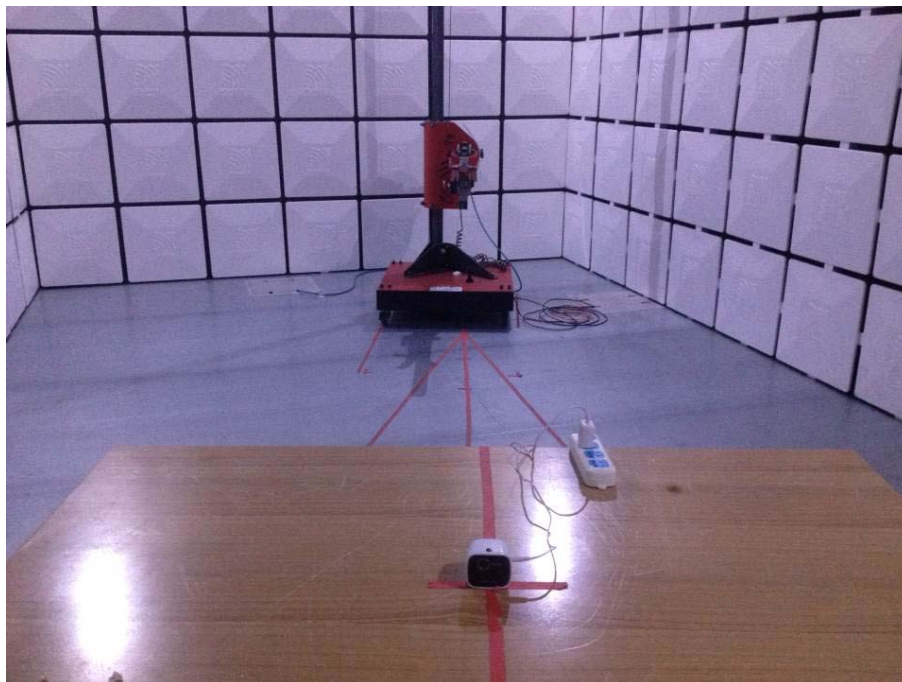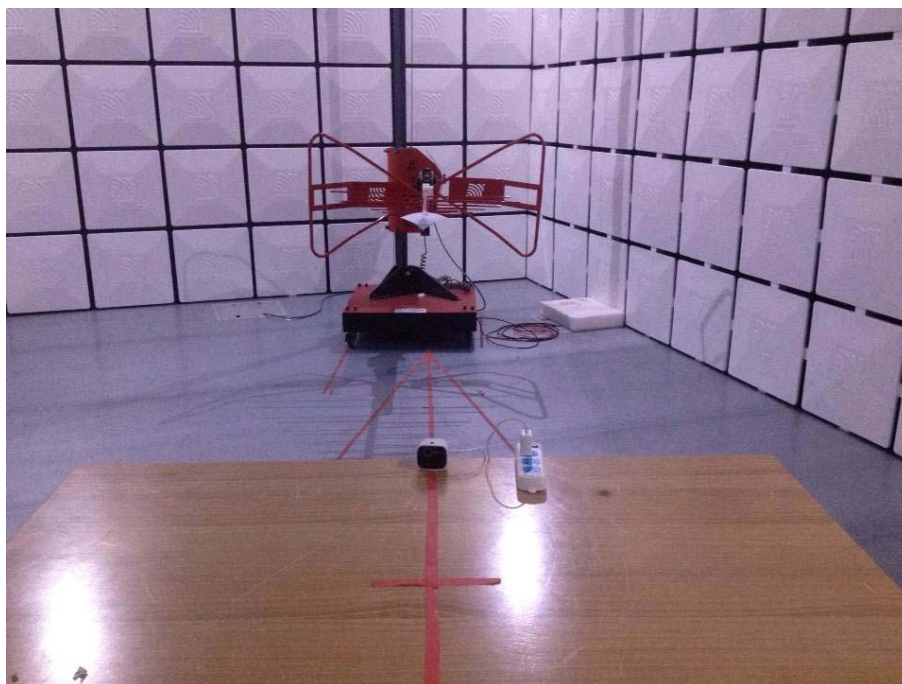

### CONDUCTED EMISSION Photos

