

FCC

EMC

TEST REPORT

ISSUED BY
Shenzhen BALUN Technology Co., Ltd.




FOR
Tablet PC

ISSUED TO
MobyMax, LLC

13144 Brushwood Way, Potomac, Maryland



Prepared by:

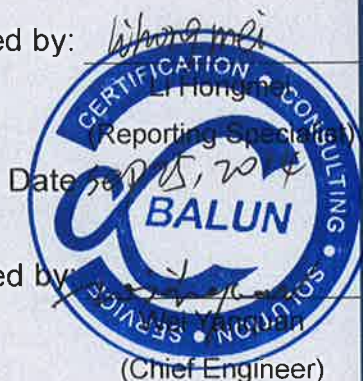

Date

Approved by:

(Chief Engineer)

Date Sep 25, 2014

Report No.: BL-SZ1480117-401

EUT Type: Tablet PC

Model Name: M700, M701, M702, M703, M704, M705
M706, M707, M708, M709, M710

Brand Name: MobyMax

Test Standard: 47 CFR Part 15 Subpart B

FCC ID: 2AC56-MBY700

Test conclusion: PASS

Test Date: Aug 25, 2014 ~ Sep 4, 2014

Date of Issue: Sep 25, 2014

NOTE: This test report can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. BALUN Laboratory. Any objections should be raised within thirty days from the date of issue. To validate the report, please visit BALUN website.

Revision History

Version	Issue Date	Revisions
<u>Rev. 01</u>	<u>Sep 25, 2014</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	GENERAL INFORMATION	4
1.1	Identification of the Testing Laboratory	4
1.2	Identification of the Responsible Testing Location	4
1.3	Test Environment Condition	4
1.4	Announce	5
2	PRODUCT INFORMATION	6
2.1	Applicant	6
2.2	Manufacturer	6
2.3	General Description for Equipment under Test (EUT)	6
2.4	Ancillary Equipment	7
3	SUMMARY OF TEST RESULTS	8
3.1	Test Standards	8
3.2	Verdict	8
3.3	Test Uncertainty	8
4	GENERAL TEST CONFIGURATIONS	9
4.1	Test Environments	9
4.2	Test Equipment List	9
4.3	Test Enclosure list	10
4.4	Test Configurations	10
4.5	Test Setups	11
4.6	Test Conditions	13
5	TEST ITEMS	14
5.1	Emission Tests	14
ANNEX A	TEST RESULTS	16
A.1	Radiated Emission	16
A.2	Conducted Emission	20

ANNEX B	TEST SETUP PHOTOS	22
B.1	Radiated Field Strength Measurement	22
B.2	Conducted Emission	23
ANNEX C	EUT PHOTOS	24
C.1	Appearance of the EUT	24
C.2	Inside of the EUT	28

1 GENERAL INFORMATION

1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6683 3402
Fax Number	+86 755 6182 4271

1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 11524A-1. The laboratory has been listed by US Federal Communications Commission to perform electromagnetic emission measurements. The recognition numbers of test site are 832625. The laboratory has met the requirements of the IAS Accreditation Criteria for Testing Laboratories (AC89), has demonstrated compliance with ISO/IEC Standard 17025:2005. The accreditation certificate number is TL-588. The laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L6791.
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055.

1.3 Test Environment Condition

Ambient Temperature	15 to 35°C
Ambient Relative Humidity	30 to 60%
Ambient Pressure	86 to 106 kPa

1.4 Announce

- (1) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (2) The test report is invalid if there is any evidence and/or falsification.
- (3) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (4) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.
- (5) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.

2 PRODUCT INFORMATION

2.1 Applicant

Applicant	MobyMax, LLC
Address	13144 Brushwood Way. Potomac, Maryland

2.2 Manufacturer

Manufacturer	MobyMax, LLC
Address	13144 Brushwood Way. Potomac, Maryland

2.3 General Description for Equipment under Test (EUT)

EUT Type	Tablet PC
Brand Name	MobyMax
The Under Test Model Name	M700
Series Model Name	M700, M701, M702, M703, M704, M705, M706, M707, M708, M709, M710
Description of Model name differentiation	The equipment model M700 and M701, M702, M703, M704, M705, M706, M707, M708, M709, M710 are Tablet PC, the electrical parameters and internal structure of circuit are same, only the model is different.
Hardware Version	AK42-V1.2
Software Version	Android4.2
Network and Wireless connectivity	WIFI 802.11b, 802.11g and 802.11n (HT20/40)
About the Product	The equipment is Tablet PC, it contains WIFI Modules operating at 2.4GHz ISM band.

Note: The above EUT information in section 2.3 was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

2.4 Ancillary Equipment

Ancillary Equipment 1	Battery	
	Brand Name	N/A
	Model No	N/A
	Capacitance	3000mAh
	Rated Voltage	3.7V
	Extreme Voltage	Low: 3.5V / High:4.2V
Ancillary Equipment 2	AC Adapter	
	Brand Name	N/A
	Model	ASSA1A-050200
	Rated Input	~ 100-240V, 0.45A, 50/60Hz
	Rated Output	= 5.0V, 2.0A
Ancillary Equipment 3	USB Data Cable(with Core and Shielding)	

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	FCC 47 CFR Part 15 Subpart B (10-1-09 Edition)	Unintentional Radiators
2	ANSI C63.4-2009	American National Standard for Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

3.2 Verdict

No.	Description	FCC Rule	Test Verdict	Result
1	Radiated Emission	15.109	PASS	Annex A .1
2	Conducted Emission, AC Ports	15.107	PASS	Annex A .2

3.3 Test Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Value
Conducted emissions (9KHz-30MHz)	1.12 dB
Radiated emissions (30MHz-1GHz)	2.11 dB
Radiated emissions (1GHz-18GHz)	3.31 dB

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

Environment Parameter	Selected Values During Tests		
	Temperature	Voltage	Relative Humidity
Normal Temperature, Normal Voltage (NTNV)	23°C~25°C	AC 120V/60Hz	50%-55%

4.2 Test Equipment List

Radiated Emission Test						
Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due	Use
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2014.07.07	2015.07.06	☒
Test Antenna- Loop(9kHz- 30MHz)	SCHWARZBECK	FMZB 1519	1519-037	2013.07.02	2015.07.01	☐
Test Antenna- Bi-Log(30MHz -3GHz)	SCHWARZBECK	VULB 9163	9163-624	2013.07.03	2015.07.02	☒
Test Antenna- Horn(1- 18GHz)	SCHWARZBECK	BBHA 9120D	9120D-1148	2013.07.02	2015.07.01	☒
Test Antenna- Horn(15- 26.5GHz)	SCHWARZBECK	BBHA 9170	9170-305	2013.07.02	2015.07.01	☐
Anechoic Chamber	RAINFORD	9m*6m*6 m	N/A	2013.10.07	2014.10.06	☒

Conducted disturbance Test						
Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due	Use
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2014.07.07	2015.07.06	☒
LISN	SCHWARZBECK	NSLK 8127	8127-687	2014.07.07	2015.07.06	☒
AMN	SCHWARZBECK	NNBM812 4	8124-509	2014.07.07	2015.07.06	☐
AMN	SCHWARZBECK	NNBM812 4	8124-510	2014.07.07	2015.07.06	☐
ISN	TESEQ	ISN T800	34449	2014.07.07	2015.07.06	☐

4.3 Test Enclosure list


Description	Manufacturer	Model	Serial No.	Length	Description	Use
PC	N/A	N/A	N/A	N/A	Special Handled	☐
Printer	HP	DESKJET 1000	N/A	N/A	N/A	☐
Keyboard	Logitech	Y-BP62a	N/A	N/A	N/A	☐
Mouse	Logitech	M100	N/A	N/A	N/A	☐
USB disk	Kingston	N/A	N/A	N/A	N/A	☐
USB Cable	N/A	N/A	N/A	N/A	N/A	☐
TF Card	Kingston	N/A	N/A	N/A	N/A	☐
VGA Cable	N/A	N/A	N/A	1.5m	Shielded with core	☐
HDMI Cable	N/A	N/A	N/A	1.5m	Shielded with core	☐
DVI Cable	N/A	N/A	N/A	1.5m	Shielded with core	☐
Coaxial video cable	N/A	N/A	N/A	2m	Shielded with core	☐
Phone	BBK	HCD007TSD	N/A	N/A	N/A	☐
laptop	LENOVO	K29	N/A	N/A	N/A	☒

4.4 Test Configurations

Test Configurations (TC) No.	Description
TC01	<u>The USB Test mode</u> The EUT configuration of the emission tests EUT +AC Adapter + laptop + USB Data Cable. During the measurement, the EUT and the laptop is connected via a USB data cable. During the measurement, the data is transmitting between the laptop and the EUT.
TC02	<u>The Play Test mode</u> The EUT configuration of the emission tests is EUT + AC Adapter. During the measurement, the EUT working as a player and charged by AC power.
TC03	<u>The Charger Test mode</u> The EUT configuration of the emission tests is EUT + AC Adapter. During the measurement, the EUT is only charged by AC power and there is no function is working.


4.5 Test Setups

Test Setup 1

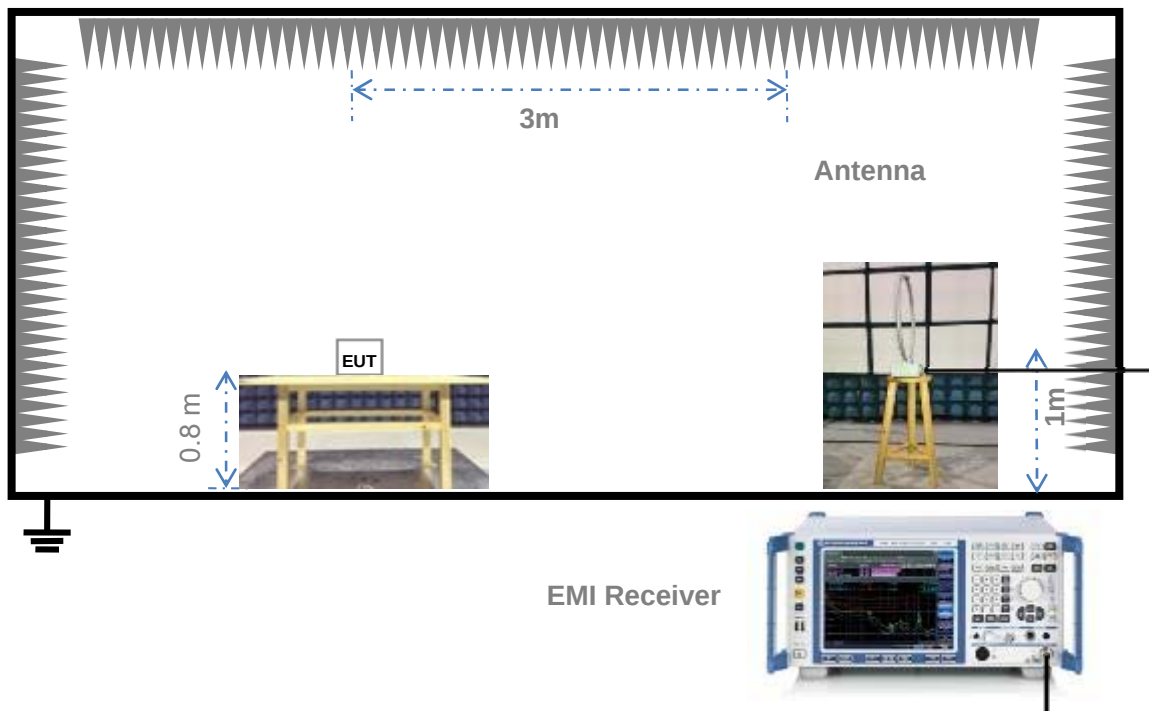


For Radiated Emission Test (Below 30MHz)

Test Setup 2

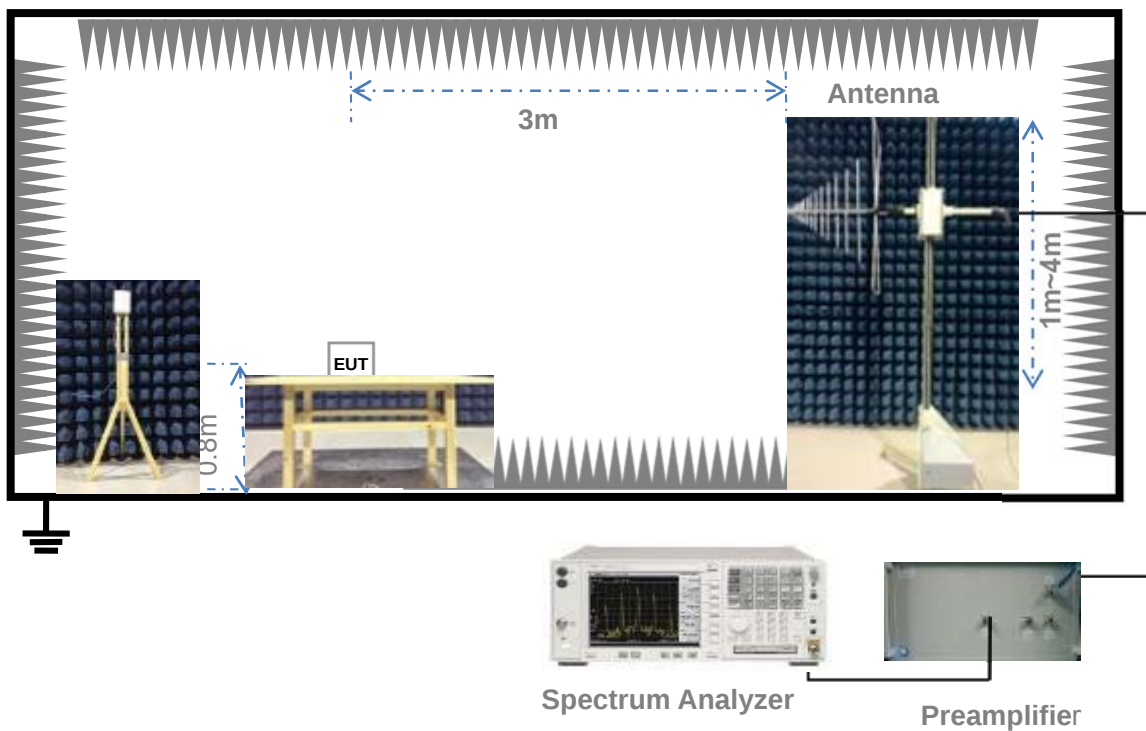


(For Radiated Emission Test (30MHz-1GHz))

Test Setup 3

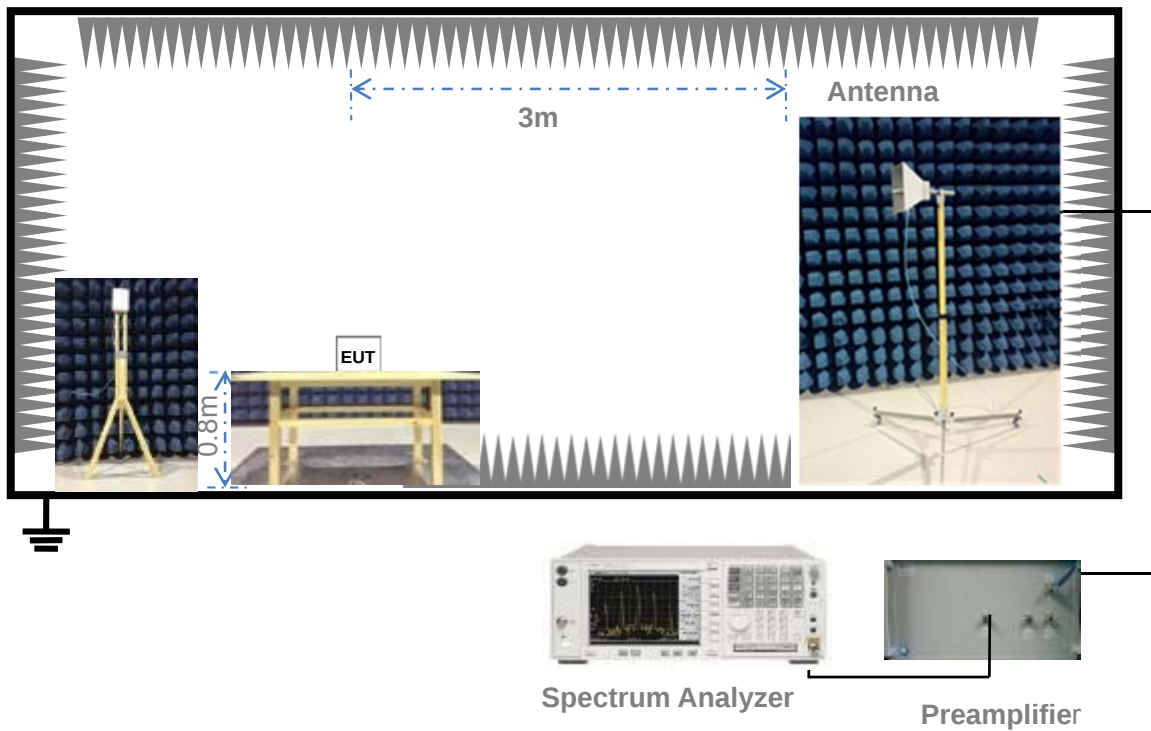

(For Radiated Emission Test (above 1GHz))

Test Setup 4

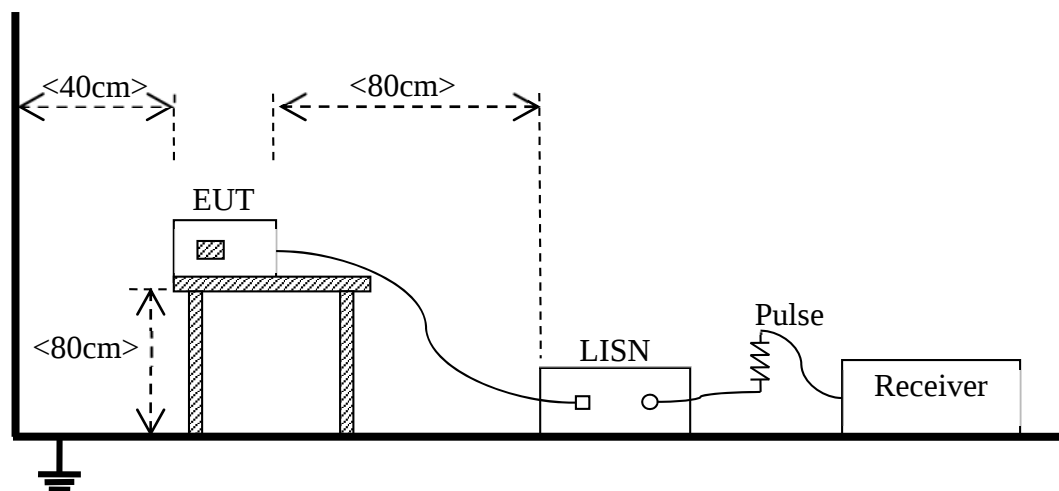

(For Conducted Emission, AC Ports Test)

4.6 Test Conditions

Test Case	Test Conditions	
Radiated Emission	Test Env.	NTNV
	Test Setup	Test Setup 1
	Test Configuration	TC01~TC03 ^{Note}
Conducted Emission, AC Ports	Test Env.	NTNV
	Test Setup	Test Setup 2
	Test Configuration	TC01~TC03 ^{Note}

Note: Based on client request, all normal using modes of the normal function were tested but only the worst test data of the worst mode is reported by this report.

5 TEST ITEMS

5.1 Emission Tests

5.1.1 Radiated Emission

5.1.1.1 Limit

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

NOTE:

- 1) Field Strength (dB $\mu\text{V/m}$) = $20 \cdot \log [\text{Field Strength } (\mu\text{V/m})]$.
- 2) In the emission tables above, the tighter limit applies at the band edges.
- 3) For above 1000MHz, limit field strength of harmonics: 54dB $\mu\text{V/m}$ @3m (AV) and 74dB $\mu\text{V/m}$ @3m (PK)

5.1.1.2 Test Procedure

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

An initial pre-scan was performed in the chamber using the EMI Receiver in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by Bi-Log antenna with 2 orthogonal polarities.

5.1.2 Conducted Emission

5.1.2.1 Test Limit

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- 1) The limit is applicable to Class B ITE.
- 2) The lower limit shall apply at the band edges.
- 3) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

5.1.2.2 Test Procedure


The EUT is connected to the power mains through a LISN which provides 50 Ω /50 μ H of coupling impedance for the measuring instrument. The test frequency range is from 150 kHz to 30MHz. The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels that are more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed.

ANNEX A TEST RESULTS

A.1 Radiated Emission

Test Data and Plots


A.1.1 Test Antenna Vertical, 30MHz – 1GHz

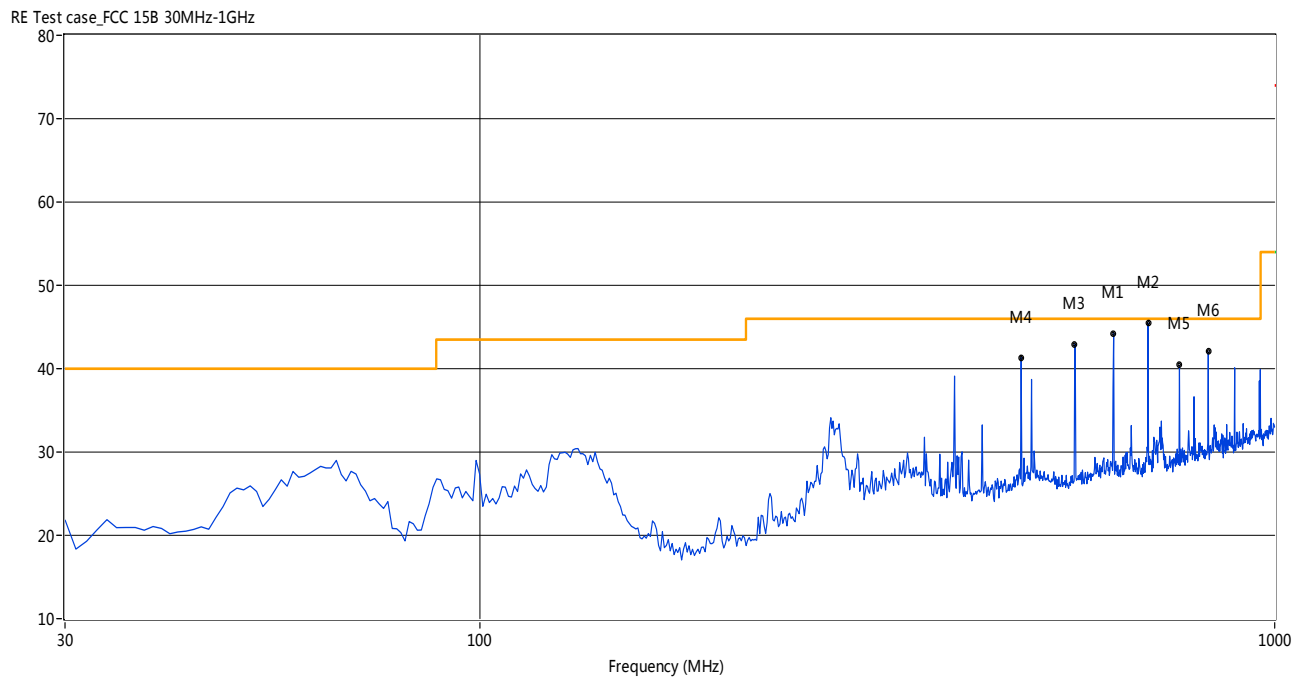

Frequency (MHz)	Peak (dBuV/m)	Q-peak (dBuV/m)	Average (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
626.92	44.22	42.22		-9.79	--	46.0	--	3.78	174.70	100	Vertical	PASS
692.82	45.46	42.46		-9.04	--	46.0	--	3.54	87.50	100	Vertical	PASS
560.06	42.94			-11.26	--	46.0	--	3.06	298.70	100	Vertical	PASS
479.63	41.36			-13.44	--	46.0	--	4.64	37.00	100	Vertical	PASS
758.71	40.41			-7.85	--	46.0	--	5.59	101.10	100	Vertical	PASS
824.61	42.02			-6.46	--	46.0	--	3.98	101.10	100	Vertical	PASS

A.1.2 Test Antenna Vertical, 1GHz – 6GHz


RE Test case_FCC 15B 1GHz-6GHz

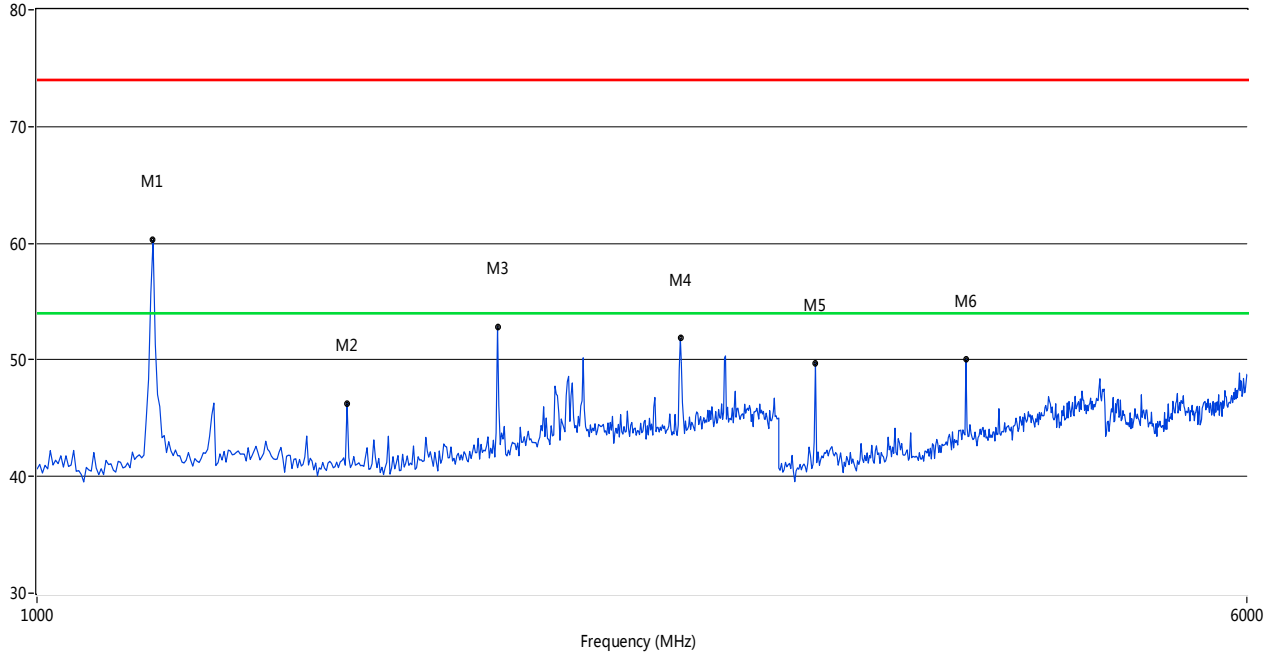

Frequency (MHz)	Peak (dBuV/m)	Q-peak (dBuV/m)	Average (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1187.62	60.26		41.17	-4.54	74.0	--	54.0	12.83	190.20	100	Vertical	PASS
1582.83	46.28			-4.46	74.0	--	54.0	7.72	195.80	100	Vertical	PASS
1978.04	52.86		50.86	-2.70	74.0	--	54.0	3.14	262.90	100	Vertical	PASS
2592.81	51.84		49.84	0.38	74.0	--	54.0	4.16	44.50	100	Vertical	PASS
3167.66	49.73			8.17	74.0	--	54.0	4.27	170.60	100	Vertical	PASS
3958.08	50.08			9.82	74.0	--	54.0	3.92	165.80	100	Vertical	PASS

A.1.3 Test Antenna Horizontal, 30MHz – 1GHz


RE Test case_FCC 15B 30MHz-1GHz

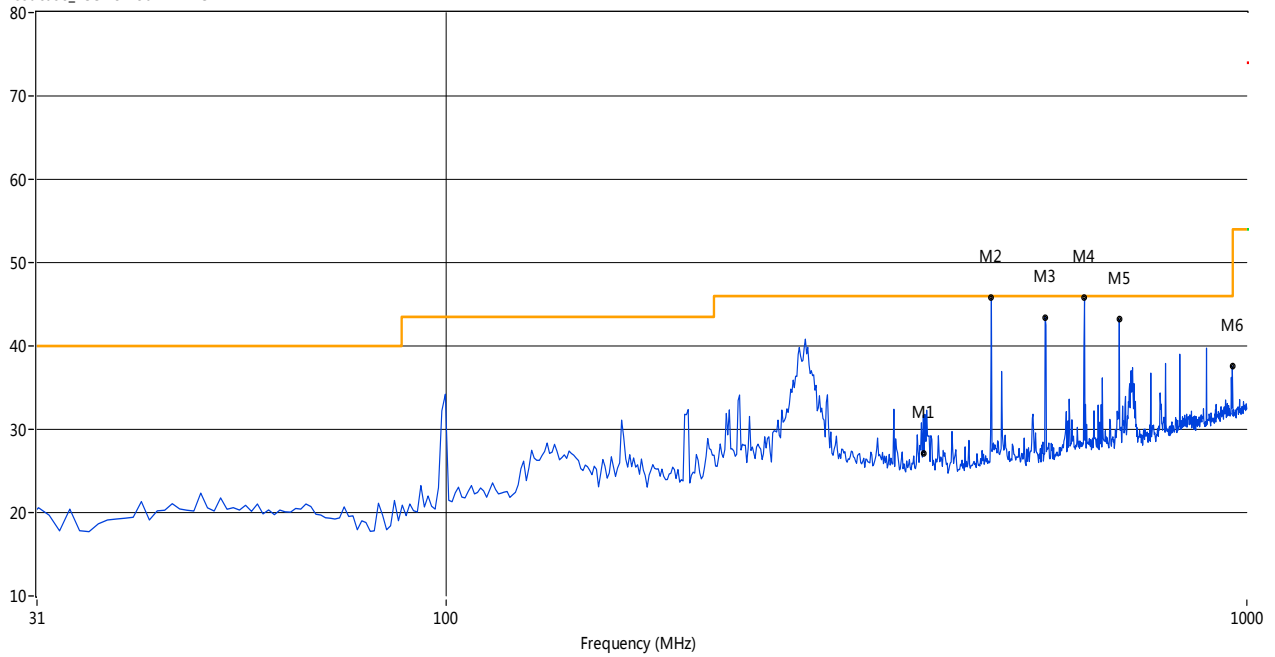

Frequency (MHz)	Peak (dBuV/m)	Q-peak (dBuV/m)	Average (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
394.92	26.41	21.12	--	-14.91	--	46.0	--	24.88	257.50	106.50	Horizontal	PASS
479.63	45.88	42.79		-13.44	--	46.0	--	3.21	302.90	100	Horizontal	PASS
560.06	43.44	42.44		-11.26	--	46.0	--	3.56	134.10	100	Horizontal	PASS
626.92	45.74	42.74		-9.79	--	46.0	--	3.26	154.00	100	Horizontal	PASS
692.82	43.20	42.80		-9.04	--	46.0	--	3.20	51.10	100	Horizontal	PASS
959.80	38.03	41.57	--	-4.42	--	46.0	--	7.97	1.60	102.60	Horizontal	PASS

A.1.4 Test Antenna Horizontal, 1GHz – 6GHz

RE Test case_FCC 15B 1GHz-6GHz

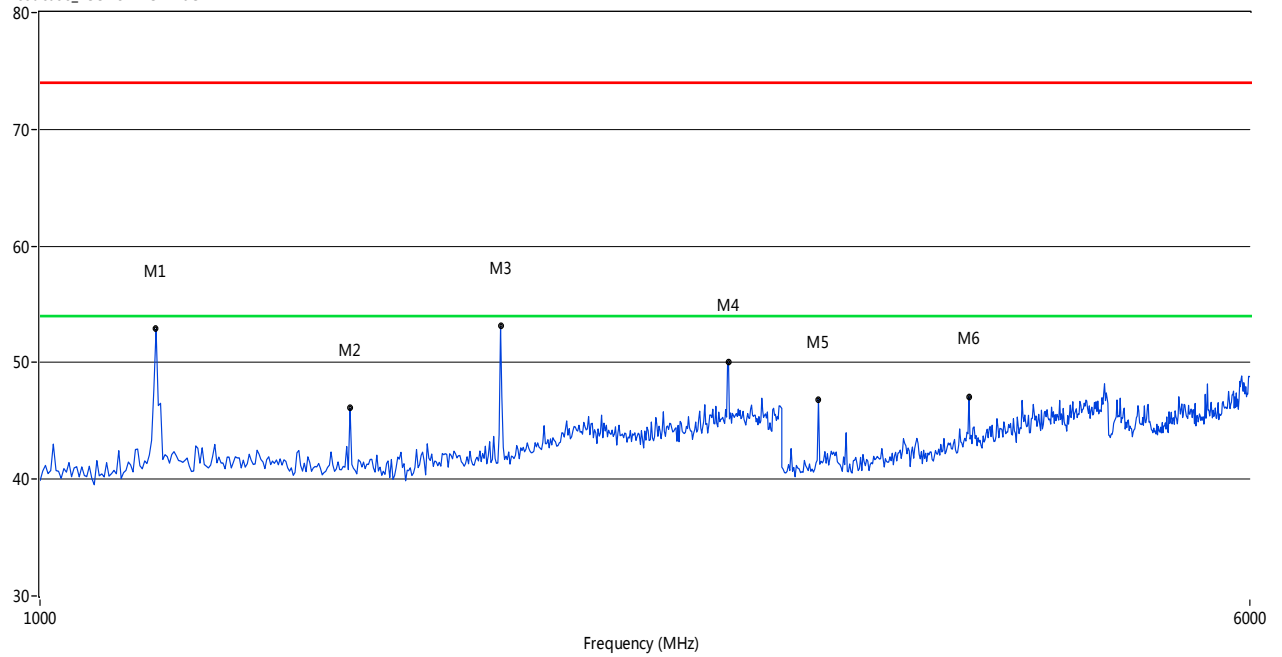


Frequency (MHz)	Peak (dBuV/m)	Q-peak (dBuV/m)	Average (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1187.62	52.89		49.98	-4.54	74.0	--	54.0	4.02	35.70	100	Horizontal	PASS
1582.83	46.08			-4.46	74.0	--	54.0	7.92	163.80	100	Horizontal	PASS
1978.04	53.11		20.80	-2.70	74.0	--	54.0	20.89	108.30	100	Horizontal	PASS
2772.46	50.02			1.92	74.0	--	54.0	3.98	203.10	100	Horizontal	PASS
3167.66	46.85			8.17	74.0	--	54.0	7.15	153.40	100	Horizontal	PASS
3958.08	47.09			9.82	74.0	--	54.0	6.91	131.10	100	Horizontal	PASS


A.2 Conducted Emission

Test Data and Plots

A.2.1 L Phase

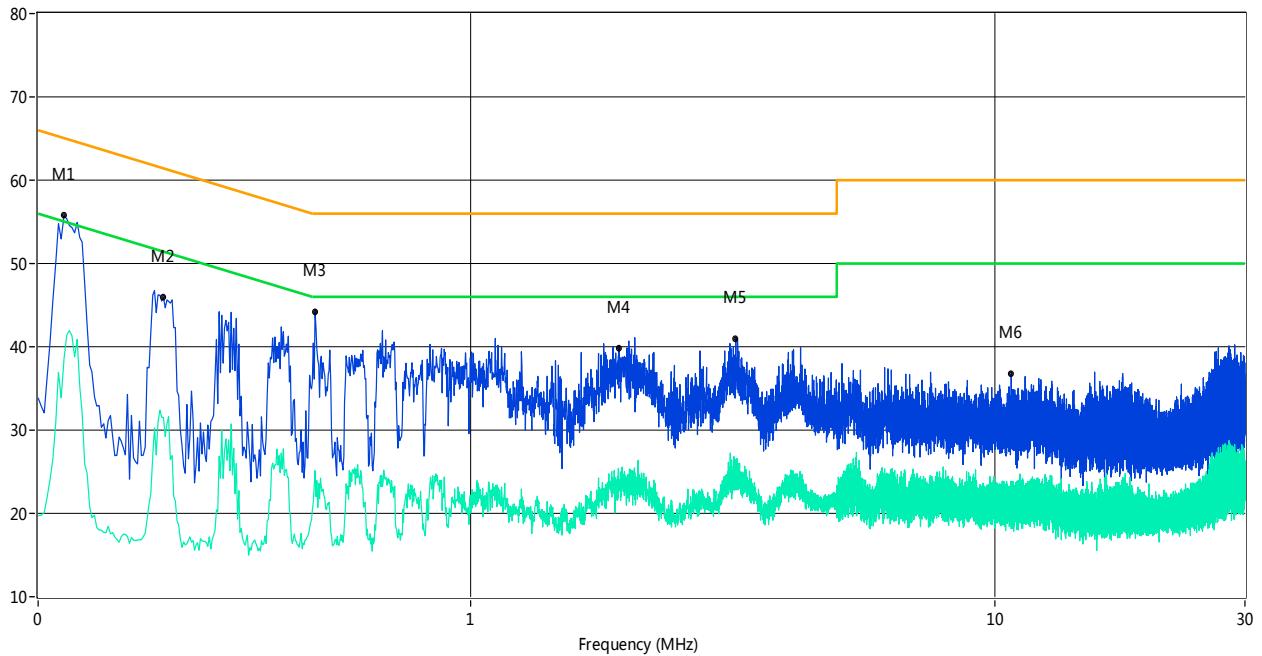


A.2.2 N Phase

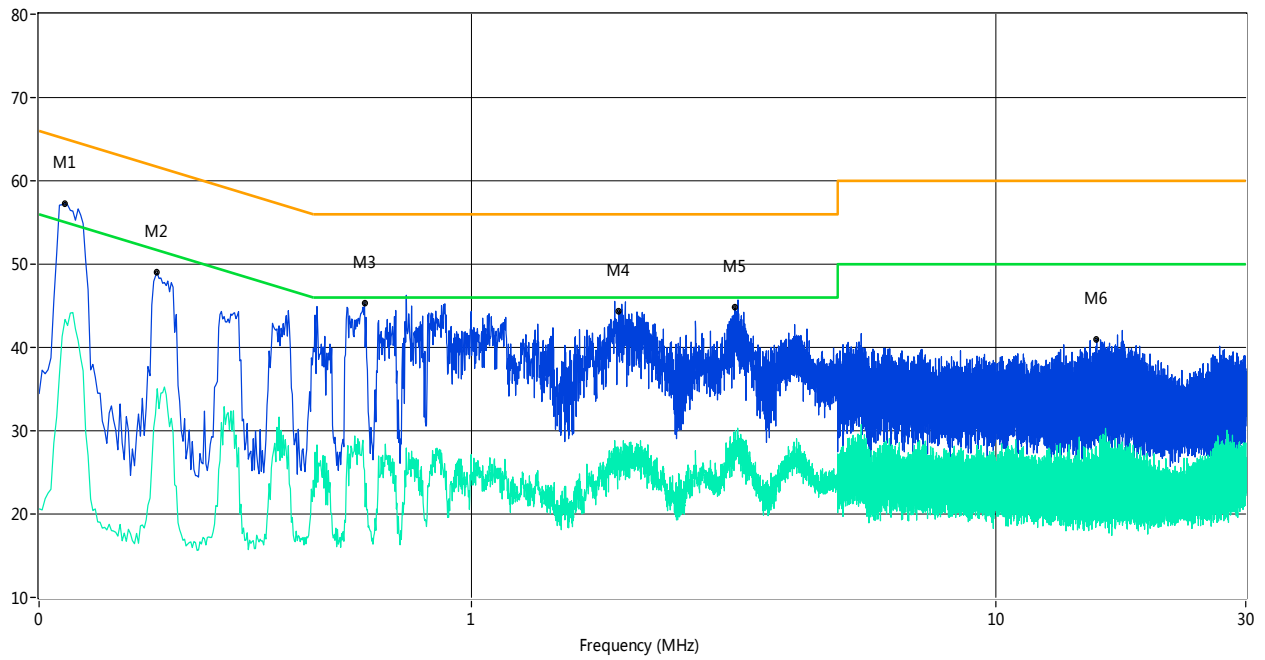


Frequency (MHz)	Peak (dBm)	Q-peak (dBuV)	Average (dBuV)	Factor (dB)	QP Limit (dBuV)	AV Limit (dBuV)	Margin (dB)	Line	Verdict
0.17	57.3	--	43.4	10.00	65.5	55.5	12.10	N Line	PASS
0.25	49.0	--	35.0	10.00	63.1	53.1	18.10	N Line	PASS
0.63	45.3	--	25.3	10.00	56.0	46.0	20.70	N Line	PASS
1.91	44.3	--	27.8	10.00	56.0	46.0	18.20	N Line	PASS
3.18	44.8	--	28.9	10.00	56.0	46.0	17.10	N Line	PASS
15.60	41.0	--	25.7	10.00	60.0	50.0	24.30	N Line	PASS

ANNEX B TEST SETUP PHOTOS

B.1 Radiated Field Strength Measurement

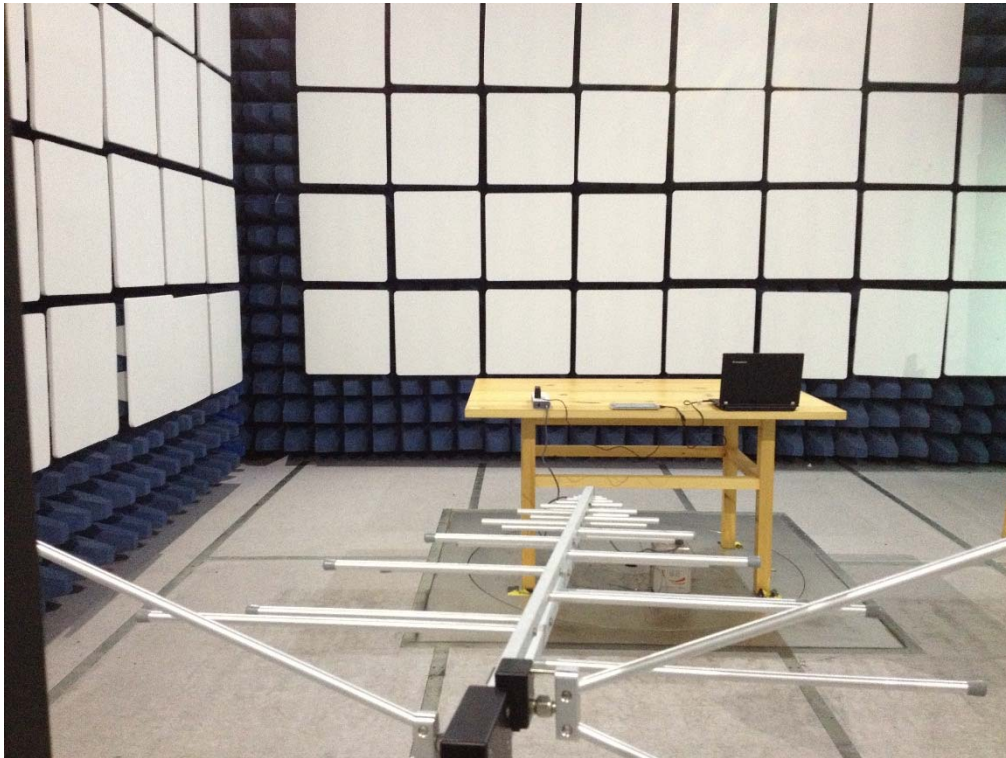

30MHz-1GHz

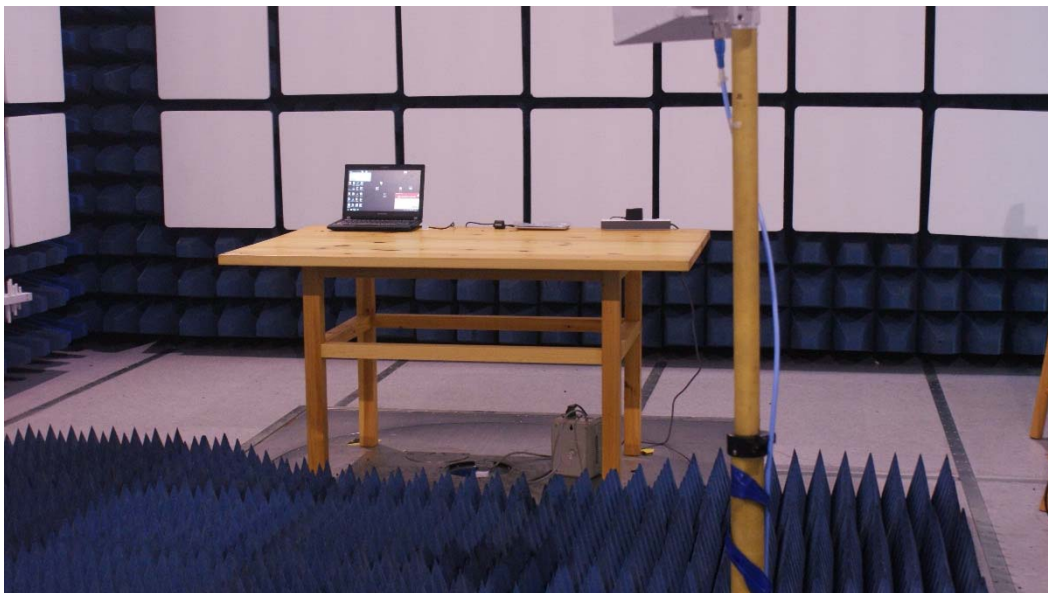

1GHz-6GHz

B.2 Conducted Emission




ANNEX C EUT PHOTOS

C.1 Appearance of the EUT




THE FRONT OF EUT

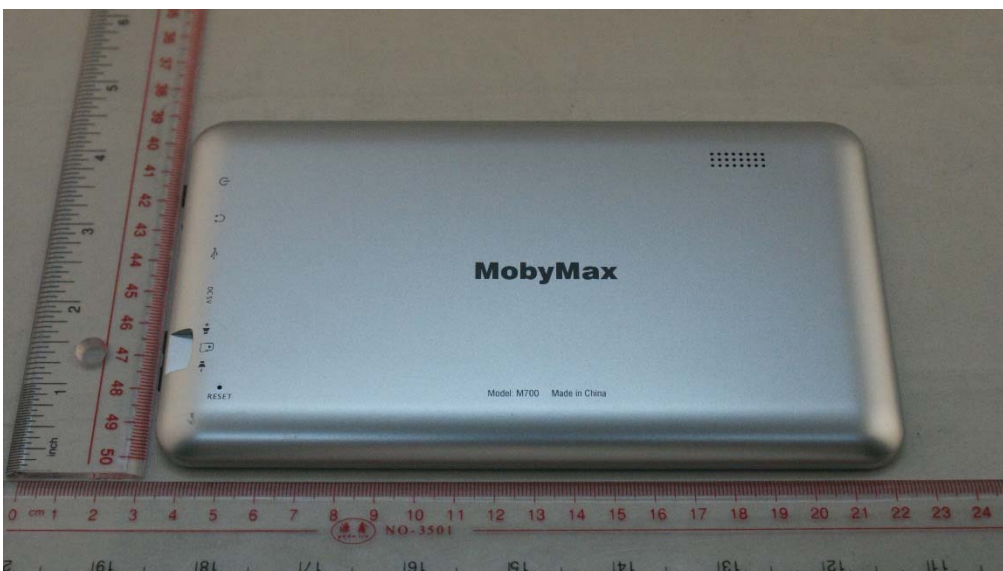

THE BACK OF EUT



THE LEFT OF EUT

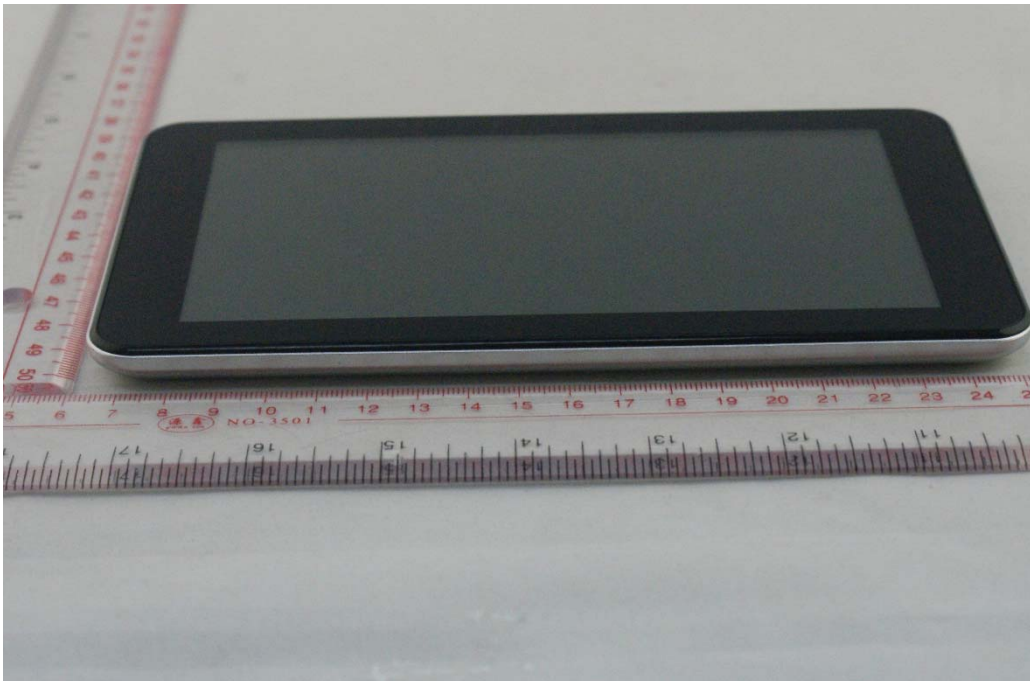

THE RIGHT OF EUT



THE UP OF EUT



THE DOWN OF EUT




CHARGER




THE USB DATA CABLE (WITH SHIELDING AND CIRCULAR)


C.2 Inside of the EUT

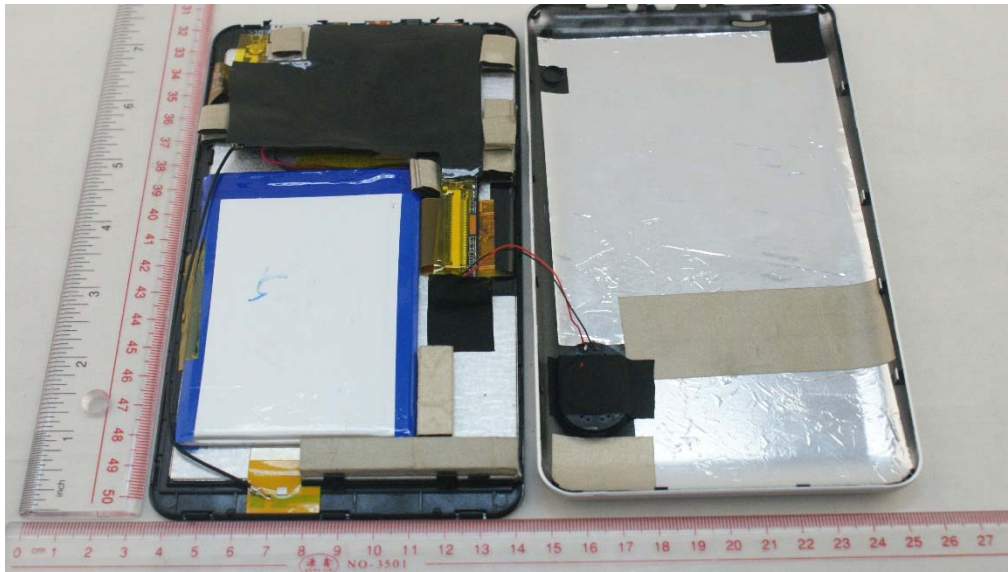


EUT UNCOVER VIEW 1

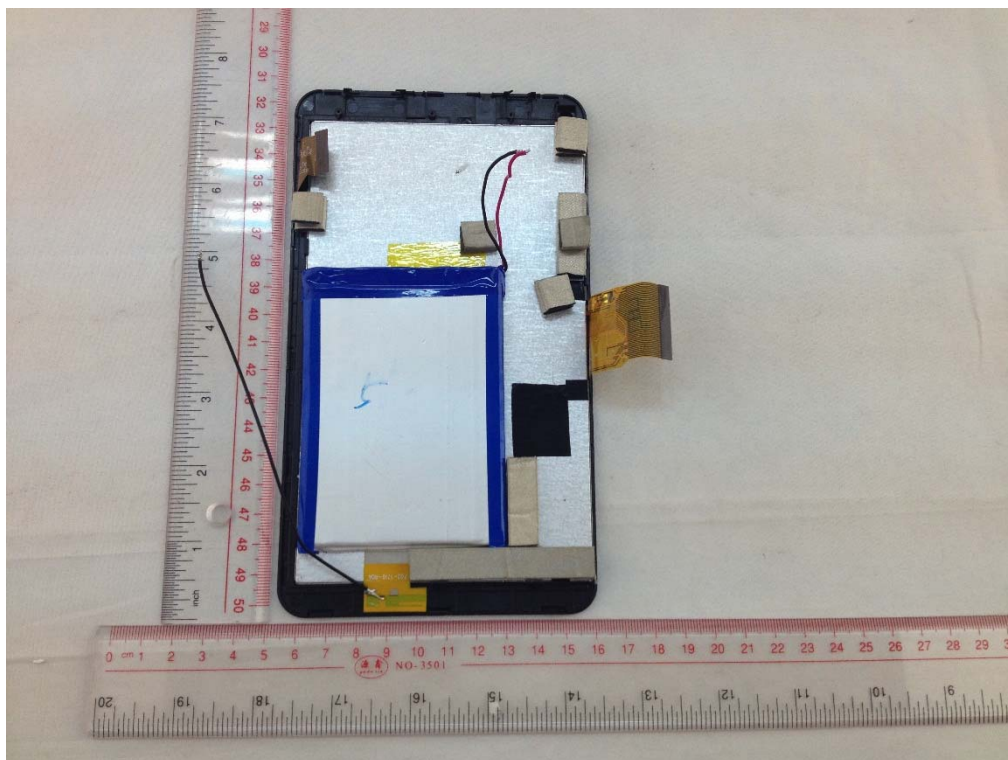


EUT UNCOVER VIEW 2

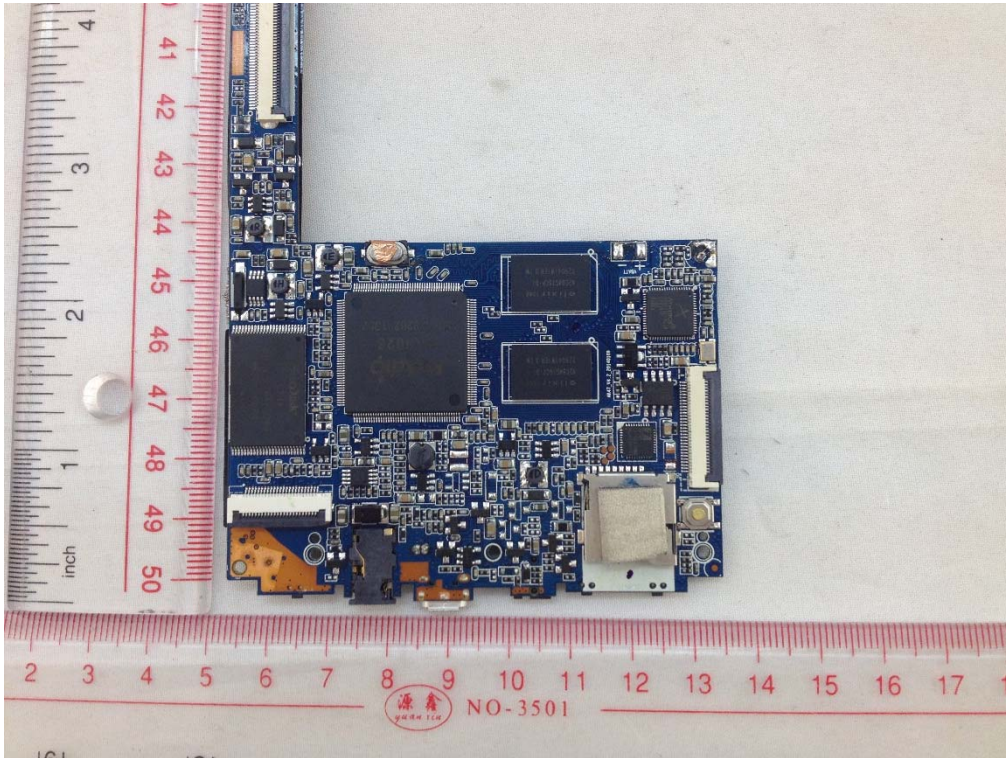

MAIN BOARD TOP VIEW 1

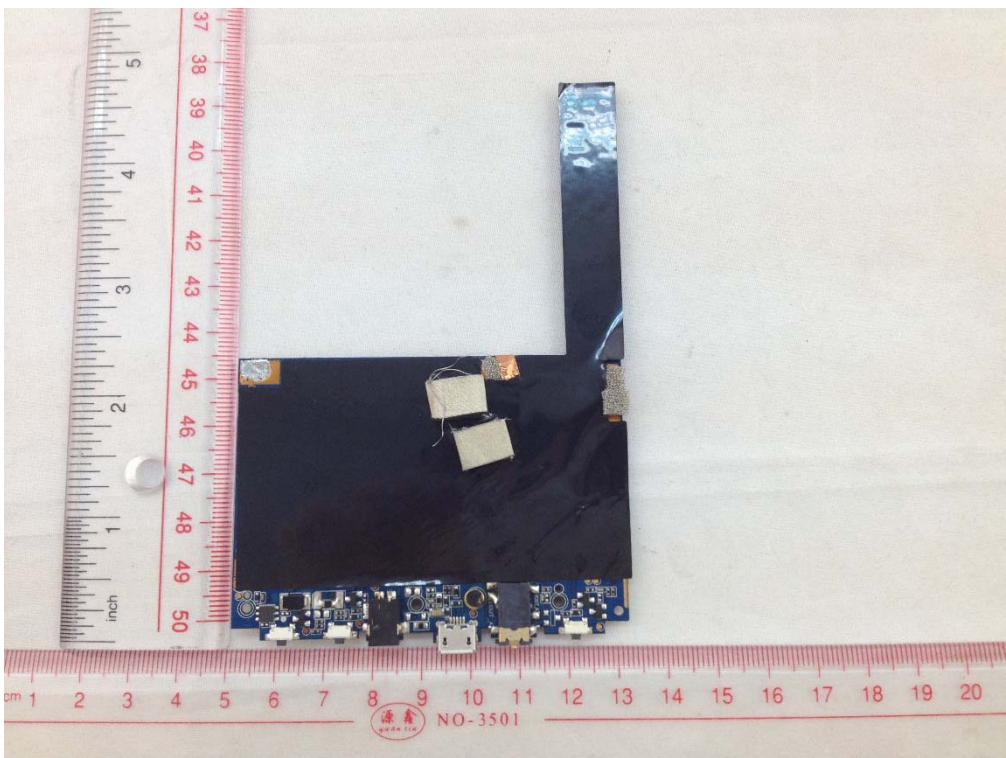

MAIN BOARD TOP VIEW 2

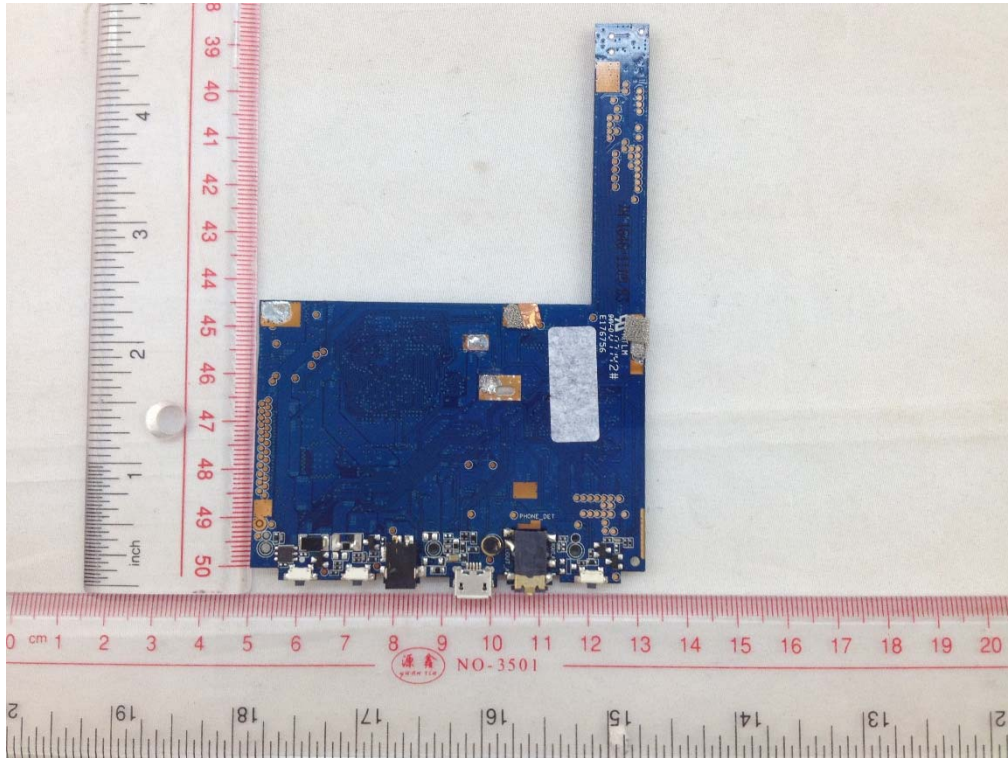

MAIN BOARD BACK VIEW 3

--END OF REPORT--