

APPROVAL SHEET

CrossAir™ SMD Antenna series
RoHS Compliance

PN: CA-C03

2.4 GHz ISM band antenna

FEATURES

1. Surface Mounted Devices (SMD) with a small dimension of 5.5 X 2.0 X 1.0 mm³ meet miniaturization trend.
2. Low power loss and high antenna efficiency.
3. High stability in Temperature and Humidity Change.

APPLICATIONS

1. 2.4GHz ISM band RF applications
2. Bluetooth, ZigBee, Wireless, HomeRF
3. WIFI (2.4G only)

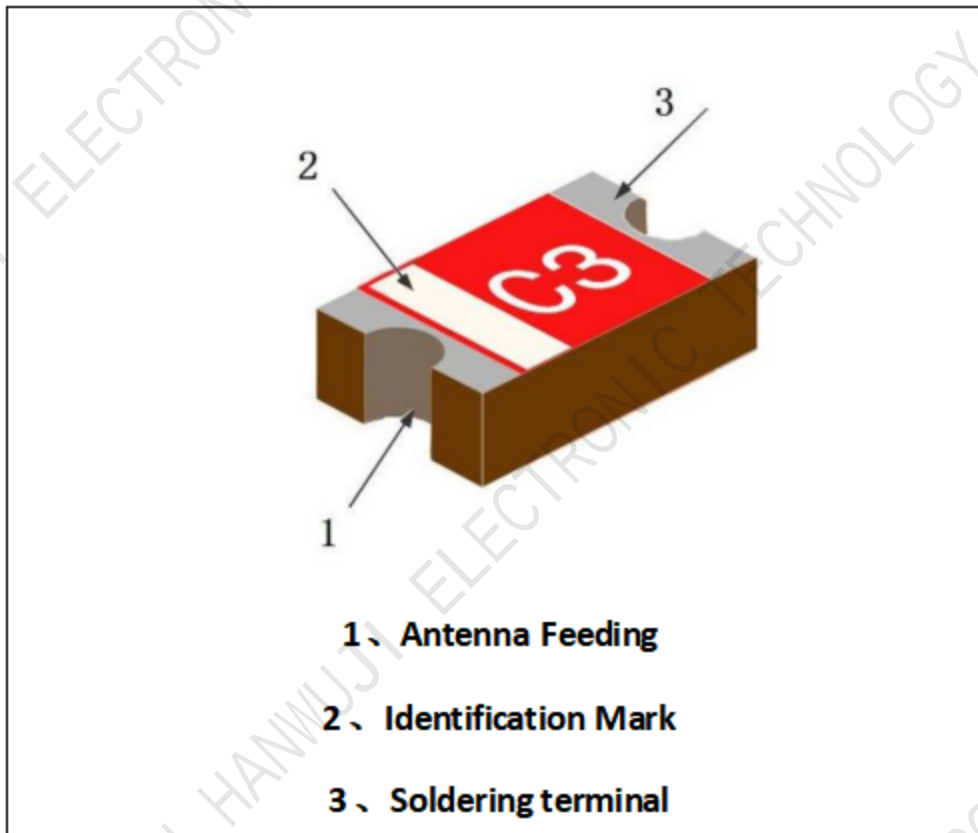
CONSTRUCTION**DIMENSIONS**


Figure	Symbol	Dimension(mm)
	L	5.5±0.1
	w	2.0±0.1
	T	1.0±0.1
	a	0.5±0.1


ELECTRICAL CHARACTERISTICS

CA-C03	Specification
Working Frequency Range	2450 ± 50MHz
Band Width	>100MHz
Impedance	50 Ω
Gain(dBi)	4.3 (peak)
VSWR	<2
Operation Temperature	-40°C~+95°C
Power Capacity	3W


The working frequency need be adjusted to 2.45GHz with matching circuit.

SOLDER LAND PATTERN DESIGN

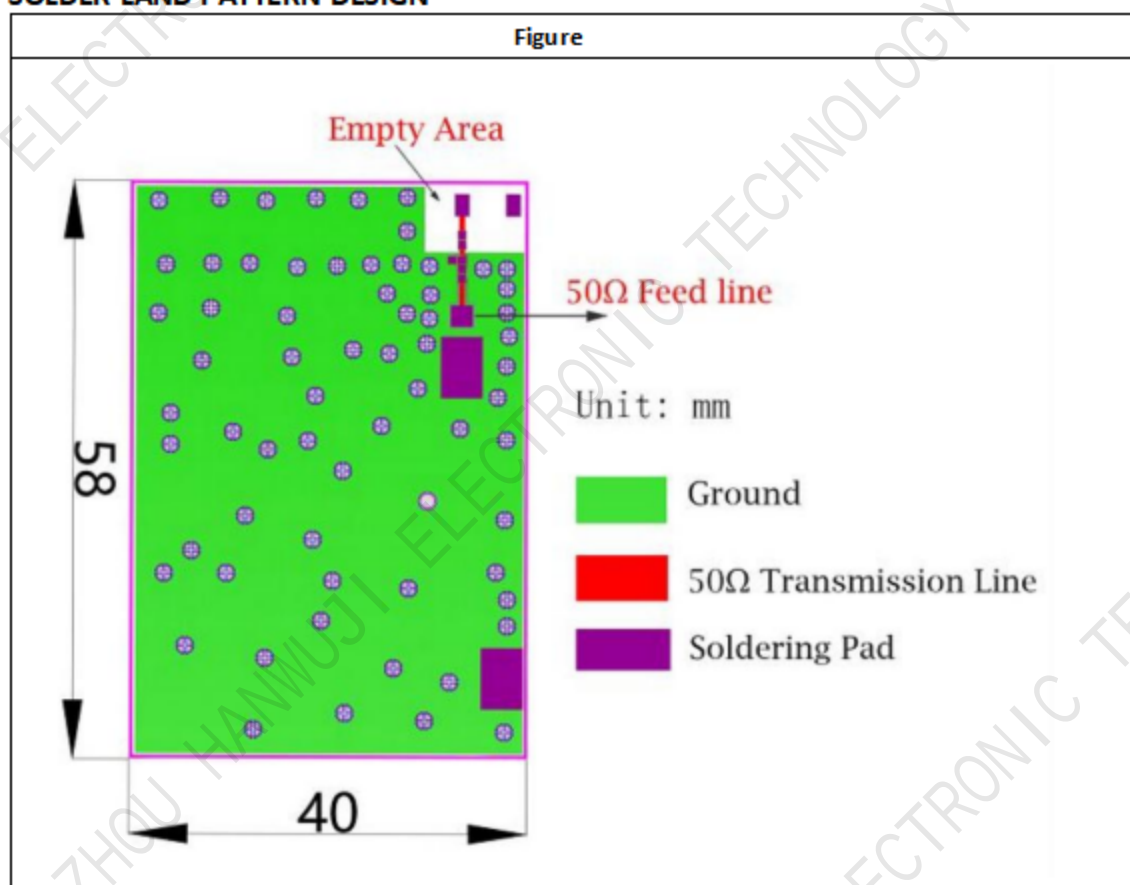

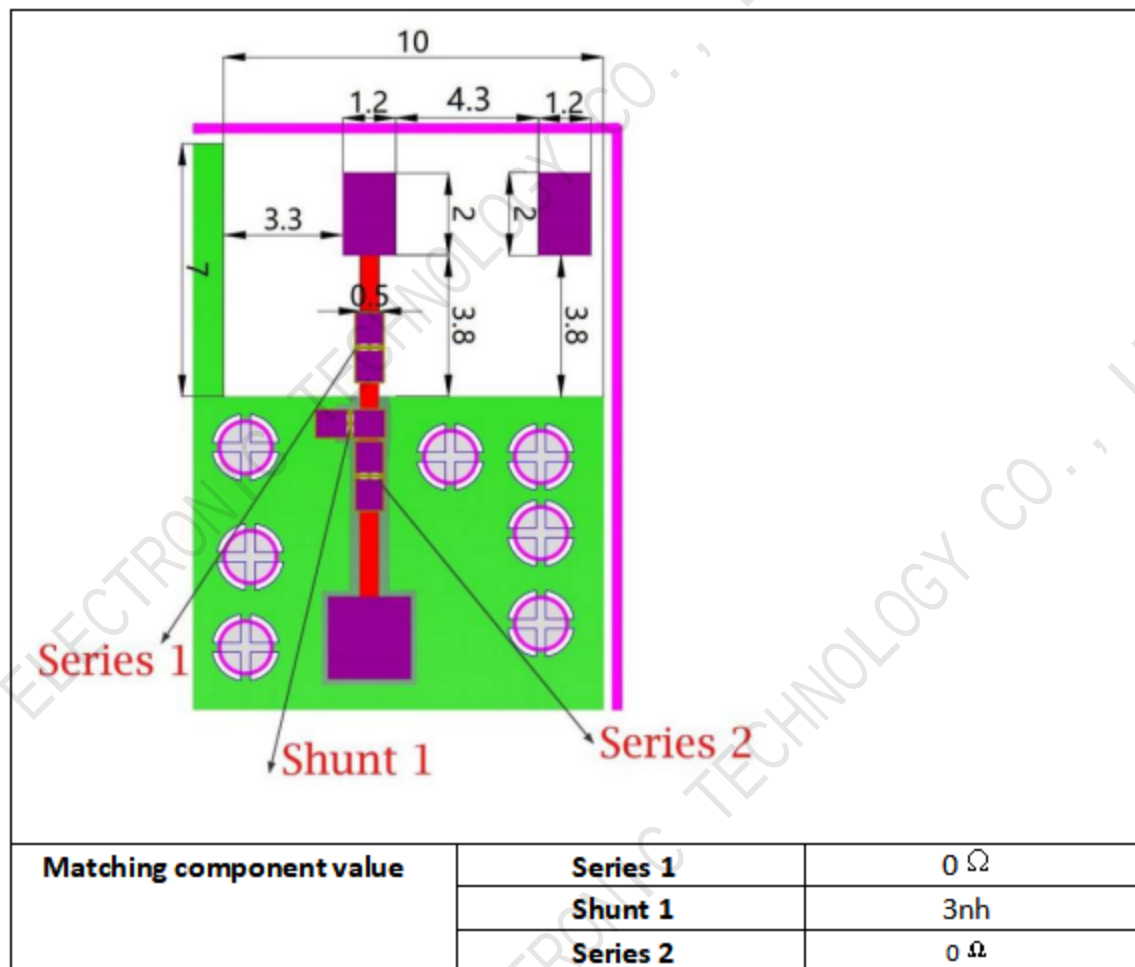


Antenna on Test Board (Thickness 1.0mm)

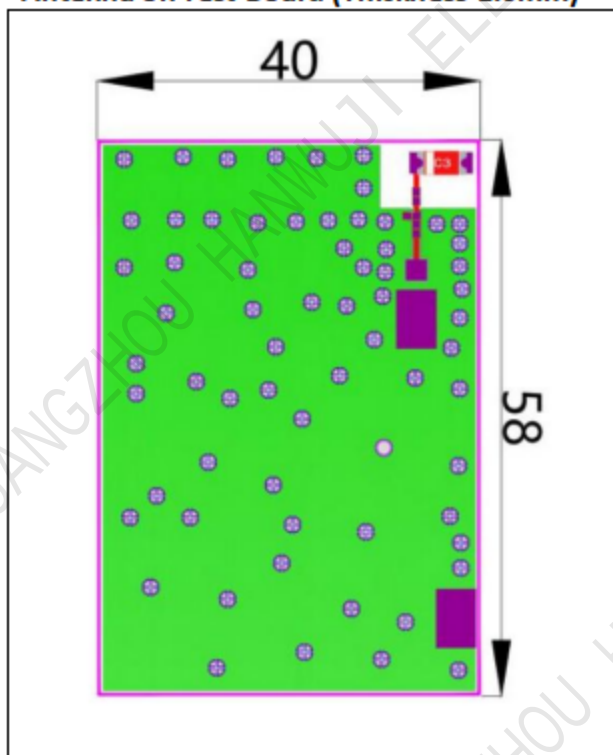


Antenna S11 on Test Board

▶ [F1] S22 Log Mag 5.000dB/ Ref 0.000dB [F1]

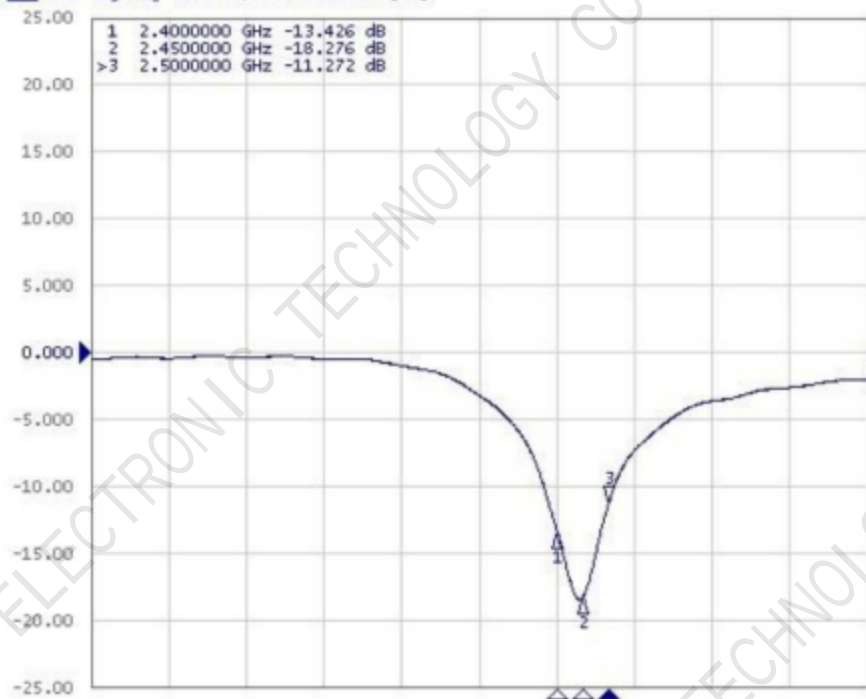



Antenna VSWR on Test Board

▶ [F1] S22 SWR 1.000/ Ref 1.000 [F1]

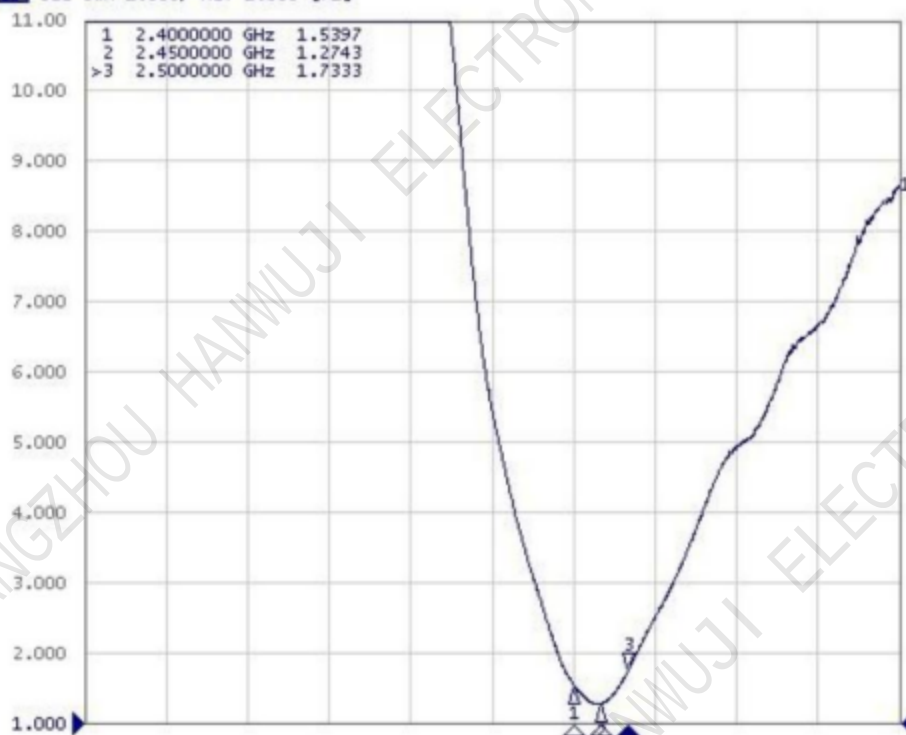



Efficiency and RADIATION PATTERN

Efficiency , Radiation Pattern and Gain were dependent on measurement board design. The specification of CA-C03 antenna was measured based on the PCB size and installation position as shown in the below figure test board. The test results were tested in ETS 3D Chamber.




Gain and Efficiency	2.4G-2.5GHz
Peak Gain	4.3dBi
Average Gain across the band	4.1dBi
Gain Range across the band	3.9dBi~4.3dBi
Peak Efficiency	81.7%
Average Efficiency across the band	80.2%
Efficiency Range across the band	78.6%~81.7%

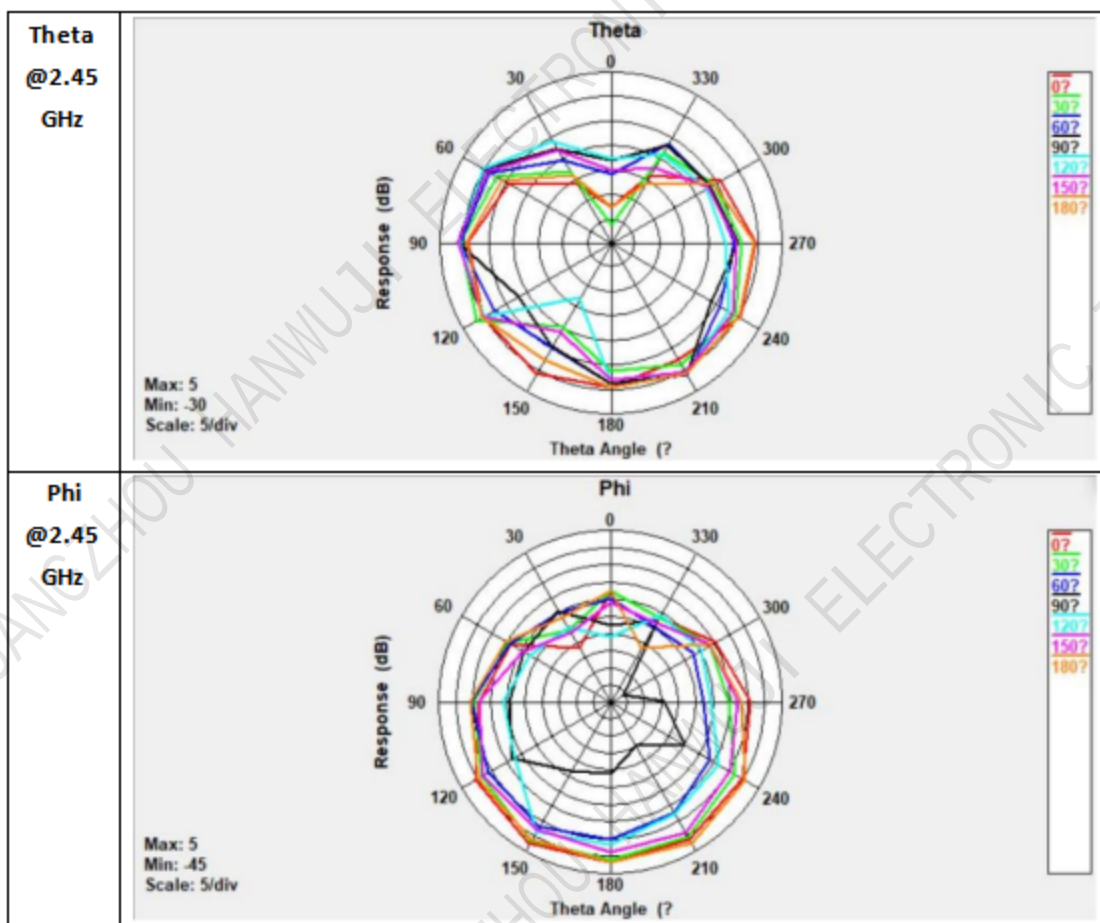

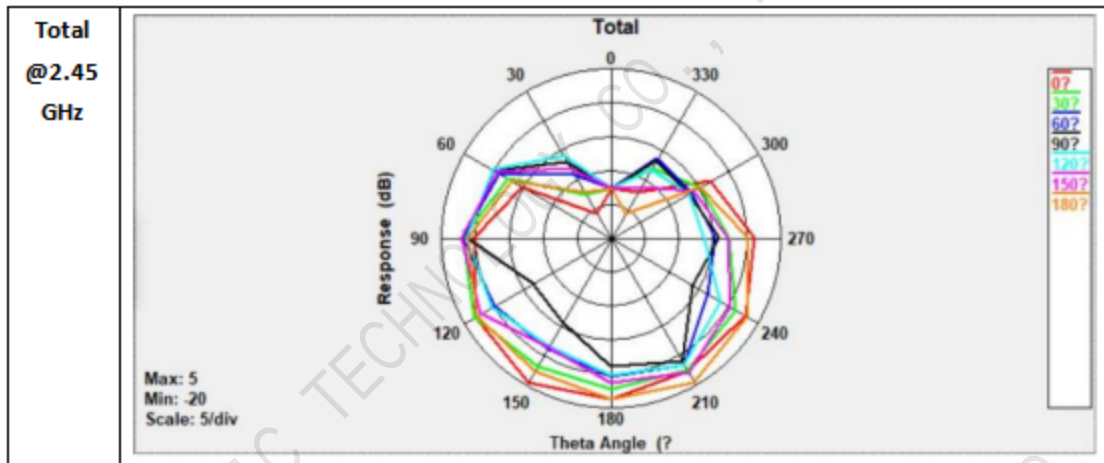


SOLDERING CONDITION

Typical examples of soldering processes that provide reliable joints without any damage is as follows:

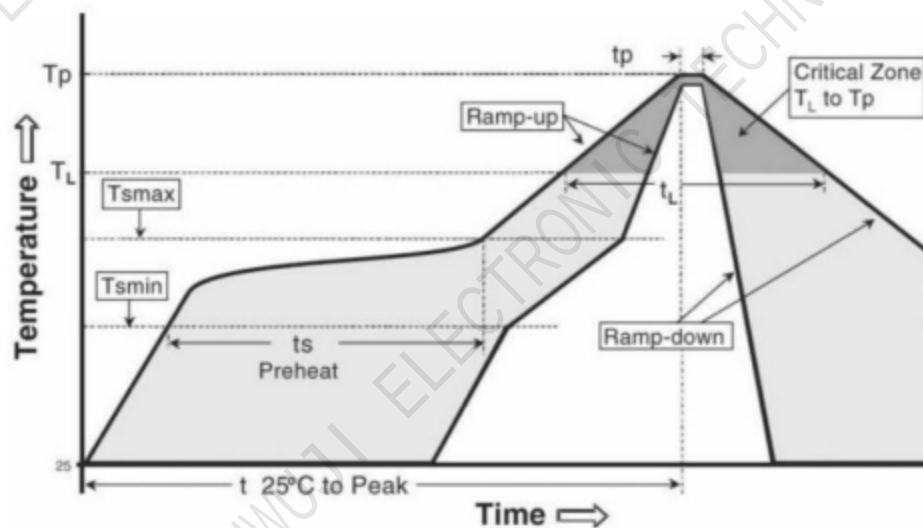

Phase	Profile features	Pb-Free assembly (SnAgCu)
RAMP-UP	Avg. Ramp-up Rate (T_{smax} to T_p)	3 °C / second (max.)
PREHEAT	- Temperature Min (T_{smin}) - Temperature Max (T_{smax}) - Time (t_{smin} to t_{smax})	150 °C 200 °C 60-180 seconds
REFLOW	- Temperature (T_L) - Total Time above T_L (t_L)	217 °C 60-150 seconds
PEAK	- Temperature (T_p) - Time (t_p)	260 °C 20-40 seconds
RAMP-DOWN	Rate	6 °C/second max
Time from 25 °C to Peak Temperature		8 minutes max


PACKAGING

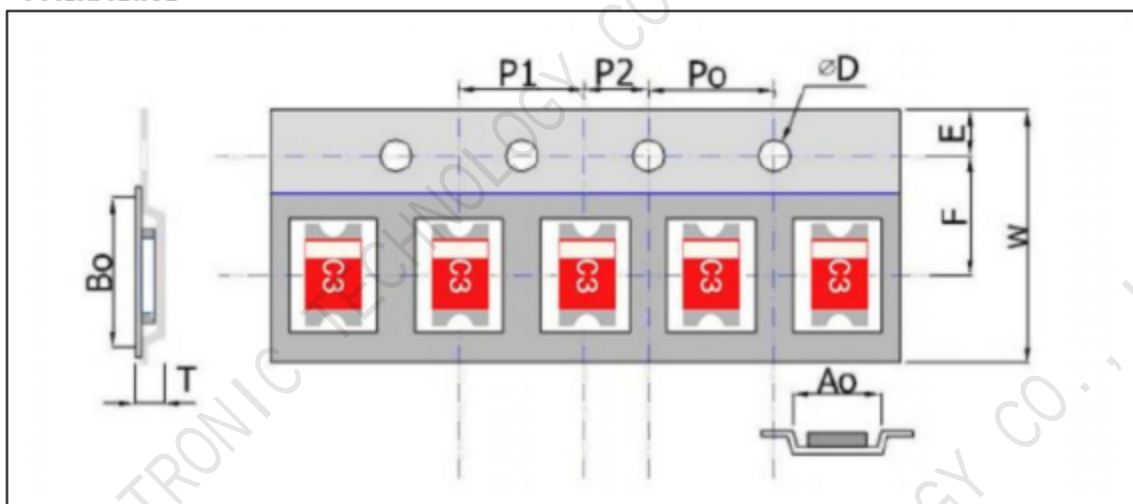

Plastic Tape specification (unit:mm)

Index	Ao	Bo	ΦD	T	W
Dimension (mm)	3.0 ± 0.1	6.0 ± 0.1	1.55 ± 0.05	1.2 ± 0.1	11.8 ± 0.1
Index	E	F	Po	P1	P2
Dimension (mm)	1.75 ± 0.1	4.6 ± 0.1	4.0 ± 0.1	4.0 ± 0.1	2.0 ± 0.1

Reel dimensions

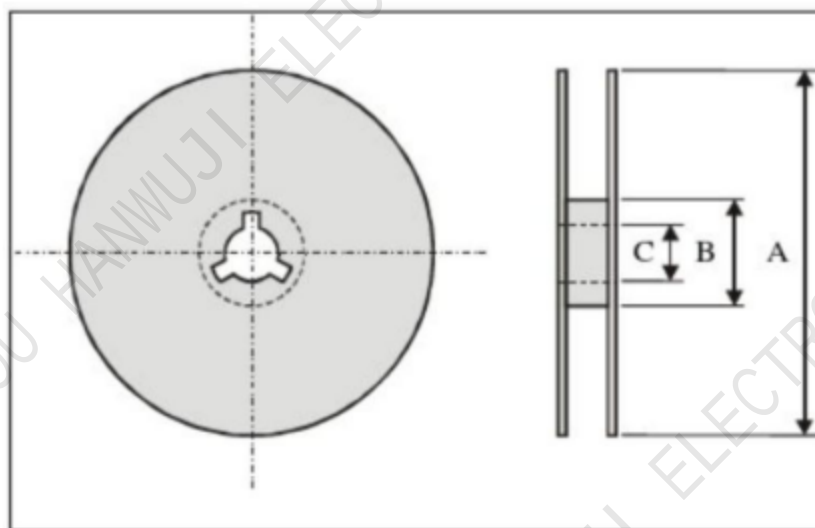

Index	A	B	C
Dimension(mm)	178	60	13.5

Typing Quantity: 3000 pieces per reel.

CAUTION OF HANDLING**Storage environment condition**

Products should be storage in the warehouse on the following conditions:

Temperature : -10℃~+40℃

Humidity : 30% to 70% relative humidity

Don't keep products in corrosive gases such as sulfur. Chlorine gas or acid or it may cause oxidization of electrode, resulting in poor solderability.

Products should be storage on the palette for the prevention of the influence from humidity, dust and so on.

Products should be storage in the warehouse without heat shock, vibration, direct sunlight and so on.

Products should be storage under the airtight packaged condition.

Contact Us:**GUANGZHOU HANWUJI ELECTRONIC TECHNOLOGY CO., LTD**

Add:1120, 11th Floor, Building 1, Hongda Creative Park, Yuanxiang Road, Yunpu Street, Huangpu District, Guangzhou

Name:Chen,Pengfei

Phone: 18028016875

Email: chenpengfei@hwjelec.com