



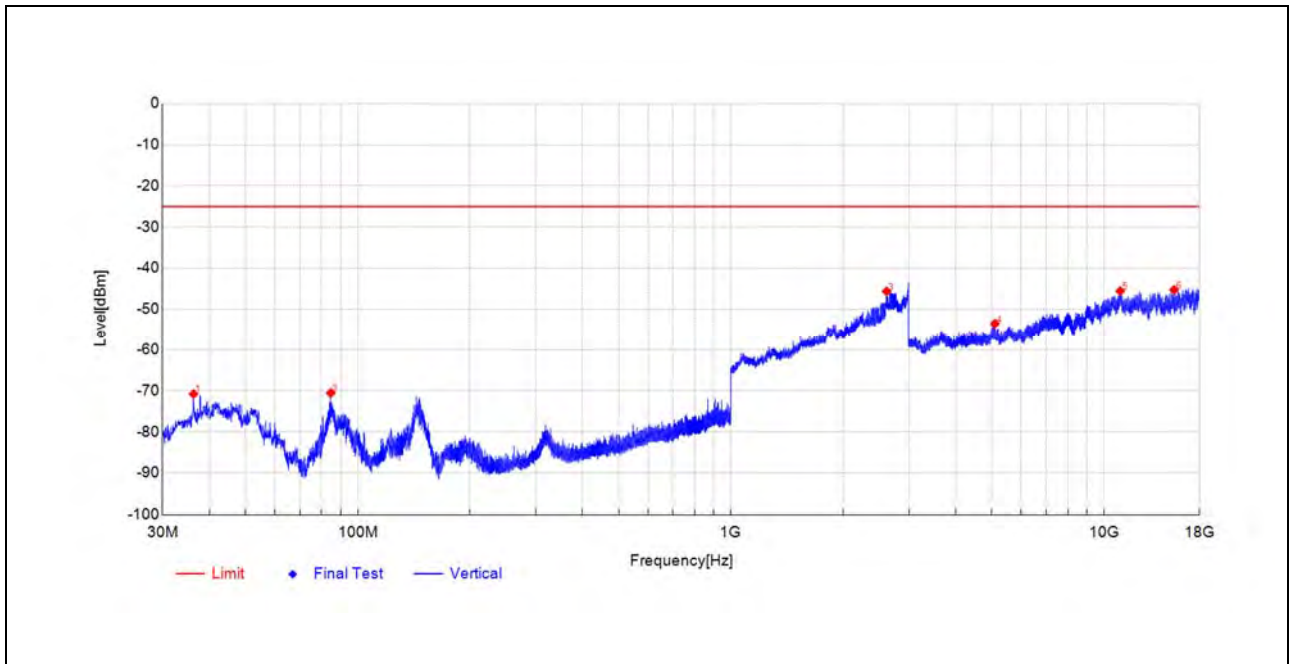


Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
36.3053	-47.71	-70.78	-23.1	-25.0	45.8	Vertical	PK	PASS
84.6137	-47.80	-70.53	-22.7	-25.0	45.5	Vertical	PK	PASS
2614.3229	-57.84	-45.60	12.2	-	-	Vertical	PK	NA
5097.7282	-58.96	-53.50	5.5	-25.0	28.5	Vertical	PK	PASS
11049.322	-67.35	-45.54	21.8	-25.0	20.5	Vertical	PK	PASS
15398.295	-70.89	-45.24	25.7	-25.0	20.2	Vertical	PK	PASS

LTE Band 41

Plot for Low Channel

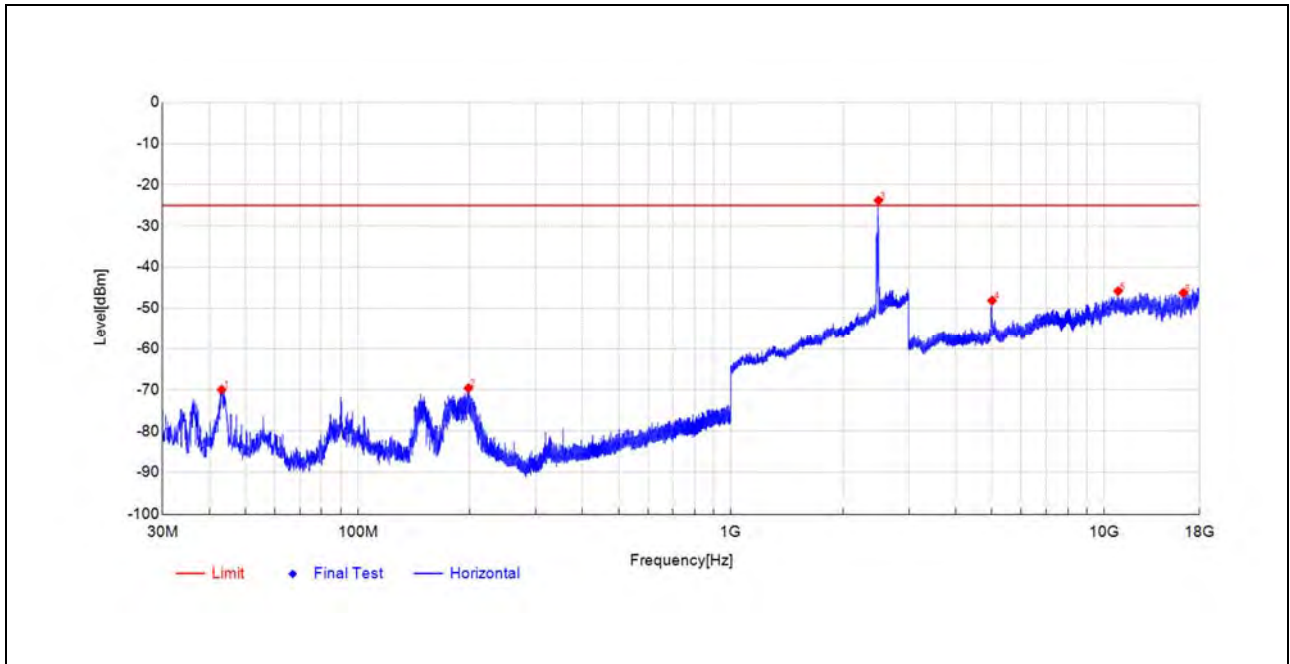


Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
43.1927	-54.69	-69.98	-15.3	-25.0	45.0	Horizontal	PK	PASS
197.9154	-51.49	-69.61	-18.1	-25.0	44.6	Horizontal	PK	PASS
2485.8972	-33.78	-23.80	10.0	-	-	Horizontal	PK	NA
5012.0017	-54.22	-48.12	6.1	-25.0	23.1	Horizontal	PK	PASS
10911.076	-66.84	-45.82	21.0	-25.0	20.8	Horizontal	PK	PASS
16307.452	-70.61	-46.26	24.4	-25.0	21.3	Horizontal	PK	PASS

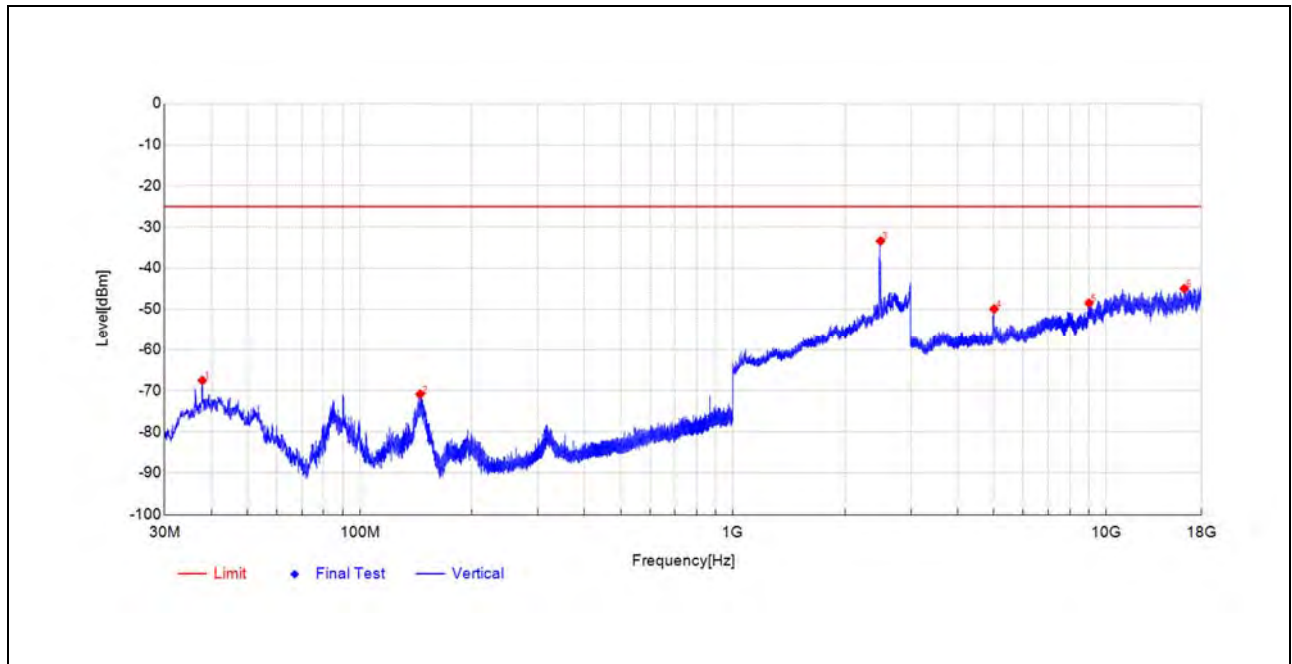


Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
37.8574	-44.95	-67.51	-22.6	-25.0	42.5	Vertical	PK	PASS
145.1933	-49.38	-70.81	-21.4	-25.0	45.8	Vertical	PK	PASS
2486.6973	-43.48	-33.37	10.1	-	-	Vertical	PK	NA
5012.4303	-55.41	-49.89	5.5	-25.0	24.9	Vertical	PK	PASS
8999.64	-64.12	-48.47	15.7	-25.0	23.5	Vertical	PK	PASS
16201.368	-71.30	-44.95	26.4	-25.0	20.0	Vertical	PK	PASS

Plot for Mid Channel

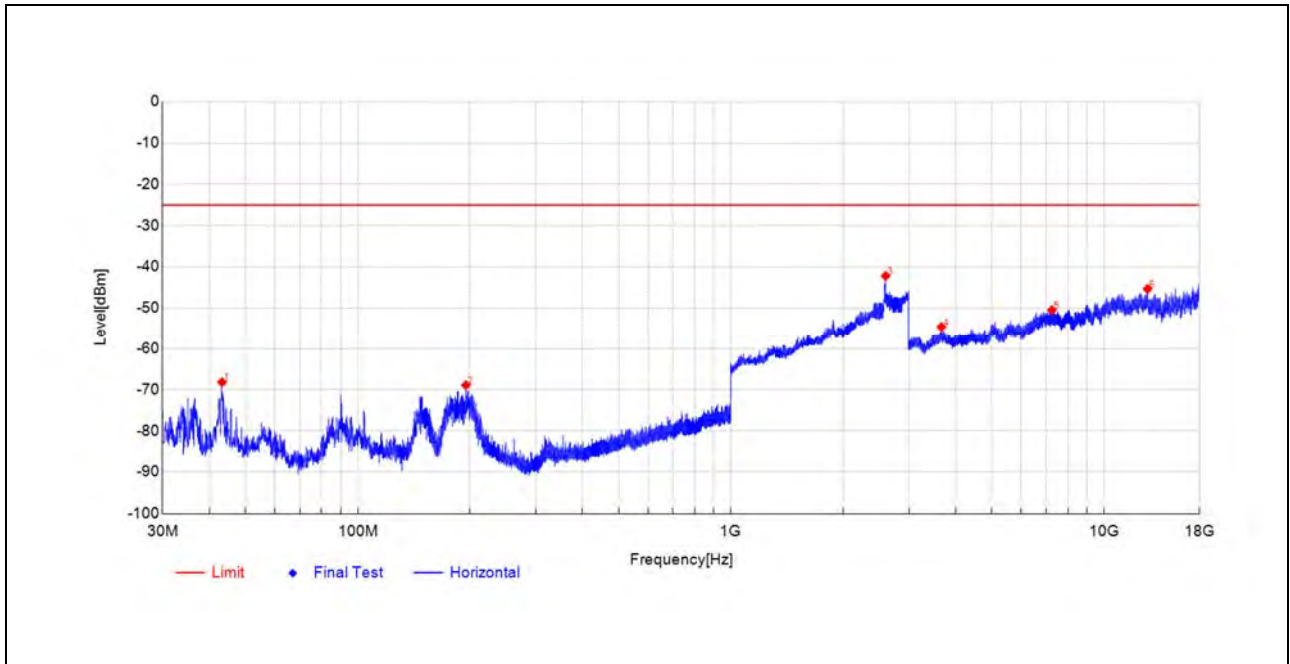


Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
43.2897	-52.91	-68.20	-15.3	-25.0	43.2	Horizontal	PK	PASS
194.9567	-50.29	-68.92	-18.6	-25.0	43.9	Horizontal	PK	PASS
2597.9196	-54.68	-42.17	12.5	-	-	Horizontal	PK	NA
3666.0952	-56.31	-54.58	1.7	-25.0	29.6	Horizontal	PK	PASS
7247.5699	-62.69	-50.46	12.2	-25.0	25.5	Horizontal	PK	PASS
13077.403	-69.14	-45.31	23.8	-25.0	20.3	Horizontal	PK	PASS

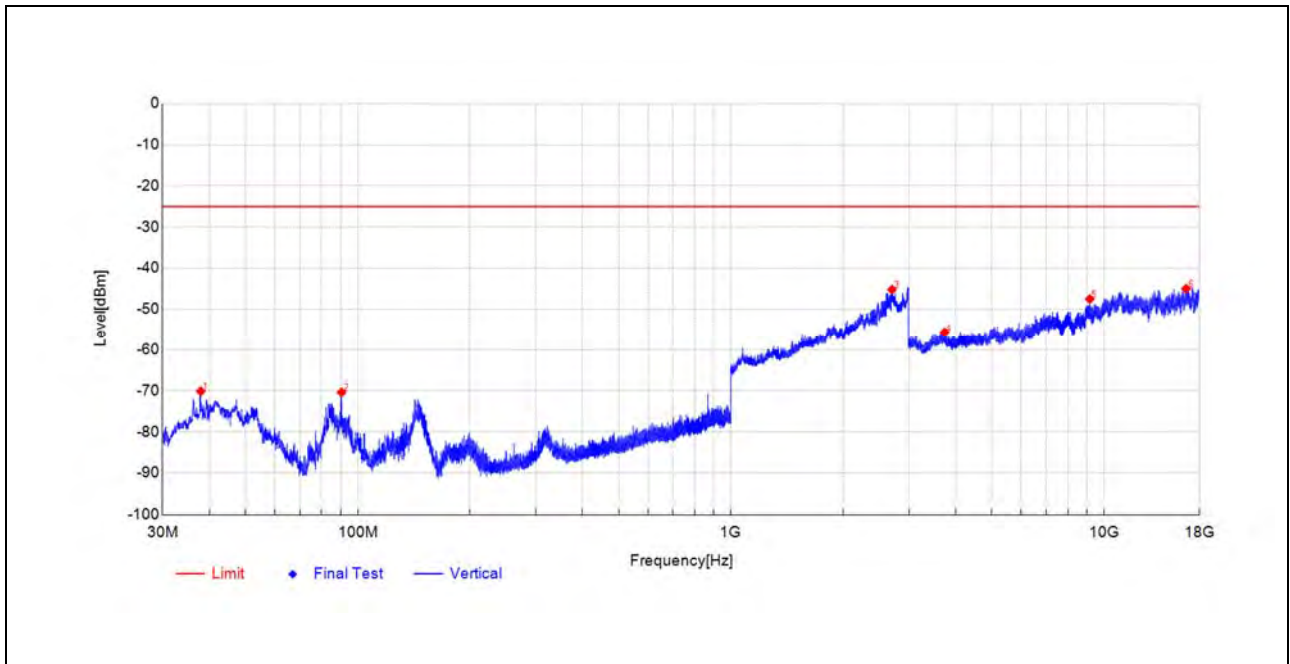


Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
37.9544	-47.61	-70.14	-22.5	-25.0	45.1	Vertical	PK	PASS
90.4825	-48.17	-70.39	-22.2	-25.0	45.4	Vertical	PK	PASS
2701.5403	-58.44	-45.20	13.2	-25.0	20.2	Vertical	PK	PASS
3738.1054	-56.98	-55.65	1.3	-25.0	30.7	Vertical	PK	PASS
9158.0463	-64.23	-47.50	16.7	-25.0	22.5	Vertical	PK	PASS
16590.183	-70.75	-44.96	25.8	-25.0	20.0	Vertical	PK	PASS

Plot for High Channel

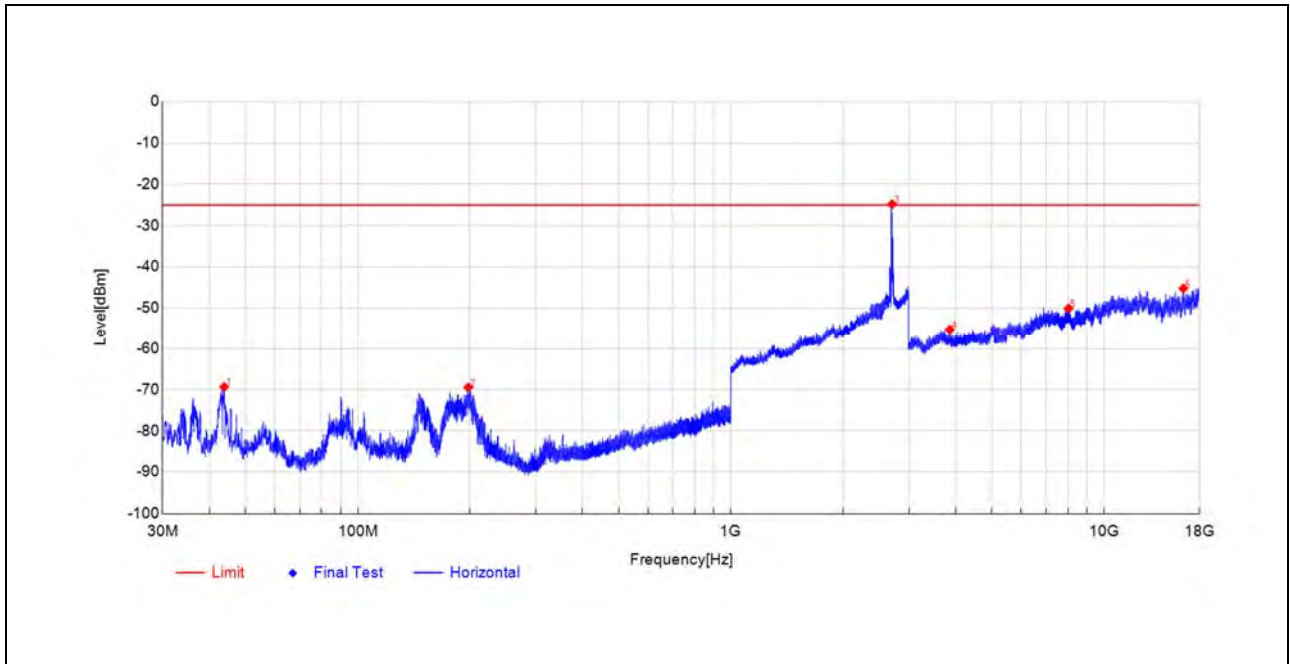

Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
43.8717	-54.03	-69.33	-15.3	-25.0	44.3	Horizontal	PK	PASS
197.7214	-51.30	-69.46	-18.2	-25.0	44.5	Horizontal	PK	PASS
2701.5403	-38.39	-24.82	13.6	-	-	Horizontal	PK	NA
3860.6944	-56.31	-55.21	1.1	-25.0	30.2	Horizontal	PK	PASS
8035.7614	-63.48	-50.05	13.4	-25.0	25.1	Horizontal	PK	PASS
16311.772	-69.63	-45.21	24.4	-25.0	20.2	Horizontal	PK	PASS

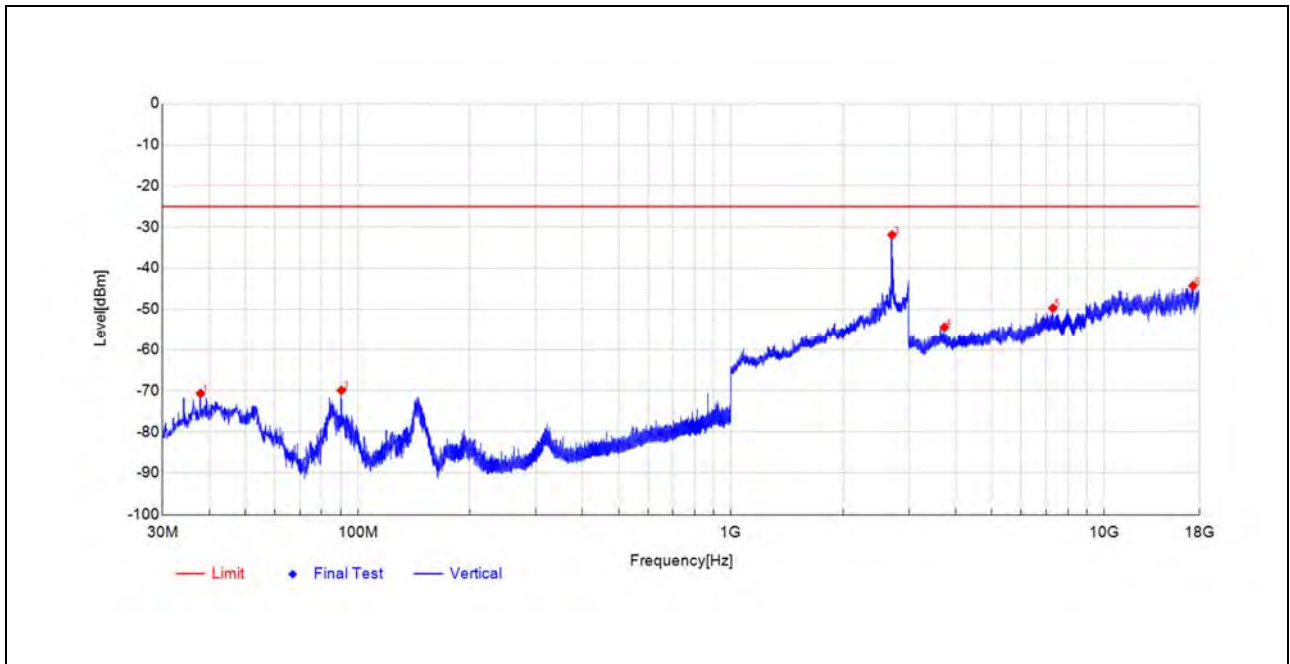

Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
37.9059	-48.14	-70.68	-22.5	-25.0	45.7	Vertical	PK	PASS
90.434	-47.69	-69.91	-22.2	-25.0	44.9	Vertical	PK	PASS
2703.5407	-45.17	-31.90	13.3	-	-	Vertical	PK	NA
3735.9623	-55.74	-54.38	1.4	-25.0	29.4	Vertical	PK	PASS
7291.7317	-61.57	-49.70	11.9	-25.0	24.7	Vertical	PK	PASS
17307.332	-68.86	-44.26	24.6	-25.0	19.3	Vertical	PK	PASS



Annex A Test Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test Items	Uncertainty
Output Power	± 2.22 dB
Bandwidth	$\pm 5\%$
Conducted Spurious Emission	± 2.77 dB
Band Edge	± 2.77 dB
Equivalent Isotropic Radiated Power	± 2.22 dB
Radiated Spurious Emissions	± 6 dB

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.



Annex B Testing Laboratory Information

1. Identification of the Responsible Testing Laboratory

Laboratory Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Laboratory Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2020 and CISPR Publication 22; the FCC designation number is CN1192, the test firm registration number is 226174.



REPORT No.: SZ25040205W02

4. Test Equipment Utilized

4.1 Conducted Test Equipment

Equipment	Serial No.	Type	Manufacturer	Cal. Date	Due Date
EXA Signal Analyzer	MY51511149	N9020A	Agilent	2025.05.15	2026.05.14
Communication Test Station	6200995016	MT8820C	Anritsu	2024.09.11	2025.09.10
Temperature Chamber	S022177101 00089002	KMT-36LF 1A0	KOMEG	2024.09.11	2025.09.10

4.2 List of Software Used

Description	Manufacturer	Software Version
MOR-2023E Test System	MORLAB	V7.99
JS36-RSE	Tonscend	5.0.0

**4.3 Radiated Test Equipment**

Equipment	Serial No.	Type	Manufacturer	Cal. Date	Due Date
System Simulator	152038	CMW500	R&S	2024.09.11	2025.09.10
Signal Analyzer	MY56060145	N9020A	Agilent	2025.05.13	2026.05.12
Test Antenna - Bi-Log	9163-274	VULB 9163	Schwarzbeck	2024.07.26	2025.07.25
				2025.06.28	2026.06.27
Test Antenna - Horn	9120D-963	BBHA 9120D	Schwarzbeck	2025.05.16	2026.05.15
RF Coaxial Cable (DC-18GHz)	MRE001	PE330	Pasternack	2025.05.13	2026.05.12
RF Coaxial Cable (DC-18GHz)	MRE002	CLU18	Pasternack	2025.05.13	2026.05.12
RF Coaxial Cable (DC-18GHz)	MRE003	CLU18	Pasternack	2025.05.13	2026.05.12
RF Coaxial Cable (DC-40GHz)	22290045	QA360-40-KK- 0.5	Qualwave	2024.09.11	2025.09.10
RF Coaxial Cable (DC-40GHz)	22290046	QA360-40-KK F-2	Qualwave	2024.09.11	2025.09.10
RF Coaxial Cable (DC-18GHz)	22120181	QA500-18-NN -5	Qualwave	2024.09.11	2025.09.10
Preamplifier (10MHz-6GHz)	46732	S10M100L380 2	LUCIX CORP.	2025.05.13	2026.05.12
Preamplifier (2GHz-18GHz)	61171/61172	S020180L320 3	LUCIX CORP.	2025.05.13	2026.05.12
Preamplifier (18GHz-40GHz)	DS77209	DCLNA0118-4 0C-S	Decentest	2025.05.13	2026.05.12
Notch Filter	N/A	WRCGV -LTE B4	Wainwright	N/A	N/A
Notch Filter	N/A	WRCGV -LTE B5	Wainwright	N/A	N/A
Notch Filter	N/A	WRCGV -LTE B7	Wainwright	N/A	N/A
Notch Filter	N/A	WRCGV -LTE B12	Wainwright	N/A	N/A
Notch Filter	N/A	WRCGV -LTE B13	Wainwright	N/A	N/A
Notch Filter	N/A	WRCGV -LTE B25	Wainwright	N/A	N/A



REPORT No.: SZ25040205W02

Notch Filter	N/A	WRCGV -LTE B26	Wainwright	N/A	N/A
Notch Filter	N/A	WRCGV -LTE B38	Wainwright	N/A	N/A
Notch Filter	N/A	WRCGV -LTE B41	Wainwright	N/A	N/A
Anechoic Chamber	N/A	9m*6m*6m	CRT	2025.06.21	2028.06.20
Anechoic Chamber	N/A	9m*6m*6m	CRT	2022.11.30	2025.11.29

_____ END OF REPORT _____

