





5G SA_n12

Plot for High Channel

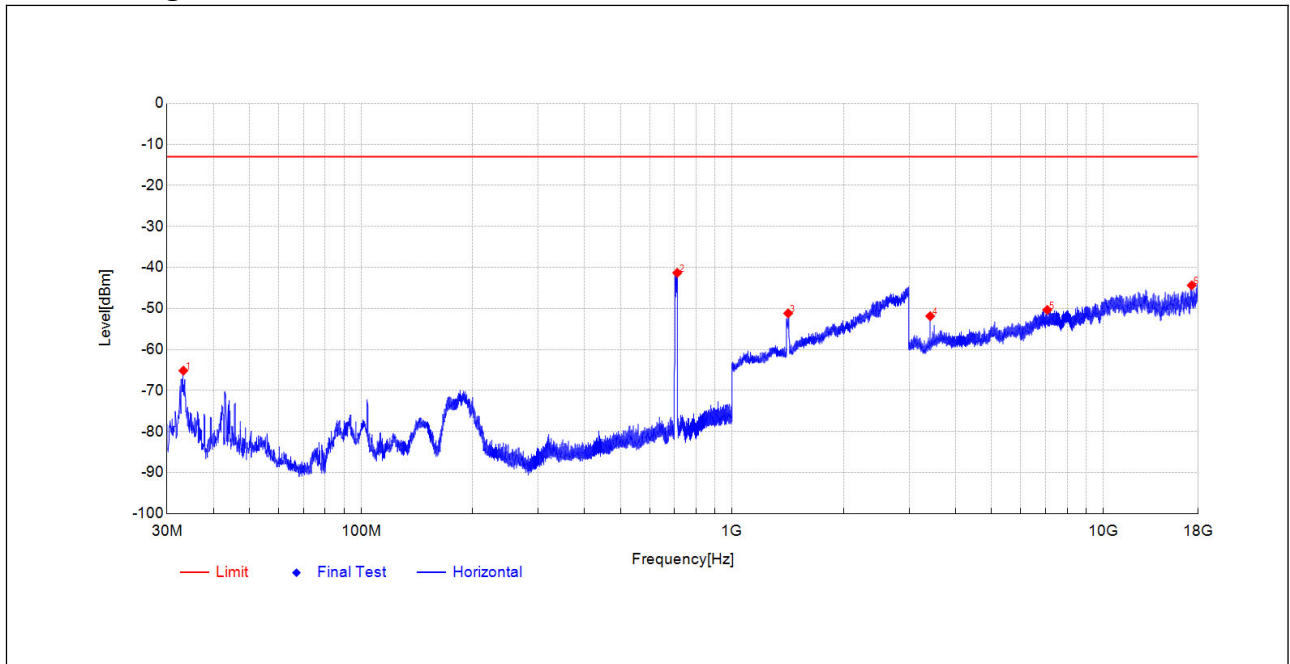

Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
33.2012	-50.10	-65.15	-15.1	-13.0	52.2	Horizontal	PK	PASS
711.5076	-33.68	-41.30	-7.6	-	-	Horizontal	PK	NA
1416.0832	-50.88	-51.18	-0.3	-13.0	38.2	Horizontal	PK	PASS
3419.2027	-52.24	-51.87	0.4	-13.0	38.9	Horizontal	PK	PASS
7067.5627	-62.13	-50.34	11.8	-13.0	37.3	Horizontal	PK	PASS
17320.292	-68.52	-44.35	24.2	-13.0	31.4	Horizontal	PK	PASS

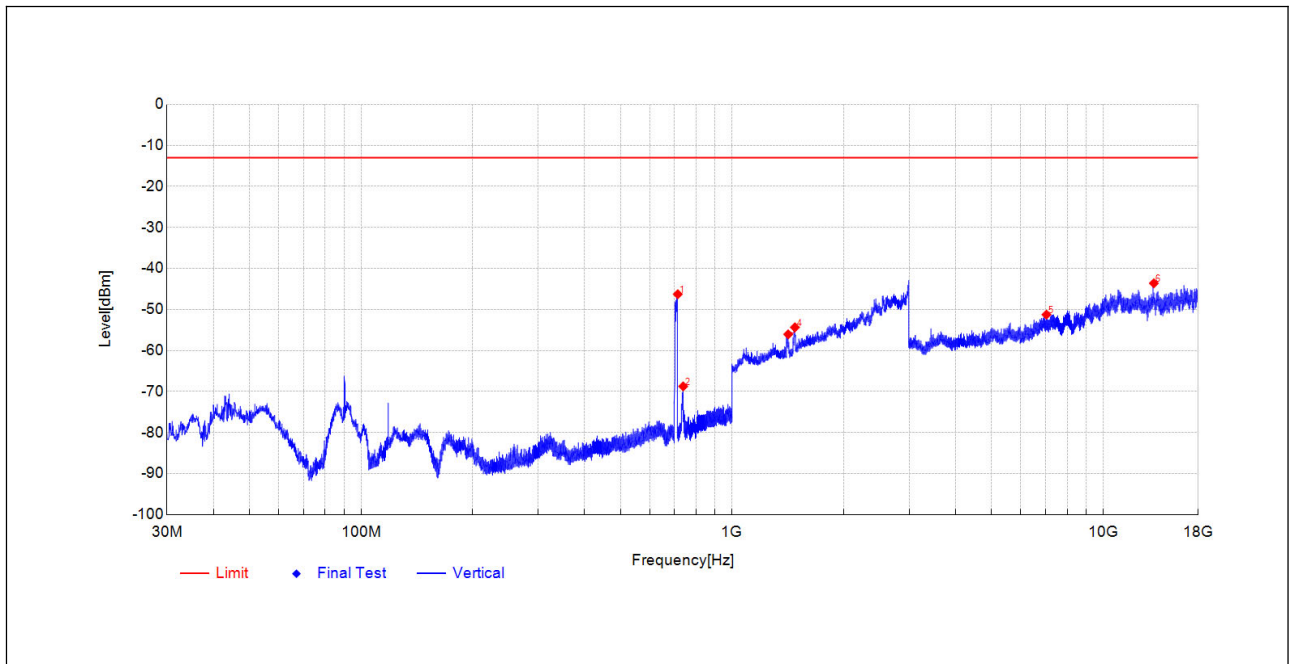


Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
713.9327	-38.60	-46.27	-7.7	-	-	Vertical	PK	NA
738.1839	-61.85	-68.74	-6.9	-	-	Vertical	PK	NA
1416.4833	-55.69	-56.05	-0.4	-13.0	43.1	Vertical	PK	PASS
1476.8954	-55.10	-54.34	0.8	-13.0	41.3	Vertical	PK	PASS
7033.0013	-62.25	-51.24	11.0	-13.0	38.2	Vertical	PK	PASS
13695.667	-68.45	-43.61	24.8	-13.0	30.6	Vertical	PK	PASS




5G SA_n13

Plot for Mid Channel

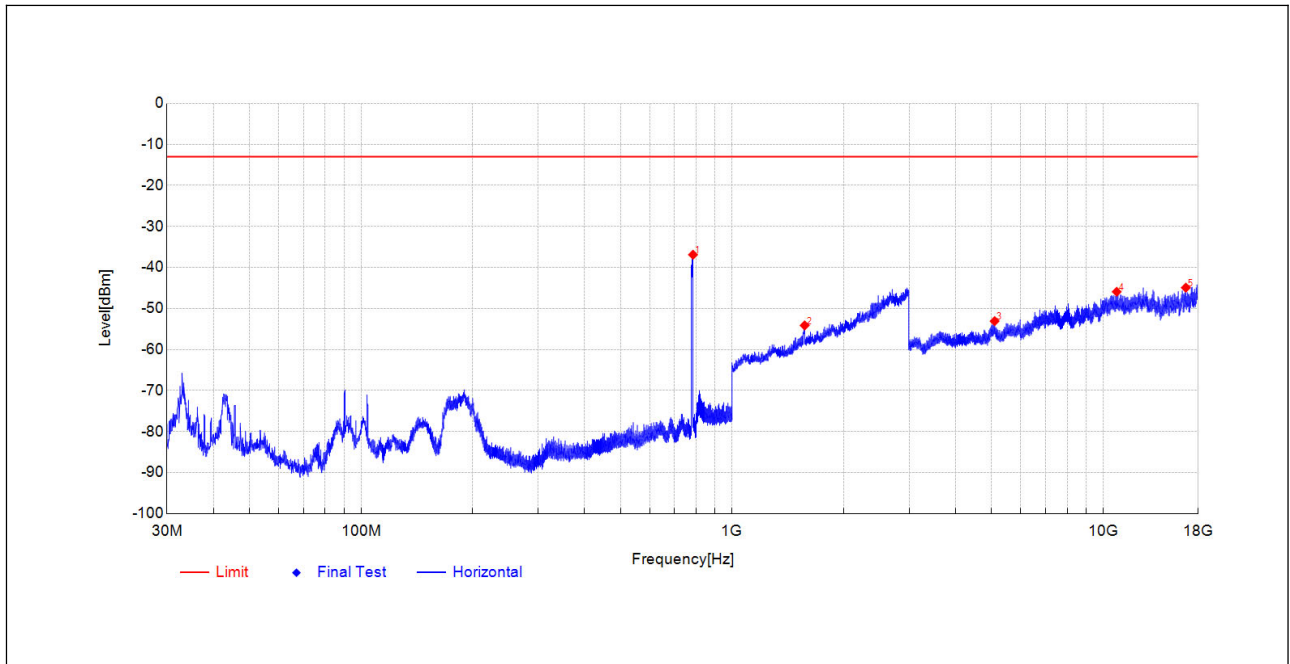

Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
784.6007	-29.66	-36.88	-7.2	-	-	Horizontal	PK	NA
1568.5137	-56.63	-54.13	2.5	-13.0	41.1	Horizontal	PK	PASS
5098.5855	-59.13	-53.07	6.1	-13.0	40.1	Horizontal	PK	PASS
10877.955	-66.74	-45.91	20.8	-13.0	32.9	Horizontal	PK	PASS
16702.988	-70.05	-44.92	25.1	-13.0	31.9	Horizontal	PK	PASS

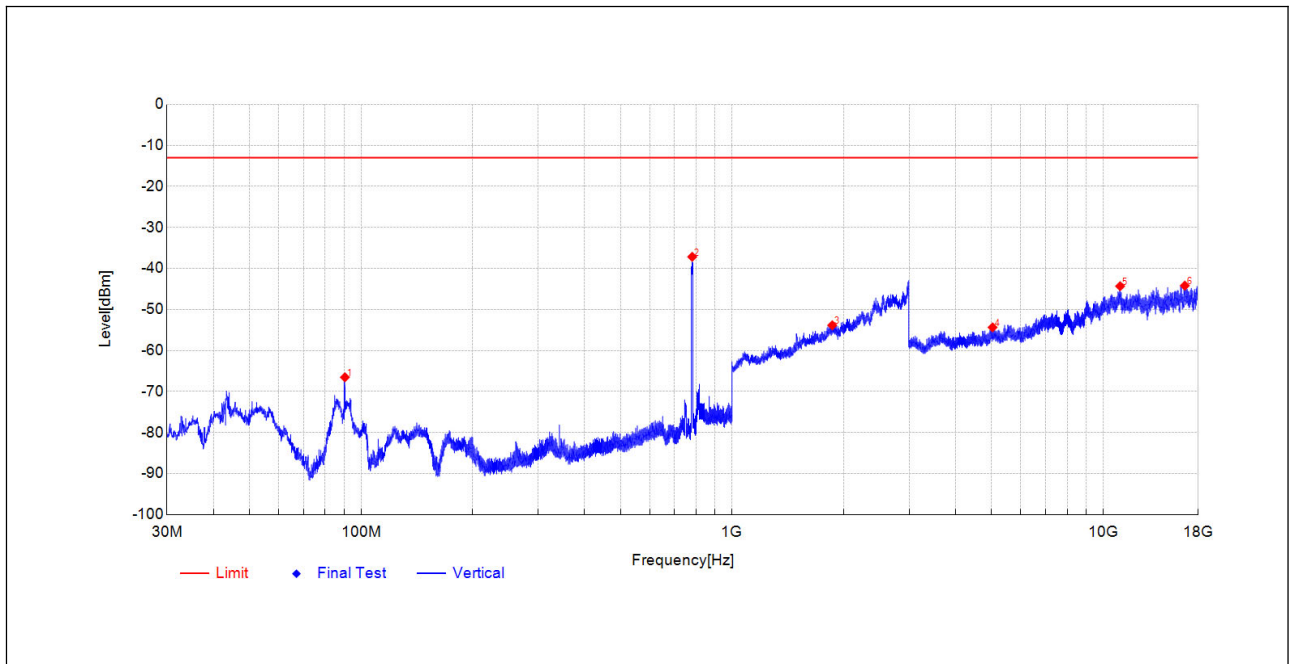


Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
90.4825	-44.45	-66.52	-22.1	-13.0	53.5	Vertical	PK	PASS
780.769	-30.06	-37.15	-7.1	-	-	Vertical	PK	NA
1861.7724	-58.91	-53.84	5.1	-13.0	40.8	Vertical	PK	PASS
5034.7192	-59.85	-54.35	5.5	-13.0	41.4	Vertical	PK	PASS
11107.884	-66.22	-44.31	21.9	-13.0	31.3	Vertical	PK	PASS
16598.824	-70.12	-44.18	25.9	-13.0	31.2	Vertical	PK	PASS




5G SA_n25

Plot for Low Channel

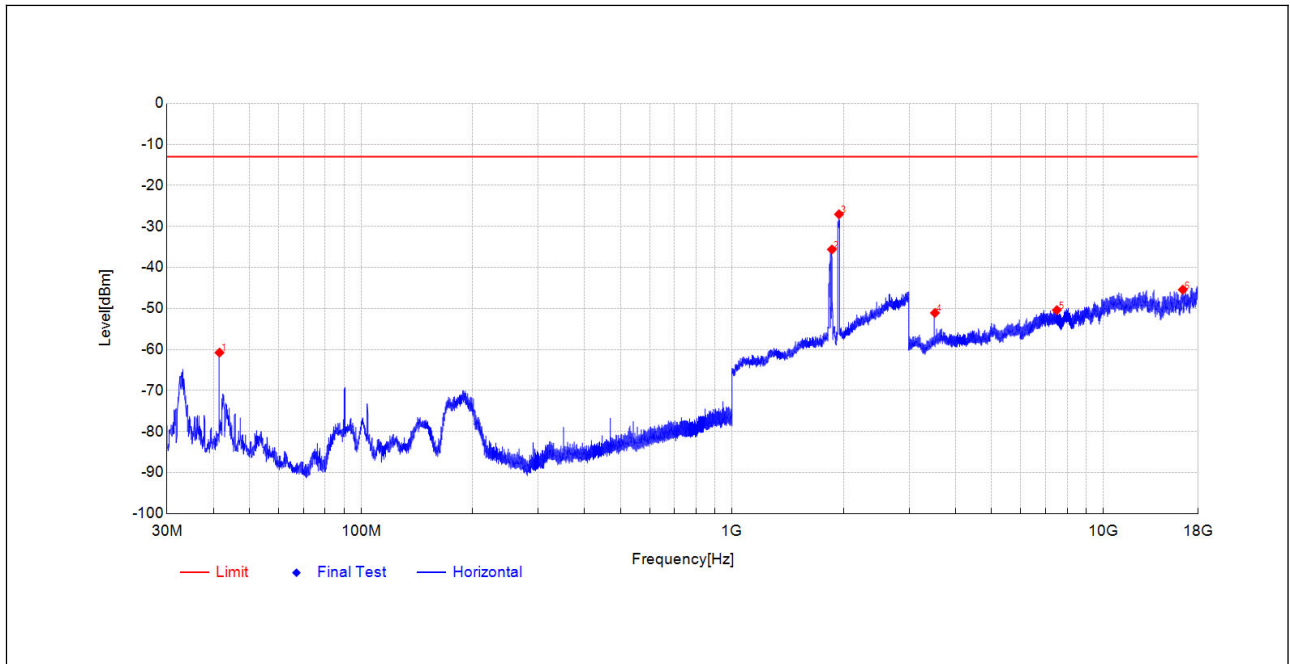

Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
41.5436	-45.43	-60.75	-15.3	-13.0	47.8	Horizontal	PK	PASS
1858.1716	-40.05	-35.61	4.4	-	-	Horizontal	PK	NA
1941.3883	-31.18	-27.02	4.2	-	-	Horizontal	PK	NA
3520.3601	-52.26	-51.08	1.2	-13.0	38.1	Horizontal	PK	PASS
7501.9801	-62.72	-50.39	12.3	-13.0	37.4	Horizontal	PK	PASS
16394.815	-71.10	-45.41	25.7	-13.0	32.4	Horizontal	PK	PASS

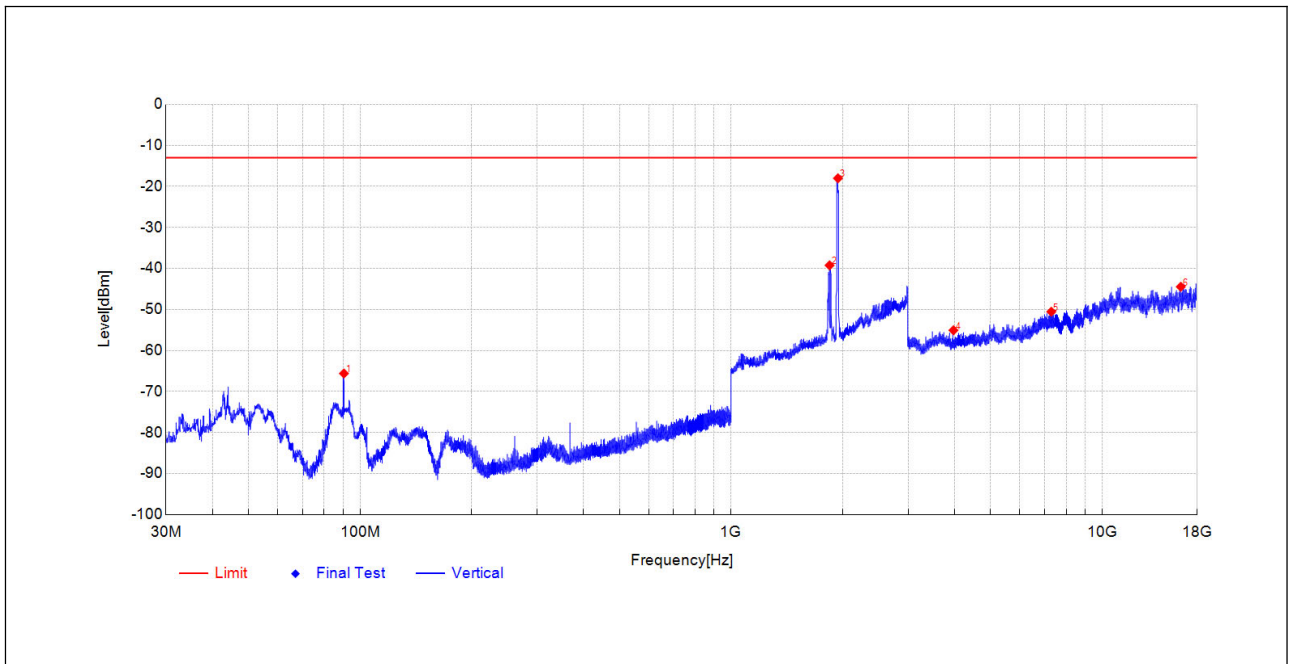


Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
90.4825	-43.31	-65.59	-22.3	-13.0	52.6	Vertical	PK	PASS
1842.5685	-43.73	-39.22	4.5	-	-	Vertical	PK	NA
1940.9882	-21.93	-18.00	3.9	-	-	Vertical	PK	NA
3973.8534	-56.13	-55.06	1.1	-13.0	42.1	Vertical	PK	PASS
7294.1318	-62.43	-50.54	11.9	-13.0	37.5	Vertical	PK	PASS
16285.371	-70.65	-44.45	26.2	-13.0	31.5	Vertical	PK	PASS




5G SA_n25

Plot for Mid Channel

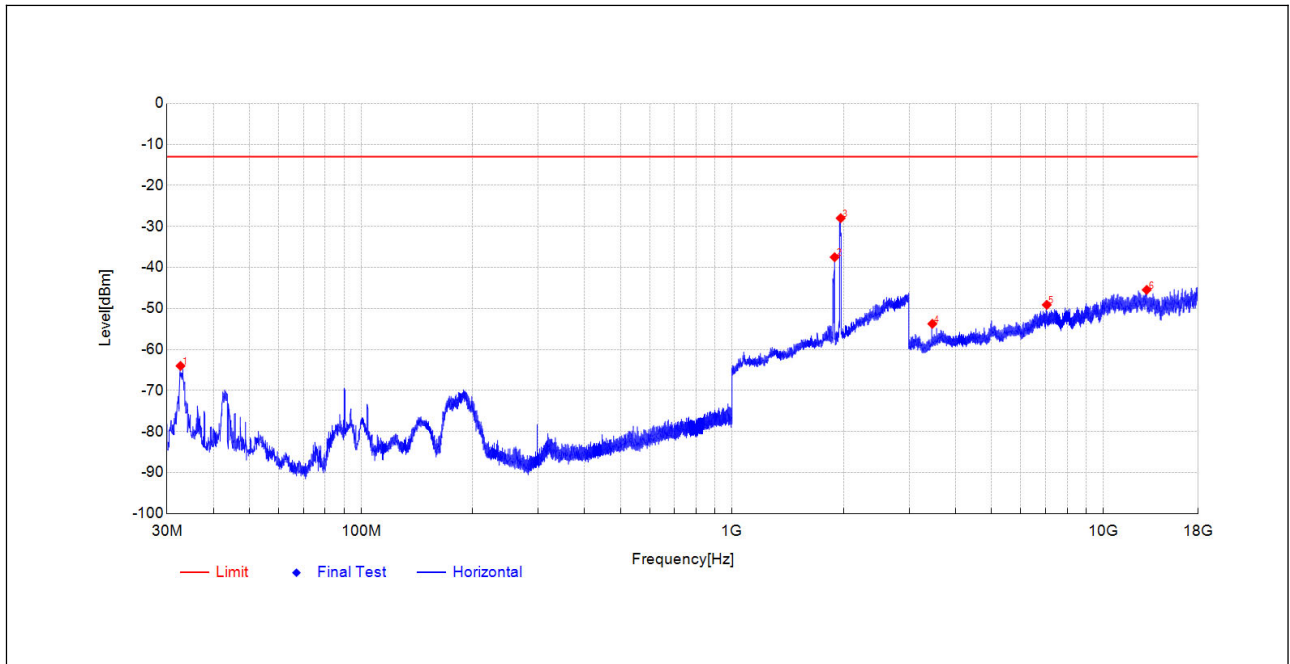

Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
32.6191	-48.79	-64.00	-15.2	-13.0	51.0	Horizontal	PK	PASS
1889.3779	-42.41	-37.49	4.9	-	-	Horizontal	PK	NA
1961.7924	-32.48	-27.97	4.5	-	-	Horizontal	PK	NA
3464.2092	-54.48	-53.73	0.8	-13.0	40.7	Horizontal	PK	PASS
7047.8819	-60.81	-49.10	11.7	-13.0	36.1	Horizontal	PK	PASS
13102.364	-69.58	-45.45	24.1	-13.0	32.5	Horizontal	PK	PASS

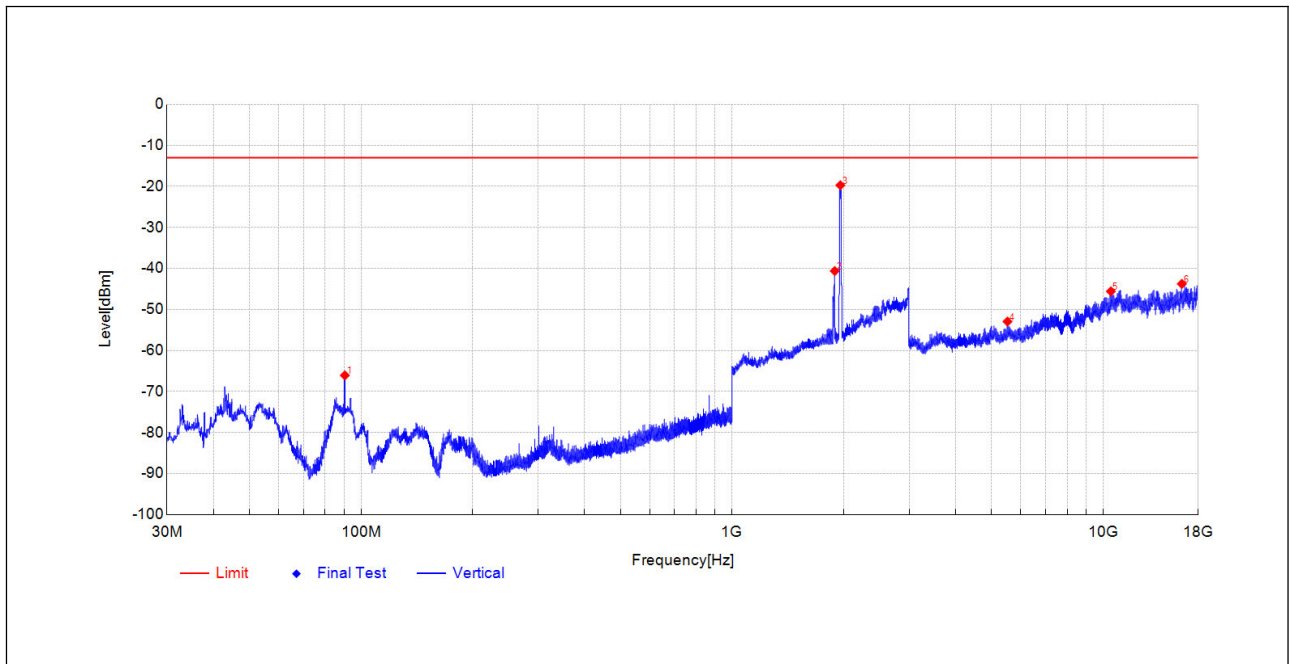


Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
90.434	-43.78	-66.06	-22.3	-13.0	53.1	Vertical	PK	PASS
1890.5781	-45.72	-40.62	5.1	-	-	Vertical	PK	NA
1957.3915	-23.82	-19.70	4.1	-	-	Vertical	PK	NA
5522.5032	-59.04	-52.94	6.1	-13.0	39.9	Vertical	PK	PASS
10490.579	-65.12	-45.57	19.6	-13.0	32.6	Vertical	PK	PASS
16292.571	-69.94	-43.75	26.2	-13.0	30.8	Vertical	PK	PASS




5G SA_n25


Plot for High Channel

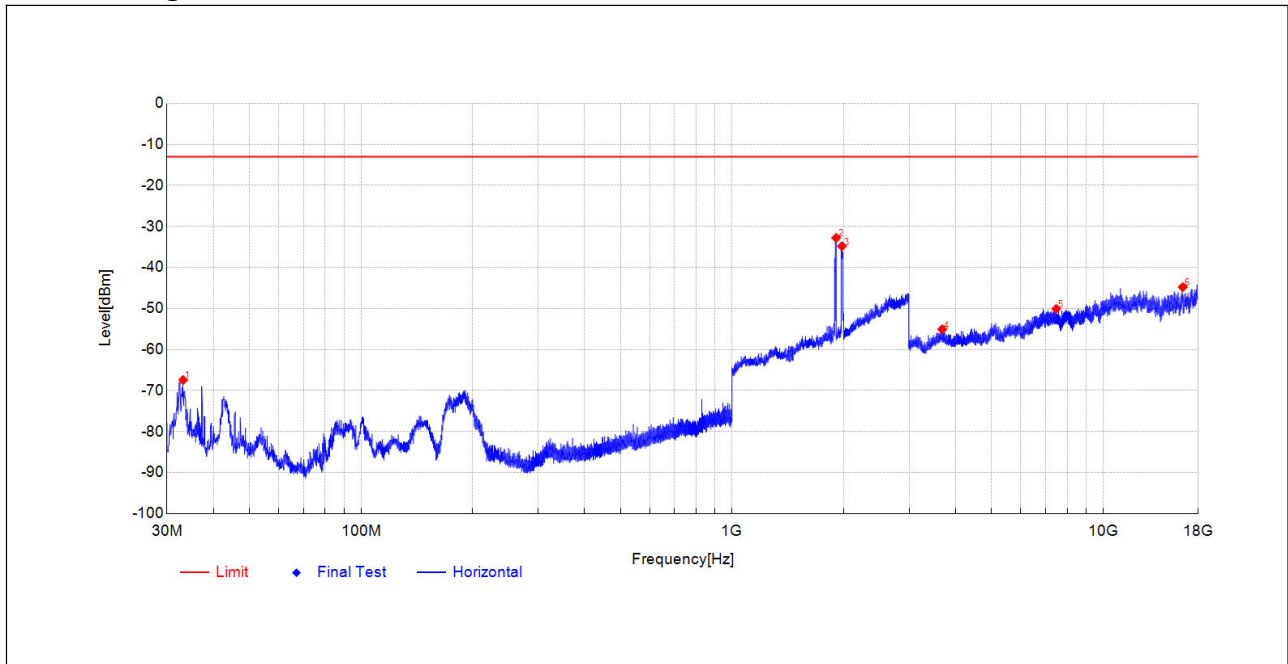


Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
33.1527	-52.22	-67.44	-15.2	-13.0	54.4	Horizontal	PK	PASS
1906.5813	-37.05	-32.77	4.3	-	-	Horizontal	PK	NA
1976.1952	-39.43	-34.81	4.6	-	-	Horizontal	PK	NA
3683.6691	-56.82	-55.06	1.8	-13.0	42.1	Horizontal	PK	PASS
7475.099	-62.42	-50.09	12.3	-13.0	37.1	Horizontal	PK	PASS
16387.135	-70.35	-44.78	25.6	-13.0	31.8	Horizontal	PK	PASS

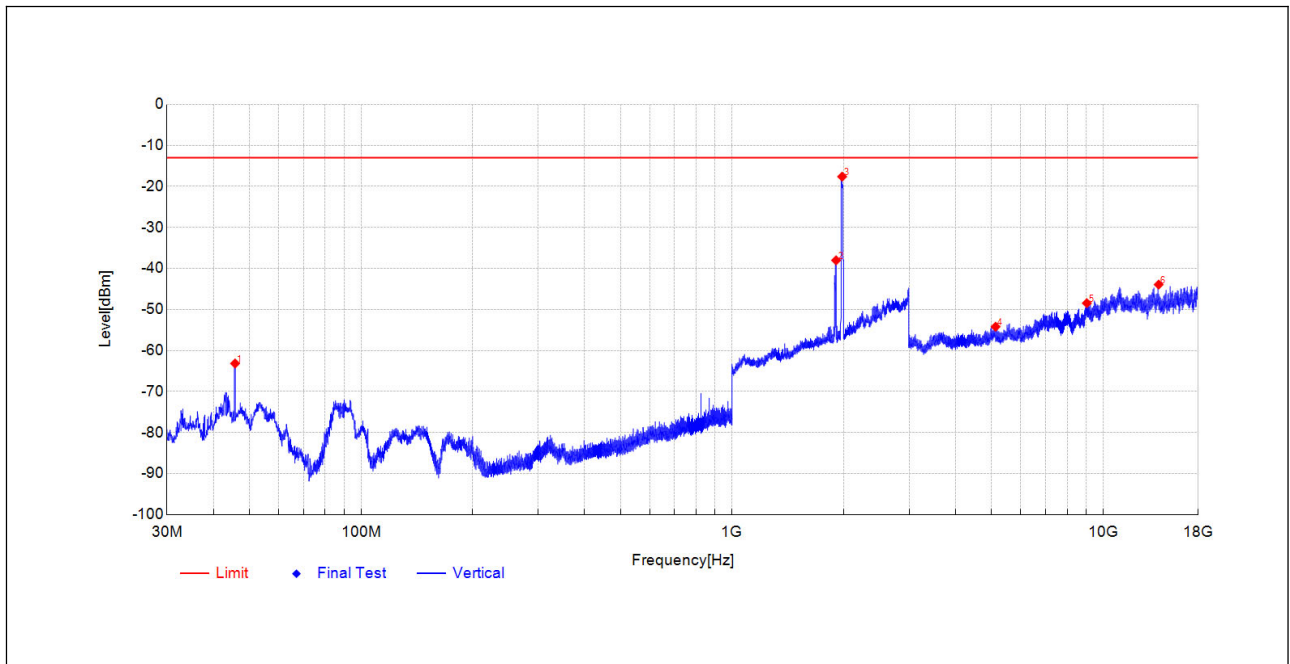


Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
45.7633	-43.17	-63.16	-20.0	-13.0	50.2	Vertical	PK	PASS
1906.5813	-43.01	-38.00	5.0	-	-	Vertical	PK	NA
1979.796	-22.42	-17.59	4.8	-	-	Vertical	PK	NA
5129.4471	-59.49	-54.19	5.3	-13.0	41.2	Vertical	PK	PASS
9037.5615	-64.41	-48.46	16.0	-13.0	35.5	Vertical	PK	PASS
14112.804	-69.00	-43.92	25.1	-13.0	30.9	Vertical	PK	PASS

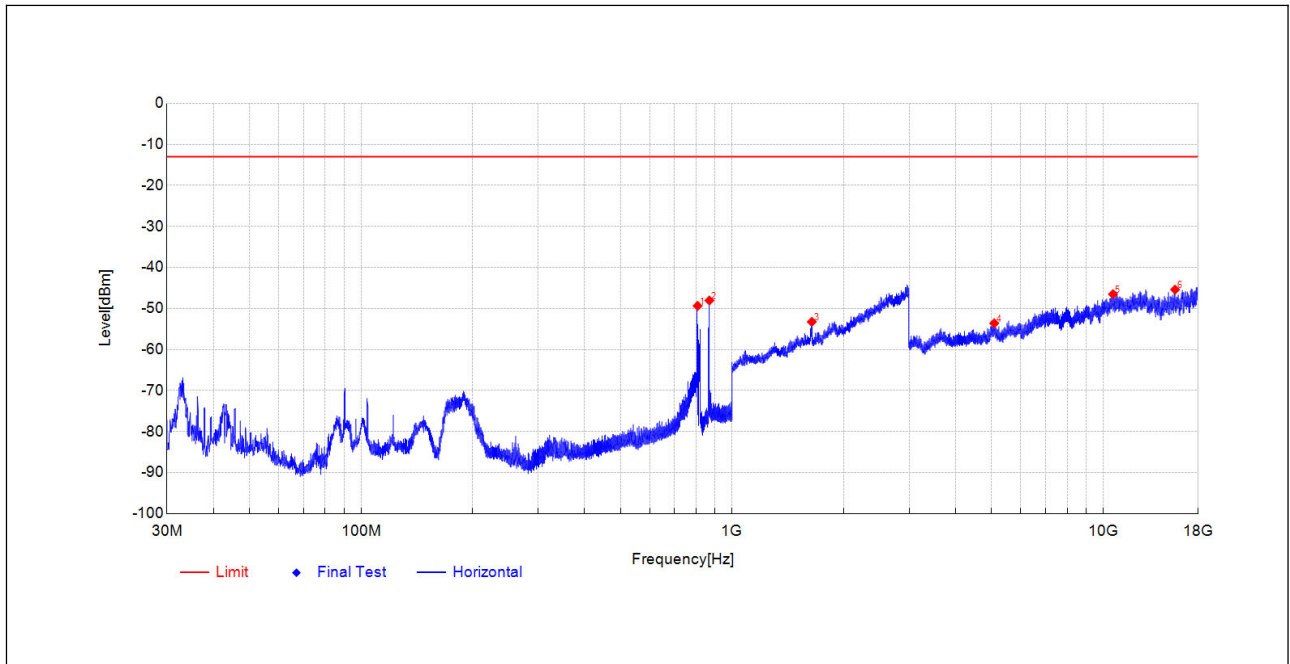**5G SA_n26(814-824MHz)****Plot for Mid Channel**


Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
807.4939	-43.27	-49.35	-6.1	-	-	Horizontal	PK	NA
868.3159	-43.16	-48.04	-4.9	-	-	Horizontal	PK	NA
1640.128	-56.05	-53.25	2.8	-13.0	40.3	Horizontal	PK	PASS
5087.0124	-59.65	-53.59	6.1	-13.0	40.6	Horizontal	PK	PASS
10629.785	-65.71	-46.50	19.2	-13.0	33.5	Horizontal	PK	PASS
15623.905	-70.18	-45.39	24.8	-13.0	32.4	Horizontal	PK	PASS

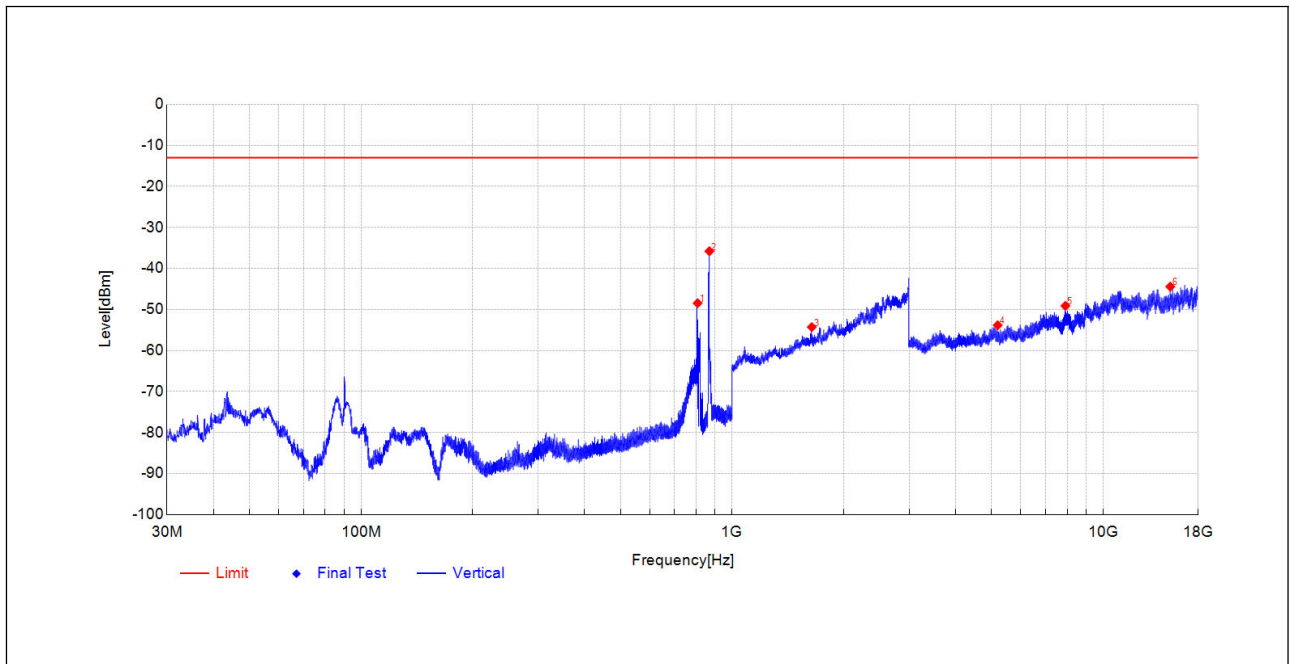


Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
807.5909	-42.79	-48.44	-5.7	-	-	Vertical	PK	NA
868.5099	-30.89	-35.78	-4.9	-	-	Vertical	PK	NA
1639.3279	-56.86	-54.29	2.6	-13.0	41.3	Vertical	PK	PASS
5197.171	-58.76	-53.84	4.9	-13.0	40.8	Vertical	PK	PASS
7912.8765	-61.54	-49.10	12.4	-13.0	36.1	Vertical	PK	PASS
15166.926	-69.02	-44.41	24.6	-13.0	31.4	Vertical	PK	PASS

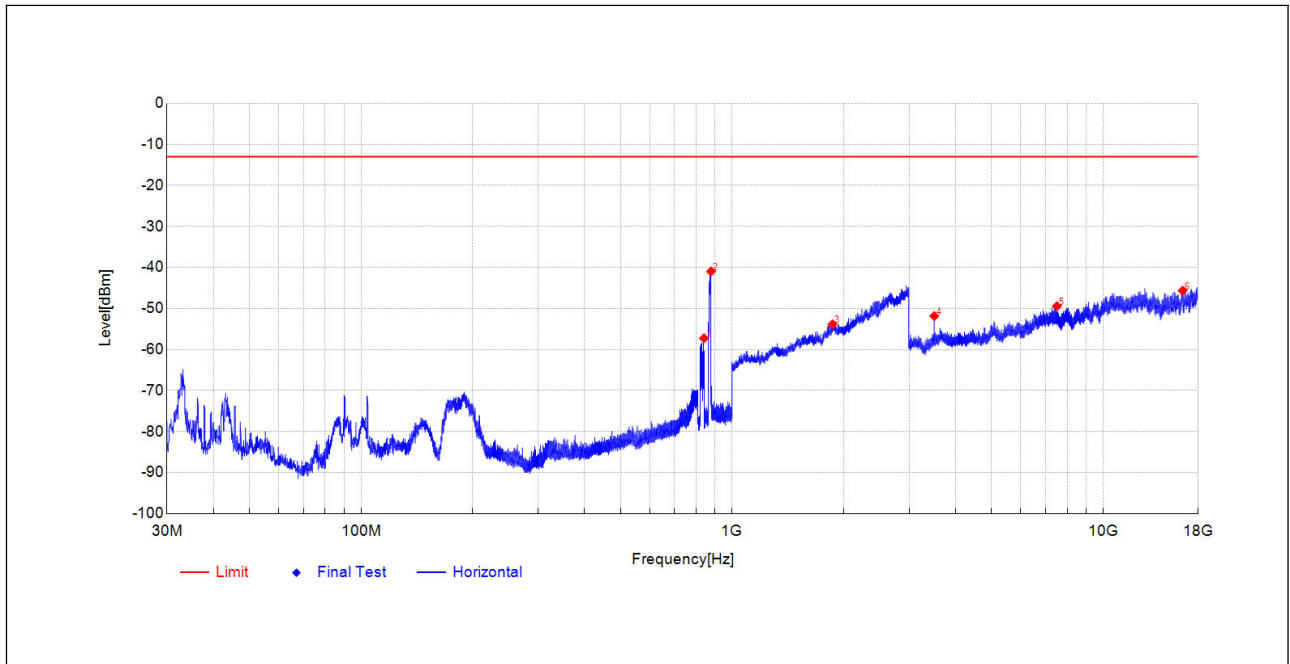**5G SA_n26(824-849MHz)****Plot for Low Channel**


Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
839.942	-51.82	-57.25	-5.4	-	-	Horizontal	PK	NA
877.4344	-36.18	-40.96	-4.8	-	-	Horizontal	PK	NA
1864.1728	-59.29	-53.87	5.4	-13.0	40.9	Horizontal	PK	PASS
3507.5011	-52.93	-51.84	1.1	-13.0	38.8	Horizontal	PK	PASS
7507.2603	-61.74	-49.44	12.3	-13.0	36.4	Horizontal	PK	PASS
16370.814	-70.97	-45.65	25.3	-13.0	32.7	Horizontal	PK	PASS

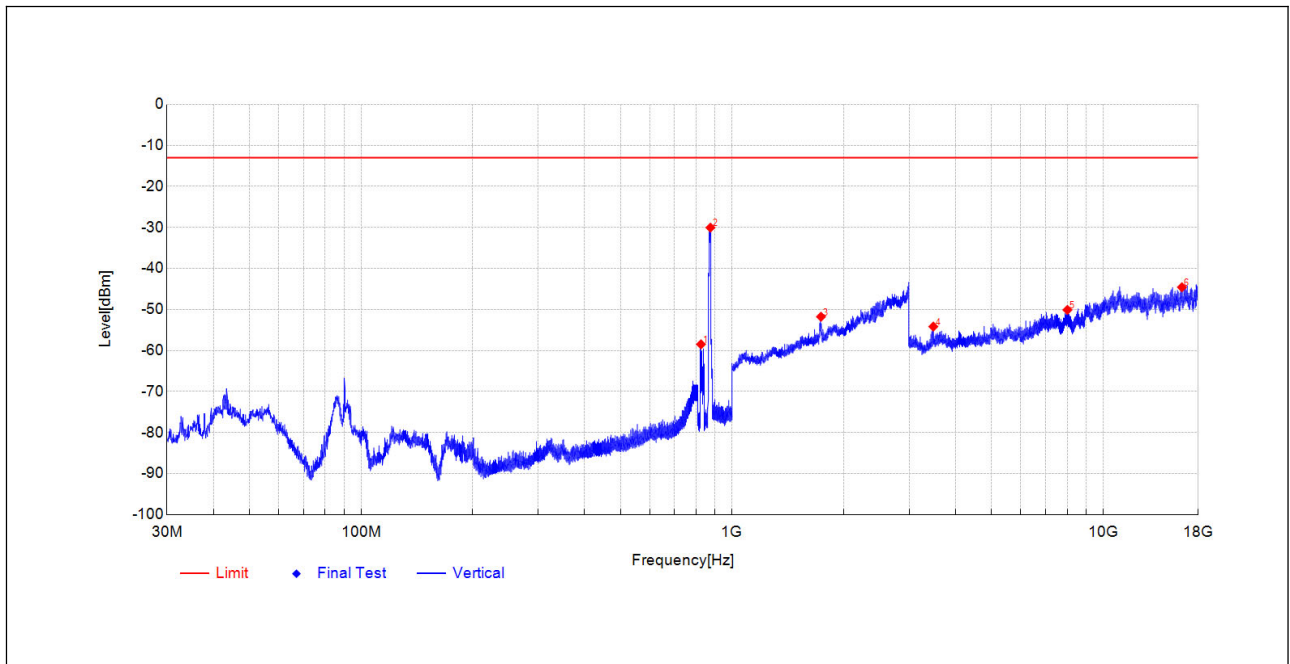


Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
824.5182	-52.59	-58.48	-5.9	-	-	Vertical	PK	NA
874.1362	-25.34	-30.03	-4.7	-	-	Vertical	PK	NA
1736.1472	-54.98	-51.76	3.2	-13.0	38.8	Vertical	PK	PASS
3486.0694	-55.33	-54.16	1.2	-13.0	41.2	Vertical	PK	PASS
8011.2805	-63.08	-50.10	13.0	-13.0	37.1	Vertical	PK	PASS
16300.732	-70.74	-44.57	26.2	-13.0	31.6	Vertical	PK	PASS

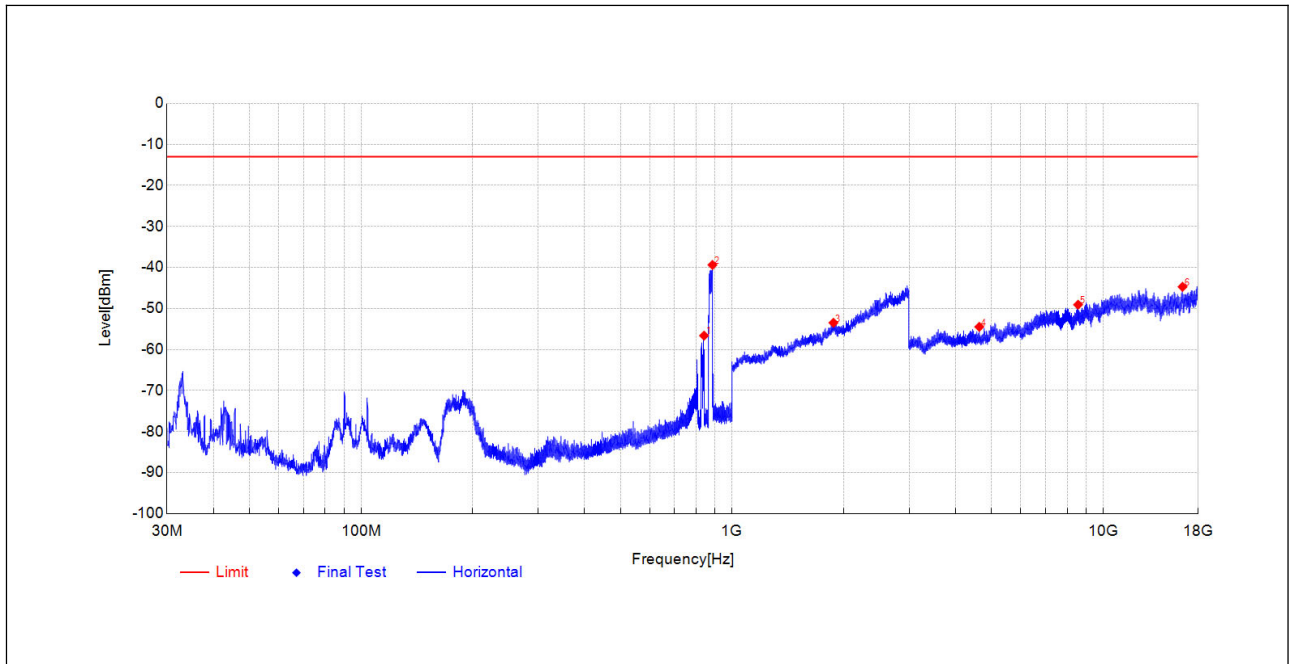**5G SA_n26(824-849MHz)****Plot for Mid Channel**


Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
840.1845	-51.19	-56.62	-5.4	-	-	Horizontal	PK	NA
885.2433	-34.65	-39.37	-4.7	-	-	Horizontal	PK	NA
1875.3751	-59.37	-53.48	5.9	-13.0	40.5	Horizontal	PK	PASS
4636.5195	-57.71	-54.47	3.2	-13.0	41.5	Horizontal	PK	PASS
8559.4624	-63.21	-49.07	14.1	-13.0	36.1	Horizontal	PK	PASS
16367.934	-69.99	-44.71	25.3	-13.0	31.7	Horizontal	PK	PASS

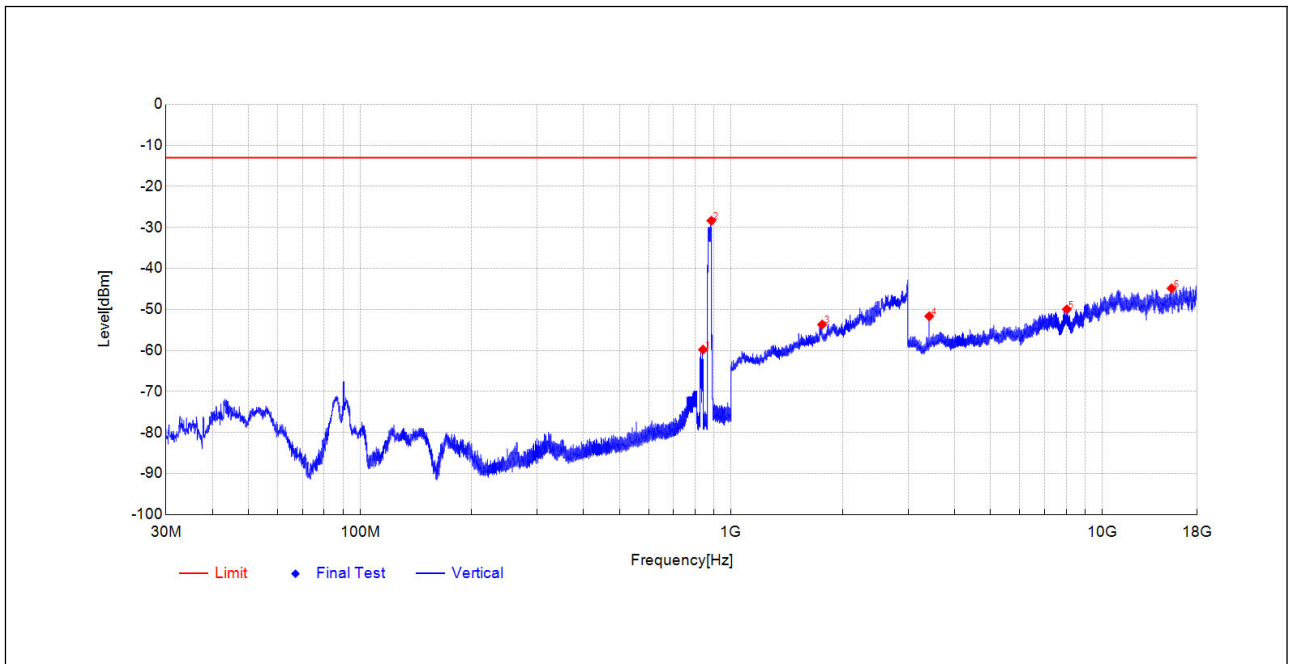

Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
840.1845	-54.05	-59.78	-5.7	-	-	Vertical	PK	NA
884.7582	-23.89	-28.35	-4.5	-	-	Vertical	PK	NA
1759.3519	-57.00	-53.66	3.3	-13.0	40.7	Vertical	PK	PASS
3419.2027	-52.15	-51.64	0.5	-13.0	38.6	Vertical	PK	PASS
8030.9612	-62.96	-49.97	13.0	-13.0	37.0	Vertical	PK	PASS
15380.535	-70.14	-44.85	25.3	-13.0	31.9	Vertical	PK	PASS

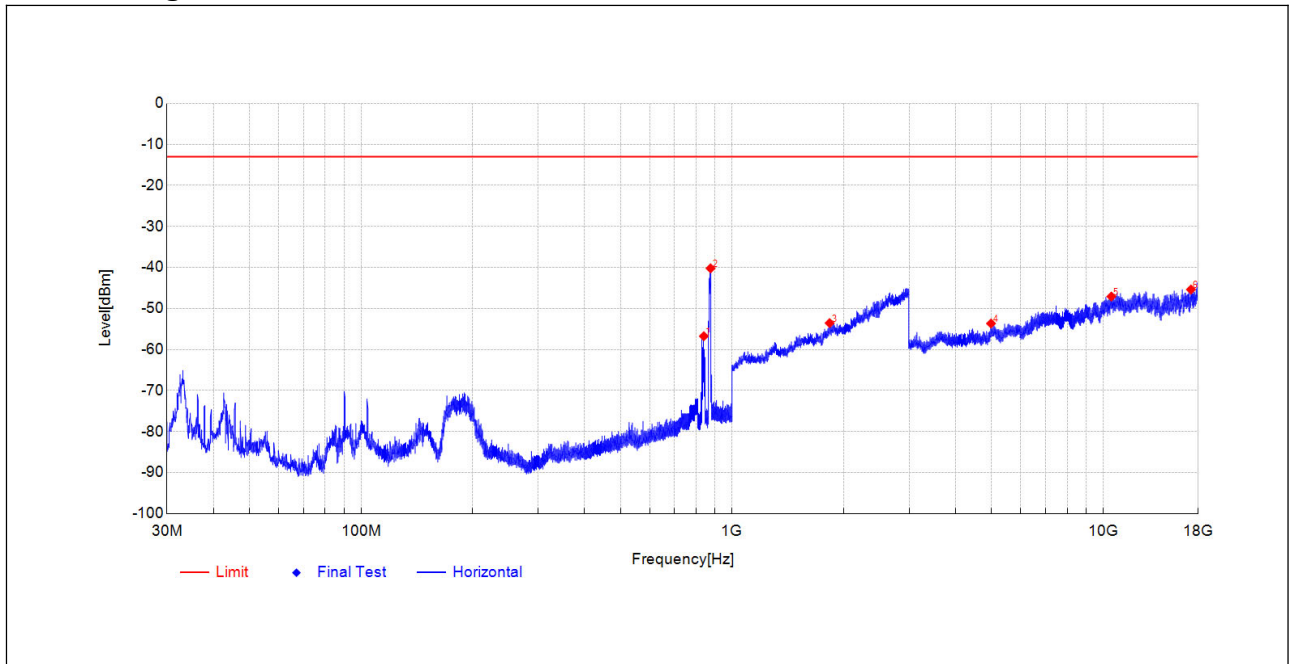**5G SA_n26(824-849MHz)****Plot for High Channel**

Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
839.069	-51.29	-56.75	-5.5	-	-	Horizontal	PK	NA
874.8152	-35.40	-40.20	-4.8	-	-	Horizontal	PK	NA
1831.3663	-58.34	-53.55	4.8	-13.0	40.6	Horizontal	PK	PASS
4986.2838	-59.47	-53.65	5.8	-13.0	40.7	Horizontal	PK	PASS
10520.820	-66.42	-47.07	19.4	-13.0	34.1	Horizontal	PK	PASS
17241.089	-68.79	-45.37	23.4	-13.0	32.4	Horizontal	PK	PASS

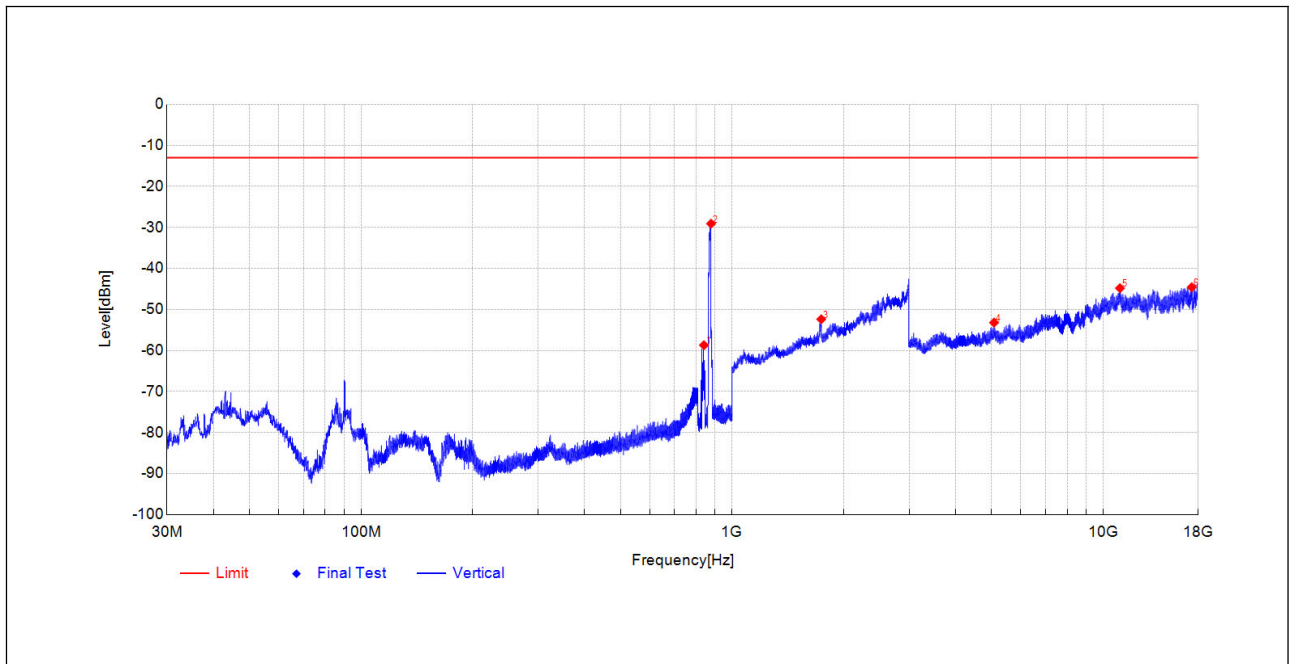


Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
839.6995	-52.95	-58.70	-5.8	-	-	Vertical	PK	NA
877.5799	-24.50	-29.07	-4.6	-	-	Vertical	PK	NA
1738.5477	-55.61	-52.38	3.2	-13.0	39.4	Vertical	PK	PASS
5083.1547	-58.66	-53.19	5.5	-13.0	40.2	Vertical	PK	PASS
11097.323	-66.74	-44.80	21.9	-13.0	31.8	Vertical	PK	PASS
17325.093	-69.21	-44.57	24.6	-13.0	31.6	Vertical	PK	PASS




5G SA_n38

Plot for Low Channel

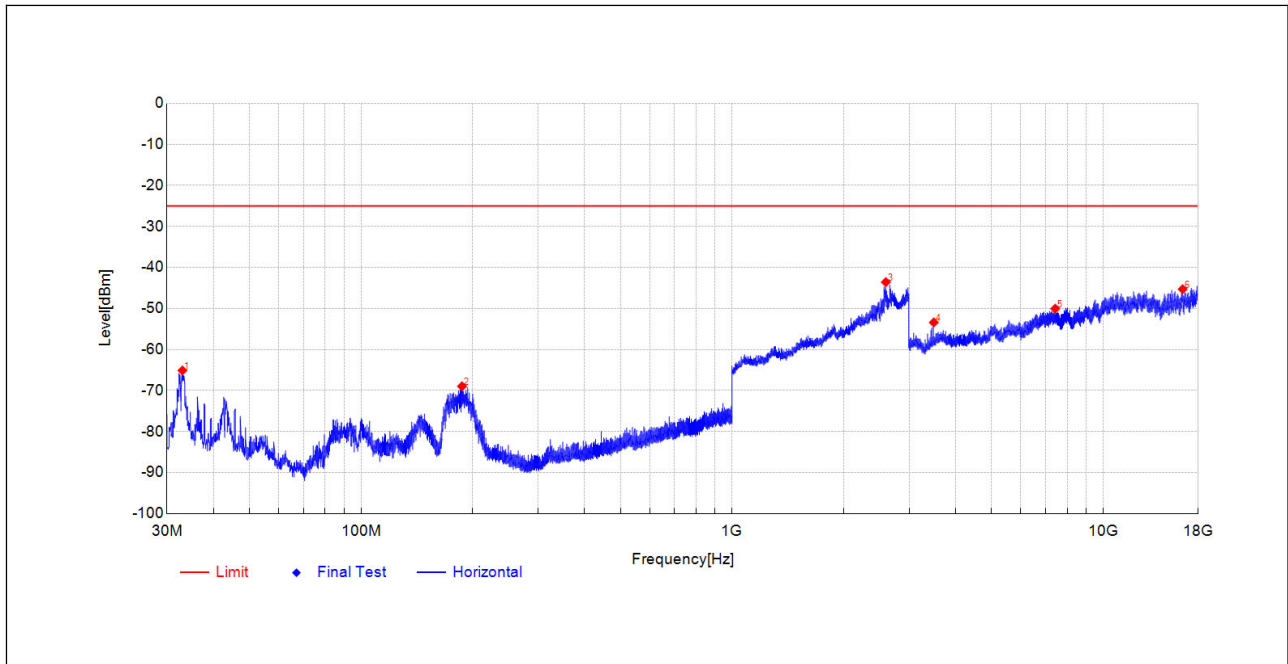

Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
33.0072	-49.95	-65.10	-15.2	-25.0	40.1	Horizontal	PK	PASS
187.0994	-48.96	-68.97	-20.0	-25.0	44.0	Horizontal	PK	PASS
2595.9192	-55.99	-43.56	12.4	-	-	Horizontal	PK	NA
3496.3566	-54.41	-53.39	1.0	-25.0	28.4	Horizontal	PK	PASS
7425.177	-62.33	-50.04	12.3	-25.0	25.0	Horizontal	PK	PASS
16376.095	-70.70	-45.29	25.4	-25.0	20.3	Horizontal	PK	PASS

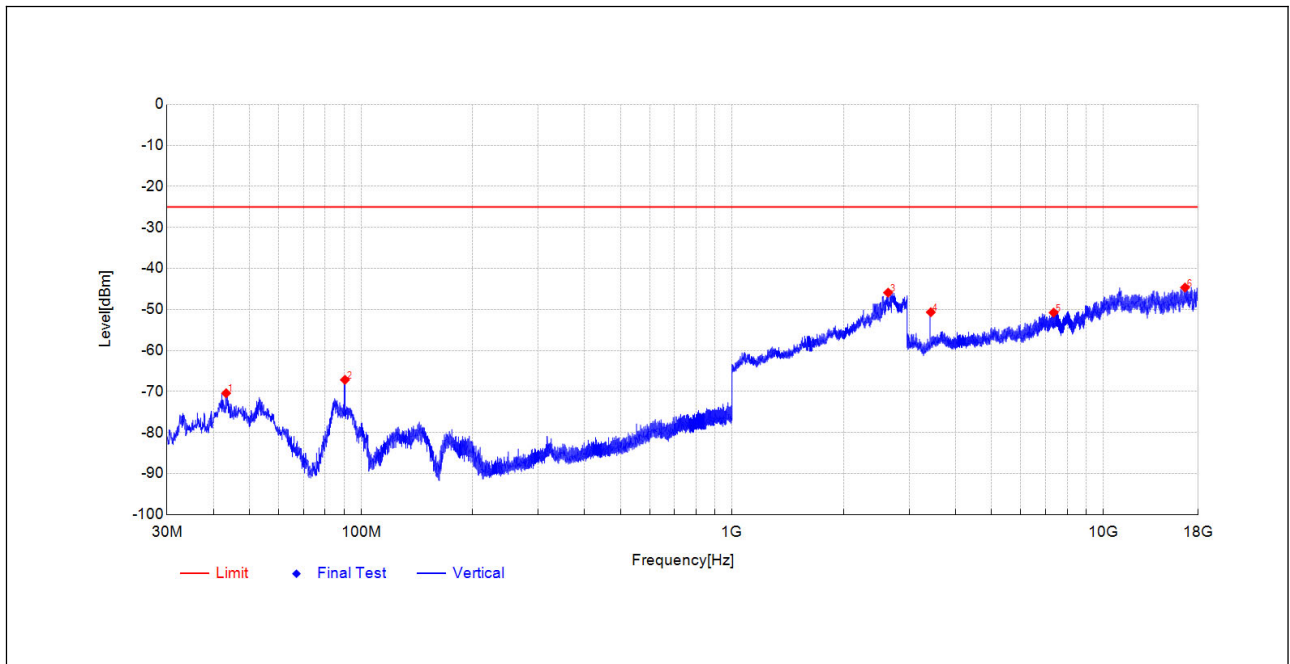


Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
43.2897	-49.65	-70.41	-20.8	-25.0	45.4	Vertical	PK	PASS
90.4825	-44.93	-67.15	-22.2	-25.0	42.2	Vertical	PK	PASS
2633.5267	-59.15	-45.89	13.3	-25.0	20.9	Vertical	PK	PASS
3431.6331	-51.30	-50.66	0.6	-25.0	25.7	Vertical	PK	PASS
7352.6941	-62.45	-50.76	11.7	-25.0	25.8	Vertical	PK	PASS
16617.064	-70.51	-44.65	25.9	-25.0	19.7	Vertical	PK	PASS




5G SA_n38

Plot for Mid Channel

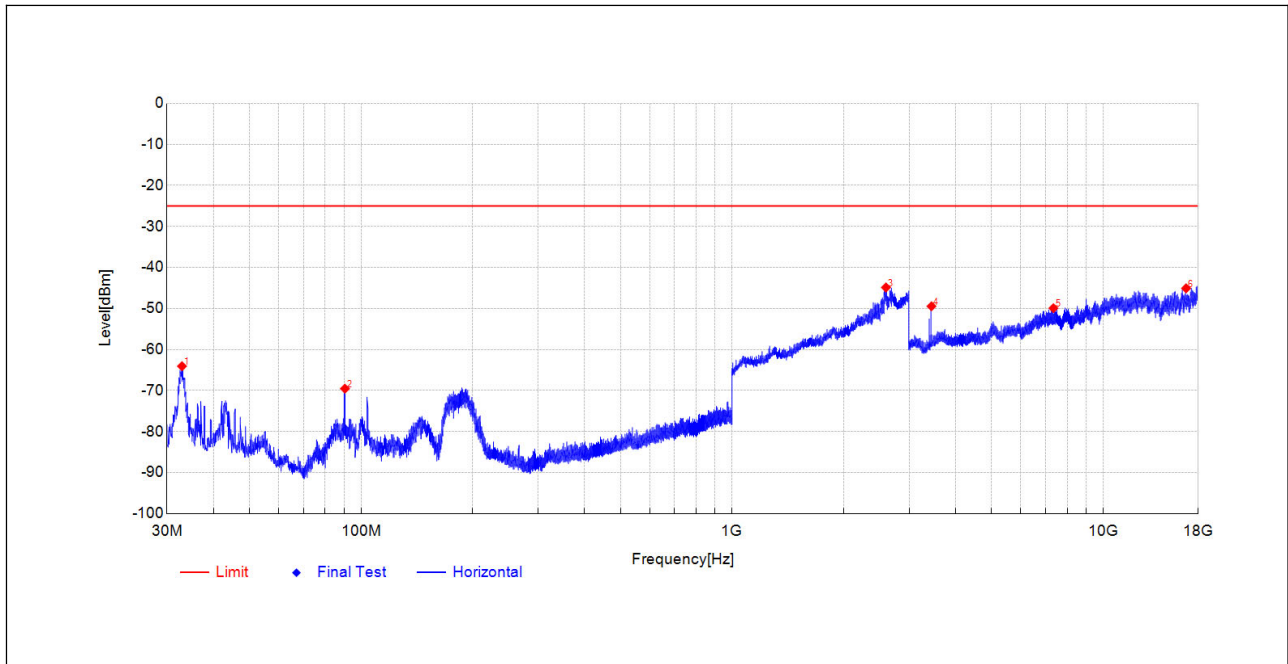

Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
32.9101	-48.92	-64.07	-15.2	-25.0	39.1	Horizontal	PK	PASS
90.4825	-46.23	-69.54	-23.3	-25.0	44.5	Horizontal	PK	PASS
2598.3197	-57.40	-44.87	12.5	-	-	Horizontal	PK	NA
3445.778	-50.05	-49.45	0.6	-25.0	24.5	Horizontal	PK	PASS
7344.5338	-62.34	-49.92	12.4	-25.0	24.9	Horizontal	PK	PASS
16729.389	-69.80	-45.08	24.7	-25.0	20.1	Horizontal	PK	PASS

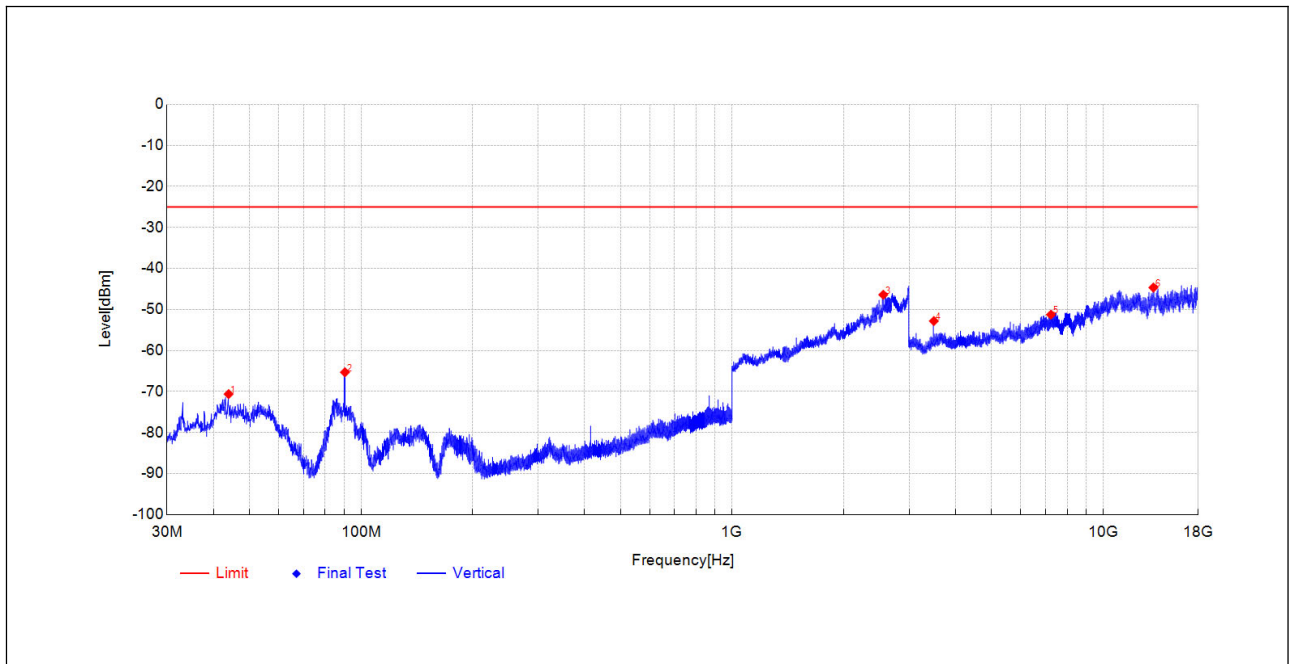


Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
43.9687	-50.09	-70.62	-20.5	-25.0	45.6	Vertical	PK	PASS
90.4825	-43.08	-65.30	-22.2	-25.0	40.3	Vertical	PK	PASS
2555.111	-59.10	-46.40	12.7	-25.0	21.4	Vertical	PK	PASS
3497.2139	-54.09	-52.81	1.3	-25.0	27.8	Vertical	PK	PASS
7232.6893	-62.74	-51.25	11.5	-25.0	26.3	Vertical	PK	PASS
13658.706	-68.86	-44.65	24.2	-25.0	19.7	Vertical	PK	PASS




5G SA_n38


Plot for High Channel

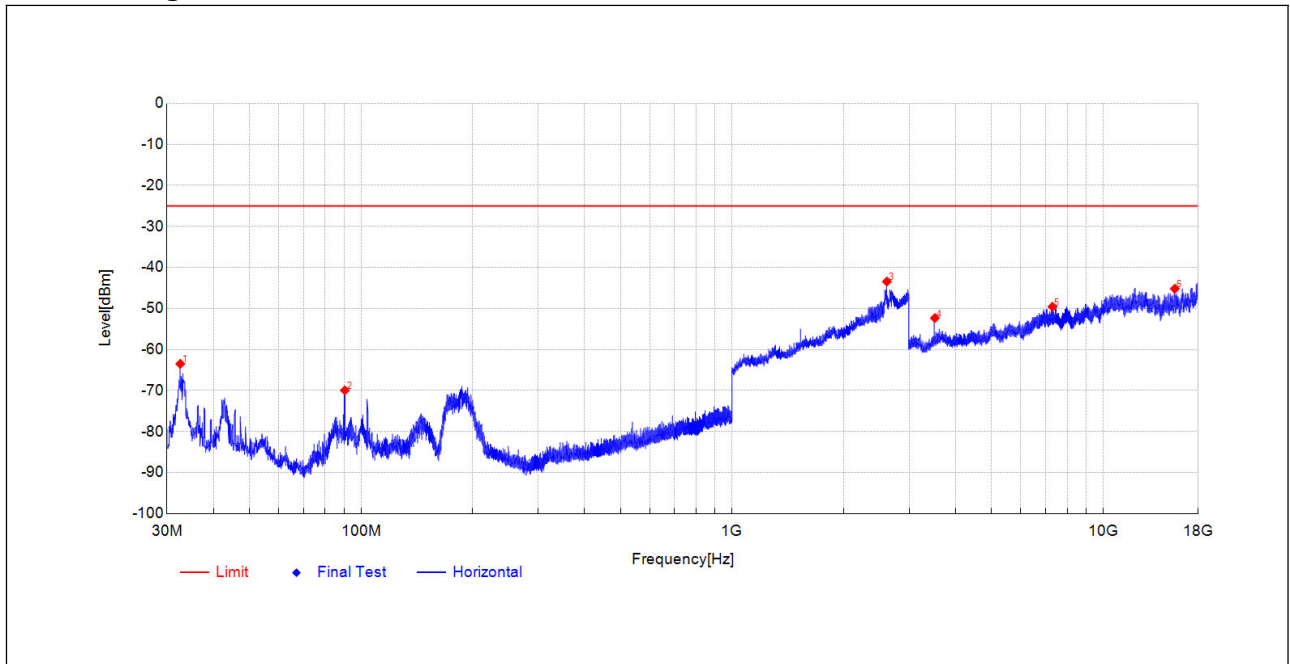


Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
32.5706	-48.33	-63.48	-15.2	-25.0	38.5	Horizontal	PK	PASS
90.434	-46.66	-69.97	-23.3	-25.0	45.0	Horizontal	PK	PASS
2612.7225	-56.02	-43.42	12.6	-25.0	18.4	Horizontal	PK	PASS
3518.6455	-53.49	-52.33	1.2	-25.0	27.3	Horizontal	PK	PASS
7301.3321	-62.10	-49.57	12.5	-25.0	24.6	Horizontal	PK	PASS
15598.463	-70.45	-45.19	25.3	-25.0	20.2	Horizontal	PK	PASS

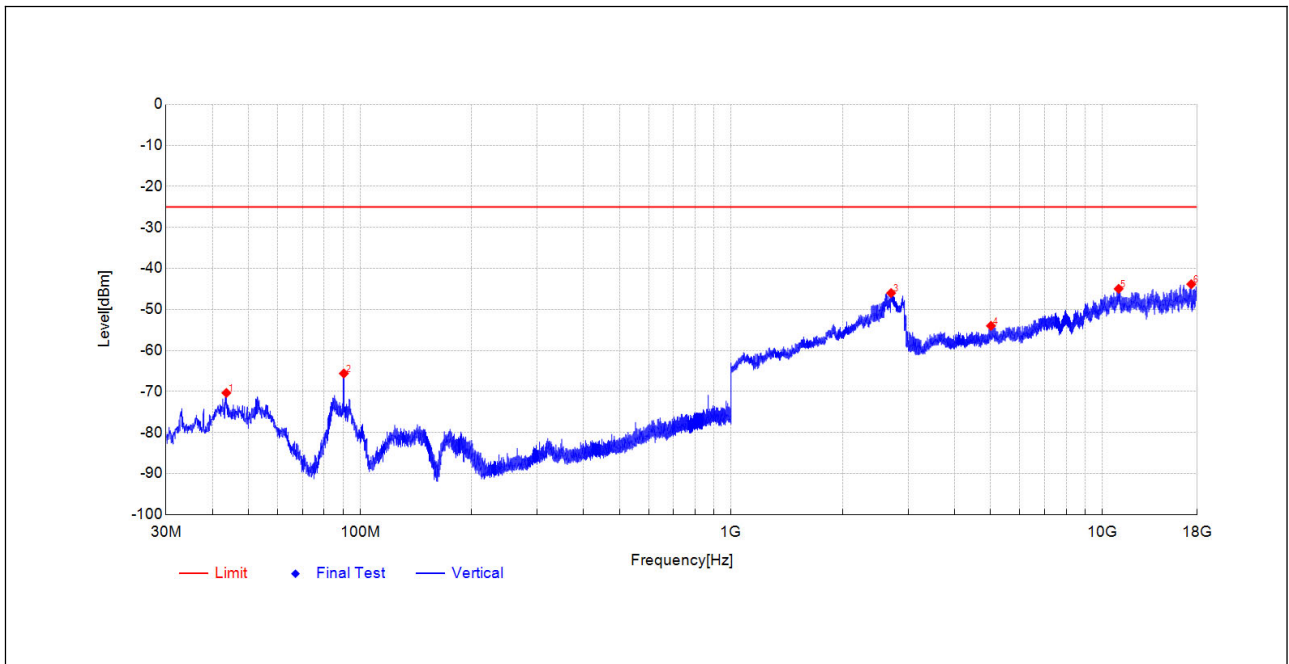


Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
43.6292	-49.68	-70.33	-20.7	-25.0	45.3	Vertical	PK	PASS
90.434	-43.37	-65.59	-22.2	-25.0	40.6	Vertical	PK	PASS
2699.5399	-59.18	-45.99	13.2	-25.0	21.0	Vertical	PK	PASS
5015.8594	-59.51	-53.99	5.5	-25.0	29.0	Vertical	PK	PASS
11077.643	-66.85	-44.96	21.9	-25.0	20.0	Vertical	PK	PASS
17382.215	-68.62	-43.82	24.8	-25.0	18.8	Vertical	PK	PASS

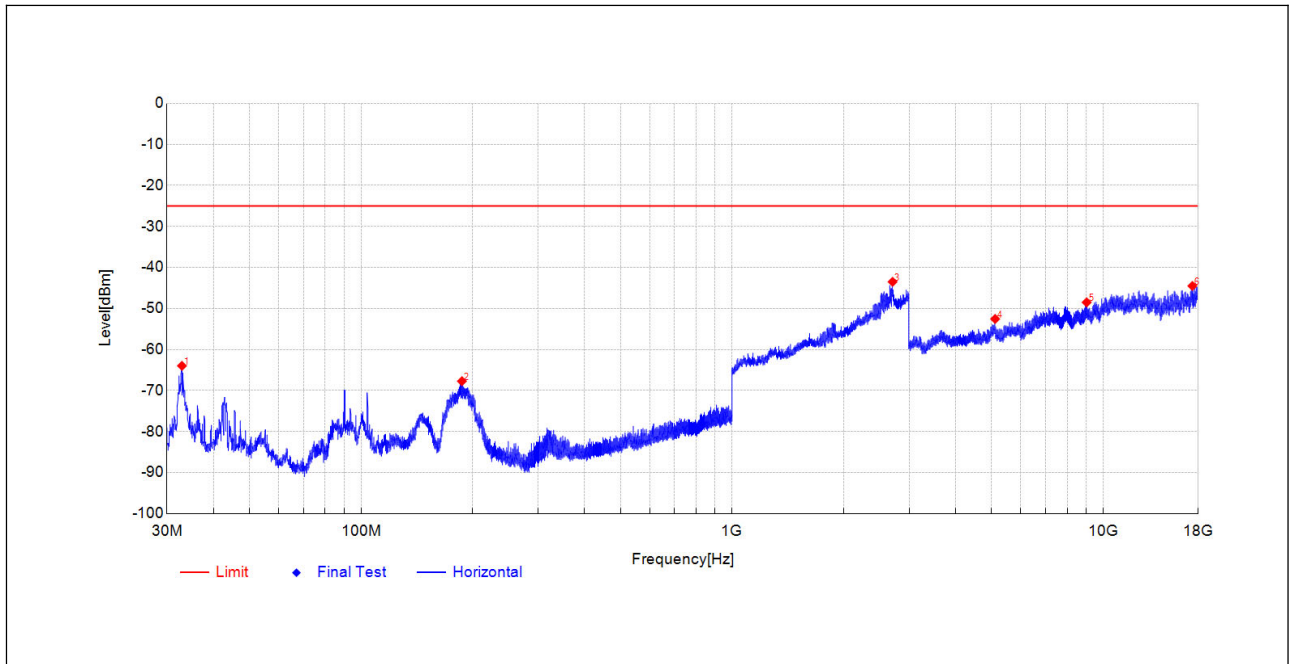**5G SA_n41****Plot for Low Channel**


Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
32.9101	-48.83	-63.98	-15.2	-25.0	39.0	Horizontal	PK	PASS
187.0024	-47.69	-67.72	-20.0	-25.0	42.7	Horizontal	PK	PASS
2707.1414	-56.89	-43.49	13.4	-25.0	18.5	Horizontal	PK	PASS
5114.8736	-58.46	-52.54	5.9	-25.0	27.5	Horizontal	PK	PASS
9029.4012	-64.00	-48.50	15.5	-25.0	23.5	Horizontal	PK	PASS
17395.655	-69.27	-44.50	24.8	-25.0	19.5	Horizontal	PK	PASS

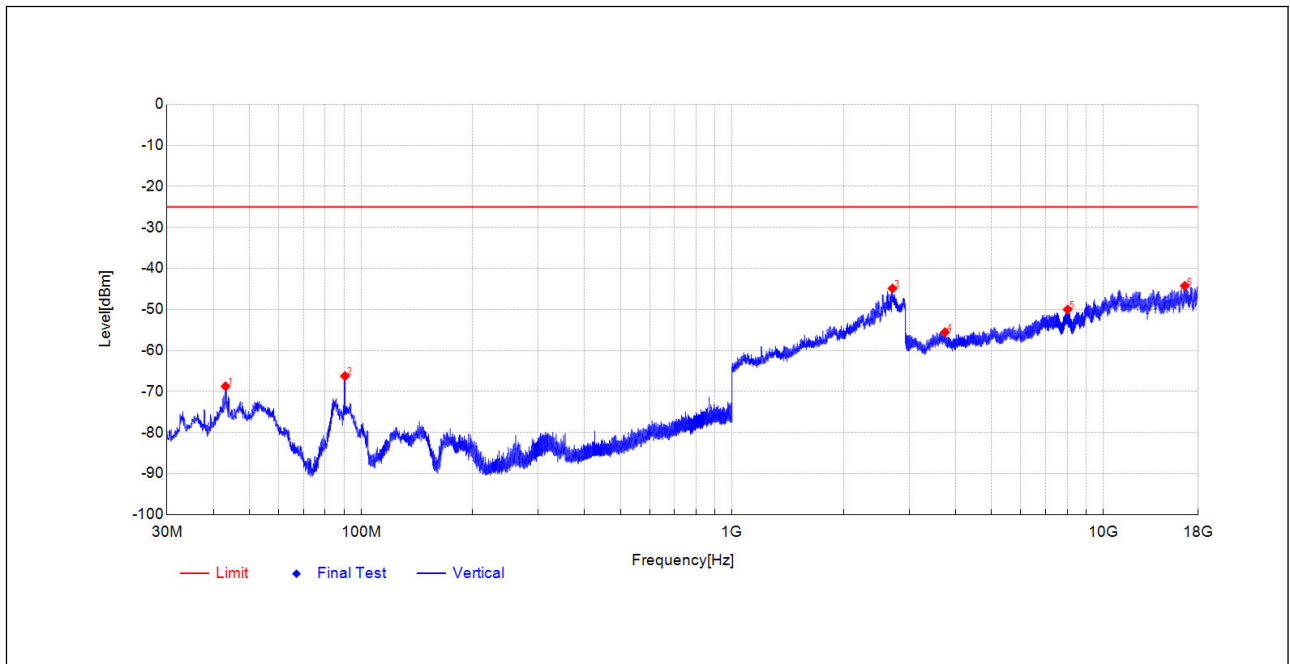

Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
43.1442	-47.91	-68.72	-20.8	-25.0	43.7	Vertical	PK	PASS
90.4825	-44.02	-66.24	-22.2	-25.0	41.2	Vertical	PK	PASS
2705.5411	-58.13	-44.86	13.3	-25.0	19.9	Vertical	PK	PASS
3748.3926	-56.74	-55.53	1.2	-25.0	30.5	Vertical	PK	PASS
8021.3609	-62.98	-50.00	13.0	-25.0	25.0	Vertical	PK	PASS
16602.184	-70.17	-44.23	25.9	-25.0	19.2	Vertical	PK	PASS

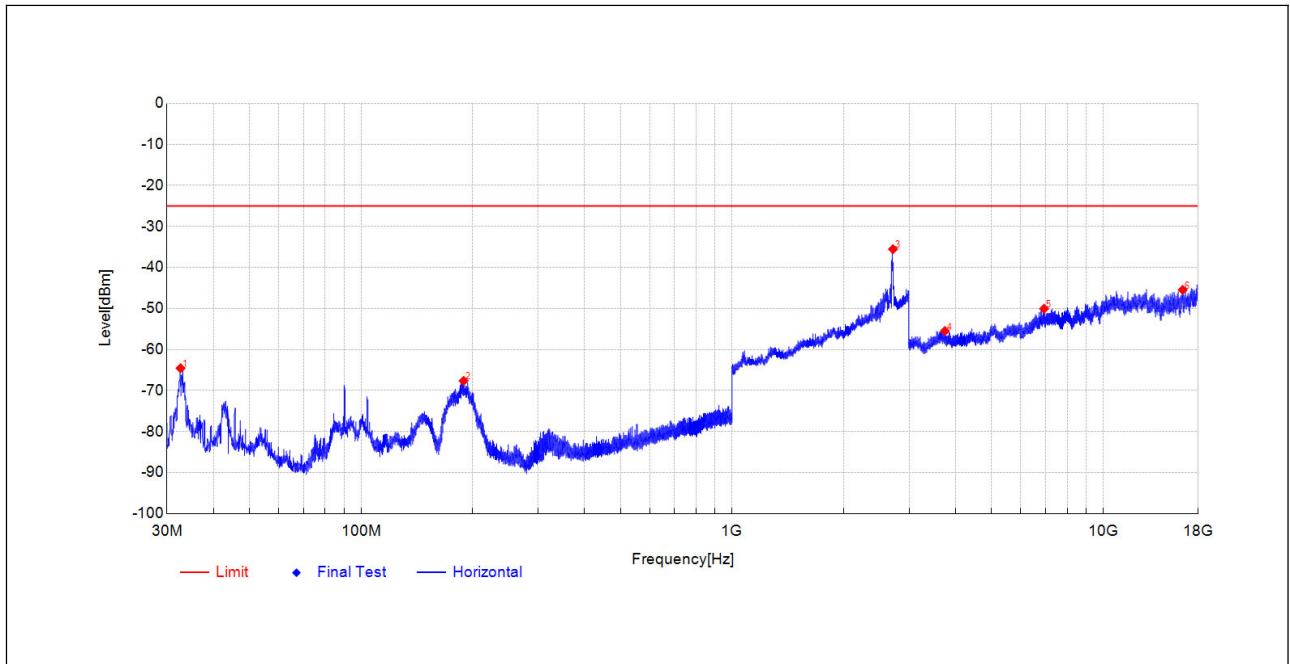**5G SA_n41****Plot for Mid Channel**

Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
32.6191	-49.41	-64.56	-15.2	-25.0	39.6	Horizontal	PK	PASS
188.9424	-47.94	-67.63	-19.7	-25.0	42.6	Horizontal	PK	PASS
2713.5427	-48.70	-35.53	13.2	-25.0	10.5	Horizontal	PK	PASS
3744.5349	-56.81	-55.48	1.3	-25.0	30.5	Horizontal	PK	PASS
6928.8372	-61.60	-50.06	11.5	-25.0	25.1	Horizontal	PK	PASS
16384.735	-71.00	-45.46	25.5	-25.0	20.5	Horizontal	PK	PASS

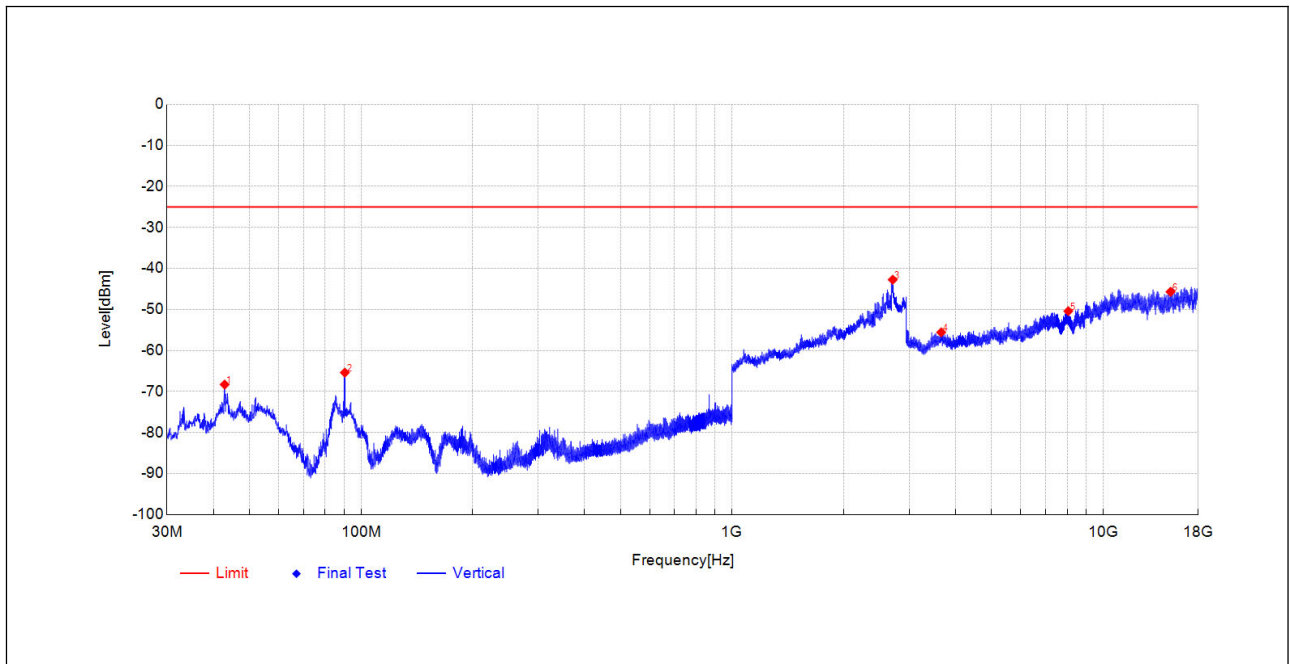


Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
42.9016	-47.42	-68.30	-20.9	-25.0	43.3	Vertical	PK	PASS
90.434	-43.17	-65.39	-22.2	-25.0	40.4	Vertical	PK	PASS
2709.5419	-55.93	-42.73	13.2	-25.0	17.7	Vertical	PK	PASS
3660.0943	-57.22	-55.56	1.7	-25.0	30.6	Vertical	PK	PASS
8053.5221	-63.38	-50.39	13.0	-25.0	25.4	Vertical	PK	PASS
15189.007	-70.75	-45.68	25.1	-25.0	20.7	Vertical	PK	PASS




5G SA_n41

Plot for High Channel

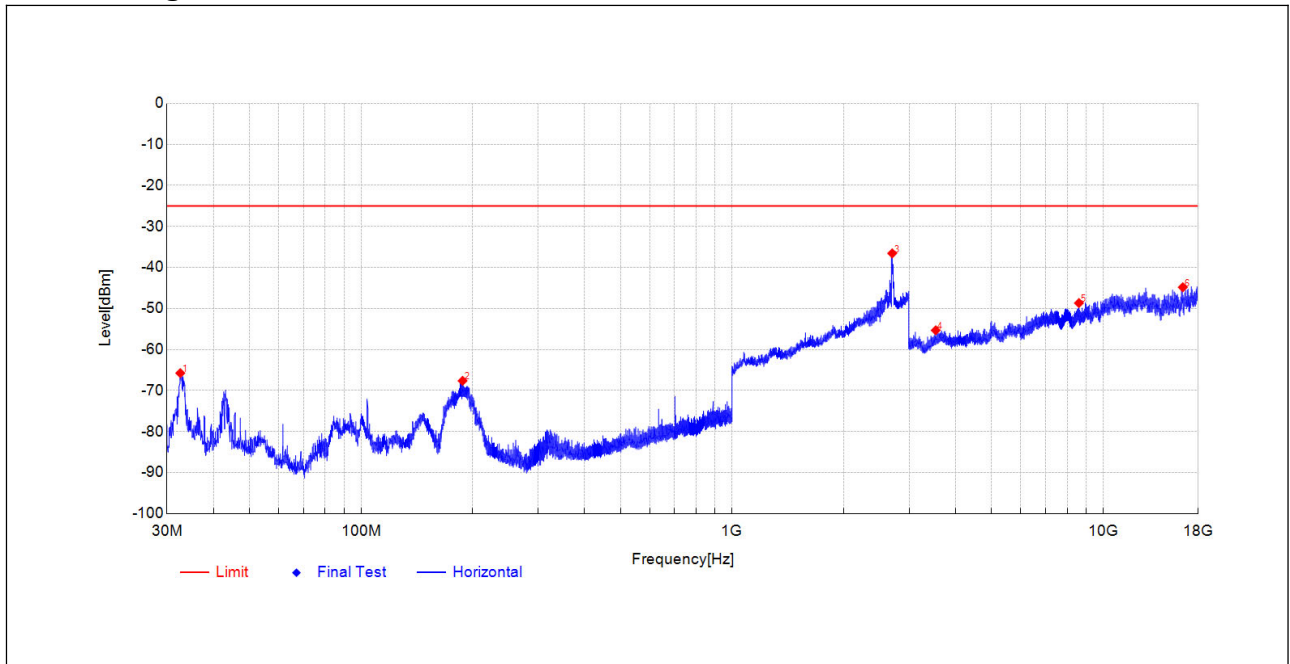

Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
32.5706	-50.61	-65.76	-15.2	-25.0	40.8	Horizontal	PK	PASS
187.7784	-47.74	-67.63	-19.9	-25.0	42.6	Horizontal	PK	PASS
2700.7401	-50.13	-36.55	13.6	-25.0	11.6	Horizontal	PK	PASS
3537.934	-56.58	-55.31	1.3	-25.0	30.3	Horizontal	PK	PASS
8604.1042	-63.14	-48.67	14.5	-25.0	23.7	Horizontal	PK	PASS
16389.535	-70.43	-44.82	25.6	-25.0	19.8	Horizontal	PK	PASS

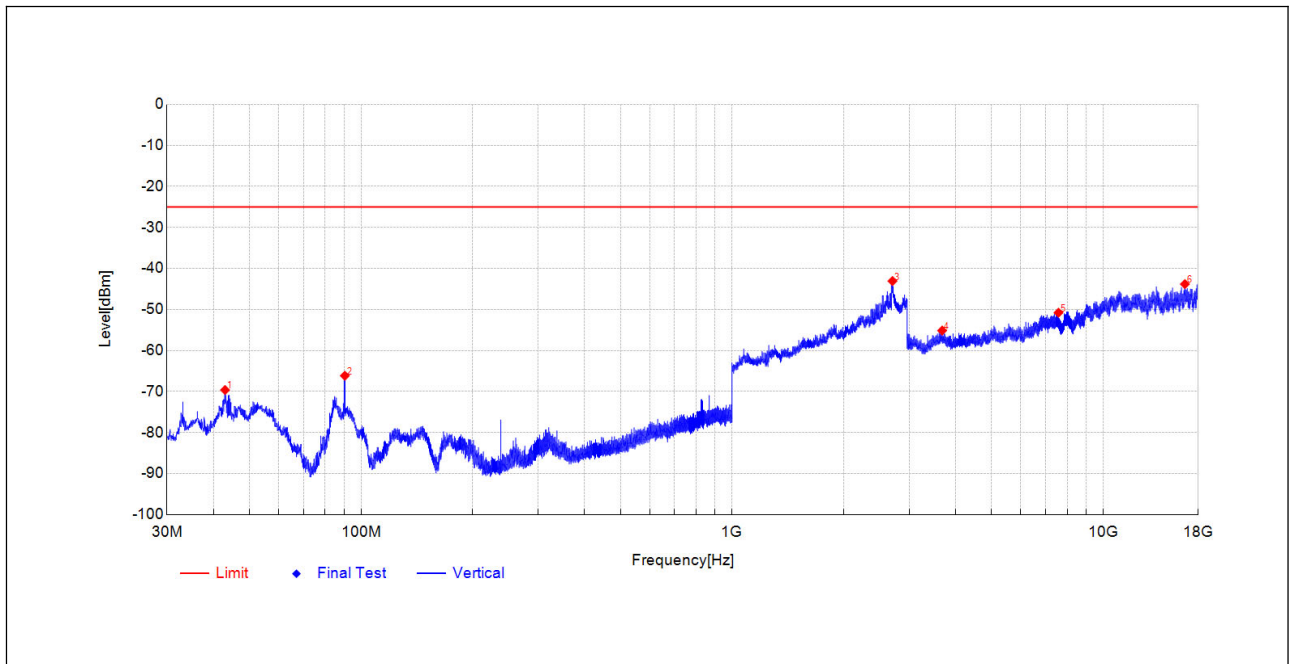

Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
42.9986	-48.77	-69.62	-20.9	-25.0	44.6	Vertical	PK	PASS
90.434	-43.93	-66.15	-22.2	-25.0	41.2	Vertical	PK	PASS
2704.7409	-56.34	-43.06	13.3	-25.0	18.1	Vertical	PK	PASS
3682.3832	-56.86	-55.13	1.7	-25.0	30.1	Vertical	PK	PASS
7578.7832	-62.07	-50.78	11.3	-25.0	25.8	Vertical	PK	PASS
16606.024	-69.72	-43.80	25.9	-25.0	18.8	Vertical	PK	PASS