



GFSK (BLE 2Mbps) MIDDLE CHANNEL 1 GHz to 18 GHz, ANT H

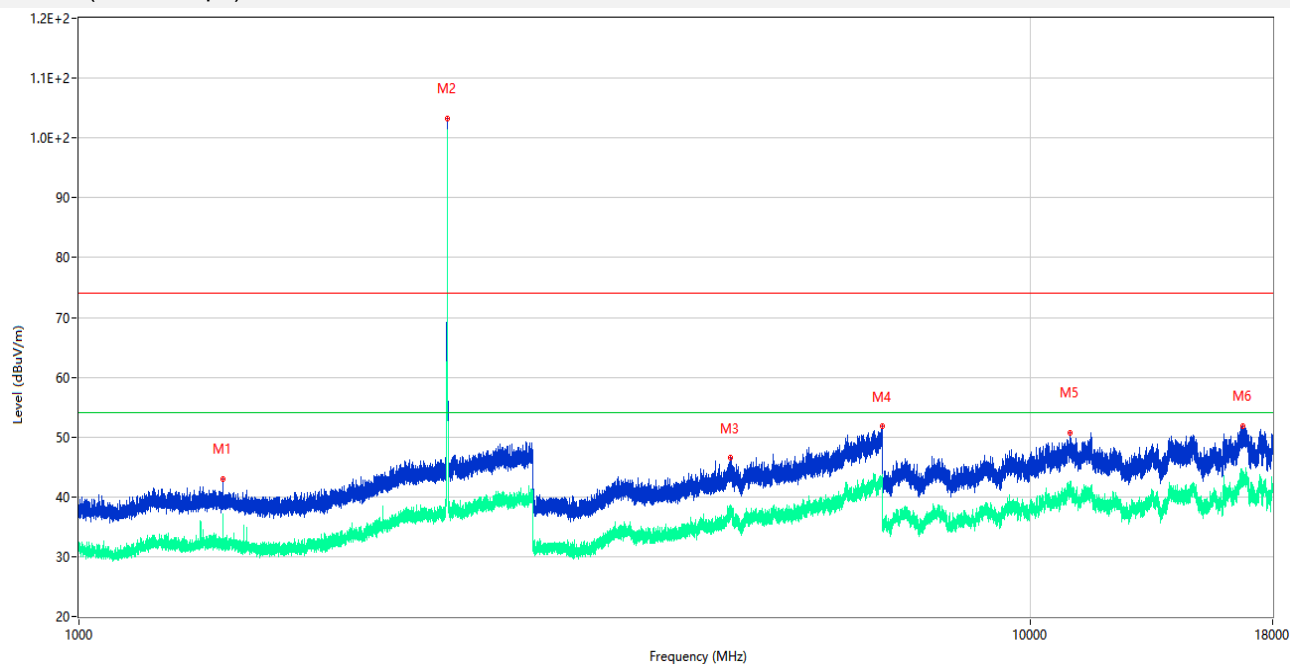


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1417.000	42.93	-17.36	74.0	31.07	Peak	192.00	150	Horizontal	Pass
1**	1417.000	36.21	-17.36	54.0	17.79	AV	192.00	150	Horizontal	Pass
2	2439.500	103.23	-13.95	74.0	-29.23	Peak	213.00	150	Horizontal	N/A
2**	2439.500	99.14	-13.95	54.0	-45.14	AV	213.00	150	Horizontal	N/A
3	4848.200	46.52	-6.13	74.0	27.48	Peak	186.00	200	Horizontal	Pass
3**	4848.200	38.09	-6.13	54.0	15.91	AV	186.00	200	Horizontal	Pass
4	6994.800	51.80	-1.78	74.0	22.20	Peak	339.00	400	Horizontal	Pass
4**	6994.800	41.97	-1.78	54.0	12.03	AV	339.00	400	Horizontal	Pass
5	11033.625	50.66	2.81	74.0	23.34	Peak	33.00	200	Horizontal	Pass
5**	11033.625	42.54	2.81	54.0	11.46	AV	33.00	200	Horizontal	Pass
6	16753.125	51.84	6.09	74.0	22.16	Peak	227.00	400	Horizontal	Pass
6**	16753.125	42.34	6.09	54.0	11.66	AV	227.00	400	Horizontal	Pass

GFSK (BLE 2Mbps) MIDDLE CHANNEL 1 GHz to 18 GHz, ANT V

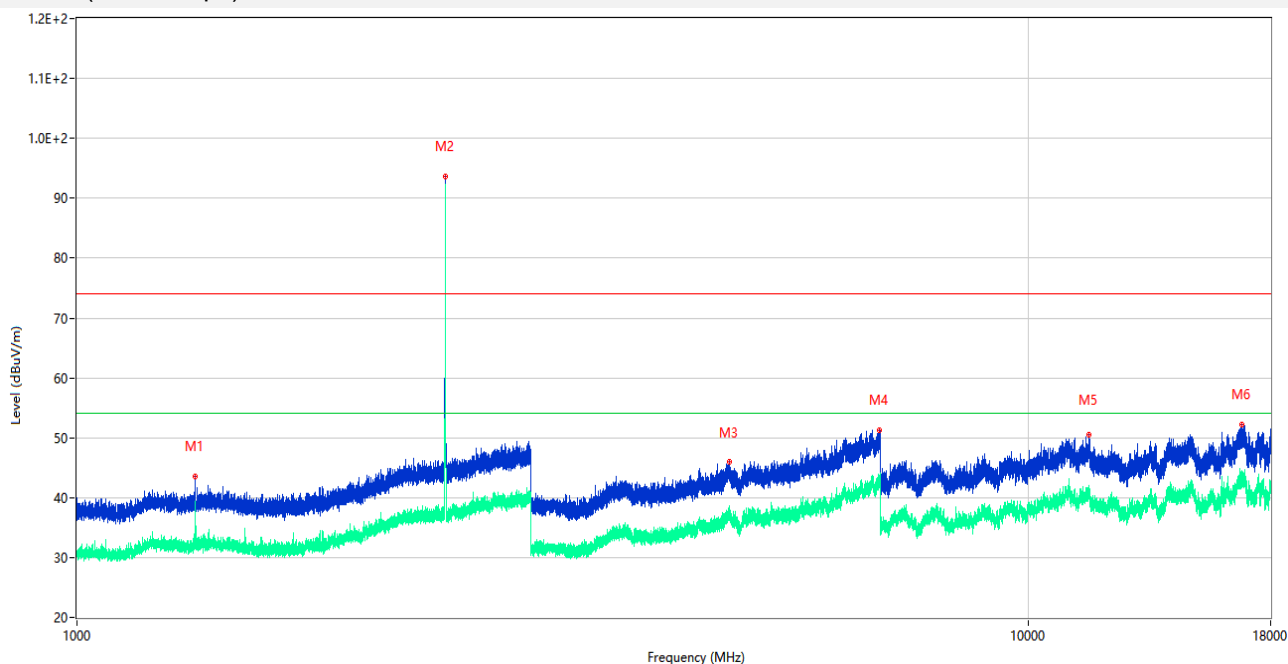


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1332.700	43.56	-17.67	74.0	30.44	Peak	119.00	200	Vertical	Pass
1**	1332.700	31.80	-17.67	54.0	22.20	AV	119.00	200	Vertical	Pass
2	2439.400	93.66	-13.88	74.0	-19.66	Peak	50.00	150	Vertical	N/A
2**	2439.400	89.41	-13.88	54.0	-35.41	AV	50.00	150	Vertical	N/A
3	4849.800	45.97	-6.22	74.0	28.03	Peak	340.00	100	Vertical	Pass
3**	4849.800	37.12	-6.22	54.0	16.88	AV	340.00	100	Vertical	Pass
4	6977.400	51.35	-1.47	74.0	22.65	Peak	160.00	300	Vertical	Pass
4**	6977.400	42.91	-1.47	54.0	11.09	AV	160.00	300	Vertical	Pass
5	11598.562	50.48	3.81	74.0	23.52	Peak	244.00	300	Vertical	Pass
5**	11598.562	41.58	3.81	54.0	12.42	AV	244.00	300	Vertical	Pass
6	16776.750	52.22	5.95	74.0	21.78	Peak	132.00	400	Vertical	Pass
6**	16776.750	42.79	5.95	54.0	11.21	AV	132.00	400	Vertical	Pass

GFSK (BLE 2Mbps) HIGH CHANNEL 1 GHz to 18 GHz, ANT H

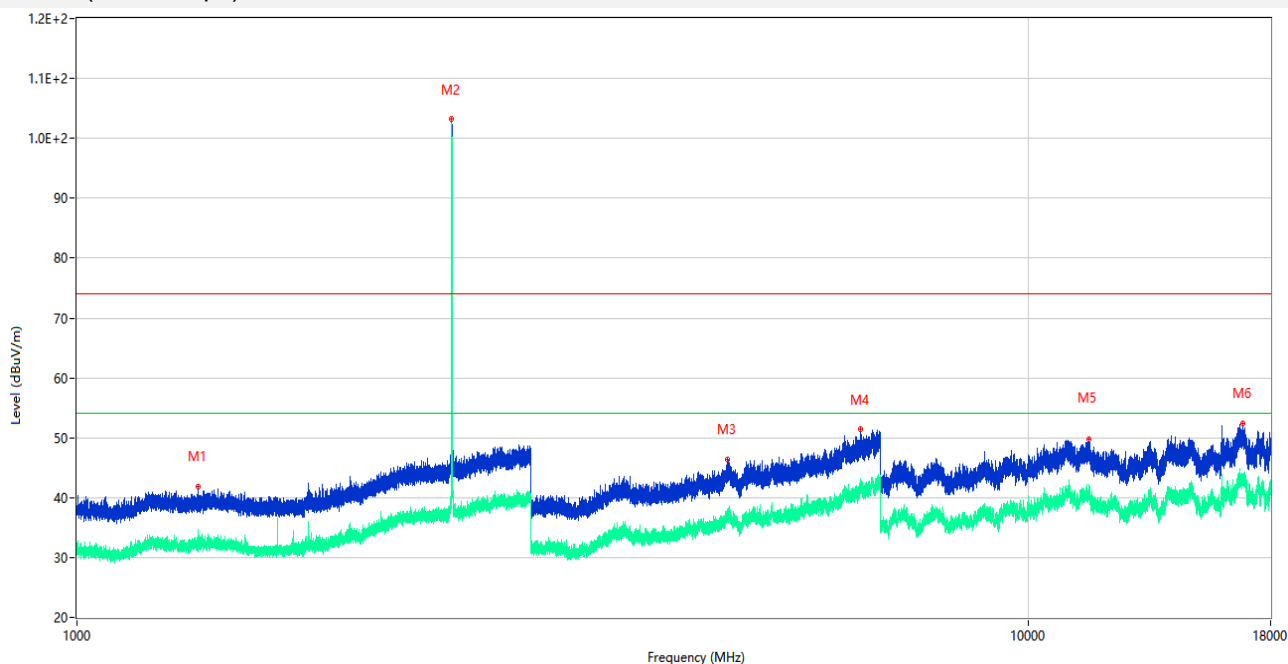

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1342.000	41.78	-17.52	74.0	32.22	Peak	189.00	150	Horizontal	Pass
1**	1342.000	32.82	-17.52	54.0	21.18	AV	189.00	150	Horizontal	Pass
2	2478.500	103.16	-13.39	74.0	-29.16	Peak	288.00	150	Horizontal	N/A
2**	2478.500	101.45	-13.39	54.0	-47.45	AV	288.00	150	Horizontal	N/A
3	4835.400	46.42	-6.87	74.0	27.58	Peak	47.00	150	Horizontal	Pass
3**	4835.400	36.72	-6.87	54.0	17.28	AV	47.00	150	Horizontal	Pass
4	6673.400	51.40	-2.17	74.0	22.60	Peak	308.00	200	Horizontal	Pass
4**	6673.400	41.87	-2.17	54.0	12.13	AV	308.00	200	Horizontal	Pass
5	11599.713	49.81	3.83	74.0	24.19	Peak	103.00	300	Horizontal	Pass
5**	11599.713	41.06	3.83	54.0	12.94	AV	103.00	300	Horizontal	Pass
6	16826.100	52.40	5.94	74.0	21.60	Peak	345.00	300	Horizontal	Pass
6**	16826.100	43.90	5.94	54.0	10.10	AV	345.00	300	Horizontal	Pass

GFSK (BLE 2Mbps) HIGH CHANNEL 1 GHz to 18 GHz, ANT V

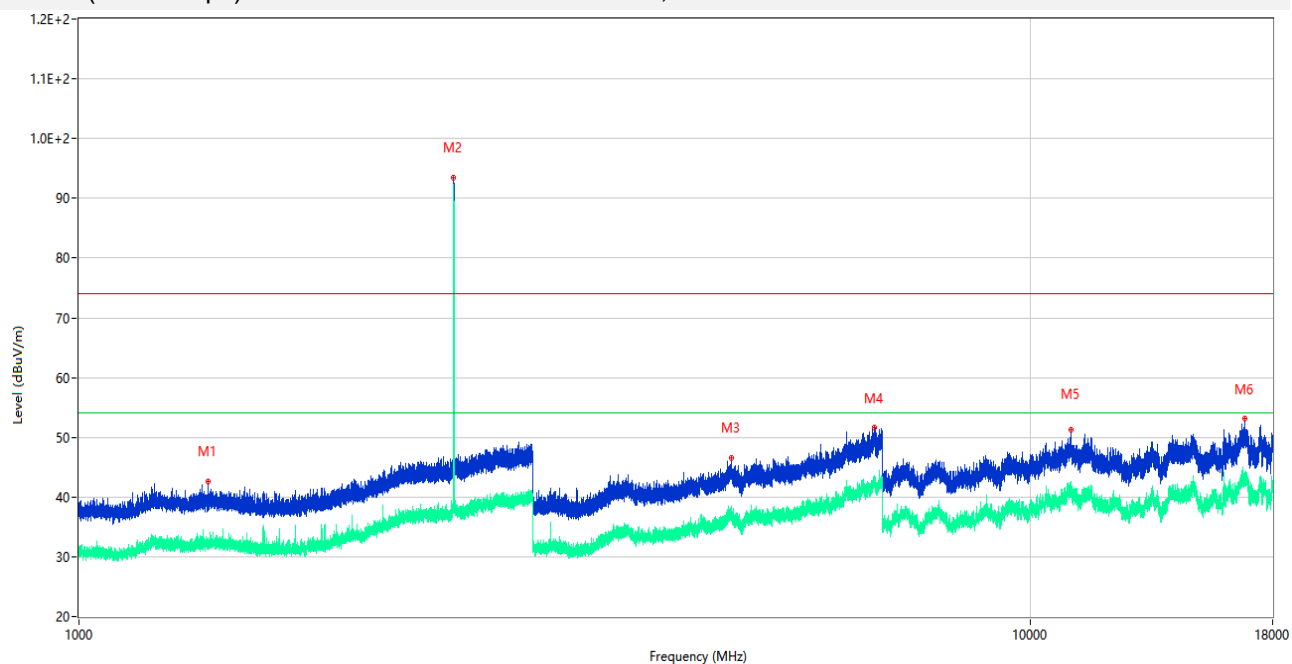

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1366.900	42.67	-17.83	74.0	31.33	Peak	21.00	300	Vertical	Pass
1**	1366.900	32.49	-17.83	54.0	21.51	AV	21.00	300	Vertical	Pass
2	2478.500	93.45	-13.39	74.0	-19.45	Peak	52.00	150	Vertical	N/A
2**	2478.500	90.98	-13.39	54.0	-36.98	AV	52.00	150	Vertical	N/A
3	4856.600	46.58	-6.41	74.0	27.42	Peak	117.00	200	Vertical	Pass
3**	4856.600	37.86	-6.41	54.0	16.14	AV	117.00	200	Vertical	Pass
4	6861.200	51.65	-0.64	74.0	22.35	Peak	266.00	150	Vertical	Pass
4**	6861.200	43.38	-0.64	54.0	10.62	AV	266.00	150	Vertical	Pass
5	11036.787	51.29	2.89	74.0	22.71	Peak	88.00	300	Vertical	Pass
5**	11036.787	42.54	2.89	54.0	11.46	AV	88.00	300	Vertical	Pass
6	16840.537	53.06	6.24	74.0	20.94	Peak	233.00	200	Vertical	Pass
6**	16840.537	42.97	6.24	54.0	11.03	AV	233.00	200	Vertical	Pass

A.7 Band Edge (Restricted-band band-edge)

Note ¹: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.

Note ²: The test data all are tested in the vertical and horizontal antenna which the trace is max hold. So these plots have shown the worst case.

Note ³: According the ANSI C63.10-2020, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note ⁴: The Level (dBuV/m) has been corrected by factor.

Note ⁵: Both horizontal and vertical directions were pre tested, only the worst configuration has been reported in this report.


Test Data and Plots

GFSK (BLE 1Mbps) LOW CHANNEL




No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2386.833	54.29	-1.52	74.0	19.71	Peak	57.00	100	Horizontal	Pass
1**	2386.833	41.98	-1.52	54.0	12.02	AV	57.00	100	Horizontal	Pass
2	2390.000	52.13	-2.16	74.0	21.87	Peak	150.00	300	Horizontal	Pass
2**	2390.000	41.64	-2.16	54.0	12.36	AV	150.00	300	Horizontal	Pass

GFSK (BLE 1Mbps) HIGH CHANNEL

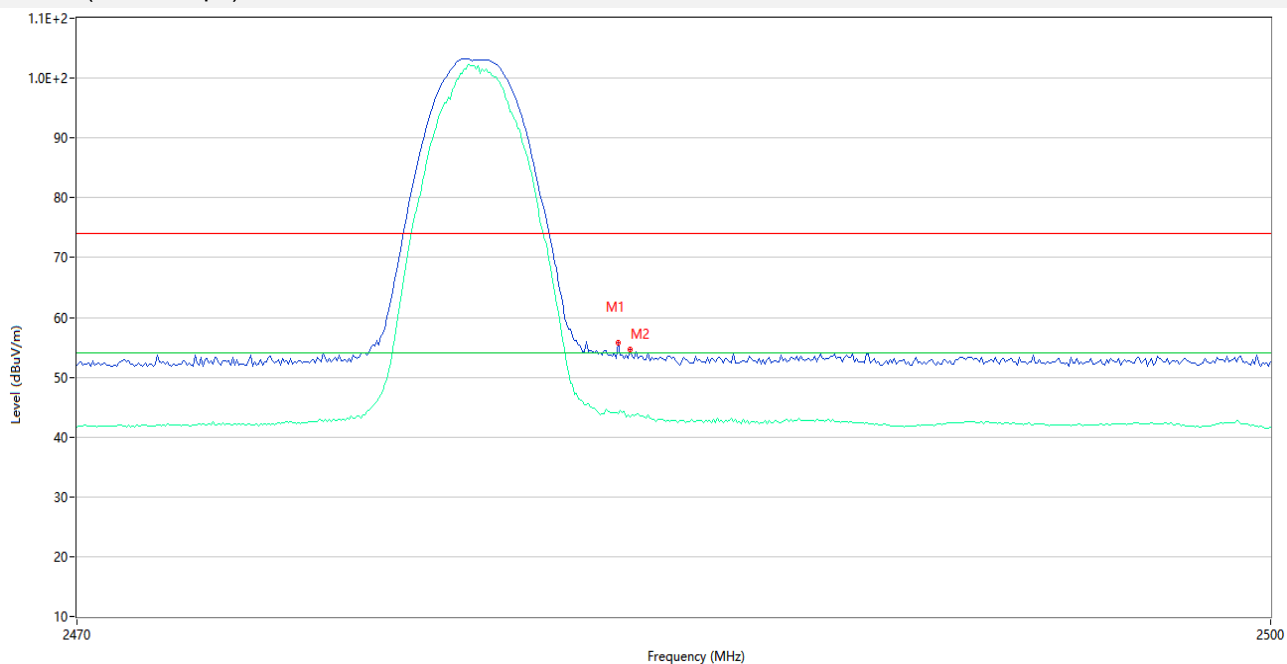


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.550	55.76	-1.03	74.0	18.24	Peak	251.00	100	Horizontal	Pass
1**	2483.550	43.95	-1.03	54.0	10.05	AV	251.00	100	Horizontal	Pass
2	2483.850	54.69	-1.00	74.0	19.31	Peak	260.00	200	Horizontal	Pass
2**	2483.850	43.33	-1.00	54.0	10.67	AV	260.00	200	Horizontal	Pass

GFSK (BLE 2Mbps) LOW CHANNEL

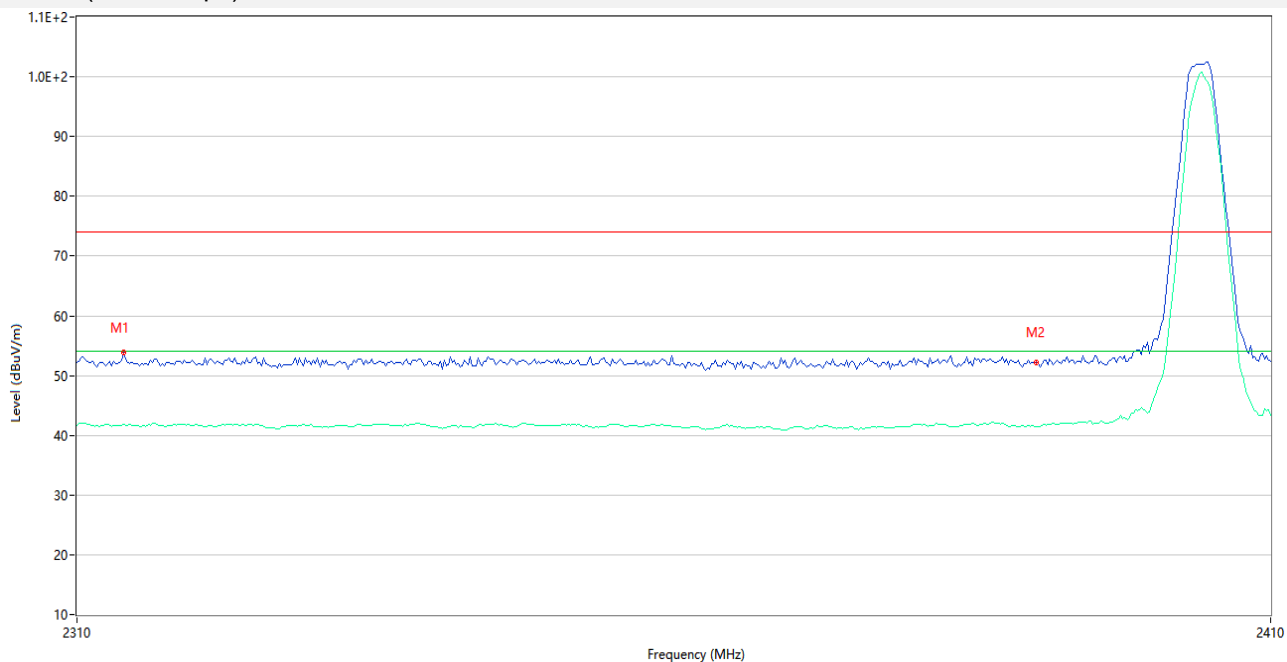

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2313.833	53.97	-1.60	74.0	20.03	Peak	317.00	300	Horizontal	Pass
1**	2313.833	41.74	-1.60	54.0	12.26	AV	317.00	300	Horizontal	Pass
2	2390.000	52.20	-2.16	74.0	21.80	Peak	274.00	100	Horizontal	Pass
2**	2390.000	41.54	-2.16	54.0	12.46	AV	274.00	100	Horizontal	Pass

GFSK (BLE 2Mbps) HIGH CHANNEL

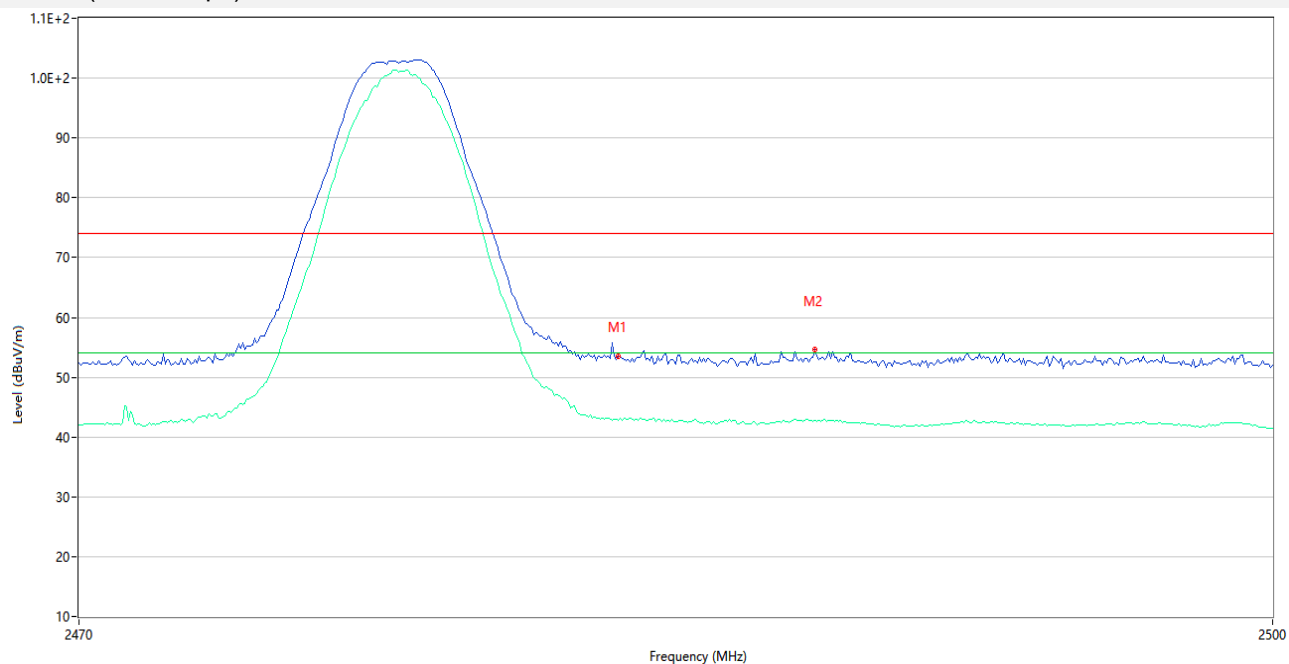

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	53.45	-1.04	74.0	20.55	Peak	320.00	300	Horizontal	Pass
1**	2483.500	42.78	-1.04	54.0	11.22	AV	320.00	300	Horizontal	Pass
2	2488.450	54.59	-0.70	74.0	19.41	Peak	237.00	200	Horizontal	Pass
2**	2488.450	42.84	-0.70	54.0	11.16	AV	237.00	200	Horizontal	Pass

A.8 Power Spectral Density (PSD)


Test Data

GFSK (BLE 1Mbps)			
Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
Low Channel	-7.22	8	Pass
Middle Channel	-7.39	8	Pass
High Channel	-7.71	8	Pass


GFSK (BLE 2Mbps)			
Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
Low Channel	-11.38	8	Pass
Middle Channel	-11.33	8	Pass
High Channel	-11.58	8	Pass

Test Plots


GFSK (BLE 1Mbps) LOW CHANNEL

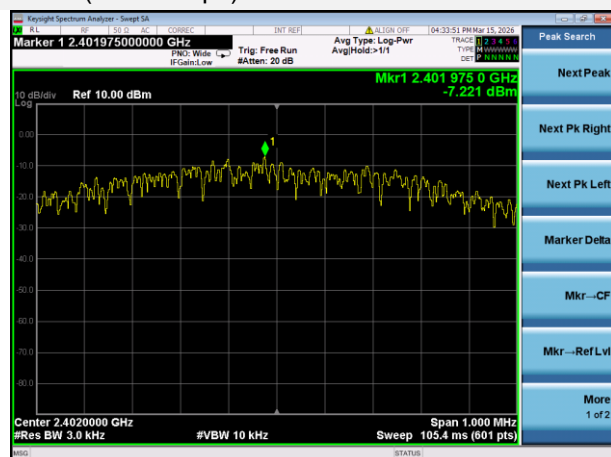


GFSK (BLE 1Mbps) MIDDLE CHANNEL

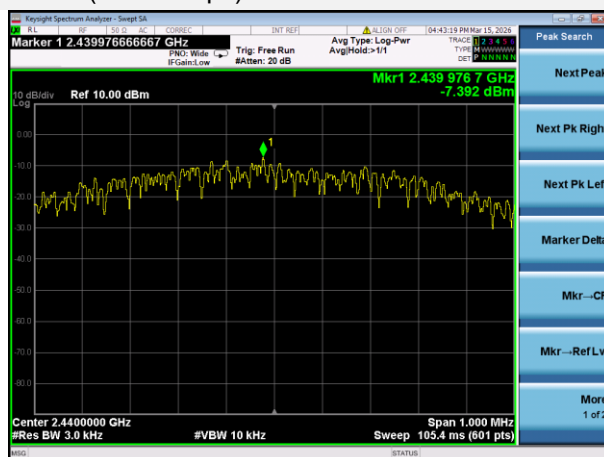


GFSK (BLE 1Mbps) HIGH CHANNEL

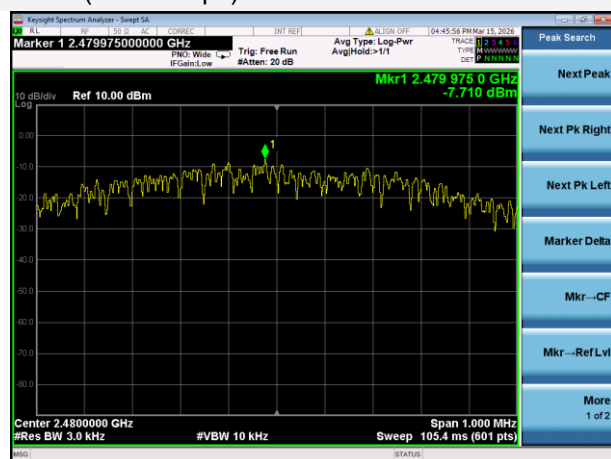

GFSK (BLE 2Mbps) LOW CHANNEL

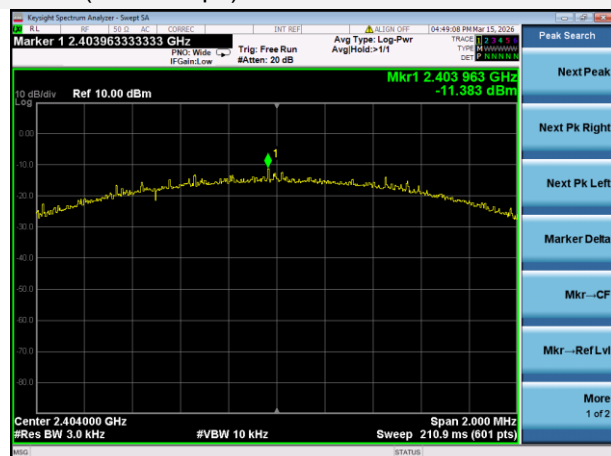

GFSK (BLE 2Mbps) MIDDLE CHANNEL

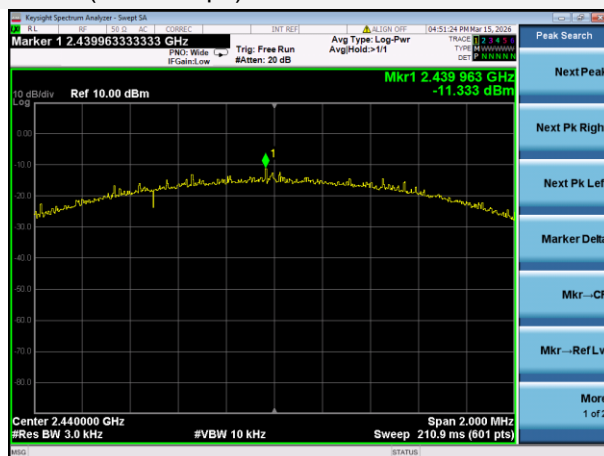

GFSK (BLE 2Mbps) HIGH CHANNEL



ANNEX B TEST SETUP PHOTOS

Please refer the document “Ti-CC26020210-AR.PDF”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “Ti-CC26020210-AW.PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “Ti-CC26020210-AI.PDF”.

Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--END OF REPORT--