



802.11n20 LOW CHANNEL

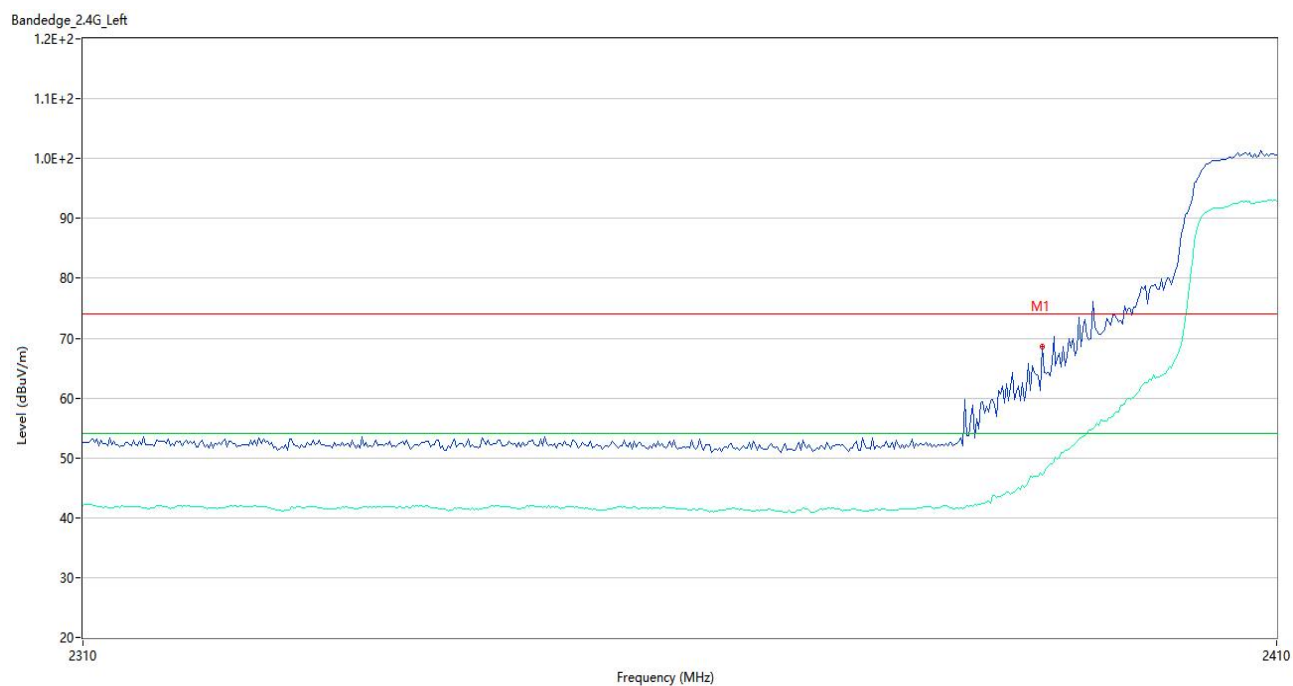


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	68.57	-2.16	74.0	5.43	Peak	89.00	100	Vertical	Pass
1**	2390.000	47.07	-2.16	54.0	6.93	AV	89.00	100	Vertical	Pass

802.11n20 HIGH CHANNEL

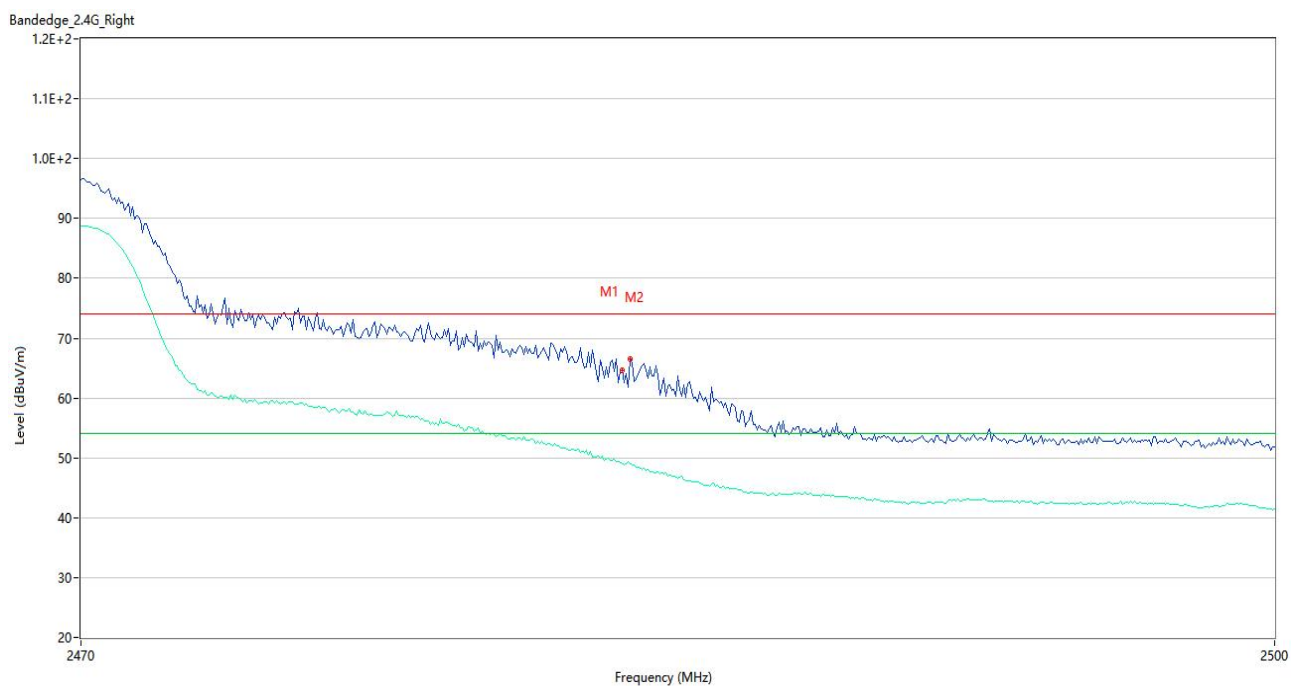


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	64.69	-1.03	74.0	9.31	Peak	125.00	200	Vertical	Pass
1**	2483.500	48.97	-1.03	54.0	5.03	AV	125.00	200	Vertical	Pass
2	2483.750	66.45	-0.99	74.0	7.55	Peak	121.00	100	Vertical	Pass
2**	2483.750	48.96	-0.99	54.0	5.04	AV	121.00	100	Vertical	Pass

802.11n40 LOW CHANNEL

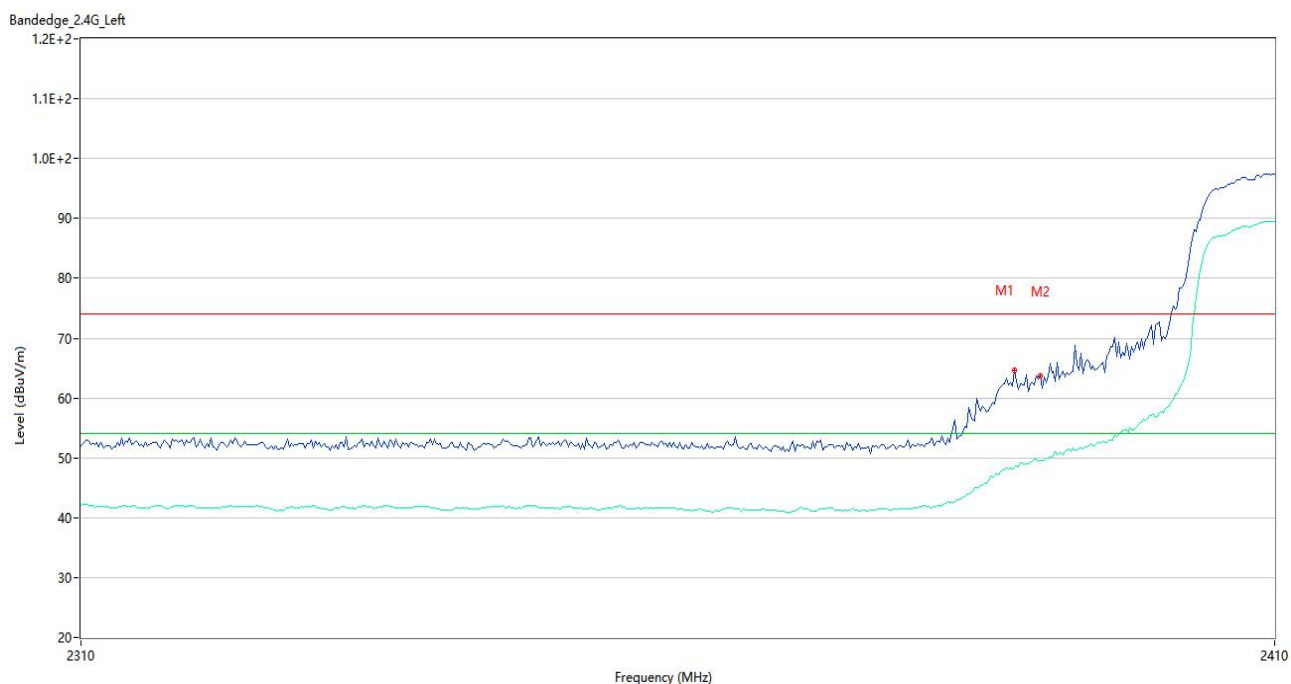

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2387.833	64.71	-1.93	74.0	9.29	Peak	71.00	100	Vertical	Pass
1**	2387.833	48.43	-1.93	54.0	5.57	AV	71.00	100	Vertical	Pass
2	2390.000	63.64	-2.16	74.0	10.36	Peak	65.00	100	Vertical	Pass
2**	2390.000	49.48	-2.16	54.0	4.52	AV	65.00	100	Vertical	Pass

802.11n40 HIGH CHANNEL

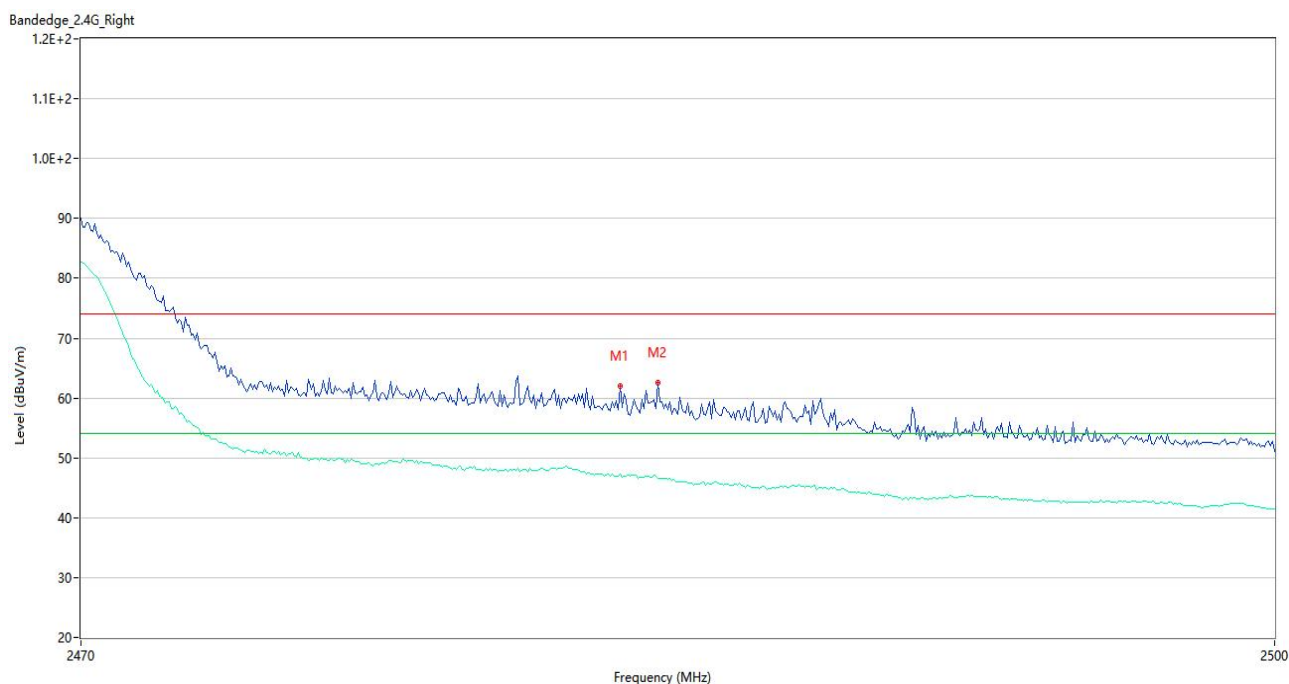

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	62.05	-1.04	74.0	11.95	Peak	121.00	100	Vertical	Pass
1**	2483.500	47.23	-1.04	54.0	6.77	AV	121.00	100	Vertical	Pass
2	2484.450	62.58	-1.09	74.0	11.42	Peak	93.00	100	Vertical	Pass
2**	2484.450	46.57	-1.09	54.0	7.43	AV	93.00	100	Vertical	Pass

A.8 Power Spectral Density (PSD)

Test Data

802.11b Mode:

Channel	Spectral Power Density (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
Low	-2.89	8	Pass
Middle	-2.71	8	Pass
High	-3.01	8	Pass

802.11g Mode:

Channel	Spectral Power Density (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
Low	-4.27	8	Pass
Middle	-5.26	8	Pass
High	-5.03	8	Pass

802.11n-20 MHz Mode:


Channel	Spectral Power Density (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
Low	-8.85	8	Pass
Middle	-8.59	8	Pass
High	-6.95	8	Pass

802.11n-40 MHz Mode:


Channel	Spectral Power Density (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
Low	-12.35	8	Pass
Middle	-12.55	8	Pass
High	-13.11	8	Pass

Test Plots

802.11b LOW CHANNEL

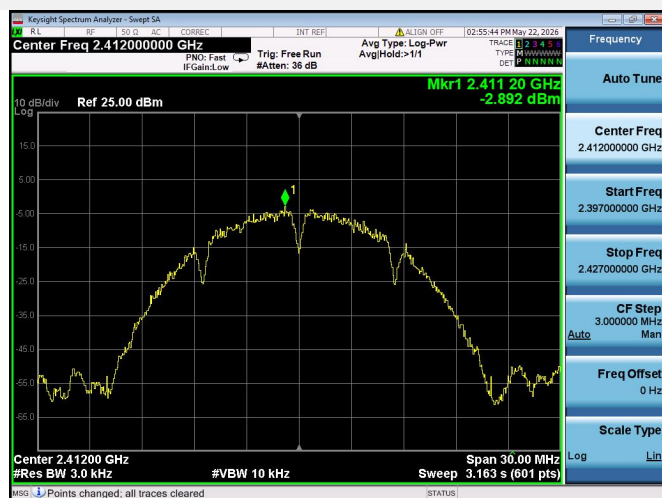


802.11b MIDDLE CHANNEL

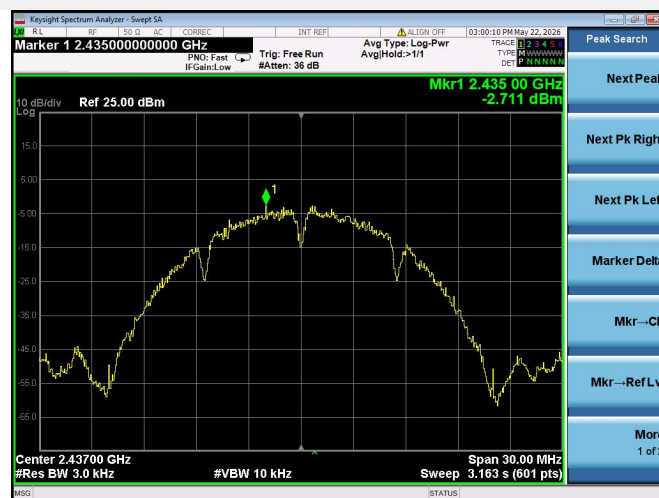


802.11b HIGH CHANNEL




802.11g LOW CHANNEL

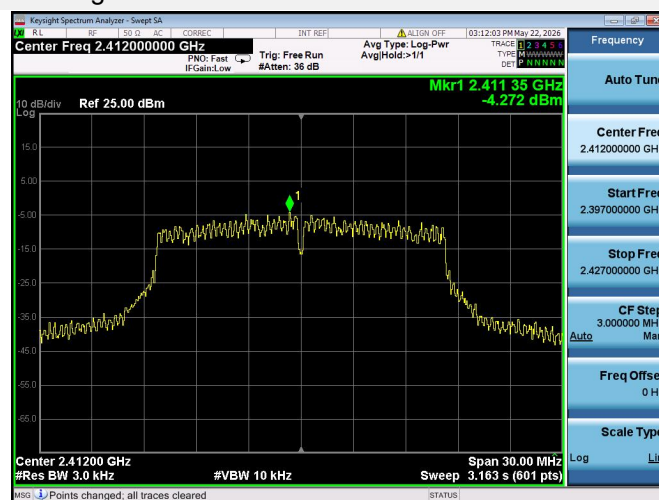


802.11g MIDDLE CHANNEL

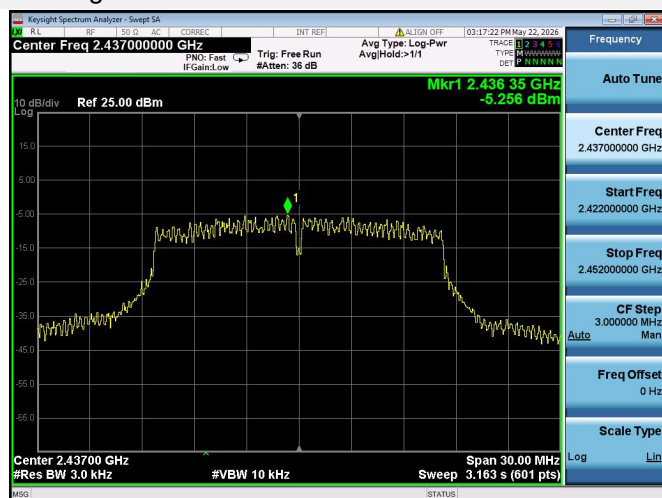


802.11g HIGH CHANNEL

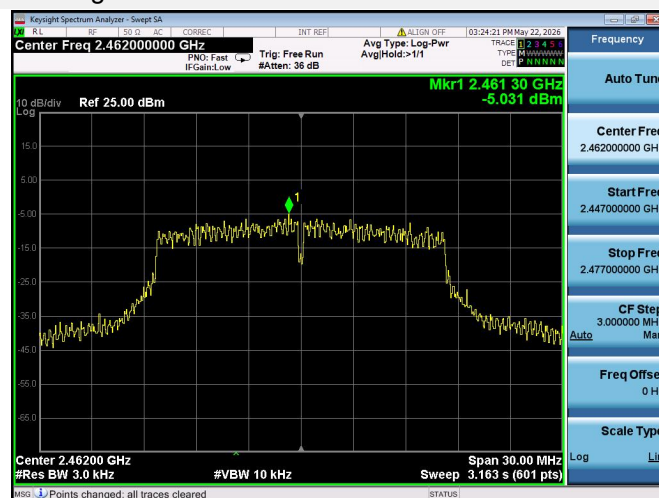


802.11n-20 MHz LOW CHANNEL

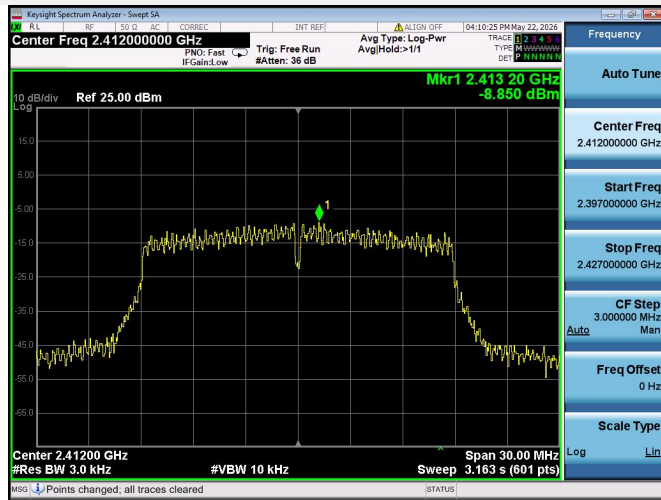


802.11n-20 MHz MIDDLE CHANNEL

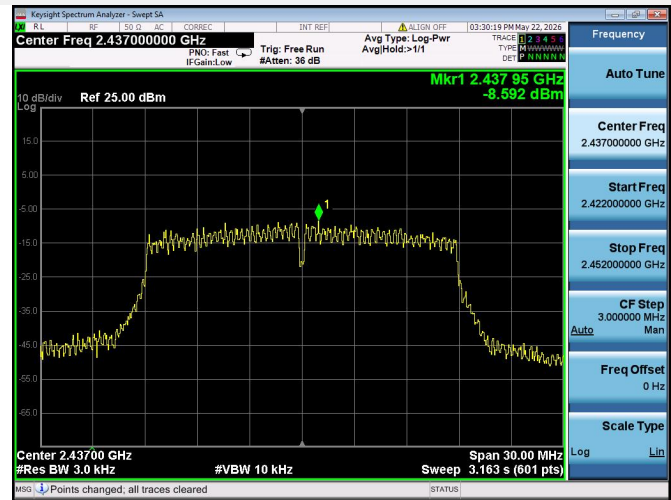


802.11n-20 MHz HIGH CHANNEL

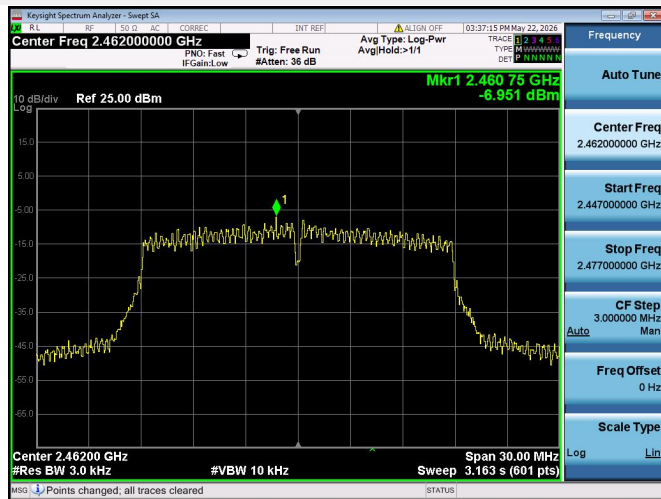


802.11n-40 MHz LOW CHANNEL

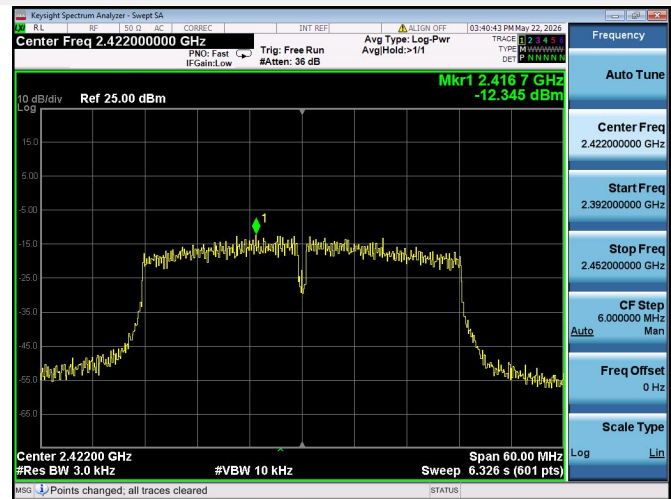

802.11n-40 MHz MIDDLE CHANNEL

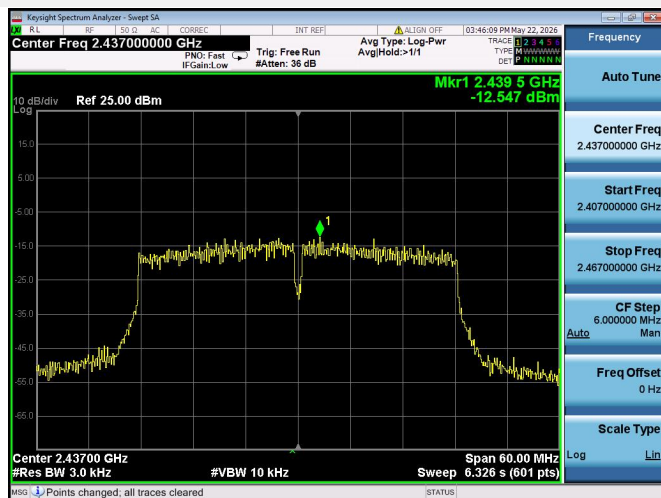

802.11n-40 MHz HIGH CHANNEL

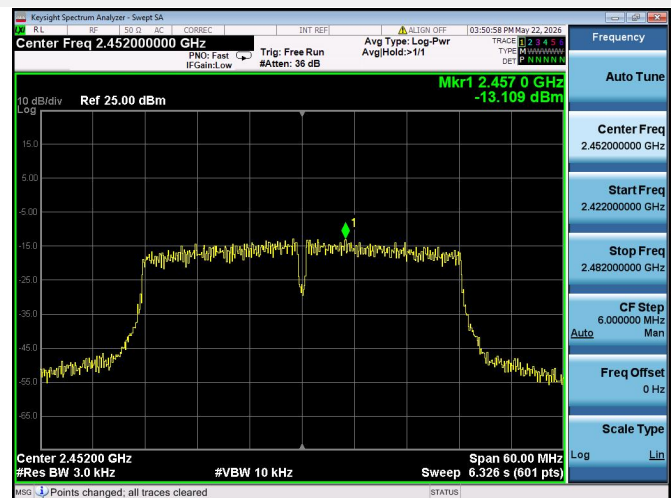

ANNEX B TEST SETUP PHOTOS

Please refer the document “Ti-CC26050173-AR.PDF”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “Ti-CC26050173-AW.PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “Ti-CC26050173-AI.PDF”.

Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--END OF REPORT--