


Model

S3-P

INSTALLATION GUIDE

INS - IG - B1 - R01

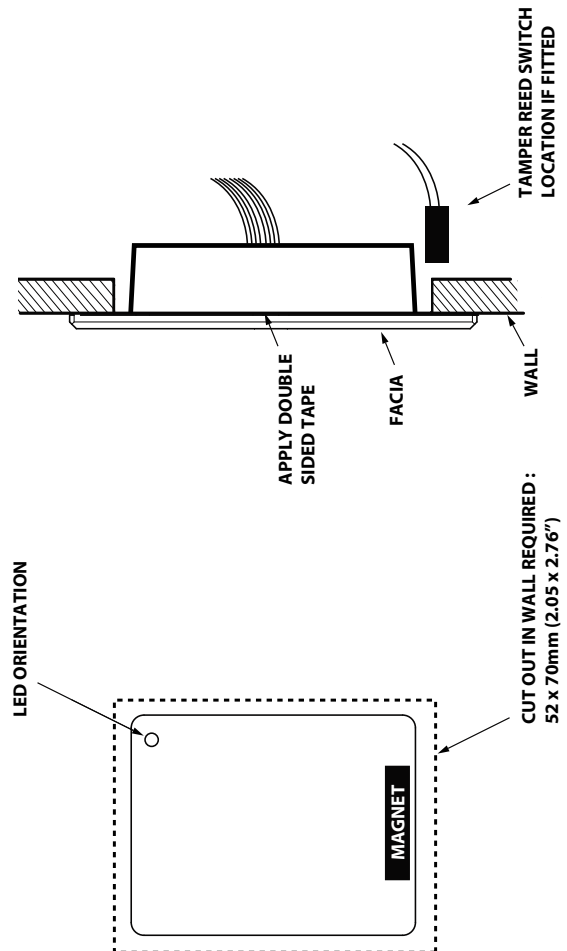

SIDE VIEW

NOT TO SCALE

FRONT VIEW

Handling

Handle the reader with care. Do not drop or damage before installation.

Cable Colours

red	+5 to +12Vdc
black	ground
yellow	buzzer
orange	green led
green	W0
white	W1

Wiring

Connect the wiring as indicated in the table to the control panel.

- Connect the 0V reference and 0V (if provided in the power supply) to the ground (GND) Wire.
- Connect the W0, W1, LED and Buzzer
- Connect the +Vdc last.

External Use

Mount the reader on a single gang box or suitable surface. Make sure the wire bundle to the reader has an IP rating of at least IP65.

Mounting

- If necessary, drill holes for the mounting screws in the wall on which the reader will be placed. Alternately a back box can be used.
- Note magnet location for position of tamper reed switch (refer overleaf).
- Place the reader on the wall or back box, make sure wires are not crushed.
- Insert and hand tighten the screws.
- Check that the reader is level before tightening screws.
- Power up reader

Troubleshooting

If the reader doesn't respond when a valid smart card is presented, check the following:

Symptom	Possible Cause	Check
LED is not lit	No power to the reader	Check power supply to the reader
LED is orange/indeterminate or buzzer sounds low	Voltage to the reader is below minimum required level	Check power supply to the reader
Reader doesn't respond	Invalid card or card is faulty or wiring to the controller is faulty	Check reader with another valid smart card; if problem persists check wiring

Warranty

Each reader comes with a 3 year warranty from the date of dispatch. The warranty is void if the instructions contained within this document have not been adhered to.

Product of Australia

INS Global Pty Ltd
Suite 8
166a The Entrance Road
Erina NSW 2250
www.insglobal.com
Ph: 1300 203 373

Reader Specifications

Reader Output	Wiegand
Power requirements	+12Vdc
Current Consumption (+/- 5%)	
Normal	105mA (at 12Vdc)
Activated	120mA (at 12Vdc)
Read range	30 - 50mm
Cable distances	
0.22mm ² cable	100m max
0.33mm ² cable	250m max
Operating temperature	-10degC to +65degC
Relative humidity	90% max, operating non-condensing
Reader dimensions (Facia)	67 x 50 x 16mm
Status LED's	Green/Red controlled by access controller
Audible tone	Internal and external buzzer control
Colour	Charcoal
IP rating	IP66

Regulatory Information

CE Mark

The reader has passed all relevant tests and obtained CE approval.

C Tick

The reader has passed all relevant requirements for application of C Tick.

FCC

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna
- Increase the separation between the equipment and receiver
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected
- Consult the dealer or an experienced radio/TV technician for help

Any changes or modifications to this product not expressly approved in this document could void the user's authority to operate this equipment.

