



RF TEST REPORT

Applicant iRay Technology Co. Ltd.

FCC ID 2ACHK-01070189

Product Focus HD 43 detector

Brand Carestream

Model Focus HD 43

Report No. R2107A0579-R2V1

Issue Date September 29, 2021

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 15E (2020)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Prepared by: Peng Tao

Approved by: Kai Xu

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



TABLE OF CONTENT

1. Test Laboratory	5
1.1. Notes of the test report.....	5
1.2. Test facility	5
1.3. Testing Location.....	5
2. General Description of Equipment under Test.....	6
2.1. Applicant and Manufacturer Information.....	6
2.2. General information.....	6
3. Applied Standards	8
4. Test Configuration	9
5. Test Case Results	11
5.1. Unwanted Emission	11
5.2. Conducted Emission	56
6. Main Test Instruments	59
ANNEX A: The EUT Appearance	61
ANNEX B: Test Setup Photos	62
ANNEX C: Product Change Description	63



Version	Revision description	Issue Date
Rev.0	Initial issue of report.	September 18, 2021
Rev.1	Update Standard Gain Horn information in Page 60.	September 29, 2021
Note: This revised report (Report No. R2107A0579-R2V1) supersedes and replaces the previously issued report (Report No. R2107A0579-R2). Please discard or destroy the previously issued report and dispose of it accordingly.		

Summary of measurement results

Number	Test Case	Clause in FCC rules	Verdict
1	Average output power	15.407(a)	PASS
2	Occupied bandwidth	15.407(e)	PASS
3	Frequency stability	15.407(g)	PASS
4	Power spectral density	15.407(a)	PASS
5	Unwanted Emissions	15.407(b)	PASS
6	Conducted Emissions	15.207	PASS
Date of Testing: (Original) September 3, 2020 ~November 4, 2020 (Variant) July 23, 2021 ~ July 24, 2021			
Date of Sample Received: (Original) August 26, 2020 (Variant) July 22, 2021			
Note: All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.			

Focus HD 43 (Report No.: R2107A0579-R2V1) is a variant model of Mars1717X (Report No.: R2008A0570-R2). This report change model, Product name, Software version and Hardware version. Test values partial duplicated from original for variant.

Test items tested see the table below.

Test Case	Original	Variant
Unwanted Emissions	Pass	Retest 802.11ac VHT80
Conducted Emissions	Pass	Refer to Original

The detailed product change description please refers to the 2ACHK-01070189_C2PC application letter-Focus HD 43.



1. Test Laboratory

1.1. Notes of the test report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2. Test facility

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com

2. General Description of Equipment under Test

2.1. Applicant and Manufacturer Information

Applicant	iRay Technology Co. Ltd.
Applicant address	RM 202, Building 7, No. 590, Ruiqing RD., Pudong, Shanghai, China
Manufacturer	Carestream Health, Inc.
Manufacturer address	150 Verona Street, Rochester, NY, USA 14608

2.2. General information

EUT Description	
Model	Focus HD 43
Lab internal SN	R2107A0579/S01
Hardware Version	Main version: 1.1.3.17 MCU version: 2.10.0.19 ARM version: 2.2.0.51 Kernel version: 1.0.6.2
Software Version	4.0.35.7016
Power Supply	Battery/AC adapter
Antenna Type	Internal Antenna
Antenna Gain	5.07dBi for Wi-Fi antenna 1 5.07dBi for Wi-Fi antenna 2 5.07 dBi for Wi-Fi MIMO
Directional Gain	NA
Test Band	U-NII-1(5150MHz-5250MHz) U-NII-3(5725MHz-5850MHz)
Modulation Type	802.11a/n (HT20/HT40) : OFDM 802.11ac (VHT20/VHT40/VHT80): OFDM
Operating Frequency Range(s)	U-NII-1: 5150MHz-5250MHz U-NII-3: 5725MHz -5850MHz
Operating temperature range:	10 ° C to 35° C
Operating voltage range:	9.0 V to 13.2 V
State DC voltage:	10.8V
EUT Accessory	
Battery	Manufacturer: iRay Technology Taicang Ltd. Model: BATTERY-KX Ratings:11.55Vdc,4700mAh



Adapter	Manufacturer: Shenzhen Longxc Power Supply Co., LTD Model: LXCP61-024300
Charger	Manufacturer: iRay Technology Taicang Ltd. Model: CHARGER-COMBO
DC cable	Manufacturer: iRay Technology Co. Ltd.
Note:1. The EUT is sent from the applicant to TA and the information of the EUT is declared by the applicant.	



3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards:

FCC CFR47 Part 15E (2020) Unlicensed National Information Infrastructure Devices

ANSI C63.10 (2013)

Reference standard:

KDB 789033 D02 General UNII Test Procedures New Rules v02r01

KDB 662911 D01 Multiple Transmitter Output v02r01

4. Test Configuration

Test Mode

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (X axis) and the worst case was recorded.

In order to find the worst case condition, Pre-tests are needed at the presence of different data rate. Preliminary tests have been done on all the configuration for confirming worst case. Data rate below means worst-case rate of each test item.

Worst-case data rates are shown as following table.

Band	Data Rate		
	Antenna 1	Antenna 2	MIMO
802.11a	6 Mbps	6 Mbps	/
802.11n HT20	MCS0	MCS0	MCS8
802.11n HT40	MCS0	MCS0	MCS8
802.11ac VHT20	MCS0	MCS0	MCS8
802.11ac VHT40	MCS0	MCS0	MCS8
802.11ac VHT80	MCS0	MCS0	MCS8

The worst case Antenna mode for each of the following tests for Wi-Fi:

Test Cases	Antenna 1	Antenna 2	MIMO
Unwanted Emissions	802.11a	--	802.11n HT20/40 802.11ac VHT20/40/80
Conducted Emissions	O	--	--
Note: "O": test all bands			

According to RF Output power results in Original Report, MIMO was selected as the worst antenna for 802.11n HT20/40, 802.11ac VHT20/40/80. SISO Antenna 1 was selected as the worst SISO antenna for 802.11a.

Wireless Technology and Frequency Range

Wireless Technology		Bandwidth	Channel	Frequency
Wi-Fi	U-NII-1	20 MHz	36	5180MHz
			40	5200MHz
			44	5220MHz
			48	5240MHz
		40 MHz	38	5190MHz
			46	5230MHz
		80 MHz	42	5210MHz
	U-NII-3	20 MHz	149	5745MHz
			153	5765MHz
			157	5785MHz
			161	5805MHz
			165	5825MHz
		40 MHz	151	5755MHz
			159	5795MHz
		80 MHz	155	5775MHz
Does this device support TPC Function? ☐ Yes ☒ No				

5. Test Case Results

5.1. Unwanted Emission

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The test set-up was made in accordance to the general provisions of ANSI C63.10-2013. The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna. The radiated emissions measurements were made in a typical installation configuration. Sweep the whole frequency band range from 9kHz to the 10th harmonic of the carrier, and the emissions less than 20 dB below the permissible value are reported.

During the test, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing.

Set the spectrum analyzer in the following:

9kHz~150 kHz

RBW=200Hz, VBW=1kHz/ Sweep=AUTO

150 kHz~30MHz

RBW=9KHz, VBW=30KHz,/ Sweep=AUTO

Below 1GHz

RBW=100kHz / VBW=300kHz / Sweep=AUTO

a) Peak emission levels are measured by setting the instrument as follows:

Above 1GHz

PEAK: RBW=1MHz VBW=3MHz/ Sweep=AUTO

b) Average emission levels are measured by setting the instrument as follows:

Above 1GHz

AVERAGE: RBW=1MHz / VBW=3MHz / Sweep=AUTO

c) Detector: The measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.)

e) Sweep time = auto.

f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission

is not continuous, then the number of traces shall be increased by a factor of $1 / D$, where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)

g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:

1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is $[10 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.

2) If linear voltage averaging mode was used in the preceding step e), then the correction factor is $[20 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.

3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.


Reduce the video bandwidth until no significant variations in the displayed signal are observed in subsequent traces, provided the video bandwidth is no less than 1 Hz. For regulatory requirements that specify averaging only over the transmit duration (e.g., digital transmission system [DTS] and Unlicensed National Information Infrastructure [U-NII]), the video bandwidth shall be greater than $[1 / (\text{minimum transmitter on time})]$ and no less than 1 Hz.

The field strength of spurious emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the loop antenna is vertical, others antenna are vertical and horizontal.


The test is in transmitting mode.

Test Setup


9KHz~~~30MHz

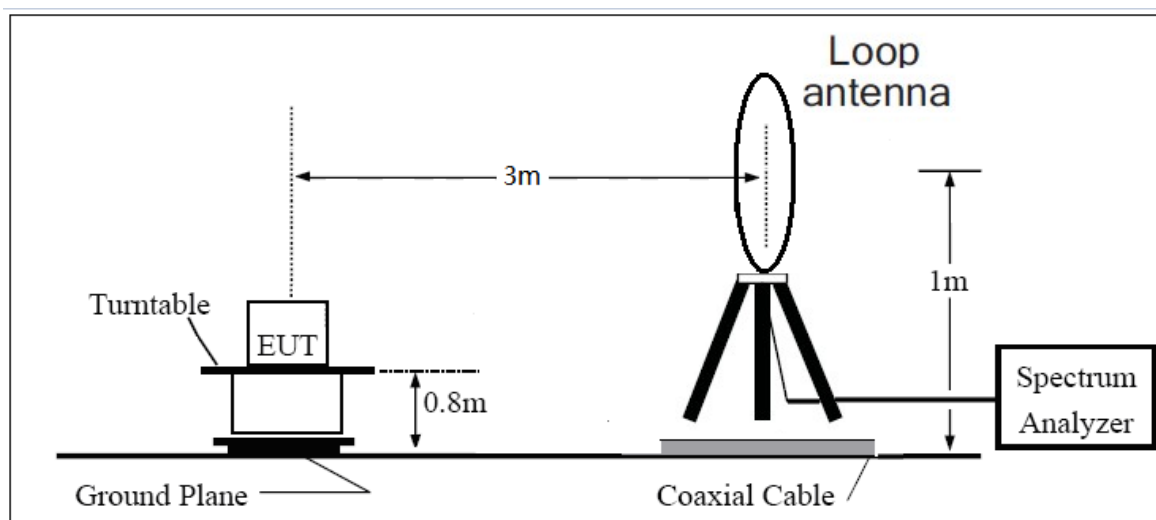

30MHz~~~ 1GHz

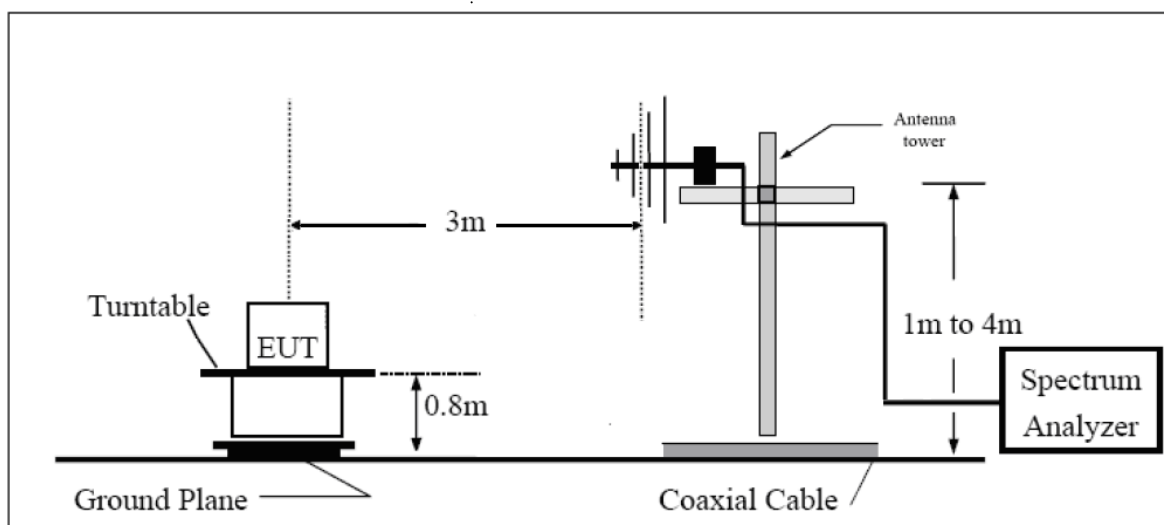

Above 1GHz

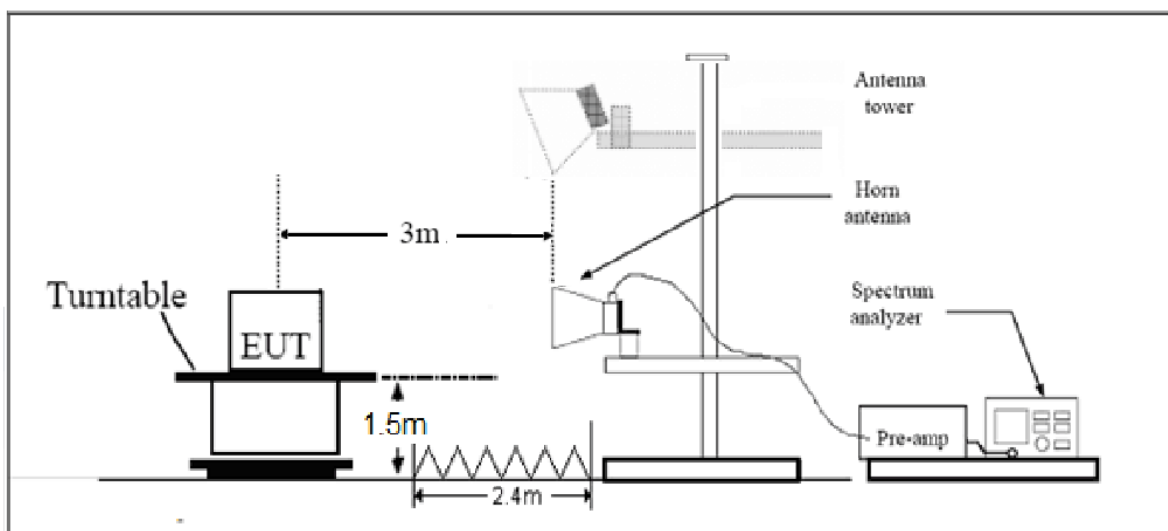

Note: Area side:2.4mX3.6m

**Limits**

- (1) For transmitters operating in the 5725-5850 MHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
- (2) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz(68.2dBμV/m).
- (3) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz(68.2dBμV/m).
- (4) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz(68.2dBμV/m).

Note: the following formula is used to convert the EIRP to field strength

§1、 $E[\text{dB}\mu\text{V/m}] = \text{EIRP}[\text{dBm}] - 20 \log(d[\text{meters}]) + 104.77$, where E = field strength and

d = distance at which field strength limit is specified in the rules;

§2、 $E[\text{dB}\mu\text{V/m}] = \text{EIRP}[\text{dBm}] + 95.2$, for d = 3 meters

- (5) Unwanted spurious emissions fallen in restricted bands per FCC Part15.205 shall comply with the general field strength limits set forth in § 15.209 as below table.

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
0.009–0.490	2400/F(kHz)	/
0.490–1.705	24000/F(kHz)	/
1.705–30.0	30	/
30-88	100	40
88-216	150	43.5
216-960	200	46
Above960	500	54

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
9KHz-30MHz	3.55 dB
30MHz-200MHz	4.17 dB
200MHz-1GHz	4.84 dB
1-18GHz	4.35 dB
18-26.5GHz	5.90 dB
26.5GHz~40GHz	5.92 dB

Test Results:


The modulation and bandwidth are similar for 802.11n mode for 20MHz/40MHz and 802.11ac mode for 20MHz/40MHz, therefore investigated worst case to representative mode in test report.

The signal beyond the limit is carrier.


U-NII-1

SISO Antenna1


802.11a-Channel 36: Peak

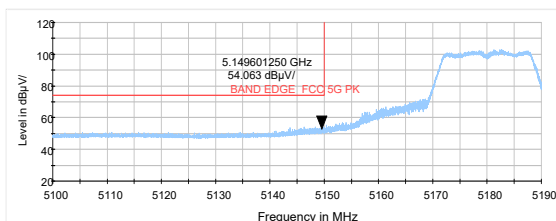


802.11a-Channel 48: Peak

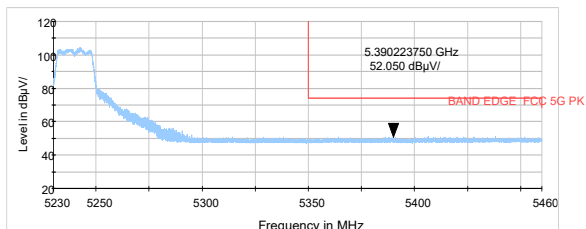

802.11a-Channel 36: Average

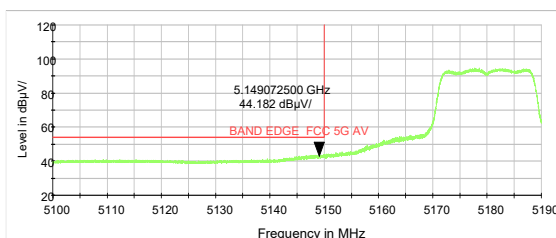


802.11a-Channel 48: Average

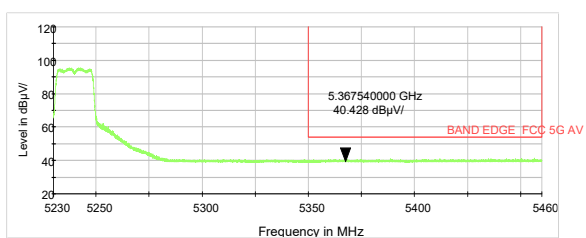


MIMO Antenna1& Antenna2


802.11n HT20-Channel 36: Peak

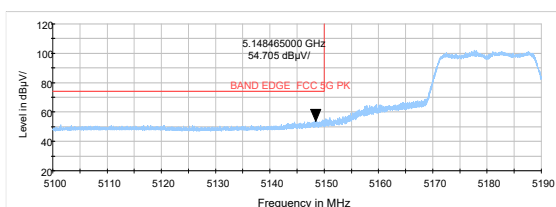


802.11n HT20-Channel 48: Peak

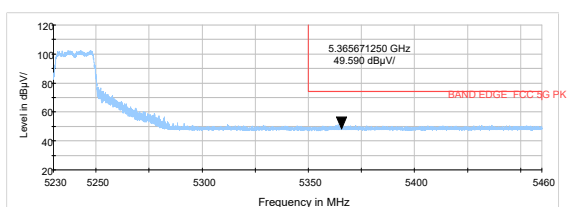


802.11n HT20-Channel 36: Average

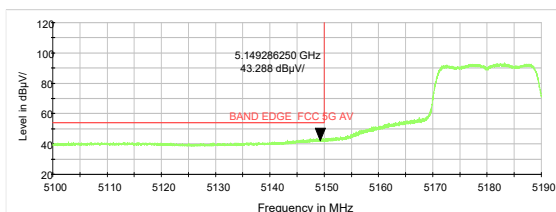


802.11n HT20-Channel 48: Average






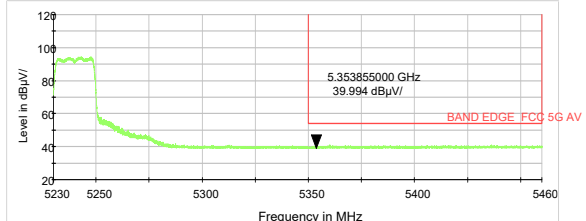


802.11n HT40-Channel 38: Peak

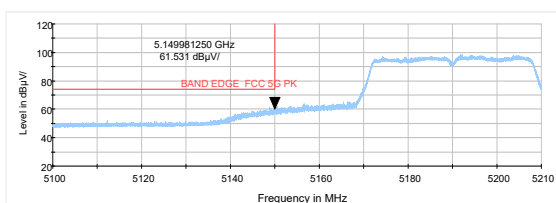

802.11n HT40-Channel 46: Peak

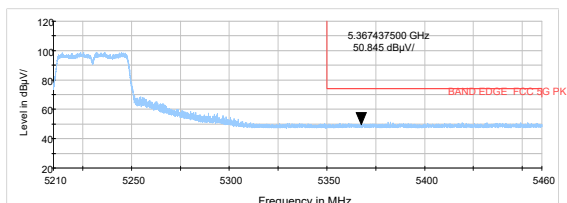


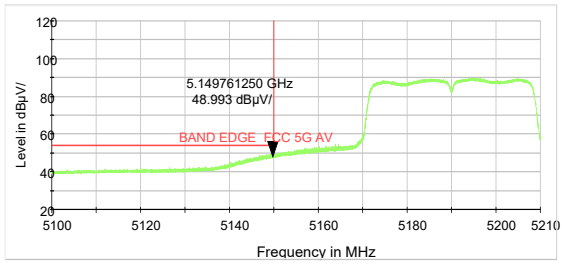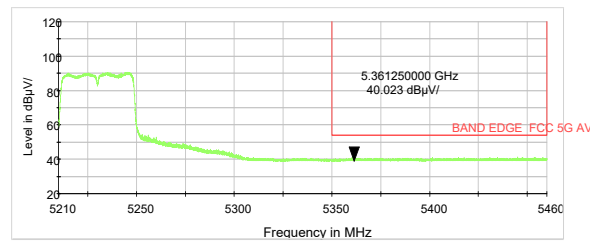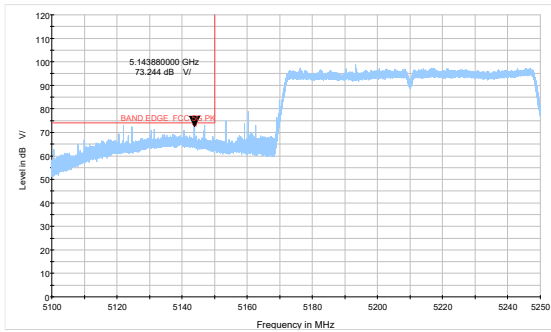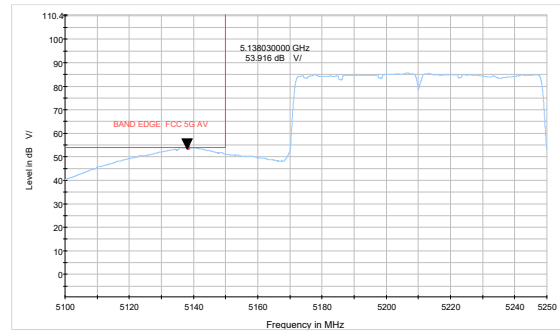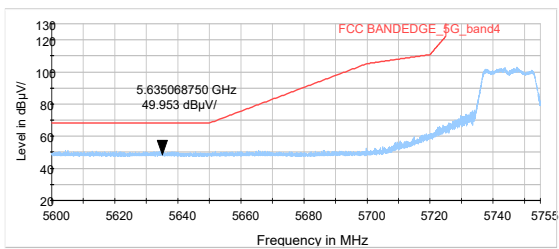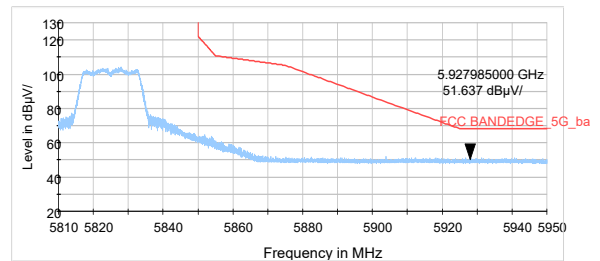**802.11n HT40-Channel 38: Average****802.11n HT40-Channel 46: Average****802.11ac VHT80 -Channel 42: Peak****802.11ac VHT80- Channel 42: Average****U-NII-3****SISO Antenna1****802.11a-Channel 149: Peak****802.11a-Channel 165: Peak**




MIMO Antenna1& Antenna2


802.11n HT20-Channel 149: Peak

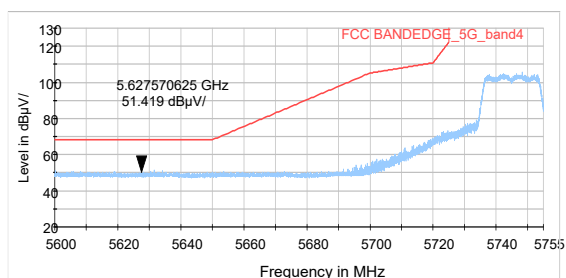


802.11n HT20-Channel 165: Peak

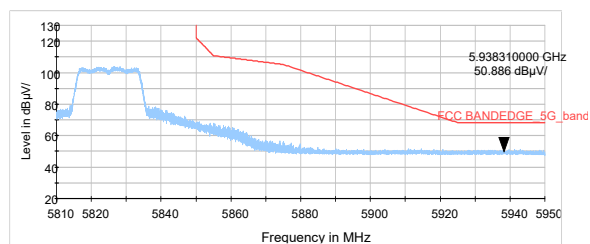


802.11n HT40-Channel 151: Peak

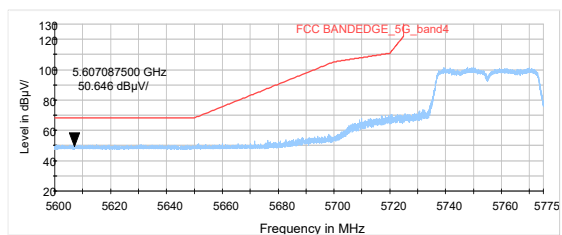

802.11n HT40-Channel 159: Peak

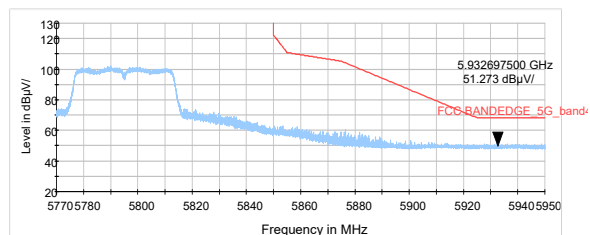

802.11ac VHT80- Channel 155: Peak

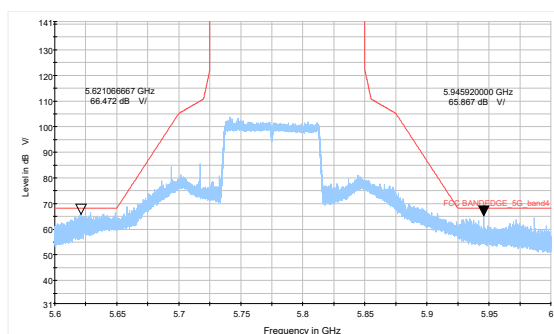

Result of RE


Test result

Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the Emissions in the frequency band 9kHz-30MHz and 18GHz-40GHz are more than 20dB below the limit are not reported.

After the pretest, MIMO was selected as the worst antenna for 802.11n HT20/40, 802.11ac VHT20/40/80. SISO Antenna 1 was selected as the worst SISO antenna for 802.11a.

During the test, the Radiates Emission from 30MHz to 1GHz was performed in all modes with all channels, 802.11ac (VHT80) CH155 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

Continuous TX mode:

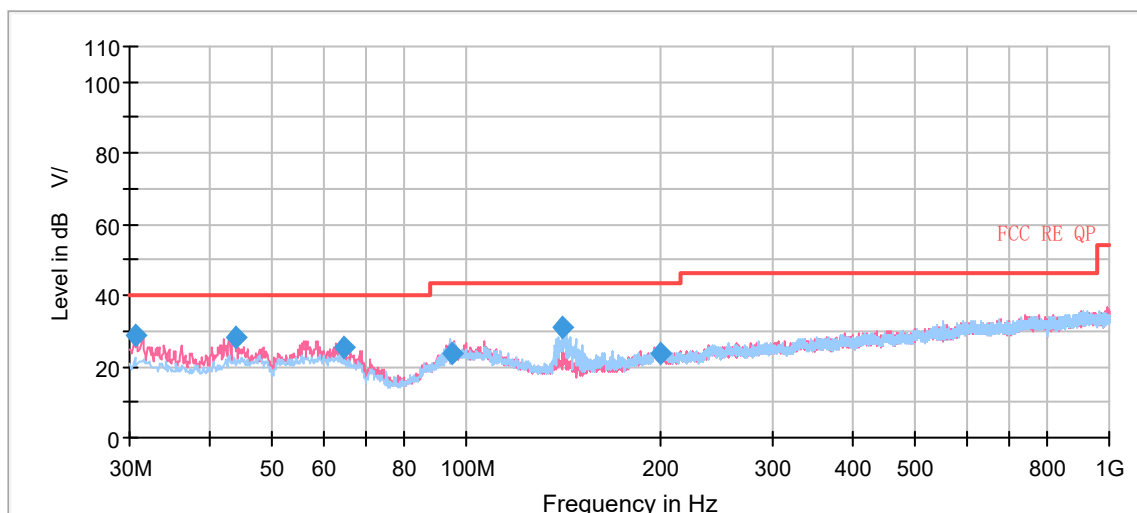

Radiates Emission from 30MHz to 1GHz


Frequency (MHz)	Quasi-Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
30.600000	28.60	100.0	V	164.0	-4.7	11.40	40.00
43.778750	28.19	112.0	V	44.0	-5.2	11.81	40.00
64.791250	25.12	100.0	V	0.0	-7.0	14.88	40.00
95.197500	23.49	100.0	V	180.0	-6.8	20.01	43.50
141.186250	31.00	185.0	H	262.0	-9.4	12.50	43.50
199.992500	23.93	110.0	H	276.0	-5.9	19.57	43.50

Remark: 1. Correction Factor = Antenna factor+ Insertion loss(cable loss+amplifier gain)

2. Margin = Limit – Quasi-Peak


SISO Antenna1

802.11a CH36

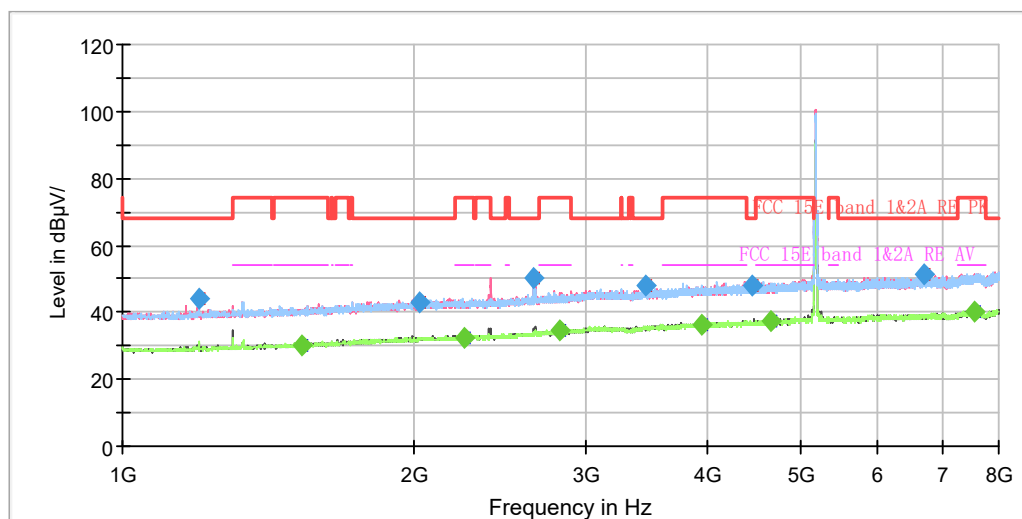

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

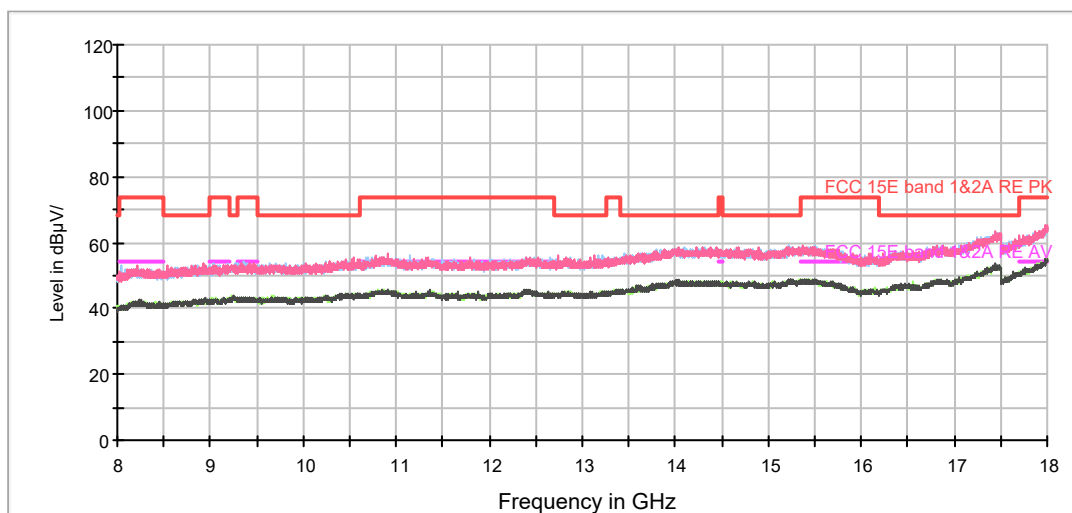


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1198.625000	44.01	---	68.20	24.19	100.0	H	0.0	-7.8
1532.000000	---	30.41	54.00	23.59	100.0	H	111.0	-6.0
2019.375000	43.16	---	68.20	25.04	100.0	V	156.0	-3.3
2252.125000	---	32.62	54.00	21.38	100.0	V	118.0	-2.4
2655.500000	50.07	---	68.20	18.13	200.0	V	40.0	-0.7
2822.625000	---	34.55	54.00	19.45	100.0	V	281.0	0.2
3466.625000	47.99	---	68.20	20.21	200.0	H	97.0	2.2
3954.000000	---	36.50	54.00	17.50	200.0	V	77.0	3.9
4451.000000	48.18	---	68.20	20.02	100.0	V	0.0	4.9
4666.250000	---	37.59	54.00	16.41	200.0	V	20.0	5.5
6712.875000	51.27	---	68.20	16.93	200.0	V	123.0	8.8
7542.375000	---	40.37	54.00	13.63	200.0	V	358.0	10.0

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11a CH40

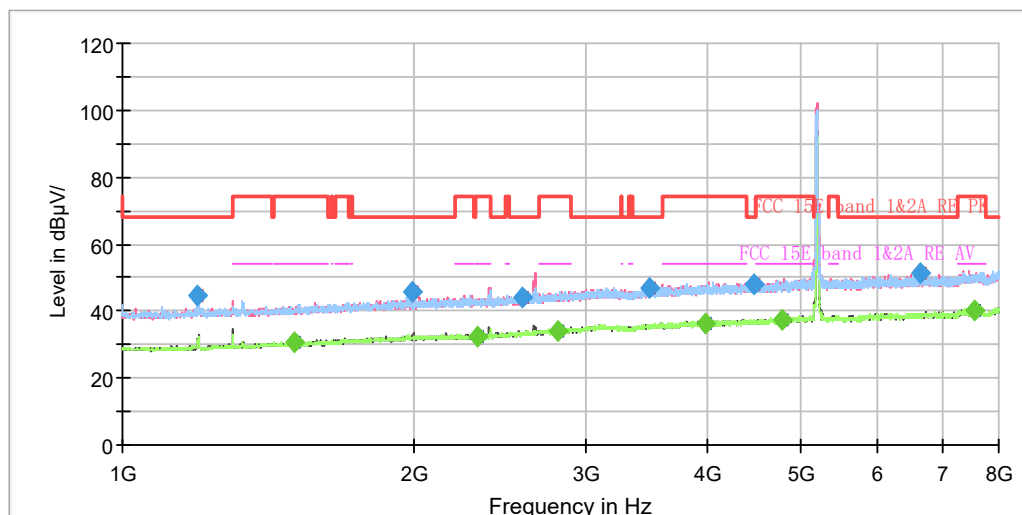

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

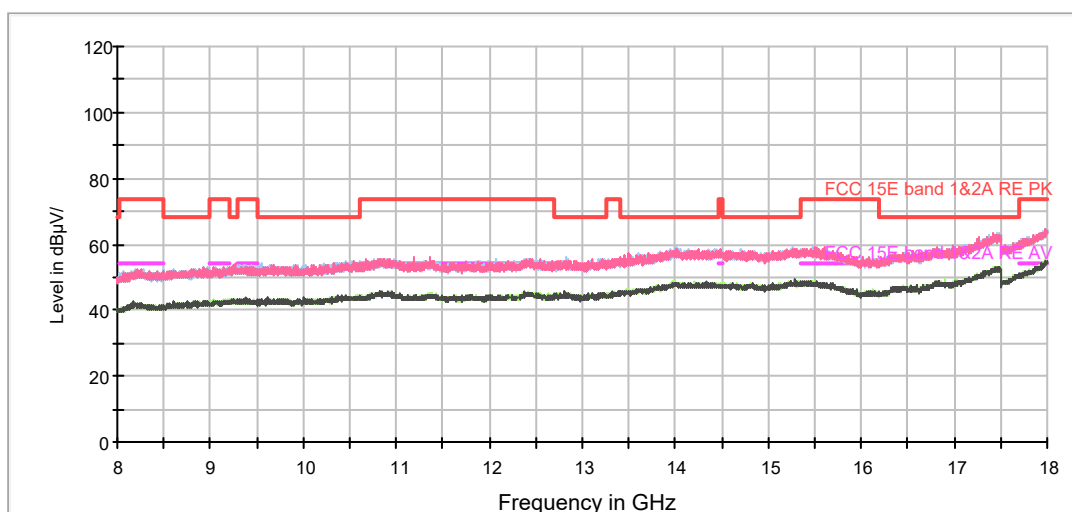


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1195.125000	44.47	---	68.20	23.73	100.0	V	218.0	-7.8
1504.000000	---	30.97	54.00	23.03	100.0	V	218.0	-6.2
1992.250000	45.83	---	68.20	22.37	200.0	V	145.0	-3.4
2324.750000	---	32.11	54.00	21.89	100.0	V	261.0	-2.2
2588.125000	44.14	---	68.20	24.06	100.0	V	6.0	-1.0
2814.750000	---	34.31	54.00	19.69	100.0	V	312.0	0.2
3499.000000	46.92	---	68.20	21.28	100.0	H	90.0	2.3
3994.250000	---	36.45	54.00	17.55	200.0	V	69.0	4.0
4470.250000	48.07	---	68.20	20.13	200.0	V	63.0	4.9
4773.000000	---	37.58	54.00	16.42	200.0	H	67.0	5.8
6653.375000	51.20	---	68.20	17.00	100.0	H	154.0	8.8
7548.500000	---	39.96	54.00	14.04	200.0	V	230.0	10.0

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11a CH48

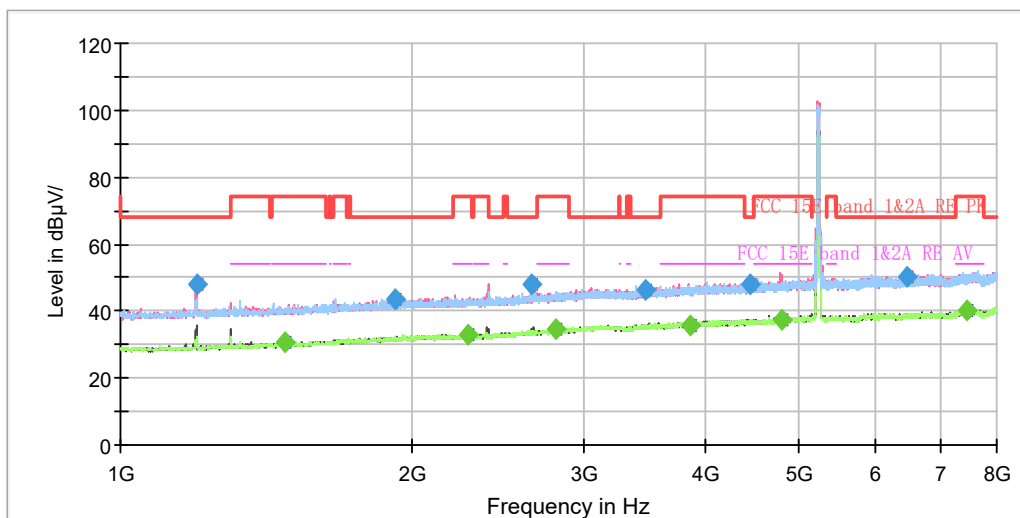

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

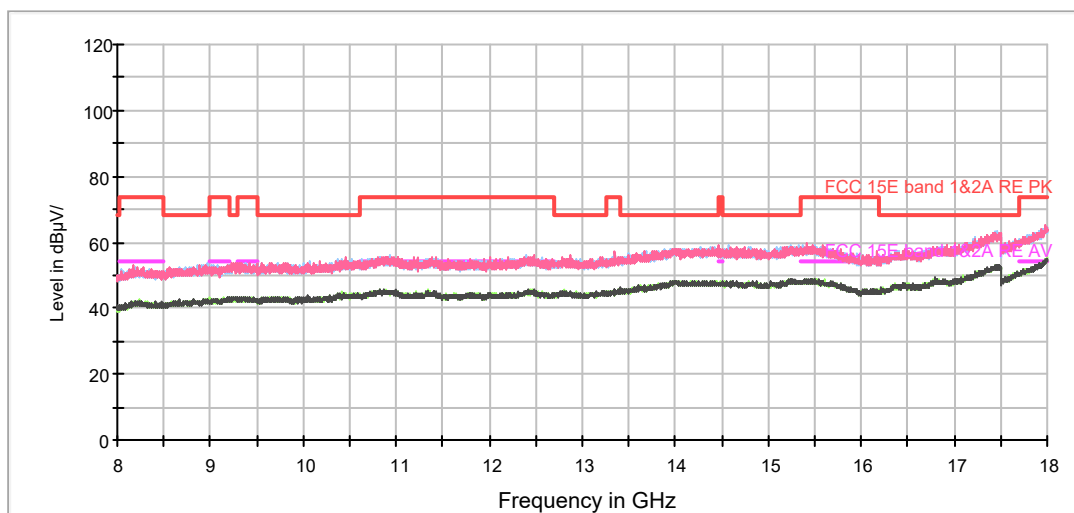


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1196.875000	48.20	---	68.20	20.00	200.0	V	111.0	-7.8
1476.000000	---	30.47	54.00	23.53	200.0	V	304.0	-6.3
1920.500000	43.38	---	68.20	24.82	200.0	V	48.0	-3.9
2279.250000	---	32.79	54.00	21.21	100.0	V	170.0	-2.3
2657.250000	48.02	---	68.20	20.18	200.0	V	27.0	-0.7
2813.000000	---	34.49	54.00	19.51	200.0	V	111.0	0.2
3481.500000	46.58	---	68.20	21.62	100.0	H	214.0	2.2
3860.375000	---	35.97	54.00	18.03	200.0	V	352.0	3.7
4464.125000	47.95	---	68.20	20.25	200.0	V	130.0	4.9
4803.625000	---	37.60	54.00	16.40	100.0	V	347.0	5.9
6470.500000	50.11	---	68.20	18.09	100.0	V	120.0	8.5
7460.125000	---	39.92	54.00	14.08	100.0	V	245.0	9.8

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11a CH149

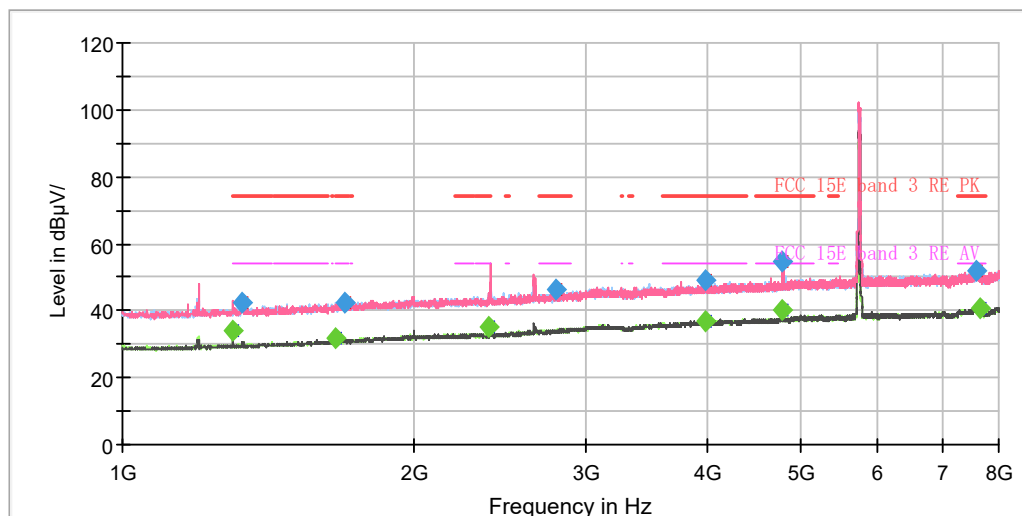

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

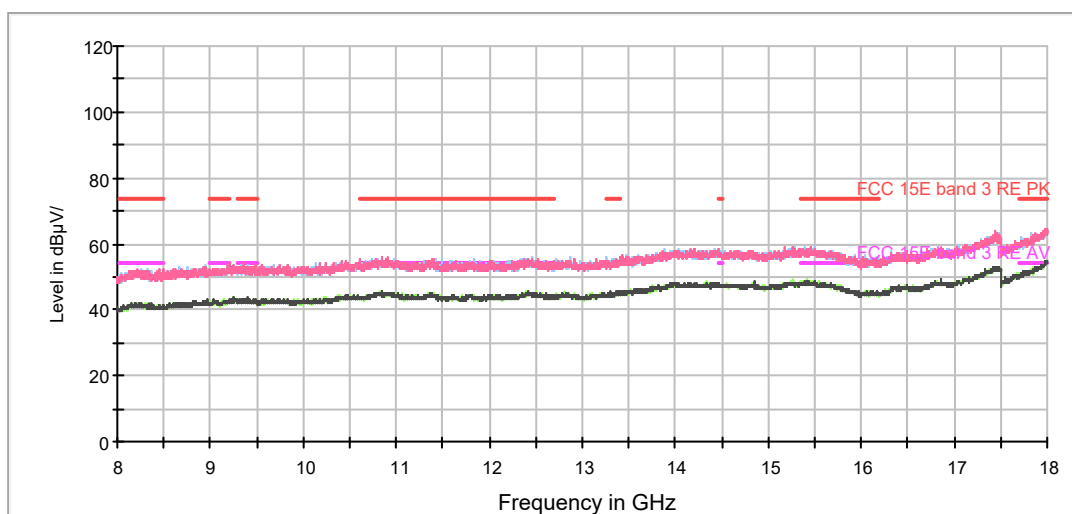


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1300.125000	---	33.98	54.00	20.02	100.0	V	203.0	-7.2
1329.875000	42.54	---	74.00	31.46	100.0	H	149.0	-7.1
1660.625000	---	31.71	54.00	22.29	100.0	V	298.0	-5.2
1693.875000	42.66	---	74.00	31.34	200.0	V	33.0	-5.1
2380.750000	---	35.03	54.00	18.97	200.0	V	346.0	-2.0
2794.625000	46.09	---	74.00	27.91	100.0	H	224.0	0.0
3994.250000	49.07	---	74.00	24.93	200.0	V	227.0	4.0
3995.125000	---	36.85	54.00	17.15	200.0	H	241.0	4.0
4786.125000	54.46	---	74.00	19.54	200.0	V	287.0	5.8
4786.125000	---	39.93	54.00	14.07	200.0	V	287.0	5.8
7580.000000	51.66	---	74.00	22.34	100.0	H	149.0	10.1
7650.875000	---	40.48	54.00	13.52	200.0	H	254.0	10.2

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11a CH157

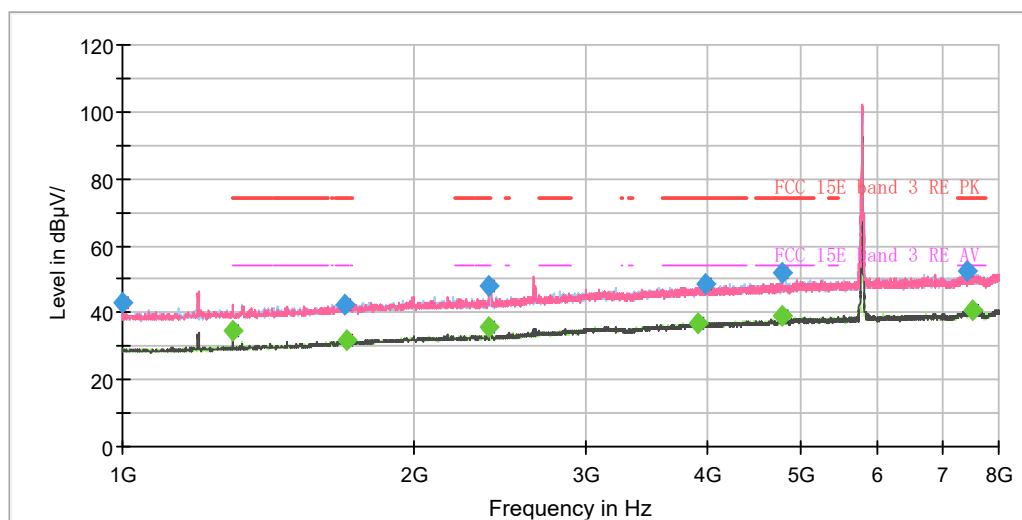

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

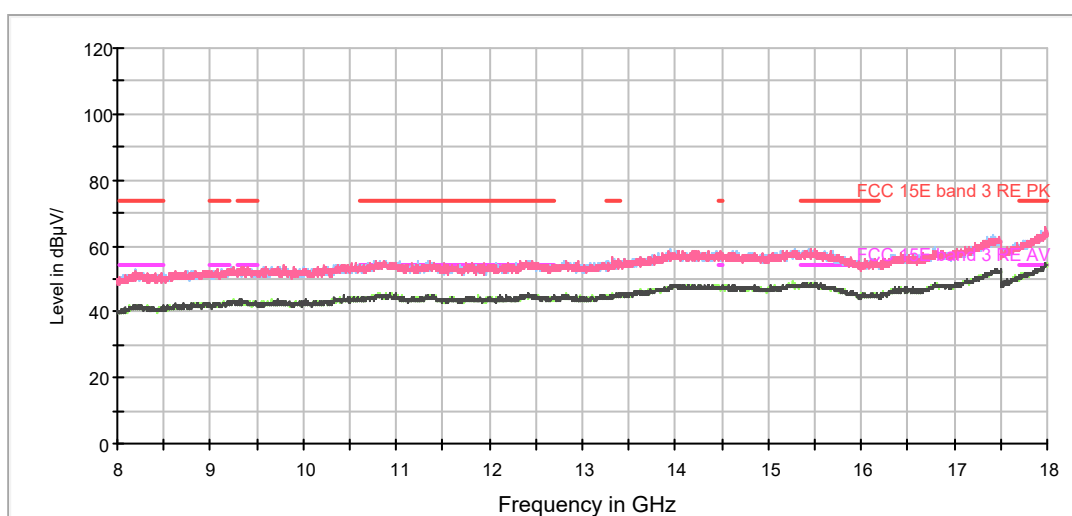


Radiates Emission from 8GHz to 18GHz



Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1000.000000	42.80	---	74.00	31.20	200.0	V	32.0	-8.9
1300.125000	---	34.36	54.00	19.64	100.0	V	206.0	-7.2
1698.250000	42.35	---	74.00	31.65	200.0	H	344.0	-5.0
1700.000000	---	31.62	54.00	22.38	100.0	V	155.0	-5.0
2380.750000	---	35.56	54.00	18.44	200.0	V	302.0	-2.0
2388.625000	48.05	---	74.00	25.95	100.0	V	35.0	-2.0
3925.125000	---	36.80	54.00	17.20	100.0	V	306.0	3.8
3984.625000	48.36	---	74.00	25.64	200.0	V	120.0	4.0
4782.625000	---	39.24	54.00	14.76	200.0	V	296.0	5.8
4785.250000	51.64	---	74.00	22.36	200.0	V	296.0	5.8
7421.625000	52.25	---	74.00	21.75	200.0	V	139.0	9.8
7525.750000	---	40.66	54.00	13.34	100.0	H	326.0	9.9


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11a CH165

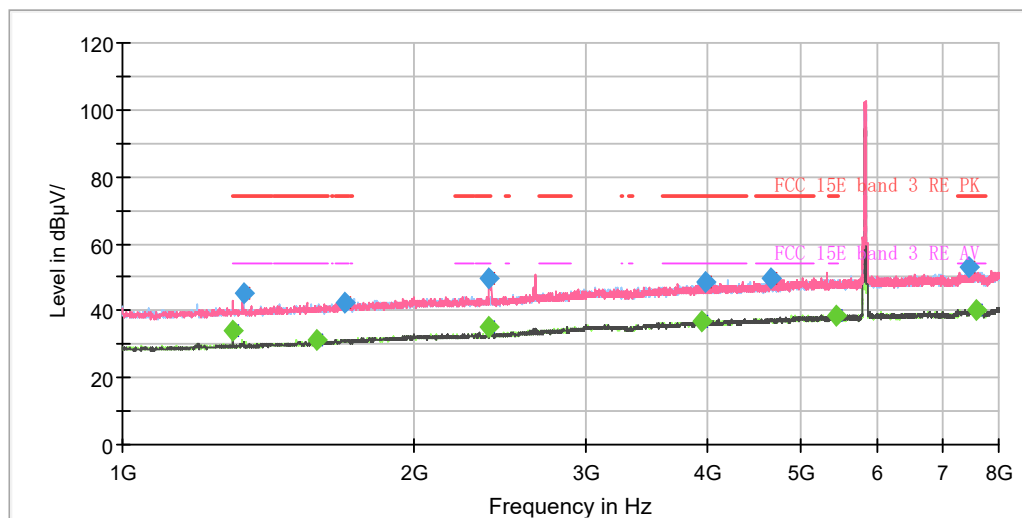

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

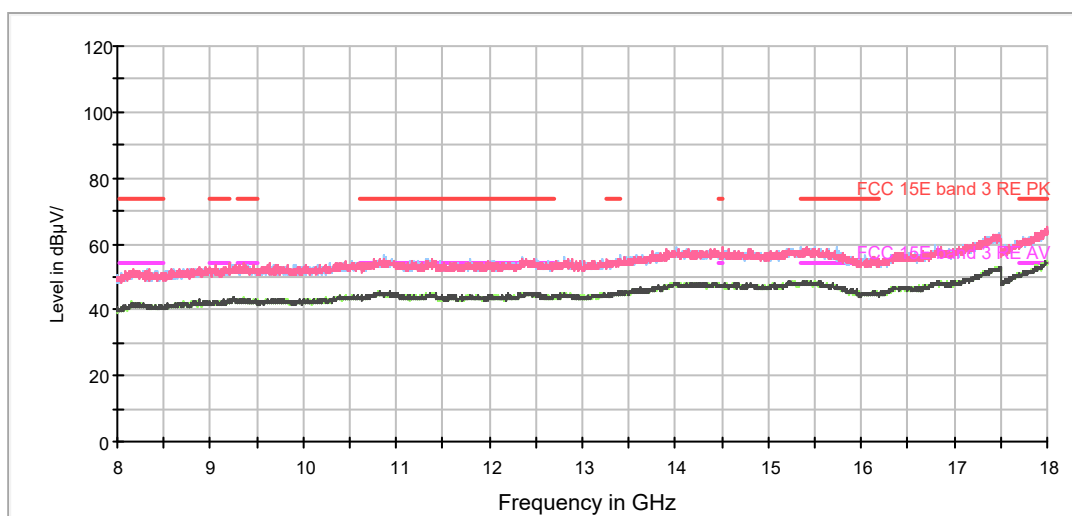

Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1300.125000	---	34.17	54.00	19.83	100.0	V	201.0	-7.2
1331.625000	45.07	---	74.00	28.93	200.0	H	332.0	-7.1
1587.125000	---	31.50	54.00	22.50	200.0	V	297.0	-5.6
1693.875000	42.70	---	74.00	31.30	200.0	H	143.0	-5.1
2388.625000	49.48	---	74.00	24.52	200.0	V	21.0	-2.0
2389.500000	---	35.12	54.00	18.88	200.0	V	21.0	-2.0
3946.125000	---	36.81	54.00	17.19	100.0	H	259.0	3.9
3991.625000	48.33	---	74.00	25.67	100.0	V	171.0	4.0
4654.875000	49.94	---	74.00	24.06	200.0	V	272.0	5.5
5447.625000	---	38.39	54.00	15.61	100.0	H	259.0	7.2
7468.000000	52.86	---	74.00	21.14	200.0	V	73.0	9.8
7594.875000	---	40.34	54.00	13.66	200.0	V	157.0	10.1

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


MIMO Antenna1& Antenna2

802.11n (HT20) CH36

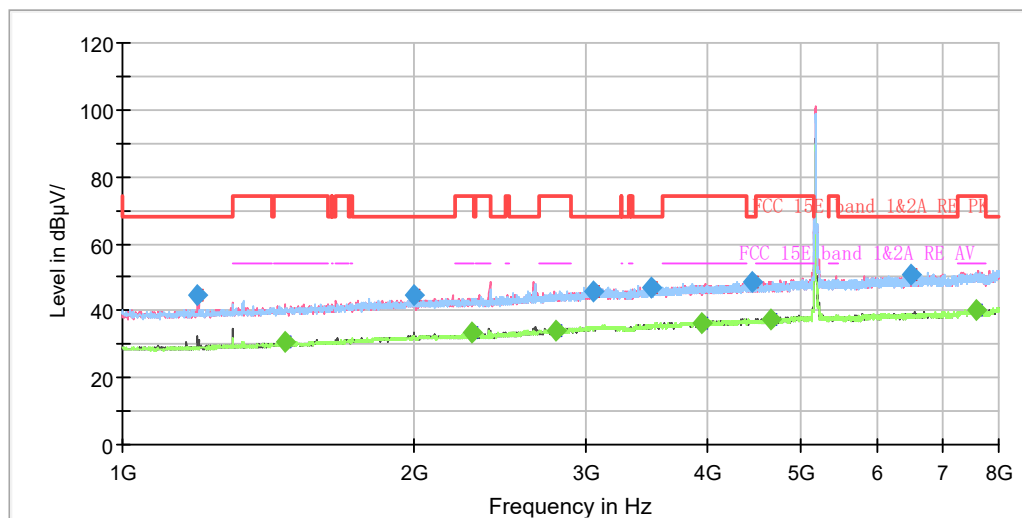

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

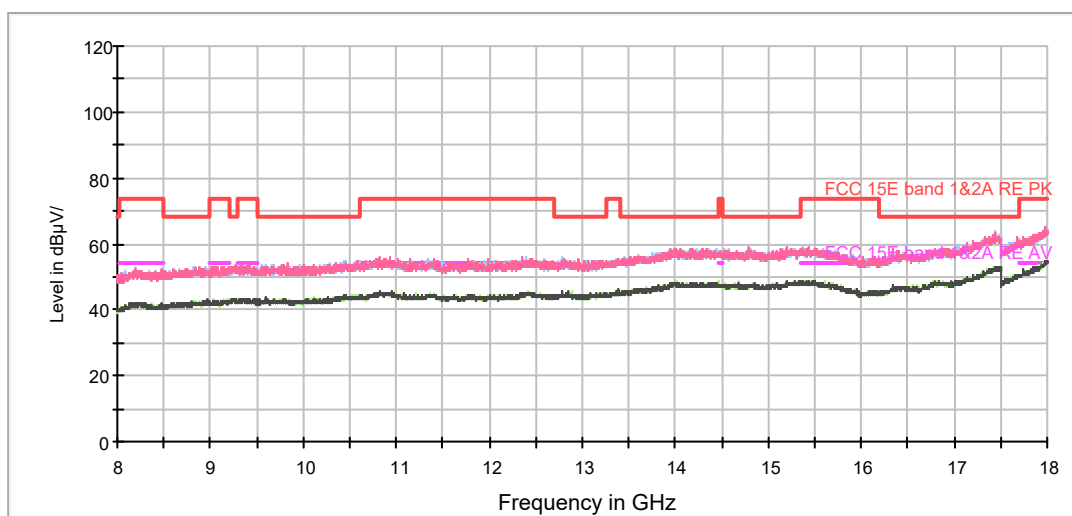


Radiates Emission from 8GHz to 18GHz



Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1194.250000	44.72	---	68.20	23.48	200.0	V	117.0	-7.8
1469.000000	---	30.53	54.00	23.47	100.0	V	233.0	-6.4
1995.750000	44.57	---	68.20	23.63	200.0	V	264.0	-3.4
2295.000000	---	33.37	54.00	20.63	200.0	V	184.0	-2.2
2799.875000	---	33.84	54.00	20.16	100.0	V	354.0	0.1
3056.250000	45.90	---	68.20	22.30	200.0	H	167.0	1.4
3507.750000	46.62	---	68.20	21.58	200.0	H	288.0	2.3
3958.375000	---	36.45	54.00	17.55	100.0	V	39.0	3.9
4451.000000	48.36	---	68.20	19.84	200.0	V	233.0	4.9
4651.375000	---	37.14	54.00	16.86	100.0	V	0.0	5.5
6486.250000	50.77	---	68.20	17.43	200.0	H	207.0	8.6
7588.750000	---	40.30	54.00	13.70	200.0	V	331.0	10.1


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT20) CH40

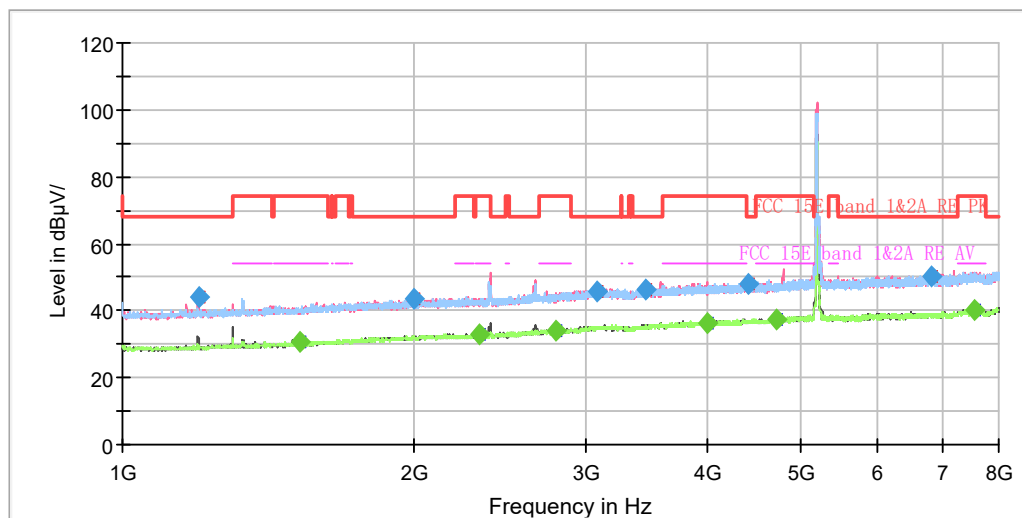

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

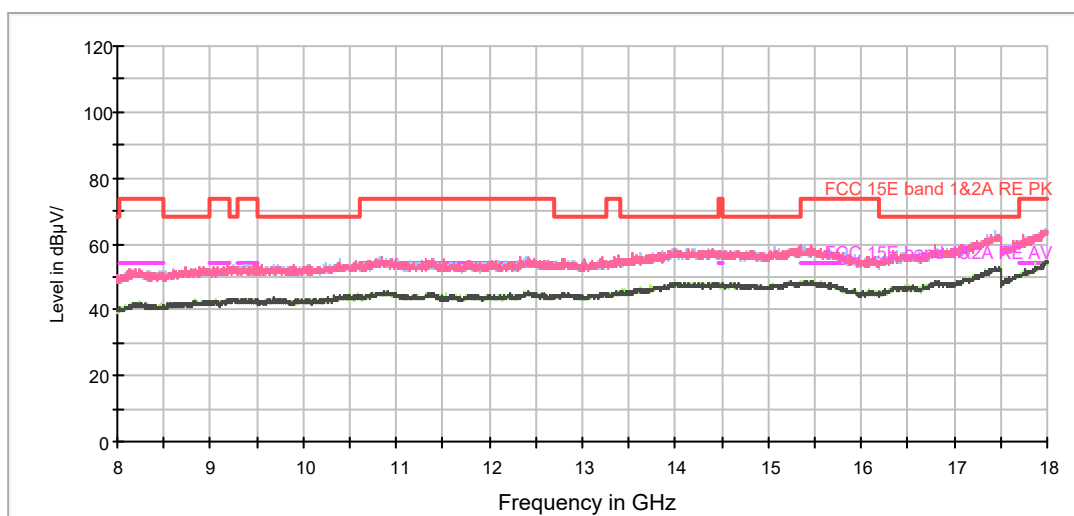


Radiates Emission from 8GHz to 18GHz



Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1199.500000	43.87	---	68.20	24.33	100.0	V	86.0	-7.8
1521.500000	---	30.69	54.00	23.31	100.0	V	123.0	-6.0
1993.125000	43.57	---	68.20	24.63	200.0	V	295.0	-3.4
2327.375000	---	32.66	54.00	21.34	200.0	V	277.0	-2.2
2799.875000	---	34.27	54.00	19.73	200.0	V	126.0	0.1
3086.000000	45.79	---	68.20	22.41	200.0	V	295.0	1.5
3454.375000	46.32	---	68.20	21.88	200.0	V	11.0	2.2
4011.750000	---	36.48	54.00	17.52	200.0	V	163.0	4.1
4425.625000	47.95	---	68.20	20.25	100.0	V	92.0	4.9
4714.375000	---	37.30	54.00	16.70	100.0	V	256.0	5.6
6813.500000	50.30	---	68.20	17.90	100.0	H	82.0	9.1
7550.250000	---	40.34	54.00	13.66	100.0	V	169.0	10.0


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT20) CH48

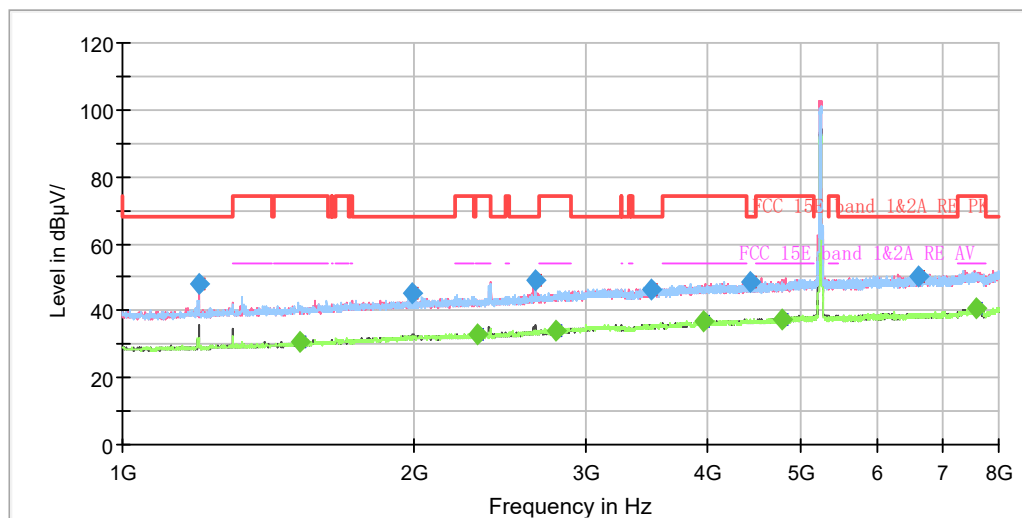

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

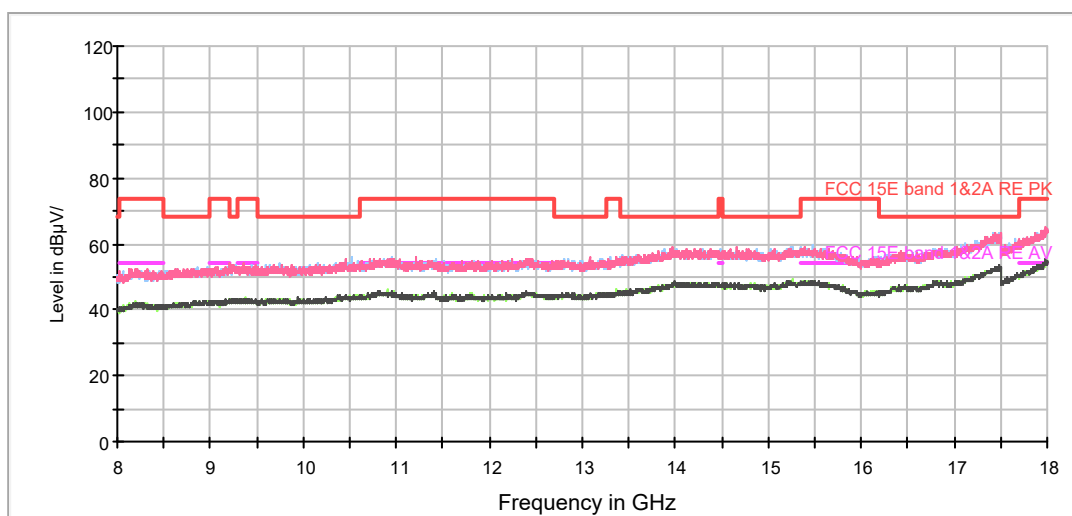


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1199.500000	48.25	---	68.20	19.95	200.0	V	98.0	-7.8
1521.500000	---	30.57	54.00	23.43	200.0	V	111.0	-6.0
1989.625000	45.19	---	68.20	23.01	200.0	V	274.0	-3.5
2323.000000	---	32.75	54.00	21.25	100.0	V	197.0	-2.2
2659.000000	48.90	---	68.20	19.30	200.0	V	262.0	-0.7
2801.625000	---	34.27	54.00	19.73	100.0	H	131.0	0.1
3506.000000	46.59	---	68.20	21.61	100.0	H	275.0	2.3
3963.625000	---	36.89	54.00	17.11	100.0	V	0.0	3.9
4444.875000	48.44	---	68.20	19.76	100.0	V	343.0	4.9
4773.875000	---	37.15	54.00	16.85	200.0	V	0.0	5.8
6614.000000	50.10	---	68.20	18.10	100.0	V	122.0	8.7
7587.000000	---	40.59	54.00	13.41	100.0	H	20.0	10.1

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT20) CH149

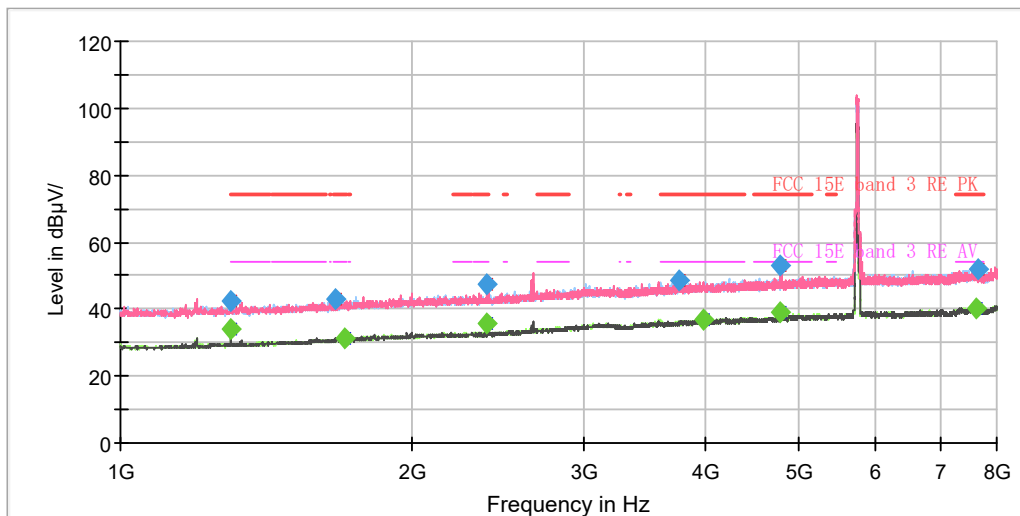

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

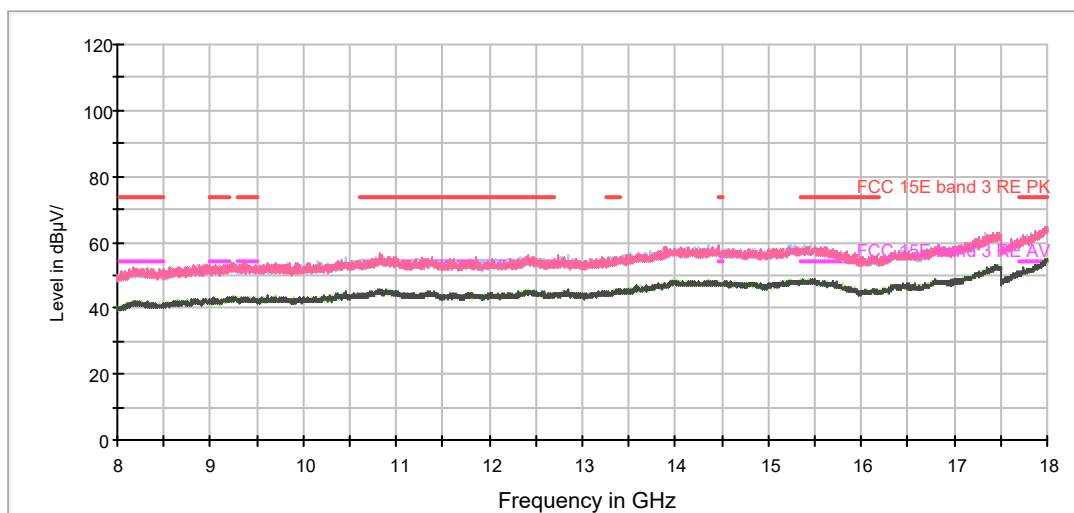


Radiates Emission from 8GHz to 18GHz



Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1300.125000	---	33.80	54.00	20.20	100.0	V	196.0	-7.2
1300.125000	42.33	---	74.00	31.67	100.0	V	196.0	-7.2
1665.000000	42.88	---	74.00	31.12	100.0	V	65.0	-5.2
1702.625000	---	31.26	54.00	22.74	200.0	V	329.0	-5.0
2389.500000	47.40	---	74.00	26.60	200.0	V	103.0	-2.0
2389.500000	---	35.47	54.00	18.53	200.0	V	103.0	-2.0
3765.875000	48.49	---	74.00	25.51	100.0	H	178.0	3.3
3994.250000	---	36.67	54.00	17.33	100.0	V	259.0	4.0
4778.250000	---	39.12	54.00	14.88	200.0	V	276.0	5.8
4778.250000	52.76	---	74.00	21.24	200.0	V	276.0	5.8
7611.500000	---	40.37	54.00	13.63	200.0	H	215.0	10.2
7647.375000	51.79	---	74.00	22.21	100.0	H	335.0	10.2


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT20) CH157

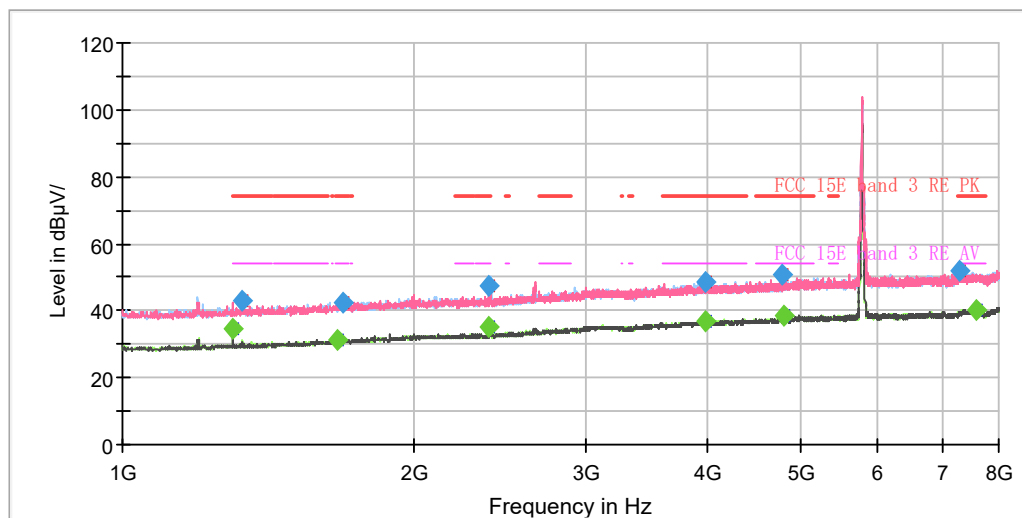

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

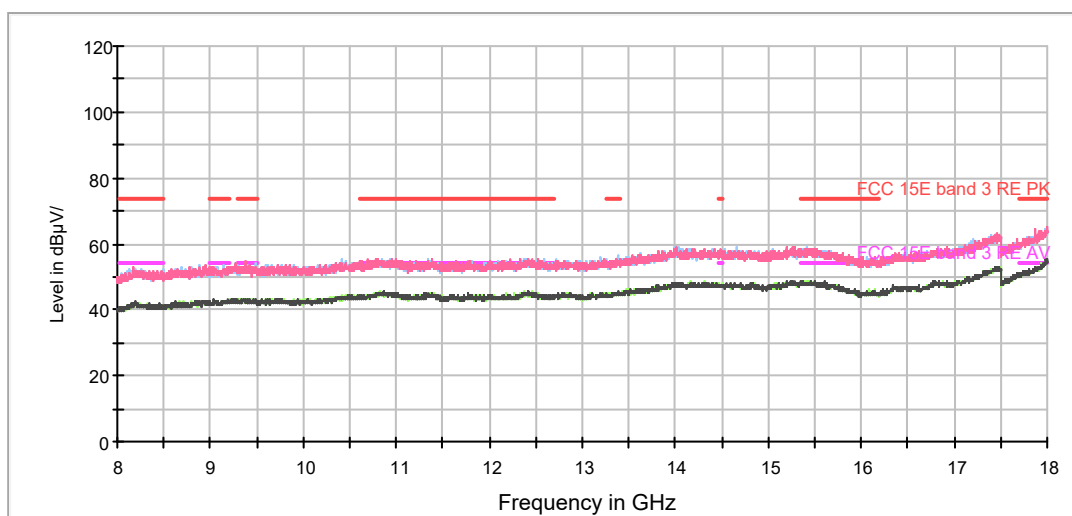


Radiates Emission from 8GHz to 18GHz



Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1300.125000	---	34.71	54.00	19.29	100.0	V	207.0	-7.2
1329.000000	42.96	---	74.00	31.04	100.0	H	328.0	-7.1
1662.375000	---	31.40	54.00	22.60	100.0	V	292.0	-5.2
1684.250000	42.44	---	74.00	31.56	200.0	V	59.0	-5.1
2380.750000	---	35.00	54.00	19.00	100.0	V	0.0	-2.0
2389.500000	47.70	---	74.00	26.30	200.0	V	172.0	-2.0
3980.250000	---	36.67	54.00	17.33	100.0	H	284.0	4.0
3982.000000	48.40	---	74.00	25.60	100.0	V	35.0	4.0
4791.375000	50.87	---	74.00	23.13	100.0	V	351.0	5.8
4794.000000	---	38.51	54.00	15.49	100.0	V	351.0	5.8
7293.875000	51.98	---	74.00	22.02	100.0	V	182.0	9.6
7582.625000	---	40.37	54.00	13.63	100.0	V	241.0	10.1


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT20) CH165

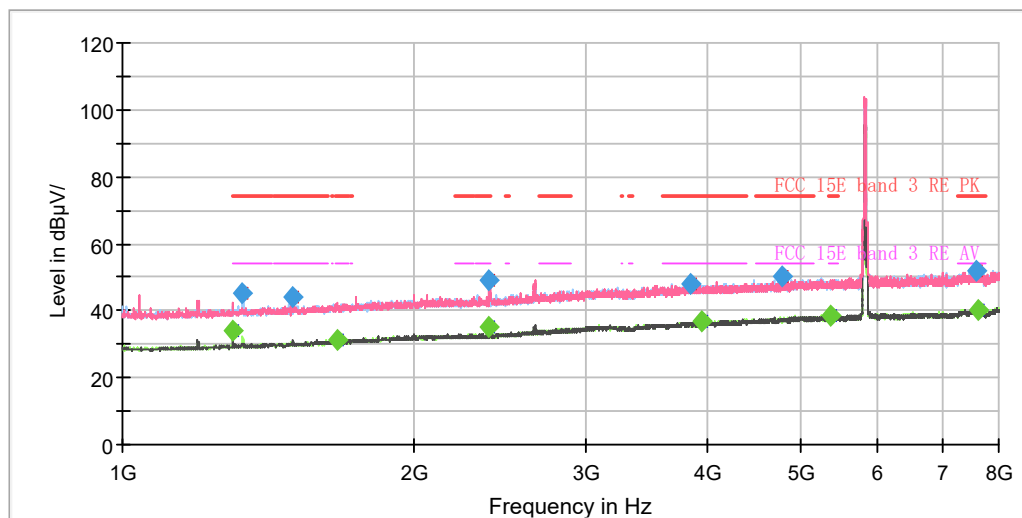

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

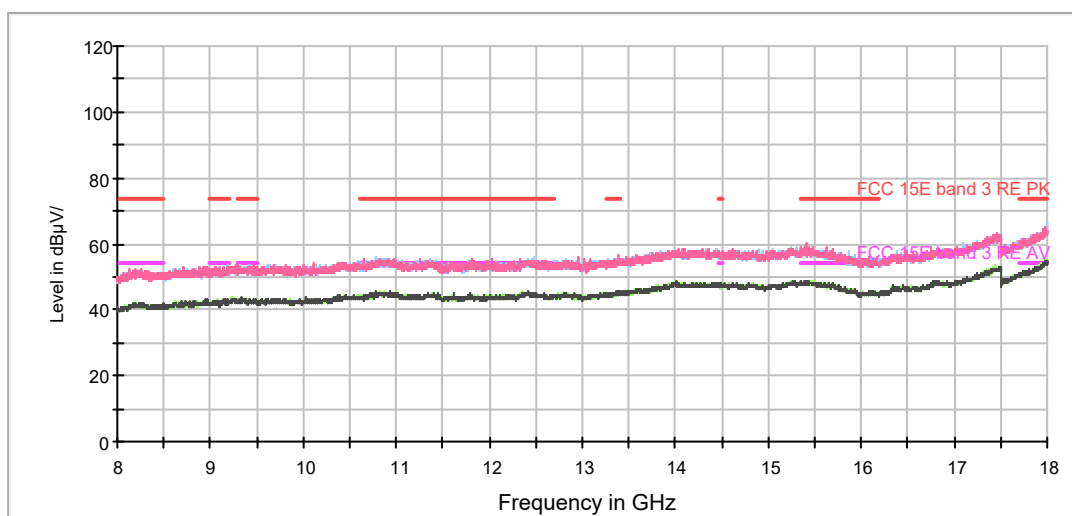


Radiates Emission from 8GHz to 18GHz



Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1300.125000	---	34.27	54.00	19.73	100.0	V	191.0	-7.2
1329.000000	45.35	---	74.00	28.65	200.0	H	335.0	-7.1
1499.625000	44.00	---	74.00	30.00	100.0	V	235.0	-6.2
1661.500000	---	31.29	54.00	22.71	100.0	V	247.0	-5.2
2389.500000	49.07	---	74.00	24.93	100.0	V	299.0	-2.0
2389.500000	---	35.43	54.00	18.57	100.0	V	299.0	-2.0
3851.625000	48.09	---	74.00	25.91	100.0	H	0.0	3.7
3944.375000	---	36.82	54.00	17.18	200.0	V	300.0	3.9
4778.250000	50.02	---	74.00	23.98	100.0	V	4.0	5.8
5378.500000	---	38.55	54.00	15.45	100.0	H	14.0	7.0
7599.250000	52.03	---	74.00	21.97	100.0	H	323.0	10.1
7602.750000	---	40.39	54.00	13.61	100.0	V	16.0	10.1


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT40) CH38

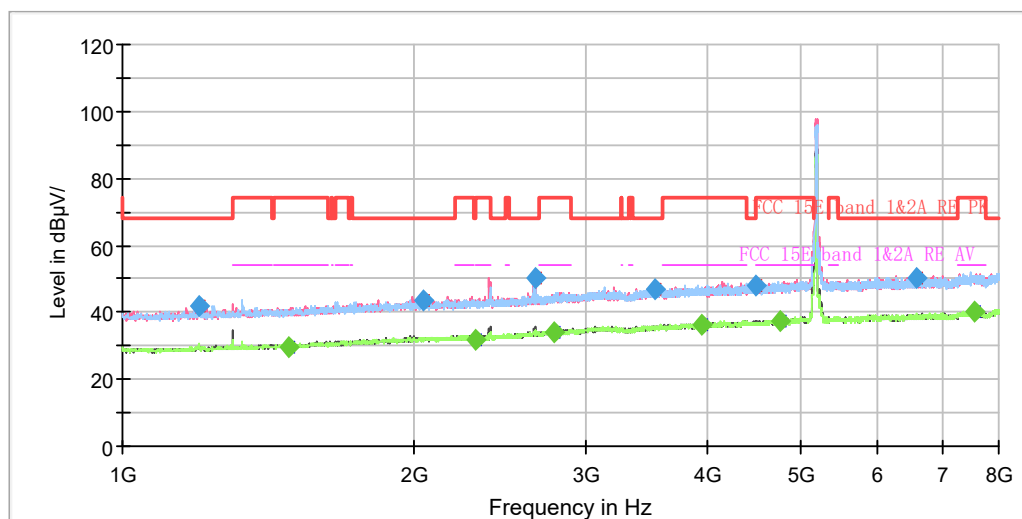

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

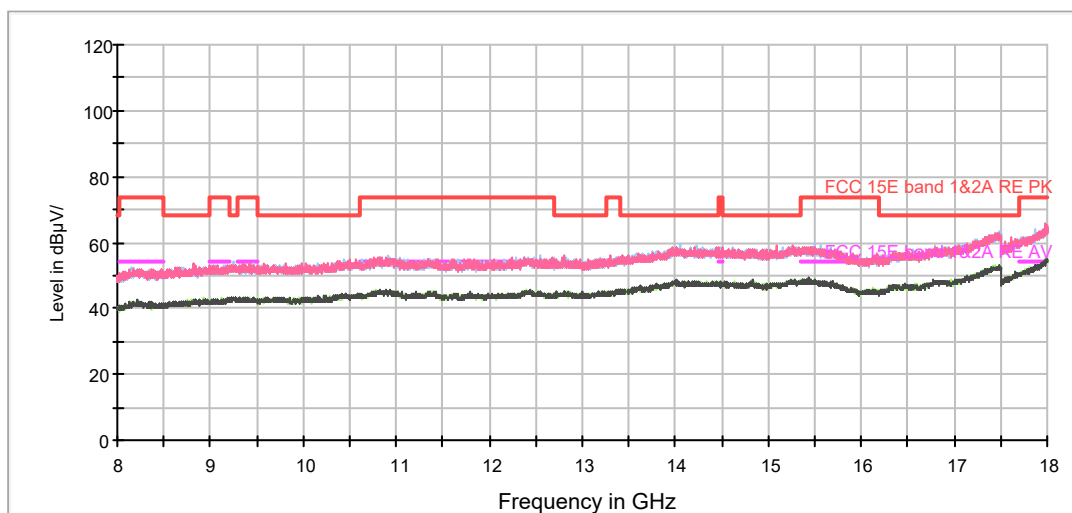


Radiates Emission from 8GHz to 18GHz



Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1197.750000	41.95	---	68.20	26.25	200.0	H	198.0	-7.8
1481.250000	---	29.78	54.00	24.22	200.0	V	223.0	-6.3
2042.125000	43.57	---	68.20	24.63	100.0	H	205.0	-3.2
2314.250000	---	31.91	54.00	22.09	100.0	H	267.0	-2.2
2664.250000	50.41	---	68.20	17.79	200.0	V	247.0	-0.7
2785.875000	---	34.32	54.00	19.68	200.0	H	153.0	0.0
3532.250000	46.70	---	68.20	21.50	100.0	V	134.0	2.5
3946.125000	---	36.52	54.00	17.48	200.0	V	314.0	3.9
4487.750000	48.05	---	68.20	20.15	200.0	V	10.0	4.9
4754.625000	---	37.55	54.00	16.45	200.0	H	348.0	5.8
6595.625000	50.05	---	68.20	18.15	100.0	H	316.0	8.7
7555.500000	---	40.42	54.00	13.58	100.0	V	313.0	10.0


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT40) CH46

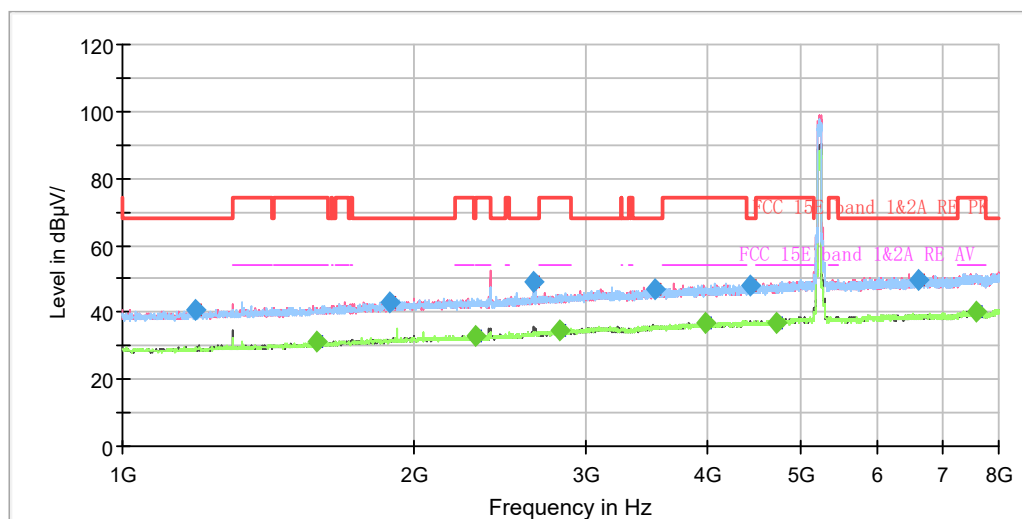

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

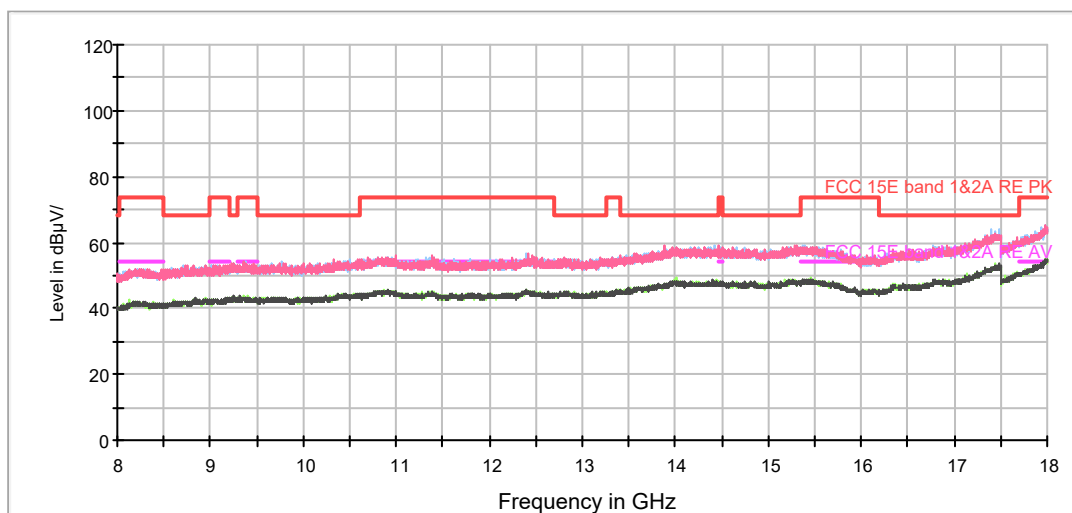


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1186.375000	40.62	---	68.20	27.58	200.0	H	298.0	-7.8
1588.000000	---	31.09	54.00	22.91	100.0	H	303.0	-5.6
1882.000000	42.87	---	68.20	25.33	200.0	H	158.0	-4.1
2314.250000	---	32.80	54.00	21.20	200.0	V	57.0	-2.2
2657.250000	49.32	---	68.20	18.88	200.0	V	259.0	-0.7
2826.125000	---	34.41	54.00	19.59	100.0	H	2.0	0.2
3545.375000	47.00	---	68.20	21.20	100.0	H	183.0	2.6
3982.000000	---	36.61	54.00	17.39	100.0	V	266.0	4.0
4438.750000	48.11	---	68.20	20.09	200.0	H	285.0	4.9
4724.875000	---	37.07	54.00	16.93	100.0	V	284.0	5.6
6604.375000	49.55	---	68.20	18.65	100.0	V	236.0	8.7
7593.125000	---	40.36	54.00	13.64	200.0	H	223.0	10.1

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT40) CH151

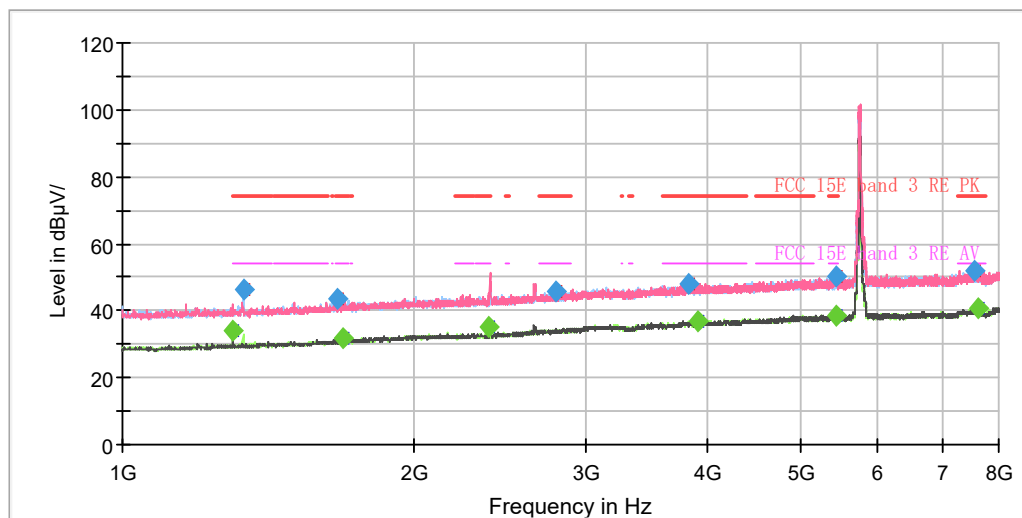

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

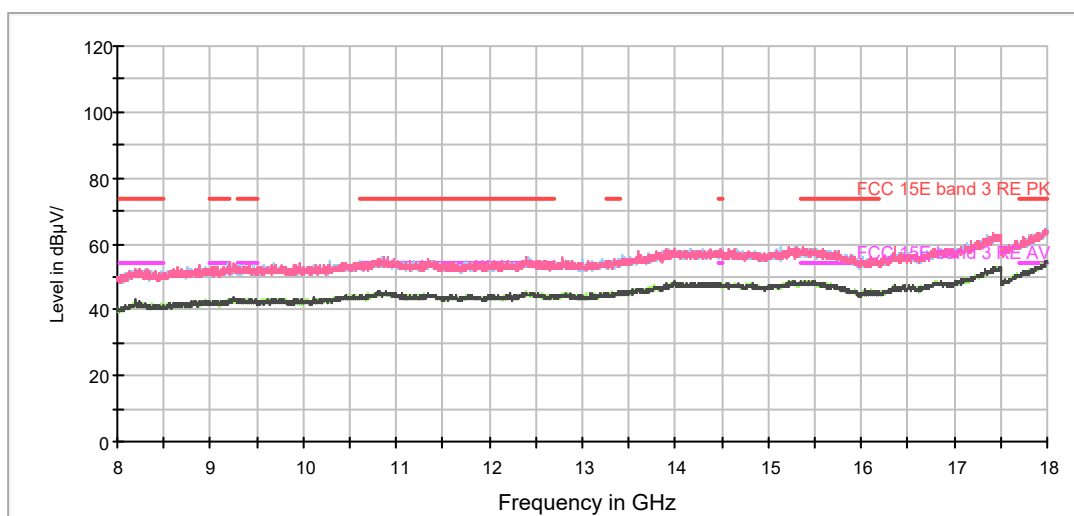


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1300.125000	---	34.18	54.00	19.82	100.0	V	185.0	-7.2
1331.625000	46.14	---	74.00	27.86	200.0	H	334.0	-7.1
1663.250000	43.80	---	74.00	30.20	100.0	V	300.0	-5.2
1690.375000	---	31.66	54.00	22.34	200.0	H	254.0	-5.1
2380.750000	---	35.20	54.00	18.80	200.0	V	2.0	-2.0
2796.375000	45.70	---	74.00	28.30	100.0	V	47.0	0.1
3838.500000	48.24	---	74.00	25.76	200.0	V	246.0	3.7
3925.125000	---	36.90	54.00	17.10	100.0	H	280.0	3.8
5435.375000	50.17	---	74.00	23.83	200.0	H	32.0	7.2
5442.375000	---	38.49	54.00	15.51	100.0	V	110.0	7.2
7567.750000	51.98	---	74.00	22.02	200.0	H	217.0	10.1
7628.125000	---	40.50	54.00	13.50	200.0	V	284.0	10.2

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT40) CH159

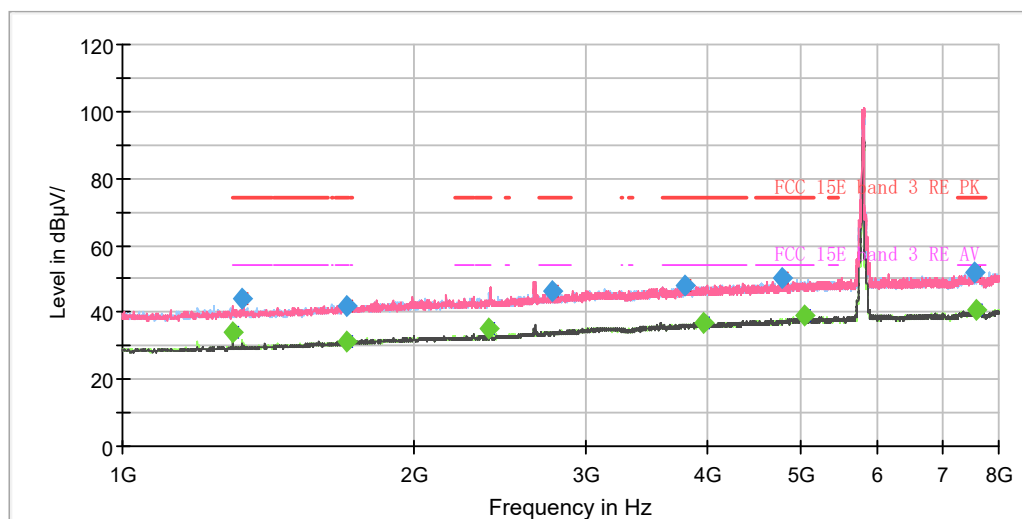

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

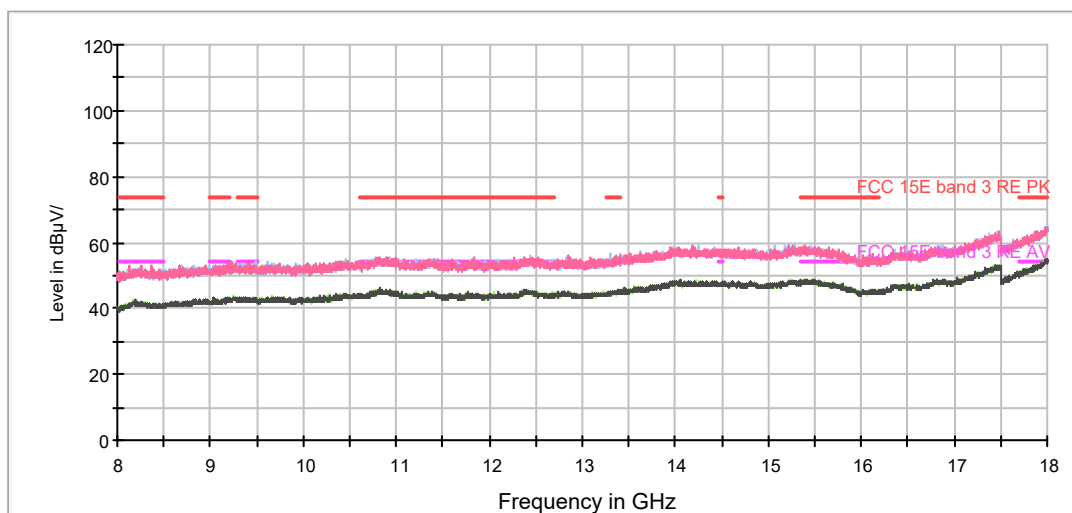


Radiates Emission from 8GHz to 18GHz



Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1300.125000	---	33.93	54.00	20.07	100.0	V	204.0	-7.2
1329.875000	44.35	---	74.00	29.65	200.0	H	336.0	-7.1
1701.750000	---	31.30	54.00	22.70	100.0	V	154.0	-5.0
1706.125000	42.03	---	74.00	31.97	200.0	H	58.0	-5.0
2380.750000	---	35.09	54.00	18.91	100.0	V	326.0	-2.0
2778.000000	46.08	---	74.00	27.92	200.0	H	9.0	-0.1
3800.875000	48.04	---	74.00	25.96	100.0	H	154.0	3.5
3978.500000	---	36.76	54.00	17.24	200.0	H	289.0	4.0
4784.375000	49.98	---	74.00	24.02	100.0	H	11.0	5.8
5036.375000	---	39.03	54.00	14.97	100.0	H	345.0	6.6
7552.000000	51.82	---	74.00	22.18	200.0	H	233.0	10.0
7575.625000	---	40.69	54.00	13.31	200.0	H	333.0	10.1


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11ac (VHT80) CH42

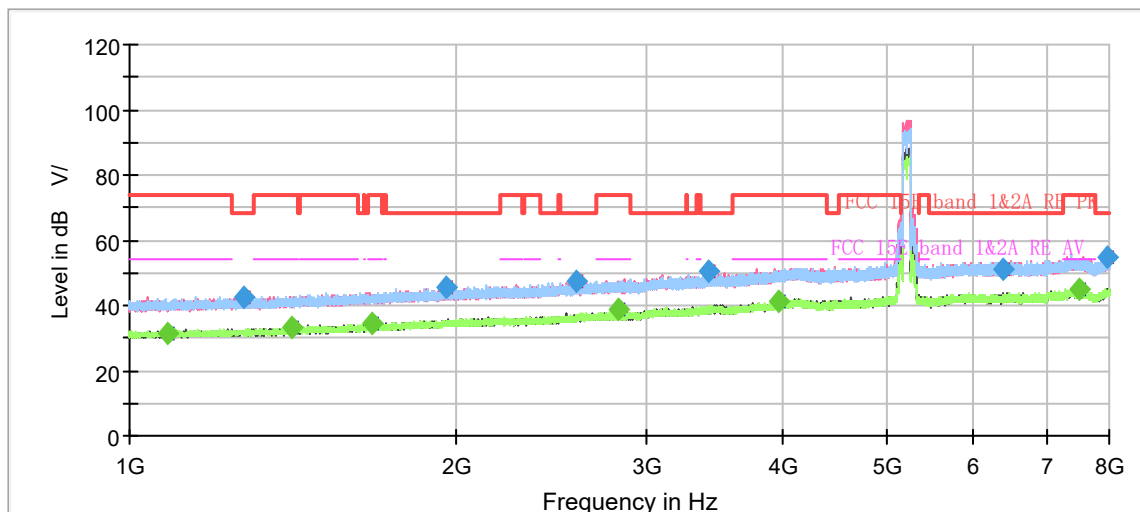

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 8GHz

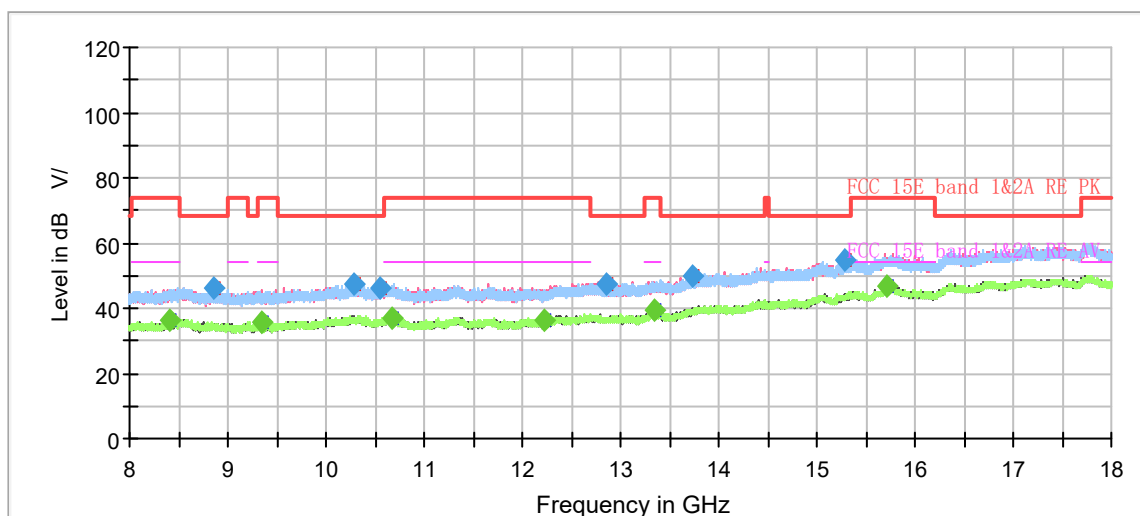


Radiates Emission from 8GHz to 18GHz




Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1082.833333	---	31.66	54.00	22.34	200.0	V	0.0	-7.9
1273.700000	42.26	---	68.20	25.94	200.0	H	352.0	-6.9
1410.200000	---	33.13	54.00	20.87	200.0	V	48.0	-6.1
1674.800000	---	34.31	54.00	19.69	200.0	V	75.0	-4.6
1961.333333	45.27	---	68.20	22.93	100.0	H	223.0	-2.9
2576.866667	47.56	---	68.20	20.64	200.0	V	151.0	-0.1
2819.300000	---	38.52	54.00	15.48	200.0	H	124.0	1.0
3419.666667	50.24	---	68.20	17.96	200.0	H	359.0	3.5
3960.300000	---	41.18	54.00	12.82	200.0	V	41.0	5.9
6394.900000	51.16	---	68.20	17.04	200.0	V	82.0	10.3
7492.966667	---	44.98	54.00	9.02	100.0	H	223.0	11.5
7976.433333	54.47	---	68.20	13.73	100.0	H	29.0	11.9
15720.666667	---	46.56	54.00	7.44	100.0	V	121.0	14.0

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11ac (VHT80) CH155

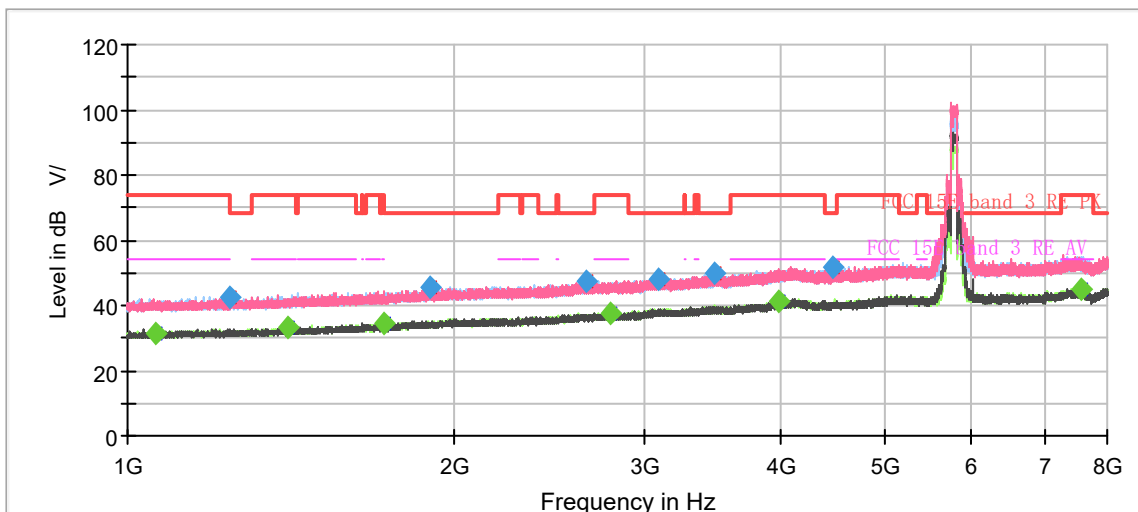

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

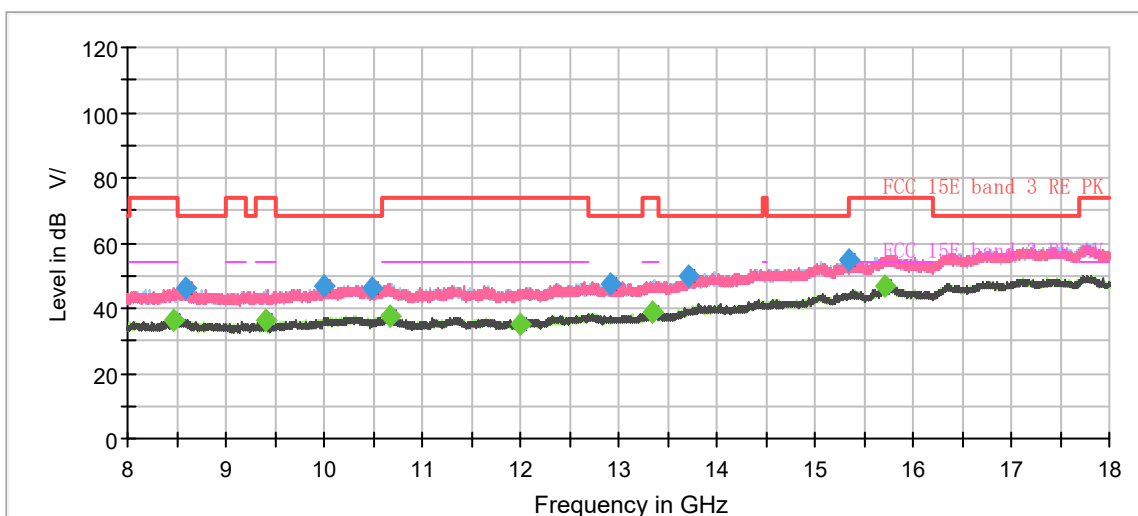

Radiates Emission from 8GHz to 18GHz



Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1060.200000	---	31.20	54.00	22.80	200.0	H	160.0	-8.1
1243.133333	42.21	---	68.20	25.99	100.0	V	348.0	-7.1
1402.966667	---	33.03	54.00	20.97	100.0	H	0.0	-6.1
1721.233333	---	34.57	54.00	19.43	100.0	V	272.0	-4.4
1900.200000	45.45	---	68.20	22.75	100.0	V	289.0	-3.3
2650.366667	47.10	---	68.20	21.10	100.0	H	339.0	0.4
2790.133333	---	37.47	54.00	16.53	100.0	V	163.0	0.9
3081.566667	47.88	---	68.20	20.32	200.0	V	353.0	2.4
3480.566667	50.12	---	68.20	18.08	200.0	H	12.0	3.7
3987.833333	---	41.15	54.00	12.85	100.0	V	25.0	6.1
4460.333333	51.85	---	68.20	16.35	100.0	V	280.0	6.4
7558.766667	---	44.77	54.00	9.23	200.0	H	229.0	11.5
15713.000000	---	46.92	54.00	7.08	200.0	H	210.0	13.9

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

5.2. Conducted Emission

Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

The EUT IS placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.10-2013. Connect the AC power line of the EUT to the LISN Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9kHz, VBW is set to 30kHz The measurement result should include both L line and N line.

The test is in transmitting mode.

Test Setup

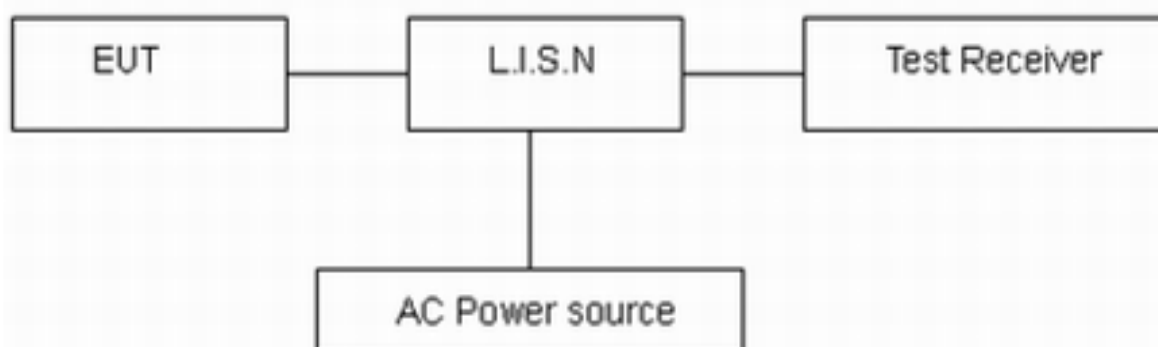

Note: AC Power source is used to change the voltage 110V/60Hz.

Limits


Frequency (MHz)	Conducted Limits(dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46 *
0.5 - 5	56	46
5 - 30	60	50
*: Decreases with the logarithm of the frequency.		

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 2.69$ dB.

Test Results:


Following plots, Blue trace uses the peak detection and Green trace uses the average detection. During the test, the Conducted Emission was performed in all modes with all channels, 802.11ac (VHT80) CH155 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

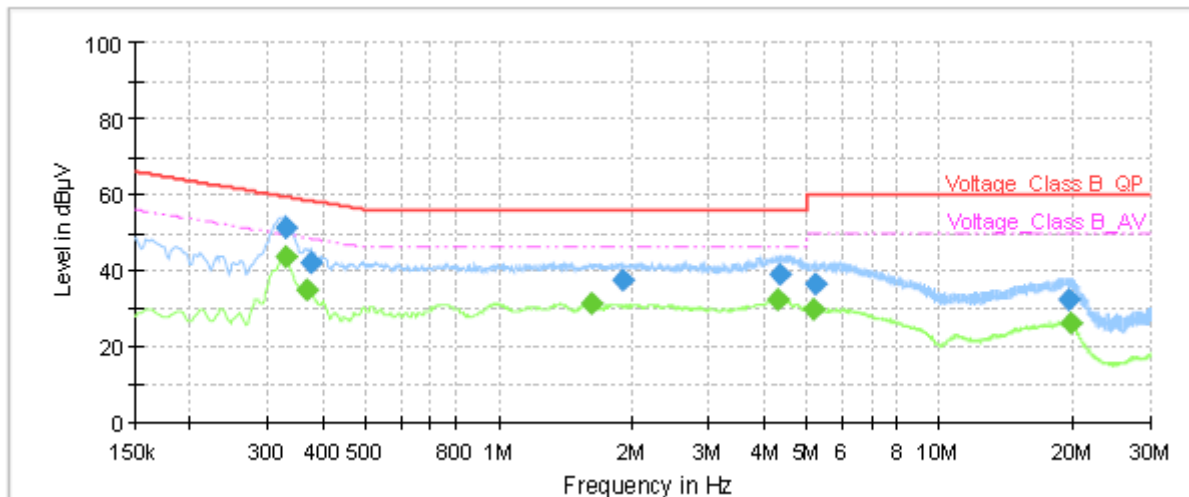

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.33	51.43	---	59.51	8.08	1000.0	9.000	L1	ON	19
0.33	---	43.49	49.51	6.02	1000.0	9.000	L1	ON	19
0.37	---	34.71	48.59	13.88	1000.0	9.000	L1	ON	19
0.38	42.21	---	58.39	16.18	1000.0	9.000	L1	ON	19
1.62	---	31.19	46.00	14.81	1000.0	9.000	L1	ON	19
1.91	37.31	---	56.00	18.69	1000.0	9.000	L1	ON	19
4.31	---	32.09	46.00	13.91	1000.0	9.000	L1	ON	19
4.35	39.16	---	56.00	16.84	1000.0	9.000	L1	ON	19
5.19	---	29.53	50.00	20.47	1000.0	9.000	L1	ON	19
5.24	36.34	---	60.00	23.66	1000.0	9.000	L1	ON	19
19.56	32.44	---	60.00	27.56	1000.0	9.000	L1	ON	20
19.74	---	26.06	50.00	23.94	1000.0	9.000	L1	ON	20

Remark: Correct factor=cable loss + LISN factor

L line Conducted Emission from 150 KHz to 30 MHz

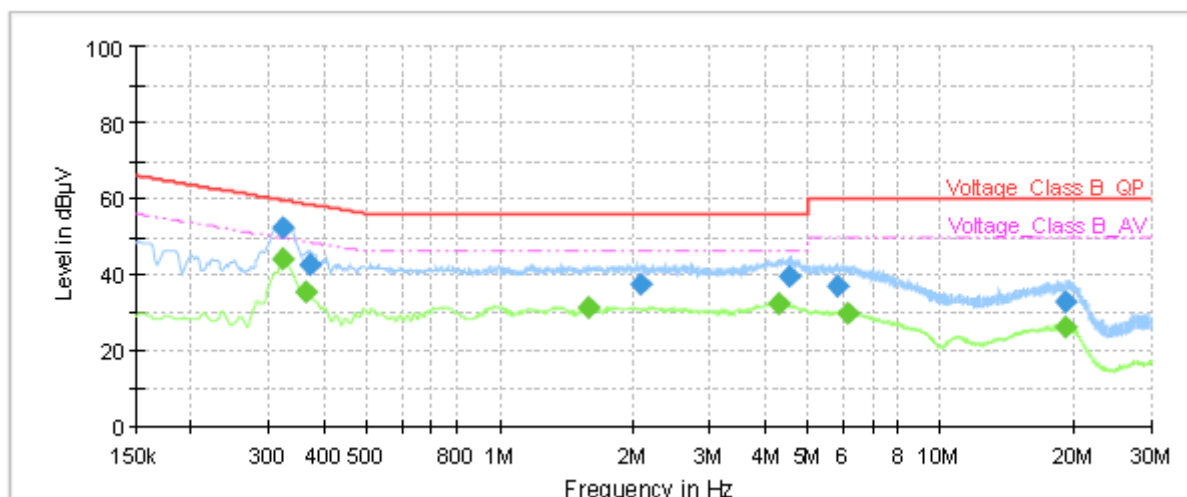

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.32	52.19	---	59.62	7.43	1000.0	9.000	N	ON	19
0.32	---	44.21	49.62	5.41	1000.0	9.000	N	ON	19
0.36	---	35.13	48.64	13.51	1000.0	9.000	N	ON	19
0.37	42.74	---	58.49	15.75	1000.0	9.000	N	ON	19
1.59	---	31.35	46.00	14.65	1000.0	9.000	N	ON	19
2.09	37.66	---	56.00	18.34	1000.0	9.000	N	ON	19
4.29	---	32.43	46.00	13.57	1000.0	9.000	N	ON	19
4.51	39.51	---	56.00	16.49	1000.0	9.000	N	ON	19
5.85	37.11	---	60.00	22.89	1000.0	9.000	N	ON	19
6.16	---	29.86	50.00	20.14	1000.0	9.000	N	ON	19
19.14	---	26.39	50.00	23.61	1000.0	9.000	N	ON	19
19.18	32.77	---	60.00	27.23	1000.0	9.000	N	ON	19

Remark: Correct factor=cable loss + LISN factor

N line Conducted Emission from 150 KHz to 30 MHz



6. Main Test Instruments

(Original) September 3, 2020 ~November 4, 2020

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Spectrum Analyzer	R&S	FSV40	15195-01-00	2020-05-18	2021-05-17
EMI Test Receiver	R&S	ESCI	100948	2020-05-18	2021-05-17
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2020-04-02	2023-04-01
TRILOG Broadband Antenna	SCHWARZBECK	VULB 9163	9163-201	2017-11-18	2020-11-17
Horn Antenna	R&S	HF907	102723	2018-08-11	2021-08-10
Horn Antenna	ETS-Lindgren	3160-09	00102643	2018-06-20	2021-06-19
Standard Gain Horn	STEATITE	QSH-SL-26-40 -K-15	16779	2019-12-24	2022-12-23
Broadband Horn Antenna	SCHWARZBECK	BBHA 9120D	430	2018-07-07	2021-07-06
EMI Test Receiver	R&S	ESR	101667	2020-05-18	2021-05-17
LISN	R&S	ENV216	101171	2018-12-15	2021-12-14
Spectrum Analyzer	KEYSIGHT	N9020A	MY54420163	2019-12-15	2020-12-14
RF Cable	Agilent	SMA 15cm	0001	2020-06-12	2020-12-11
TEMPERATURE CHAMBER	WEISS	VT4002	582261194500 10	2019-12-15	2020-12-14
Power Meter	R&S	NRP2	104306	2020-05-18	2021-05-17
Power Sensor	R&S	NRP-Z21	104799	2020-05-18	2021-05-17
DC Power Supply	GWINSTEK	GPS-3030D	GEP882653	2020-05-18	2021-05-17
Software	R&S	EMC32	9.26.0	/	/



(Variant) July 23, 2021 ~ July 24, 2021

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Spectrum Analyzer	R&S	FSV40	15195-01-00	2021-05-15	2022-05-14
EMI Test Receiver	R&S	ESCI	100948	2021-05-15	2022-05-14
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2020-04-02	2023-04-01
TRILOG Broadband Antenna	SCHWARZBECK	VULB 9163	391	2019-12-16	2022-12-15
Horn Antenna	R&S	HF907	102723	2018-08-11	2021-08-10
Standard Gain Horn	QPAR	QMS-00225	19928	2020-02-26	2023-02-25
Standard Gain Horn	STEATITE	QSH-SL-26-40 -K-15	16779	2019-12-24	2022-12-23
Broadband Horn Antenna	SCHWARZBECK	BBHA 9120D	430	2018-07-07	2021-07-06
EMI Test Receiver	R&S	ESR	101667	2021-05-16	2022-05-15
LISN	R&S	ENV216	101171	2018-12-15	2021-12-14
Spectrum Analyzer	KEYSIGHT	N9020A	MY54420163	2020-12-13	2021-12-12
RF Cable	Agilent	SMA 15cm	0001	2021-06-09	2021-12-08
TEMPERATURE CHAMBER	WEISS	VT4002	582261194500 10	2020-12-13	2021-12-12
Power Meter	R&S	NRP	104306	2021-05-15	2022-05-14
Power Sensor	R&S	NRP-Z21	104799	2021-05-15	2022-05-14
DC Power Supply	GWINSTEK	GPS-3030D	GEP882653	2021-05-15	2022-05-14
Software	R&S	EMC32	9.26.0	/	/

*****END OF REPORT*****



ANNEX A: The EUT Appearance

The EUT Appearance are submitted separately.



ANNEX B: Test Setup Photos

The Test Setup Photos are submitted separately.



ANNEX C: Product Change Description

The Product Change Description are submitted separately.