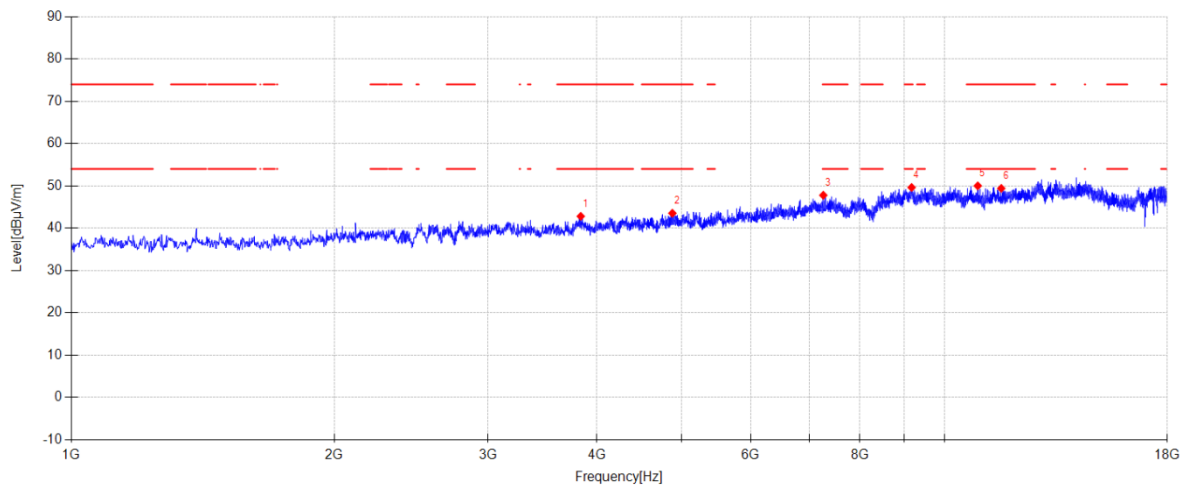


TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-09-19 **Tested By:** Lin Guoyuan
EUT: In-ear headphones with ANC **Model Number:** Pure
Test Mode: TX BLE1M 2440MHz Mode **Power Supply:** Battery
Condition: Temp:23.6°C;Humi:59.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25073024-24E\FCC Above 1G BLE\24
Memo: Right Side Sample Numbler:S25073024

**Suspected Data List**

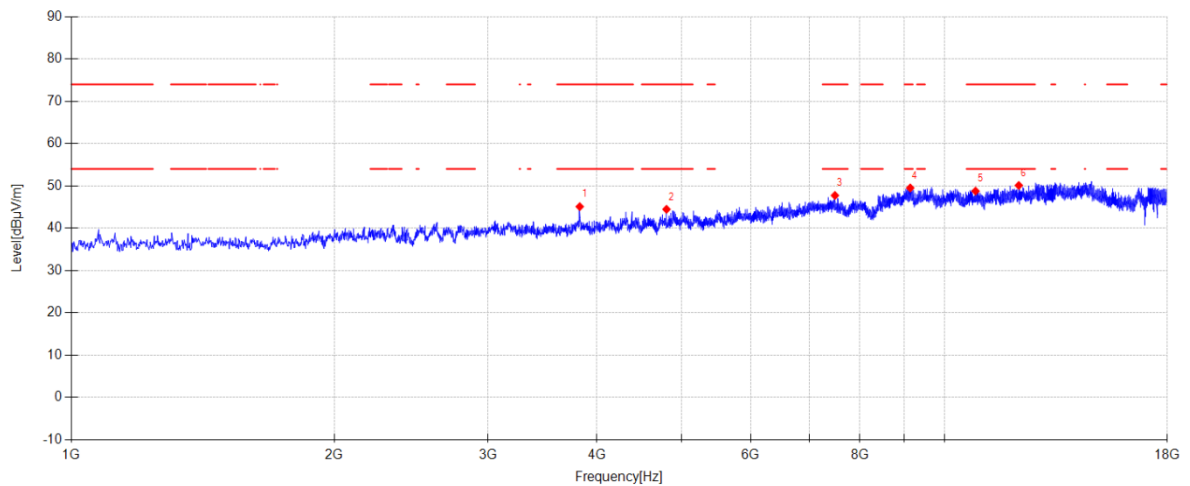
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3832.200	47.85	30.51	4.07	-39.63	42.80	74.00	31.20	PK	Vertical
2	4879.400	45.81	33.02	4.48	-39.79	43.52	74.00	30.48	PK	Vertical
3	7264.500	45.29	37.00	5.36	-39.87	47.78	74.00	26.22	PK	Vertical
4	9170.200	43.24	38.76	6.41	-38.79	49.62	74.00	24.38	PK	Vertical
5	10917.800	43.56	39.62	6.44	-39.61	50.01	74.00	23.99	PK	Vertical
6	11616.500	43.61	38.58	6.82	-39.60	49.41	74.00	24.59	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-09-19 **Tested By:** Lin Guoyuan
EUT: In-ear headphones with ANC **Model Number:** Pure
Test Mode: TX BLE1M 2402MHz Mode **Power Supply:** Battery
Condition: Temp:23.6°C;Humi:59.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25073024-24E\FCC Above 1G BLE\25
Memo: Right Side Sample Numbler:S25073024

**Suspected Data List**

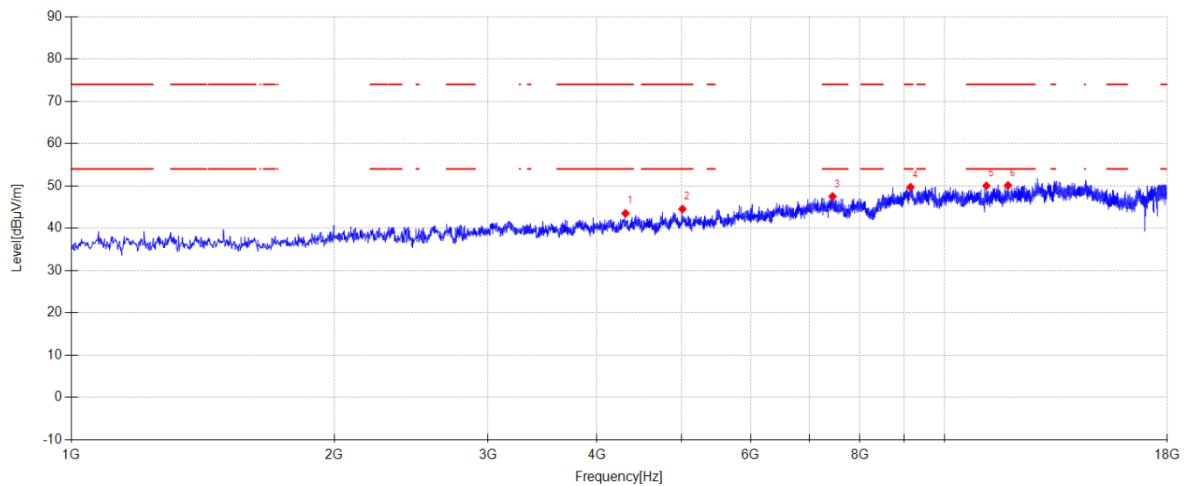
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3822.000	50.01	30.64	4.07	-39.63	45.09	74.00	28.91	PK	Horizontal
2	4804.600	47.63	32.17	4.44	-39.78	44.46	74.00	29.54	PK	Horizontal
3	7492.300	45.31	36.85	5.42	-39.85	47.73	74.00	26.27	PK	Horizontal
4	9136.200	43.14	38.72	6.40	-38.75	49.51	74.00	24.49	PK	Horizontal
5	10853.200	42.60	39.32	6.46	-39.61	48.77	74.00	25.23	PK	Horizontal
6	12165.600	43.27	39.30	7.00	-39.47	50.10	74.00	23.90	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-09-19 **Tested By:** Lin Guoyuan
EUT: In-ear headphones with ANC **Model Number:** Pure
Test Mode: TX BLE1M 2402MHz Mode **Power Supply:** Battery
Condition: Temp:23.6°C;Humi:59.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25073024-24E\FCC Above 1G BLE\26
Memo: Right Side Sample Numbler:S25073024



Suspected Data List

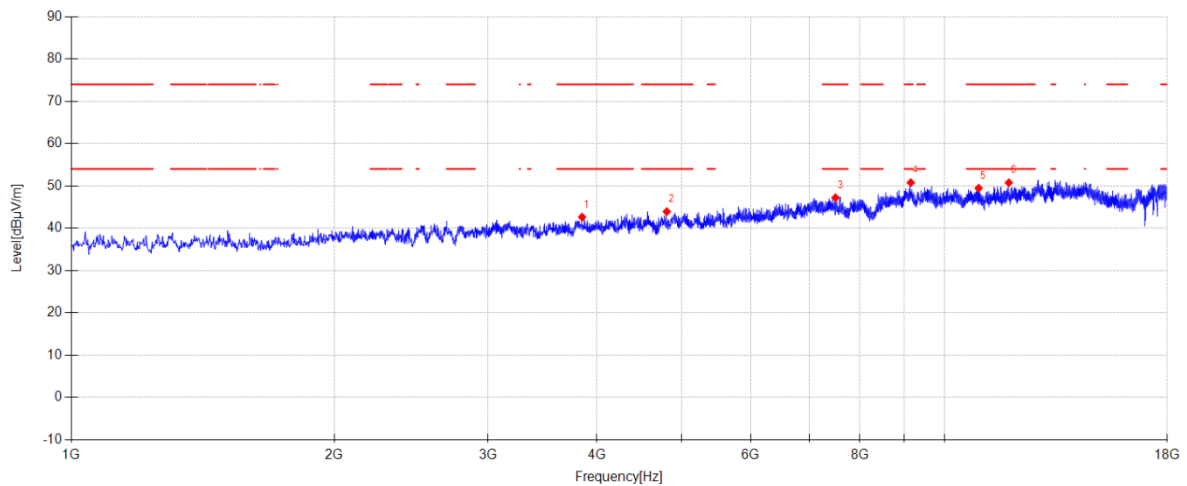
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4311.600	47.19	31.84	4.20	-39.73	43.50	74.00	30.50	PK	Vertical
2	5010.300	46.75	33.02	4.55	-39.80	44.52	74.00	29.48	PK	Vertical
3	7444.700	45.34	36.61	5.41	-39.86	47.50	74.00	26.50	PK	Vertical
4	9144.700	43.16	38.89	6.40	-38.76	49.69	74.00	24.31	PK	Vertical
5	11171.100	44.24	38.83	6.54	-39.60	50.01	74.00	23.99	PK	Vertical
6	11823.900	44.16	38.58	6.96	-39.60	50.10	74.00	23.90	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-09-19 **Tested By:** Lin Guoyuan
EUT: In-ear headphones with ANC **Model Number:** Pure
Test Mode: TX BLE2M 2404MHz Mode **Power Supply:** Battery
Condition: Temp:23.6°C;Humi:59.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25073024-24E\FCC Above 1G BLE\27
Memo: Right Side Sample Numbler:S25073024

**Suspected Data List**

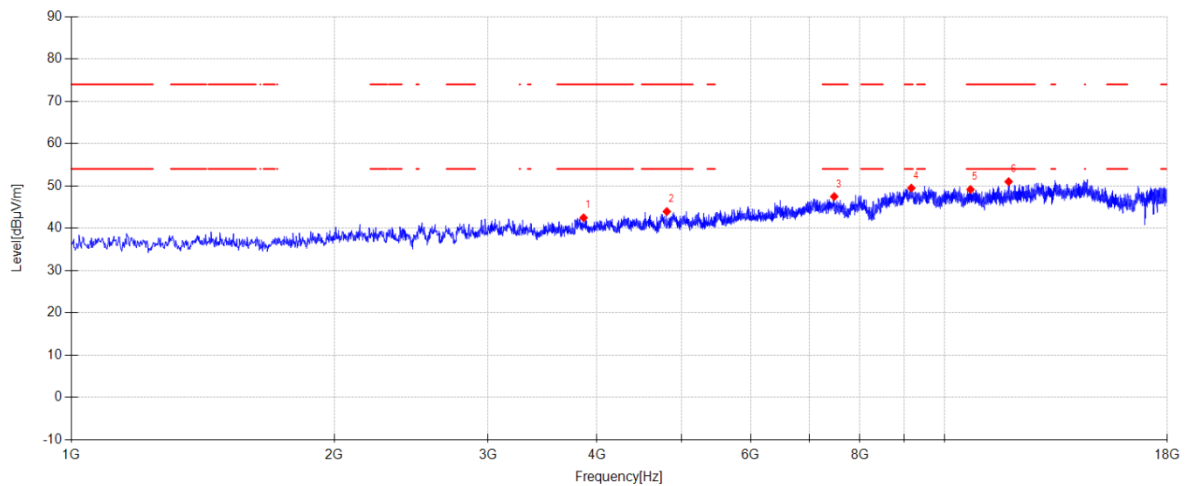
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3845.800	47.85	30.35	4.07	-39.64	42.63	74.00	31.37	PK	Horizontal
2	4808.000	47.02	32.23	4.44	-39.78	43.91	74.00	30.09	PK	Horizontal
3	7502.500	44.75	36.87	5.43	-39.85	47.20	74.00	26.80	PK	Horizontal
4	9151.500	44.14	38.98	6.41	-38.77	50.76	74.00	23.24	PK	Horizontal
5	10943.300	42.97	39.64	6.44	-39.61	49.44	74.00	24.56	PK	Horizontal
6	11849.400	44.83	38.55	6.97	-39.60	50.75	74.00	23.25	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-09-19 **Tested By:** Lin Guoyuan
EUT: In-ear headphones with ANC **Model Number:** Pure
Test Mode: TX BLE2M 2404MHz Mode **Power Supply:** Battery
Condition: Temp:23.6°C;Humi:59.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25073024-24E\FCC Above 1G BLE\28
Memo: Right Side Sample Numbler:S25073024

**Suspected Data List**

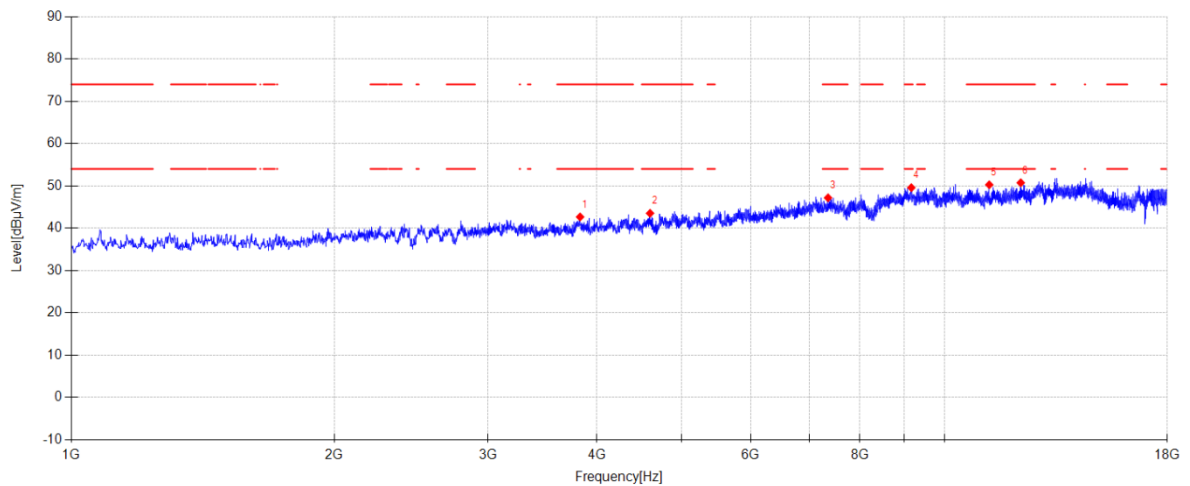
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3861.100	47.60	30.43	4.07	-39.64	42.46	74.00	31.54	PK	Vertical
2	4808.000	47.04	32.23	4.44	-39.78	43.93	74.00	30.07	PK	Vertical
3	7477.000	45.15	36.76	5.42	-39.85	47.48	74.00	26.52	PK	Vertical
4	9163.400	43.01	38.84	6.41	-38.78	49.48	74.00	24.52	PK	Vertical
5	10710.400	42.85	39.45	6.48	-39.63	49.15	74.00	24.85	PK	Vertical
6	11844.300	45.07	38.56	6.97	-39.60	51.00	74.00	23.00	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-09-19 **Tested By:** Lin Guoyuan
EUT: In-ear headphones with ANC **Model Number:** Pure
Test Mode: TX BLE2M 2440MHz Mode **Power Supply:** Battery
Condition: Temp:23.6°C;Humi:59.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25073024-24E\FCC Above 1G BLE\29
Memo: Right Side Sample Numbler:S25073024

**Suspected Data List**

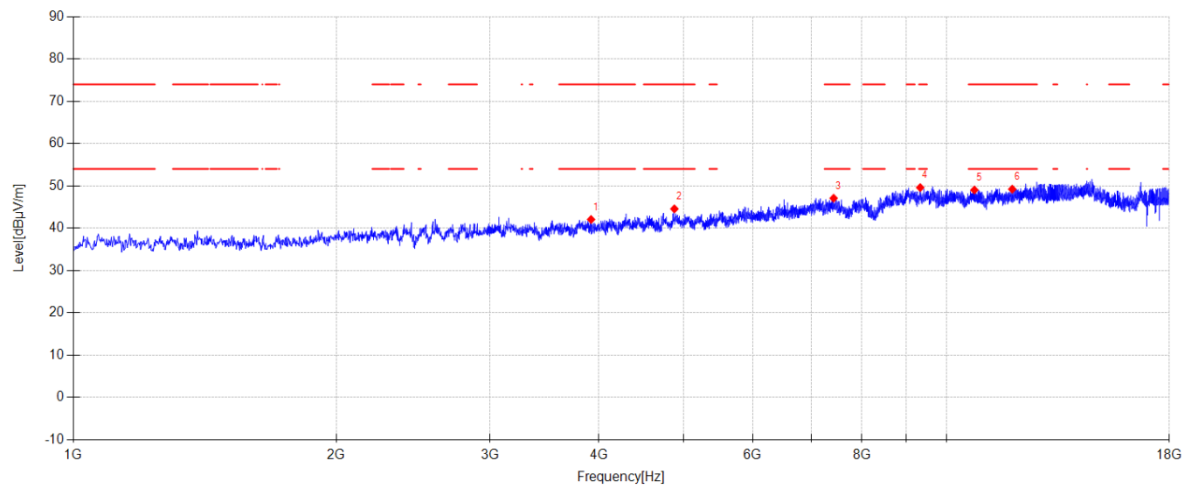
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3825.400	47.61	30.60	4.07	-39.63	42.65	74.00	31.35	PK	Horizontal
2	4600.600	47.54	31.40	4.34	-39.76	43.52	74.00	30.48	PK	Horizontal
3	7356.300	44.68	36.96	5.39	-39.86	47.17	74.00	26.83	PK	Horizontal
4	9163.400	43.11	38.84	6.41	-38.78	49.58	74.00	24.42	PK	Horizontal
5	11254.400	44.58	38.69	6.59	-39.60	50.26	74.00	23.74	PK	Horizontal
6	12228.500	43.93	39.26	6.97	-39.42	50.74	74.00	23.26	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-09-19 **Tested By:** Lin Guoyuan
EUT: In-ear headphones with ANC **Model Number:** Pure
Test Mode: TX BLE2M 2440MHz Mode **Power Supply:** Battery
Condition: Temp:23.6°C;Humi:59.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25073024-24E\FCC Above 1G BLE\30
Memo: Right Side Sample Numbler:S25073024

**Suspected Data List**

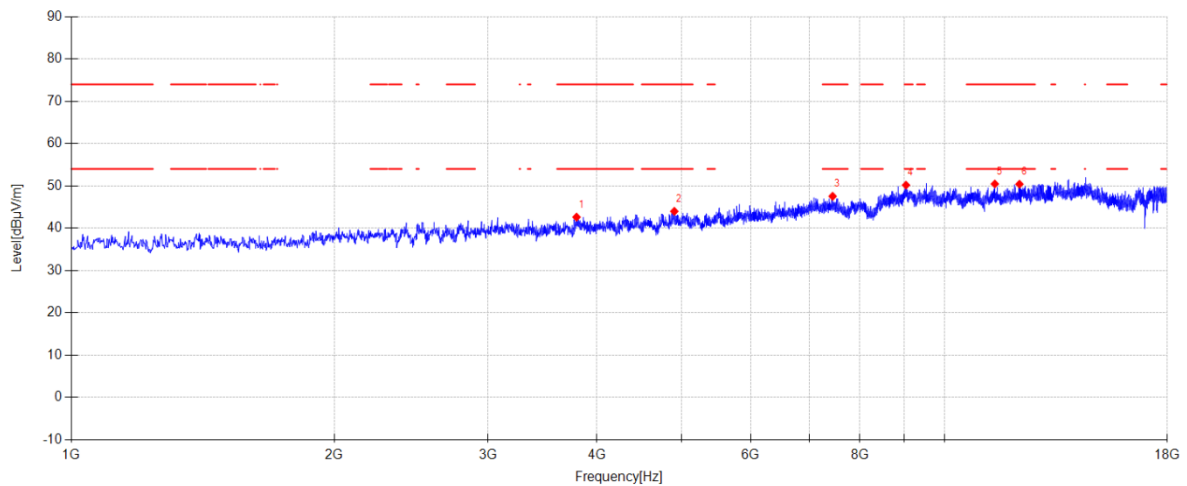
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3917.200	46.97	30.69	4.06	-39.67	42.05	74.00	31.95	PK	Vertical
2	4879.400	46.85	33.02	4.48	-39.79	44.56	74.00	29.44	PK	Vertical
3	7426.000	44.88	36.65	5.41	-39.86	47.08	74.00	26.92	PK	Vertical
4	9331.700	43.49	38.62	6.45	-38.96	49.60	74.00	24.40	PK	Vertical
5	10764.800	42.99	39.18	6.47	-39.62	49.02	74.00	24.98	PK	Vertical
6	11893.600	43.31	38.51	7.00	-39.60	49.22	74.00	24.78	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-09-19 **Tested By:** Lin Guoyuan
EUT: In-ear headphones with ANC **Model Number:** Pure
Test Mode: TX BLE2M 2478MHz Mode **Power Supply:** Battery
Condition: Temp:23.6°C;Humi:59.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25073024-24E\FCC Above 1G BLE\31
Memo: Right Side Sample Numbler:S25073024

**Suspected Data List**

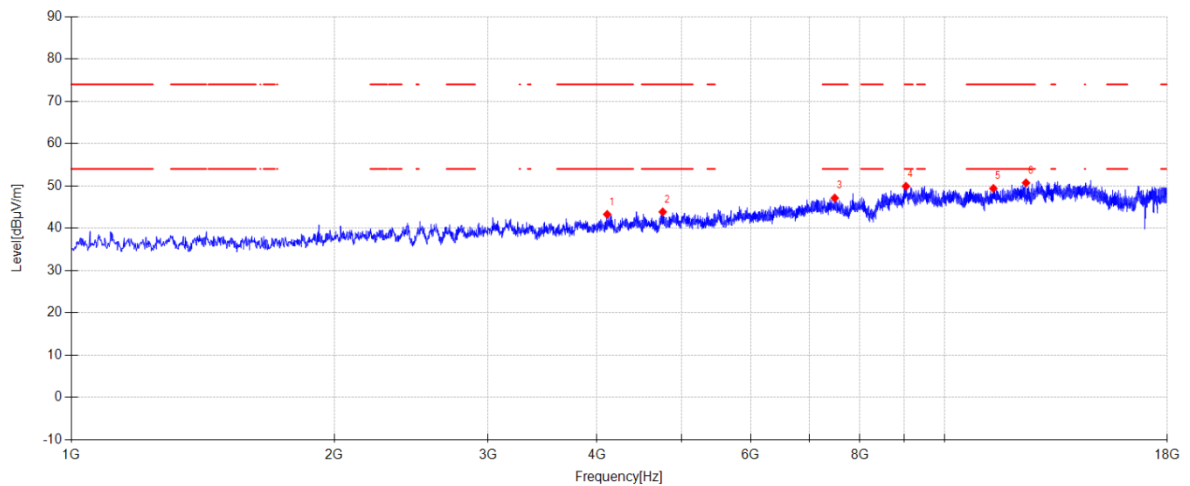
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3789.700	47.49	30.67	4.08	-39.62	42.62	74.00	31.38	PK	Horizontal
2	4904.900	46.18	33.10	4.49	-39.79	43.98	74.00	30.02	PK	Horizontal
3	7446.400	45.38	36.61	5.41	-39.86	47.54	74.00	26.46	PK	Horizontal
4	9035.900	43.65	38.79	6.38	-38.64	50.18	74.00	23.82	PK	Horizontal
5	11421.000	43.77	39.59	6.70	-39.60	50.46	74.00	23.54	PK	Horizontal
6	12187.700	43.63	39.24	6.99	-39.45	50.41	74.00	23.59	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-09-19 **Tested By:** Lin Guoyuan
EUT: In-ear headphones with ANC **Model Number:** Pure
Test Mode: TX BLE2M 2478MHz Mode **Power Supply:** Battery
Condition: Temp:23.6°C;Humi:59.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25073024-24E\FCC Above 1G BLE\32
Memo: Right Side Sample Numbler:S25073024

**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4109.300	47.71	31.17	4.09	-39.71	43.26	74.00	30.74	PK	Vertical
2	4757.000	47.01	32.19	4.42	-39.78	43.84	74.00	30.16	PK	Vertical
3	7487.200	44.73	36.82	5.42	-39.85	47.12	74.00	26.88	PK	Vertical
4	9034.200	43.39	38.77	6.38	-38.64	49.90	74.00	24.10	PK	Vertical
5	11376.800	42.80	39.52	6.67	-39.60	49.39	74.00	24.61	PK	Vertical
6	12400.200	44.01	39.10	6.89	-39.28	50.72	74.00	23.28	PK	Vertical

Note:

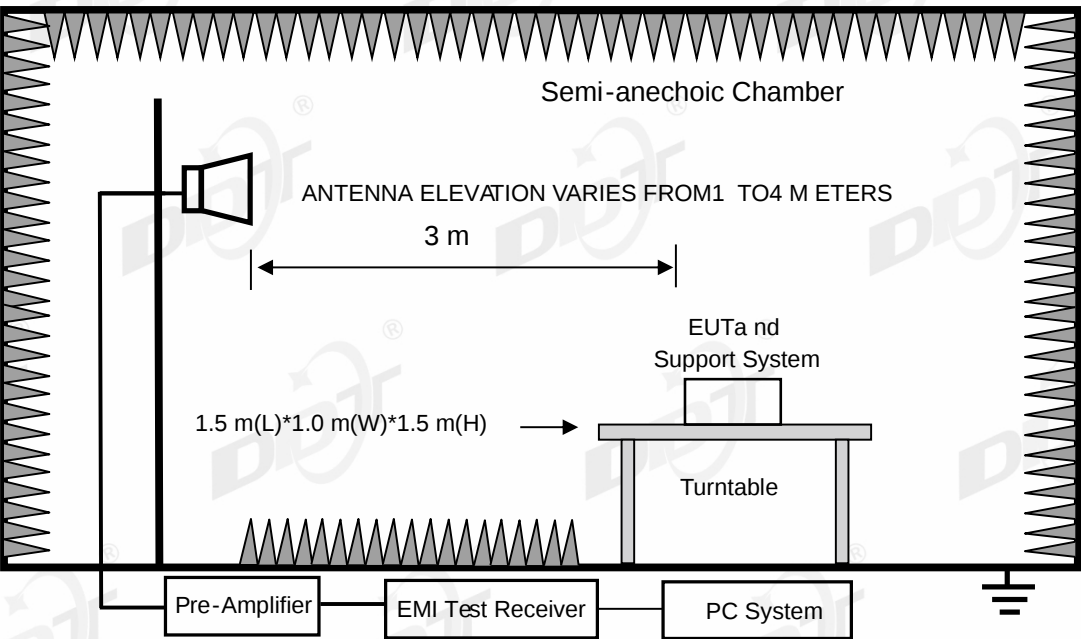
1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

13. Band Edge Compliance

13.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To
Micro-Tronics filters	REBES	BRM50702	DDT-ZC03242	/
RF Cable	N/A	W24.02 HL-562	DDT-ZC04022	2026/03/28
RF cable	Yuhu Technology	JCTB810-NJ-NJ-9M	DDT-ZC02538	2026/03/28
RF cable	Zhongke Junchuang	JCT26S-NJ-NJ-1.5M	DDT-ZC02762	/
RF cable	Yuhu Technology	ZT26S-SMAJ-SMAJ-1M	DDT-ZC02037	2026/03/28
RF Cable	N/A	W13.02 AP1-X2	DDT-ZC04023	2026/03/28
Pre-amplifier	COM-POWER	PAM-840A	DDT-ZC01693	2026/03/28
Pre-amplifier	COM-POWER	PAM-118A	DDT-ZC01293	2026/08/10
High pass filter	Micro-Tronics	HPM50102	DDT-ZC00561	2026/03/28
EMI TEST RECEIVER	R&S	ESU26	DDT-ZC01909	2026/03/28
High pass filter	Micro-Tronics	HPM50108	DDT-ZC00560	2026/03/28
High Pass filter	Xi'an Xingbo	XBLBQ-GTA67	DDT-ZC02179	2026/03/28
Micro-Tronics filters	REBES	BRM50716	DDT-ZC03240	/
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	DDT-ZC00506	2026/04/01
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	DDT-ZC02050	2026/07/25
Hochgewinn-Hornantenne	SCHWARZBECK	BBHA 9120 D	DDT-ZC02129	2026/08/11
Active Loop Antenna	Schwarzbeck	FMZB1519	DDT-ZC00524	2027/08/18
PSA Series Spectrum Analyzer	Agilent	E4447A	DDT-ZC00517	2026/03/28

13.2. Block diagram of test setup



13.3. Limits

All restriction band should comply with 15.209 limits, other emission should be at least 20 dB below the fundamental.

13.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
/	/	/	/	/

13.5. Test procedure

Same with Radiated Emission except change investigated frequency range.
Remark: All restriction band have been tested, and only the worst case is shown in report.

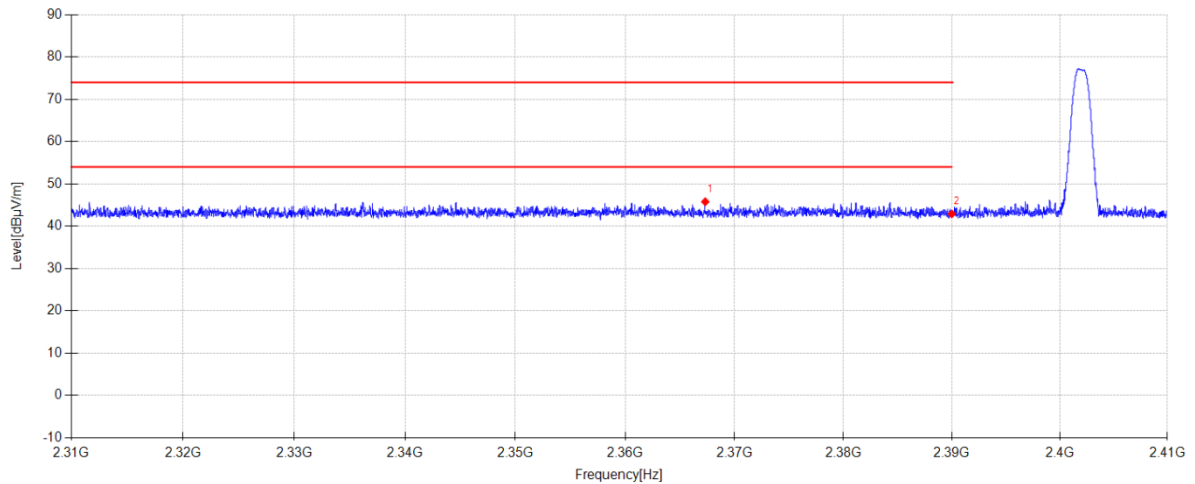
13.6. Test result

PASS. (See below detailed test result)

13.7. Test data

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-09-13 **Tested By:** Li Xiongbin
EUT: In-ear headphones with ANC **Model Number:** Pure
Test Mode: TX BLE1M 2402MHz Mode **Power Supply:** Battery
Condition: Temp:23.6°C;Humi:59.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25073024-24E\FCC Above 1G BLE\1
Memo: Left side Sample Numbler:S25073024



Suspected Data List

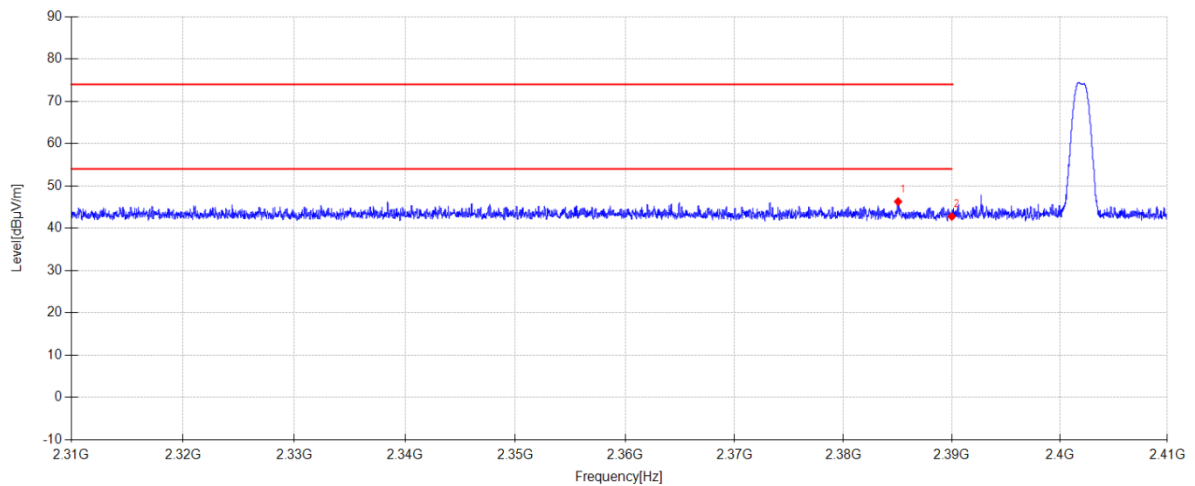
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2367.320	13.35	27.60	4.82	0.00	45.77	74.00	28.23	PK	Horizontal
2	2390.000	10.60	27.46	4.84	0.00	42.90	74.00	31.10	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-09-13 **Tested By:** Li Xiongbin
EUT: In-ear headphones with ANC **Model Number:** Pure
Test Mode: TX BLE1M 2402MHz Mode **Power Supply:** Battery
Condition: Temp:23.6°C;Humi:59.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25073024-24E\FCC Above 1G BLE\2
Memo: Left side Sample Numbler:S25073024

**Suspected Data List**

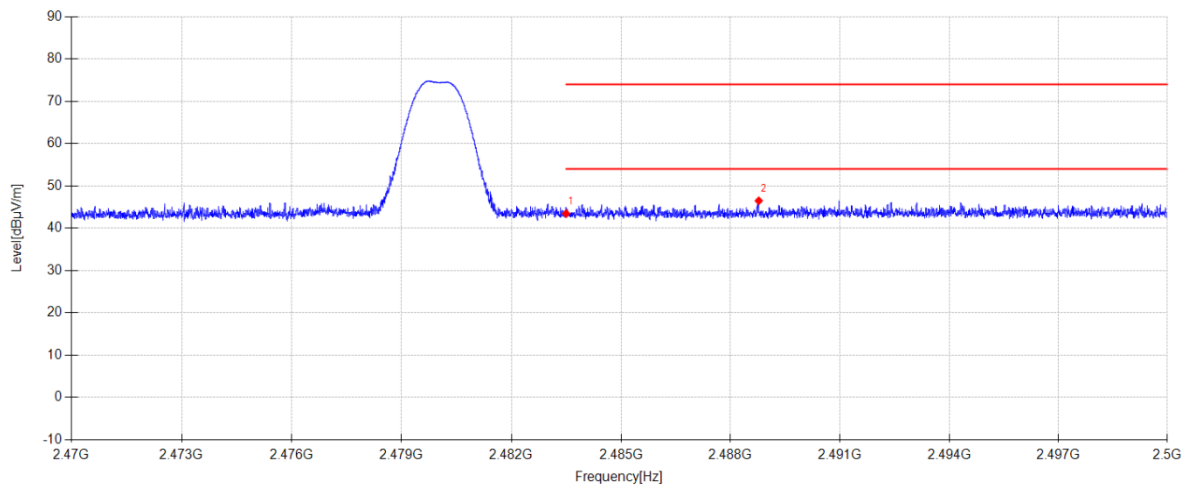
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2385.040	13.96	27.49	4.83	0.00	46.28	74.00	27.72	PK	Vertical
2	2390.000	10.46	27.46	4.84	0.00	42.76	74.00	31.24	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-09-13 **Tested By:** Li Xiongbin
EUT: In-ear headphones with ANC **Model Number:** Pure
Test Mode: TX BLE1M 2480MHz Mode **Power Supply:** Battery
Condition: Temp:23.6°C;Humi:59.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25073024-24E\FCC Above 1G BLE\3
Memo: Left side Sample Numbler:S25073024

**Suspected Data List**

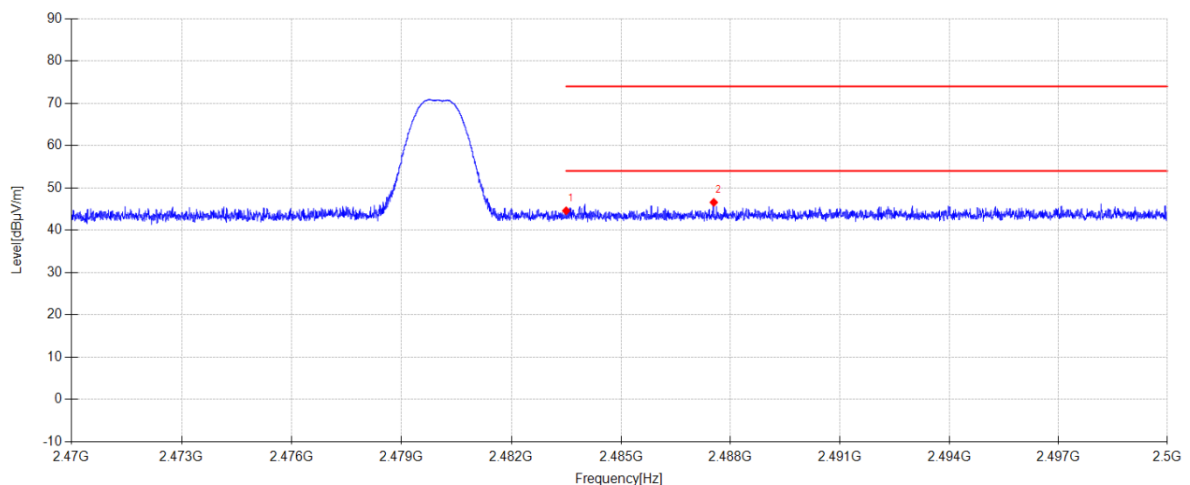
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	11.00	27.54	4.89	0.00	43.43	74.00	30.57	PK	Horizontal
2	2488.774	13.98	27.59	4.90	0.00	46.47	74.00	27.53	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-09-13 **Tested By:** Li Xiongbin
EUT: In-ear headphones with ANC **Model Number:** Pure
Test Mode: TX BLE1M 2480MHz Mode **Power Supply:** Battery
Condition: Temp:23.6°C;Humi:59.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25073024-24E\FCC Above 1G BLE\4
Memo: Left side Sample Numbler:S25073024

**Suspected Data List**

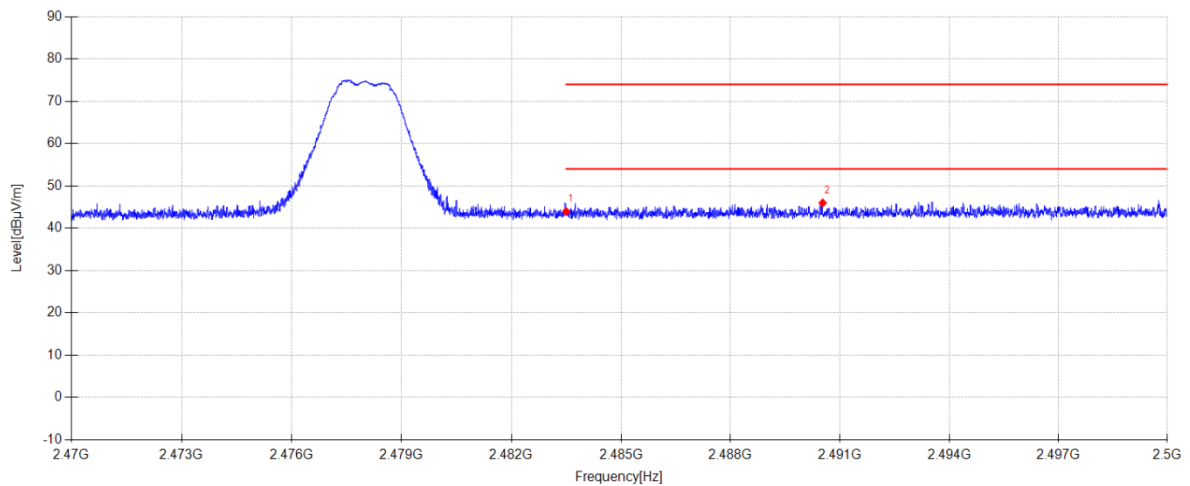
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	12.16	27.54	4.89	0.00	44.59	74.00	29.41	PK	Vertical
2	2487.541	14.09	27.58	4.90	0.00	46.57	74.00	27.43	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-09-13 **Tested By:** Li Xiongbin
EUT: In-ear headphones with ANC **Model Number:** Pure
Test Mode: TX BLE2M 2478MHz Mode **Power Supply:** Battery
Condition: Temp:23.6°C;Humi:59.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25073024-24E\FCC Above 1G BLE\5
Memo: Left side Sample Numbler:S25073024

**Suspected Data List**

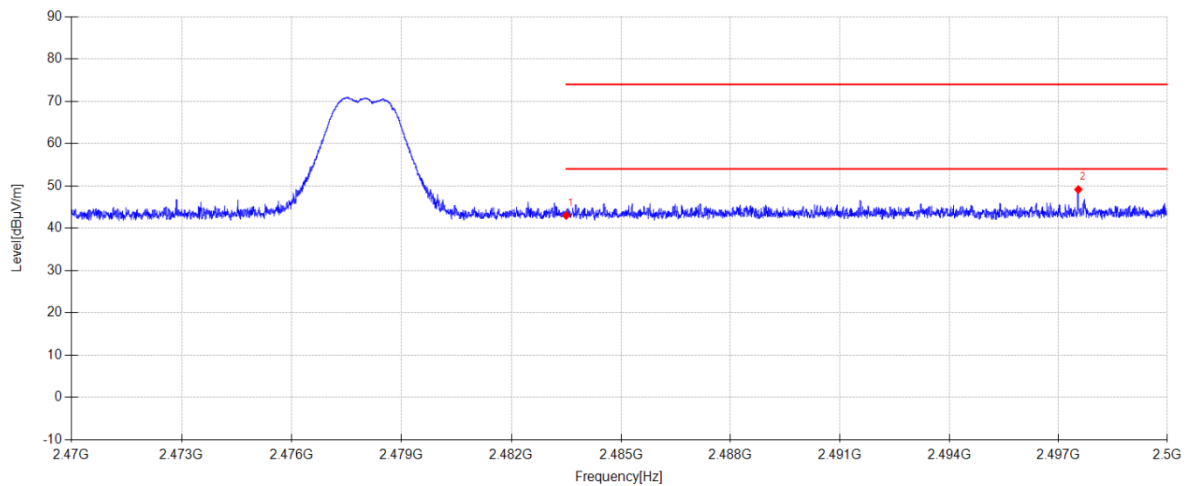
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	11.51	27.54	4.89	0.00	43.94	74.00	30.06	PK	Horizontal
2	2490.526	13.46	27.61	4.90	0.00	45.97	74.00	28.03	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-09-13 **Tested By:** Li Xiongbin
EUT: In-ear headphones with ANC **Model Number:** Pure
Test Mode: TX BLE2M 2478MHz Mode **Power Supply:** Battery
Condition: Temp:23.6°C;Humi:59.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25073024-24E\FCC Above 1G BLE\6
Memo: Left side Sample Numbler:S25073024

**Suspected Data List**

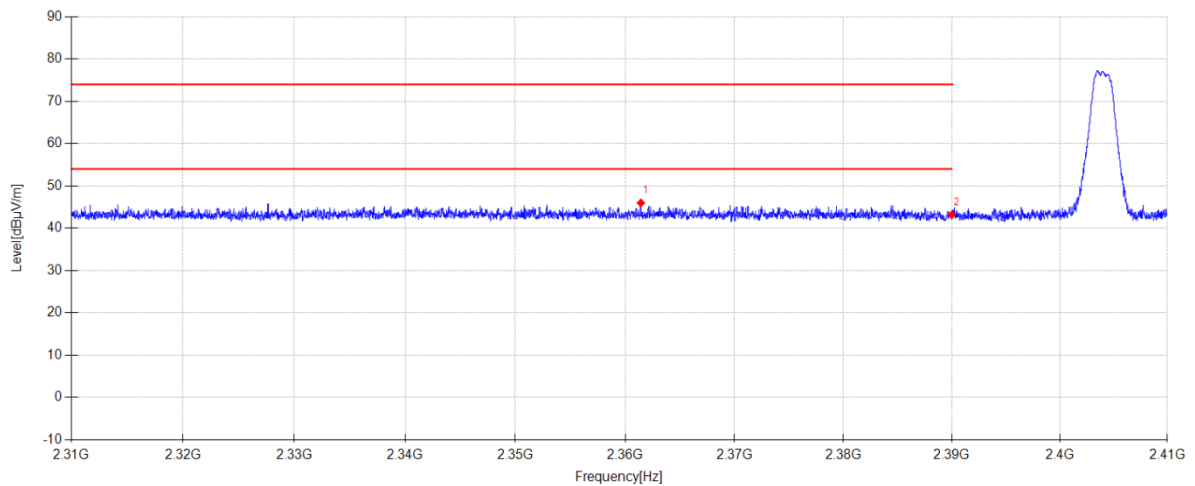
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	10.57	27.54	4.89	0.00	43.00	74.00	31.00	PK	Vertical
2	2497.552	16.56	27.68	4.90	0.00	49.14	74.00	24.86	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-09-13 **Tested By:** Li Xiongbin
EUT: In-ear headphones with ANC **Model Number:** Pure
Test Mode: TX BLE2M 2404MHz Mode **Power Supply:** Battery
Condition: Temp:23.6°C;Humi:59.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25073024-24E\FCC Above 1G BLE\7
Memo: Left side Sample Numbler:S25073024

**Suspected Data List**

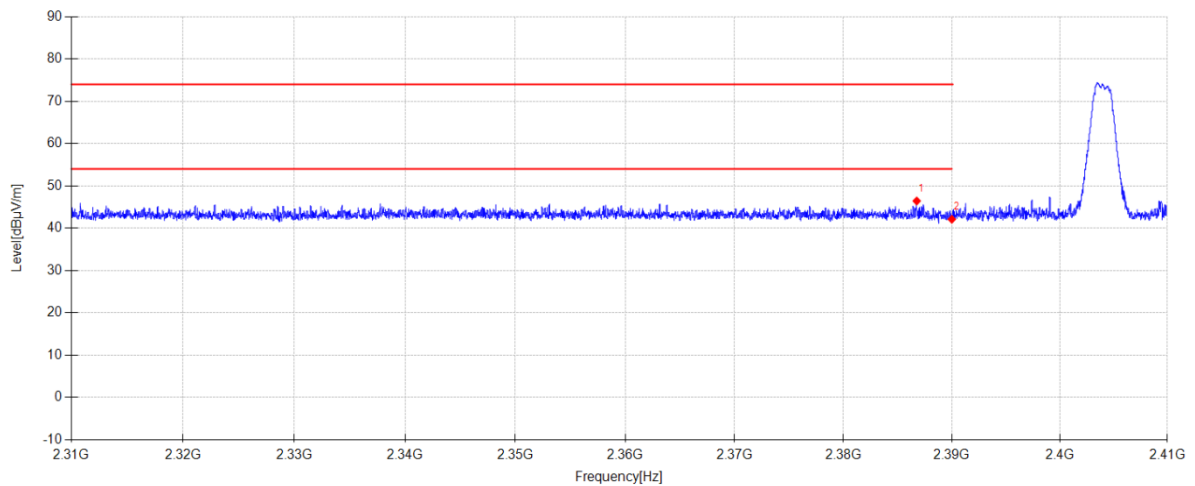
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2361.440	13.52	27.63	4.82	0.00	45.97	74.00	28.03	PK	Horizontal
2	2390.000	10.87	27.46	4.84	0.00	43.17	74.00	30.83	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-09-13 **Tested By:** Li Xiongbin
EUT: In-ear headphones with ANC **Model Number:** Pure
Test Mode: TX BLE2M 2404MHz Mode **Power Supply:** Battery
Condition: Temp:23.6°C;Humi:59.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25073024-24E\FCC Above 1G BLE\8
Memo: Left side Sample Numbler:S25073024

**Suspected Data List**

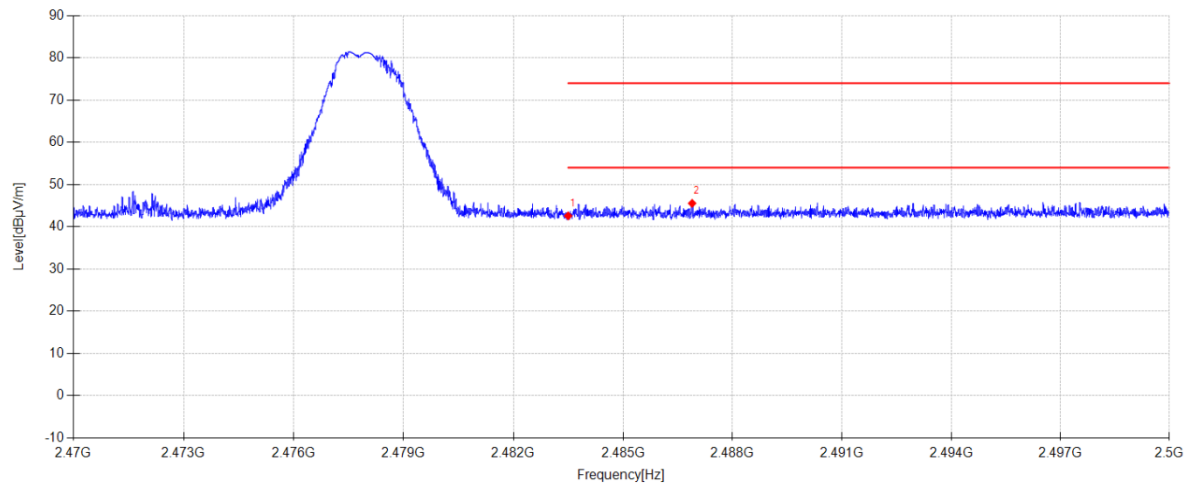
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2386.760	14.12	27.48	4.83	0.00	46.43	74.00	27.57	PK	Vertical
2	2390.000	9.80	27.46	4.84	0.00	42.10	74.00	31.90	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-09-19 **Tested By:** Lin Guoyuan
EUT: In-ear headphones with ANC **Model Number:** Pure
Test Mode: TX BLE2M 2478MHz Mode **Power Supply:** Battery
Condition: Temp:23.6°C;Humi:59.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25073024-24E\FCC Above 1G BLE\33
Memo: Right Side Sample Numbler:S25073024



Suspected Data List

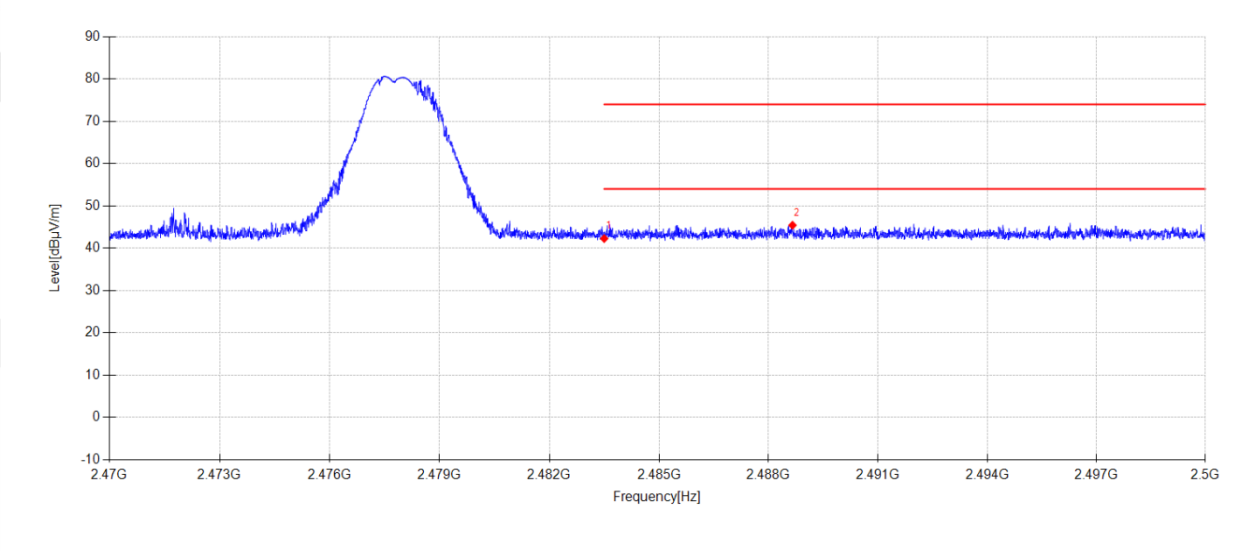
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	10.64	27.54	4.40	0.00	42.58	74.00	31.42	PK	Horizontal
2	2486.893	13.58	27.57	4.39	0.00	45.54	74.00	28.46	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-09-19 Tested By: Lin Guoyuan
EUT: In-ear headphones with ANC Model Number: Pure
Test Mode: TX BLE2M 2478MHz Mode Power Supply: Battery
Condition: Temp:23.6°C;Humi:59.4% Test Site: DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25073024-24E\FCC Above 1G BLE\34
Memo: Right Side Sample Numbler:S25073024

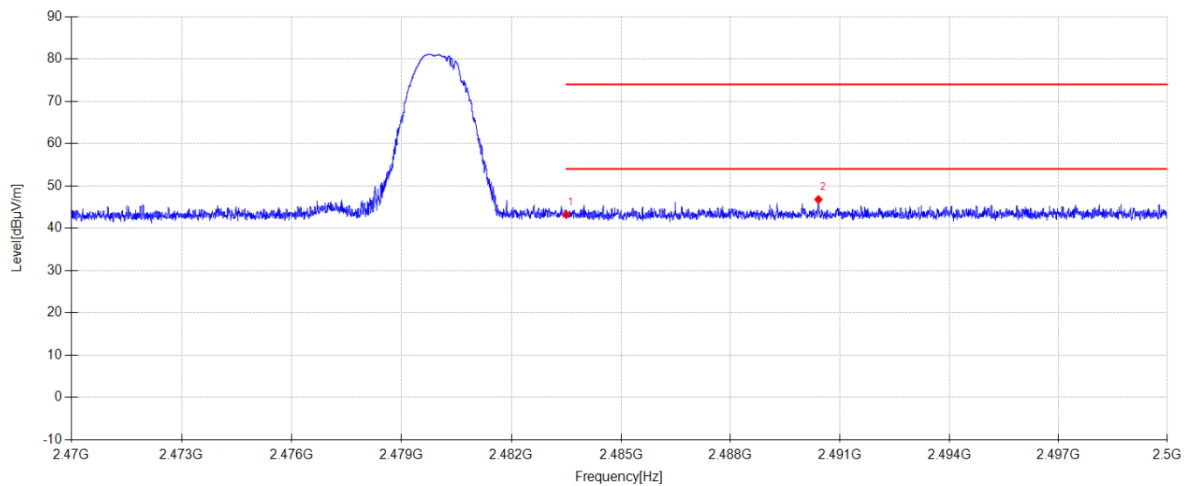


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	10.32	27.54	4.40	0.00	42.26	74.00	31.74	PK	Vertical
2	2488.657	13.44	27.59	4.39	0.00	45.42	74.00	28.58	PK	Vertical

Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-09-19 **Tested By:** Lin Guoyuan
EUT: In-ear headphones with ANC **Model Number:** Pure
Test Mode: TX BLE1M 2480MHz Mode **Power Supply:** Battery
Condition: Temp:23.6°C;Humi:59.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25073024-24E\FCC Above 1G BLE\35
Memo: Right Side Sample Numbler:S25073024

**Suspected Data List**

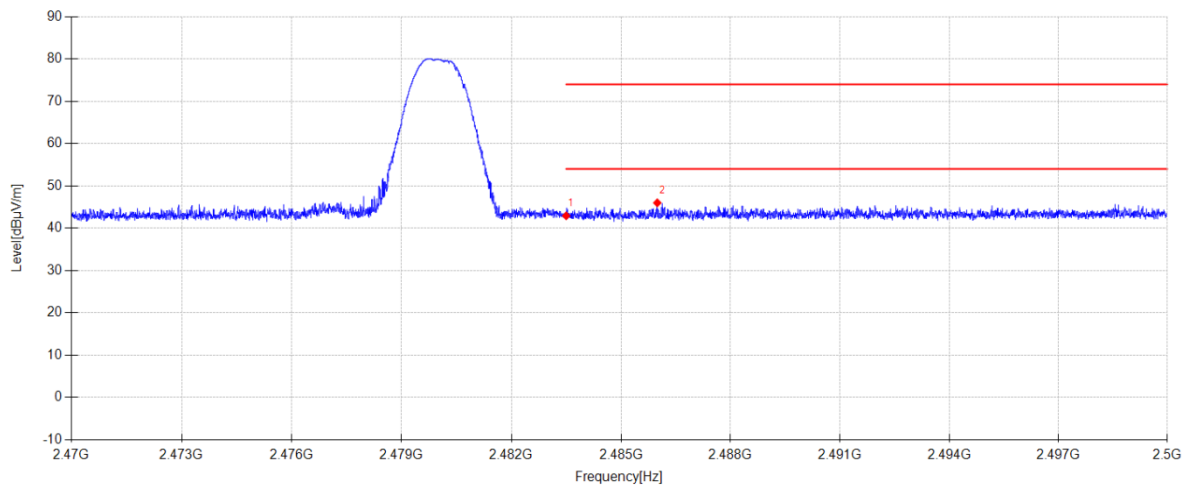
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	11.26	27.54	4.40	0.00	43.20	74.00	30.80	PK	Horizontal
2	2490.412	14.78	27.60	4.39	0.00	46.77	74.00	27.23	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-09-19 **Tested By:** Lin Guoyuan
EUT: In-ear headphones with ANC **Model Number:** Pure
Test Mode: TX BLE1M 2480MHz Mode **Power Supply:** Battery
Condition: Temp:23.6°C;Humi:59.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25073024-24E\FCC Above 1G BLE\36
Memo: Right Side Sample Numbler:S25073024

**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	10.98	27.54	4.40	0.00	42.92	74.00	31.08	PK	Vertical
2	2485.993	14.04	27.56	4.39	0.00	45.99	74.00	28.01	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2025-09-19

Tested By:

Lin Guoyuan

EUT:

In-ear headphones with ANC

Model Number:

Pure

Test Mode:

TX BLE1M 2402MHz Mode

Power Supply:

Battery

Condition:

Temp:23.6°C;Humi:59.4%

Test Site:

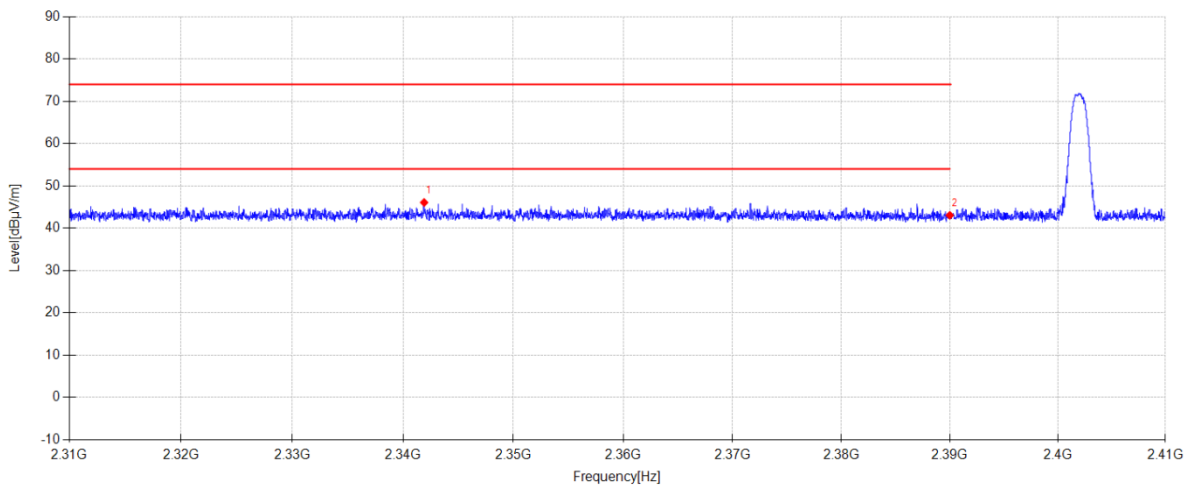
DDT 3# Chamber

File Path:

d:\ts\2025 report date\Q25073024-24E\FCC Above 1G BLE\37

Memo:

Right Side Sample Numble:S25073024



Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2341.910	13.96	27.67	4.44	0.00	46.07	74.00	27.93	PK	Horizontal
2	2390.000	11.16	27.46	4.43	0.00	43.05	74.00	30.95	PK	Horizontal

Note:

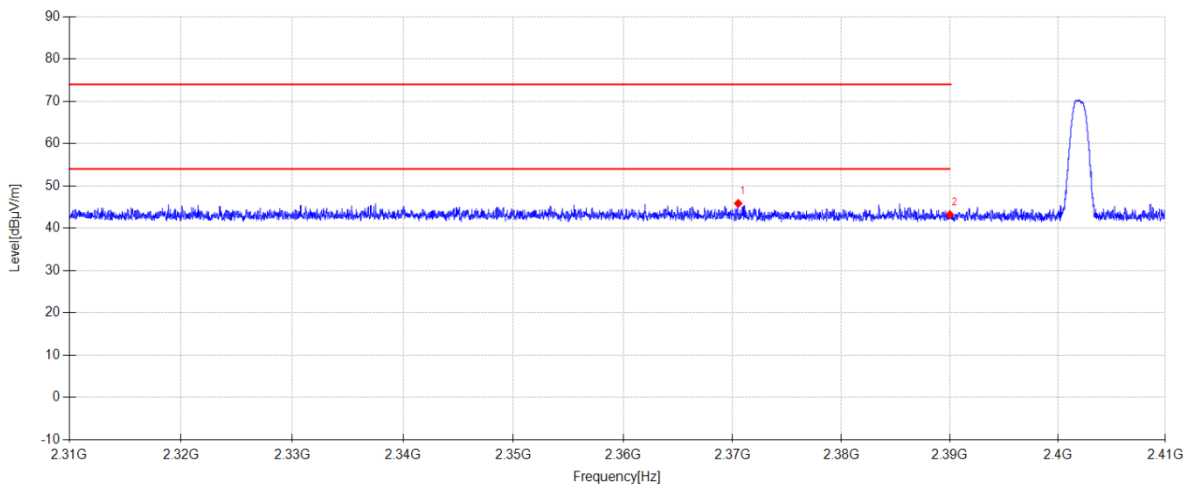
1. Level = Reading + Cable loss + Antenna Factor + AMP

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-09-19 Tested By: Lin Guoyuan
EUT: In-ear headphones with ANC Model Number: Pure
Test Mode: TX BLE1M 2402MHz Mode Power Supply: Battery
Condition: Temp:23.6°C;Humi:59.4% Test Site: DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25073024-24E\FCC Above 1G BLE\38
Memo: Right Side Sample Numble:S25073024

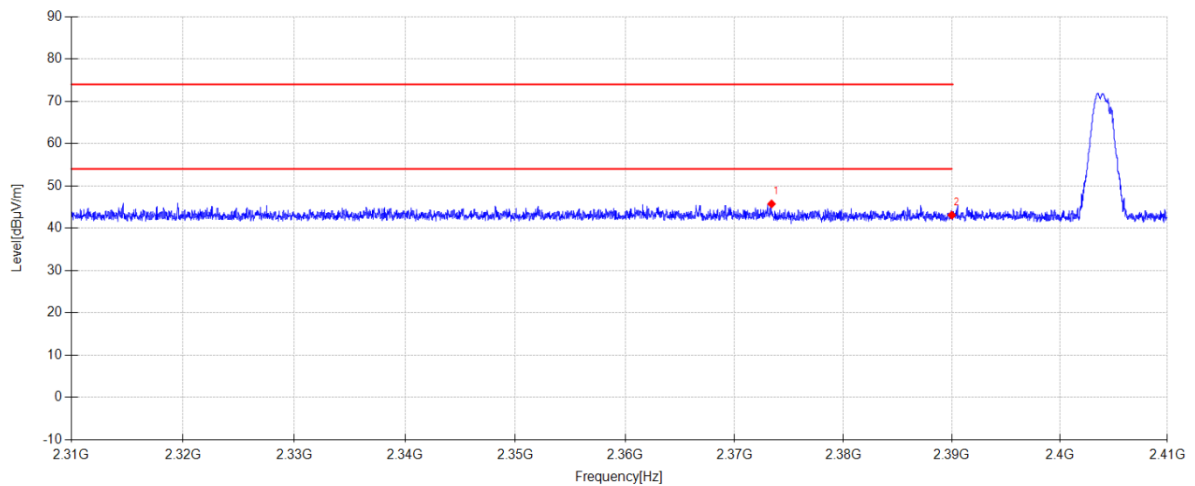


Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2370.520	13.84	27.58	4.43	0.00	45.85	74.00	28.15	PK	Vertical
2	2390.000	11.32	27.46	4.43	0.00	43.21	74.00	30.79	PK	Vertical

Note:
1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-09-19 **Tested By:** Lin Guoyuan
EUT: In-ear headphones with ANC **Model Number:** Pure
Test Mode: TX BLE2M 2404MHz Mode **Power Supply:** Battery
Condition: Temp:23.6°C;Humi:59.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25073024-24E\FCC Above 1G BLE\39
Memo: Right Side Sample Numbler:S25073024

**Suspected Data List**

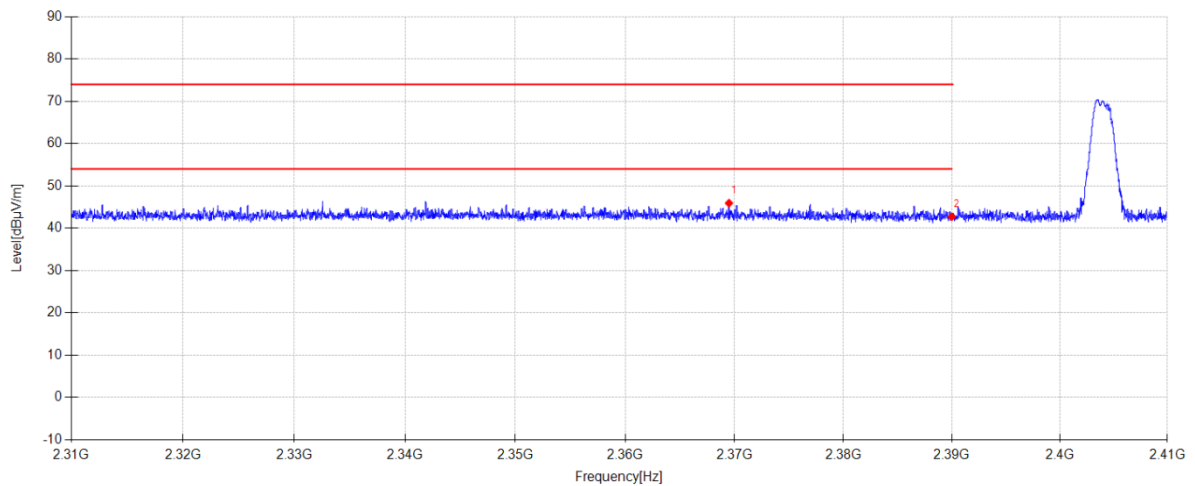
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2373.400	13.75	27.56	4.43	0.00	45.74	74.00	28.26	PK	Horizontal
2	2390.000	11.19	27.46	4.43	0.00	43.08	74.00	30.92	PK	Horizontal

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2025-09-19 **Tested By:** Lin Guoyuan
EUT: In-ear headphones with ANC **Model Number:** Pure
Test Mode: TX BLE2M 2404MHz Mode **Power Supply:** Battery
Condition: Temp:23.6°C;Humi:59.4% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2025 report date\Q25073024-24E\FCC Above 1G BLE\40
Memo: Right Side Sample Numble:S25073024

**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2369.500	13.90	27.58	4.43	0.00	45.91	74.00	28.09	PK	Vertical
2	2390.000	10.80	27.46	4.43	0.00	42.69	74.00	31.31	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

14. Power Line Conducted Emissions

14.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To
EMI Test Receiver	R&S	ESCI	DDT-ZC00235	2026/07/06
Two Line V-Network	R&S	ENV216	DDT-ZC00535	2026/07/06
Artificial mains	R&S	ESH2-Z5	DDT-ZC00538	2026/07/06
Pulse Limiter	SCHWARZBEC K	ESH3-Z2	DDT-ZC00539	2026/07/06
CE Cable 1	R&S	ESU8/RF2	DDT-ZC00566	2026/07/06
EMI Test Software	Audix/TW	e3	DDT-ZC01252	/

14.2. Block diagram of test setup

14.3. Limits

Frequency	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150 kHz~500 kHz	66 ~ 56*	56 ~ 46*
500 kHz~5 MHz	56	46
5 MHz~30 MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

14.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
/	/	/	/	/

14.5. Test procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.4 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

14.6. Test result

PASS. (See below detailed test result)

Note1: All emissions not reported below are too low against the prescribed limits.

Note2: “----” means Peak detection; “-----” means Average detection.

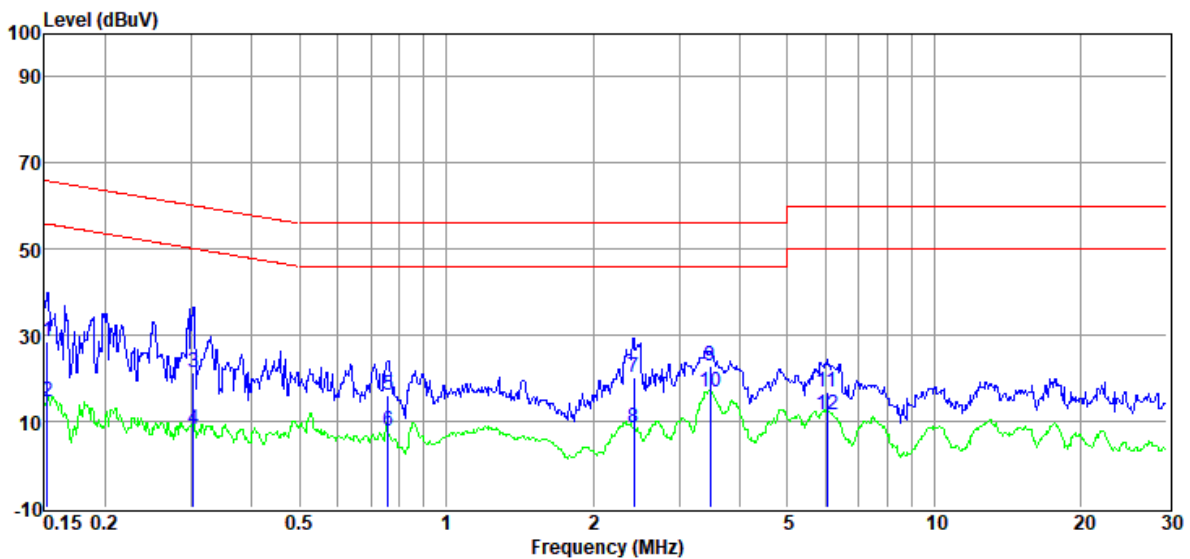
Note3: Pre-test AC conducted emission at both voltage AC 120V/60Hz and AC 240V/50Hz, recorded the worst case.

14.7. Test data

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **D:\2025 CE report data\Q25073024-24E\CE-FCC.EM6**
Test Date : 2025-09-04 **Tested By** : Alex Liu
EUT : In-ear headphones with ANC **Model Number** : Pure
Power Supply : AC 120V/60Hz **Test Mode** : BLE1M mode
Condition : TEMP:22.1°C, RH:61.2% **LISN** : 2025 1# 216/LINE
Memo : S25073024-101

Data: 6



Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.15	8.90	9.85	0.05	9.89	28.69	65.87	-37.18	QP	LINE
2	0.15	-5.41	9.85	0.05	9.89	14.38	55.87	-41.49	Average	LINE
3	0.30	1.62	9.70	0.06	9.89	21.27	60.15	-38.88	QP	LINE
4	0.30	-11.34	9.70	0.06	9.89	8.31	50.15	-41.84	Average	LINE
5	0.76	-3.94	9.81	0.13	9.90	15.90	56.00	-40.10	QP	LINE
6	0.76	-11.92	9.81	0.13	9.90	7.92	46.00	-38.08	Average	LINE
7	2.42	0.22	9.85	0.17	9.88	20.12	56.00	-35.88	QP	LINE
8	2.42	-11.26	9.85	0.17	9.88	8.64	46.00	-37.36	Average	LINE
9	3.47	2.78	9.96	0.18	9.87	22.79	56.00	-33.21	QP	LINE
10	3.47	-3.35	9.96	0.18	9.87	16.66	46.00	-29.34	Average	LINE
11	6.02	-3.33	9.94	0.21	9.85	16.67	60.00	-43.33	QP	LINE
12	6.02	-8.63	9.94	0.21	9.85	11.37	50.00	-38.63	Average	LINE

Note:

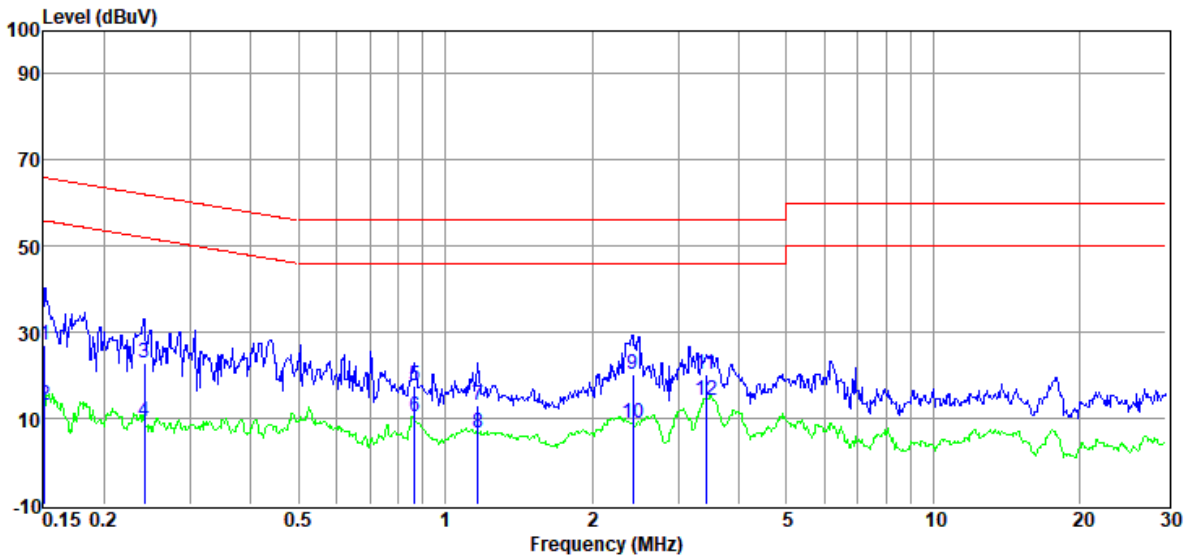
1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room
Test Date : 2025-09-04
EUT : In-ear headphones with ANC
Power Supply : AC 120V/60Hz
Condition : TEMP:22.1°C, RH:61.2%
Memo : S25073024-101

D:\2025 CE report data\Q25073024-24E\FCC-EM6
Tested By : Alex Liu
Model Number : Pure
Test Mode : BLE1M mode
LISN : 2025 1# 216/NEUTRAL

Data: 8



Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.15	7.28	9.77	0.05	9.89	26.99	65.96	-38.97	QP	NEUTRAL
2	0.15	-6.79	9.77	0.05	9.89	12.92	55.96	-43.04	Average	NEUTRAL
3	0.24	3.12	9.84	0.06	9.89	22.91	62.04	-39.13	QP	NEUTRAL
4	0.24	-10.43	9.84	0.06	9.89	9.36	52.04	-42.68	Average	NEUTRAL
5	0.87	-2.47	9.85	0.14	9.90	17.42	56.00	-38.58	QP	NEUTRAL
6	0.87	-9.50	9.85	0.14	9.90	10.39	46.00	-35.61	Average	NEUTRAL
7	1.17	-6.93	9.90	0.15	9.90	13.02	56.00	-42.98	QP	NEUTRAL
8	1.17	-13.25	9.90	0.15	9.90	6.70	46.00	-39.30	Average	NEUTRAL
9	2.42	0.36	9.79	0.17	9.88	20.20	56.00	-35.80	QP	NEUTRAL
10	2.42	-11.12	9.79	0.17	9.88	8.72	46.00	-37.28	Average	NEUTRAL
11	3.42	0.49	9.85	0.18	9.87	20.39	56.00	-35.61	QP	NEUTRAL
12	3.42	-5.59	9.85	0.18	9.87	14.31	46.00	-31.69	Average	NEUTRAL

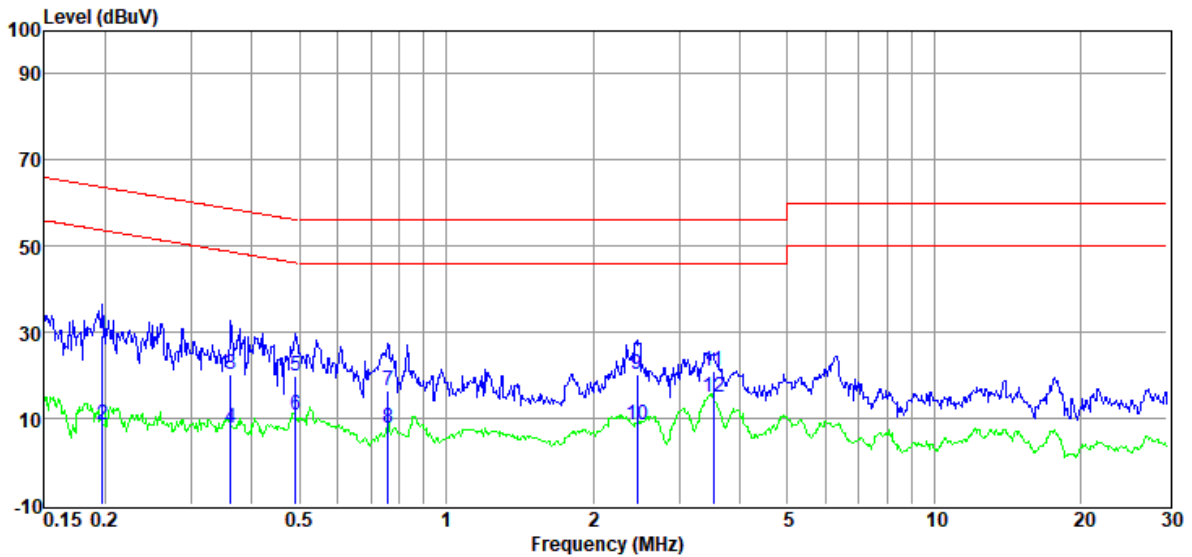
Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **D:\2025 CE report data\Q25073024-24E\FCC-EM6**
Test Date : 2025-09-04 **Tested By** : Alex Liu
EUT : In-ear headphones with ANC **Model Number** : Pure
Power Supply : AC 120V/60Hz **Test Mode** : BLE2M mode
Condition : TEMP:22.1°C, RH:61.2% **LISN** : 2025 1# 216/NEUTRAL
Memo : S25073024-101

Data: 10



Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.20	9.51	9.82	0.06	9.89	29.28	63.71	-34.43	QP	NEUTRAL
2	0.20	-11.17	9.82	0.06	9.89	8.60	53.71	-45.11	Average	NEUTRAL
3	0.36	0.37	9.89	0.07	9.89	20.22	58.69	-38.47	QP	NEUTRAL
4	0.36	-11.91	9.89	0.07	9.89	7.94	48.69	-40.75	Average	NEUTRAL
5	0.49	0.04	9.90	0.09	9.89	19.92	56.14	-36.22	QP	NEUTRAL
6	0.49	-9.21	9.90	0.09	9.89	10.67	46.14	-35.47	Average	NEUTRAL
7	0.76	-3.44	9.85	0.13	9.90	16.44	56.00	-39.56	QP	NEUTRAL
8	0.76	-12.06	9.85	0.13	9.90	7.82	46.00	-38.18	Average	NEUTRAL
9	2.46	0.57	9.79	0.17	9.88	20.41	56.00	-35.59	QP	NEUTRAL
10	2.46	-11.26	9.79	0.17	9.88	8.58	46.00	-37.42	Average	NEUTRAL
11	3.53	1.02	9.85	0.18	9.87	20.92	56.00	-35.08	QP	NEUTRAL
12	3.53	-4.80	9.85	0.18	9.87	15.10	46.00	-30.90	Average	NEUTRAL

Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room

D:\2025 CE report data\Q25073024-24E\CE-FCC.EM6

Test Date : 2025-09-04

Tested By : Alex Liu

EUT : In-ear headphones with ANC

Model Number : Pure

Power Supply : AC 120V/60Hz

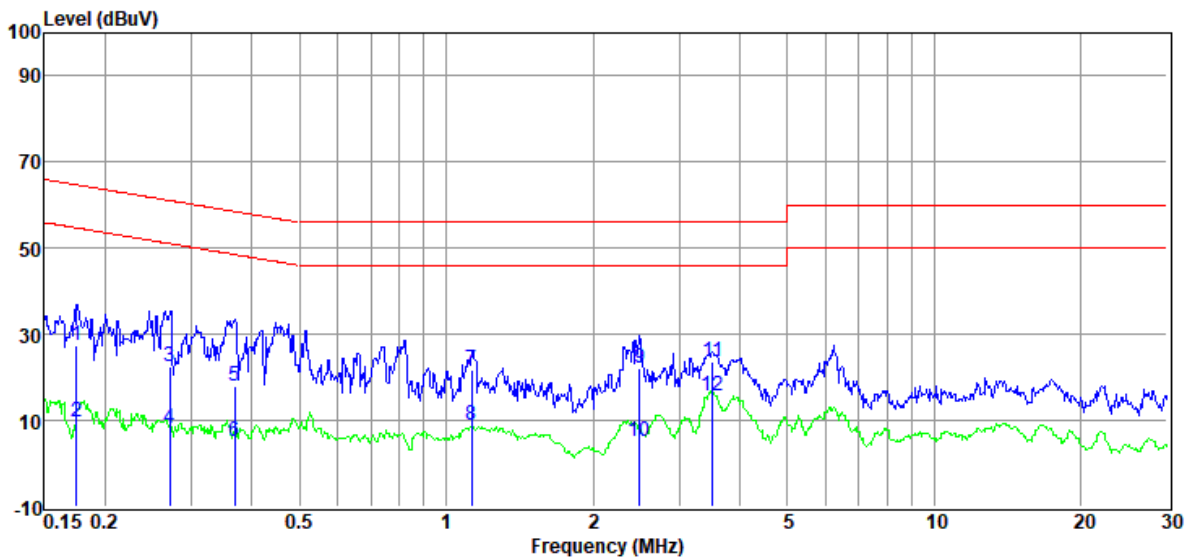
Test Mode : BLE2M mode

Condition : TEMP:22.1°C, RH:61.2%

LISN : 2025 1# 216/LINE

Memo : S25073024-101

Data: 12



Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.17	7.80	9.84	0.06	9.89	27.59	64.72	-37.13	QP	LINE
2	0.17	-10.12	9.84	0.06	9.89	9.67	54.72	-45.05	Average	LINE
3	0.27	2.85	9.77	0.06	9.89	22.57	61.07	-38.50	QP	LINE
4	0.27	-11.59	9.77	0.06	9.89	8.13	51.07	-42.94	Average	LINE
5	0.37	-1.62	9.67	0.07	9.89	18.01	58.52	-40.51	QP	LINE
6	0.37	-14.48	9.67	0.07	9.89	5.15	48.52	-43.37	Average	LINE
7	1.13	1.76	9.94	0.15	9.90	21.75	56.00	-34.25	QP	LINE
8	1.13	-11.02	9.94	0.15	9.90	8.97	46.00	-37.03	Average	LINE
9	2.49	2.08	9.86	0.17	9.88	21.99	56.00	-34.01	QP	LINE
10	2.49	-14.64	9.86	0.17	9.88	5.27	46.00	-40.73	Average	LINE
11	3.51	3.80	9.96	0.18	9.87	23.81	56.00	-32.19	QP	LINE
12	3.51	-4.32	9.96	0.18	9.87	15.69	46.00	-30.31	Average	LINE

Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

16. Photos of the EUT

Please refer to DDT-Q25073024-29E appendix I

-----End Report-----