



FCC Part 15C Test Report

FCC ID: 2ACXFRB-M7

Product Name:	Bluetooth Speaker
Trademark:	REMAX ®
Model Name :	RB-M7, RB-H1, RB-H2, RB-H3C, RB-H5, RB-H6, RB-H7, RB-H8, RB-H9, RB-MM, RB-M6, RB-M7, RB-M8, RB-M8MINI, RB-M9, RB-M10
Prepared For :	SHENZHEN REMAX CO.,LTD
Address :	3/F, B1 Building, Mingjun Industrial Park, Huarong Rd, Baoan Area, Shenzhen, China
Prepared By :	Shenzhen BCTC Technology Co., Ltd.
Address :	No.101,Yousong Road,Longhua New District, Shenzhen,China
Test Date:	Feb. 20 – Feb. 28, 2016
Date of Report :	Feb. 28, 2016
Report No.:	BCTC-160301939E



VERIFICATION OF COMPLIANCE

Applicant's name : **SHENZHEN REMAX CO.,LTD**

Address..... : 3/F, B1 Building, Mingjun Industrial Park, Huarong Rd, Baoan Area, Shenzhen, China

Manufacture's Name : **SHENZHEN REMAX CO.,LTD**

Address..... : 3/F, B1 Building, Mingjun Industrial Park, Huarong Rd, Baoan Area, Shenzhen, China

Product description

Product name : Bluetooth Speaker

Trademark:

REMAX®

Model Name:

RB-M7, RB-H1, RB-H2, RB-H3C, RB-H5, RB-H6, RB-H7, RB-H8, RB-H9, RB-MM, RB-M6, RB-M7, RB-M8, RB-M8MINI, RB-M9, RB-M10

Test procedure : FCC Part15.249

Standards : ANSI C63.10-2013

This device described above has been tested by BCTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of BCTC, this document may be altered or revised by BCTC, personal only, and shall be noted in the revision of the document.

Test Result : **Pass**

Testing Engineer : _____

Eric Yang

(Eric Yang)

Technical Manager : _____

Sophie Lee

(Sophia Lee)

Authorized Signatory : _____

Carson Zhang

(Carson. Zhang)





Table of Contents	Page
1 . SUMMARY OF TEST RESULTS	4
1.1 TEST FACILITY	4
1.2 MEASUREMENT UNCERTAINTY	4
2 . GENERAL INFORMATION	5
2.1 GENERAL DESCRIPTION OF EUT	5
2.2 DESCRIPTION OF TEST MODES	6
2.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	6
2.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	6
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	8
3 . EMC EMISSION TEST	9
3.1 RADIATED EMISSION MEASUREMENT	13
3.1.1 RADIATED EMISSION LIMITS	13
3.1.2 TEST PROCEDURE	14
3.1.3 DEVIATION FROM TEST STANDARD	14
3.1.4 TEST SETUP	15
3.1.5 EUT OPERATING CONDITIONS	16
3.1.6 TEST RESULTS	17
4 . BANDWIDTH TEST	23
4.1 APPLIED PROCEDURES / LIMIT	23
4.1.1 TEST PROCEDURE	23
4.1.2 DEVIATION FROM STANDARD	23
4.1.3 TEST SETUP	23
4.1.4 EUT OPERATION CONDITIONS	23
4.1.5 TEST RESULTS	24
5 . 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE	28
5.1 DEVIATION FROM STANDARD	28
5.2 TEST SETUP	28
5.3 EUT OPERATION CONDITIONS	28
5.4 TEST RESULTS	29
6 . ANTENNA REQUIREMENT	33
6.1 STANDARD REQUIREMENT	33
6.2 EUT ANTENNA	33
7 . EUT TEST PHOTO	34



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.249) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.249	Fundamental & Radiated Spurious Emission Measurement	PASS	
15.249	Bandwidth	PASS	
15.205	Band Edge Emission	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

1.1 TEST FACILITY

Shenzhen BCTC Technology Co., Ltd.

Add.: No. 101, Yousong Road, Longhua New District, Shenzhen, China

FCC Registration No.: 187086

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power, conducted	$\pm 0.16\text{dB}$
3	Spurious emissions, conducted	$\pm 0.21\text{dB}$
4	All emissions, radiated (<1G)	$\pm 4.68\text{dB}$
5	All emissions, radiated (>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^\circ\text{C}$
7	Humidity	$\pm 2\%$



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Product Name:	Bluetooth Speaker
Model No.:	RB-M7, RB-H1, RB-H2, RB-H3C, RB-H5, RB-H6, RB-H7, RB-H8, RB-H9, RB-MM, RB-M6, RB-M7, RB-M8, RB-M8MINI, RB-M9, RB-M10
Operation Frequency:	BT:2402~2480MHz
Modulation technology:	GFSK, PI/4 DPSK, 8DPSK
BT Version	3.0
Antenna Type:	Integral Antenna
Antenna gain:	0 dBi
Power supply:	DC 5V from PC Rechargeable lithium-ion battery 3.7V
Connecting I/O Port(s)	Please refer to the User's Manual
hardware version	--
Software version	--
Serial number	--

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2402	11	2413	38	2440
02	2403	12	2414	39	2441
03	2404	13	2415	40	2442
~	~	~	~	~	~
09	2411	19	2421	77	2479
10	2412	20	2422	78	2480

3. The product are different for mode names,outlook color, screen size and panel material.



2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

For Conducted & Radiated Emission		
Final Test Mode	Description	
Mode 1	CH01	GFSK, PI/4 DPSK 8DPSK
Mode 2	CH39	
Mode 3	CH78	
Mode 4	Normal Link	

Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) Fully-charged battery is used during the test


2.3 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of FHSS


Frequency	2402 MHz	2441 MHz	2480 MHz
Channel	Low	Middle	High

2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Conducted Emission Test

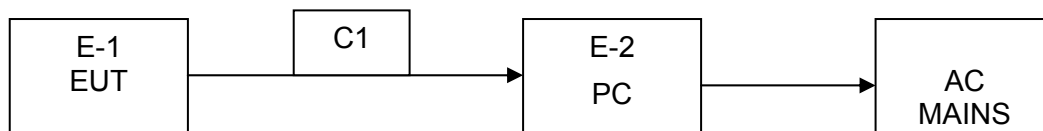

Radiated Emission Test





2.5 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Bluetooth Speaker	REMAX	RB-M7	N/A	EUT
E-2	PC	ASUS	AWT8000	N/A	N/A

Item	Shielded Type	Ferrite Core	Length	Note
C1	No Shielded	NO	0.8M	Mini USB Cable

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.



2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

Conduction Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Test Receiver	R&S	ESCI	101160	2015.06.07	2016.06.06
LISN	SCHWARZBECK	ENV216	101313	2015.08.25	2016.08.24
LISN	EMCO	3816/2	00042990	2015.08.25	2016.08.24
50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2015.06.07	2016.06.06
RF cables	R&S	R204	R20X	2015.07.06	2015.07.05

Radiation test, Band-edge test and 20db bandwith test quipment

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Test Receiver	R&S	ESPI	101318	2015.06.07	2016.06.06
System Simulator	Agilent	E5515C	GB43130252	2015.06.07	2016.06.06
Power Splitter	Weinschel	1506A	NW534	2015.06.07	2016.06.06
Bilog Antenna	TESEQ	CBL6111D	31216	2015.07.06	2016.07.05
Loop antenna	ARA	PLA-1030/B	1029	2015.06.07	2016.06.06
Spectrum Analyzer	Agilent	E4411B	MY4511235	2015.07.06	2016.07.05
Signal Amplifier	SONOMA	313	187022	2015.07.06	2016.07.05
Signal Amplifier	Agilent	8449B	3008A00213	2015.07.06	2016.07.05
RF Cable	R&S	R203	R20X	2015.07.06	2016.07.05
MULTI-DEVICE Controller	ETS-LINDGREEN	31250	126821	N/A	N/A
Horn Antenna	EM	EM-AH-10180	2011071401	2015.06.07	2017.06.06
Horn Antenna	Schwarzbeck	BBHA 9170	9170-181	2015.07.06	2016.07.05
Spectrum Analyzer	Agilent	E4407B	MY45108040	2015.07.06	2016.07.05
Signal Amplifier	DAZE	ZN3380B	11235	2015.08.25	2016.08.24
High Pass filter	KANGMAI	WHKX1.0/1.5G-10SS	40	2015.08.25	2016.08.24
Filter	COM-MW	ZBSF-C836.5-25-X	BCTC042	2015.08.25	2016.08.24
Filter	COM-MW	ZBSF-C1747.5-75-X2	BCTC045	2015.08.25	2016.08.24
Filter	COM-MW	ZBSF-C1880-60-X2	BCTC047	2015.08.25	2016.08.24
Splitter	Agilent	11435B	1125162	2015.07.06	2016.07.05



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quas -peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	73.00	60.00	56.00	46.00	CISPR
5.0 -30.0	73.00	60.00	60.00	50.00	CISPR

0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

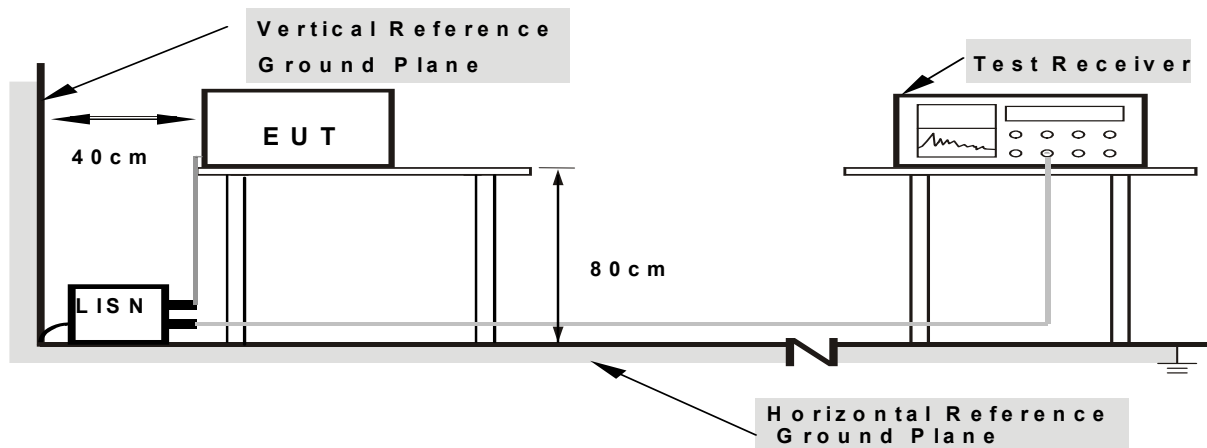

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V and AC 240V, the worst voltage was AC 120V and the data recording in the report.




3.1.6 TEST RESULTS

EUT :	Bluetooth Speaker	Model Name. :	RB-M7
Temperature :	26℃	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	AC120V/60Hz	Test Mode :	Mode 4

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1940	34.10	10.06	44.16	63.86	-19.70	QP	
2		0.1940	24.17	10.06	34.23	53.86	-19.63	AVG	
3		0.5740	24.27	10.12	34.39	56.00	-21.61	QP	
4		0.5740	16.51	10.12	26.63	46.00	-19.37	AVG	
5		1.3900	14.87	10.17	25.04	56.00	-30.96	QP	
6		1.3900	6.92	10.17	17.09	46.00	-28.91	AVG	
7		3.7060	18.40	10.17	28.57	56.00	-27.43	QP	
8		3.7060	6.37	10.17	16.54	46.00	-29.46	AVG	
9		12.6220	34.09	10.14	44.23	60.00	-15.77	QP	
10	*	12.6220	24.81	10.14	34.95	50.00	-15.05	AVG	
11		24.6140	19.05	10.20	29.25	60.00	-30.75	QP	
12		24.6140	8.07	10.20	18.27	50.00	-31.73	AVG	

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

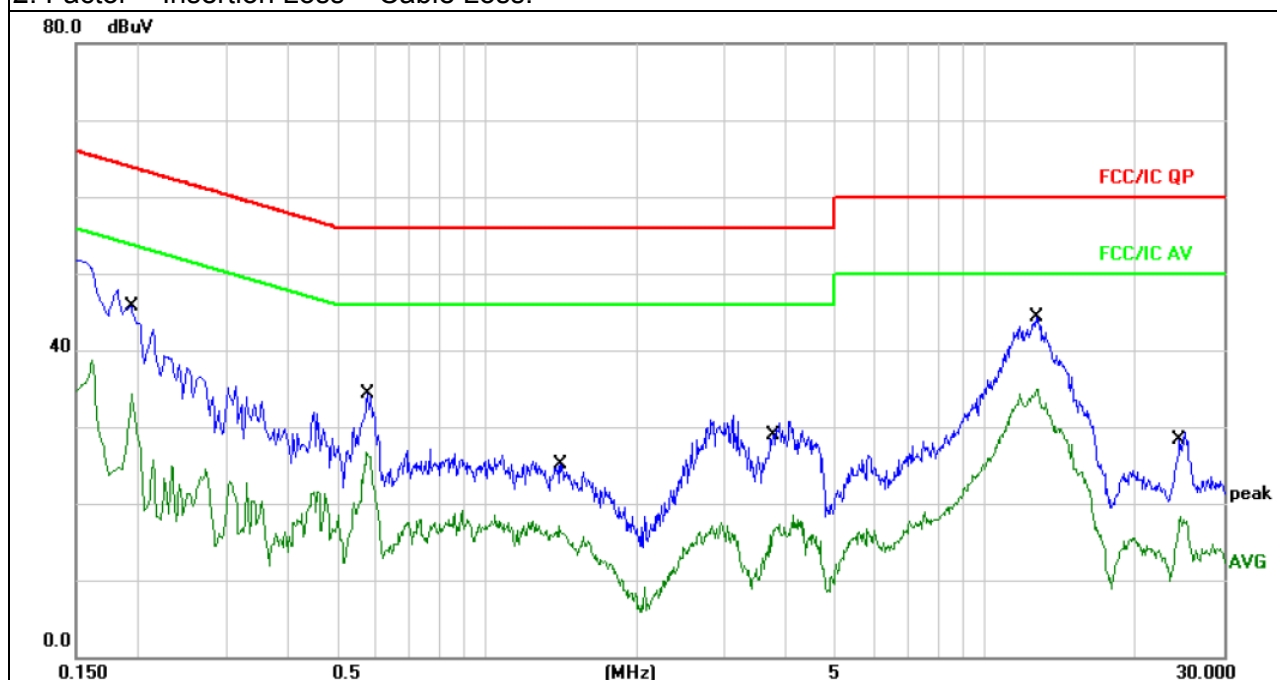




EUT :	Bluetooth Speaker	Model Name. :	RB-M7
Temperature :	26℃	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	AC120V/60Hz	Test Mode :	Mode 4

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.2060	33.39	10.07	43.46	63.36	-19.90	QP	
2		0.2060	20.92	10.07	30.99	53.36	-22.37	AVG	
3		0.5420	24.89	10.12	35.01	56.00	-20.99	QP	
4		0.5420	18.94	10.12	29.06	46.00	-16.94	AVG	
5		0.9060	20.86	10.16	31.02	56.00	-24.98	QP	
6		0.9060	14.08	10.16	24.24	46.00	-21.76	AVG	
7		2.9900	23.02	10.19	33.21	56.00	-22.79	QP	
8		2.9900	8.67	10.19	18.86	46.00	-27.14	AVG	
9		12.5780	34.51	10.14	44.65	60.00	-15.35	QP	
10	*	12.5780	24.62	10.14	34.76	50.00	-15.24	AVG	
11		22.5540	14.69	10.19	24.88	60.00	-35.12	QP	
12		22.5540	7.04	10.19	17.23	50.00	-32.77	AVG	

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

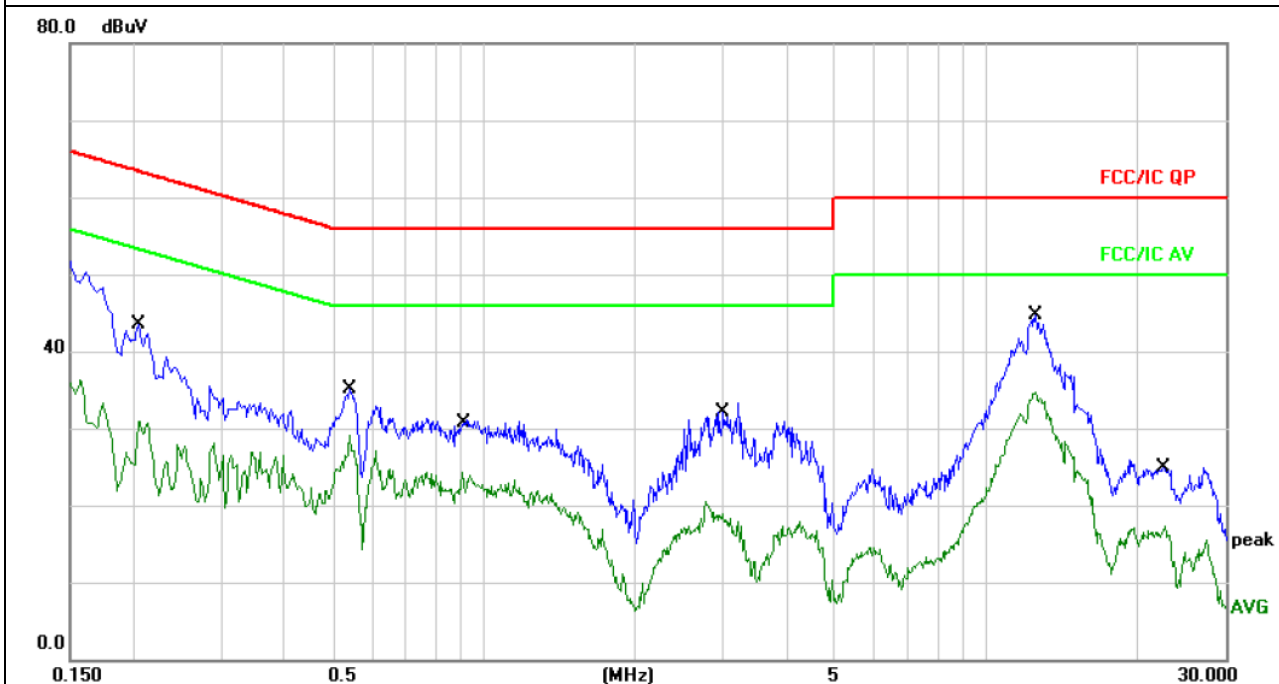



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

FREQUENCY RANGE OF RADIATED MEASUREMENT (For unintentional radiators)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 – 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower



Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE

- The measuring distance of at 3 m shall be used for measurements at frequency up to 25GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 and 1.5 meters above the ground at a 3 meter semi-chamber test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m; above 1GHz, the height was 1.5m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.
- For the radiated emission test above 1GHz:
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.
The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

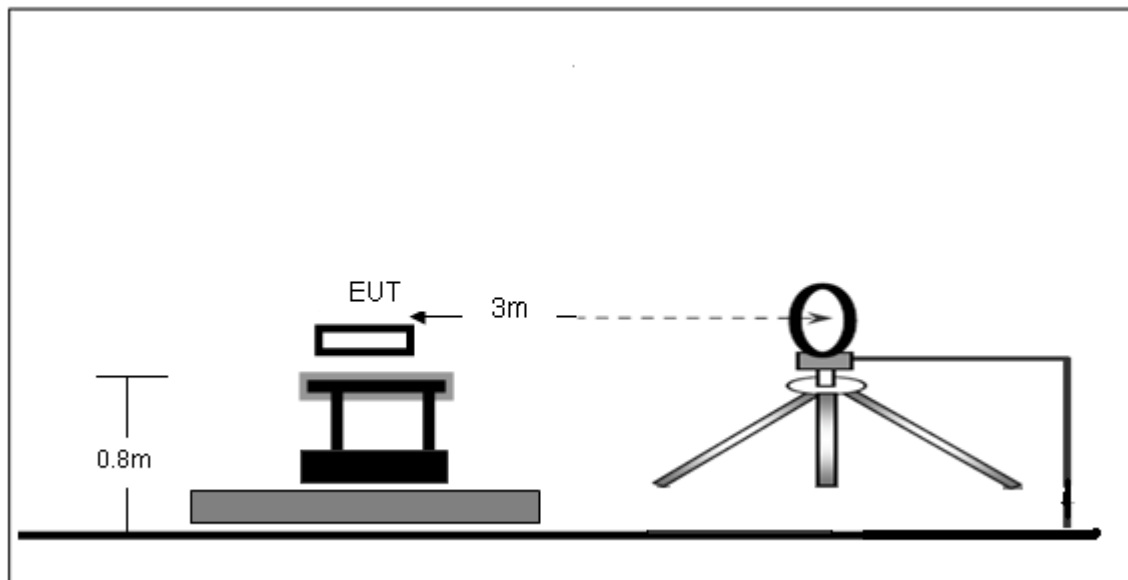

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

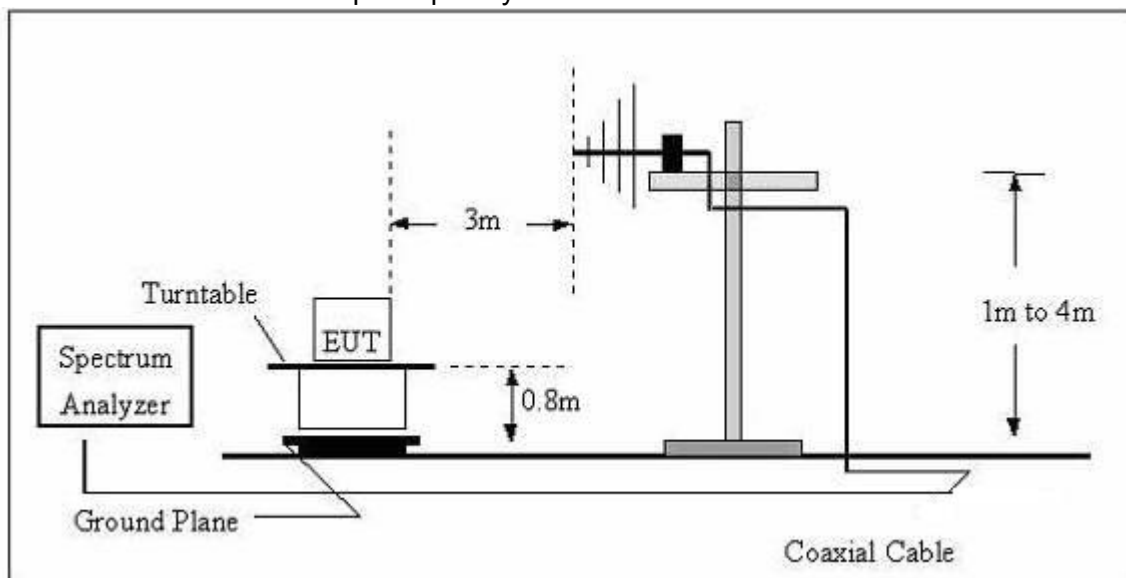

(C) Radiated Emission Test-Up Frequency Above 1GHz

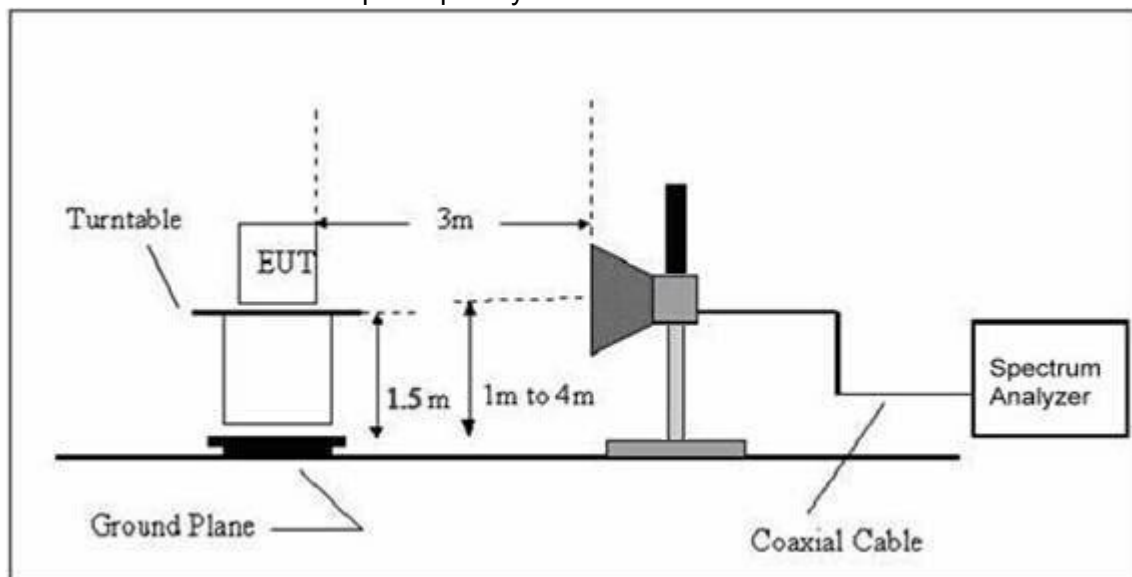

3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



3.2.6 TEST RESULTS

Radiated Spurious Emission (Below 30MHz)

EUT :	Bluetooth Speaker	Model Name :	RB-M7
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Polarization :	---
Test Voltage :	DC 3.7V		
Test Mode :	Mode 4		

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance/test distance})(\text{dB})$;

Limit line = specific limits(dBuv) + distance extrapolation factor.



Radiated Spurious Emission (Between 30MHz – 1GHz)


EUT :	Bluetooth Speaker	Model Name :	RB-M7
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Polarization :	Horizontal
Test Voltage :	DC 3.7V		
Test Mode : (Worst)	Mode 4		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		41.8596	29.76	-9.08	20.68	40.00	-19.32	QP		
2		97.4560	47.46	-16.76	30.70	43.50	-12.80	QP		
3		152.1297	24.16	-12.86	11.30	43.50	-32.20	QP		
4		330.1949	43.70	-11.81	31.89	46.00	-14.11	QP		
5		490.7447	42.29	-8.31	33.98	46.00	-12.02	QP		
6	*	661.1505	42.40	-4.94	37.46	46.00	-8.54	QP		

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

All interfaces was connected, and BT TX mode was link.

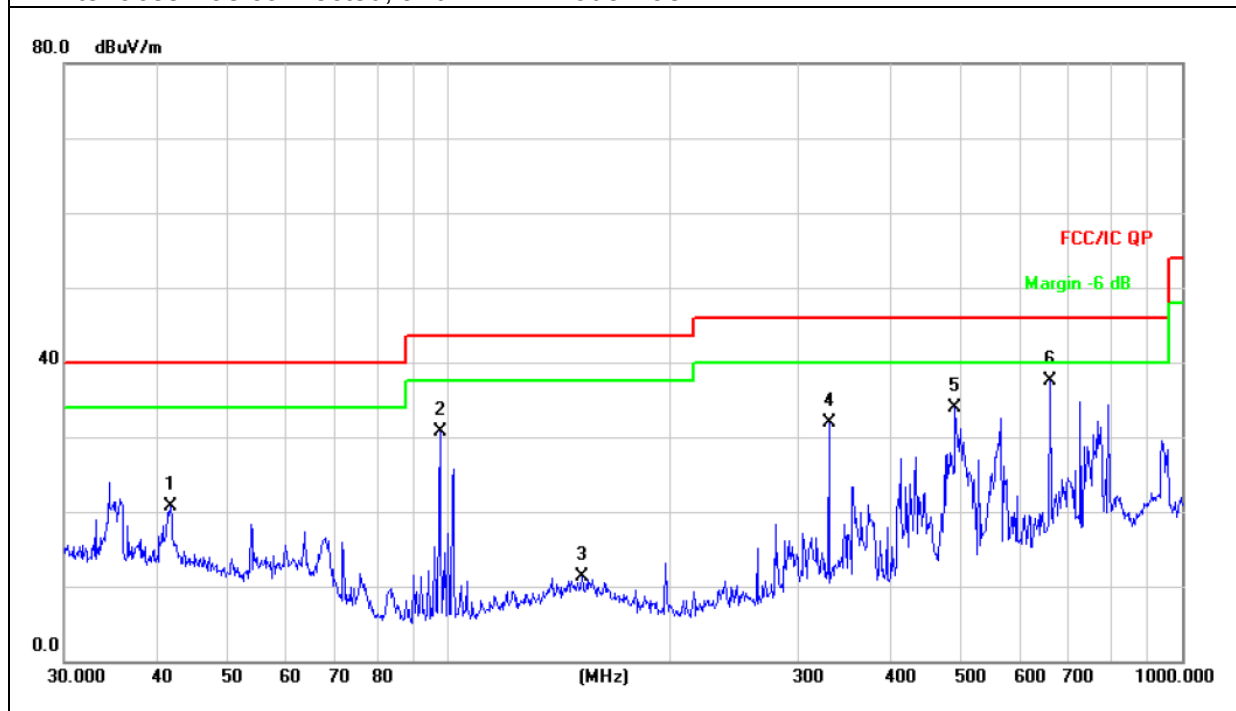




EUT :	Bluetooth Speaker	Model Name :	RB-M7
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Polarization :	Vertical
Test Voltage :	DC 3.7V		
Test Mode : (Worst)	Mode 4		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		41.8596	34.29	-9.08	25.21	40.00	-14.79	QP		
2		66.7325	29.68	-13.22	16.46	40.00	-23.54	QP		
3		97.4560	43.81	-16.76	27.05	43.50	-16.45	QP		
4		197.8928	28.26	-16.07	12.19	43.50	-31.31	QP		
5		330.1949	35.05	-11.81	23.24	46.00	-22.76	QP		
6	*	511.8352	50.43	-7.99	42.44	46.00	-3.56	QP		

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

All interfaces was connected, and BT TX mode was link.

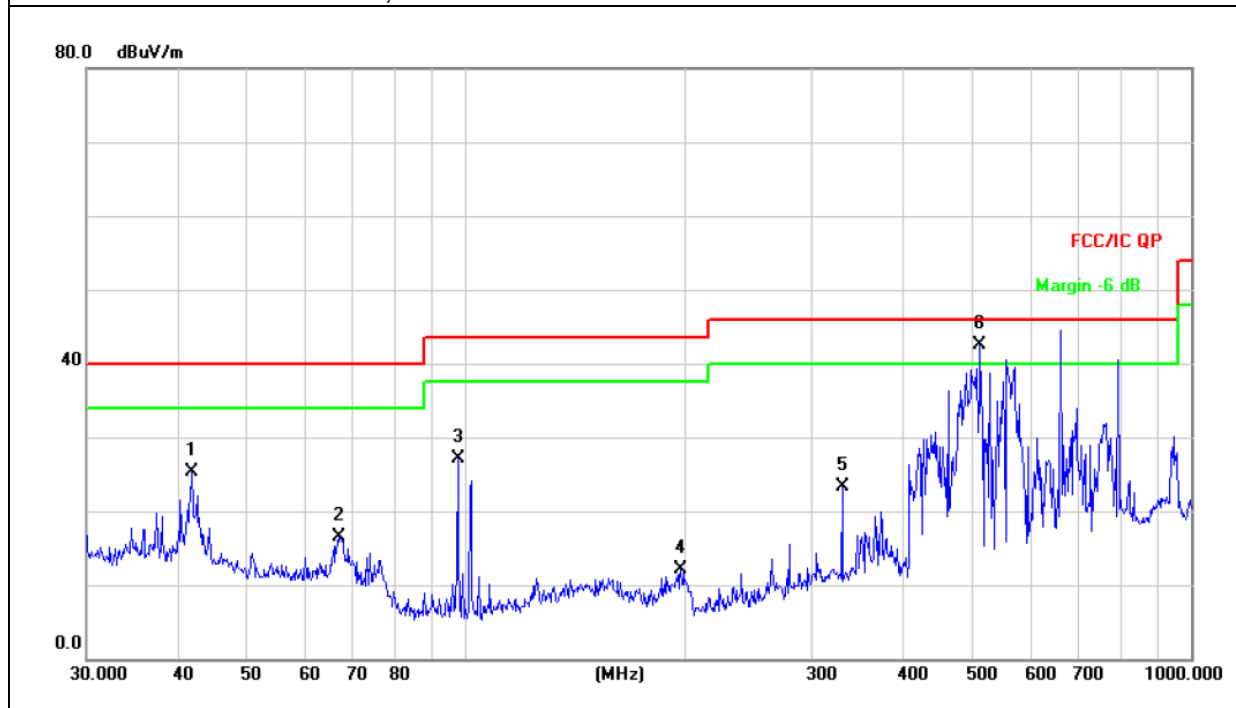



Radiated Spurious Emission (1GHz to 10th harmonics)
GFSK

	Freq.	Receiver Reading	Detector	Polar	Corrected Factor	Emission Level	Limit	Result
	(MHz)	(dBμV)	(PK/QP/Ave)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	
Lower Channel 2402MHz	2402.00	103.67	PK	H	1.31	104.98	114.00	Pass
	2402.00	89.48	Ave	H	1.31	90.79	94.00	Pass
	4804.00	56.62	PK	H	-1.06	55.56	74.00	Pass
	4804.00	46.66	Ave	H	-1.06	45.60	54.00	Pass
	2402.00	103.51	PK	V	1.31	104.82	114.00	Pass
	2402.00	88.71	Ave	V	1.31	90.02	94.00	Pass
	4804.00	55.65	PK	V	-1.06	54.59	74.00	Pass
	4804.00	45.75	Ave	V	-1.06	44.69	54.00	Pass
	2441.00	102.93	PK	H	0.85	103.78	114.00	Pass
	2441.00	88.23	Ave	H	0.85	89.08	94.00	Pass
Middle Channel 2441MHz	4882.00	57.52	PK	H	-0.62	56.90	74.00	Pass
	4882.00	48.42	Ave	H	-0.62	47.80	54.00	Pass
	2441.00	103.21	PK	V	0.85	104.06	114.00	Pass
	2441.00	88.27	Ave	V	0.85	89.12	94.00	Pass
	4882.00	57.44	PK	V	-0.62	56.82	74.00	Pass
	4882.00	47.85	Ave	V	-0.62	47.23	54.00	Pass
	2480.00	103.41	PK	H	0.53	103.94	114.00	Pass
	2480.00	88.84	Ave	H	0.53	89.37	94.00	Pass
Upper Channel 2480MHz	4960.00	57.74	PK	H	-0.24	57.50	74.00	Pass
	4960.00	49.62	Ave	H	-0.24	49.38	54.00	Pass
	2480.00	102.81	PK	V	0.53	103.34	114.00	Pass
	2480.00	88.22	Ave	V	0.53	88.75	94.00	Pass
	4960.00	57.70	PK	V	-0.24	57.46	74.00	Pass
	4960.00	49.28	Ave	V	-0.24	49.04	54.00	Pass

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Emission Level = Meter Reading + Factor

Margin = Emission Level - Limit

Other harmonics emissions are lower than 20dB below the allowable limit.



PI/4 DPSK

	Freq.	Receiver Reading	Detector	Polar	Corrected Factor	Emission Level	Limit	Result
	(MHz)	(dBμV)	(PK/QP/Ave)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	
Lower Channel 2402MHz	2402.00	102.21	PK	H	1.31	103.52	114.00	Pass
	2402.00	88.13	Ave	H	1.31	89.44	94.00	Pass
	4804.00	57.19	PK	H	-1.06	56.13	74.00	Pass
	4804.00	48.29	Ave	H	-1.06	47.23	54.00	Pass
	2402.00	101.14	PK	V	1.31	102.45	114.00	Pass
	2402.00	87.41	Ave	V	1.31	88.72	94.00	Pass
	4804.00	58.20	PK	V	-1.06	57.14	74.00	Pass
	4804.00	46.81	Ave	V	-1.06	45.75	54.00	Pass
Middle Channel 2441MHz	2441.00	102.07	PK	H	0.85	102.92	114.00	Pass
	2441.00	87.66	Ave	H	0.85	88.51	94.00	Pass
	4882.00	54.05	PK	H	-0.62	53.43	74.00	Pass
	4882.00	43.31	Ave	H	-0.62	42.69	54.00	Pass
	2441.00	101.98	PK	V	0.85	102.83	114.00	Pass
	2441.00	87.05	Ave	V	0.85	87.90	94.00	Pass
	4882.00	54.95	PK	V	-0.62	54.33	74.00	Pass
	4882.00	44.37	Ave	V	-0.62	43.75	54.00	Pass
Upper Channel 2480MHz	2480.00	102.28	PK	H	0.53	102.81	114.00	Pass
	2480.00	87.74	Ave	H	0.53	88.27	94.00	Pass
	4960.00	52.19	PK	H	-0.24	51.95	74.00	Pass
	4960.00	43.21	Ave	H	-0.24	42.97	54.00	Pass
	2480.00	101.43	PK	V	0.53	101.96	114.00	Pass
	2480.00	87.02	Ave	V	0.53	87.55	94.00	Pass
	4960.00	54.35	PK	V	-0.24	54.11	74.00	Pass
	4960.00	43.41	Ave	V	-0.24	43.17	54.00	Pass

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Emission Level = Meter Reading + Factor

Margin = Emission Level - Limit

Other harmonics emissions are lower than 20dB below the allowable limit.

8DPSK



	Freq.	Receiver Reading	Detector	Polar	Corrected Factor	Emission Level	Limit	Result
	(MHz)	(dBμV)	(PK/QP/Ave)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	
Lower Channel 2402MHz	2402.00	102.96	PK	H	1.31	104.27	114.00	Pass
	2402.00	88.77	Ave	H	1.31	90.08	94.00	Pass
	4804.00	57.60	PK	H	-1.06	56.54	74.00	Pass
	4804.00	48.64	Ave	H	-1.06	47.58	54.00	Pass
	2402.00	101.88	PK	V	1.31	103.19	114.00	Pass
	2402.00	88.05	Ave	V	1.31	89.36	94.00	Pass
	4804.00	58.62	PK	V	-1.06	57.56	74.00	Pass
	4804.00	47.15	Ave	V	-1.06	46.09	54.00	Pass
Middle Channel 2441MHz	2441.00	102.81	PK	H	0.85	103.66	114.00	Pass
	2441.00	88.30	Ave	H	0.85	89.15	94.00	Pass
	4882.00	54.44	PK	H	-0.62	53.82	74.00	Pass
	4882.00	43.62	Ave	H	-0.62	43.00	54.00	Pass
	2441.00	102.72	PK	V	0.85	103.57	114.00	Pass
	2441.00	87.68	Ave	V	0.85	88.53	94.00	Pass
	4882.00	55.35	PK	V	-0.62	54.73	74.00	Pass
	4882.00	44.69	Ave	V	-0.62	44.07	54.00	Pass
Upper Channel 2480MHz	2480.00	103.03	PK	H	0.53	103.56	114.00	Pass
	2480.00	88.38	Ave	H	0.53	88.91	94.00	Pass
	4960.00	52.56	PK	H	-0.24	52.32	74.00	Pass
	4960.00	43.52	Ave	H	-0.24	43.28	54.00	Pass
	2480.00	102.17	PK	V	0.53	102.70	114.00	Pass
	2480.00	87.65	Ave	V	0.53	88.18	94.00	Pass
	4960.00	54.75	PK	V	-0.24	54.51	74.00	Pass
	4960.00	43.73	Ave	V	-0.24	43.49	54.00	Pass

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Emission Level = Meter Reading + Factor

Margin = Emission Level - Limit

Other harmonics emissions are lower than 20dB below the allowable limit.



4. BANDWIDTH TEST

4.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.249) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.249	Bandwidth	(20dB bandwidth)	2400-2483.5	PASS

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RB	30KHz
VB	$\geq$ RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW= 30KHz, VBW $\geq$ RBW, Sweep time = Auto.

4.1.2 DEVIATION FROM STANDARD

No deviation.

4.1.3 TEST SETUP



4.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.




4.1.5 TEST RESULTS

EUT :	Bluetooth Speaker	Model Name :	RB-M7
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH01 / CH39 /CH78		


	Frequency	20dB Bandwidth (MHz)	Result
GFSK	2402 MHz	0.968	PASS
	2441 MHz	0.963	PASS
	2480 MHz	0.962	PASS
PI/4 DPSK	2402 MHz	1.138	PASS
	2441 MHz	1.176	PASS
	2480 MHz	1.189	PASS
8DPSK	2402 MHz	1.346	PASS
	2441 MHz	1.326	PASS
	2480 MHz	1.311	PASS

GFSK

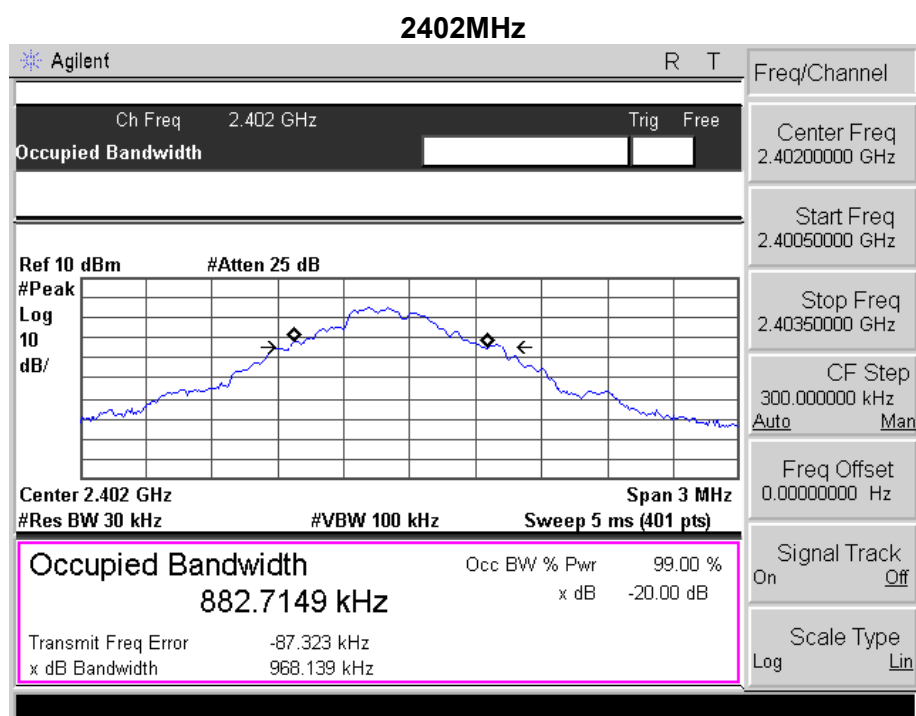




2441 MHz

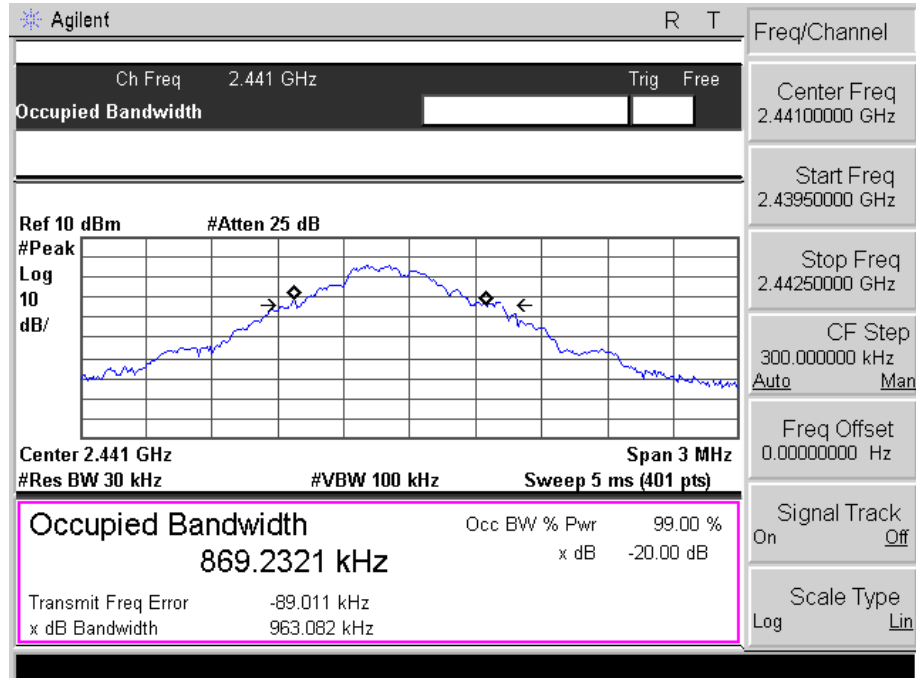


2480 MHz

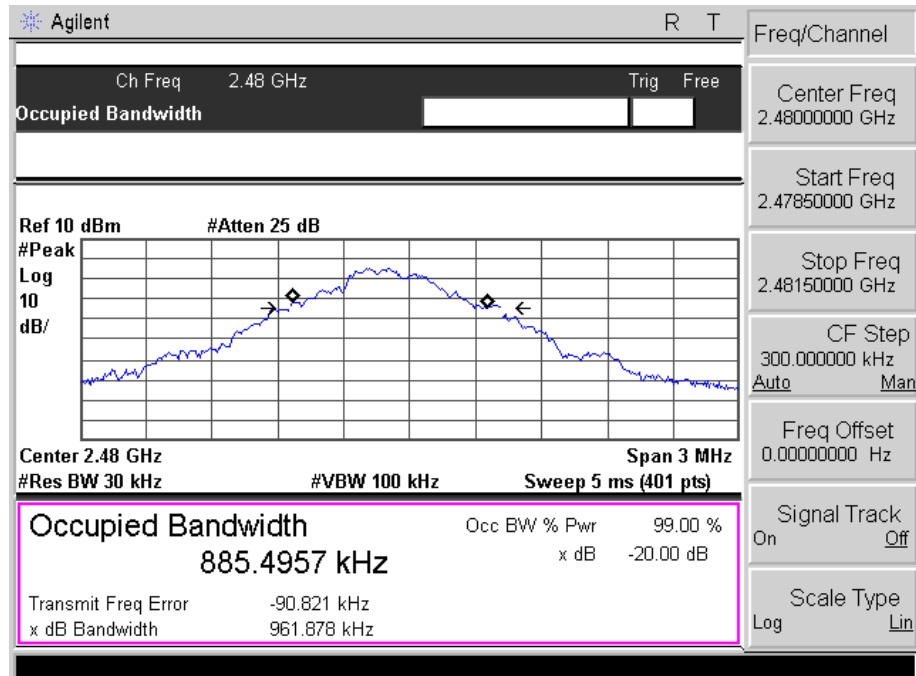





8DPSK

2402MHz

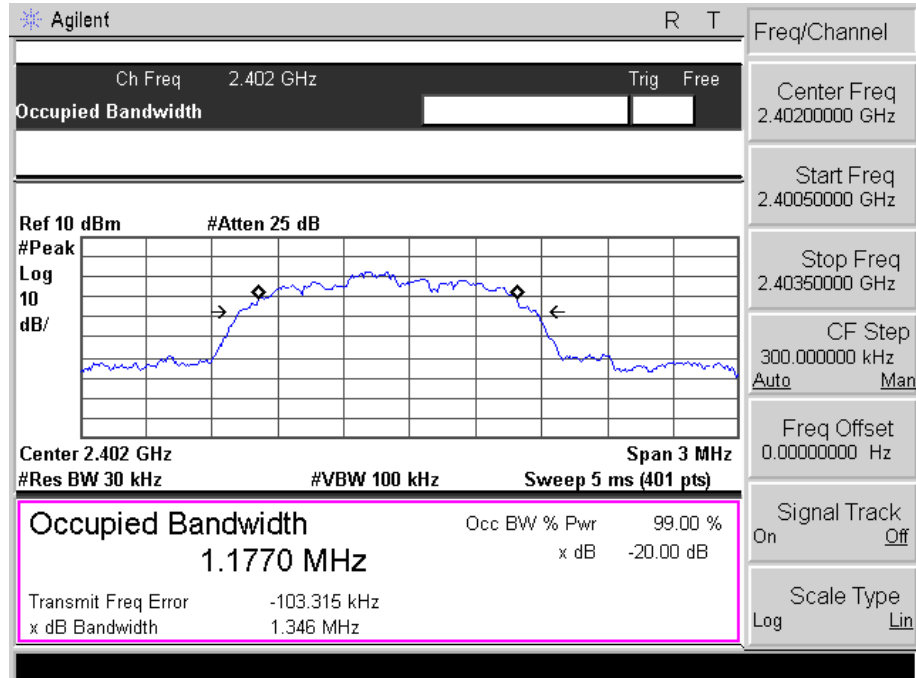

2441 MHz

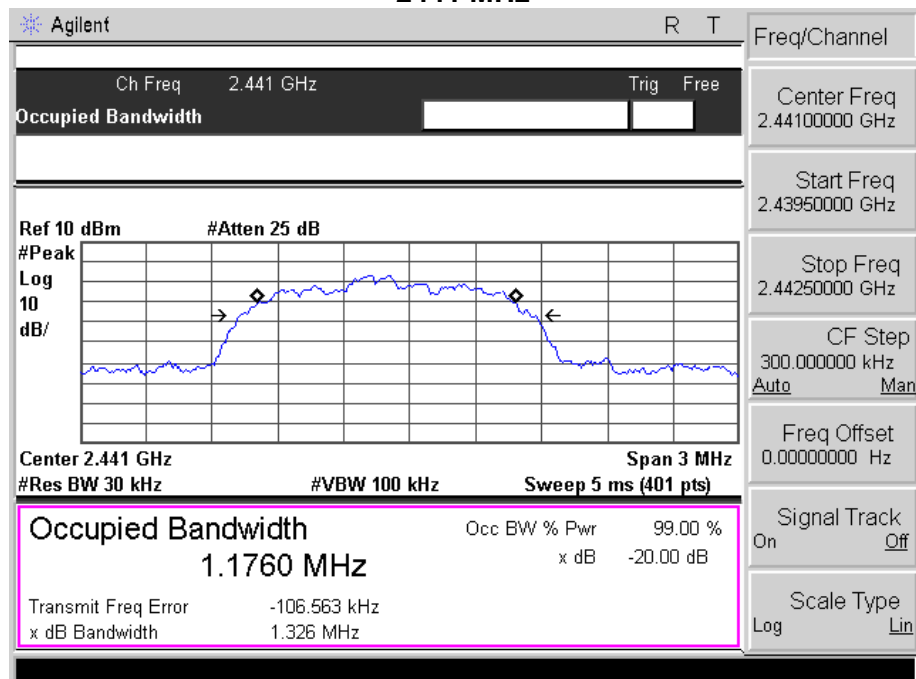

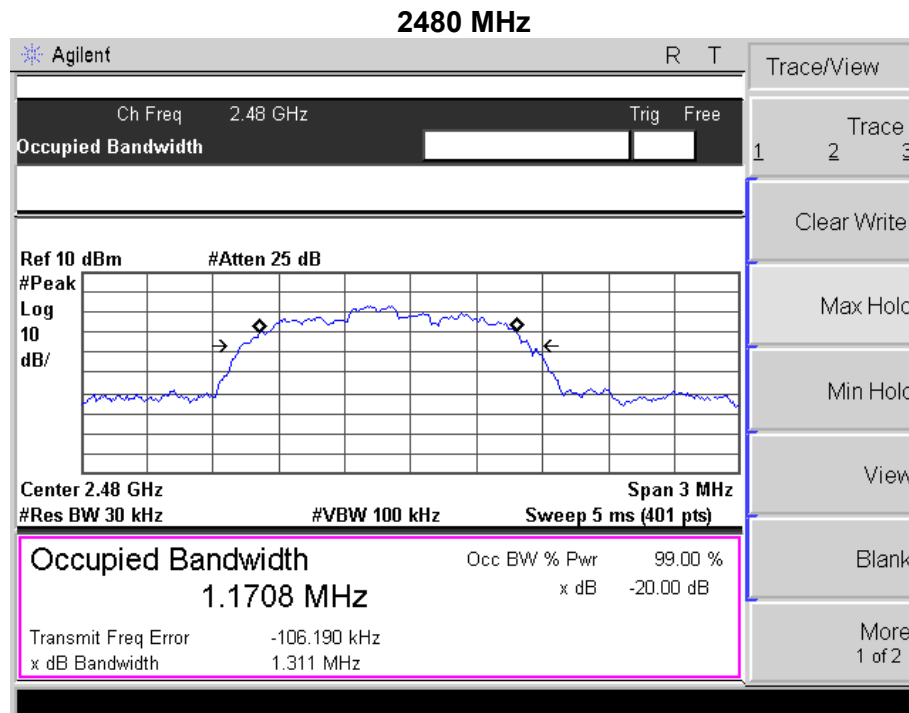



5. 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE

APPLICABLE STANDARD

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

TEST PROCEDURE

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- c. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- d. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- e. Repeat above procedures until all measured frequencies were complete.

5.1 DEVIATION FROM STANDARD

No deviation.

5.2 TEST SETUP

5.3 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



5.4 TEST RESULTS

EUT :	Bluetooth Speaker	Model Name :	RB-M7
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH01/ CH78	Polarization :	Horizontal

For radiated

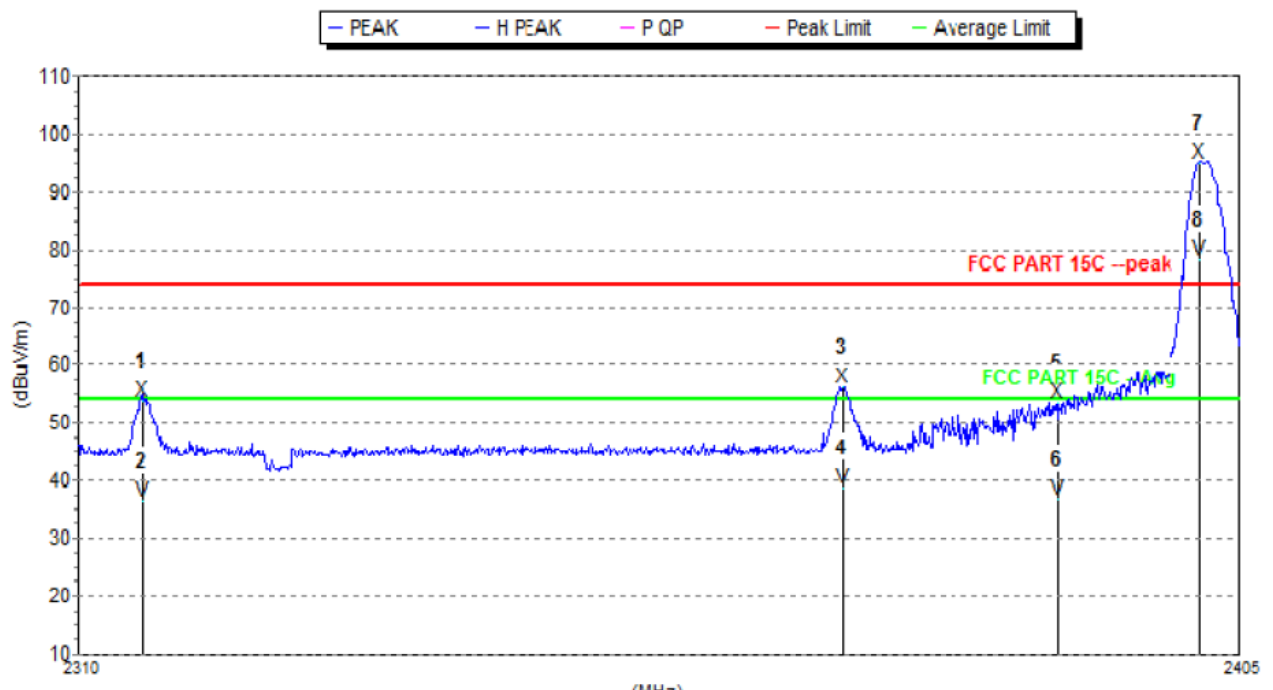



Mk.	Freq.(MHz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Ant.F.(dB/m)	Amp.G.(dB)	Cbl.L.(dB)	Pol.
Peak:								
1	2315.225	53.8	74.0	20.2	31.8	0.0	-19.1	H
2	2372.130	56.1	74.0	17.9	32.3	0.0	-19.2	H
3	2390	53.6	74.0	20.4	32.5	0.0	-19.3	H
4 F	2401.770	94.8	74.0	-20.8	32.6	0.0	-19.3	H
Avg								
1	2315.225	36.3	54.0	17.7	31.8	0.0	-19.1	H
2	2372.130	38.9	54.0	15.1	32.3	0.0	-19.2	H
3	2390	36.8	54.0	17.2	32.5	0.0	-19.3	H
4 F	2401.770	78.2	54.0	-24.2	32.6	0.0	-19.3	H



Mk.	Freq.(MHz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Ant.F.(dB/m)	Amp.G.(dB)	Cbl.L.(dB)	Pol.
Peak:								
1	2315.130	45.9	74.0	28.1	31.8	0.0	-19.1	V
2	2372.320	49.3	74.0	24.7	32.4	0.0	-19.2	V
3	2390	48.3	74.0	25.7	32.5	0.0	-19.3	V
4 F	2401.960	86.9	74.0	-12.9	32.6	0.0	-19.3	V
Avg								
1	2315.130	32.2	54.0	21.8	31.8	0.0	-19.1	V
2	2372.320	32.6	54.0	21.4	32.4	0.0	-19.2	V
3	2390	32.4	54.0	21.6	32.5	0.0	-19.3	V
4 F	2401.960	70.3	54.0	-16.3	32.6	0.0	-19.3	V





GFSK

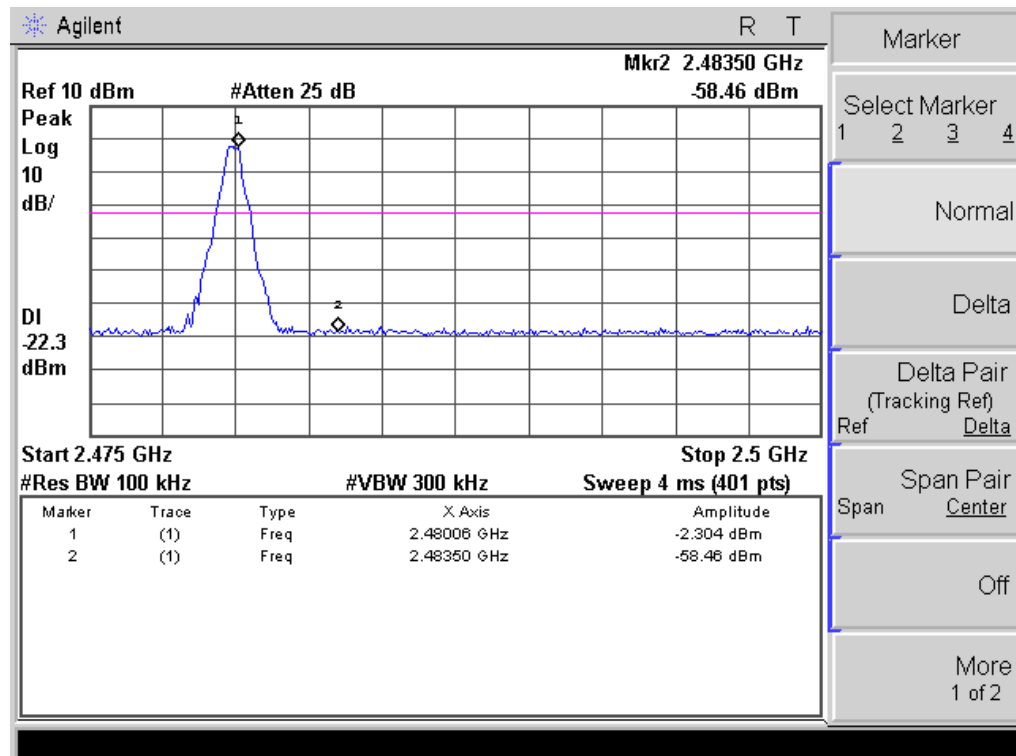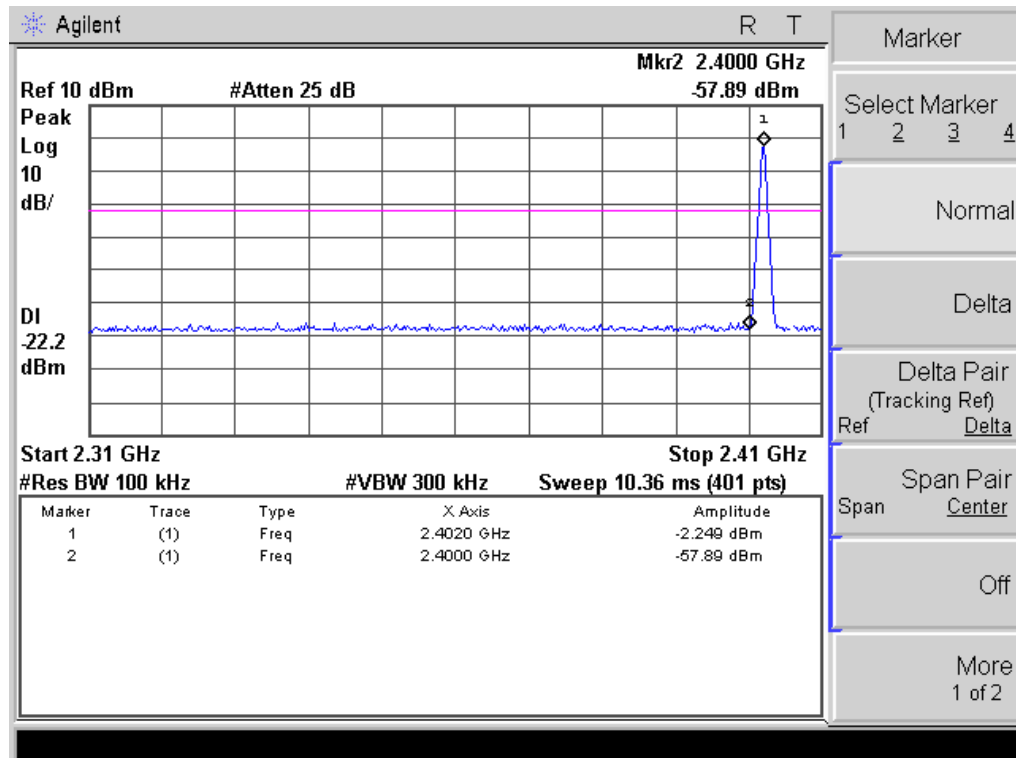



8-DPSK

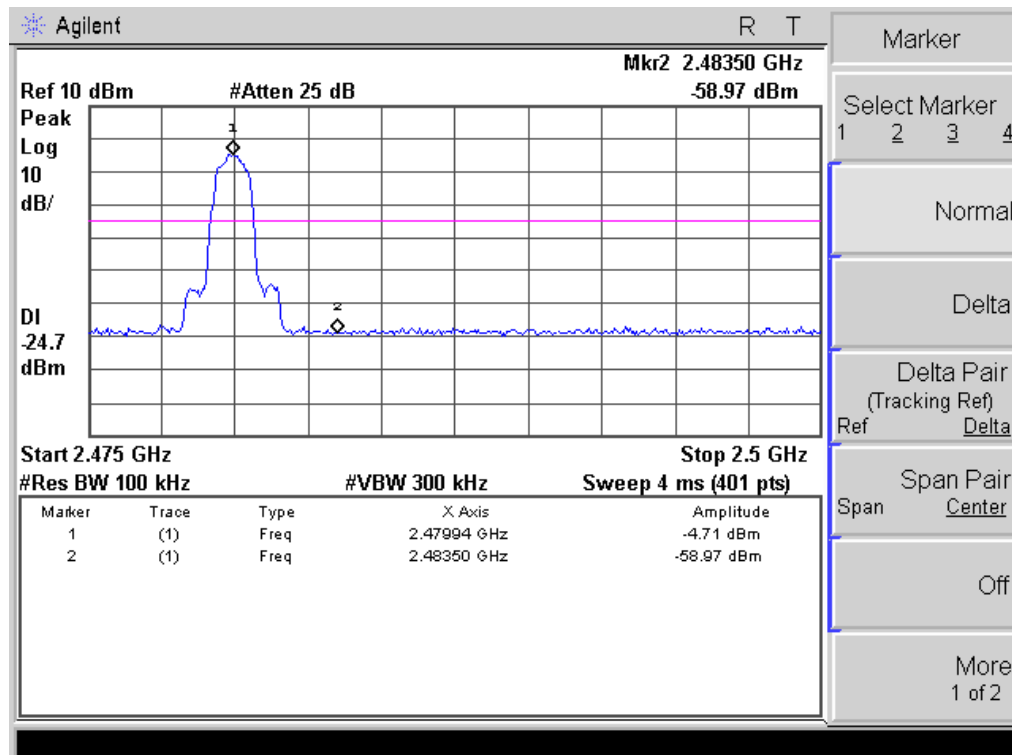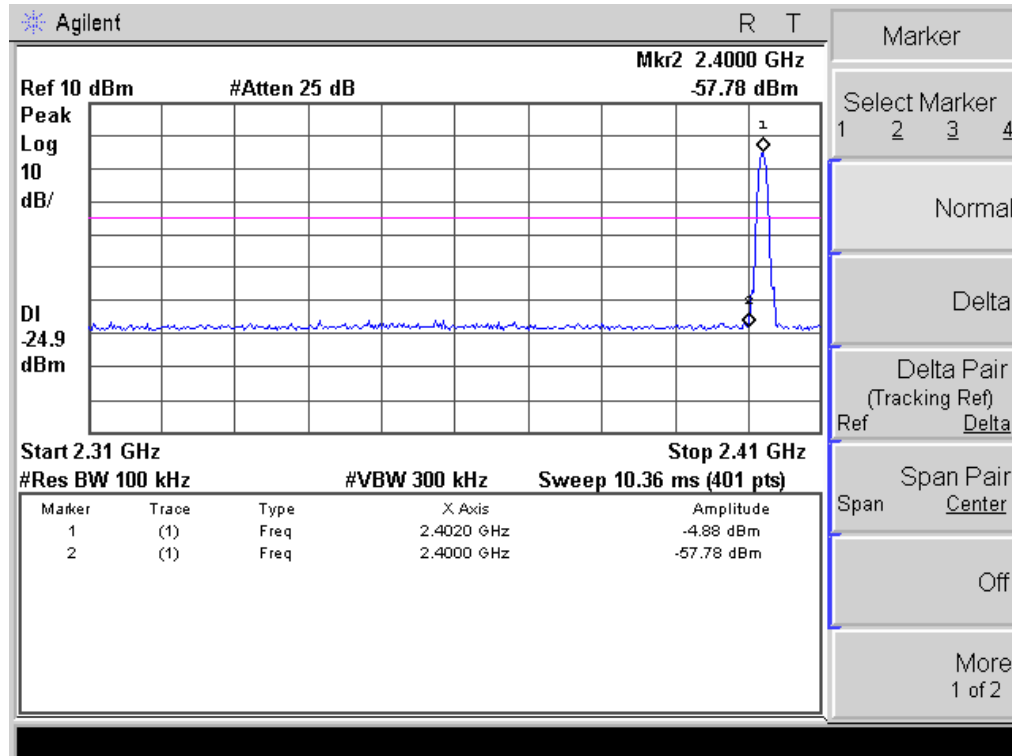



6. ANTENNA REQUIREMENT

6.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

6.2 EUT ANTENNA

The EUT antenna is PCB antenna. It complies with the standard requirement.


7. EUT TEST PHOTO

Conducted Measurement Photos





Radiated Measurement Photos

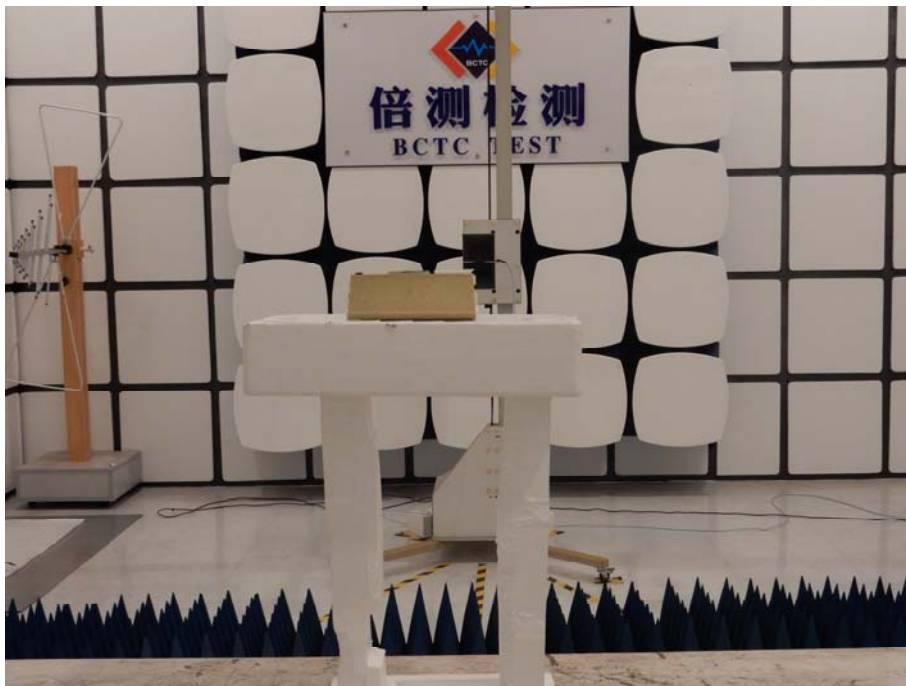

8. PHOTOS OF THE EUT

