

CFR 47 FCC Part 15.231

TEST REPORT

Product : Valve Controller



Model Number : VHS-VC100

FCC ID : 2AD4D-VC100

Prepared for

Vital Home Systems LLC

2266 Tigereye Place Carlsbad, CA 92009 United States

TEL. : (619) 788-1821

Prepared by

Interocean EMC Technology Corp.

No. 5-2, Lin 1, Tin-Fu, Lin-Kou Dist., New Taipei City,

Taiwan 244, R.O.C.

TEL.: +886 2 2600 6861

FAX.: +886 2 2600 6859

Remark:

The test report consists of **38** pages in total. It shall not be reproduced except in full, without the written approval of IETC. This document may be altered or revised by IETC only, and shall be noted in the revision section of the document.
The test result in the report is only subjected to the test sample.

Statement of Compliance

Applicant: Vital Home Systems LLC

Manufacturer: Nutek Corporation

Product: Valve Controller

Model No.: VHS-VC100

Tested Power Supply: 120Vac, 60Hz (For Adapter) ; DC 7.2V (For Battery)


Date of Final Test: May 03, 2016

Configuration of Measurements and Standards Used :

FCC Rules and Regulations Part 15 Subpart C

1. The result of the testing report relate only to the item tested.
2. The testing report shall not be reproduced expect in full, without the written approval of IETC.

Report Issued: 2016/05/30

Project Engineer: 
Elli Chang

Approved: 
Jerry Liu

Table of Contents

1	Summary of Measurement	4
2	General Information	5
2.1	Description of Equipment Under Test	5
2.2	Details of Tested Supporting System	6
2.3	Test Facility	7
3	Test Specifications	8
3.1	Test Standard	8
3.2	Test Step of EUT	8
3.3	Test Equipment	9
4	Radiated Emission Test	10
4.1	Limits	10
4.2	Calculation of Average Factor	11
4.3	Configuration of Measurement	16
4.4	Test Procedure	16
4.5	Test Result	16
5	Emission Bandwidth	20
5.1	Limits	20
5.2	Test Result	20
6	AC Power Line Conducted Emission test	22
6.1	Limits	22
6.2	Configuration of Measurement	22
6.3	Test Procedures	22
6.4	Test Result	22
7	Photographs of Test	25
7.1	Power Line Conducted Test Data	25
7.2	Radiated Emission Measurement	26
8	Photographs of EUT	28

1 Summary of Measurement

Report Clause	Test Parameter	Reference Document CFR47 Part15	Results
4	Timing requirement	§15.231(a)	Pass
4	Radiated Emission	§15.231(b), 15.209	Pass
5	Emission Bandwidth	§15.231(c)	Pass
6	AC Power Line Conducted Emission test	§15.207	Pass

2 General Information

2.1 Description of Equipment Under Test

Product	: Valve Controller
Model Number	: VHS-VC100
Applicant	: Vital Home Systems LLC 2266 Tigereye Place Carlsbad, CA 92009 United States
Manufacturer	: Nutek Corporation No.167, Lane 235, Bauchiau Rd., Shindian City, Taipei Country 23145, Taiwan
Power Supply	: 120Vac, 60Hz (For Adapter) ; DC 7.2V (For Battery)
Operating Frequency	: 433.92MHz
Type of Modulation	: ASK
Antenna Description	: This device uses Helix Antenna. The antenna is integral to the device, thereby meeting the requirement of FCC 15.203.
Measurement Software	: e3; Ver: 8.120803a7-2
Date of Test	: Apr. 12 ~ May 03, 2016
Additional Description	: 1) The Model Number " VHS-VC100 " is representative selected in the test and included in this report. 2) For more detail specification about EUT, please refer to the user's manual.

2.2 Details of Tested Supporting System

2.2.1 Adapter

Manufacturer	:	Nutek Corporation
Model Number	:	RH48-0602000DU
Input Power	:	120 Vac, 60Hz; 30W
Output Power	:	DC 6V, 2A
Power Cable	:	Non-shielded, Un-detachable, 1.9m, w/o core

2.3 Test Facility

- Site Description** : ☒ Chamber 3 ☒ Conducted 1
- Name of Firm** : Interocean EMC Technology Corp.
- Company web** : <http://www.ietc.com.tw>
- Location** : No. 5-2, Lin 1, Tin-Fu, Lin-Kou Dist., New Taipei City, Taiwan 244, R.O.C.
- Site Filing** :
- Federal Communication Commissions – USA
Registration No.: 651092 (OATS 1, 2, 3 & Chamber 3)
Designation No.: TW1020
 - Industry Canada (IC)
OUR FILE: 46405-4437
Registration No. (OATS 1): Site# 4437A-1
Registration No. (OATS 3): Site# 4437A-3
Registration No. (Chamber 3): Site# 4437A-5
Registration No. (OATS 5): Site# 4437A-6
 - Voluntary Control Council for Interference by Information Technology Equipment (VCCI) – Japan
Member No.: 1349
Registration No. (Conducted Room): C-1094
Registration No. (Conducted Room): T-1562
Registration No. (OATS 1): R-1040; G-274
- Site Accreditation** :
- Bureau of Standards and Metrology and Inspection (BSMI) – Taiwan, R.O.C.
Accreditation No.:
SL2-IN-E-0026 for CNS 13438 / CISPR 22
SL2-IN-E-0026 for CNS 14757-2 / IEC 62040-2
SL2-R1-E-0026 for CNS 13439 / CISPR 13
SL2-R2-E-0026 for CNS 13439 / CISPR 13
SL2-L1-E-0026 for CNS 14115 / CISPR 15
 - Taiwan Accreditation Foundation (TAF)
Accreditation No.: 1113
 - Vehicle Safety Certification Center (VSCC)
Approval No.: TW16-11-0
 - TÜV NORD
Certificate No: TNTW0801R-04

3 Test Specifications

3.1 Test Standard

The EUT was performed according to FCC Part 15 Subpart C Section 15.231 procedure and setup followed by ANSI C63.10, 2013 requirements.

3.2 Test Step of EUT

- 3.2.1 Setup the fixture to EUT for power supplying.
- 3.2.2 Turn on the power of all equipment.
- 3.2.3 Let the EUT continuous transmission. Executed the test.

3.3 Measured Mode

- 3.3.1 The test modes for final test are as following:
 - Mode 1: AC Mode (120Vac, 60Hz)
 - Mode 2: Battery Mode (DC 7.2V)

3.4 Test Equipment

Instrument	Manufacturer	Model	Serial No.	Next Cal. Date
Spectrum Analyzer	R&S	FSP40	100478	2016/06/03
EMI Test Spectrum Analyzer & Receiver	Rohde & Schwarz	ESI7	830154/002	2016/09/24
Preamplifier	Burgeon	BPA-530	100216	2016/06/30
Preamplifier	Schaffner	CAP9231A	3351	2016/08/25
Preamplifier	Mini-Circuits	ZVA-213-S+	491801136	2016/08/25
Preamplifier	EMCI	EMC 051845	980110	2016/10/20
Preamplifier	Agilent	83050A	3950M00225	2016/09/21
Bilog Antenna	Schwarzbeck	VULB 9163	113	2016/07/26
Horn Antenna	Schwarzbeck	BBHA 9120	9120D-583	2016/09/29
Horn Antenna	Schwarzbeck	BBHA 9170	213	2016/07/19
RF Cable	HARBOUR	27478LL142	CBL22	2017/03/22
RF Cable	Jye Bao	A30N30-5005	CBL51	2017/03/22
RF Cable	Jye Bao	N30N30-5006	CBL53	2017/03/29
RF Cable	HARBOUR	27478LL142	CBL65	2017/03/22
EMI Test Receiver	Rohde & Schwarz	ESCS 30	100127	2016/10/25
RF Cable	HARBOUR	RG58/U	CBL48	2016/07/27
L.I.S.N.	Schwarzbeck	NNLK8121	8121417	2017/03/20
L.I.S.N.	Schaffner	MN2050D	1598	2016/08/27

Note: The above equipments are within the valid calibration period.

4 Radiated Emission Test

4.1 Limits

According to FCC 15.231(b) requirement:

In addition to the provisions of §15.205, the field strength of emissions from intentional radiator operated under this section shall not exceed the following:

Fundamental and Harmonics Emission Limits

Frequency (MHz)	Field Strength of Fundamental		Field Strength of Harmonics	
	(μ V/m@3m)	(dB μ V/m@3m)	(μ V/m@3m)	(dB μ V/m@3m)
433.92	10996	80.8	1099.6	60.8

General Radiated Emission Limit

Spurious Emission tested through until 10th harmonic. Radiated emissions, which fall in the restricted bands, as defined in §15.205 (a), comply with the radiated emission limits specified in §15.209 (a).

Frequency (MHz)	15.209 Limits	
	(μ V/m@3m)	(dB μ V/m@3m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Remark :

1. The table above tighter limit applies at the band edges.
2. The measurement distance in meters, which that between form closest point of EUT to instrument antenna.

4.2 Calculation of Average Factor

The output field strengths of specification in accordance with the FCC rules specify measurements with an average detector. During the test, a spectrum analyzer incorporating a peak detector was used. Therefore, a reduction factor can be applied to the resultant peak signal level and compared to the limit for measurement instrumentation incorporating an average detector.

The duty cycle is measured in 100 ms or the repetition cycle period, whichever is a shorter time frame. The duty cycle is measured by placing the spectrum analyzer to set zero span at 100kHz resolution bandwidth.

Averaging factor in dB = $20 \log (\text{duty cycle})$

The duration of one cycle = 108.82ms


The duty cycle is simply the on-time divided by 100ms

Duty Cycle = $(1.04\text{ms} \times 2 + 0.23\text{ms} \times 58) / 100\text{ms} = 15.42 \text{ ms} / 100\text{ms}$


Therefore, the averaging factor is found by $20 \log 0.1542 = -16.24 \text{ dB}$

Please see the diagrams below.

Duty Cycle

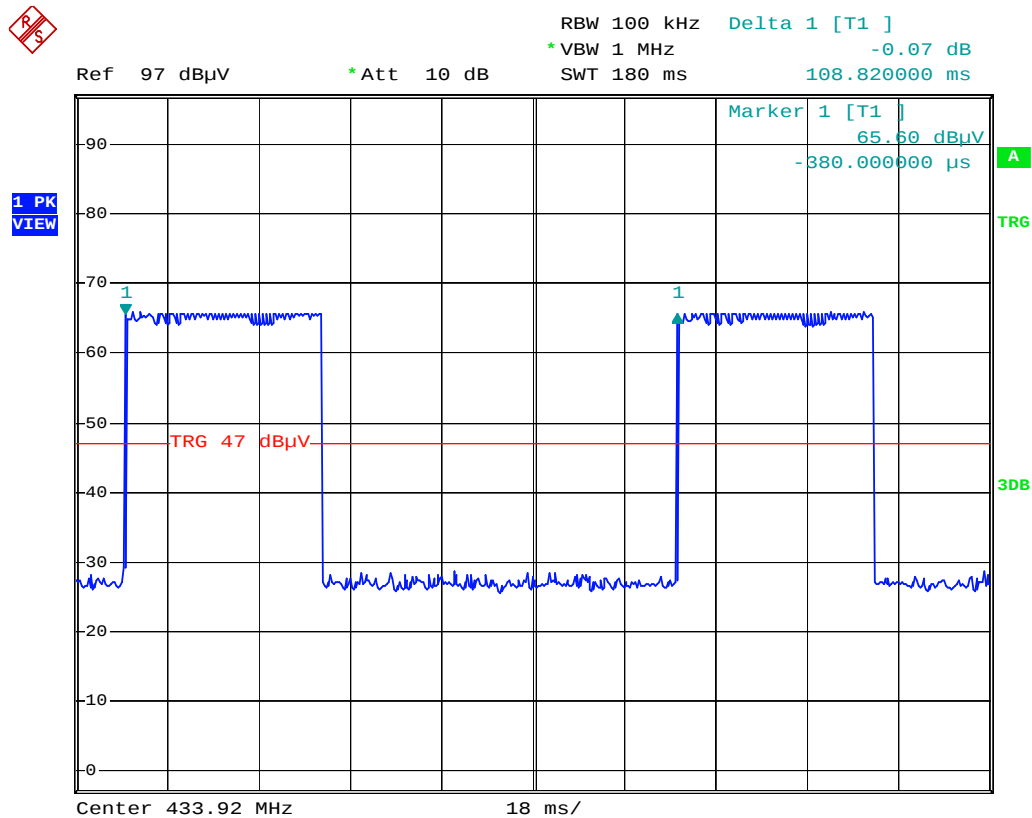




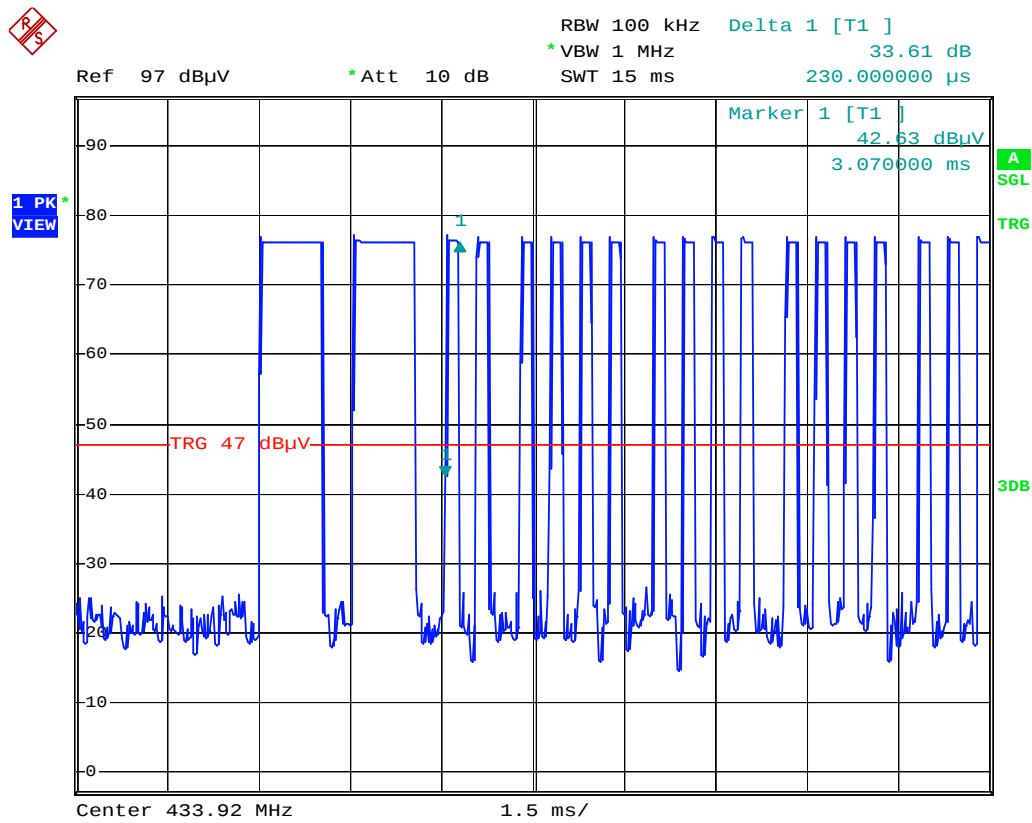

Time Slot 2


The EUT complies with FCC 15.231 (a)(2) requirement :

A transmitter activated automatically shall cease transmission within 5 seconds after activation.

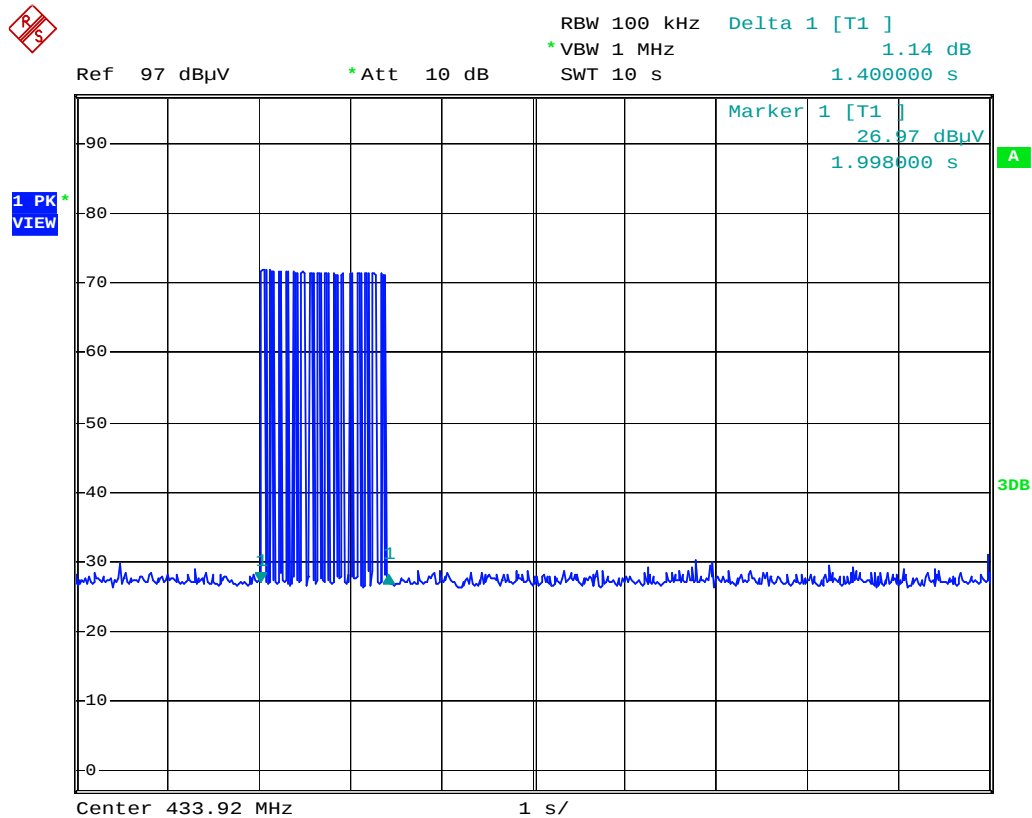


4.3 Configuration of Measurement

Measurement Frequency under 1GHz

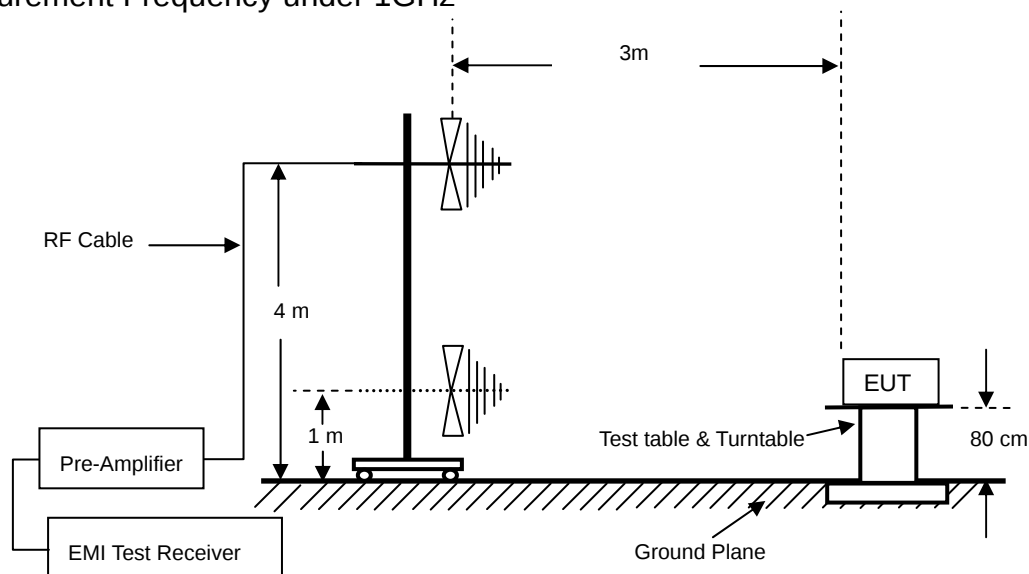

Measurement Frequency above 1GHz

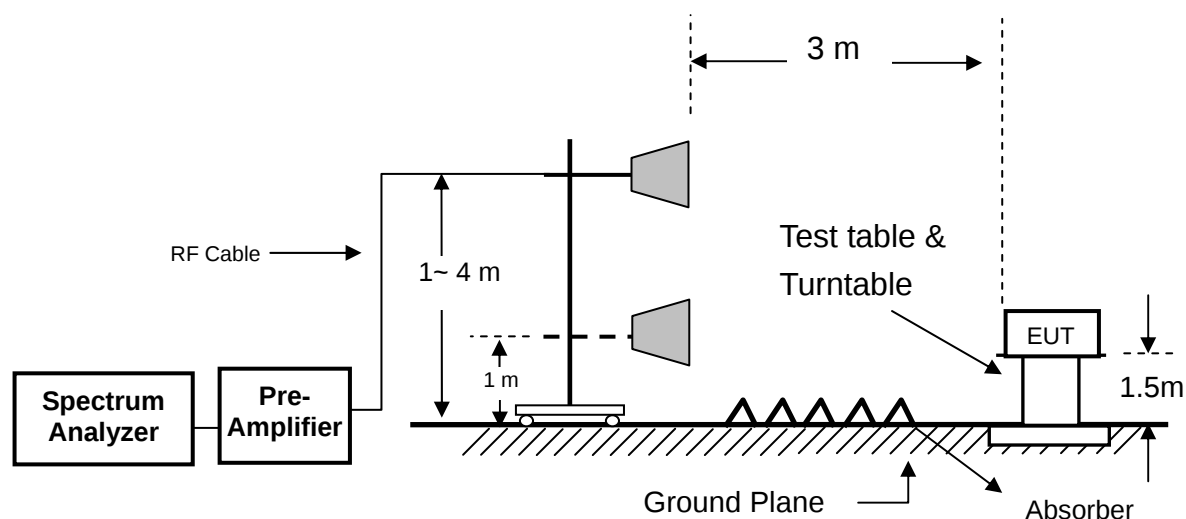

4.4 Test Procedure

Radiated emission measurements frequency range were performed from 30MHz to 5GHz. Spectrum Analyzer Resolution Bandwidth set to 100kHz or greater for frequencies from 30MHz to 1GHz, and set 1MHz Resolution Bandwidth for frequencies above 1GHz.

The EUT is place on non-conductive turntable for the test. If peripheral devices apply to the EUT, the peripheral devices will be connected to EUT and whole system. During the emission test, the signal is maximized through rotation and all cables were present worst-case emissions. The height of antenna and polarization is constantly changed for exploring maximum signal reading. The height of antenna can be up form reference ground to 4 meter and down to 1 meter.

4.5 Test Result

PASS.

The final test emission data is shown as following tables.

Radiated Emission Below 1GHz (Worse Case Mode 1)

Frequency	Antenna	Reading	Preamp	Correction Factor	Corrected Level	Limits	Margin	Det
(MHz)	Polarization	(dBUV)	(dB)	(dB/m)	(dBUV/m)	(dBUV/m)	(dB)	Mode
85.29	H	37.65	31.55	10.50	16.60	40.00	-23.40	PK
198.37	H	46.27	31.23	12.89	27.93	46.50	-18.57	PK
263.70	H	42.05	31.22	14.80	25.63	46.00	-20.37	PK
307.80	H	38.17	31.23	16.19	23.13	46.00	-22.87	PK
403.98	H	36.81	31.33	18.84	24.32	46.00	-21.68	PK
480.30	H	38.50	31.31	20.53	27.72	46.00	-18.28	PK
135.96	V	45.35	31.39	10.01	23.97	43.50	-19.53	PK
198.39	V	41.86	31.23	12.89	23.52	43.50	-19.98	PK
273.18	V	44.05	31.22	15.29	28.12	46.00	-17.88	PK
369.80	V	38.09	31.30	18.27	25.06	46.00	-20.94	PK
463.32	V	39.37	31.31	20.08	28.14	46.00	-17.86	PK
519.60	V	37.71	31.31	21.23	27.63	46.00	-18.37	PK

Remark : Corrected Level = Reading + Correction Factor – Preamp
Correction Factor = Antenna Factor + Cable Loss

Fundamental and Harmonics emission_Mode 1

Freq.	Antenna	Reading	Preamp	Correction Factor	Average Factor	Corrected Level	Limits	Margin	Det
(MHz)	Polarization	(dBuV)	(dB)	(dB/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	Mode
433.92	H	74.42		19.44	--	93.86	100.8	-6.94	PK
433.92	H	74.42	0.00	19.44	-16.24	77.62	80.8	-3.18	AV
867.84	H	53.75	31.27	26.26	--	48.74	80.8	-32.06	PK
867.84	H	53.75	31.27	26.26	-16.24	32.50	60.8	-28.30	AV
1301.76	H	76.40	50.92	30.59	--	56.07	74.0	-17.93	PK
1301.76	H	76.40	50.92	30.59	-16.24	39.83	54.0	-14.17	AV
1735.68	H	75.93	50.95	32.16	--	57.14	80.8	-23.66	PK
1735.68	H	75.93	50.95	32.16	-16.24	40.90	60.8	-19.90	AV
2169.60	H	77.79	50.93	33.46	--	60.32	80.8	-20.48	PK
2169.60	H	77.79	50.93	33.46	-16.24	44.08	60.8	-16.72	AV
2603.52	H	79.20	51.02	34.76	--	62.94	80.8	-17.86	PK
2603.52	H	79.20	51.02	34.76	-16.24	46.70	60.8	-14.10	AV
3037.44	H	79.15	51.11	36.12	--	64.16	80.8	-16.64	PK
3037.44	H	79.15	51.11	36.12	-16.24	47.92	60.8	-12.88	AV
3471.36	H	84.65	51.29	36.68	--	70.04	80.8	-10.76	PK
3471.36	H	84.65	51.29	36.68	-16.24	53.80	60.8	-7.00	AV
3905.28	H	78.67	51.38	38.00	--	65.29	74.0	-8.71	PK
3905.28	H	78.67	51.38	38.00	-16.24	49.05	54.0	-4.95	AV
4339.20	H	66.60	51.54	39.45	--	54.51	74.0	-19.49	PK
4339.20	H	66.60	51.54	39.45	-16.24	38.27	54.0	-15.73	AV
433.92	V	70.18	0.00	19.44	--	89.62	100.8	-11.18	PK
433.92	V	70.18	0.00	19.44	-16.24	73.38	80.8	-7.42	AV
867.84	V	48.85	31.27	26.26	--	43.84	80.8	-36.96	PK
867.84	V	48.85	31.27	26.26	-16.24	27.60	60.8	-33.20	AV
1301.76	V	70.89	50.92	30.59	--	50.56	74.0	-23.44	PK
1301.76	V	70.89	50.92	30.59	-16.24	34.32	54.0	-19.68	AV
1735.68	V	71.08	50.95	32.16	--	52.29	80.8	-28.51	PK
1735.68	V	71.08	50.95	32.16	-16.24	36.05	60.8	-24.75	AV
2169.60	V	71.93	50.93	33.46	--	54.46	80.8	-26.34	PK
2169.60	V	71.93	50.93	33.46	-16.24	38.22	60.8	-22.58	AV
2603.52	V	77.00	51.02	34.76	--	60.74	80.8	-20.06	PK
2603.52	V	77.00	51.02	34.76	-16.24	44.50	60.8	-16.30	AV
3037.44	V	79.10	51.11	36.12	--	64.11	80.8	-16.69	PK
3037.44	V	79.10	51.11	36.12	-16.24	47.87	60.8	-12.93	AV
3471.36	V	81.02	51.29	36.68	--	66.41	80.8	-14.39	PK
3471.36	V	81.02	51.29	36.68	-16.24	50.17	60.8	-10.63	AV
3905.28	V	72.71	51.38	38.00	--	59.33	74.0	-14.67	PK
3905.28	V	72.71	51.38	38.00	-16.24	43.09	54.0	-10.91	AV
4339.20	V	67.03	51.54	39.45	--	54.94	74.0	-19.06	PK
4339.20	V	67.03	51.54	39.45	-16.24	38.70	54.0	-15.30	AV

Fundamental and Harmonics emission_Mode 2

Freq.	Antenna	Reading	Preamp	Correction Factor	Average Factor	Corrected Level	Limits	Margin	Det
(MHz)	Polarization	(dBuV)	(dB)	(dB/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	Mode
433.92	H	73.36	0.00	19.44	--	92.80	100.8	-8.00	PK
433.92	H	73.36	0.00	19.44	-16.24	76.56	80.8	-4.24	AV
867.84	H	53.62	31.27	26.26	--	48.61	80.8	-32.19	PK
867.84	H	53.62	31.27	26.26	-16.24	32.37	60.8	-28.43	AV
1301.76	H	76.73	50.92	30.59	--	56.40	74.0	-17.60	PK
1301.76	H	76.73	50.92	30.59	-16.24	40.16	54.0	-13.84	AV
1735.68	H	76.00	50.95	32.16	--	57.21	80.8	-23.59	PK
1735.68	H	76.00	50.95	32.16	-16.24	40.97	60.8	-19.83	AV
2169.60	H	77.01	50.93	33.46	--	59.54	80.8	-21.26	PK
2169.60	H	77.01	50.93	33.46	-16.24	43.30	60.8	-17.50	AV
2603.52	H	79.46	51.02	34.76	--	63.20	80.8	-17.60	PK
2603.52	H	79.46	51.02	34.76	-16.24	46.96	60.8	-13.84	AV
3037.44	H	79.22	51.11	36.12	--	64.23	80.8	-16.57	PK
3037.44	H	79.22	51.11	36.12	-16.24	47.99	60.8	-12.81	AV
3471.36	H	84.14	51.29	36.68	--	69.53	80.8	-11.27	PK
3471.36	H	84.14	51.29	36.68	-16.24	53.29	60.8	-7.51	AV
3905.28	H	79.34	51.38	38.00	--	65.96	74.0	-8.04	PK
3905.28	H	79.34	51.38	38.00	-16.24	49.72	54.0	-4.28	AV
4339.20	H	67.30	51.54	39.45	--	55.21	74.0	-18.79	PK
4339.20	H	67.30	51.54	39.45	-16.24	38.97	54.0	-15.03	AV
433.92	V	68.74	0.00	19.44	--	88.18	100.8	-12.62	PK
433.92	V	68.74	0.00	19.44	-16.24	71.94	80.8	-8.86	AV
867.84	V	48.70	31.27	26.26	--	43.69	80.8	-37.11	PK
867.84	V	48.70	31.27	26.26	-16.24	27.45	60.8	-33.35	AV
1301.76	V	71.80	50.92	30.59	--	51.47	74.0	-22.53	PK
1301.76	V	71.80	50.92	30.59	-16.24	35.23	54.0	-18.77	AV
1735.68	V	71.76	50.95	32.16	--	52.97	80.8	-27.83	PK
1735.68	V	71.76	50.95	32.16	-16.24	36.73	60.8	-24.07	AV
2169.60	V	71.73	50.93	33.46	--	54.26	80.8	-26.54	PK
2169.60	V	71.73	50.93	33.46	-16.24	38.02	60.8	-22.78	AV
2603.52	V	75.91	51.02	34.76	--	59.65	80.8	-21.15	PK
2603.52	V	75.91	51.02	34.76	-16.24	43.41	60.8	-17.39	AV
3037.44	V	80.73	51.11	36.12	--	65.74	80.8	-15.06	PK
3037.44	V	80.73	51.11	36.12	-16.24	49.50	60.8	-11.30	AV
3471.36	V	80.51	51.29	36.68	--	65.90	80.8	-14.90	PK
3471.36	V	80.51	51.29	36.68	-16.24	49.66	60.8	-11.14	AV
3905.28	V	74.20	51.38	38.00	--	60.82	74.0	-13.18	PK
3905.28	V	74.20	51.38	38.00	-16.24	44.58	54.0	-9.42	AV
4339.20	V	66.40	51.54	39.45	--	54.31	74.0	-19.69	PK
4339.20	V	66.40	51.54	39.45	-16.24	38.07	54.0	-15.93	AV

Remark : Corrected Level = Reading + Correction Factor – Preamp

Correction Factor = Antenna Factor + Cable Loss

“ * ” Mark indicated Background Noise Level

5 Emission Bandwidth

5.1 Limits

According to FCC 15.231(c) requirement:

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating between 70 MHz to 900 MHz. Those devices operating above 900 MHz, the emission spurious shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.


B.W (20dBc) Limit = $0.25\% * f(\text{MHz}) = 0.25\% * 433.92\text{MHz} = 1084.8\text{kHz}$

5.2 Test Result

PASS.

The final test data is shown as following.

Channel Frequency (MHz)	Measured 20dB Bandwidth (kHz)	Limit (kHz)	Result
433.92	58.8	1084.8	PASS

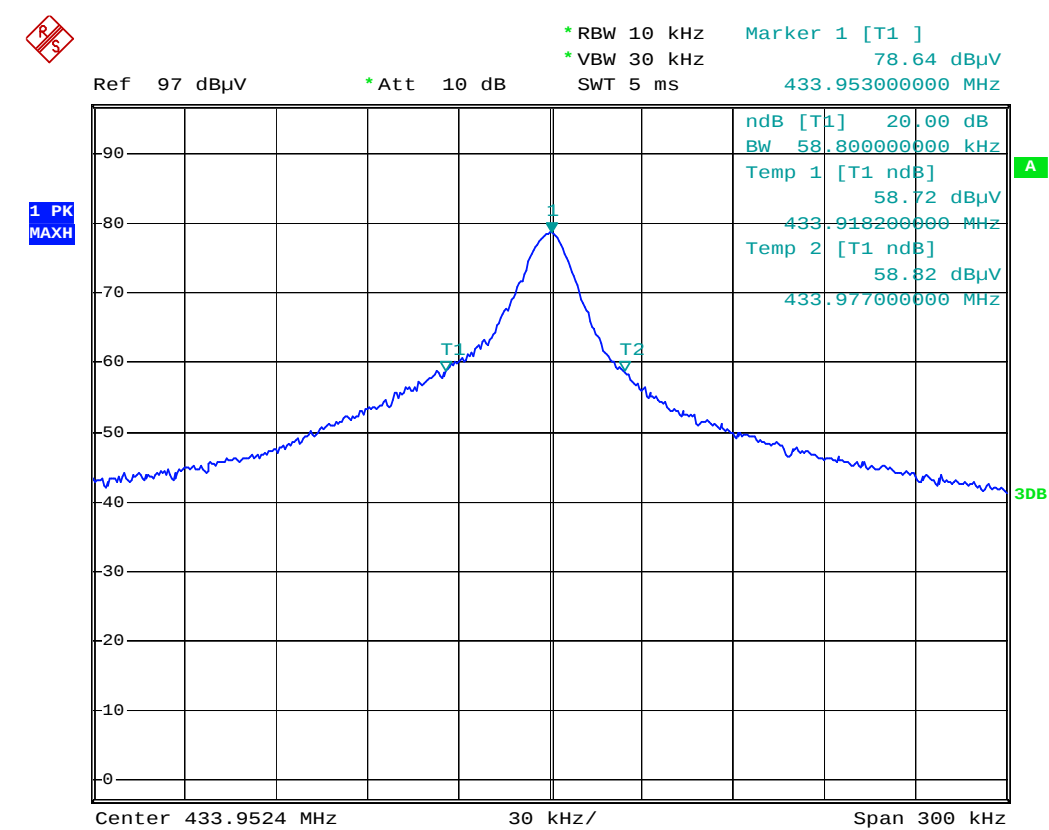


6 AC Power Line Conducted Emission test

6.1 Limits

Frequency (MHz)	Quasi-Peak (dB μ V)	Average (dB μ V)
0.15 to 0.5	66 to 56	56 to 46
> 0.5 to 5	56	46
> 5 to 30	60	50

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 30 MHz.

6.2 Configuration of Measurement

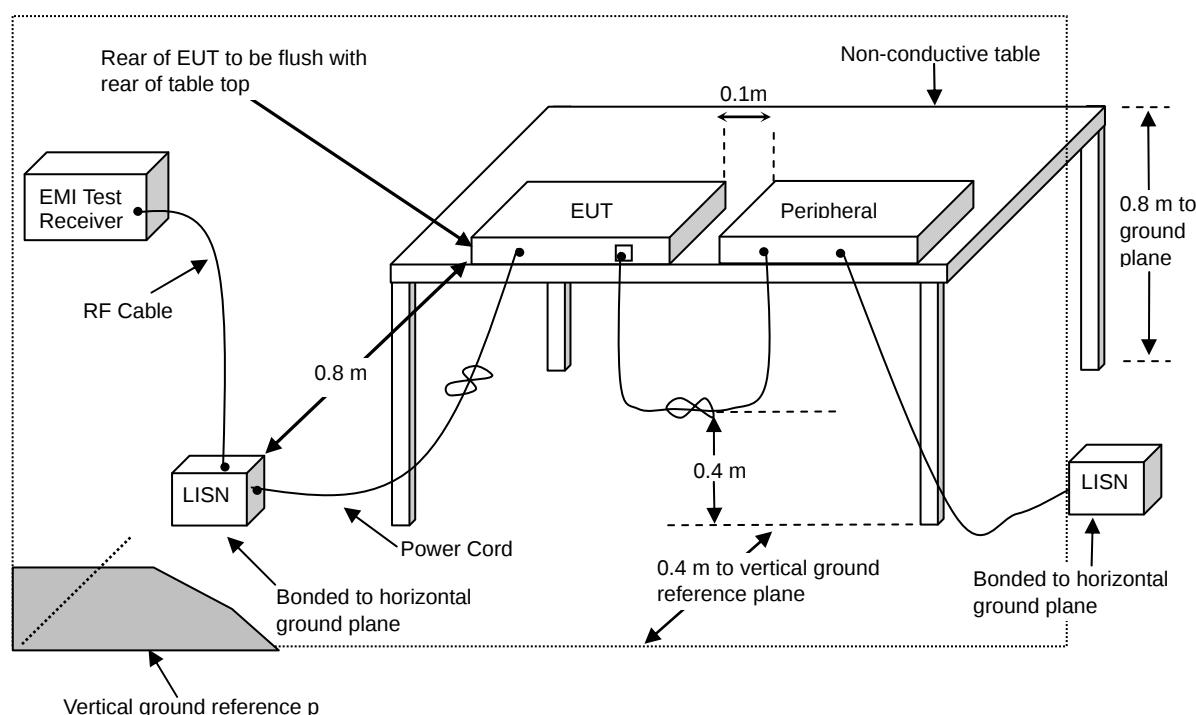

6.3 Test Procedures

The EUT was setup to ANSI C63.10, 2013; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

- 1) The EUT was placed 80cm height above ground on a non-conductive table and vertical conducting plane located 40cm to the rear of the EUT.
- 2) The EUT was connected to the main power through Line Impedance Stabilization Networks (LISN). This setup provided a 50ohm/50mH coupling impedance for the measuring equipment. The auxiliary equipment will place in secondary LISN.
- 3) Both sides (Line and Neutral) of AC line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10, 2013 on conducted measurement.

6.4 Test Result

PASS.

The final test data is shown as following pages.


Power Line Conducted Test Data

CLIENT: Vital Home Systems LLC
EUT: Valve Controller
MODEL: VHS-VC100
RATING: 120Vac, 60Hz (For Adapter)
COMMENT: working mode

OPERATOR: Elli
TEST SITE: Conducted 1
POLARIZATION: Line
TEMP/HUM: 23.3°C / 60%

Data:4

2016-04-13

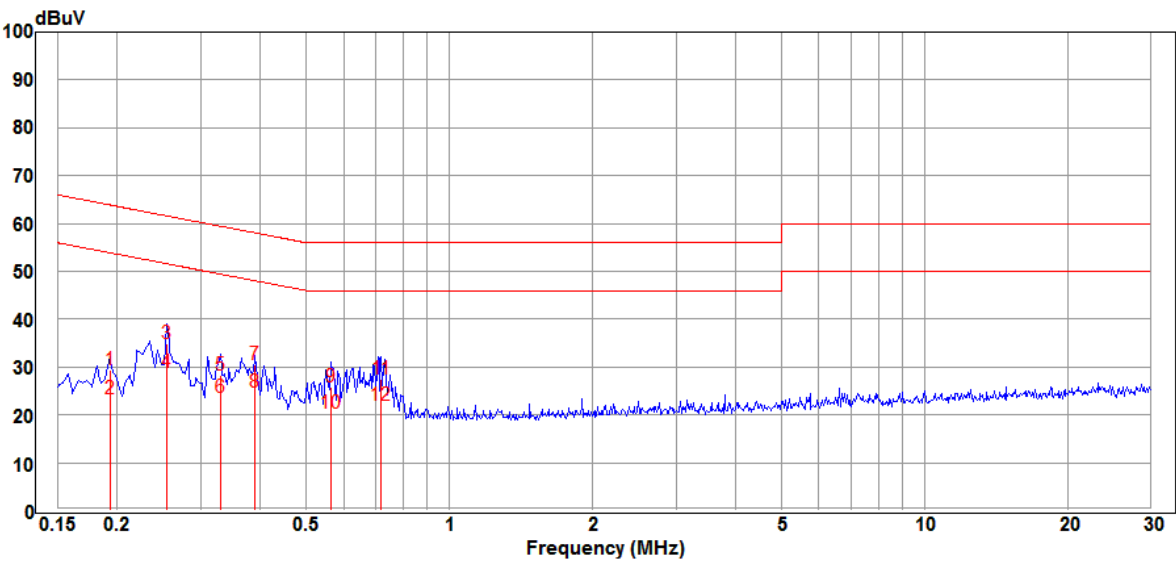

Item Mark	Freq. MHz	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Margin dB	Remark
1	0.193	29.21	0.26	29.47	63.89	-34.42	QP
2	0.193	23.00	0.26	23.26	53.89	-30.63	Average
3	0.255	34.66	0.26	34.92	61.60	-26.68	QP
4	0.255	28.73	0.26	28.99	51.60	-22.61	Average
5	0.330	28.01	0.26	28.27	59.44	-31.17	QP
6	0.330	23.45	0.26	23.71	49.44	-25.73	Average
7	0.391	30.13	0.26	30.39	58.03	-27.64	QP
8	0.391	24.40	0.26	24.66	48.03	-23.37	Average
9	0.564	25.65	0.26	25.91	56.00	-30.09	QP
10	0.564	20.13	0.26	20.39	46.00	-25.61	Average
11	0.720	27.20	0.27	27.47	56.00	-28.53	QP
12	0.720	21.67	0.27	21.94	46.00	-24.06	Average


Power Line Conducted Test Data

CLIENT: Vital Home Systems LLC
EUT: Valve Controller
MODEL: VHS-VC100
RATING: 120Vac, 60Hz (For Adapter)
COMMENT: working mode

OPERATOR: Elli
TEST SITE: Conducted 1
POLARIZATION: Neutral
TEMP/HUM: 23.3°C / 60%

Data:5

2016-04-13

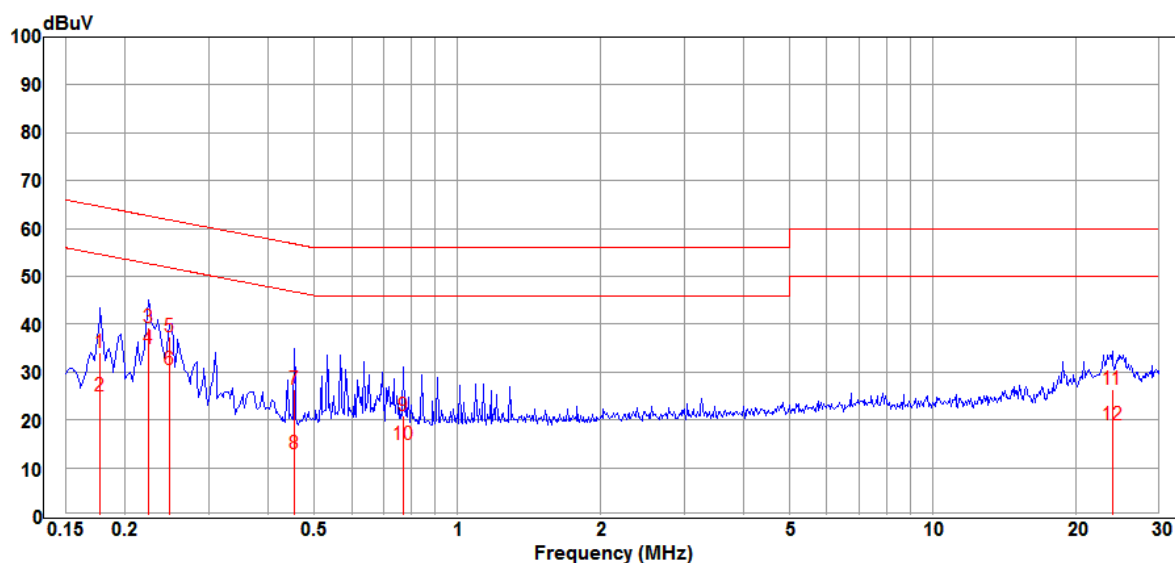

Item Mark	Freq. MHz	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Margin dB	Remark
1	0.178	33.85	0.24	34.09	64.59	-30.50	QP
2	0.178	24.82	0.24	25.06	54.59	-29.53	Average
3	0.224	38.96	0.24	39.20	62.66	-23.46	QP
4	0.224	34.76	0.24	35.00	52.66	-17.66	Average
5	0.248	37.17	0.24	37.41	61.82	-24.41	QP
6	0.248	30.24	0.24	30.48	51.82	-21.34	Average
7	0.454	26.01	0.25	26.26	56.80	-30.54	QP
8	0.454	12.77	0.25	13.02	46.80	-33.78	Average
9	0.771	20.69	0.26	20.95	56.00	-35.05	QP
10	0.771	14.51	0.26	14.77	46.00	-31.23	Average
11	23.888	25.19	1.27	26.46	60.00	-33.54	QP
12	23.888	17.83	1.27	19.10	50.00	-30.90	Average