

TEST REPORT

Reference No...... : WTD25D11297914W004
FCC ID : 2AD6G-R22
Applicant..... : Rongta Technology (Xiamen) Group Co., Ltd.
Address..... : No.88, Tonghui South Road, Tongan, Xiamen City, China
Manufacturer : Rongta Technology (Xiamen) Group Co., Ltd.
Address..... : No.88, Tonghui South Road, Tongan, Xiamen City, China
Product..... : Smart Label Printer
Model(s) : R22, R22A, R22B, R22C, R22D, R22E, R22F, R22G, R22H, R22I, R22J, R22K, R22L, R22M, R22N, R22O, R22P, R22Q, R22R, R22S, R22T, R22U, R22V, R22W, R22X, R22Y, R22Z, R1, R2, R5, P5Pro, R22Pro, R22L, R22D, R23, R23L, R23D, R22L, R22D, R23, R23L, R23D, R23H, R****(*=0-9 or A-Z or blank), R2****(*=0-9 or A-Z or blank)
Standards..... : FCC Part 15.225
Date of Receipt Sample : 2025-11-18
Date of Test : 2025-11-21 to 2025-12-22
Date of Issue..... : 2025-12-24
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Testing Group Co., Ltd.

Address: No. 77, Houjie Section, Guantai Road, Houjie Town, Dongguan City, Guangdong, China

Tel: +86-769-2267 6998

Fax: +86-769-2267 6828

Compiled by:

Approved by:

Estel Qian

Estel Qian / Project Engineer



Deval Qin / Designated Reviewer

2 Contents

	Page
1 COVER PAGE	1
2 CONTENTS	2
3 REVISION HISTORY	3
4 GENERAL INFORMATION	4
4.1 GENERAL DESCRIPTION OF E.U.T	4
4.2 DETAILS OF ACCESSORIES	4
4.3 TEST MODE	4
4.4 TEST FACILITY	5
5 TEST SUMMARY	6
6 EQUIPMENT USED DURING TEST	7
6.1 EQUIPMENTS LIST	7
6.2 DESCRIPTION OF SUPPORT UNITS	7
6.3 MEASUREMENT UNCERTAINTY	8
6.4 TEST EQUIPMENT CALIBRATION	8
7 CONDUCTED EMISSION	9
7.1 EUT OPERATION	9
7.2 EUT SETUP	9
7.3 MEASUREMENT DESCRIPTION	9
7.4 CONDUCTED EMISSION TEST RESULT	10
8 RADIATED SPURIOUS EMISSIONS	12
8.1 EUT OPERATION	13
8.2 TEST SETUP	13
8.3 SPECTRUM ANALYZER SETUP	14
8.4 TEST PROCEDURE	14
8.5 CORRECTED AMPLITUDE & MARGIN CALCULATION	15
8.6 SUMMARY OF TEST RESULTS	16
9 FREQUENCY TOLERANCE	27
9.1 LIMIT	27
9.2 TEST PROCEDURE	27
9.3 TEST RESULT	27
10 BANDWIDTH MEASUREMENT	28
10.1 LIMIT	28
10.2 TEST PROCEDURE	28
10.3 TEST RESULT PLOT:	29
11 ANTENNA REQUIREMENT	30
12 PHOTOGRAPHS OF TEST SETUP AND EUT	30

3 Revision History

Test Report No.	Date of Receipt Sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTD25D11297914W004	2025-11-18	2025-11-21 to 2025-12-22	2025-12-24	Original	-	Valid

4 General Information

4.1 General Description of E.U.T

Product:	Smart Label Printer
Model(s):	R22, R22A, R22B, R22C, R22D, R22E, R22F, R22G, R22H, R22I, R22J, R22K, R22L, R22M, R22N, R22O, R22P, R22Q, R22R, R22S, R22T, R22U, R22V, R22W, R22X, R22Y, R22Z, R1, R2, R5, P5Pro, R22Pro, R22L, R22D, R23, R23L, R23D, R22L, R22D, R23, R23L, R23D, R23H, R****(*=0-9 or A-Z or blank), R2****(*=0-9 or A-Z or blank)
Model Description:	Only the model name, appearance color and screen printing of the shell are different. The model R22 was tested in this report.
Test Sample No.:	1-1/1
Hardware Version:	R22_MB_YC_BU_V*****(*=0-9, A-Z.a-z, “.” “_”)
Software Version:	V*****(*=0-9, A-Z.a-z, “.” “_”)

4.2 Details of accessories

Operation Frequency:	13.56MHz
Transmitted Power:	64.22dBuV/m @3m distance
Type of Modulation:	ASK
Antenna installation:	FPC Antenna
Antenna gain:	0dBi

Note:

#: The antenna gain is provided by the applicant, and the applicant should be responsible for its authenticity, WALTEK lab has not verified the authenticity of its information.

Ratings:	Input: 5V== 1A
Battery:	DC 3.7V 1500mAh

4.3 Test Mode

Test Mode	Descriptions
Transmitting mode	Keep the EUT in transmitting mode (NFC mode) with modulation.

4.4 Test Facility

The test facility has a test site registered with the following organizations:

ISED CAB identifier: CN0013. Test Firm Registration No.: 7760A.

Waltek Testing Group Co., Ltd. Has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files.

Registration number 7760A, October 15, 2016.

FCC Designation No.: CN1201. Test Firm Registration No.: 523476.

Waltek Testing Group Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration number 523476, September 10, 2019.

5 Test Summary

Test Items	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2020	PASS
Radiated Emission	47 CFR Part 15 Subpart C Section 15.209; 15.225(a)(b)(c)(d)	ANSI C63.10-2020	PASS
Frequency Tolerance	47 CFR Part 15 Subpart C Section 15.225(e)	ANSI C63.10-2020	PASS
Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.215	ANSI C63.10-2020	PASS
Antenna requirement	47 CFR Part 15 Subpart C Section 15.203	ANSI C63.10-2020	PASS
Note: Pass=Compliance; NC=Not Compliance; NT=Not Tested; N/A=Not Applicable			

6 Equipment Used during Test

6.1 Equipments List

Conducted Emissions Test Site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	EMI Test Receiver	R&S	ESCI	100947	2025-07-04	2026-07-03
2	LISN	R&S	ENV216	100115	2025-06-03	2026-06-02
3	Cable	Top	TYPE16(3.5M)	-	2025-06-03	2026-06-02
3m Semi-anechoic Chamber for Radiation Emissions Test site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	2025-04-19	2026-04-18
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	2025-07-05	2026-07-04
3	Active Loop Antenna	Com-Power	AL-130R	10160007	2025-04-21	2026-04-20
4	Amplifier	ANRITSU	MH648A	M43381	2025-04-19	2026-04-18
5	Cable	HUBER+SUHNER	CBL2	525178	2025-04-19	2026-04-18
RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	Signal Analyzer (9k~26.5GHz)	Agilent	N9010A	MY50520207	2025-04-19	2026-04-18
2	Spectrum Analyzer	R&S	FSP40	100501	2025-04-19	2026-04-18

6.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
/	/	/	/

6.3 Measurement Uncertainty

Parameter	Uncertainty
Conducted Emission	± 3.64 dB(AC mains 150KHz~30MHz)
Radiated Spurious Emissions	± 5.08 dB (Bilog antenna 30M~1000MHz)
	± 5.47 dB (Horn antenna 1000M~25000MHz)
Radio Frequency	$\pm 1 \times 10^{-7}$ Hz
RF Power	± 0.42 dB
RF Power Density	± 0.7 dB
Conducted Spurious Emissions	± 2.76 dB (9kHz~26500MHz)
Confidence interval: 95%. Confidence factor:k=2	

6.4 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

7 Conducted Emission

Test Requirement: FCC CFR 47 Part 15 Section 15.207

Test Method: ANSI C63.10-2020

Test Result: PASS

Frequency Range: 150kHz to 30MHz

Limit:

Frequency (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.5 to 5	56	4
5 to 30	60	50

*Decreases with the logarithm of the frequency.

7.1 EUT Operation

Operating Environment:

Temperature: 24.7°C

Humidity: 30.3%RH


Atmospheric Pressure: 101.4kPa

EUT Operation:

Only the worst-case transmitting mode was record in the report.

7.2 EUT Setup

The EUT was placed on the test table in shielding room.

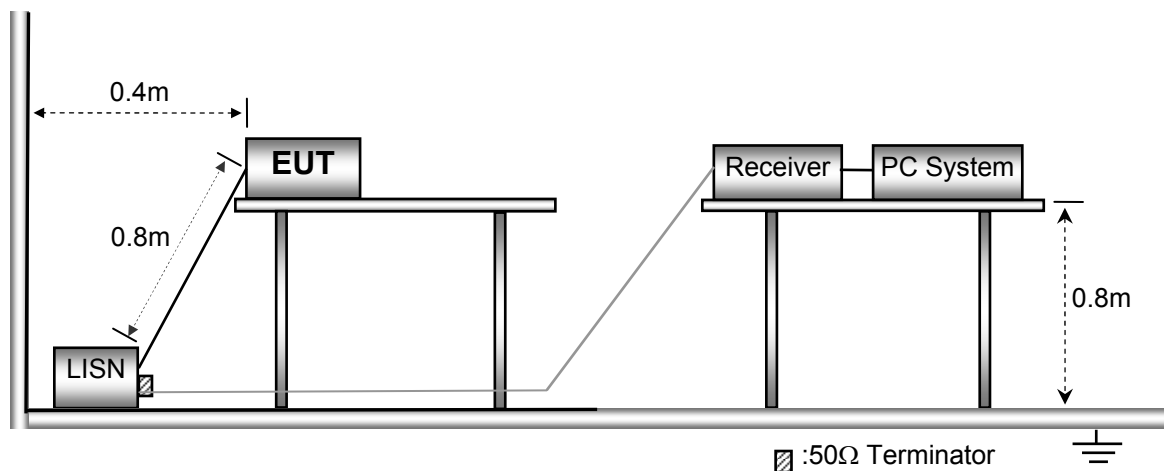


7.3 Measurement Description


The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

7.4 Conducted Emission Test Result

Live line:

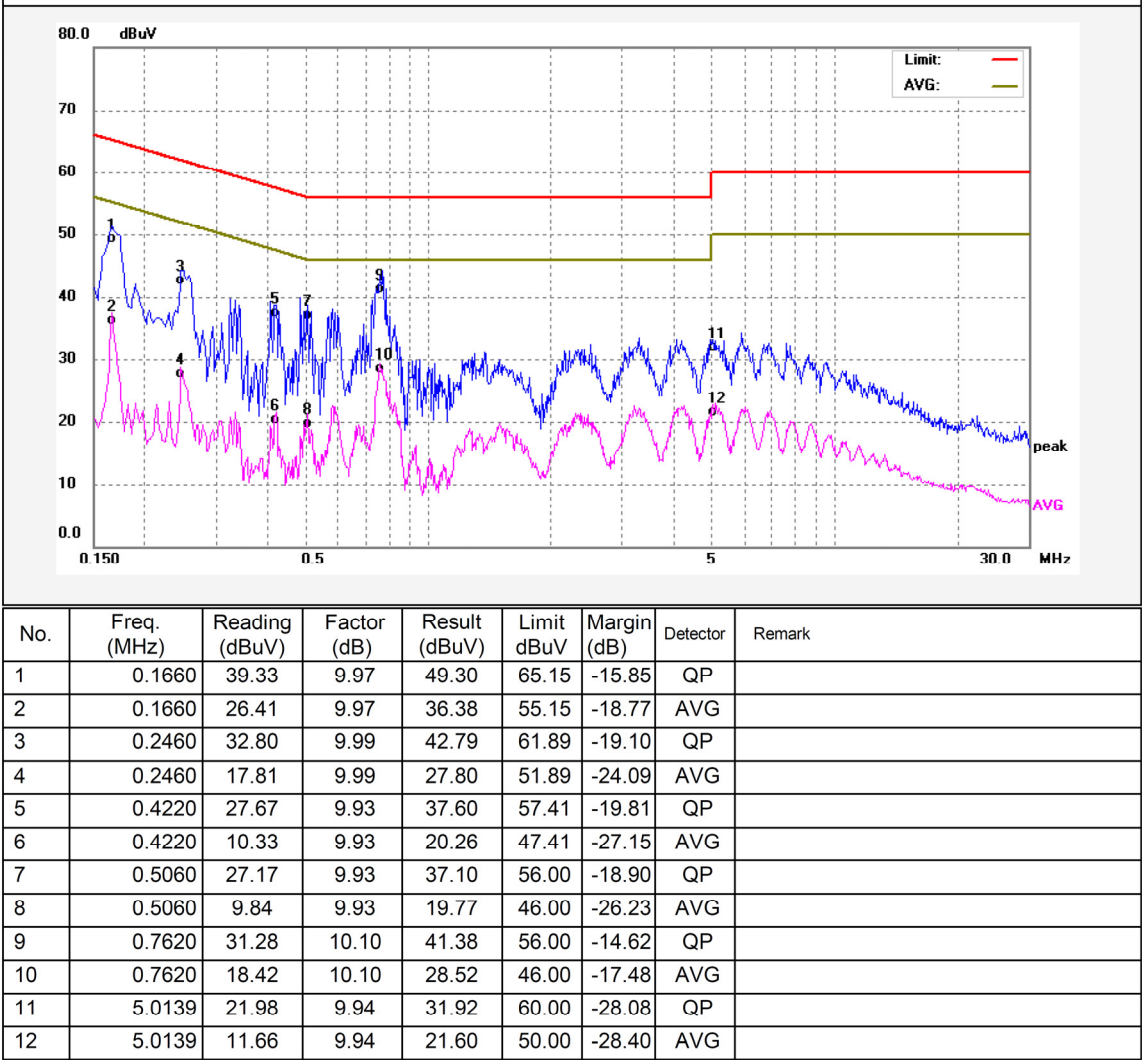

Neutral line:

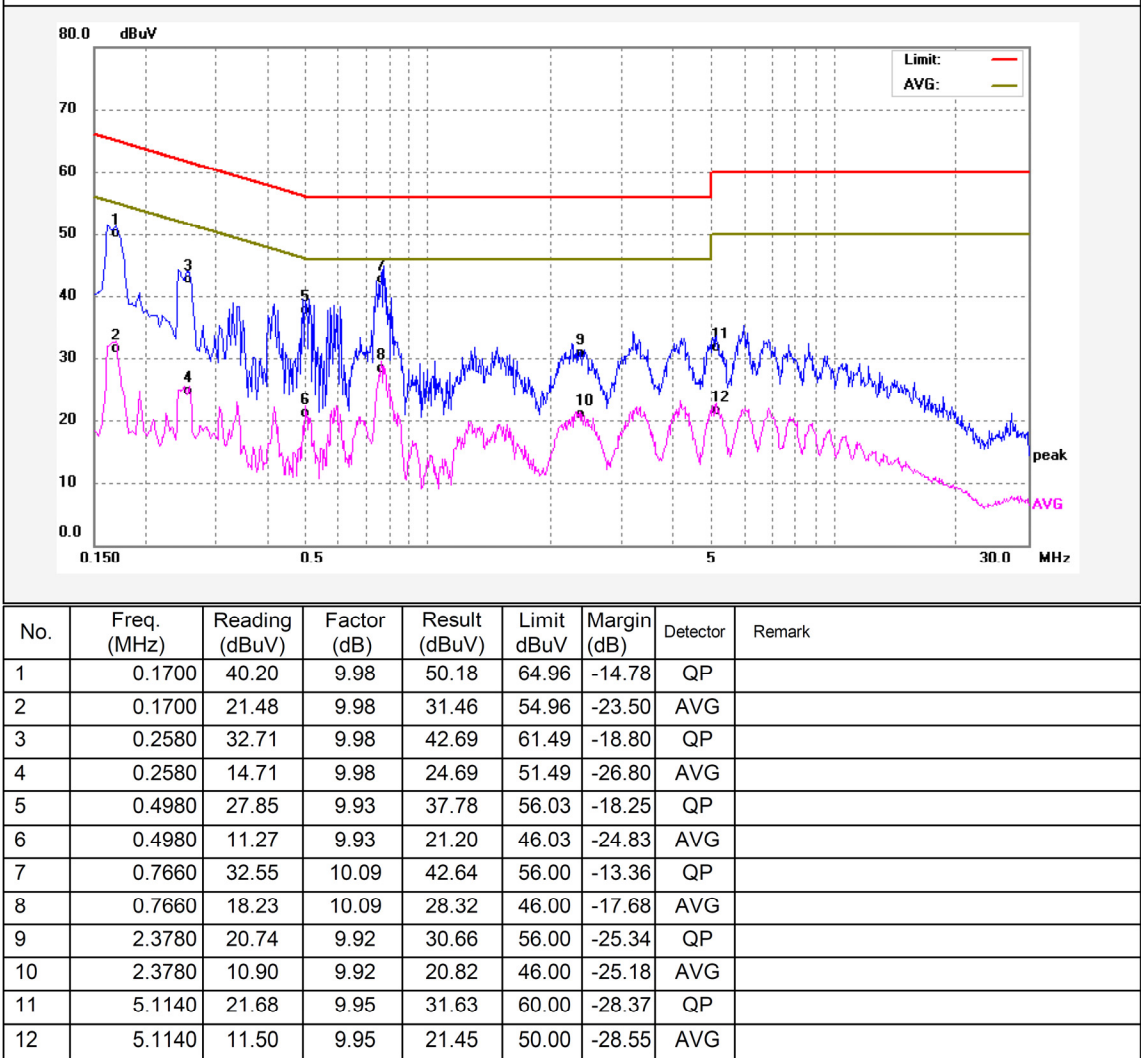

8 Radiated Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209, 15.225(a)(b)(c)(d)

Test Method: ANSI C63.10-2020

Test Result: PASS

Measurement Distance: 3m

Limit:

FCC Part15 Paragraph 15.209

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	$\mu\text{V/m}$	Distance (m)	$\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100**	3	100	$20\log^{(100)}$
88 ~ 216	150**	3	150	$20\log^{(150)}$
216 ~ 960	200**	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§15.231 and 15.241.

In the emission table above, the tighter limit applies at the band edges.

Note:

According to §15.209(d), the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

According to §15.31(f)(2) $300\text{m Result}(\text{dB}\mu\text{V/m}) = 3\text{m Result}(\text{dB}\mu\text{V/m}) - 40\log(300/3)(\text{dB}\mu\text{V/m})$.

According to §15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

Field Strength of Fundamental Limit:

a. The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.

$$15,848 \text{ microvolts/meter at 3 meters} = 124 \text{ dB}\mu\text{V/m}$$

b. Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

$$334 \text{ microvolts/meter at 3 meters} = 94.47 \text{ dB}\mu\text{V/m}$$

c. Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

(d) The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in §15.209.

8.1 EUT Operation

Operating Environment:

Temperature: 22.8°C

Humidity: 33.2%RH

Atmospheric Pressure: 101.2kPa


EUT Operation:

Only the worst-case transmitting mode were record in the report.


8.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10-2020.

The test setup for emission measurement below 30MHz.

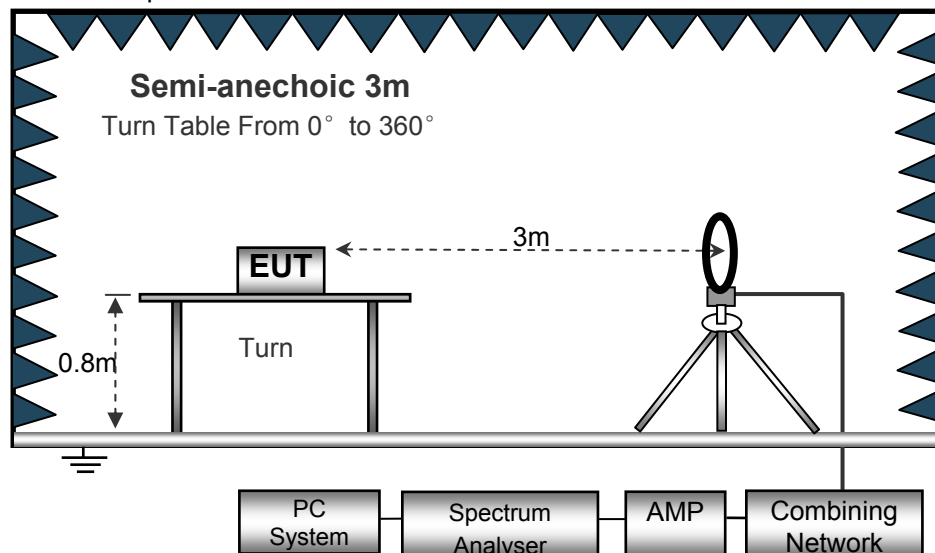

The test setup for emission measurement below 1GHz.

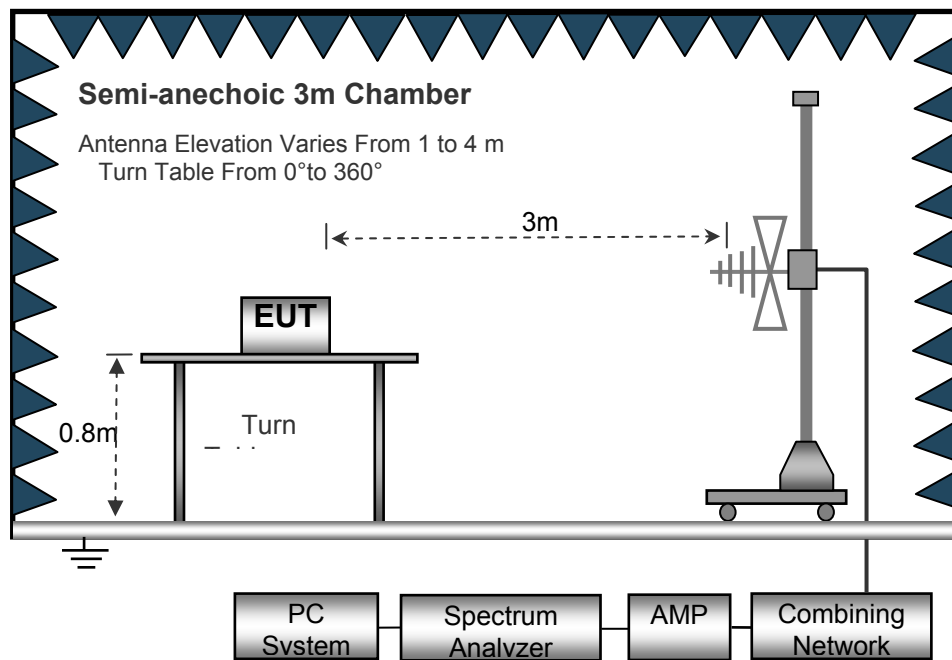

8.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed Auto
IF Bandwidth..... 10kHz
Video Bandwidth..... 10kHz
Resolution Bandwidth..... 10kHz

30MHz ~ 1GHz

Sweep Speed Auto
Detector PK
Resolution Bandwidth..... 100kHz
Video Bandwidth..... 300kHz

8.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane, EUT is set 3m away from the receiving antenna:
 Loop antenna (Height of the centre of the loop above the GRP of the SAC is 1 m);
 Trilog Broadband Antenna which is moved from 1m to 4m.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both vertical coaxial and vertical coplanar.
6. Repeat above procedures until the measurements for all frequencies are complete.

7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the Z position. So the data shown was the Z position only.

Note:

Although these test were performed other than open area test site, adequate comparison measurements were confirmed against 300m open area test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788 D01.

8.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$


The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$


8.6 Summary of Test Results

Field Strength of Fundamental Test Result


Antenna polarity: X

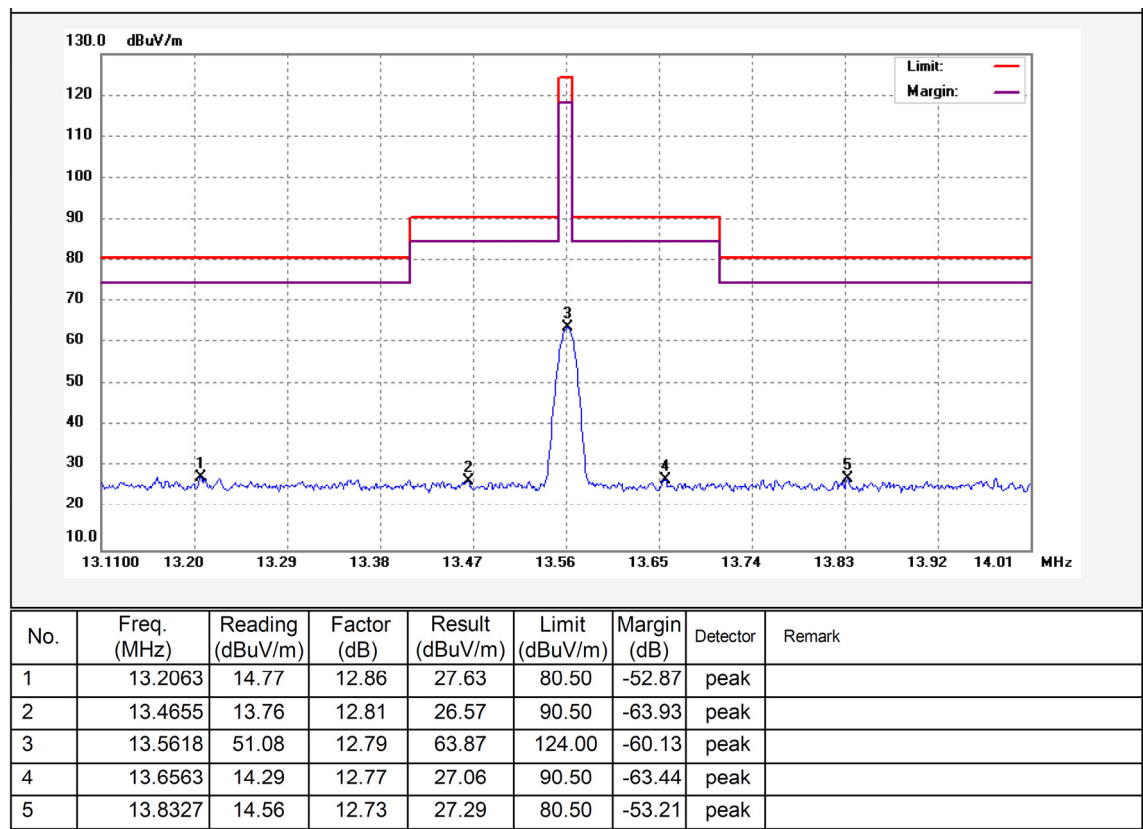

Antenna polarity: Y

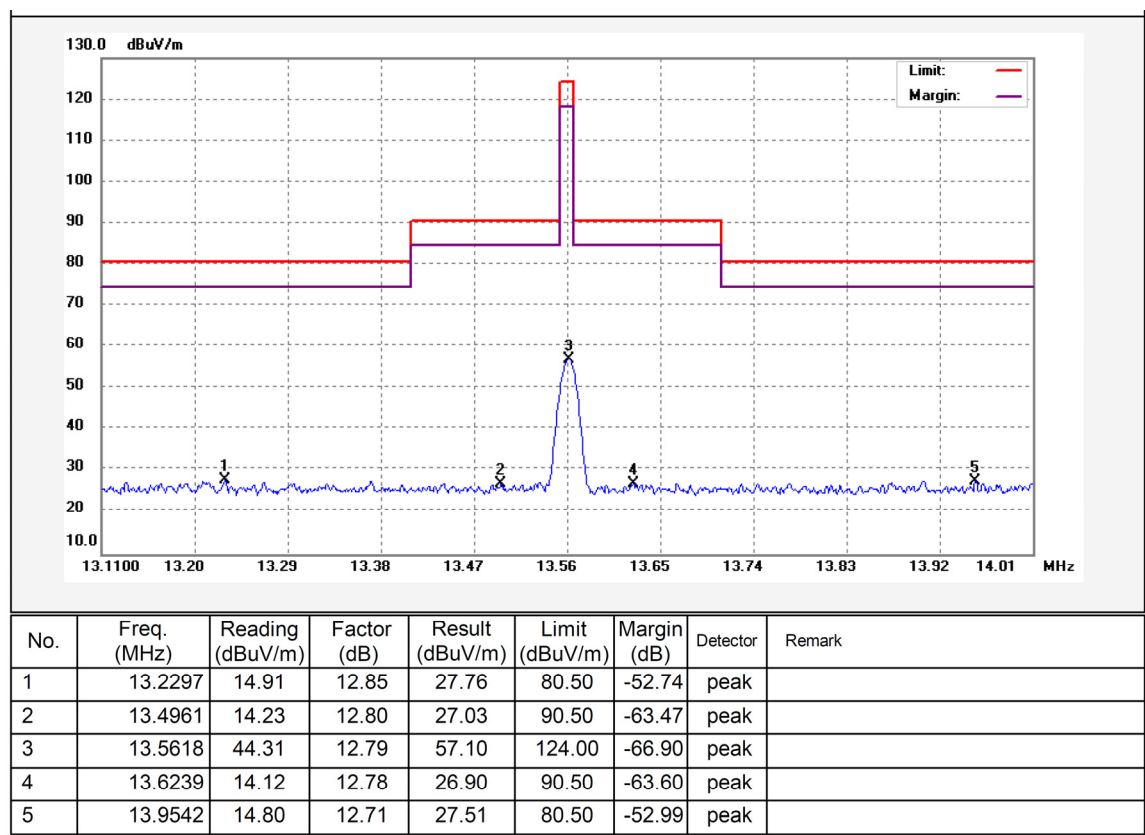


Antenna polarity: Z

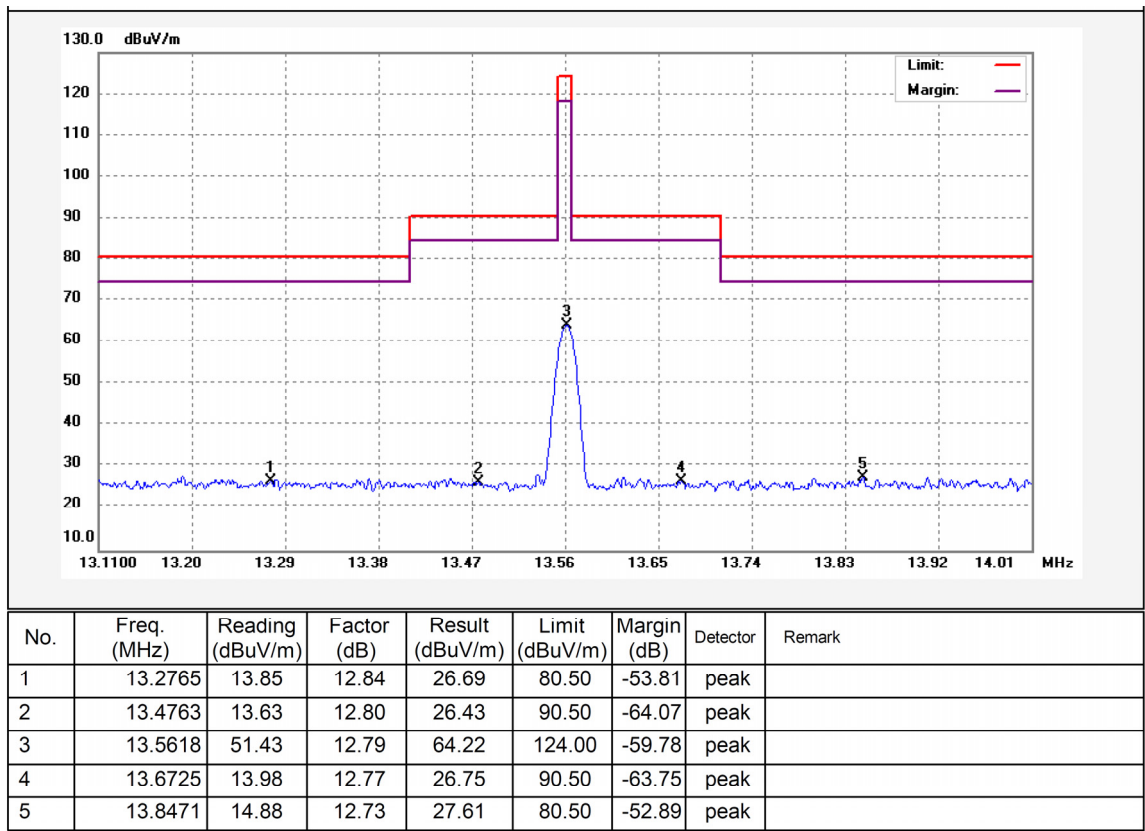

Harmonics and Spurious emission test result

Test Frequency: 9kHz ~ 150kHz

Antenna polarity: X

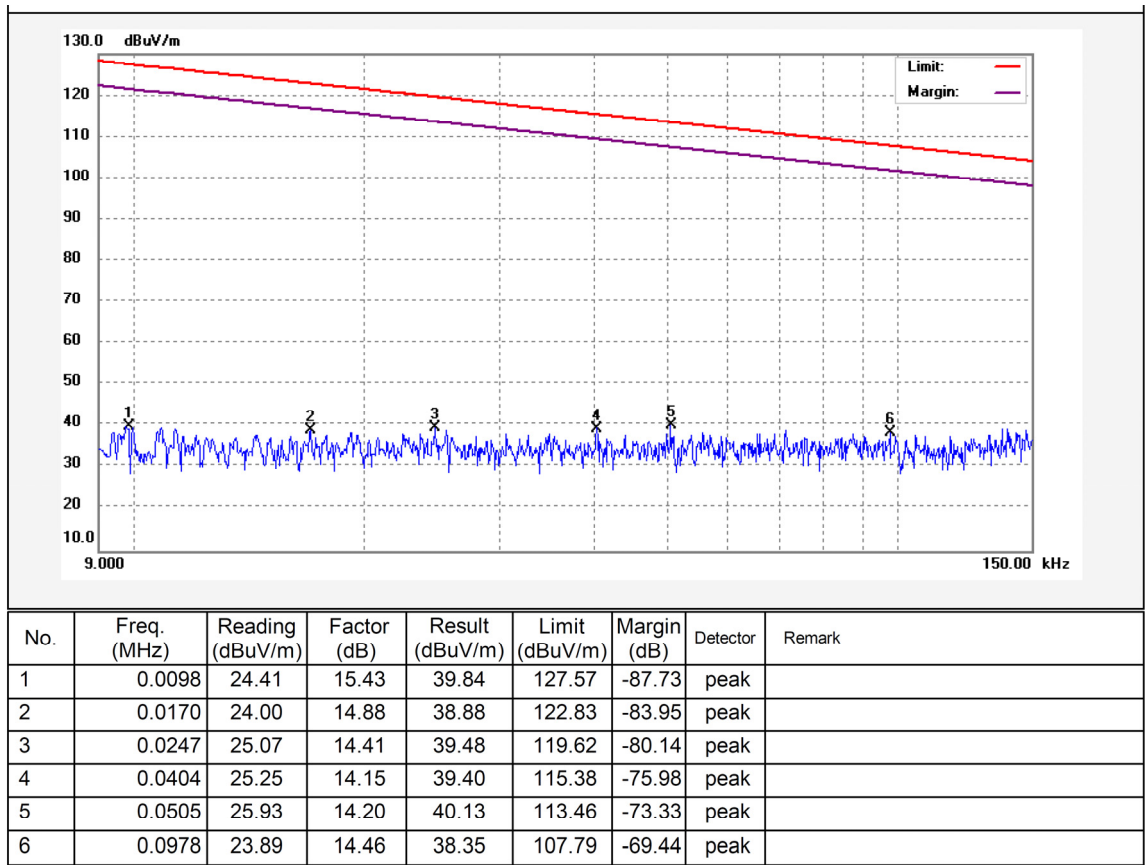

Antenna polarity: Y

