



Antenna Test Report



客戶:玖邦

機種:BT 模組

天線:MGW 2412 & IFA-101

工程師:梁文銘

Model	BT 模組					
Antenna type	MW 2412			IFA-101		
Frequency	2400	2450	2500	2400	2450	2500
S11(dB)	-6.90	-15.58	-5.88	-4.30	-3.26	-2.60
Peak Gain (dBi)	-2.04	-0.35	-1.31	-3.96	-5.45	-6.08
Efficiency (%)	25.06	35.02	27.83	16.91	14.27	10.49

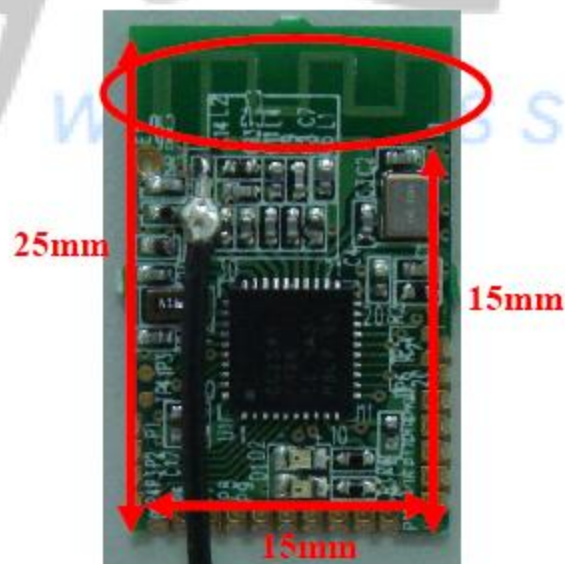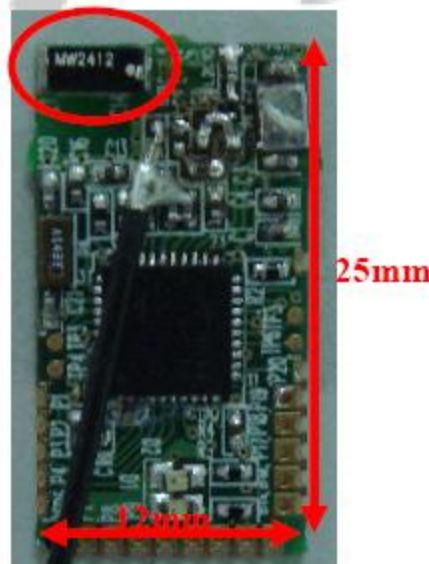



美策電科技股份有限公司 Magic Wireless Technology C
Website : <http://www.magictec.com.tw> (TEL)+886-2
15-5, No.716, Chung Cheng Rd., Chung Ho District, New Tai

Created with

nitroPDF professional
download the free trial online at nitropdf.com/professional

MW 2412

S11 & VSWR

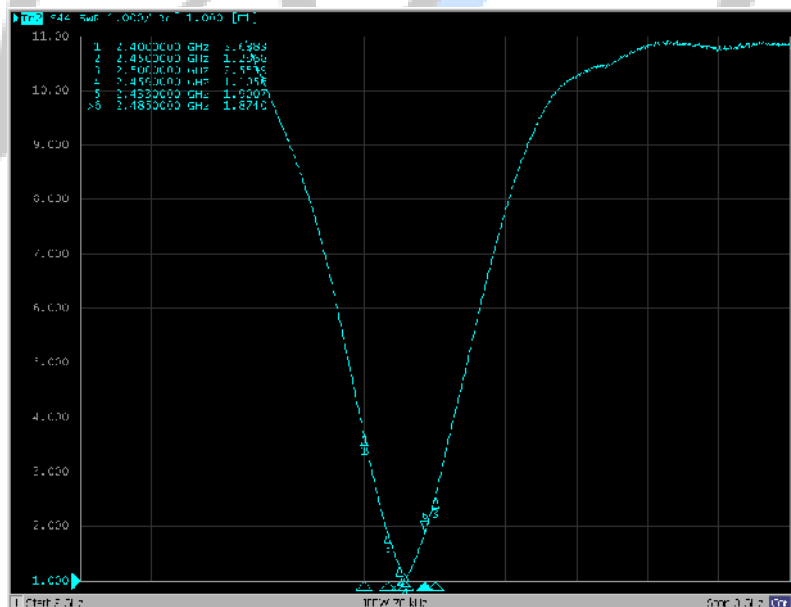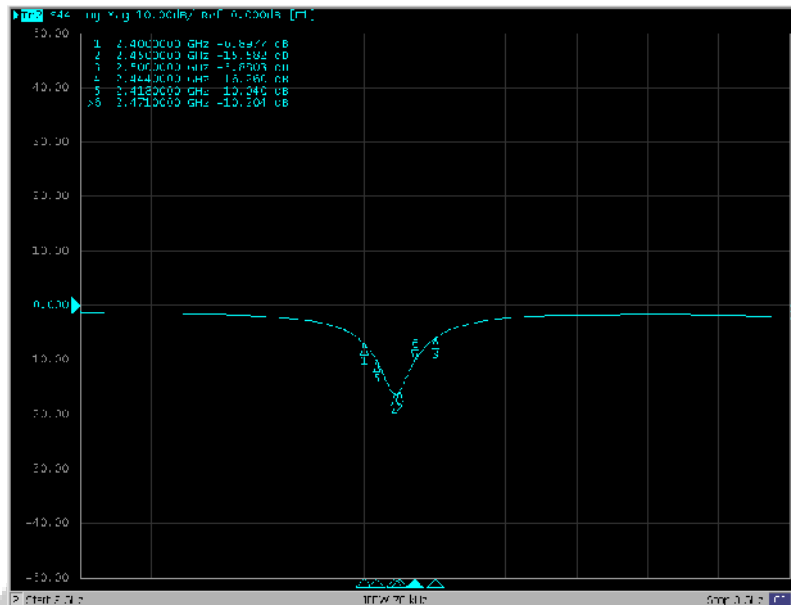


Model	BT 模組		
Antenna type	MW2412		
Frequency(MHz)	2400	2450	2500
S11 (dB)	-6.38	-16.32	-4.23
V.S.W.R	3.69	1.29	2.55



美築電科技股份有限公司 Magic Wireless Technology C
 Website : <http://www.magictec.com.tw> (TEL)+886-2-
 15-5, No.716, Chung Cheng Rd., Chung Ho District, New Tai

MW 2412 匹配電路

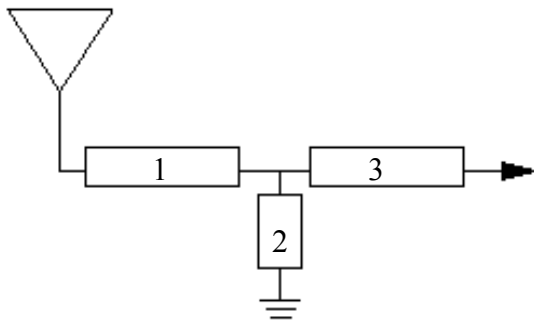


System Matching Circuit Component		
Location	Description	Vendor
Antenna	502010	MW2412
1	3.0nH	0402 TDK
2	1.8pF	0402 TDK
3	3.3nH	0402 TDK



IFA-101

S11 & VSWR

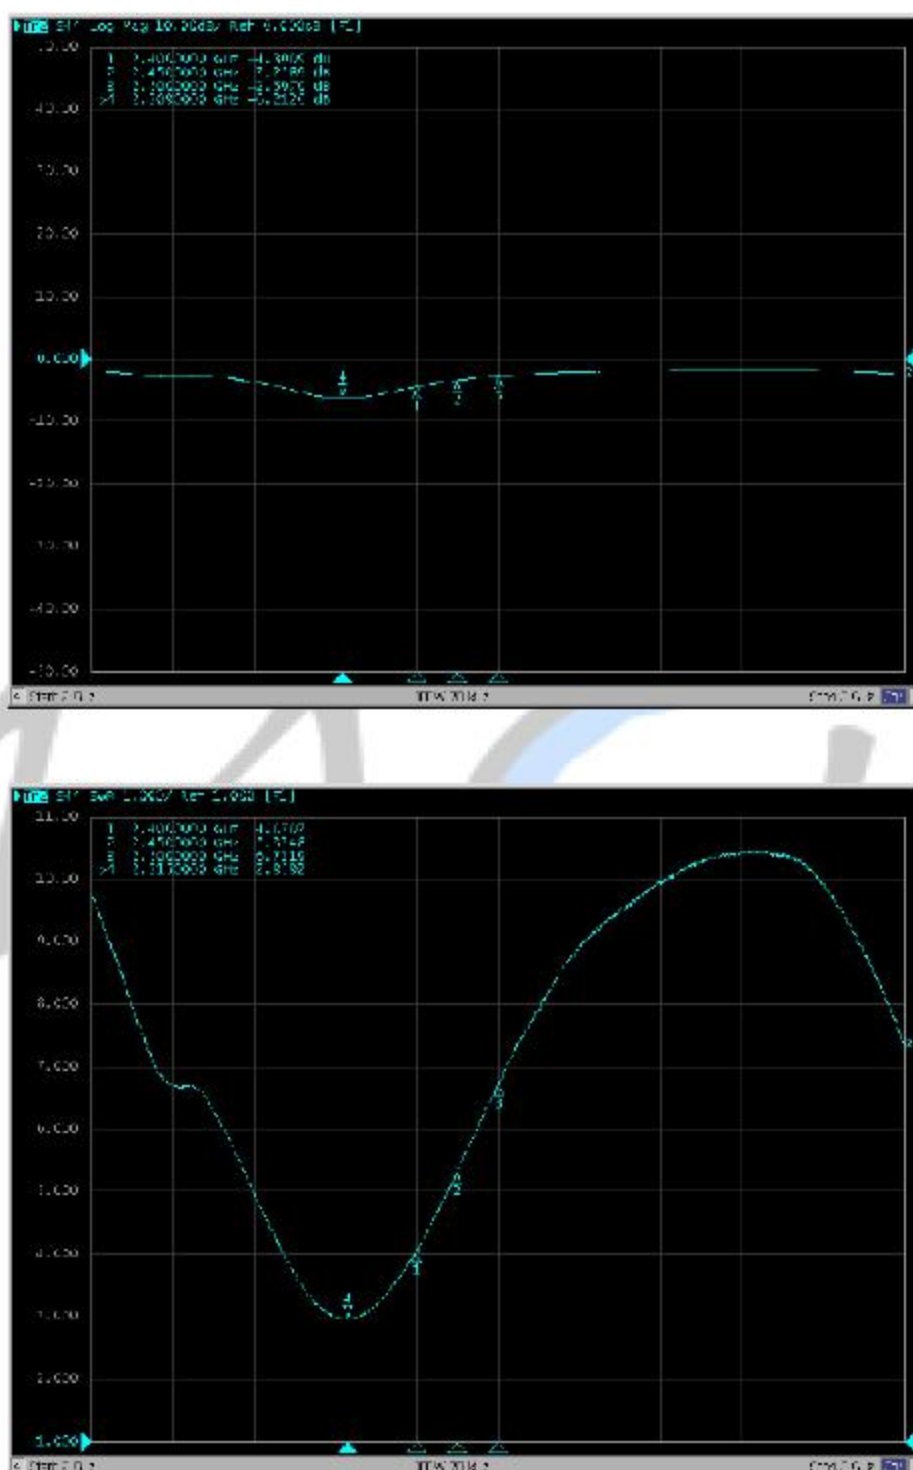


Model	BT 模組		
Antenna type	IFA-101		
Frequency(MHz)	2400	2450	2500
S11 (dB)	-4.30	-3.26	-2.60
V.S.W.R	4.07	5.33	6.73




美築電科技股份有限公司 Magic Wireless Technology C
 Website : <http://www.magictec.com.tw> (TEL)+886-2
 15-5, No.716, Chung Cheng Rd., Chung Ho District, New Tai

MW 2412


3D Chamber measure

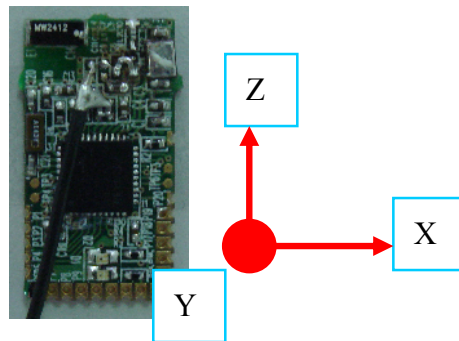


3D Antenna Radiation Pattern

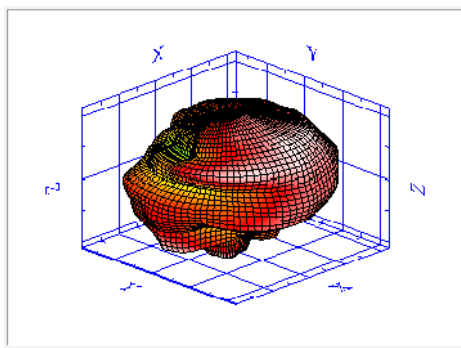

2400MHz

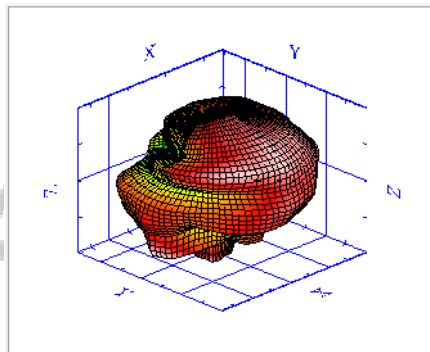

2450MHz

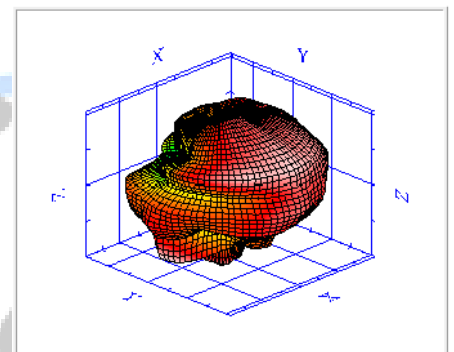

2500MHz

Antenna Radiation Efficiency

Model	BT 模組		
Antenna type	MW2412		
Frequency	2400	2450	2500
Peak Gain (dBi)	-2.04	-0.35	-1.31
Efficiency (%)	25.06	35.02	27.83




美築電科技股份有限公司 Magic Wireless Technology C
Website : <http://www.magictec.com.tw> (TEL)+886-2-15-5, No.716, Chung Cheng Rd., Chung Ho District, New Tai

Created with


nitroPDF professional
download the free trial online at nitropdf.com/professional

IFA-101


3D Chamber measure

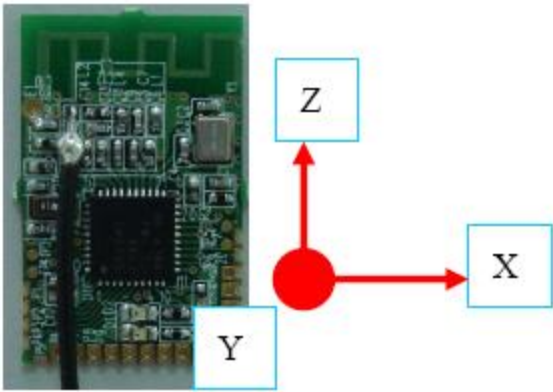


3D Antenna Radiation Pattern

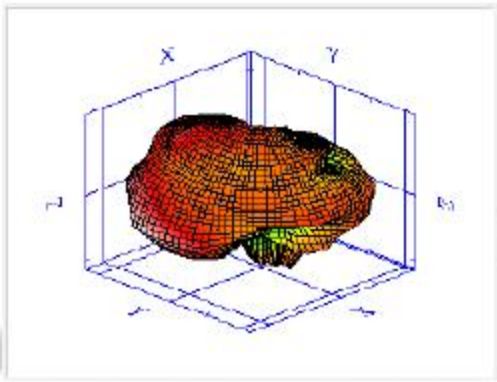

2400MHz

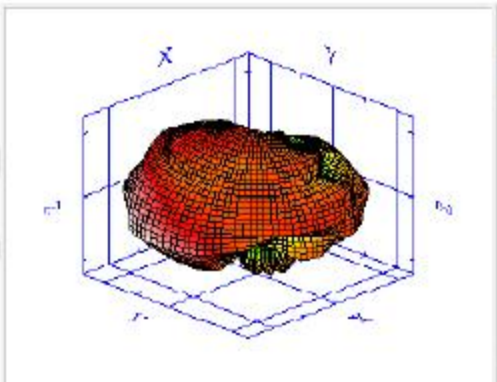

2450MHz

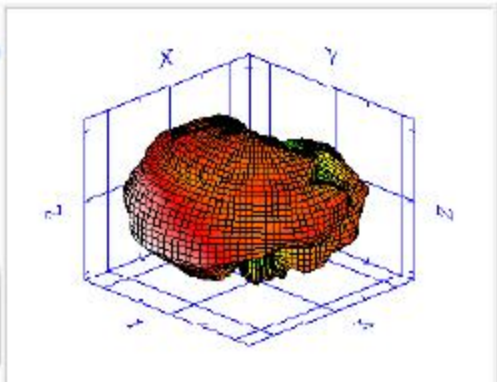

2500MHz

Antenna Radiation Efficiency


Model	BT 模組		
Antenna type	IFA-101		
Frequency	2400	2450	2500
Peak Gain (dBi)	-3.96	-5.45	-6.08
Efficiency (%)	16.91	14.27	10.49




美策電科技股份有限公司 Magic Wireless Technology C
Website : <http://www.magictec.com.tw> (TEL)+886-2
15-5, No.716, Chung Cheng Rd., Chung Ho District, New Tai

MW2412 增加 GND 測試

Model	BT 模組		
Antenna type	MW 2412+GND		
Frequency	2400	2450	2500
S11(dB)	-11.54	-16.71	-9.00
Peak Gain (dBi)	1.89	3.13	2.95
Efficiency (%)	42.86	49.64	46.62

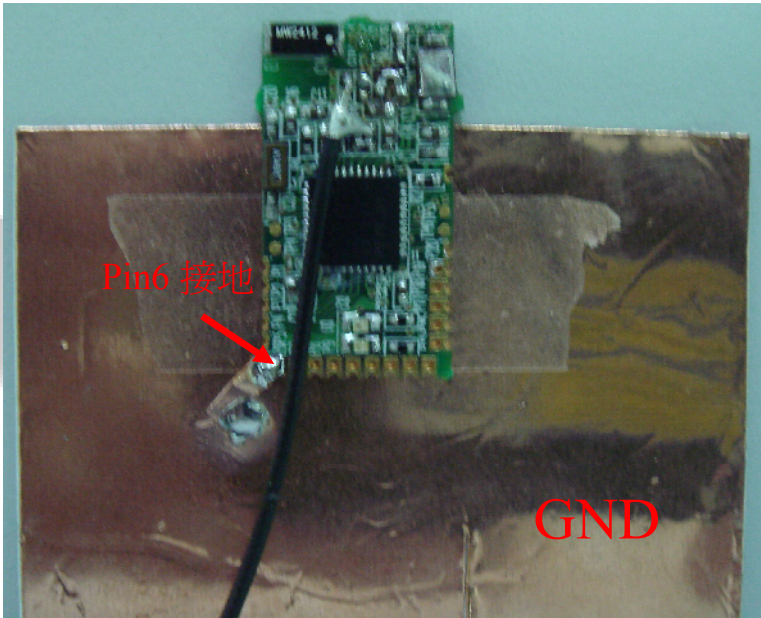


匹配電路

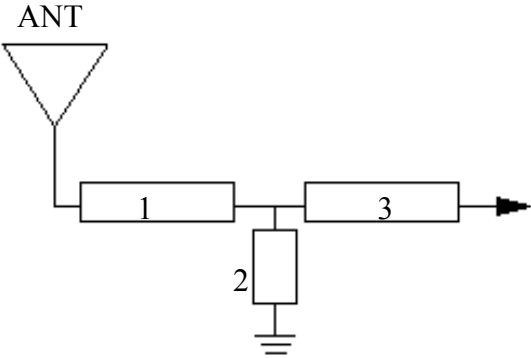

System Matching Circuit Component		
Location	Description	Vendor
Antenna	502010	MW2412
1	3.0nH	0402 TDK
2	1.2 pF	0402 TDK
3	4.7nH	0402 TDK




MW2412+GND S11

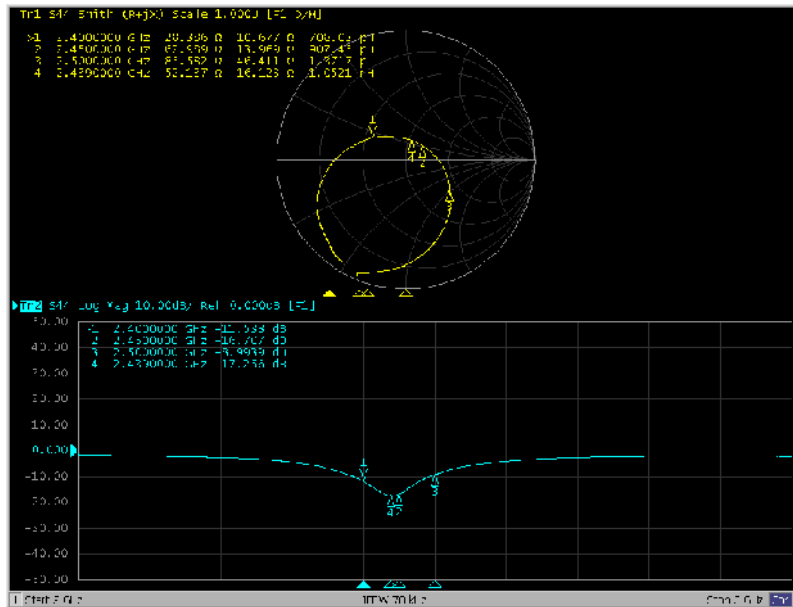


Model	BT 模組		
Antenna type	MW2412+GND		
Frequency(MHz)	2400	2450	2500
S11 (dB)	-11.58	-16.71	-9.00


3D Antenna Radiation Pattern

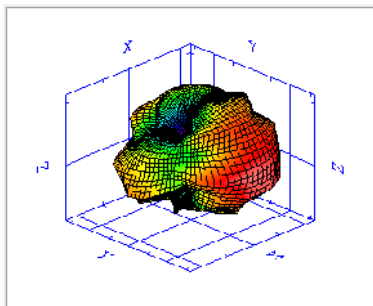

2400MHz

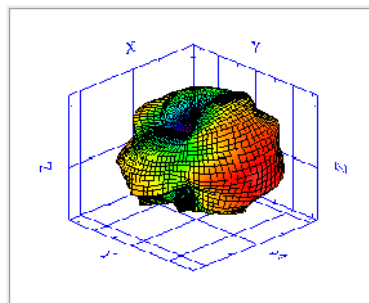

2450MHz

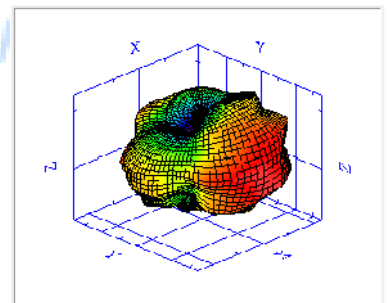

2500MHz

Model	BT 模組		
Antenna type	MW2412+GND		
Frequency	2400	2450	2500
Peak Gain (dBi)	1.89	3.13	2.95
Efficiency (%)	42.86	49.64	46.62



美築電科技股份有限公司 Magic Wireless Technology C
Website : <http://www.magictec.com.tw> (TEL)+886-2-15-5, No.716, Chung Cheng Rd., Chung Ho District, New Tai

結 論

1. 本報告為一個 BT 模組,針對 Chip 天線與 PCB(Inverted-F)天線的比較報告。
2. 經過我司測試後,MW2412 在 2450MHz 的效率為 35%,遠優於 PCB(Inverted-F)天線14%
3. 本產品為一模組,實際應用會與一大型主板連接,頻率特性會有變異,MW2412+GND 為模擬實際應用,將 PCB 版的 PIN6 腳位與 GND 相接,其特性在 2450GHz 效率為 49.64%較原本特性佳,建議客戶在實際應用上,可以使用 MW2412+GND 的匹配值去製作。

MAGIC
WIRELESS



美築電科技股份有限公司 Magic Wireless Technology C
Website : <http://www.magictec.com.tw> (TEL)+886-2
15-5, No.716, Chung Cheng Rd., Chung Ho District, New Tai

Created with



nitroPDF professional

download the free trial online at nitropdf.com/professional