



REPORT No. : SZ14100021W01

FCC RF TEST REPORT

APPLICANT : Beat-sonic Co.,Ltd.

PRODUCT NAME : Chime-Netic Dynamo Button Wireless Chime

MODEL NAME : CNB2US

TRADE NAME : Beat-sonic Co.,Ltd

BRAND NAME : Beat-sonic

FCC ID : 2ADFNS27870000

STANDARD(S) : 47 CFR Part 15 Subpart C

ISSUE DATE : 2014-12-5



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

[Http://www.morlab.com](http://www.morlab.com)

Fax: 86-755-36698525

E-mail: service@morlab.cn



DIRECTORY

TEST REPORT DECLARATION	4
1. TECHNICAL INFORMATION	5
1.1 APPLICANT INFORMATION	5
1.2 EQUIPMENT UNDER TEST (EUT) DESCRIPTION	5
1.2.1 IDENTIFICATION OF ALL USED EUTS	5
1.3 TEST STANDARDS AND RESULTS	5
1.3.1 TEST ENVIRONMENT CONDITIONS	6
2. 47 CFR PART 15C REQUIREMENTS	7
2.1 ANTENNA REQUIREMENT	7
2.1.1 APPLICABLE STANDARD	7
2.1.2 RESULT: COMPLIANT	7
2.2 RELEASE TIME MEASUREMENT	7
2.2.1 REQUIREMENT	7
2.2.2 TEST DESCRIPTION	7
2.2.3 TEST RESULT	8
2.3 20DB BANDWIDTH	9
2.3.1 REQUIREMENT	9
2.3.2 TEST DESCRIPTION	9
2.3.3 TEST RESULT	10
2.4 CONDUCTED EMISSION	11
2.4.1 REQUIREMENT	11
2.4.2 TEST DESCRIPTION	11
2.4.3 TEST RESULT	12
2.5 RADIATED EMISSION	13
2.5.1 REQUIREMENT	13
2.5.2 TEST DESCRIPTION	14
2.5.3 TEST RESULT	16
2.5.4 FIELD STRENGTH OF THE FUNDAMENTAL	18
ANNEX A GENERAL INFORMATION	20



REPORT No. : SZ14100021W01

Change History		
Issue	Date	Reason for change
1.0	2014-12-5	First edition



REPORT No. : SZ14100021W01

TEST REPORT DECLARATION

Applicant	Beat-sonic Co.,Ltd.
Applicant Address	475-5 Koushin, Fujieda, Nisshin, Aichi, 470-0112, Japan
Manufacturer	Qingdao Augreener Electronic technology Co.,Ltd
Manufacturer Address	NO.13 hancheng Road, Qingdao Free Trade Zone, 266555, Shandong Province, China
Product Name	Chime-Netic Dynamo Button Wireless Chime
Model Name	CNB2US
Brand Name	Beat-sonic
HW Version	V2.2
SW Version	V1.0
Test Standards	47 CFR Part 15 Subpart C
Test Date	2014-11-28 to 2014-12-2
Test Result	PASS

Tested by : Zou Jian
Zou Jian

Reviewed by : Qiu Xiaojun
Qiu Xiaojun

Approved by : Zeng Dexin
Zeng Dexin



1. TECHNICAL INFORMATION

Note: Provide by applicant.

1.1 Applicant Information

Company:	Beat-sonic Co., Ltd.
Address:	475-5 Koushin, Fujieda, Nisshin, Aichi, 470-0112, Japan

1.2 Equipment under Test (EUT) Description

Brand Name:	Beat-sonic
Trade Name:	Beat-sonic Co.,Ltd
Model Name:	CNB2US
Frequency Range:	The frequency used is 315MHz
Modulation Type:	FSK
Antenna Type:	PIFA Antenna
Antenna Gain:	2.2dBi

1.2.1 Identification of all used EUTs

The EUT identity consists of numerical and letter characters, the letter character indicates the test sample, and the following two numerical characters indicate the software version of the test sample.

EUT Identity	Hardware Version	Software Version
A01	V2.2	V1.0

1.3 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C (Bluetooth, 2.4GHz ISM band radiators) for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15(10-1-13 Edition)	Radio Frequency Devices



Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Result
1	15.203	Antenna Requirement	<u>PASS</u>
2	15.231(a)(1)	Release Time measurement	<u>PASS</u>
3	15.231(c)	20dB Bandwidth	<u>PASS</u>
4	15.207	Conducted Emission	<u>N/A</u>
5	15.231(b)&15.209(a)	Radiated Emission	<u>PASS</u>

The product is a manually operated REMOTE CONTROL transmitter. Section 15.231(a)(2),(3),(4) and (5) are not applicable.

The tests of Conducted Emission and Radiated Emission were performed according to the method of measurements prescribed in ANSI C63.4 2009.

1.3.1 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106

2. 47 CFR PART 15C REQUIREMENTS

2.1 Antenna requirement

2.1.1 Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2 Result: Compliant

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.


2.2 Release Time measurement

2.2.1 Requirement

A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

2.2.2 Test Description

A. Test Setup:

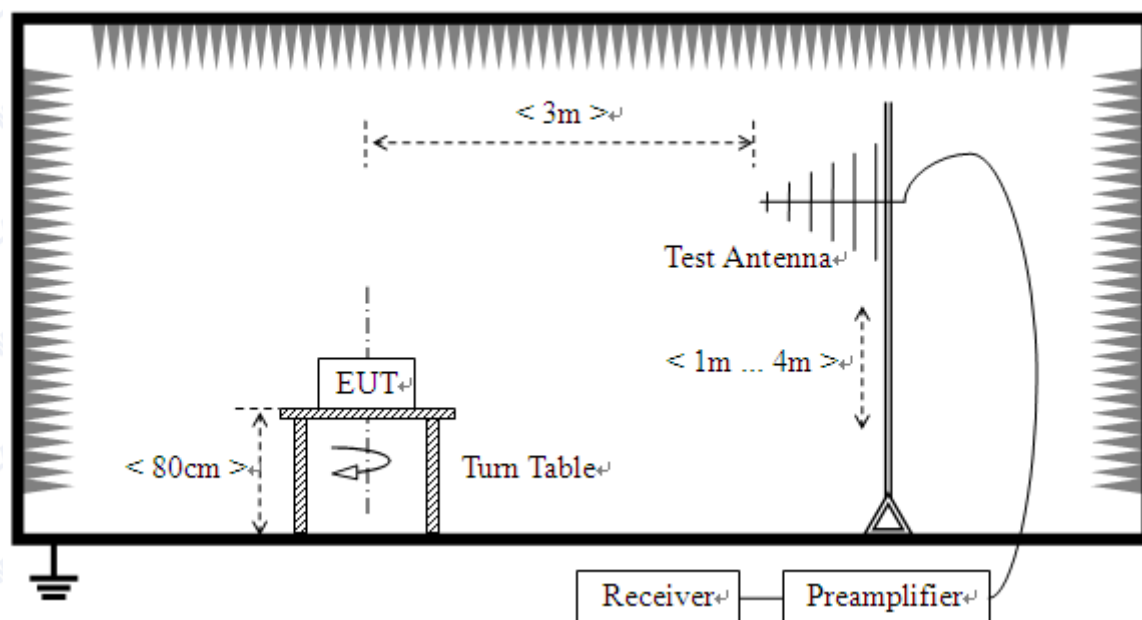

**B. Test procedure:**

Set SPA Center Frequency=Fundamental frequency, RBW=100KHz, VBW=300KHz, Span=0Hz, Sweep time=10s.

Set EUT as normal operation and press Transmitter button.

Set SPA View. Delta Mark time.

C. Equipments List:


Please reference ANNEX A(1.4).

2.2.3 Test Result

The frequency(315MHz) is selected to perform testing to verify the radiated release time measurement of the Module.

A. Test Verdict:

Frequency (MHz)	Release Time	Limit	Verdict
315	47.5ms	5S	PASS

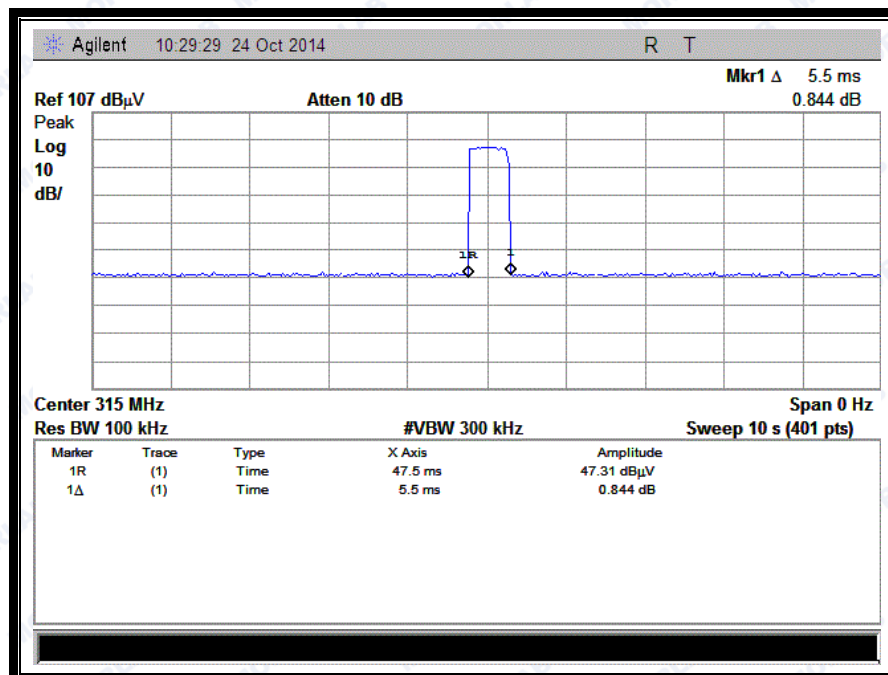B. Test Plots:

(315MHz)

2.3 20dB Bandwidth


2.3.1 Requirement

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

As the center frequency for the device operating is 315MHz, thus, the 20dB bandwidth limit is 787.5KHz.

2.3.2 Test Description

A. Test Set:

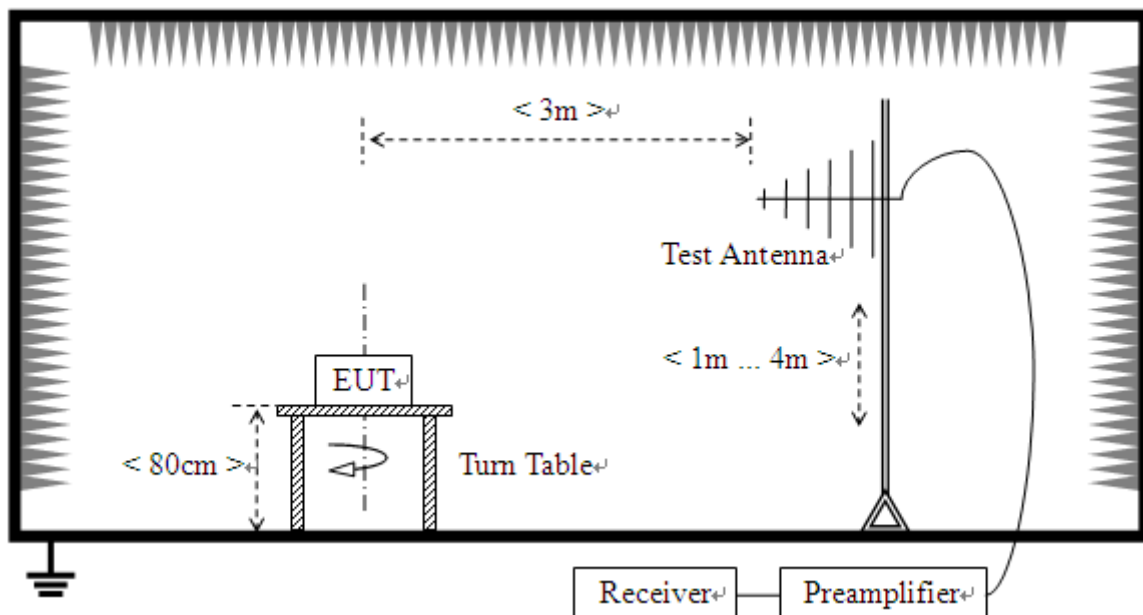

B. Test procedure:

Set spectrum analyzer's Center Frequency = Fundamental frequency, RBW, VBW and span to applicable value with Peak in Max Hold, A PEAK output reading and 20db Bandwidth function in spectrum analyzer were taken.

C. Equipments List:

Please reference ANNEX A(1.4).




REPORT No. : SZ14100021W01

2.3.3 Test Result

A. Test Verdict:

Frequency (MHz)	20dB Bandwidth (MHz)	Limits(kHz)	Result
315	0.5	787.5	PASS

B. Test Plots:

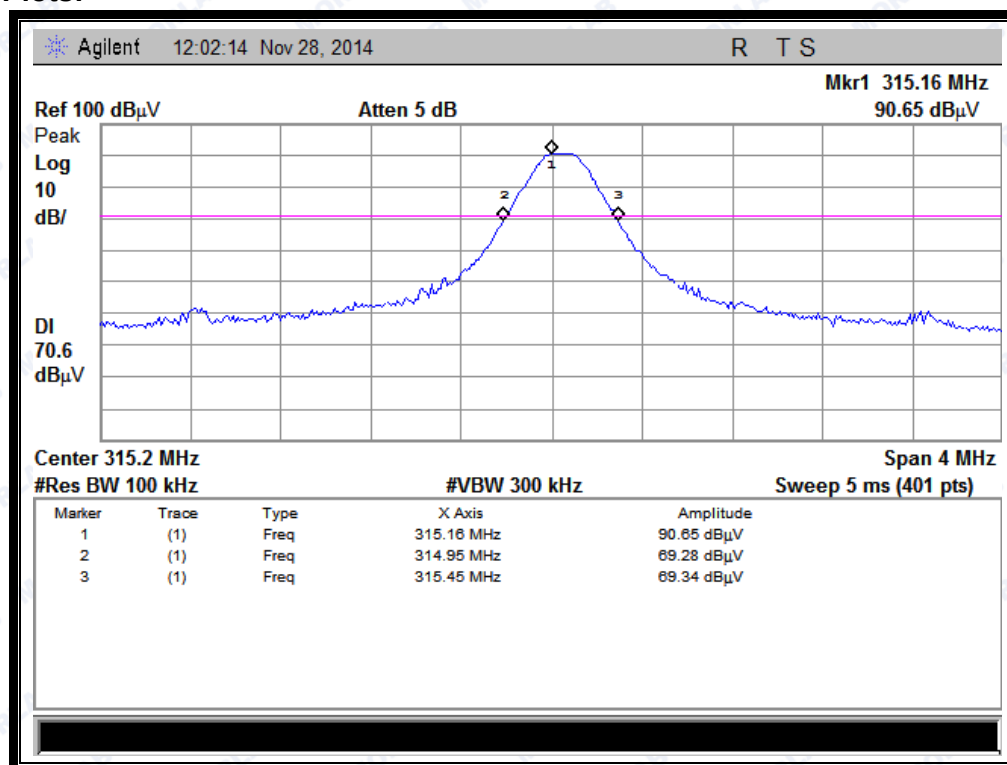

20dB Bandwidth

2.4 Conducted Emission

2.4.1 Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).


Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.4.2 Test Description

A. Test Setup:

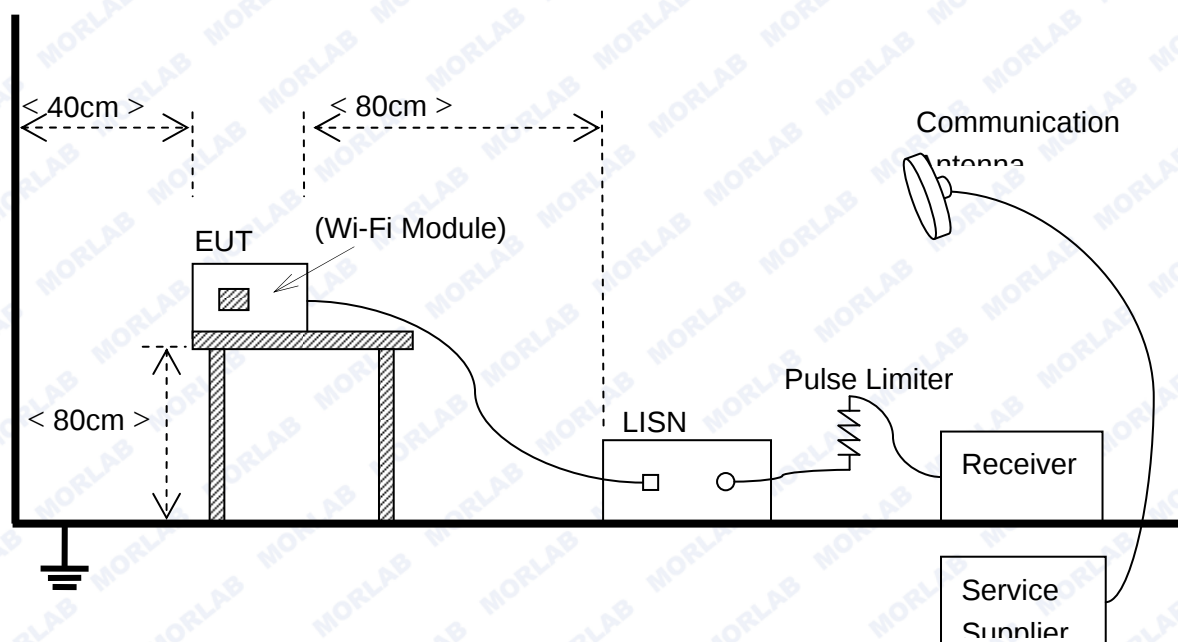

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.4:2009



B. Equipments List:

Please reference ANNEX A(1.4).

2.4.3 Test Result

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

A. Test setup:

The EUT configuration of the emission tests is EUT + Link.

B. Test Plots:

Note: There is not charger for the Chime-Netic Dynamo Button Wireless Chime, it powered by battery only.



2.5 Radiated Emission

2.5.1 Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

FCC Part 15.231(b)

Fundamental frequency(MHz)	Field strength of fundamental (microvolts/meter)	Field strength of spurious emission(microvolts/meter)
40.66-40.70	2250	225
70-130	1250	125
130-174	1250 to 3750	125 to 375
174-260	3750	375
260-47	3750 to 12500	375 to 1250
Above 470	12500	1250

¹ Linear interpolations.

Note:


For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)


2.5.2 Test Description

A. Test Setup:


- 1) For radiated emissions from 9kHz to 30MHz

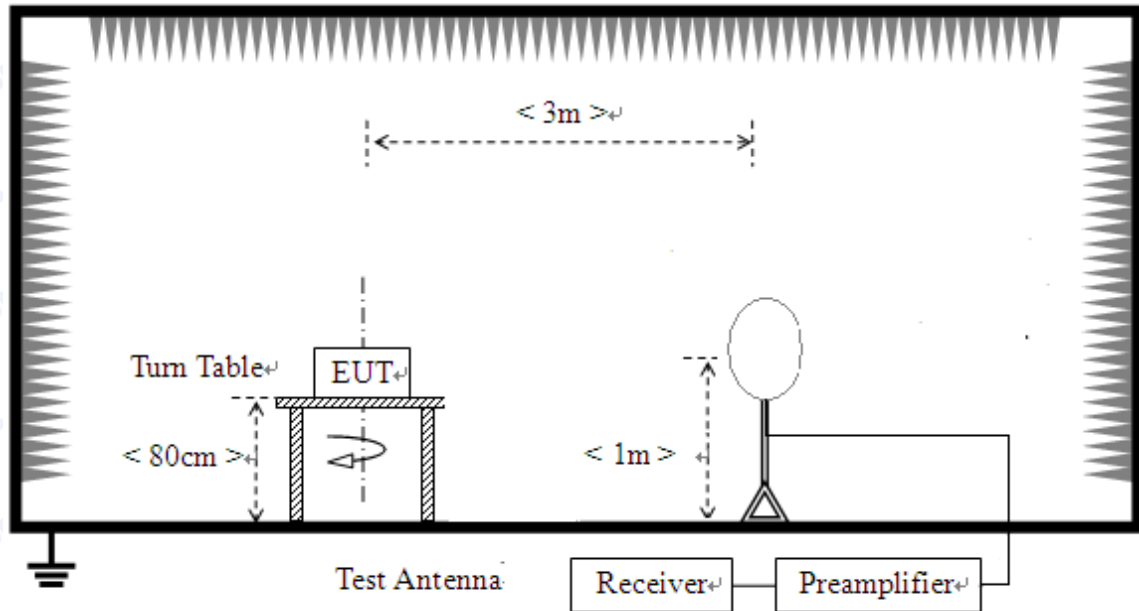

- 2) For radiated emissions from 30MHz to 1GHz

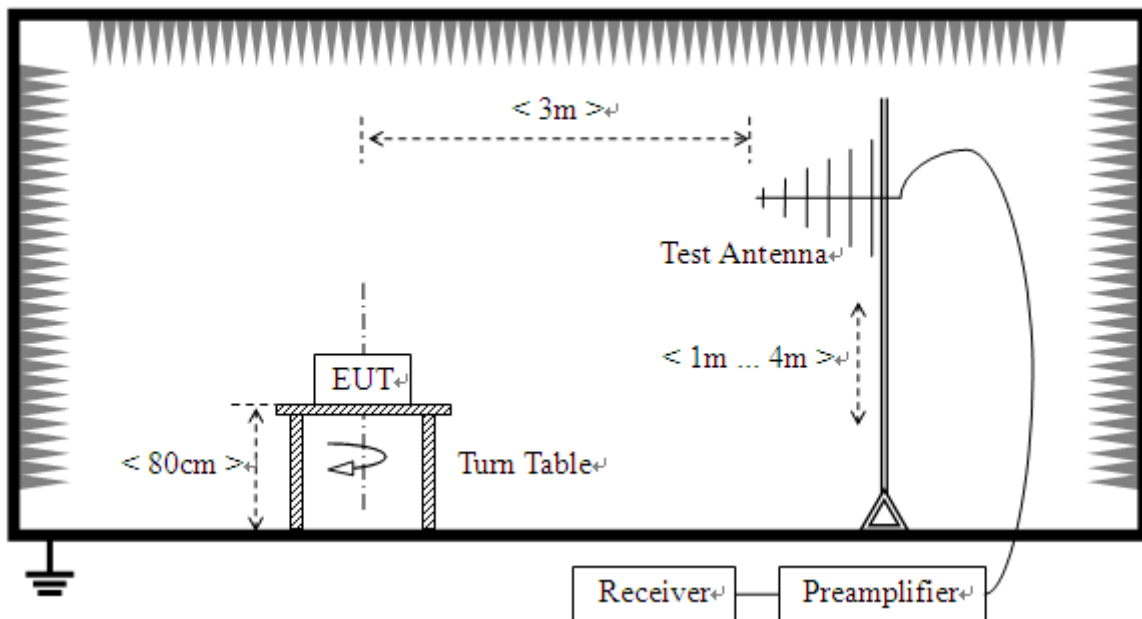

3) For radiated emissions above 1GHz

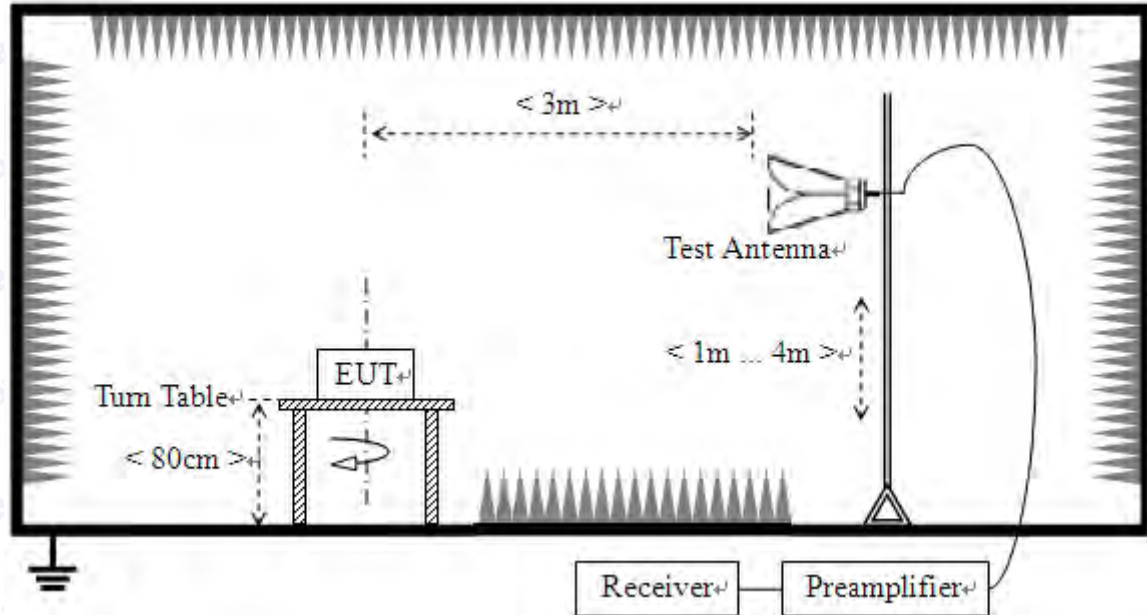

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.4 (2009). The EUT was set-up on insulator 80cm above the Ground Plane. The set-up and test methods were according to ANSI C63.4.

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

- In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

B. Equipments List:

Please reference ANNEX A(1.4).



2.5.3 Test Result

According to ANSI C63.4 selection 4.2.2, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

Final Emission_PK=E(peak)

Final Emission_AV=E+AV factor.

During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

The low frequency, which started from 9KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

Frequency (MHz)	Final Emission_PK (dBuV/m)	AV factor(dB)	Final Emission_AV (dBuV/m)	Limit-AV (dBuV/m)	Antenna	Verdict
315.000	N.A	N.A	N.A	N.A	Horizontal	N.A
438.803	49.96	-33.98	15.98	55.62	Horizontal	PASS
629.900	63.98	-33.98	30.00	55.62	Horizontal	PASS
944.364	60.30	-33.98	26.32	55.62	Horizontal	PASS
1259.352	52.84	-33.98	18.86	55.62	Horizontal	PASS
1573.566	47.13	-33.98	13.15	55.62	Horizontal	PASS
315.000	N.A	N.A	N.A	N.A	Vertical	N.A
450.898	45.36	-33.98	11.38	55.6	Vertical	PASS
629.900	58.59	-33.98	24.61	55.6	Vertical	PASS
944.364	56.78	-33.98	22.80	55.6	Vertical	PASS
1259.352	52.25	-33.98	18.27	55.6	Vertical	PASS
1573.566	47.33	-33.98	13.35	55.6	Vertical	PASS



Note 1: The above table only shows the frequency which peak emission exceed the average limit. The peak data of other frequencies are all below the average limit (please refer to the test graph in following pages), so the average data of other frequencies are deemed to fulfill the average limits and not reported.


Note 2: The emission below 30MHz are not reported for they are much lower than the limits

Note 3: The duty cycle is simply the on-time divided by the period:


The duration of one cycle	:	0.5ms
Effective period of the cycle	:	163.5 ms
Duty cycle	:	0.02

Therefore, the average factor is found by $20\log(\text{Duty cycle}) = -33.98$

A. Test Plots for the Whole Measurement Frequency Range:

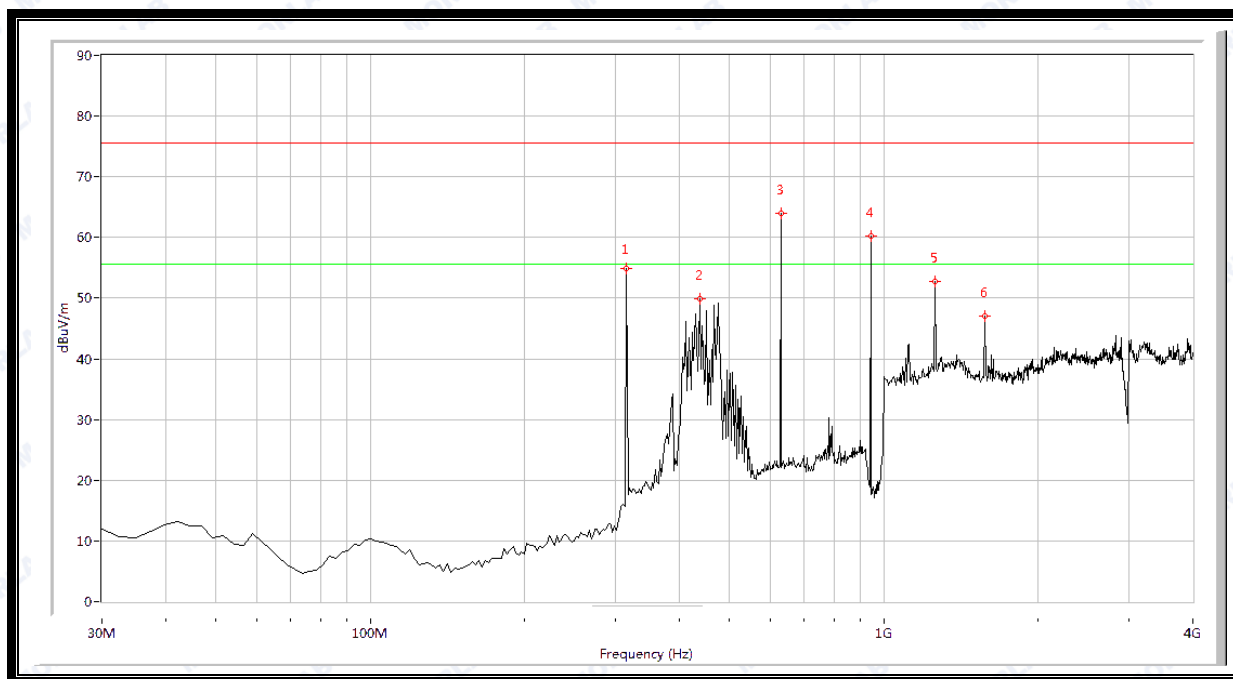

(Antenna Horizontal, 30MHz to 4GHz)

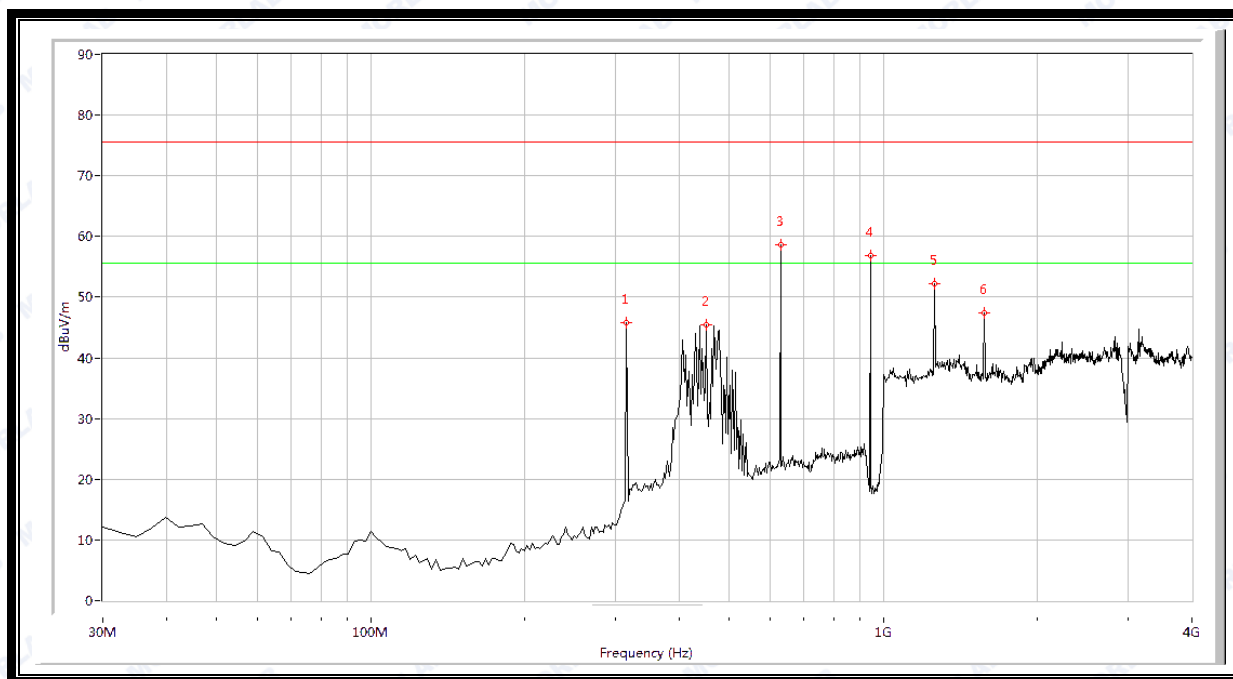


(Antenna Vertical, 30MHz to 4GHz)

2.5.4 Field strength of the fundamental


Frequency (MHz)	Final Emission_PK (dBuV)	Cable loss	Antenna Factor (dB)	Fundamental Emission_PK (dBuV/m)	Limit-PK (dBuV/m)	AV Factor	Fundamental Emission_AV (dBuV/m)	Limit-AV (dBuV/m)	Antenna
315.000	77.56	3.4	13.5	94.46	95.62	-33.98	60.48	75.62	Horizontal
315.000	76.29	3.4	13.5	93.19	95.62	-33.98	59.21	75.62	Vertical



REPORT No. : SZ14100021W01

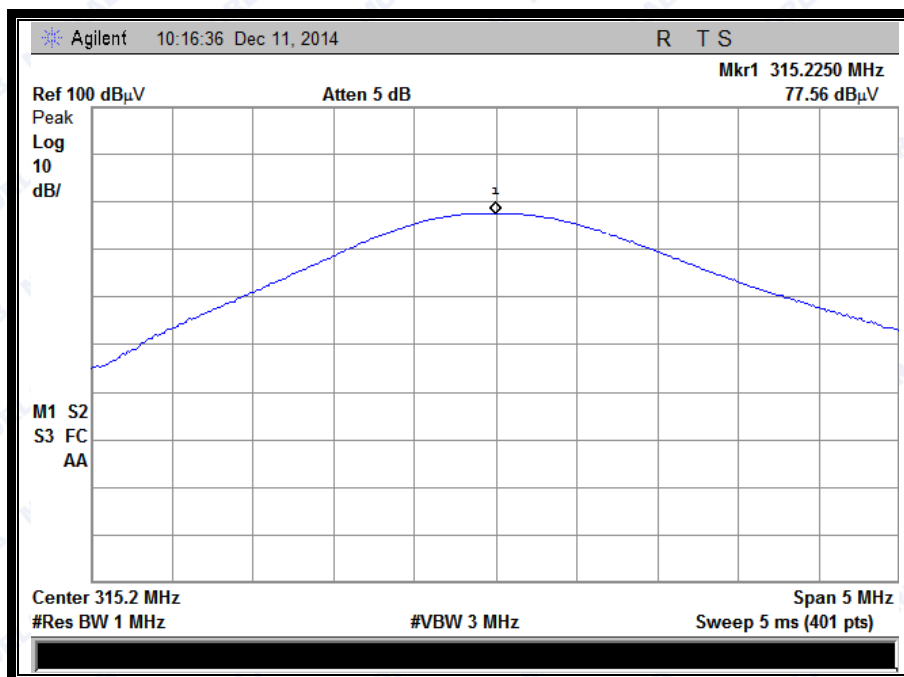

(Antenna Horizontal, field strength of the fundamental)

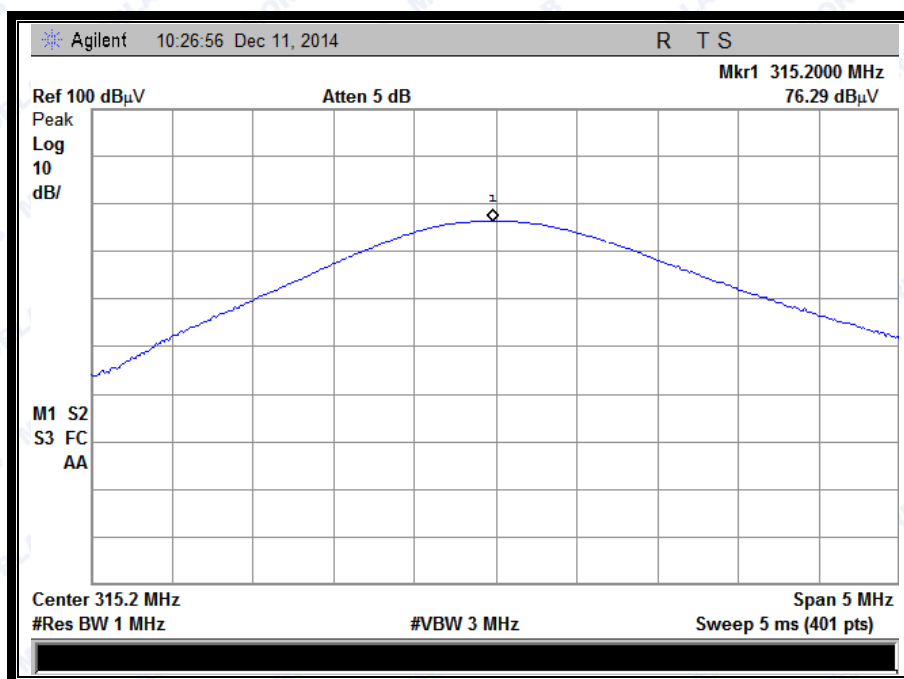

(Antenna Vertical, field strength of the fundamental)



ANNEX A GENERAL INFORMATION

1.1 Identification of the Responsible Testing Laboratory

Company Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Department:	Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, Guangdong Province, P. R. China
Responsible Test Lab Manager:	Mr. Su Feng
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

1.2 Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, Guangdong Province, P. R. China

1.3 Facilities and Accreditations

Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L3572.

All measurement facilities used to collect the measurement data are located at FL.1, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10 2009, ANSI C63.4 2009 and CISPR Publication 22; the FCC registration number is 695796.

The IC registration number is 7183A-2.



REPORT No. : SZ14100021W01

1.4 Test Equipments Utilized

1.4.1 Conducted Test Equipments

Conducted Test Equipment

No.	Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
1	Spectrum Analyzer	MY45101810	E4407B	Agilent	2014.02.26	2015.02.25
2	Power Splitter	NW521	1506A	Weinschel	2014.02.26	2015.02.25
3	Attenuator 1	(n.a.)	10dB	Resnet	2014.02.26	2015.02.25
4	Attenuator 2	(n.a.)	3dB	Resnet	2014.02.26	2015.02.25
5	USB Wideband Power Sensor	MY52280010	U2021XA	Agilent	2014.02.26	2015.02.25
6	EXA Signal Analyzer	MY51440152	N9010A	Agilent	2014.02.26	2015.02.25
7	RF cable	CB01	RF01	Morlab	N/A	N/A
8	Coaxial cable	CB02	RF02	Morlab	N/A	N/A
9	SMA connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

1.4.2 Conducted Emission Test Equipments

Conducted Emission Test Equipments

No.	Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
1	Receiver	US44210471	E7405A	Agilent	2014.02.26	2015.02.25
2	LISN	812744	NSLK 8127	Schwarzbeck	2014.02.26	2015.02.25
3	Service Supplier	100448	CMU200	R&S	2014.02.26	2015.02.25
4	Pulse Limiter (20dB)	9391	VTSD 9561-D	Schwarzbeck	2014.02.26	2015.02.25
5	Coaxial cable(BNC)	CB01	EMC01	Morlab	N/A	N/A



REPORT No. : SZ14100021W01

1.4.3 Radiated Test Equipments

Radiated Test Equipments						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal.Due Date
1	System Simulator	100448	CMU200	R&S	2014.02.26	2015.02.25
2	Receiver	US44210471	E7405A	Agilent	2014.02.26	2015.02.25
3	Test Antenna - Bi-Log	9163-274	9m*6m*6m	Albatross	2014.02.26	2015.02.25
4	Test Antenna - Horn	9120D-963	VULB 9163	Schwarzbeck	2014.02.26	2015.02.25
5	Test Antenna - Horn	71688	BBHA 9120D	Schwarzbeck	2014.02.26	2015.02.25
6	Test Antenna - Loop	1519-022	HL050S7	R&S	2014.02.26	2015.02.25
7	Reject Filter	(n.a.)	BRM50702	Micro-Tronics	2014.02.26	2015.02.25
8	Coaxial cable (N male)	CB02	EMC02	Morlab	N/A	N/A
9	Coaxial cable (N male)	CB03	EMC03	Morlab	N/A	N/A

1.4.4 Climate Chamber

Climate Chamber						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Climate Chamber	2004012	HL4003T	Yinhe	2014.02.26	2015.02.25

1.4.5 Vibration Table

Vibration Table						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Vibration Table	N/A	ACT2000-S015L	CMI-COM	2014.02.26	2015.02.25

1.4.6 Anechoic Chamber

Anechoic Chamber						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Anechoic Chamber	N/A	9m*6m*6m	Albatross	2014.02.26	2015.02.25

***** END OF REPORT *****