

FCC Test Report

**Test Report
On Behalf of
Winner Wave Limited
For
Pocket
Model No.: R-1D, R-1, R-2, R-2D, R-3, R-3D
FCC ID: 2ADFS-POCKET-R-1D**

Prepared For: Winner Wave Limited
Unit 2003 Cheong Tai Commercial Building 287-289 Reclamation Street,
Kowloon, Hong Kong

Prepared By: Shenzhen HUAKE Testing Technology Co., Ltd.
1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping,
Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Date of Test: Dec. 11, 2025 ~ Dec. 31, 2025

Date of Report: Dec. 31, 2025

Report Number: HK2512116507-1E

Test Result Certification

Applicant's Name.....: Winner Wave Limited
Address: Unit 2003 Cheong Tai Commercial Building 287-289 Reclamation Street, Kowloon, Hong Kong
Manufacturer's Name: Actions Microelectronics Co., Ltd.
Address: 201, No.9 Building, Software Park, KeJiZhongEr Road, GaoXinQu, NanShan, Shenzhen, China


Product Description

Trade Mark: EZCast
Product Name.....: Pocket
Model and/or Type Reference : R-1D, R-1, R-2, R-2D, R-3, R-3D
Standards: FCC Rules and Regulations Part 15 Subpart E Section 15.407
ANSI C63.10: 2020

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAKE Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAKE Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Date of Test.....:
Date (s) of performance of tests: **Dec. 11, 2025 ~ Dec. 31, 2025**
Date of Issue.....: **Dec. 31, 2025**
Test Result.....: **Pass**

Testing Engineer



Len Liao

Technical Manager



Sliver Wan

Authorized Signatory



Jason Zhou

Table of Contents

Table of Contents	3
1. Summary	5
1.1. Test Procedures and Results	5
1.2. Information of the Test Laboratory	5
1.3. Measurement Uncertainty	6
2. EUT Description	7
2.1. General Description of EUT	7
2.2. Operation Frequency Each of Channel	8
2.3. Operation of EUT during Testing	8
2.4. Description of Test Setup	9
2.5. Description of Support Units	10
3. General Information	11
3.1. Test environment and mode	11
4. Test Results and Measurement Data	13
4.1. AC Conducted Emission	13
4.2. Maximum Conducted Output Power	17
4.3. 26dB Bandwidth and 99% Occupied Bandwidth	20
4.4. Power Spectral Density	25
4.5. Spurious Emission	30
4.6. Band Edge	42
4.7. Frequency Stability Measurement	49
4.8. Antenna Requirement	52
5. Test Setup Photos of the EUT	53
6. Photos of the EUT	55

**** Issued history ****

Revision	Description	Issued Date	Remark
Revision 1.0	Initial Test Report Release	Dec. 31, 2025	Jason Zhou

1. Summary

1.1. Test Procedures and Results

Requirement	CFR 47 Section	Result
Antenna Requirement	§15.203	PASS
AC Power Line Conducted Emission	§15.207	PASS
Maximum Conducted Output Power	§15.407(a)	PASS
26dB Emission Bandwidth& 99% Occupied Bandwidth	§15.407(a)	PASS
Power Spectral Density	§15.407(a)	PASS
Radiated Emission	§15.407(b)/15.209/15.205	PASS
Frequency Stability	§15.407(g)	PASS

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

1.2. Information of the Test Laboratory

Shenzhen HUAK Testing Technology Co., Ltd.

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

1.3. Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission	$\pm 0.37\text{dB}$
2	RF power, conducted	$\pm 3.35\text{dB}$
3	Spurious emissions, conducted	$\pm 2.20\text{dB}$
4	All emissions, radiated(<1G)	$\pm 3.90\text{dB}$
5	All emissions, radiated(>1G)	$\pm 4.28\text{dB}$
6	Temperature	$\pm 0.1^{\circ}\text{C}$
7	Humidity	$\pm 1.0\%$



HUAKE TESTING

2. EUT Description

2.1. General Description of EUT

Equipment	Pocket
Model Name	R-1D
Series Model(s)	R-1, R-2, R-2D, R-3, R-3D
Model Difference	All model's the function, software and electric circuit are the same, only with a product color and model named different. Test sample model: R-1D.
Trade Mark	EZCast
FCC ID	2ADFS-POCKET-R-1D
Operation Frequency:	IEEE 802.11a/n(HT20) 5.180GHz-5.240GHz IEEE 802.11n(HT40) 5.190GHz-5.230GHz
Modulation Technology:	IEEE 802.11a/n
Modulation Type	64QAM, 16QAM, QPSK, BPSK for OFDM
Antenna Type	Iron sheet antenna
Antenna Gain	1.93dBi
Power Source	DC5V From Type-C
Power Supply:	DC5V From Type-C
Hardware Version	V6.1
Software Version	V26140012
Note: 1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual. 2. Antenna gain Refer to the antenna specifications. 3. The cable loss data is obtained from the supplier. 4. The test results in the report only apply to the tested sample.	

2.2. Operation Frequency Each of Channel

802.11a/802.11n(HT20)		802.11n(HT40)	
Channel	Frequency	Channel	Frequency
36	5180	38	5190
40	5200	46	5230
44	5220		
48	5240		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

2.3. Operation of EUT during Testing

For 802.11a/n (HT20)


Band I (5150 - 5250 MHz)		
Channel Number	Channel	Frequency (MHz)
36	Low	5180
40	Mid	5200
48	High	5240

For 802.11n (HT40)

Band I (5150 - 5250 MHz)		
Channel Number	Channel	Frequency (MHz)
38	Low	5190
46	High	5230

2.4. Description of Test Setup

Operation of EUT during AC Conducted and Radiation testing:

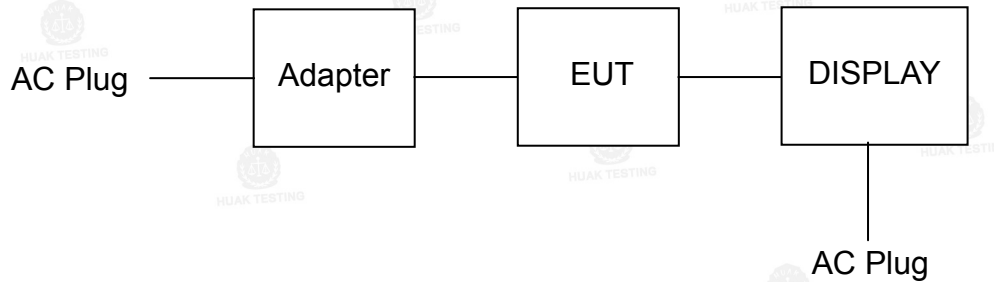

Operation of EUT during RF Conducted testing:



The sample was placed (0.8m below 1GHz, 1.5m above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages. The worst case is X position.



2.5. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Trade Mark	Model/Type No.	Specification	Remark
1	Pocket	EZCast	R-1D	N/A	EUT
2	USB Cable	N/A	N/A	Length: 1m	
3	Adapter	N/A	ICP12-050-2000B	Input: AC100-240V, 50/60Hz, 0.3A Output: DC5V, 2.0A, 10W	
4	DISPLAY	AOC	U2879VF	N/A	

Note:


1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
3. For conducted measurements (Output Power, 26db Bandwidth and 99% Occupied Bandwidth, Power Spectral Density, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.

3. General Information


3.1. Test environment and mode

Operating Environment:	
Temperature:	25.0 °C
Humidity:	56 % RH
Atmospheric Pressure:	1010 mbar
Test Mode:	
Engineering mode:	Keep the EUT in continuous transmitting by select channel and modulations
We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:	
Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.	
Mode	Data rate
802.11a	6 Mbps
802.11n(HT20)	MCS0
802.11n(HT40)	MCS0
Final Test Mode:	
Operation mode:	Keep the EUT in continuous transmitting with modulation
Mode Test Duty Cycle:	
Mode	Duty Cycle
802.11a	0.9645
802.11n(HT20)	0.9549
802.11n(HT40)	0.9275
Test plots as follows:	


802.11a

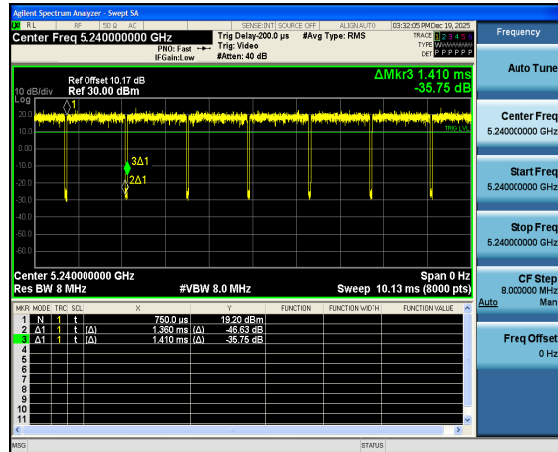

802.11n(HT20)

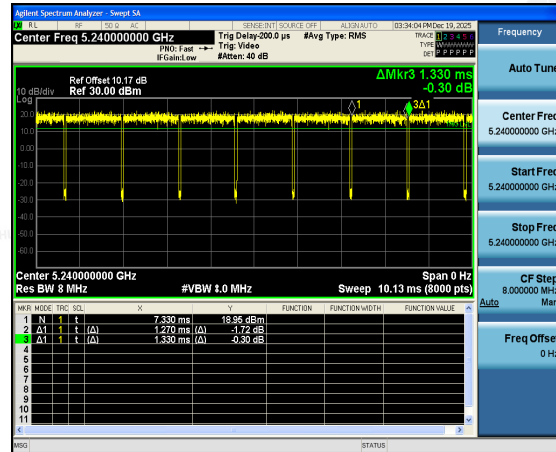

802.11n(HT40)

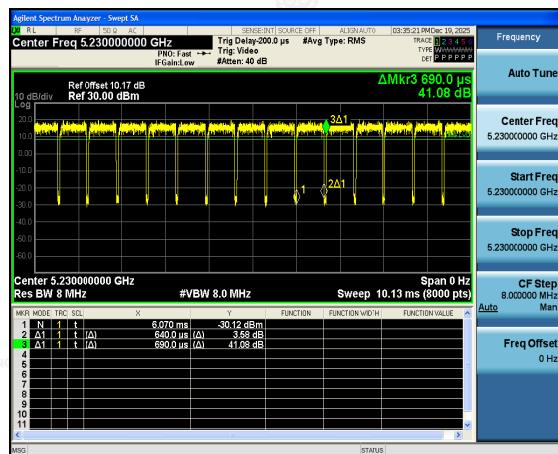

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAKE Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com
Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



4. Test Results and Measurement Data

4.1. AC Conducted Emission

4.1.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.207		
Test Method:	ANSI C63.10: 2020		
Frequency Range:	150 kHz to 30 MHz		
Receiver Setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto		
Limits:	Frequency range (MHz)		Limit (dBuV)
			Quasi-peak
			Average
	0.15-0.5		66 to 56*
	0.5-5		56
	5-30		60
			50
Test Setup:	Reference Plane 40cm E.U.T AC power 80cm LISN Filter AC power EMI Receiver Test table/Insulation plane Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m		
Test Mode:	Tx Mode		
Test Procedure:	1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2020 on conducted measurement.		
Test Result:	PASS		

4.1.2. Test Instruments

Conducted Emission Shielding Room Test Site (843)

Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Receiver	R&S	ESR	HKE-005	Feb. 19, 2025	Feb. 18, 2026
LISN	R&S	ENV216	HKE-002	Feb. 19, 2025	Feb. 18, 2026
LISN	R&S	ENV216	HKE-059	Feb. 19, 2025	Feb. 18, 2026
Coax cable (9KHz-30MHz)	Times	381806-002	N/A	Feb. 19, 2025	Feb. 18, 2026
EMI Test Software	Tonscend	JS32-CE 2.5.0.6	HKE-081	N/A	N/A
10dB Attenuator	Schwarzbeck	VTSD9561F	HKE-153	Feb. 19, 2025	Feb. 18, 2026


Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



4.1.3. Test data

All modes have been tested, only the worst result was reported as below:

Test Specification: Line

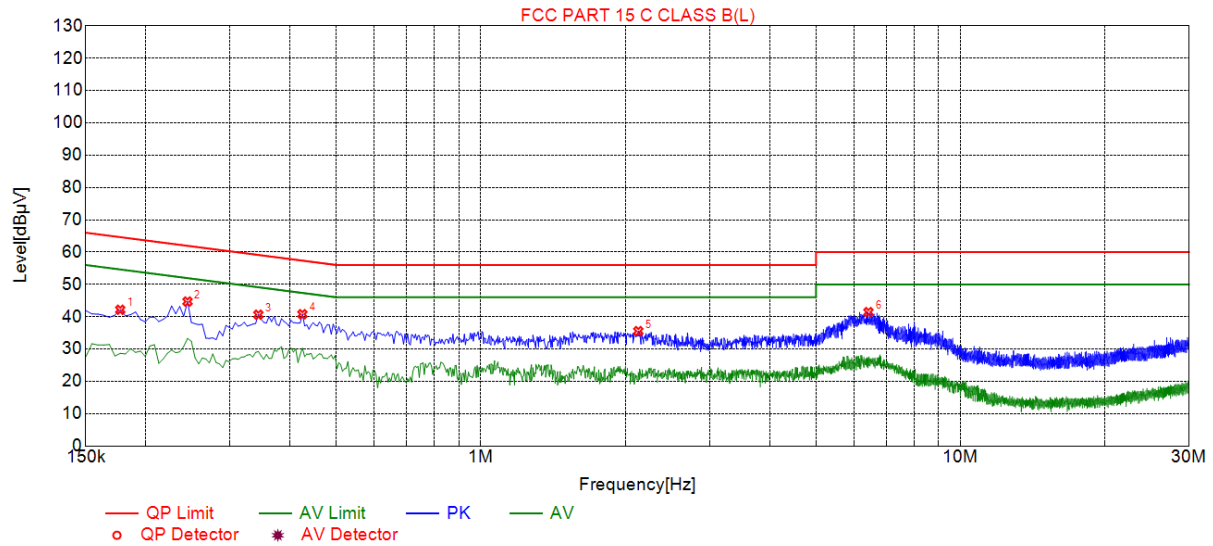

Suspected List


NO.	Freq. [MHz]	Level [dBμV]	Factor [dB]	Limit [dBμV]	Margin [dB]	Reading [dBμV]	Detector	Type
1	0.1770	42.15	19.71	64.74	22.59	22.44	PK	L
2	0.2445	44.70	19.83	62.06	17.36	24.87	PK	L
3	0.3435	40.62	19.83	59.14	18.52	20.79	PK	L
4	0.4245	40.78	19.84	57.39	16.61	20.94	PK	L
5	2.1300	35.54	20.16	56.00	20.46	15.38	PK	L
6	6.4320	41.43	20.40	60.00	18.57	21.03	PK	L

Remark: Margin = Limit – Level

Correction factor = Cable lose + LISN insertion loss

Level=Test receiver reading + correction factor

Test Specification: Neutral

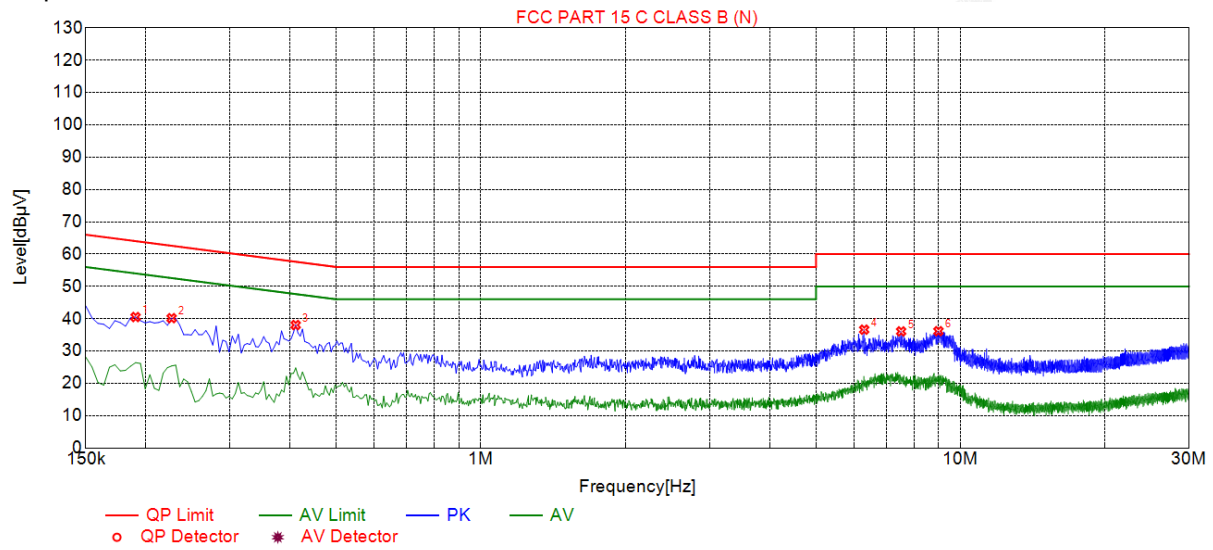

Suspected List

NO.	Freq. [MHz]	Level [dBμV]	Factor [dB]	Limit [dBμV]	Margin [dB]	Reading [dBμV]	Detector	Type
1	0.1905	40.52	19.64	64.10	23.58	20.88	PK	N
2	0.2265	40.17	19.64	62.69	22.52	20.53	PK	N
3	0.4110	38.05	19.70	57.67	19.62	18.35	PK	N
4	6.3015	36.61	20.43	60.00	23.39	16.18	PK	N
5	7.5255	36.08	20.58	60.00	23.92	15.50	PK	N
6	9.0015	36.13	20.81	60.00	23.87	15.32	PK	N

Remark: Margin = Limit – Level

Correction factor = Cable lose + LISN insertion loss

Level=Test receiver reading + correction factor



HUAKE TESTING

4.2. Maximum Conducted Output Power

4.2.1. Test Specification

Test Requirement:	FCC Part15 E Section 15.407(a)	
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v02.r01 Section E	
Limit:	Frequency Band (MHz)	Limit
	5150-5250	250mW for client devices
Test Setup:	 RF automatic control unit EUT	
Test Mode:	Transmitting mode with modulation	
Test Procedure:	1. The testing follows the Measurement Procedure of KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section E, 3, a. 2. The RF output of EUT was connected to the power meter by RF cable. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Measure the conducted output power and record the results in the test report.	
Test Result:	PASS	
Remark:	Conducted output power= measurement power $+10\log(1/x)$ X is duty cycle=1, so $10\log(1/1)=0$ Conducted output power= measurement power	



4.2.2. Test Instruments

RF Test Room					
Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Spectrum analyzer	Agilent	N9020A	HKE-025	Feb. 19, 2025	Feb. 18, 2026
Spectrum analyzer	Agilent	N9020A	HKE-117	Feb. 19, 2025	Feb. 18, 2026
Power meter	Agilent	E4419B	HKE-085	Feb. 19, 2025	Feb. 18, 2026
Power Sensor	Agilent	E9300A	HKE-086	Feb. 19, 2025	Feb. 18, 2026
RF cable	Times	1-40G	HKE-034	Feb. 19, 2025	Feb. 18, 2026
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Feb. 19, 2025	Feb. 18, 2026
RF Test Software	Tonscend	JS1120-3 Version 3.5.39	HKE-083	N/A	N/A

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

4.2.3. Test Data

Configuration Band I (5150 - 5250 MHz)				
Mode	Test Channel	Maximum Conducted Output Power (dBm)	FCC Limit (dBm)	Result
802.11a	CH36	7.30	24	PASS
802.11a	CH40	7.43	24	PASS
802.11a	CH48	7.52	24	PASS
802.11n(HT20)	CH36	7.94	24	PASS
802.11n(HT20)	CH40	8.20	24	PASS
802.11n(HT20)	CH48	7.79	24	PASS
802.11n(HT40)	CH38	8.21	24	PASS
802.11n(HT40)	CH46	8.65	24	PASS
Note: 1.The test results including the cable lose.				



4.3. 26dB Bandwidth and 99% Occupied Bandwidth

4.3.1. Test Specification

Test Requirement:	47 CFR Part 15C Section 15.407
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section C
Limit:	No restriction limits
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section C. 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Make the measurement with the spectrum analyzer's resolution bandwidth $RBW = 1\% \text{ EBW}$, $VBW \geq 3RBW$, In order to make an accurate measurement. 4. Measure and record the results in the test report.
Test Result:	PASS

4.3.2. Test Instruments

RF Test Room					
Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Spectrum analyzer	Agilent	N9020A	HKE-025	Feb. 19, 2025	Feb. 18, 2026
Spectrum analyzer	Agilent	N9020A	HKE-117	Feb. 19, 2025	Feb. 18, 2026
RF cable	Times	1-40G	HKE-034	Feb. 19, 2025	Feb. 18, 2026
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Feb. 19, 2025	Feb. 18, 2026
RF Test Software	Tonscend	JS1120-3 Version 3.5.39	HKE-083	N/A	N/A

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

4.3.3. Test Data


Mode	Test Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	Verdict
802.11a	CH36	5180	19.34	PASS
802.11a	CH40	5200	19.54	PASS
802.11a	CH48	5240	19.64	PASS
802.11n(HT20)	CH36	5180	20.33	PASS
802.11n(HT20)	CH40	5200	20.31	PASS
802.11n(HT20)	CH48	5240	20.43	PASS
802.11n(HT40)	CH38	5190	38.07	PASS
802.11n(HT40)	CH46	5230	37.98	PASS

Test plots as follows:



HUAKE TESTING

Band I (5150 – 5250MHz)

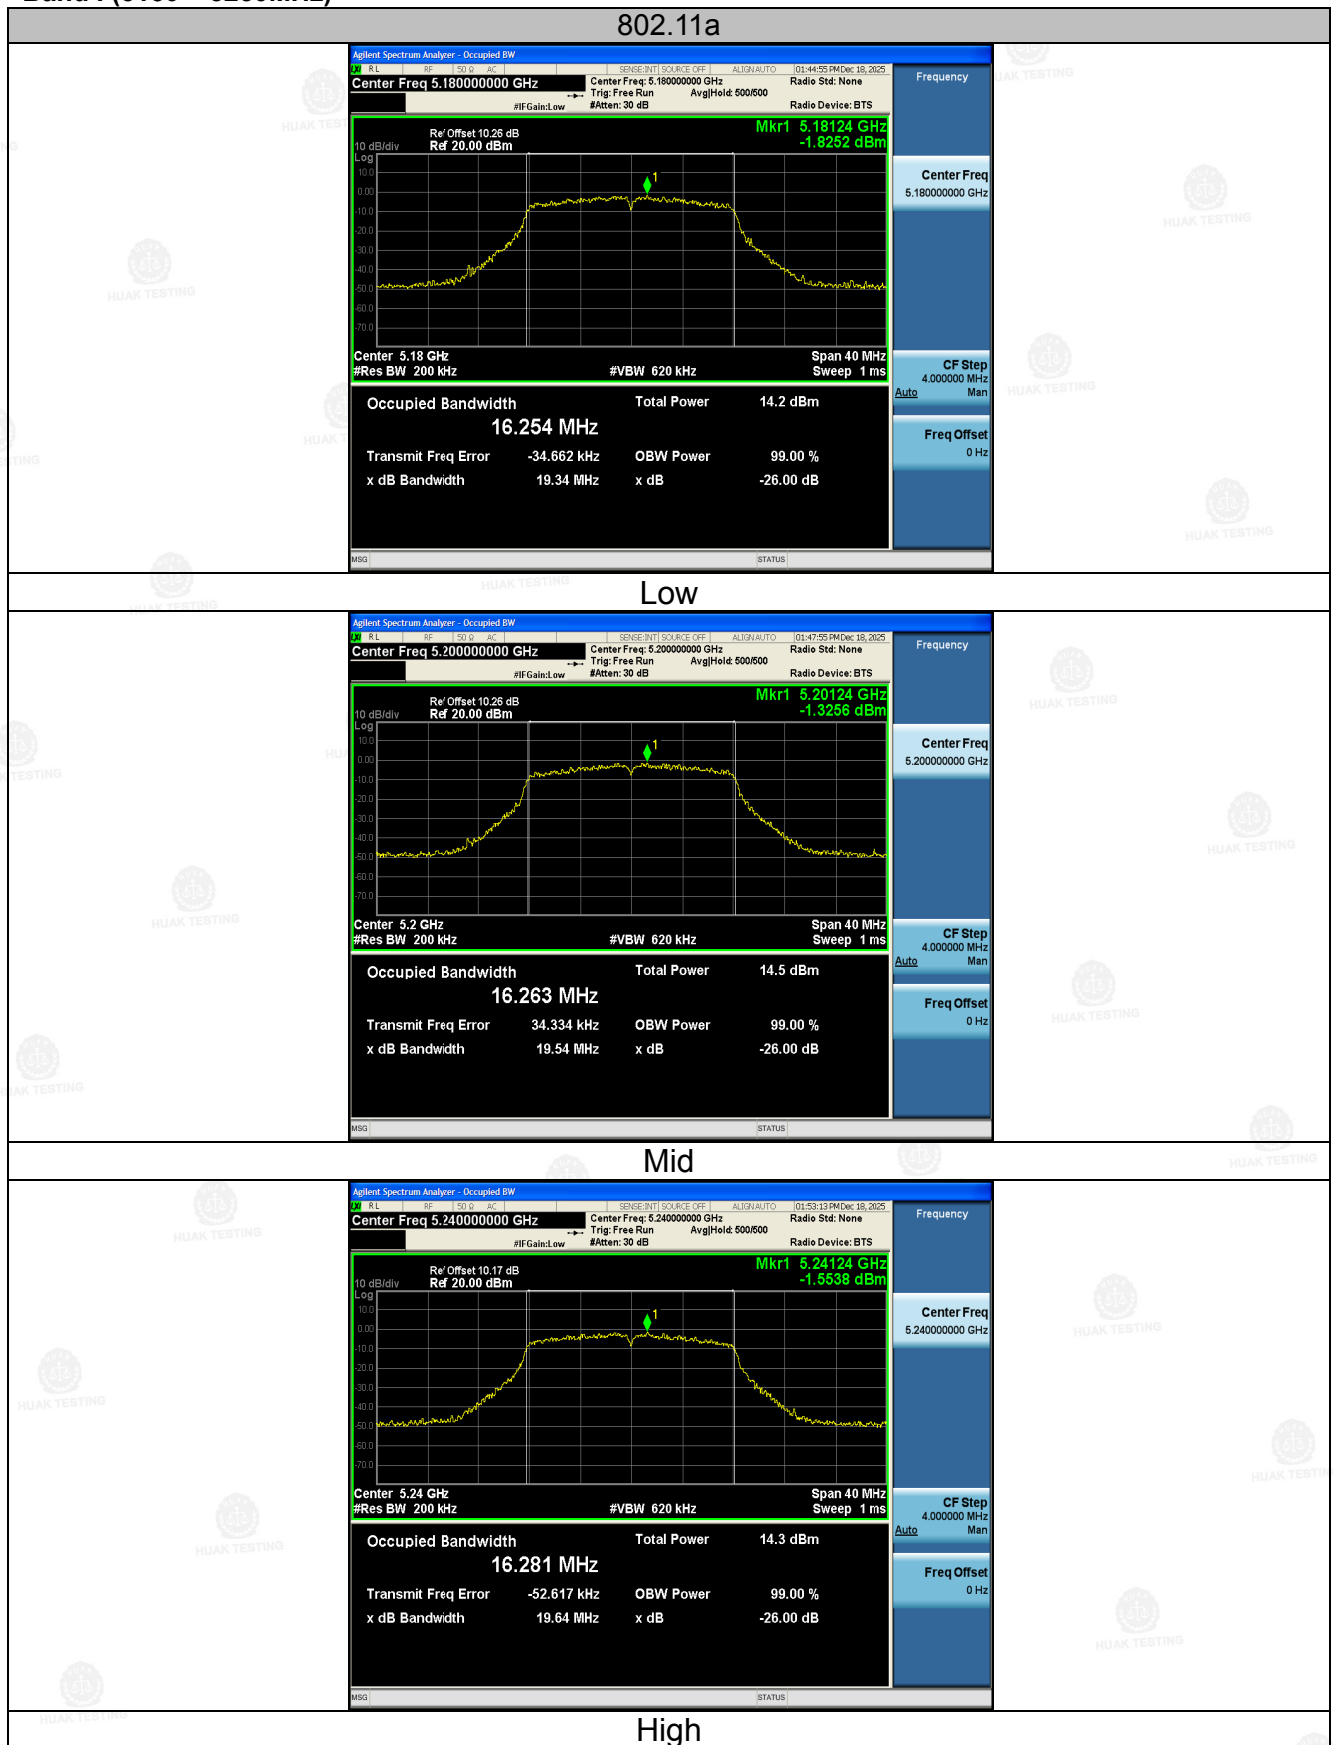

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAKE Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com
Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAKE Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com
 Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAKE Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com
 Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

4.4. Power Spectral Density

4.4.1. Test Specification

Test Requirement:	FCC Part15 E Section 15.407 (a)
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section F
Limit:	≤11.00dBm/MHz for Band I 5150MHz-5250MHz
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. Set the spectrum analyzer or EMI receiver span to view the entire emission bandwidth. 2. Set RBW = 1 MHz, VBW ≥ 3*RBW, Sweep time = Auto, Detector = RMS. 3. Allow the sweeps to continue until the trace stabilizes. 4. Use the peak marker function to determine the maximum amplitude level. 5. The E.I.R.P spectral density used radiated test method. At a test site that has been validated using the procedures of ANSI C63.4 or the latest CISPR 16-1-4 for measurements above 1 GHz, so as to simulate a near free-space environment.
Test Result:	PASS

4.4.2. Test Instruments

RF Test Room					
Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Spectrum analyzer	Agilent	N9020A	HKE-025	Feb. 19, 2025	Feb. 18, 2026
Spectrum analyzer	Agilent	N9020A	HKE-117	Feb. 19, 2025	Feb. 18, 2026
RF cable	Times	1-40G	HKE-034	Feb. 19, 2025	Feb. 18, 2026
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Feb. 19, 2025	Feb. 18, 2026
RF Test Software	Tonscend	JS1120-3 Version 3.5.39	HKE-083	N/A	N/A

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

4.4.3. Test Data


Mode	Test Channel	Level [dBm/MHz]	Limit (dBm/MHz)	Result
802.11a	CH36	3.24	11	PASS
802.11a	CH40	3.17	11	PASS
802.11a	CH48	3.45	11	PASS
802.11n(HT20)	CH36	3.41	11	PASS
802.11n(HT20)	CH40	4.99	11	PASS
802.11n(HT20)	CH48	3.61	11	PASS
802.11n(HT40)	CH38	1.83	11	PASS
802.11n(HT40)	CH46	3.42	11	PASS

Note: Instrument attenuation and cable loss See test diagram




HUAKE TESTING

Test plots as follows:
Band I (5150 – 5250MHz)

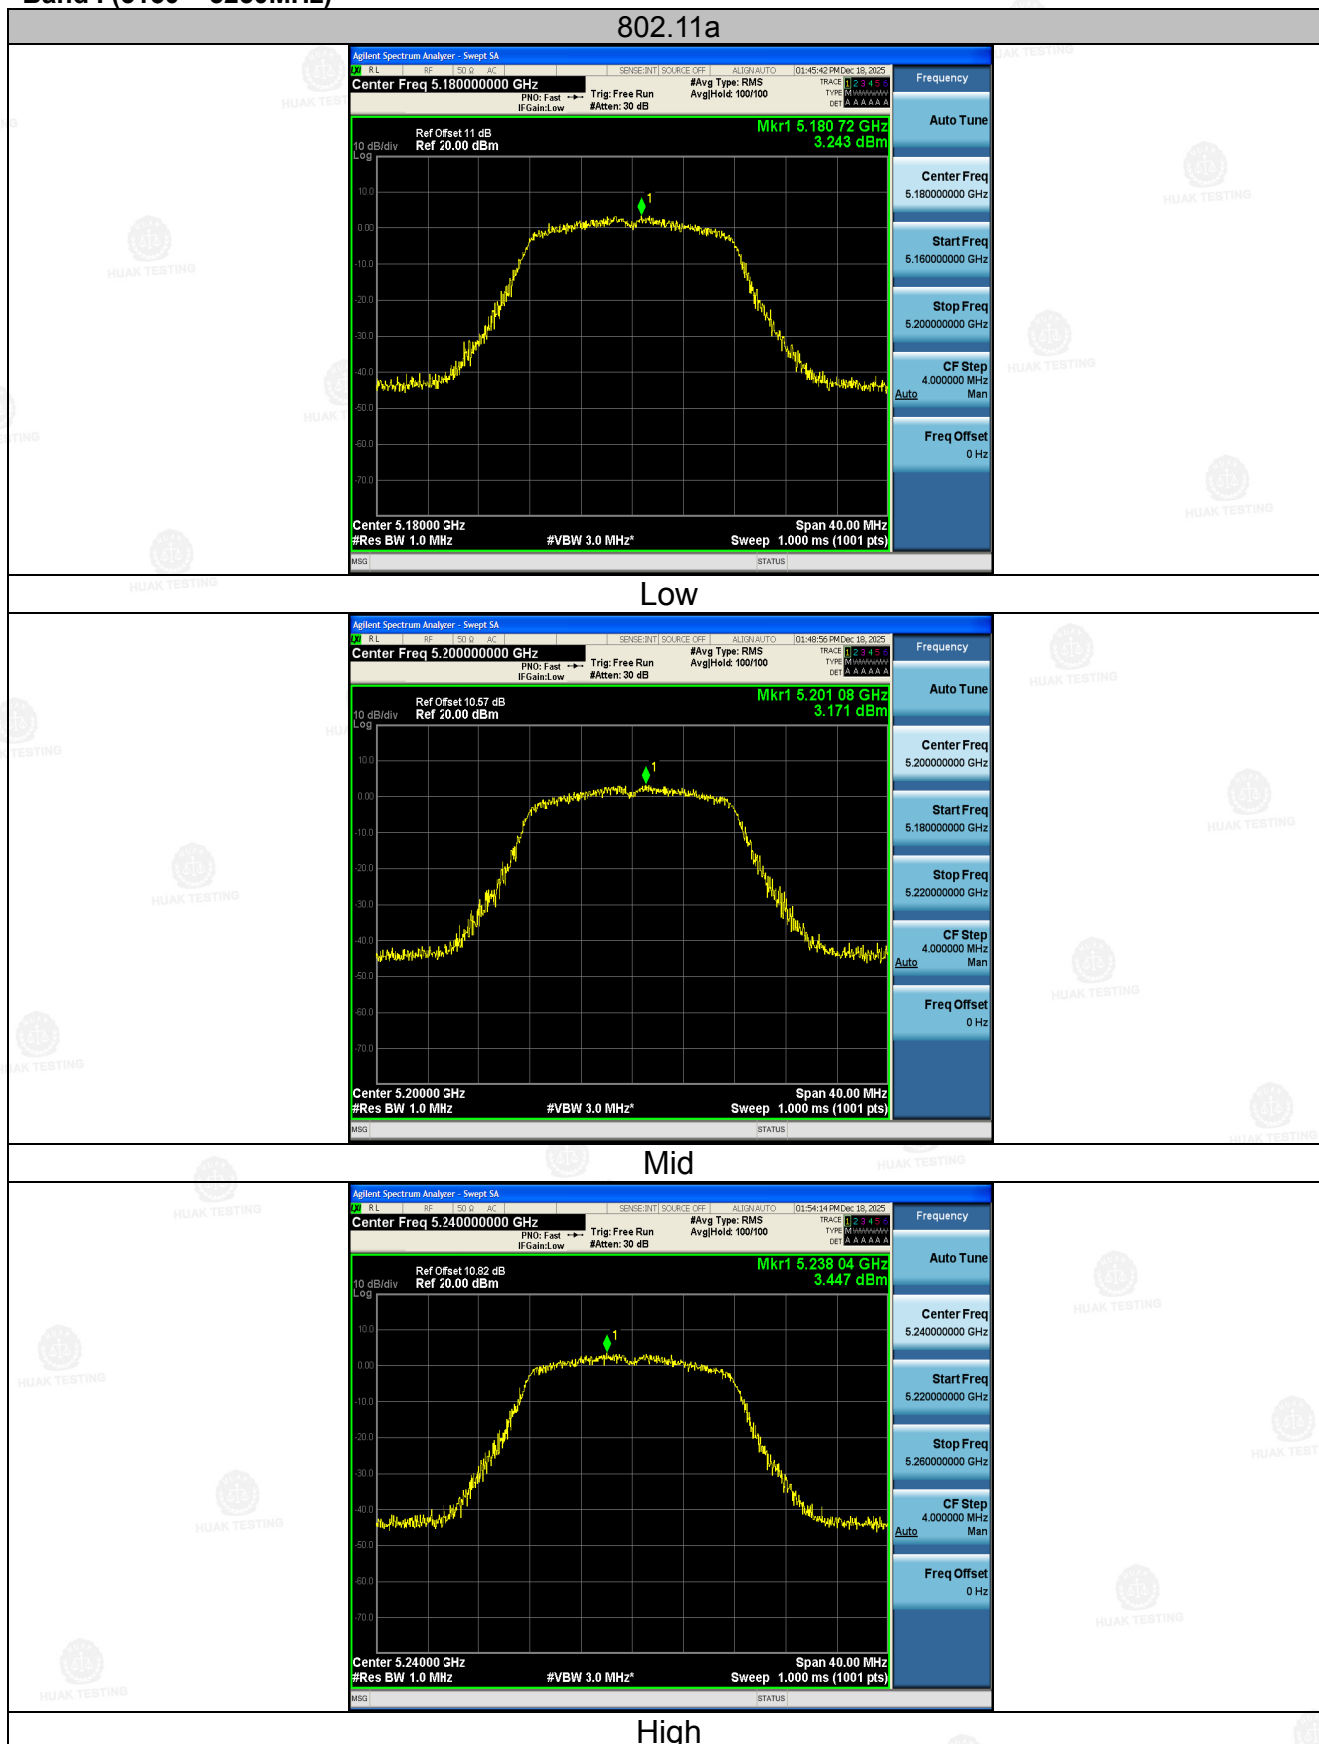


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAKE Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com
Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

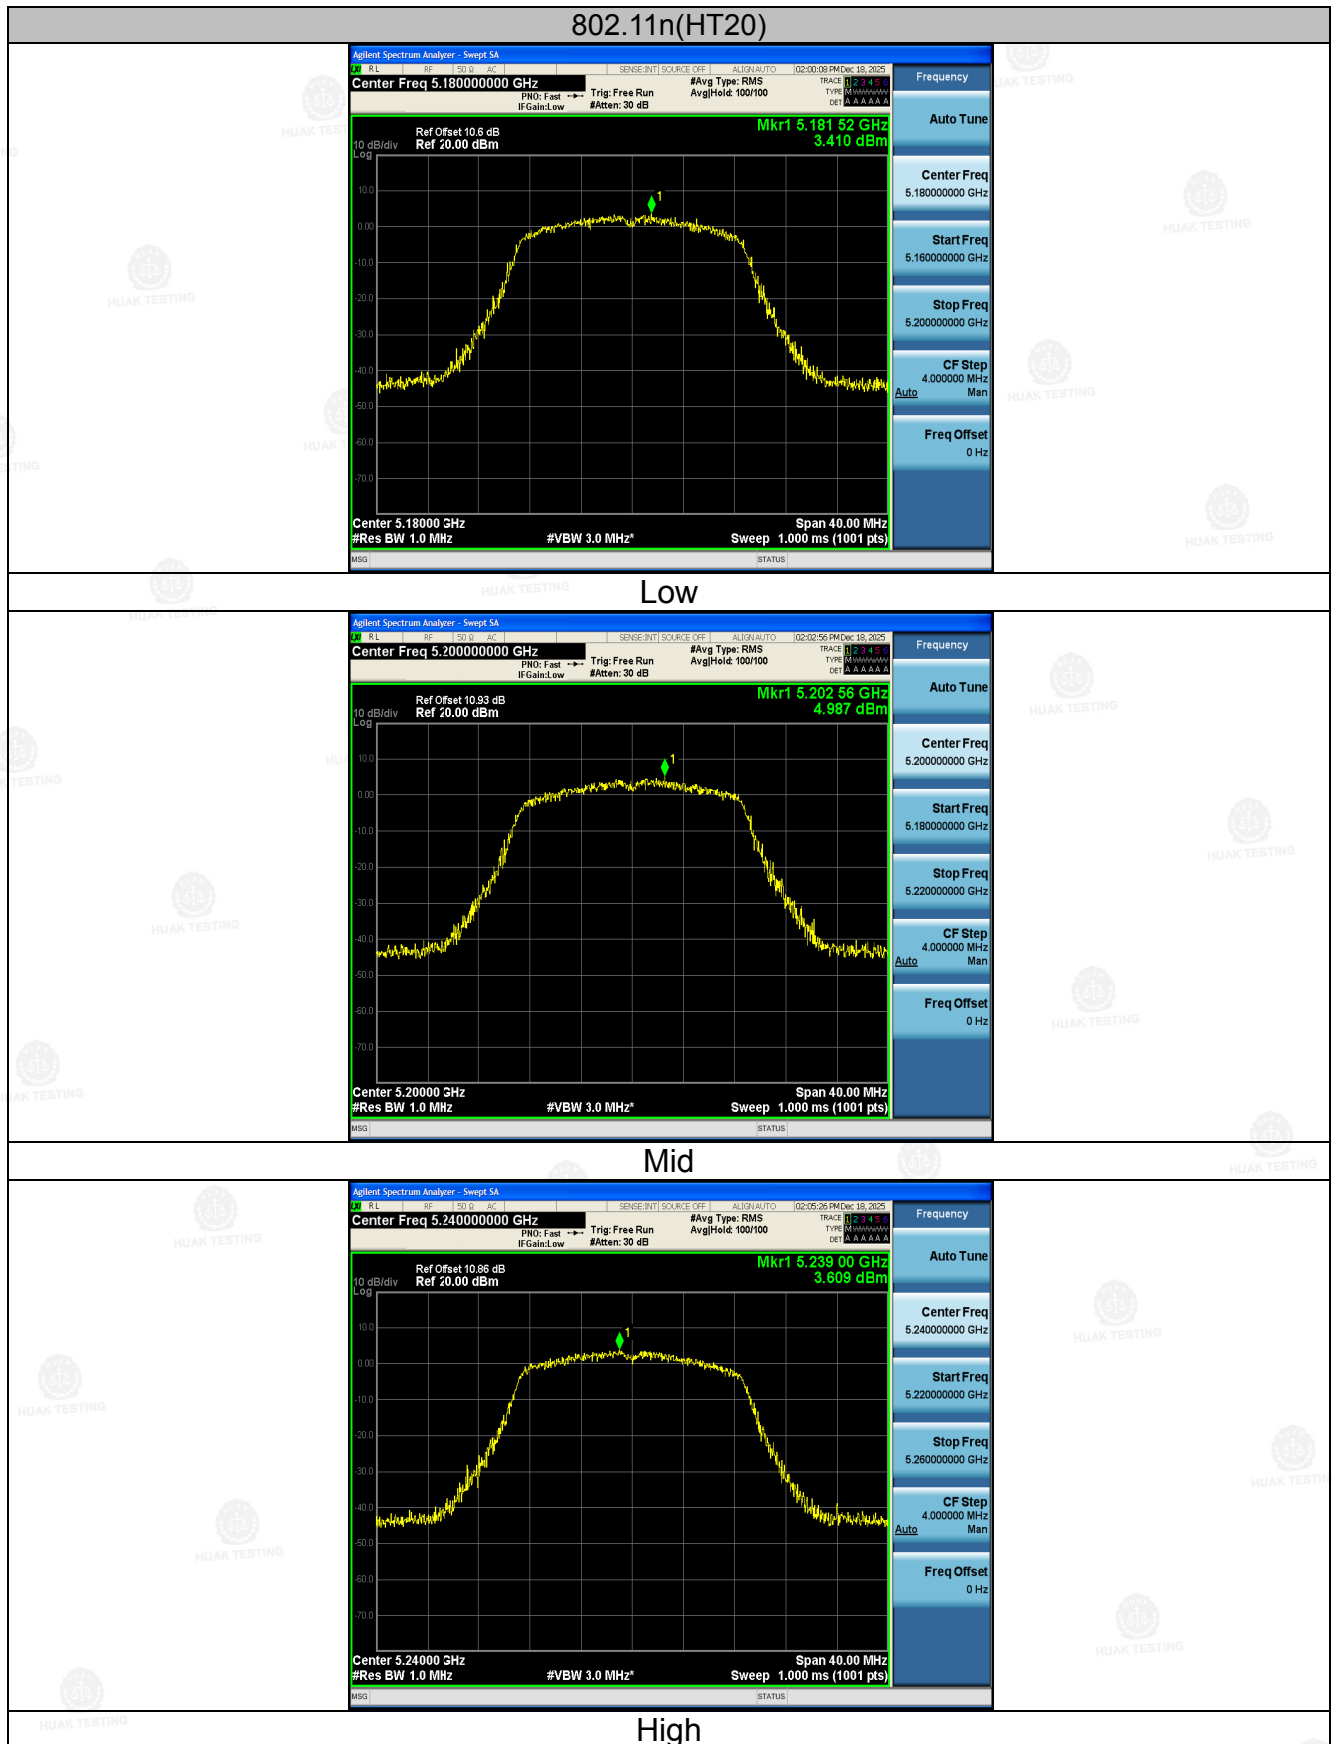

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

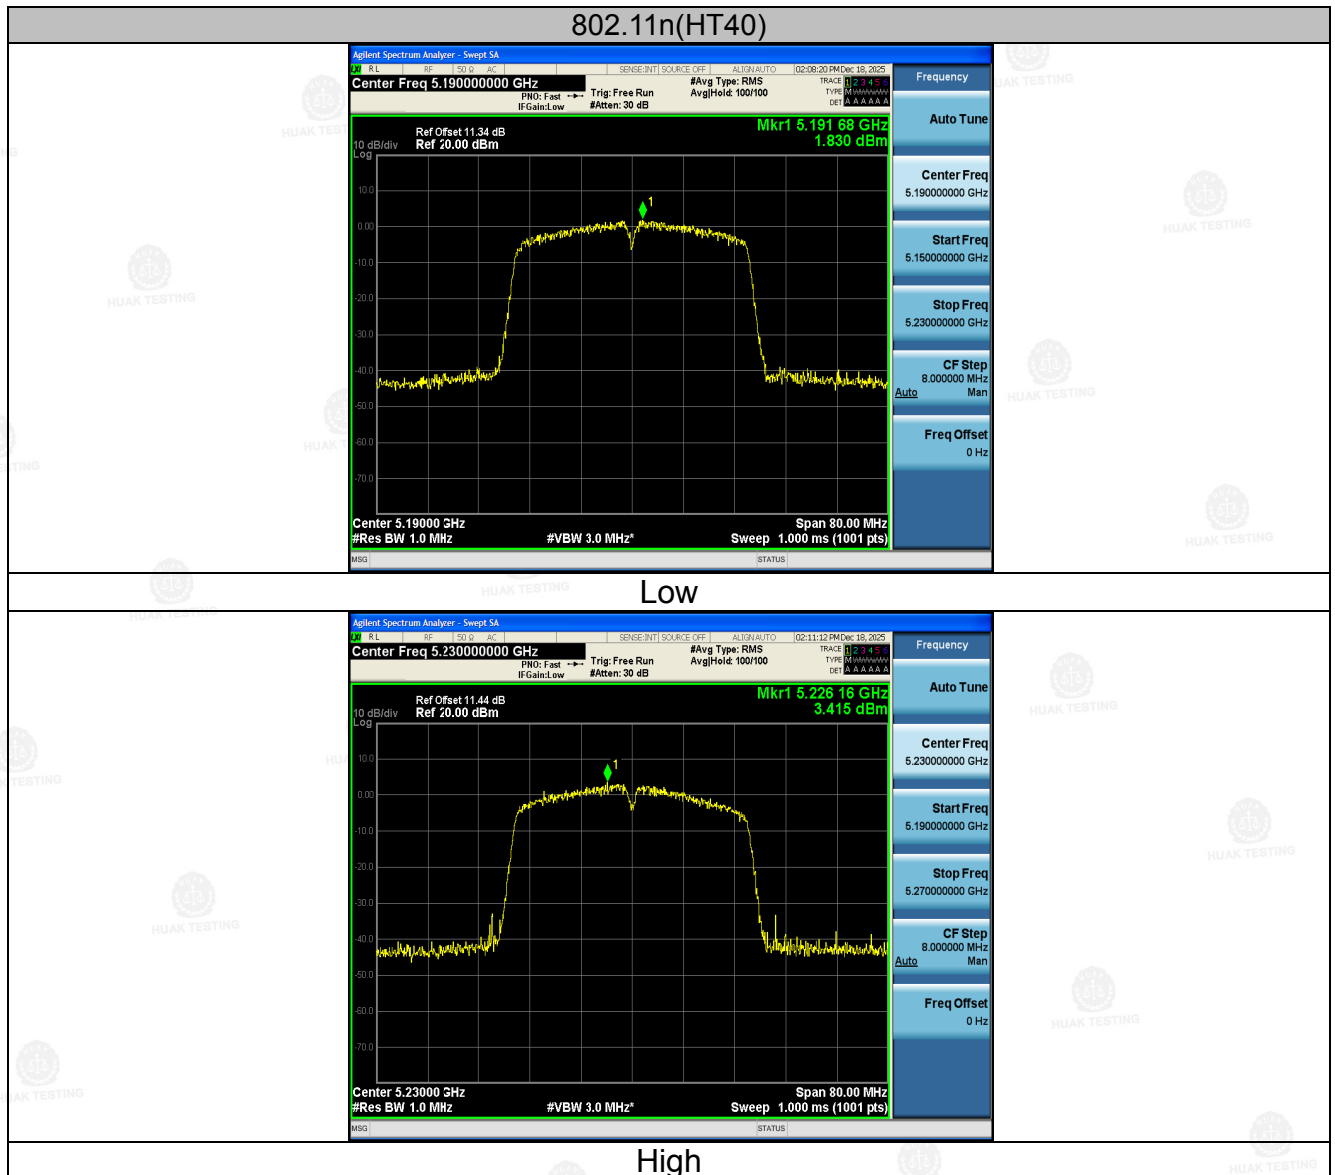

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAKE Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com
 Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China