

FCC PART 27
FCC PART 22H, PART 24E
MEASUREMENT AND TEST REPORT

For

NXL, LLC.

3355 Bald Mountain Rd, Auburn Hills, Michigan, United States

FCC ID: 2ADM8-MASC09T

Report Type: Original Report	Product Type: C09T BY MASON
Test Engineer: Rocky Kang	<i>Rocky Kang</i>
Report Number: RSZ151110015-00D	
Report Date: 2015-11-30	
Reviewed By: RF Engineer	<i>Candy Li</i>
Prepared By:	Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
JUSTIFICATION	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS	7
FCC §1.1307 & §2.1093& §27.52 - RF EXPOSURE	8
APPLICABLE STANDARD	8
TEST RESULT	8
FCC §2.1047 - MODULATION CHARACTERISTIC	9
FCC § 2.1046, § 22.913 (A) & § 24.232 (C) & § 27.50 - RF OUTPUT POWER.....	10
APPLICABLE STANDARDS.....	10
TEST PROCEDURE	10
TEST EQUIPMENT LIST AND DETAILS.....	11
TEST DATA	11
FCC §2.1049, §22.917, §22.905 & §24.238 & §27.53 - OCCUPIED BANDWIDTH.....	19
APPLICABLE STANDARDS.....	19
TEST PROCEDURE	19
TEST EQUIPMENT LIST AND DETAILS.....	19
TEST DATA	19
FCC §2.1051, §22.917(A) & §24.238(A) & §27.53 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS ..	29
APPLICABLE STANDARDS.....	29
TEST PROCEDURE	29
TEST EQUIPMENT LIST AND DETAILS.....	29
TEST DATA	29
FCC §2.1053, §22.917 & §24.238 & §27.53 - SPURIOUS RADIATED EMISSIONS	37
APPLICABLE STANDARDS.....	37
TEST PROCEDURE	37
TEST EQUIPMENT LIST AND DETAILS.....	38
TEST DATA	38
FCC §22.917(A) & §24.238(A) & §27.53 - BAND EDGES.....	41
APPLICABLE STANDARDS.....	41
TEST PROCEDURE	41
TEST EQUIPMENT LIST AND DETAILS.....	41
TEST DATA	41
FCC §2.1055, §22.355 & §24.235 & §27.54 - FREQUENCY STABILITY.....	55

APPLICABLE STANDARDS.....55

TEST PROCEDURE55

TEST EQUIPMENT LIST AND DETAILS.....56

TEST DATA56

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *NXL, LLC.* 's product, model number: *MASC09T (FCC ID: 2ADM8-MASC09T)* or the "EUT" in this report was a *C09T BY MASON*, which was measured approximately: 14.3 cm (L) × 7.4 cm (W) × 1.1 cm (H), rated with input voltage: DC 3.8 V rechargeable Li-ion battery or DC 5.0 V from adapter.

Adapter Information:

Input AC: 100-240V, 50/60Hz, 0.3A.

Output DC: 5V, 1A.

**All measurement and test data in this report was gathered from production sample serial number: 1507072. (Assigned by Shenzhen BACL). The EUT supplied by the applicant was received on 2015-11-10.*

Objective

This type approval report is prepared on behalf of *NXL, LLC.* in accordance with Part 2-Subpart J, Part 22-Subpart H, Part 27 of the Federal Communication Commissions rules and Part 24-Subpart E of the Federal Communication Commissions rules.

The objective is to determine the compliance of the EUT with FCC rules for output power, modulation characteristic, occupied bandwidth, and spurious emission at antenna terminal, spurious radiated emission, frequency stability and band edge.

Related Submittal(s)/Grant(s)

FCC Part 15B JBP, Part 15.247 DSS & DTS submissions with FCC ID: 2ADM8-MASC09T.

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

Part 22 Subpart H - Public Mobile Services

Part 24 Subpart E - Personal Communication Services

Part 27 – Miscellaneous wireless communications services

Applicable Standards: TIA/EIA 603-D, ANSI C63.4-2014.

All radiated and conducted emissions measurements were performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement uncertainty with radiated emission is 5.91 dB for 30MHz-1GHz and 4.92 dB for above 1GHz, 1.95dB for conducted measurement.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp.(Shenzhen) to collect test data is located in the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on October 31, 2103. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Justification

The EUT was configured for testing according to TIA/EIA-603-D.

The final qualification test was performed with the EUT operating at normal mode.


Equipment Modifications

No modifications were made to the EUT.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891

Block Diagram of Test Setup

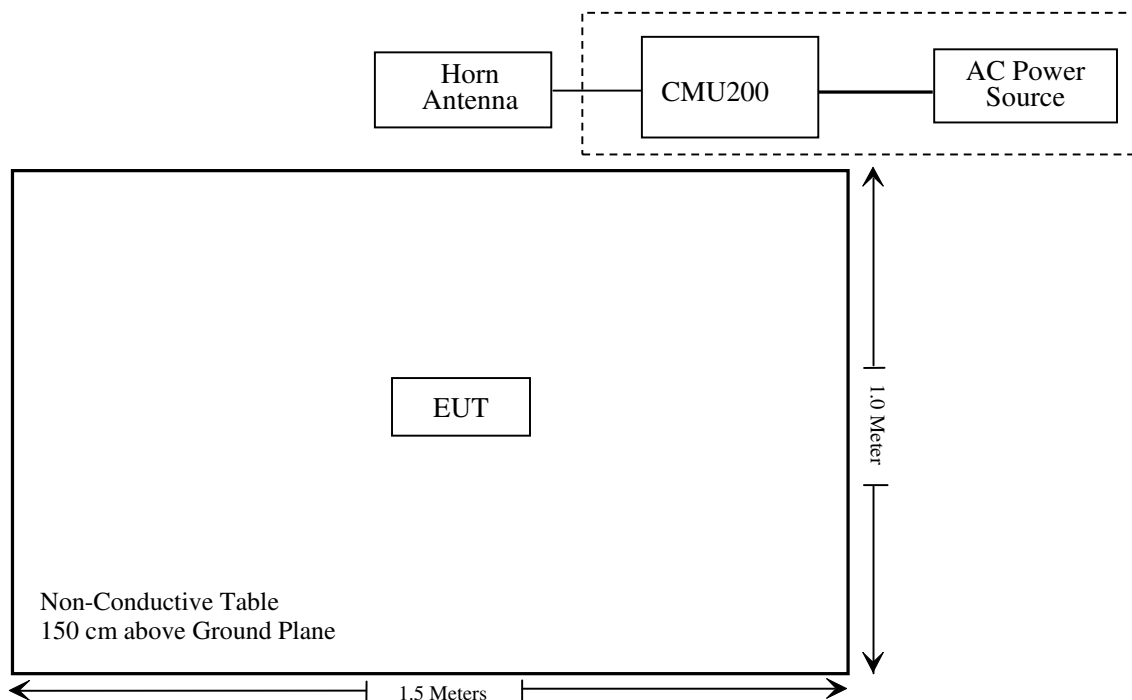

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1307, §2.1093	RF Exposure (SAR)	Compliance*
§2.1046; § 22.913 (a); § 24.232 (c) ; §27.50 (d) (i)	RF Output Power	Compliance
§ 2.1047	Modulation Characteristics	Not Applicable
§ 2.1049; § 22.905 § 22.917; § 24.238 §27.53 (c)	Bandwidth	Compliance
§ 2.1051; §27.53(c) (g) § 22.917 (a); § 24.238 (a)	Spurious Emissions at Antenna Terminal	Compliance
§ 2.1053; §27.53 (c) (g) § 22.917 (a); § 24.238 (a)	Field Strength of Spurious Radiation	Compliance
§ 22.917 (a); § 24.238 (a) §27.53 (c) (g)	Out of band emission, Band Edge	Compliance
§ 2.1055; §27.54 § 22.355; § 24.235	Frequency stability vs. temperature Frequency stability vs. voltage	Compliance

Note: * Please refer to SAR report released by BACL, report number: RSZ151110015-20.

FCC §1.1307 & §2.1093& §27.52 - RF EXPOSURE

Applicable Standard

FCC§1.1307 and §2.1093.

Test Result

Compliance, please refer to the SAR report: RSZ151110015-20.

FCC §2.1047 - MODULATION CHARACTERISTIC

According to FCC § 2.1047(d) , Part 22H & 24E, Part 27 there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

FCC § 2.1046, § 22.913 (a) & § 24.232 (c) & § 27.50 - RF OUTPUT POWER**Applicable Standards**


According to FCC §2.1046 and §22.913 (a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

According to FCC §2.1046 and §24.232 (C), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications..

According to §27.50, the maximum EIRP must not exceed 1Watts (30 dBm).

Test Procedure*Conducted method:*

The RF output of the transmitter was connected to the wireless test set and the spectrum analyzer through sufficient attenuation.

*Radiated method:*

TIA 603-D section 2.2.17

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2015-11-03	2016-11-03
Sunol Sciences	Bi-log Antenna	JB1	A040904-2	2014-12-07	2017-12-06
HP	Synthesized Sweeper	8341B	2624A00116	2015-06-03	2016-06-03
COM POWER	Dipole Antenna	AD-100	041000	2015-08-18	2016-08-18
A.H. System	Horn Antenna	SAS-200/571	135	2013-02-11	2016-02-10
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2014-12-11	2015-12-11
Sunol Sciences	Horn Antenna	DRH-118	A052304	2014-12-01	2015-11-30
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891	2015-11-23	2016-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	24 °C
Relative Humidity:	48 %
ATM Pressure:	101.0kPa

The testing was performed by Rocky Kang on 2015-11-26.

Conducted Power**Cellular Band (Part 22H)**

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)
GSM	128	824.2	32.07	38.45
	190	836.6	32.16	38.45
	251	848.8	32.10	38.45

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	
GPRS	128	824.2	32.04	31.23	29.36	28.05	38.45
	190	836.6	32.07	31.24	29.37	28.04	38.45
	251	848.8	32.09	31.22	29.28	27.93	38.45

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	
EGPRS	128	824.2	28.39	27.78	26.74	26.01	38.45
	190	836.6	28.33	27.70	26.60	25.83	38.45
	251	848.8	28.19	27.54	26.36	25.55	38.45

Mode	Test Condition	Test Mode	3GPP Sub Test	Average Output Power (dBm)		
				Low Frequency	Middle Frequency	High Frequency
WCDMA (Band V)	Normal	RMC12.2k		22.45	22.26	22.10
		Rel 6 HSDPA	1	21.41	21.14	21.06
			2	21.41	21.15	21.03
			3	21.43	21.13	21.03
			4	21.45	21.16	21.05
		Rel 6 HSUPA	1	21.41	21.21	21.07
			2	21.42	21.15	21.08
			3	21.42	21.24	21.04
			4	21.41	21.23	21.09
			5	21.43	21.22	21.06

PCS Band (Part 24E)

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)
GSM	512	1850.2	28.71	33
	661	1880.0	28.70	33
	810	1909.8	28.45	33

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	
GPRS	512	1850.2	28.75	27.98	26.24	25.09	33
	661	1880.0	28.75	27.94	26.14	24.98	33
	810	1909.8	28.49	27.65	25.80	24.61	33

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	
EGPRS	512	1850.2	24.07	23.18	21.67	20.81	33
	661	1880.0	23.41	22.47	20.88	20.02	33
	810	1909.8	22.50	21.55	19.85	18.96	33

Mode	Test Condition	Test Mode	3GPP Sub Test	Average Output Power (dBm)		
				Low Frequency	Middle Frequency	High Frequency
WCDMA (Band II)	Normal	RMC12.2k		21.39	20.93	20.78
		Rel 6 HSDPA	1	20.55	19.76	19.66
			2	20.31	19.65	19.76
			3	20.32	19.68	19.68
			4	20.31	19.67	19.67
		Rel 6 HSUPA	1	20.53	19.74	19.78
			2	20.55	19.65	19.66
			3	20.54	19.84	19.62
			4	20.53	19.75	19.65
			5	20.52	19.56	19.67

AWS Band (Part 27)

Mode	Test Condition	Test Mode	3GPP Sub Test	Average Output Power (dBm)		
				Low Frequency	Middle Frequency	High Frequency
WCDMA (Band IV)	Normal	RMC12.2k		21.56	21.16	21.20
		Rel 6 HSDPA	1	20.59	20.09	20.24
			2	20.42	20.08	20.25
			3	20.43	20.05	20.25
			4	20.44	20.09	20.27
		Rel 6 HSUPA	1	20.54	20.13	20.19
			2	20.47	20.19	20.12
			3	20.45	20.18	20.17
			4	20.46	20.14	20.14
			5	20.53	20.11	20.13

Peak-to-average ratio (PAR)**Cellular Band**

Mode	Channel	PAR (dB)	Limit (dB)
GSM	Low	0.22	13
	Middle	0.21	13
	High	0.21	13

Mode	Channel	PAR (dB)	Limit (dB)
EGPRS	Low	0.24	13
	Middle	0.23	13
	High	0.24	13

Mode	Channel	PAR (dB)	Limit (dB)
WCDMA (BPSK)	Low	3.51	13
	Middle	3.47	13
	High	3.42	13
HSDPA (16QAM)	Low	3.53	13
	Middle	3.49	13
	High	3.48	13
HSUPA (BPSK)	Low	3.46	13
	Middle	3.46	13
	High	3.44	13

PCS Band

Mode	Channel	PAR (dB)	Limit (dB)
GSM	Low	0.21	13
	Middle	0.23	13
	High	0.23	13

Mode	Channel	PAR (dB)	Limit (dB)
EGPRS	Low	0.22	13
	Middle	0.24	13
	High	0.22	13

Mode	Channel	PAR (dB)	Limit (dB)
WCDMA (BPSK)	Low	3.41	13
	Middle	3.40	13
	High	3.45	13
HSDPA (16QAM)	Low	3.55	13
	Middle	3.48	13
	High	3.49	13
HSUPA (BPSK)	Low	3.45	13
	Middle	3.51	13
	High	3.53	13

AWS Band

Mode	Channel	PAR (dB)	Limit (dB)
WCDMA (BPSK)	Low	3.29	13
	Middle	3.24	13
	High	3.21	13
HSDPA (16QAM)	Low	3.23	13
	Middle	3.26	13
	High	3.25	13
HSUPA (BPSK)	Low	3.24	13
	Middle	3.23	13
	High	3.22	13

Radiated Power**ERP & EIRP****GSM Mode:**

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	FCC Part 22H/24E	
			Height (m)	Polar (H/V)	S.G. Level (dBm)	Cable loss (dB)	Antenna Gain (dB)		Limit (dBm)	Margin (dB)
ERP for Cellular Band (Part 22H), Middle Channel										
836.6	93.25	264	1.1	H	25.8	0.67	0	25.13	38.45	13.32
836.6	96.31	173	2.4	V	28.8	0.67	0	28.13	38.45	10.32
ERP for PCS Band (Part 24E), Middle Channel										
1880.00	90.16	137	1.2	H	21.5	1.40	7.30	27.40	33	5.60
1880.00	85.81	182	2.0	V	16.6	1.40	7.30	22.50	33	10.50

EDGE Mode:

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	FCC Part 22H/24E	
			Height (m)	Polar (H/V)	S.G. Level (dBm)	Cable loss (dB)	Antenna Gain (dB)		Limit (dBm)	Margin (dB)
ERP for Cellular Band (Part 22H), Middle Channel										
836.6	86.37	117	1.3	H	18.9	0.67	0	18.23	38.45	20.22
836.6	89.95	156	1.5	V	22.5	0.67	0	21.83	38.45	16.62
EIRP for PCS Band (Part 24E), Middle Channel										
1880.00	84.73	282	2.5	H	16.1	1.40	7.30	22.00	33	11.00
1880.00	82.64	214	1.2	V	13.4	1.40	7.30	19.30	33	13.70

WCDMA Mode:

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	FCC Part 22H/24E/27	
			Height (m)	Polar (H/V)	S.G. Level (dBm)	Cable loss (dB)	Antenna Gain (dB)		Limit (dBm)	Margin (dB)
EIRP for WCDMA Band V (Part 22H), Middle Channel										
836.6	85.32	264	1.1	H	17.8	0.67	0	17.13	38.45	21.32
836.6	88.15	173	2.4	V	20.7	0.67	0	20.03	38.45	18.42
EIRP for WCDMA Band II (Part 24E), Middle Channel										
1880.00	83.74	75	1.2	H	15.1	1.40	7.30	21.00	33	12.00
1880.00	80.97	220	2.0	V	11.7	1.40	7.30	17.60	33	15.40
EIRP for WCDMA Band IV (Part 27), Middle Channel										
1732.60	85.45	285	1.9	H	16.7	1.60	6.90	22.00	30	8.00
1732.60	84.93	360	1.7	V	15.7	1.60	6.90	21.00	30	9.00

Note:

All above data were tested with no amplifier.

Absolute Level = SG Level - Cable loss + Antenna Gain

Margin = Limit- Absolute Level

FCC §2.1049, §22.917, §22.905 & §24.238 & §27.53 - OCCUPIED BANDWIDTH


Applicable Standards

FCC 47 §2.1049, §22.917, §22.905, §24.238 and §27.53.

Test Procedure

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at 5 kHz (Cellular /PCS) & 100 kHz (WCDMA) and the 26 dB & 99% bandwidth was recorded.

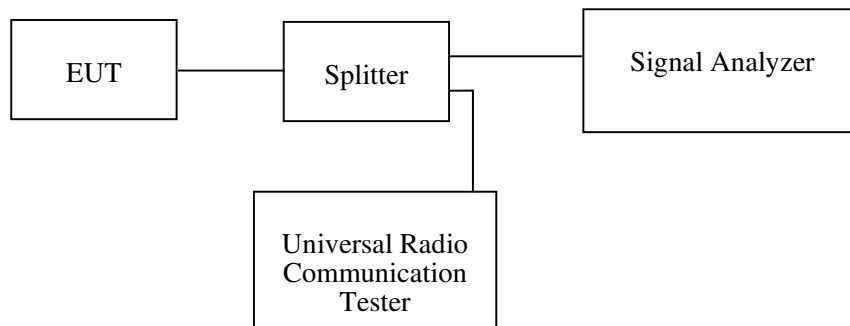

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2014-12-11	2015-12-11
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891	2015-11-23	2016-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	24~25 °C
Relative Humidity:	48~50 %
ATM Pressure:	100.0~101.0 kPa

The testing was performed by Rocky Kang on 2015-11-17 and 2015-11-26.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to the following tables and plots.

Cellular Band (Part 22H)

Mode	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GSM(GMSK)	836.6	244.5	316.6
EGPRS(8PSK)	836.6	284.6	388.8

Mode	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
WCDMA (BPSK)	836.6	4.17	4.71
HSUPA (BPSK)	836.6	4.17	4.73
HSDPA (16QAM)	836.6	4.17	4.73

PCS Band (Part 24E)

Mode	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GSM(GMSK)	1880.0	244.5	320.6
EGPRS(8PSK)	1880.0	264.5	340.7


Mode	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
WCDMA (BPSK)	1880.0	4.19	4.73
HSUPA (BPSK)	1880.0	4.17	4.75
HSDPA (16QAM)	1880.0	4.17	4.75

AWS Band (Part 27)


Mode	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
WCDMA (BPSK)	1732.6	4.19	4.73
HSUPA (BPSK)	1732.6	4.19	4.73
HSDPA (16QAM)	1732.6	4.17	4.71

Cellular Band (Part 22H)


99% Occupied & 26 dB Emissions Bandwidth for GSM (GMSK) Mode

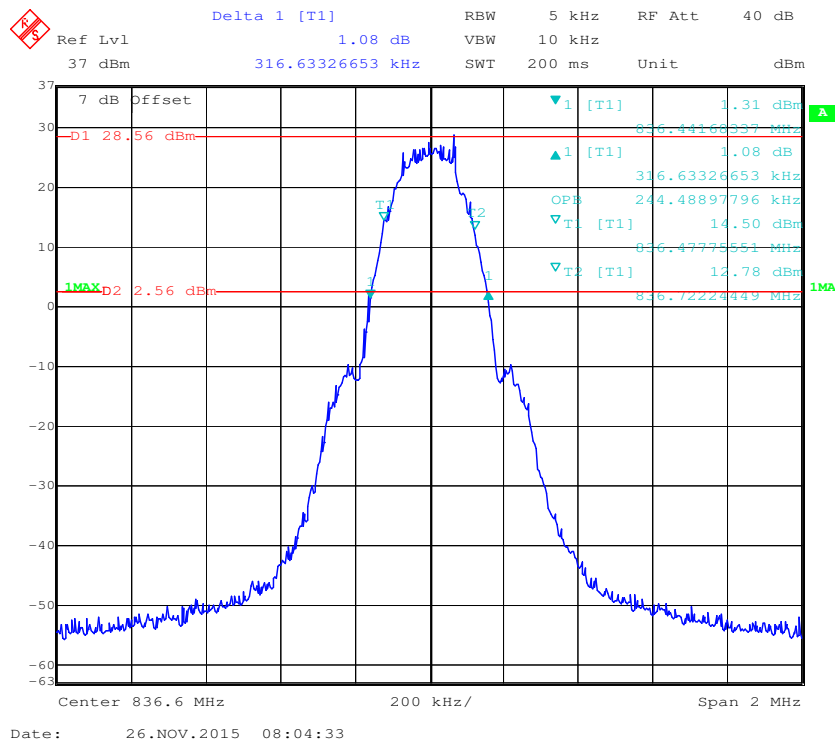


99% Occupied & 26 dB Emissions Bandwidth for EDGE Mode


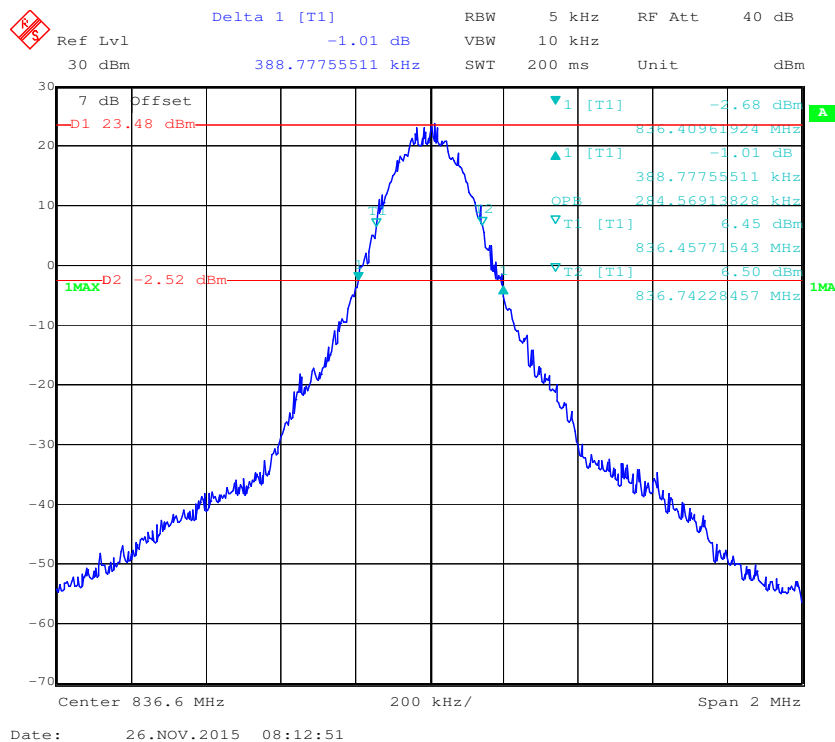




99% Occupied & 26 dB Emissions Bandwidth for WCDMA (BPSK) Mode


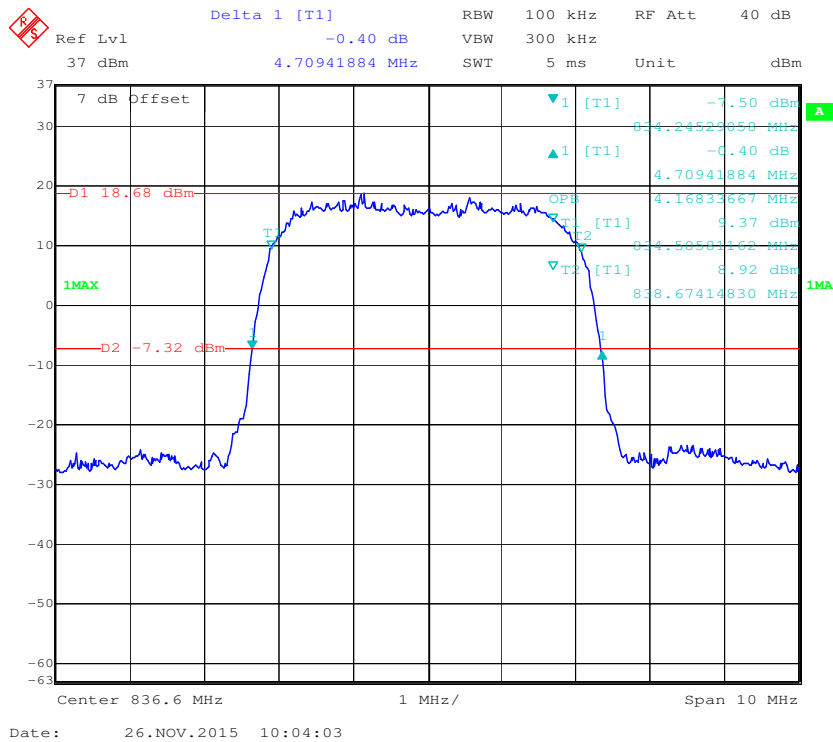




99% Occupied & 26 dB Emissions Bandwidth for HSUPA (BPSK) Mode

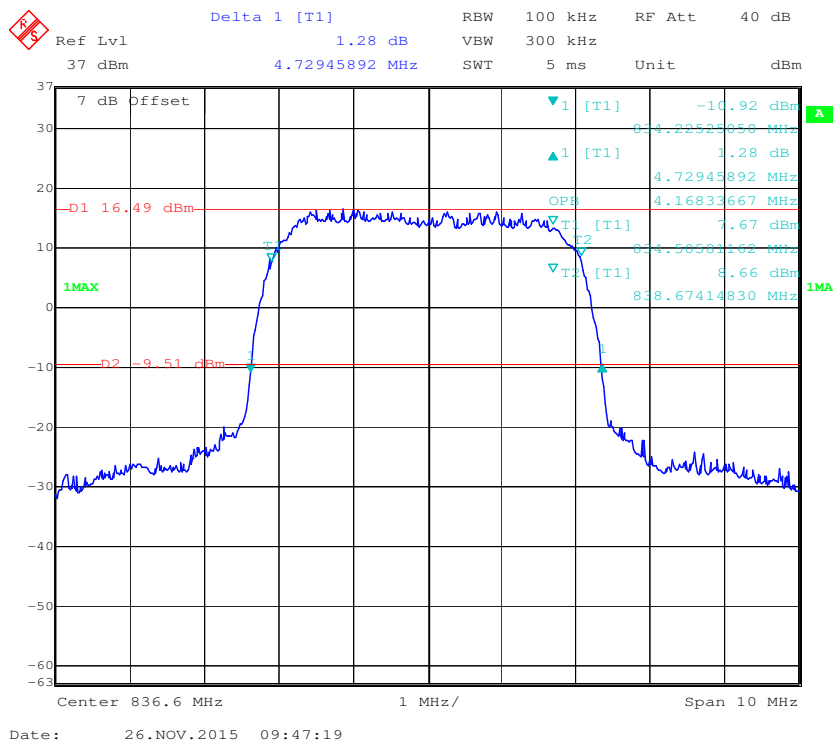

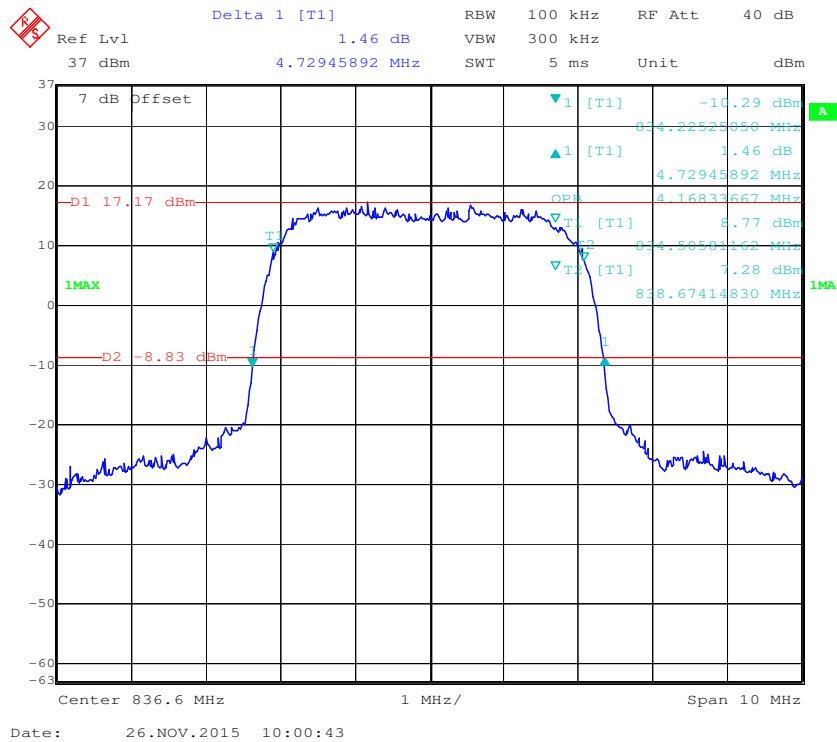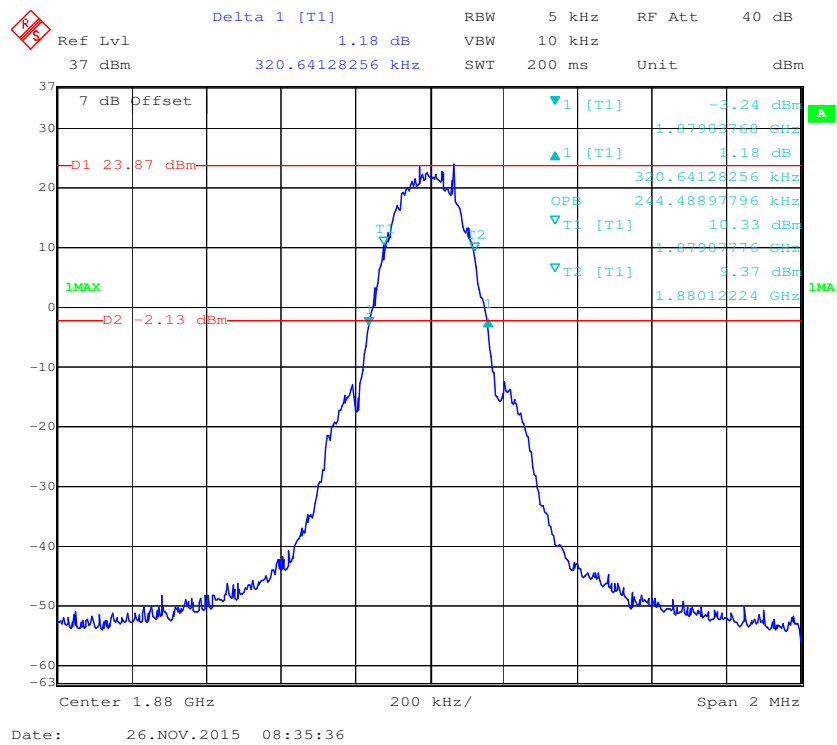
99% Occupied & 26 dB Emissions Bandwidth for HSDPA (16QAM) Mode**PCS Band (Part 24E)****99% Occupied & 26 dB Emissions Bandwidth for GSM (GMSK) Mode**

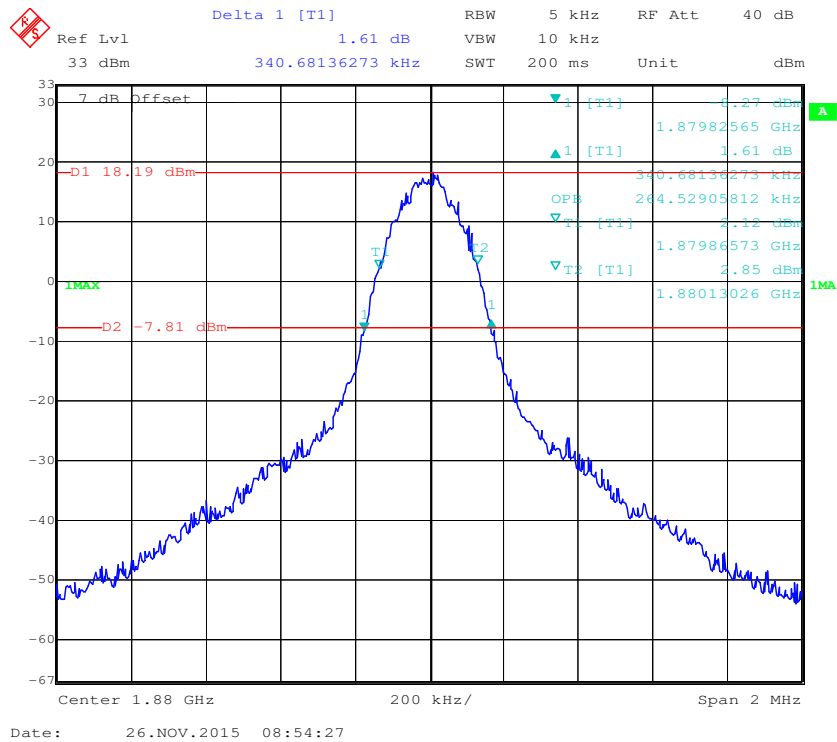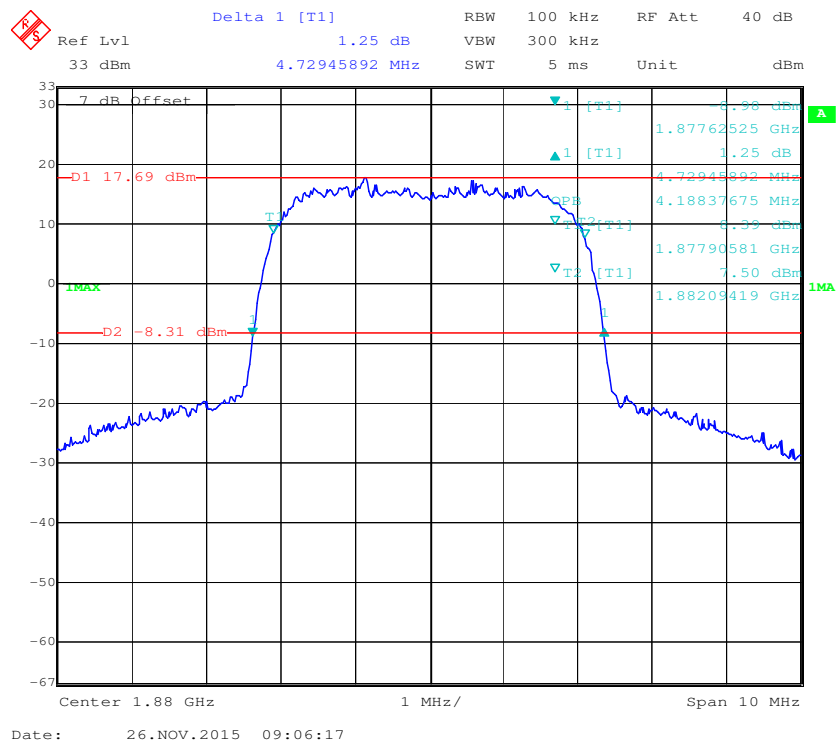99% Occupied & 26 dB Emissions Bandwidth for EDGE Mode**99% Occupied & 26 dB Emissions Bandwidth for WCDMA (BPSK) Mode**

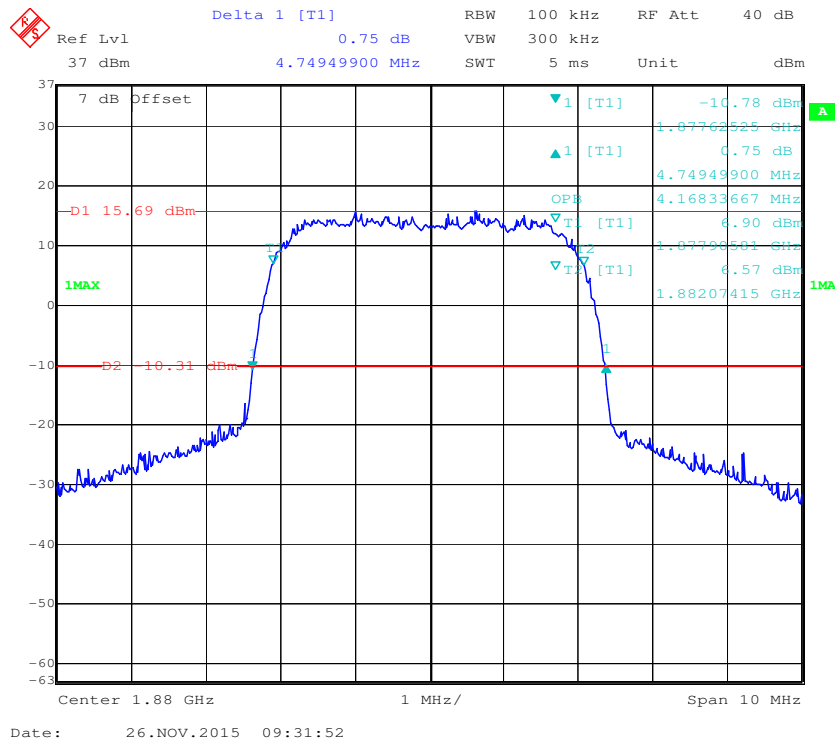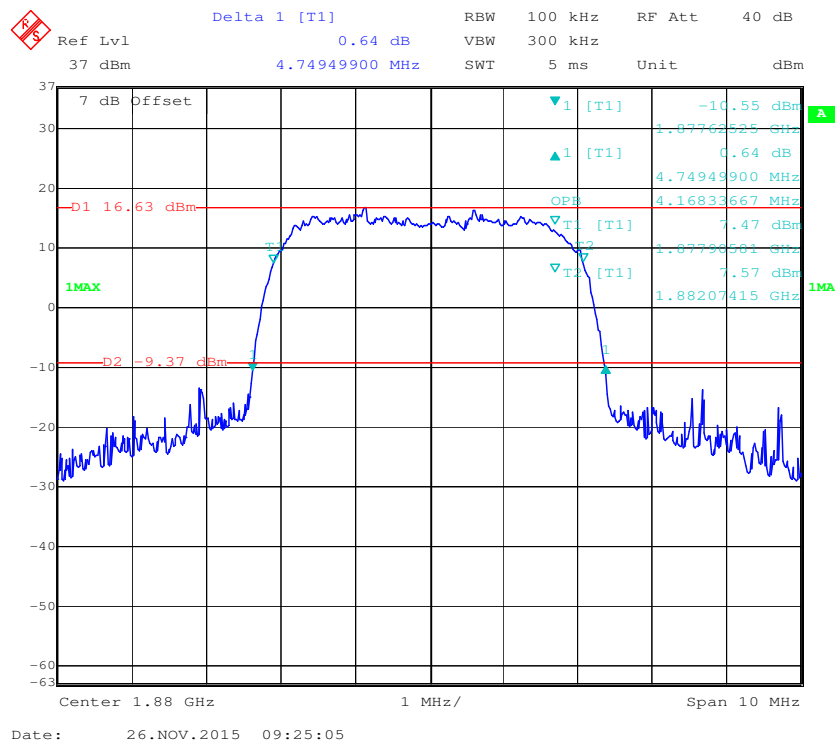99% Occupied & 26 dB Emissions Bandwidth for HSUPA (BPSK) Mode**99% Occupied & 26 dB Emissions Bandwidth for HSDPA (16QAM) Mode**

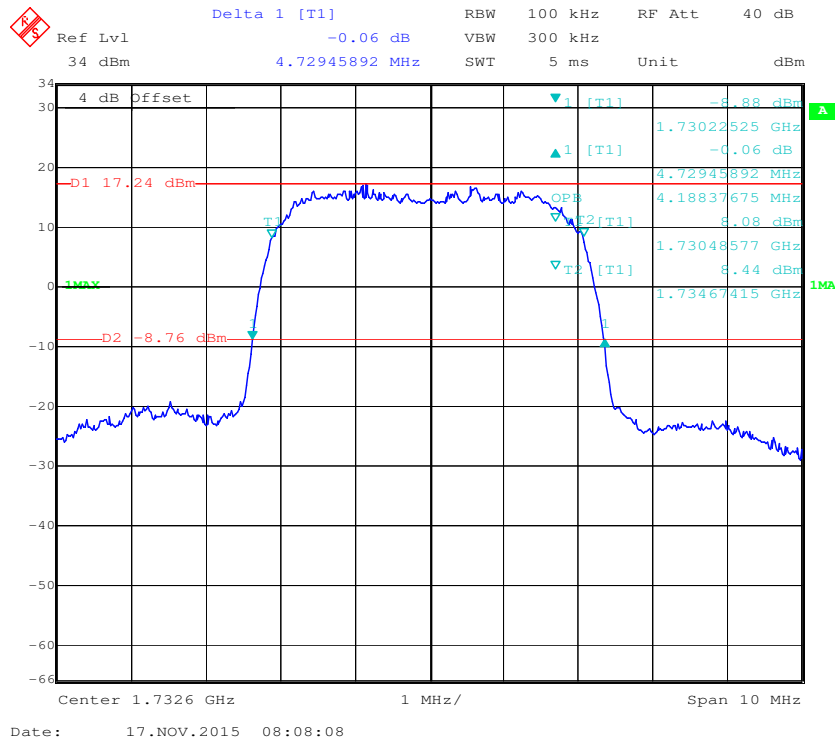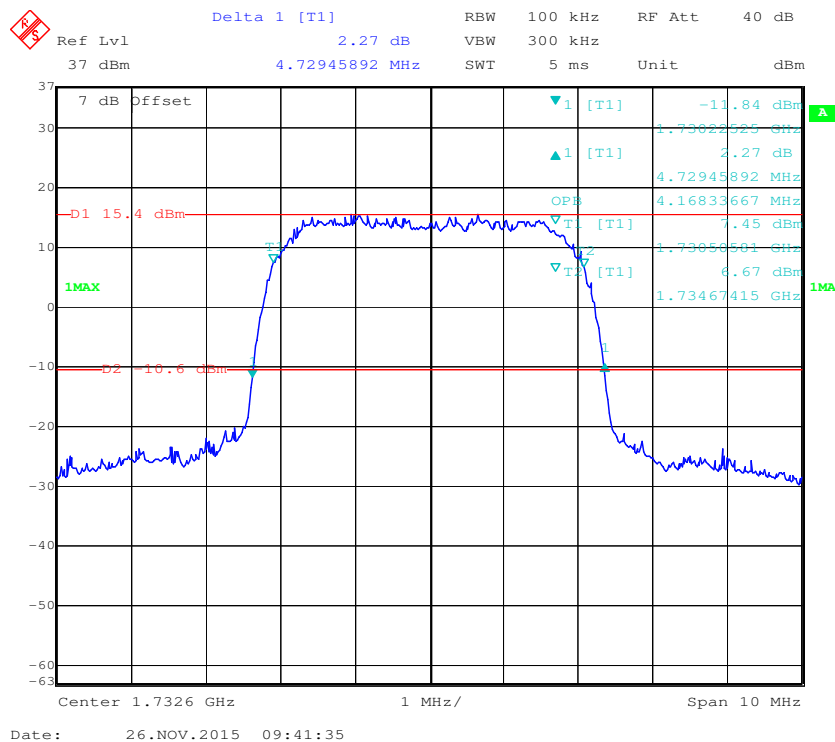AWS Band:**99% Occupied & 26 dB Emissions Bandwidth for WCDMA (BPSK) Mode****99% Occupied & 26 dB Emissions Bandwidth for HSUPA (BPSK) Mode**

99% Occupied & 26 dB Emissions Bandwidth for HSDPA (16QAM) Mode

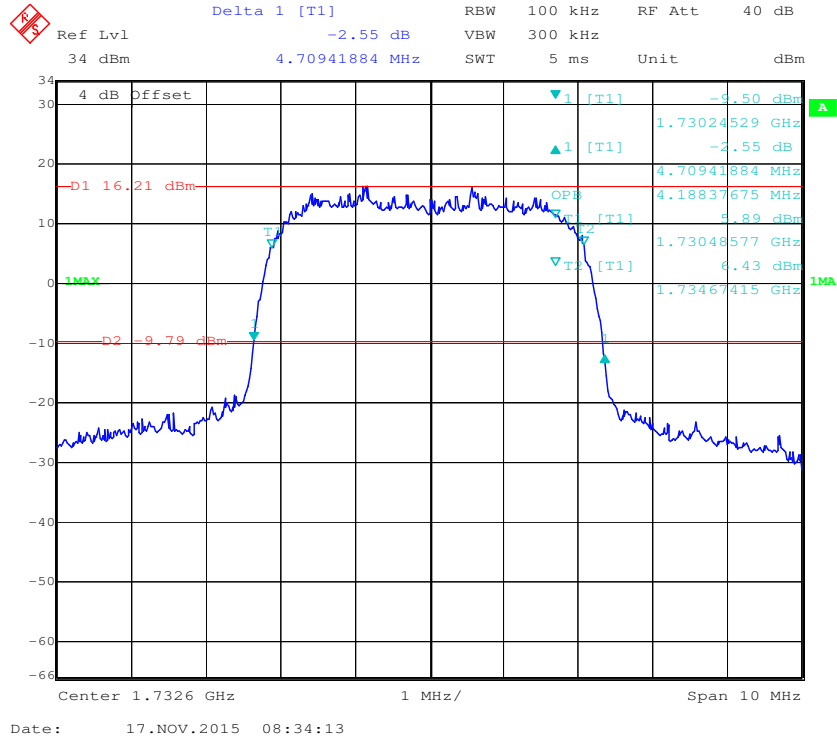

FCC §2.1051, §22.917(a) & §24.238(a) & §27.53 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS


Applicable Standards

FCC §2.1051, §22.917(a) and §24.238(a) and §27.53.

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1051.

Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 1MHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

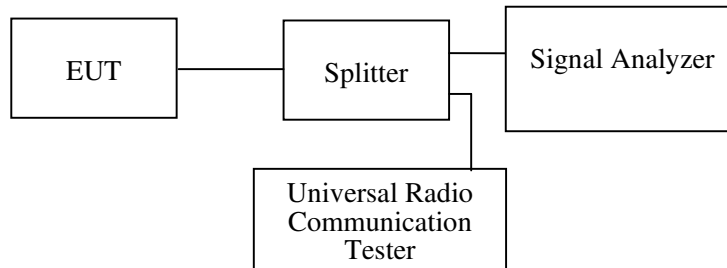

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2014-12-11	2015-12-11
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891	2014-11-23	2015-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions


Temperature:	24~25 °C
Relative Humidity:	48~50 %
ATM Pressure:	100.0~101.0 kPa

The testing was performed by Rocky Kang on 2015-11-17 and 2015-11-26.


Please refer to the following plots.

Cellular Band (Part 22H)


30 MHz – 1 GHz (GSM Mode)

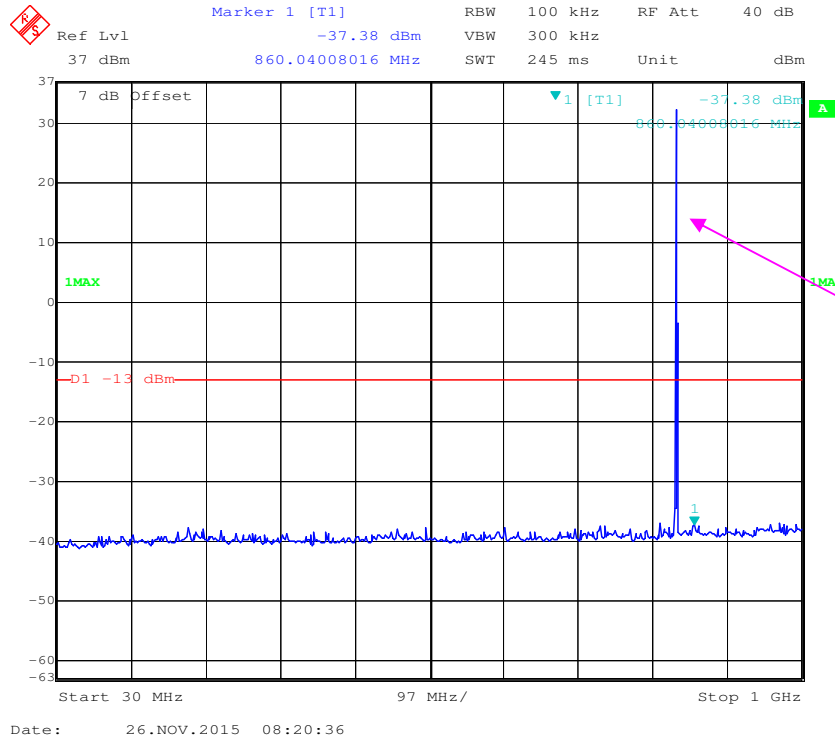


1 GHz – 10 GHz (GSM Mode)

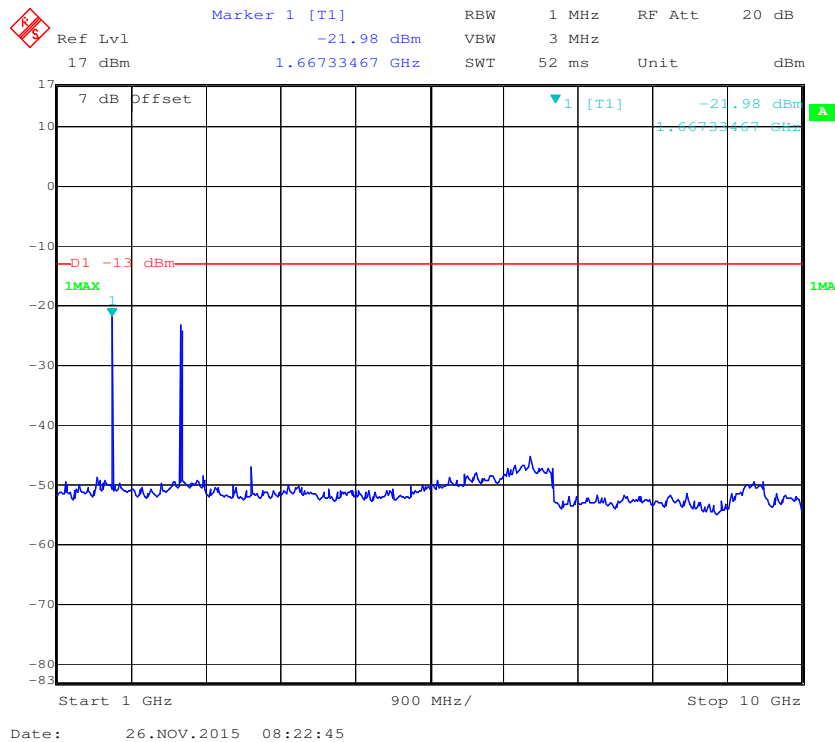

30 MHz – 1 GHz (WCDMA Mode)

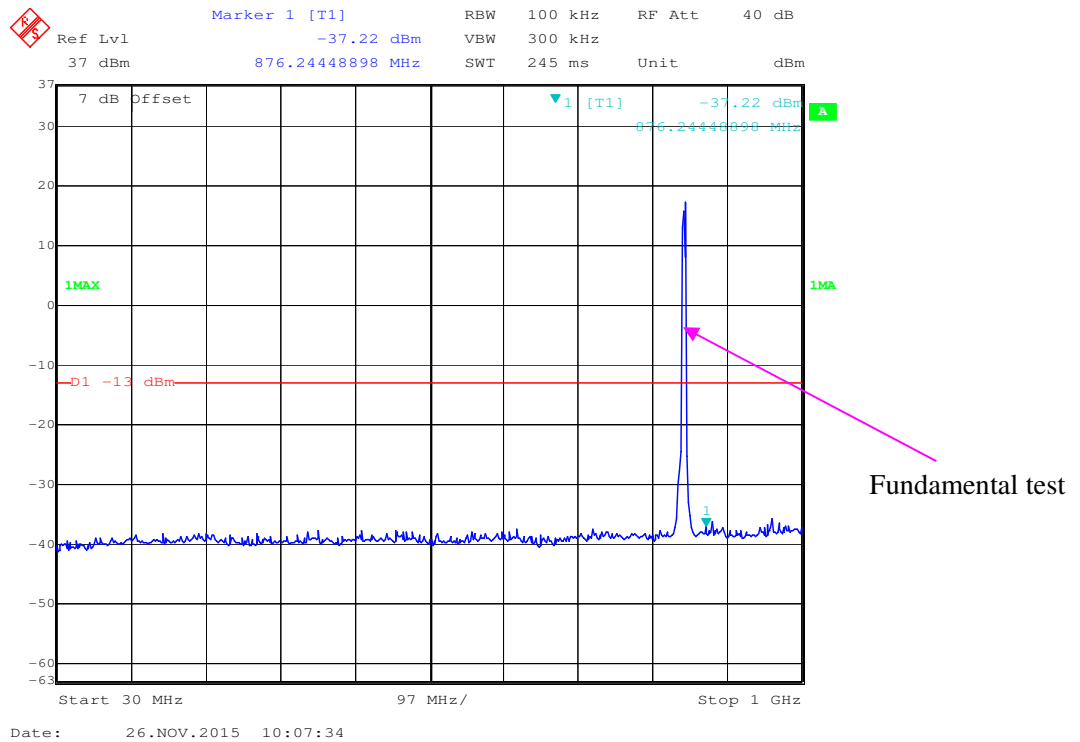


1 GHz – 10 GHz (WCDMA Mode)

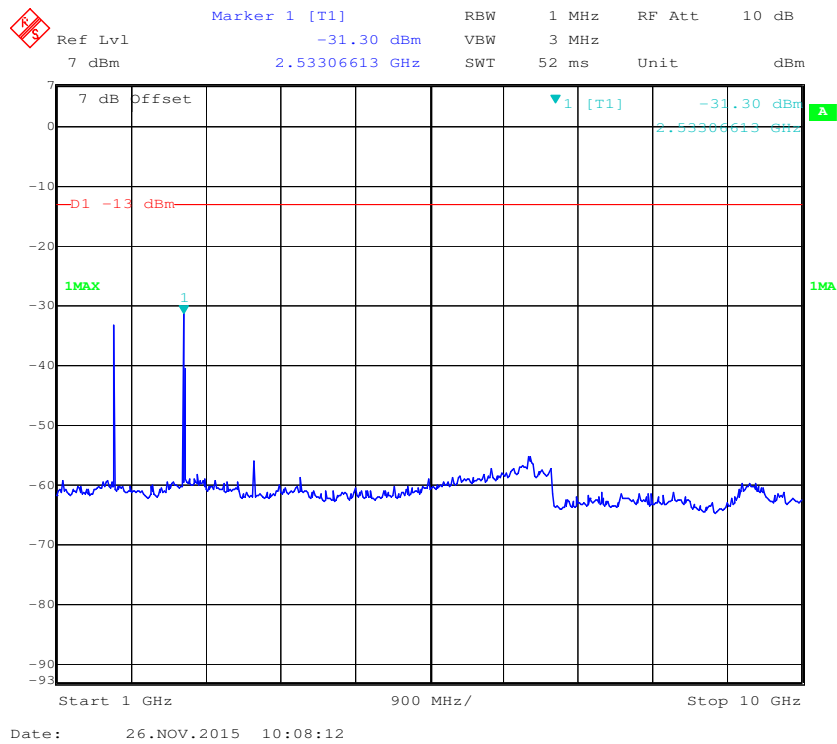


PCS Band (Part 24E)


30 MHz – 1 GHz (GSM Mode)

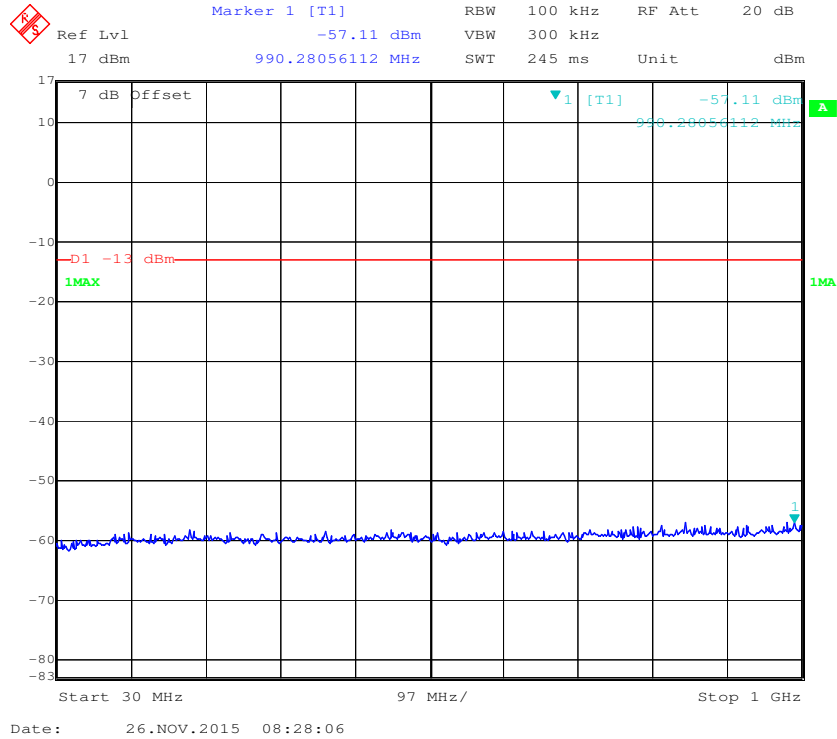


1 GHz – 2 GHz (GSM Mode)

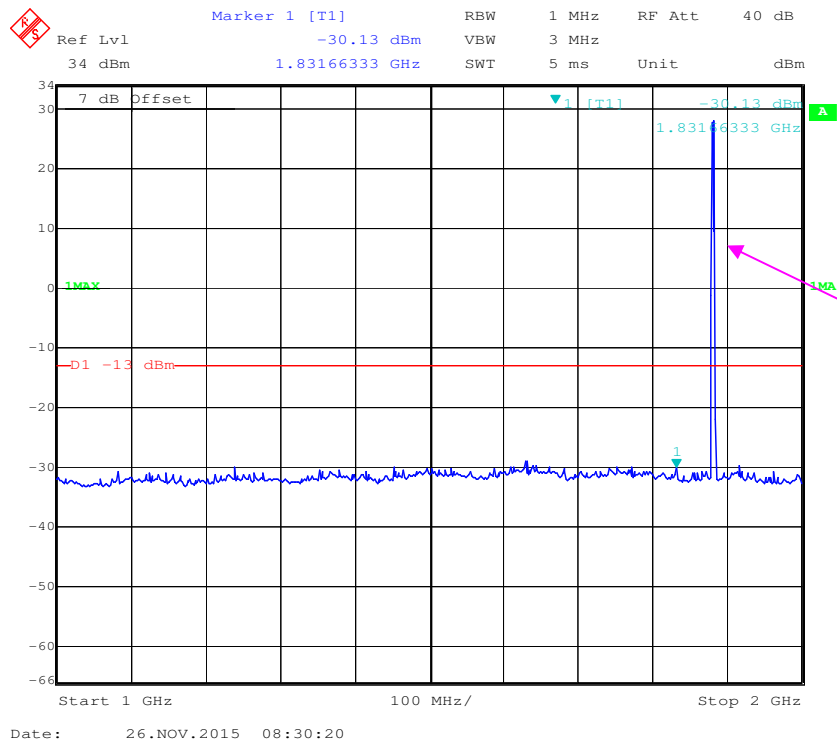


2 GHz – 20 GHz (GSM Mode)

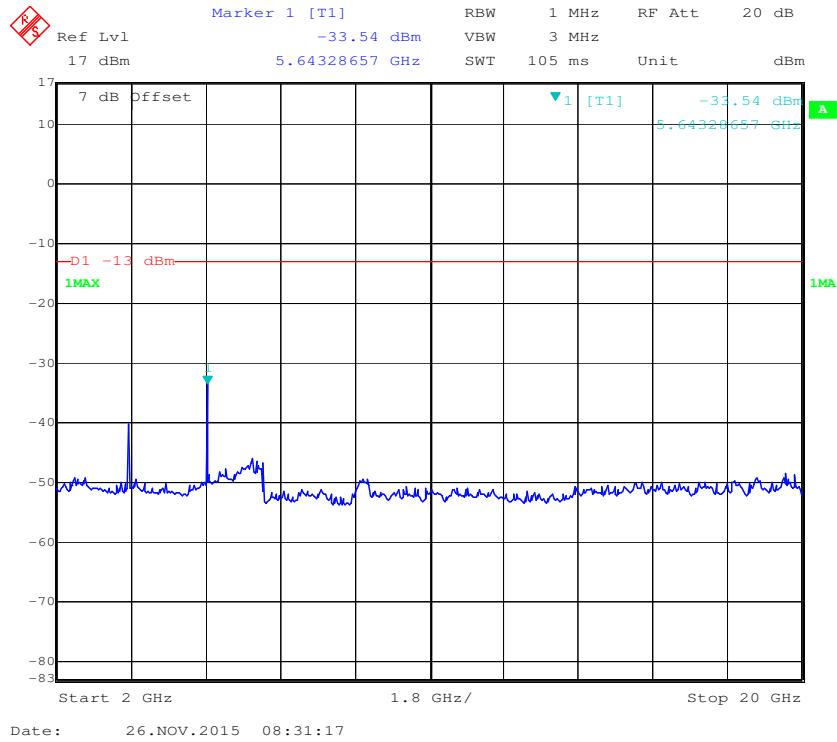


30 MHz – 1 GHz (WCDMA Mode)

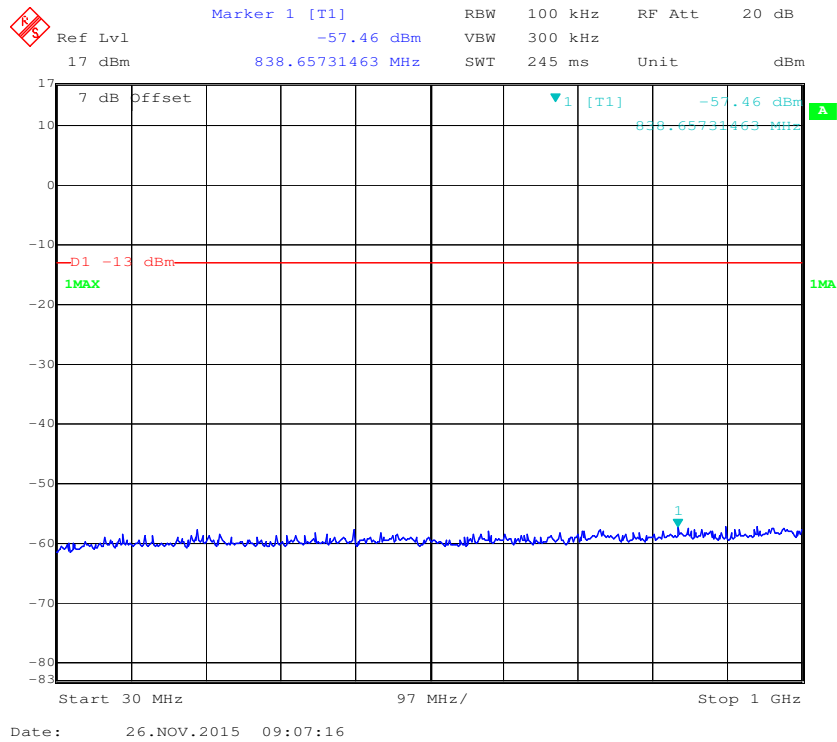

1 GHz – 2 GHz (WCDMA Mode)

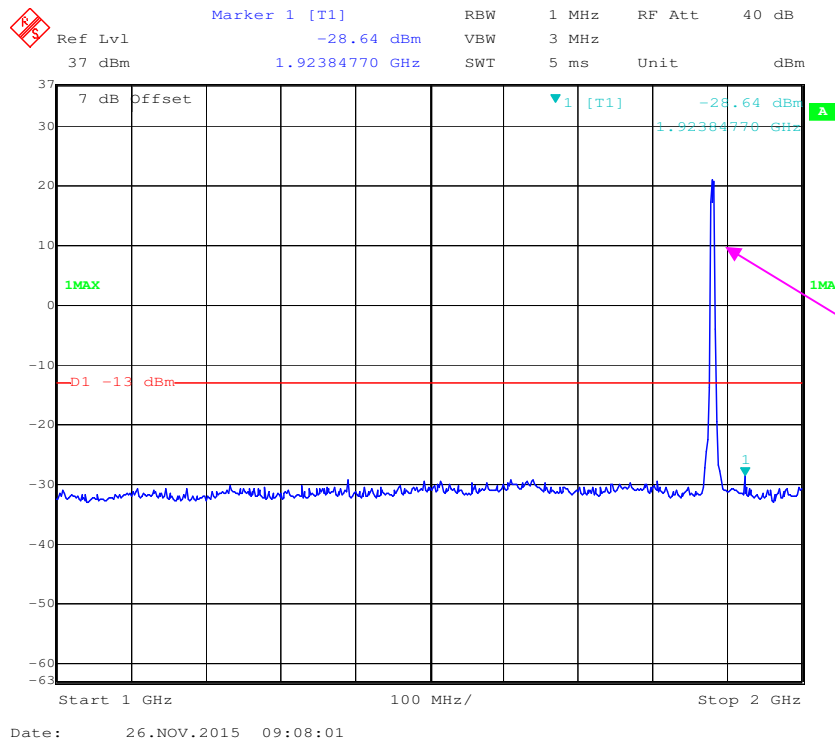


2 GHz – 20 GHz (WCDMA Mode)

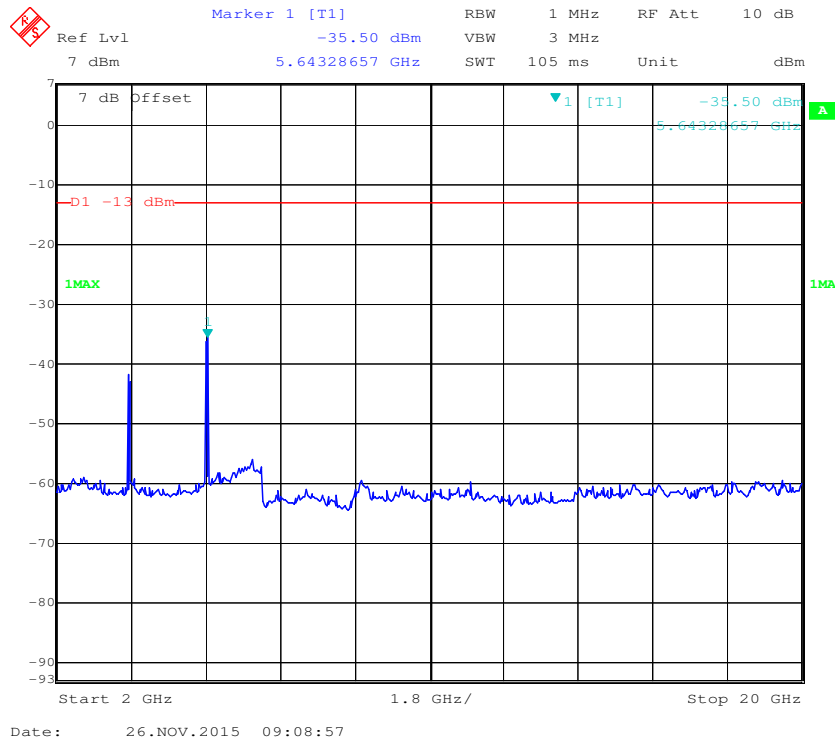


AWS Band


30 MHz – 1 GHz (WCDMA Mode)

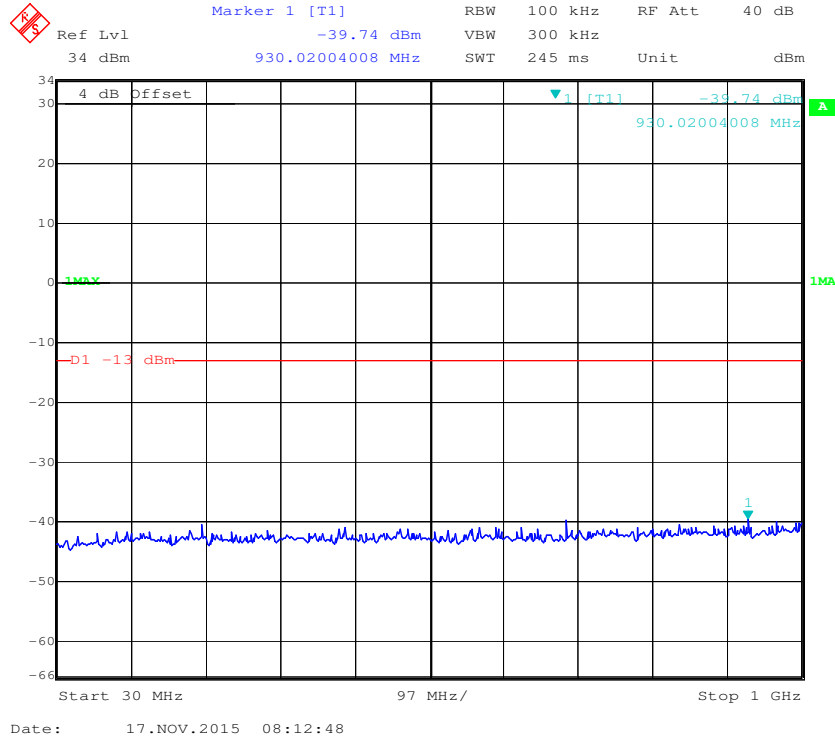

1 GHz – 2 GHz (WCDMA Mode)

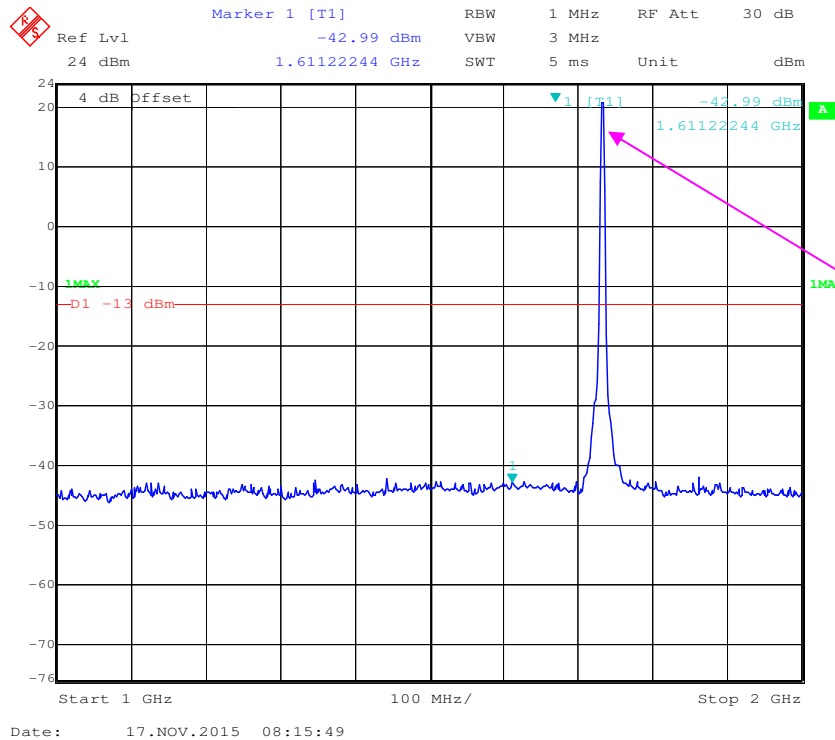

2 GHz – 20 GHz (WCDMA Mode)

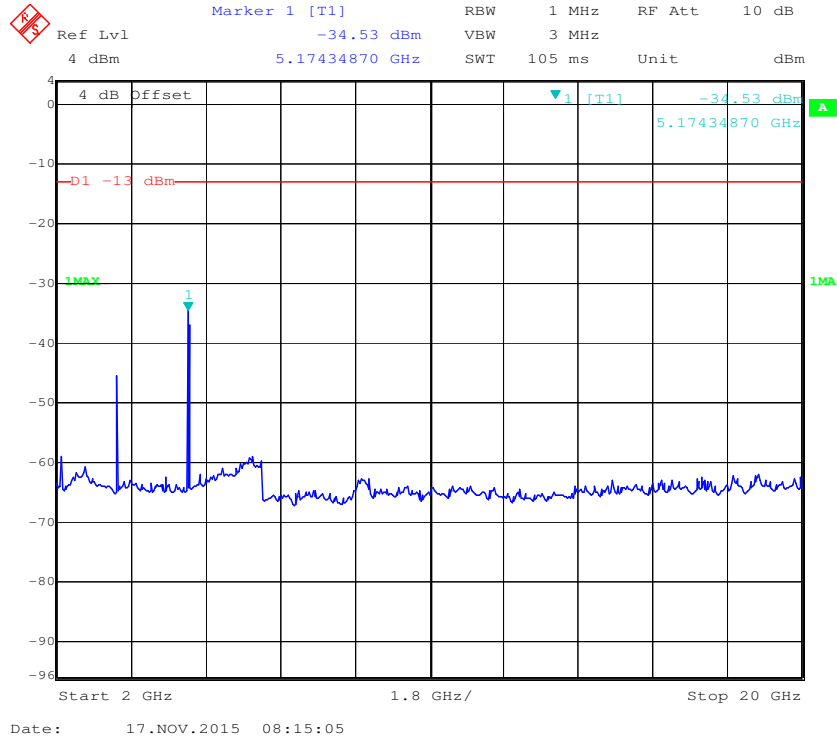

FCC §2.1053, §22.917 & §24.238 & §27.53 - SPURIOUS RADIATED EMISSIONS

Applicable Standards

FCC § 2.1053, §22.917 and § 24.238 and § 27.53.

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = $10 \lg (\text{TX pwr in Watts}/0.001)$ – the absolute level

Spurious attenuation limit in dB = $43 + 10 \lg (\text{power out in Watts})$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Horn Antenna	DRH-118	A052304	2014-12-01	2015-11-30
Sunol Sciences	Bi-log Antenna	JB1	A040904-2	2014-12-07	2017-12-06
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2014-12-11	2015-12-11
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2015-04-23	2016-04-23
HP	Amplifier	HP8447E	1937A01046	2015-05-06	2016-05-06
HP	Signal Generator	8341B	2624A00116	2015-06-03	2016-06-03
COM POWER	Dipole Antenna	AD-100	041000	2015-08-18	2016-08-18
A.H. System	Horn Antenna	SAS-200/571	135	2013-02-11	2016-02-10
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2015-11-03	2016-11-03
Electro-Mechanics	Horn Antenna	3116	9510-2270	2013-10-14	2016-10-13
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891	2015-11-23	2016-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	24 °C
Relative Humidity:	48 %
ATM Pressure:	101.0 kPa

The testing was performed by Rocky Kang on 2015-11-26.

Test mode: Transmitting (Pre-scan with Low, Middle, High channel, and worse case as below)

30 MHz ~ 10 GHz:

Cellular Band (Part 22H)

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	FCC Part 22H	
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		Limit (dBm)	Margin (dB)
GSM Mode										
205.7	39.02	169	2.0	H	-58.0	0.30	0	-58.30	-13	45.30
205.7	39.18	236	1.1	V	-57.8	0.30	0	-58.10	-13	45.10
1673.20	47.53	20	2.4	H	-48.2	1.60	6.90	-42.90	-13	29.90
1673.20	47.17	106	1.8	V	-49.0	1.60	6.90	-43.70	-13	30.70
2509.80	39.45	276	2.3	H	-54.1	1.70	8.60	-47.20	-13	34.20
2509.80	38.55	355	2.4	V	-55.3	1.70	8.60	-48.40	-13	35.40
WCDMA Mode										
205.7	37.14	358	2.1	H	-59.9	0.30	0	-60.20	-13	47.20
205.7	38.91	151	2.0	V	-58.1	0.30	0	-58.40	-13	45.40
1673.20	35.57	178	1.9	H	-60.1	1.60	6.90	-54.80	-13	41.80
1673.20	36.35	153	2.1	V	-59.8	1.60	6.90	-54.50	-13	41.50

30 MHz ~ 20 GHz:

PCS Band (Part 24E)

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	FCC Part 24E	
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		Limit (dBm)	Margin (dB)
GSM Mode										
205.7	37.49	348	2.0	H	-59.5	0.30	0	-59.80	-13	46.80
205.7	38.27	34	2.2	V	-58.7	0.30	0	-59.00	-13	46.00
3760.00	32.56	187	2.4	H	-54.5	1.90	9.90	-46.50	-13	33.50
3760.00	32.21	91	1.1	V	-54.4	1.90	9.90	-46.40	-13	33.40
WCDMA Mode										
205.7	37.92	349	1.9	H	-59.1	0.30	0	-59.40	-13	46.40
205.7	39.25	103	2.0	V	-57.8	0.30	0	-58.10	-13	45.10
3760.00	32.85	309	2.3	H	-54.2	1.90	9.90	-46.20	-13	33.20
3760.00	33.27	182	1.5	V	-53.4	1.90	9.90	-45.40	-13	32.40

AWS Band (Part 27)

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	FCC Part 27	
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		Limit (dBm)	Margin (dB)
WCDMA Mode										
205.7	39.62	138	1.4	H	-57.4	0.30	0	-57.70	-13	44.70
205.7	37.84	350	1.6	V	-59.2	0.30	0	-59.50	-13	46.50
3465.20	35.05	77	1.2	H	-48.8	1.90	10.00	-40.70	-13	27.70
3465.20	34.78	265	1.1	V	-49.2	1.90	10.00	-41.10	-13	28.10
5197.80	37.86	43	2.0	H	-44.4	1.80	10.10	-36.10	-13	23.10
5197.80	36.97	98	1.8	V	-44.6	1.80	10.10	-36.30	-13	23.30

Note:

1) Absolute Level = SG Level - Cable loss + Antenna Gain

2) Margin = Limit- Absolute Level

FCC §22.917(a) & §24.238(a) & §27.53 - BAND EDGES

Applicable Standards

According to § 22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.


According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to FCC §27.53, the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency

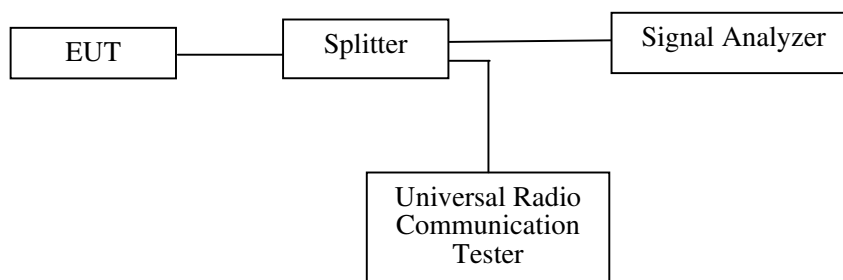

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2014-12-11	2015-12-11
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891	2015-11-23	2016-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data



Environmental Conditions

Temperature:	24~25 °C
Relative Humidity:	48~51 %
ATM Pressure:	100.0~101.0 kPa


The testing was performed by Rocky Kang on 2015-11-17 on 2015-11-26.

EUT operation mode: Transmitting


Test Result: Compliance. Please refer to the following plots.

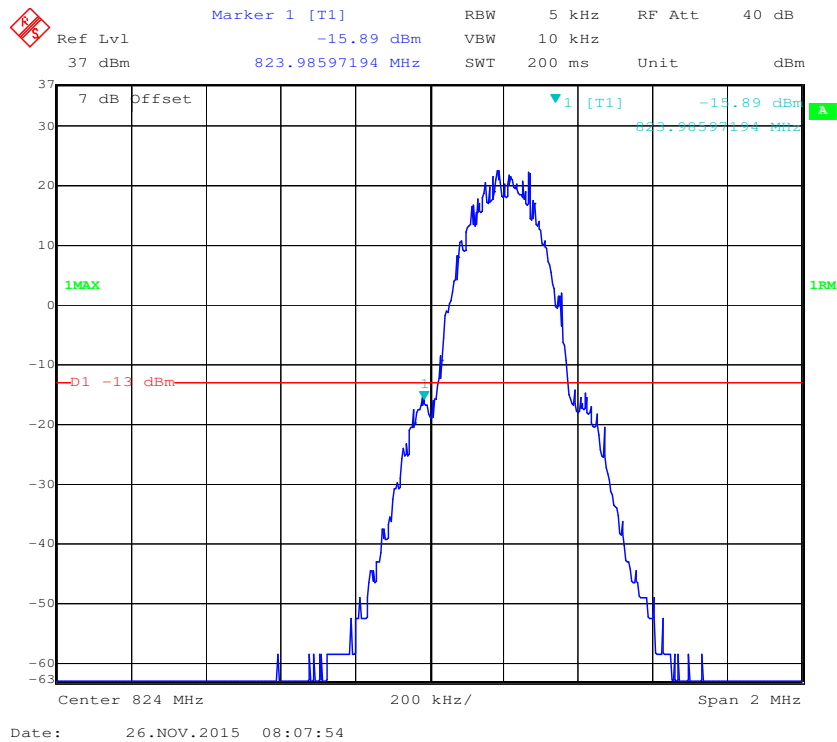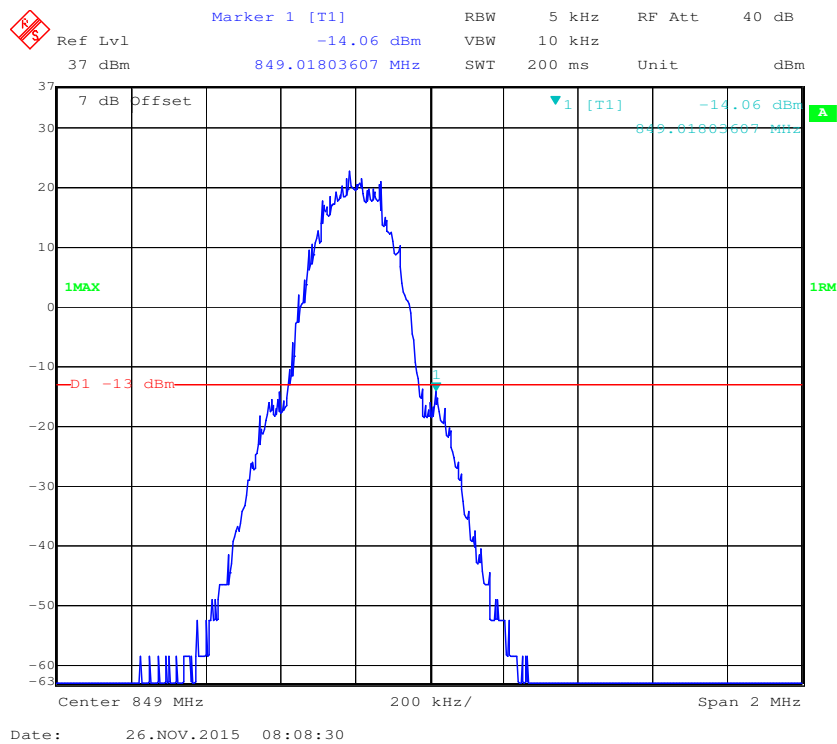Cellular Band, Left Band Edge for GSM (GMSK) Mode**Cellular Band, Right Band Edge for GSM (GMSK) Mode**


Cellular Band, Left Band Edge for EDGE Mode

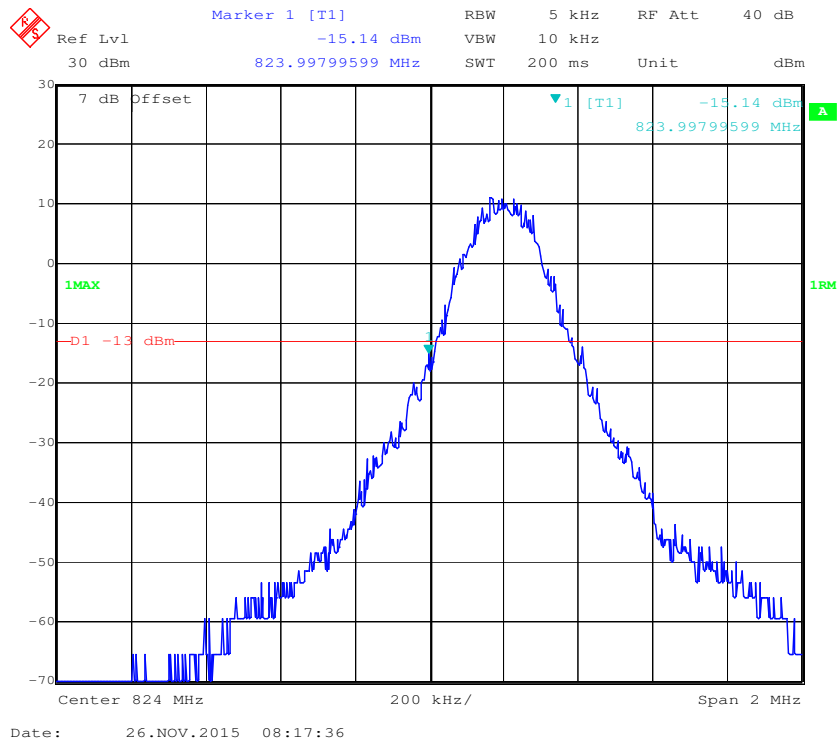


Cellular Band, Right Band Edge for EDGE Mode

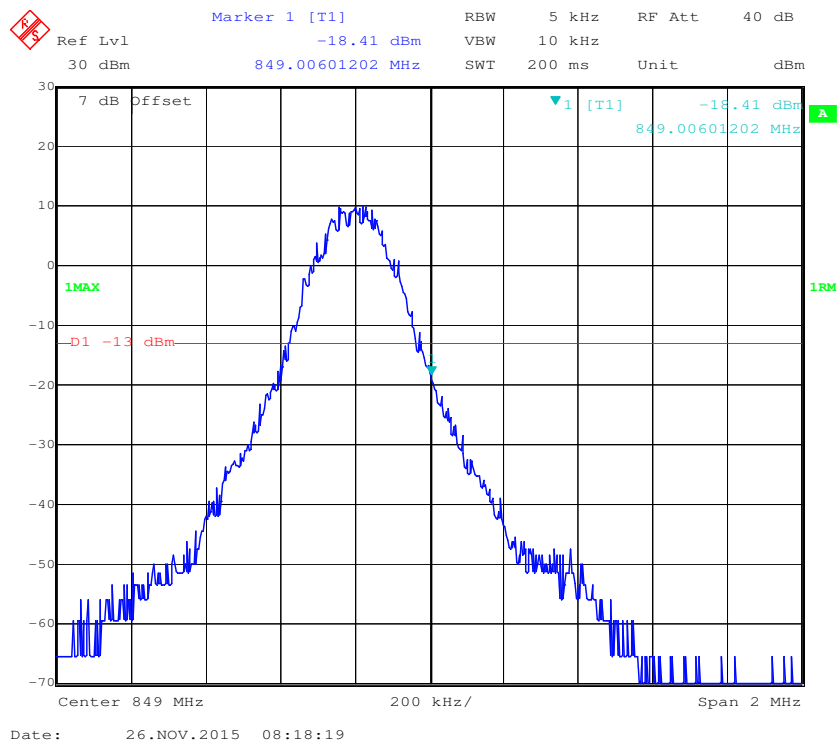


Cellular Band, Left Band Edge for WCDMA (BPSK) Mode

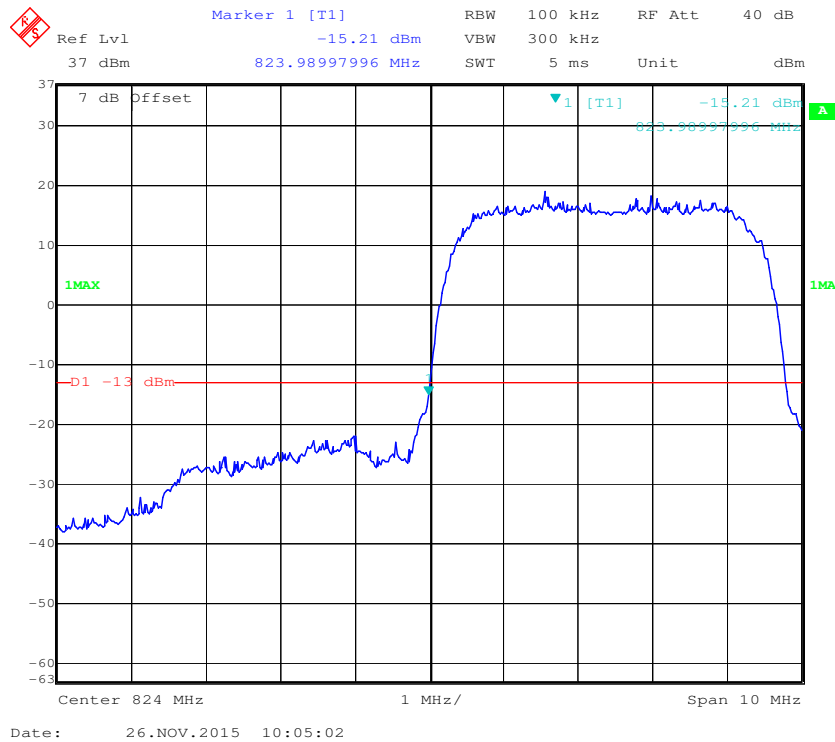


Cellular Band, Right Band Edge for WCDMA (BPSK) Mode

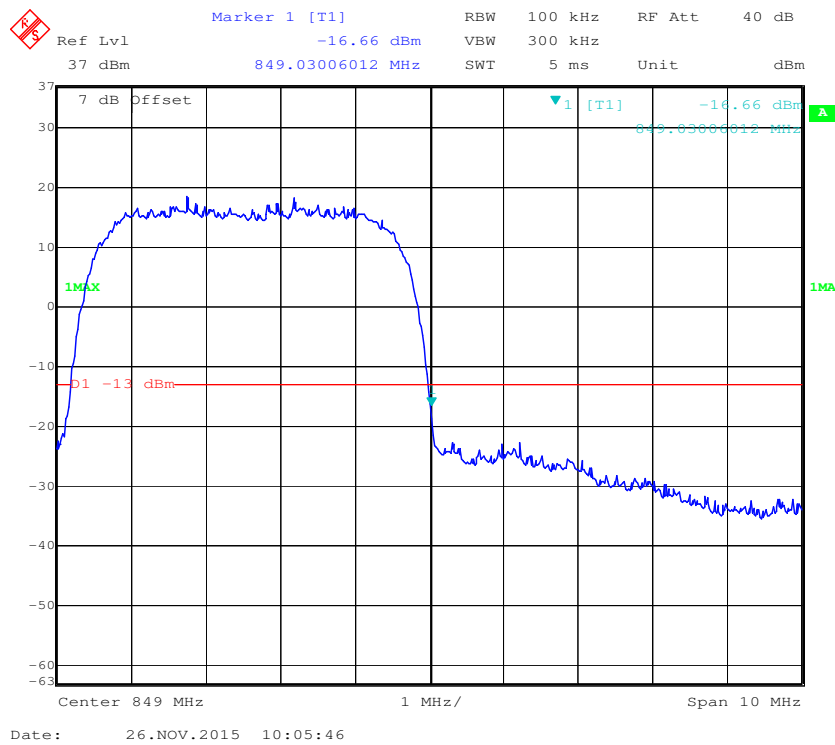


Cellular Band, Left Band Edge for HSDPA (16QAM) Mode

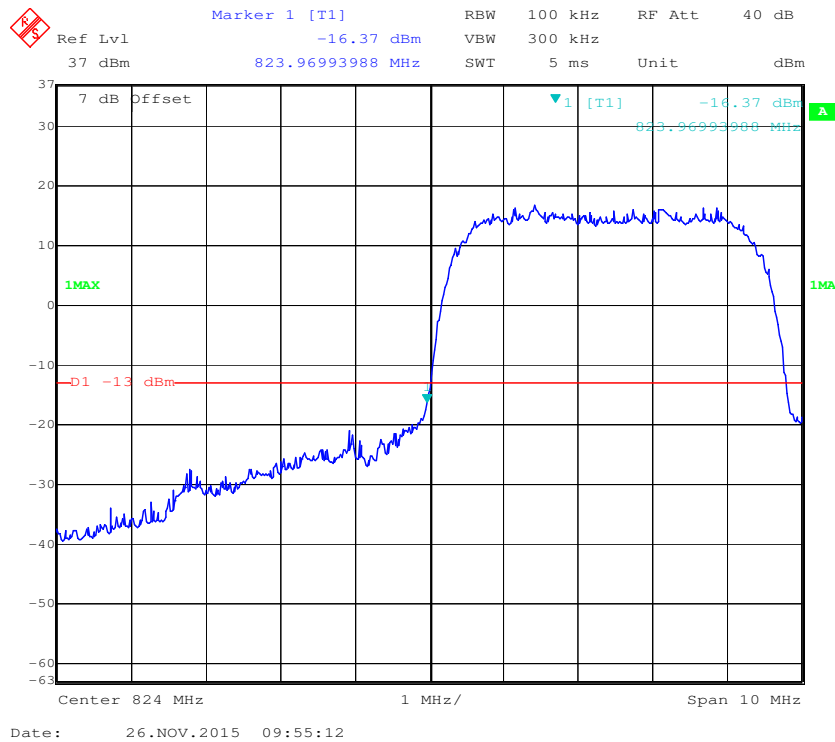


Cellular Band, Right Band Edge for HSDPA (16QAM) Mode

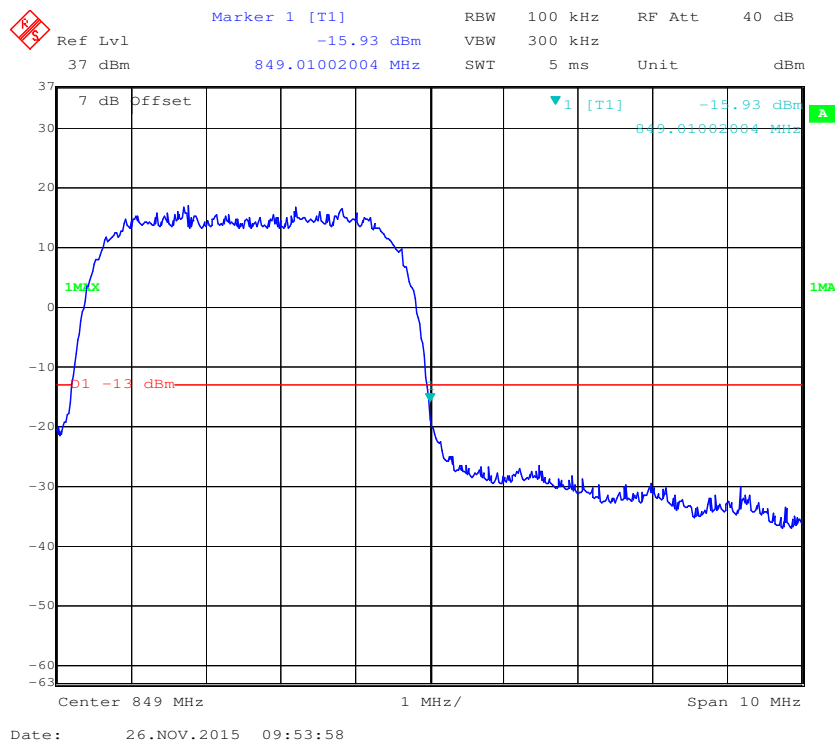


Cellular Band, Left Band Edge for HSUPA (BPSK) Mode

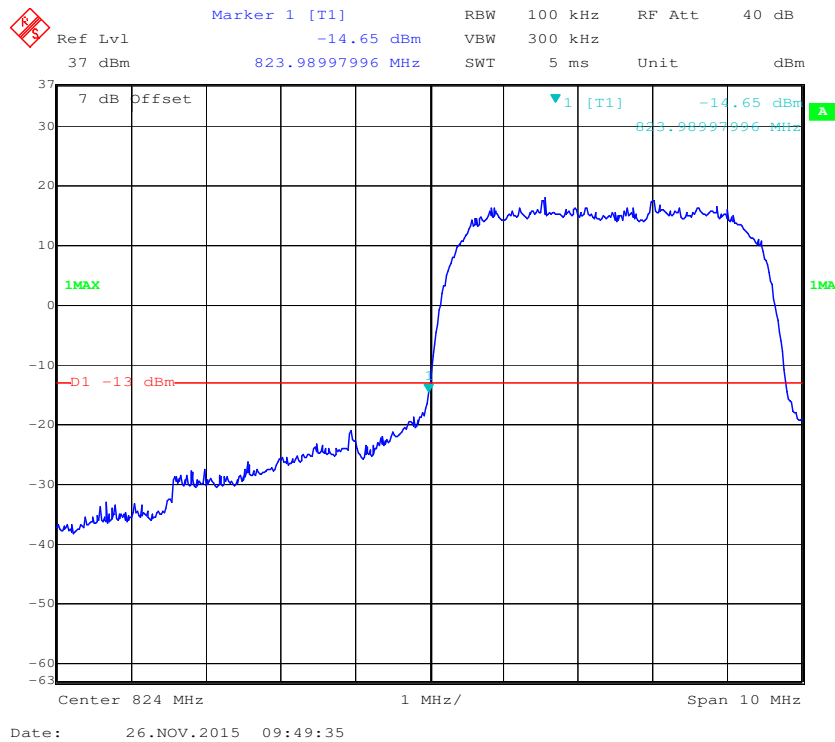


Cellular Band, Right Band Edge for HSUPA (BPSK) Mode

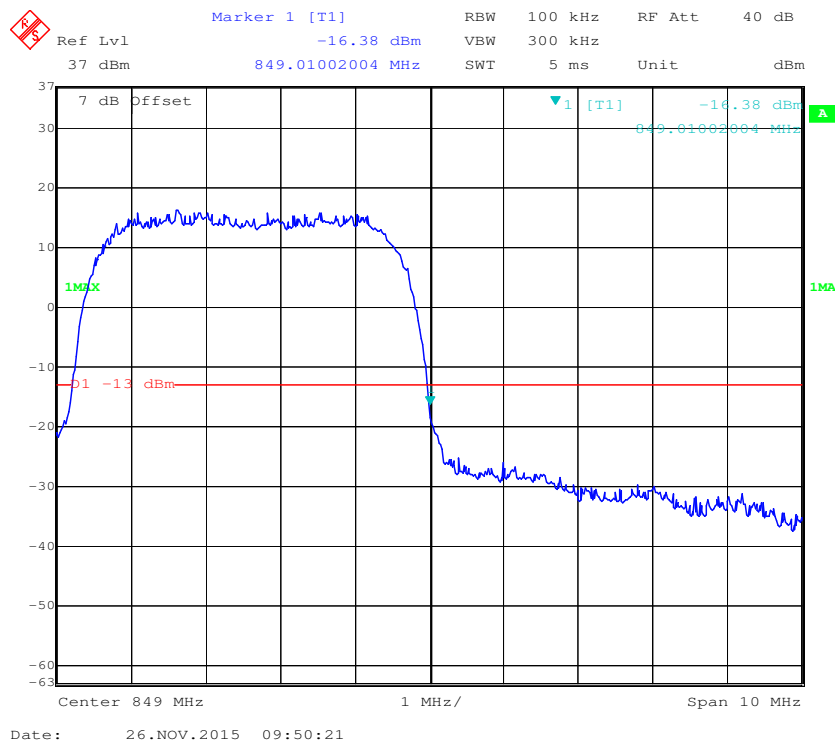


PCS Band, Left Band Edge for GSM (GMSK) Mode

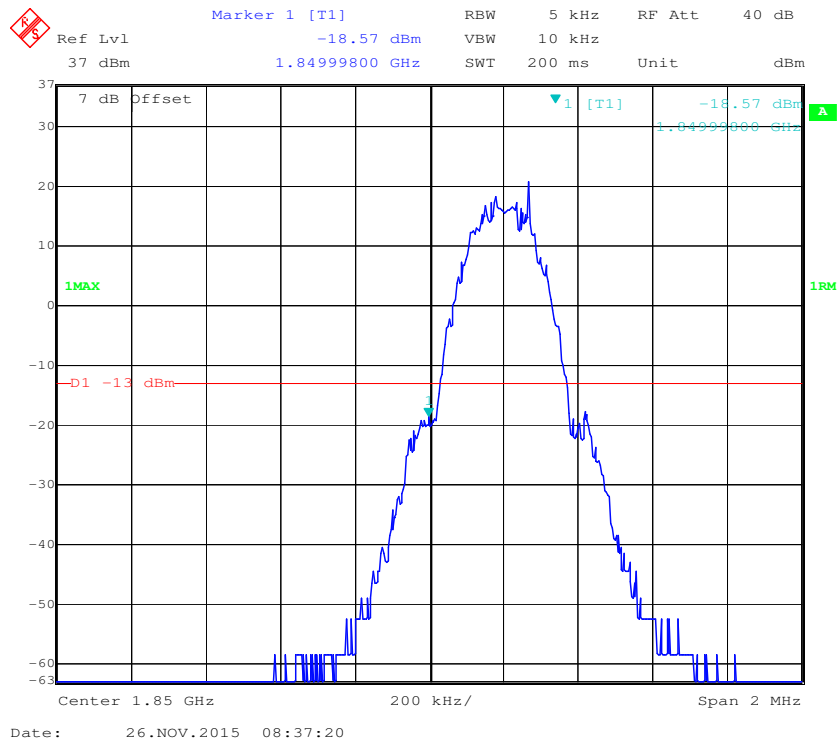


PCS Band, Right Band Edge for GSM (GMSK) Mode


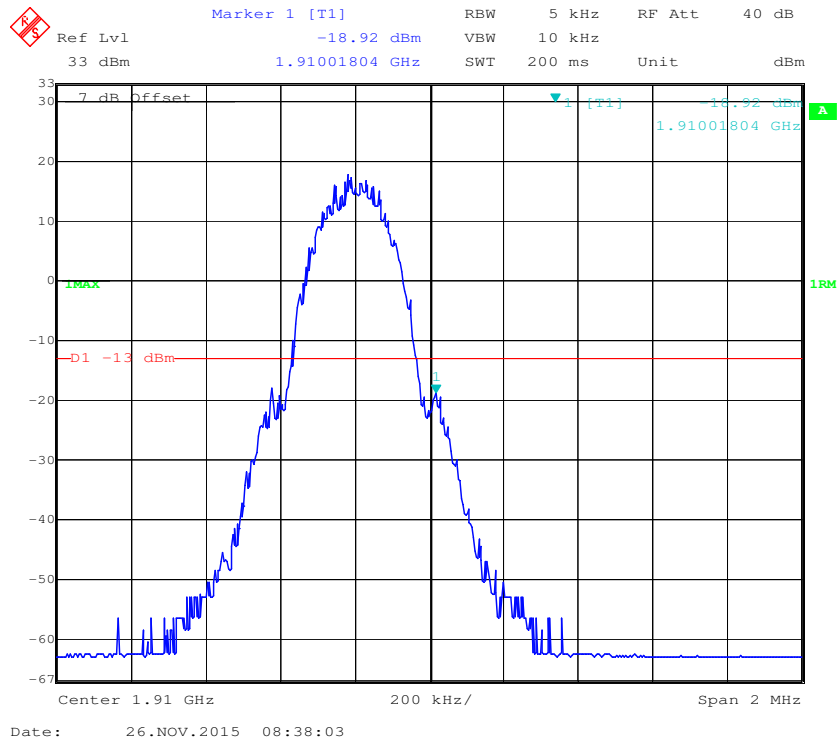


PCS Band, Left Band Edge for EDGE Mode

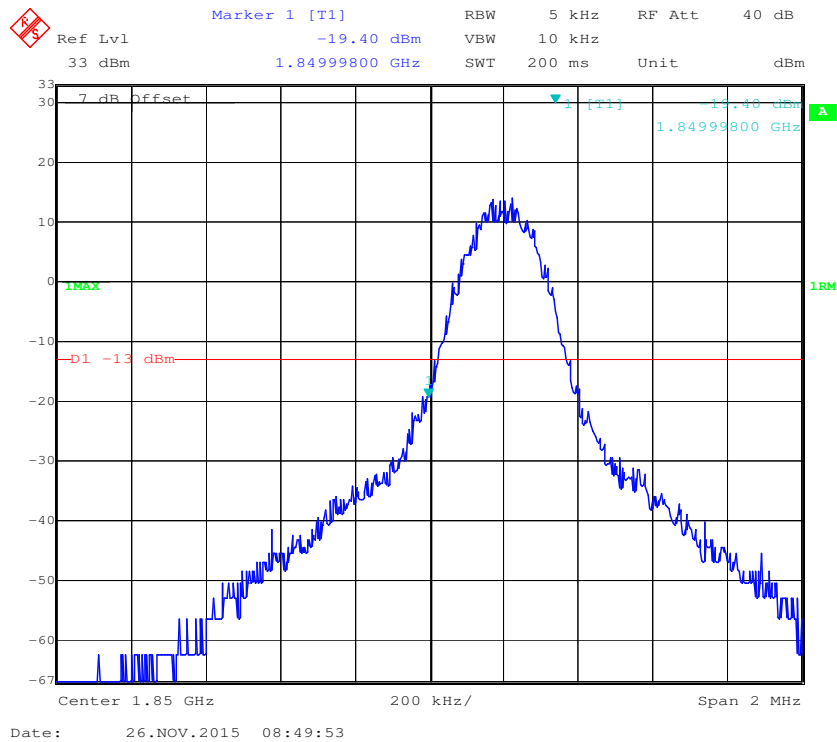


PCS Band, Right Band Edge for EDGE Mode

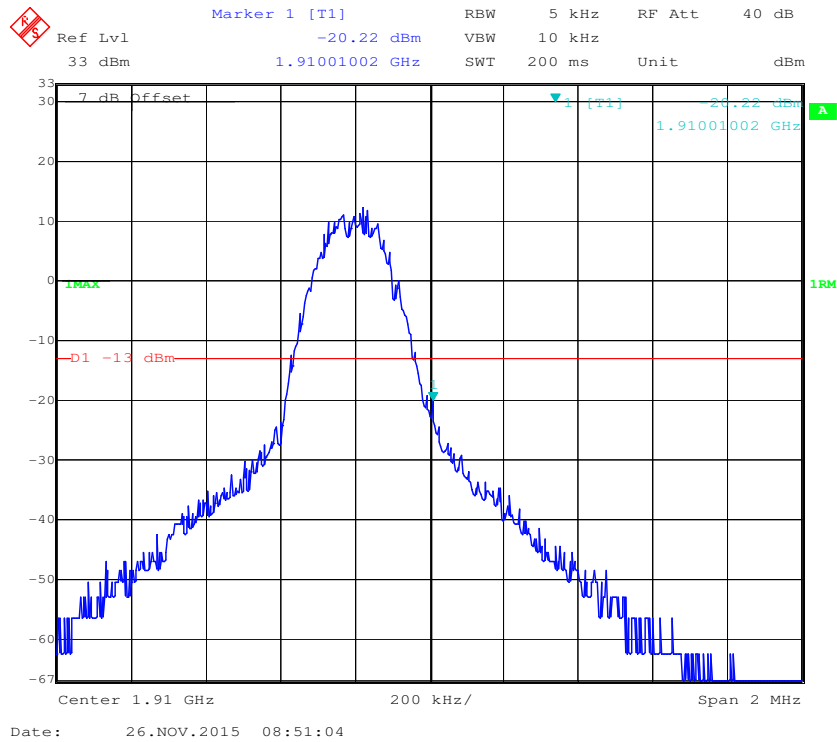


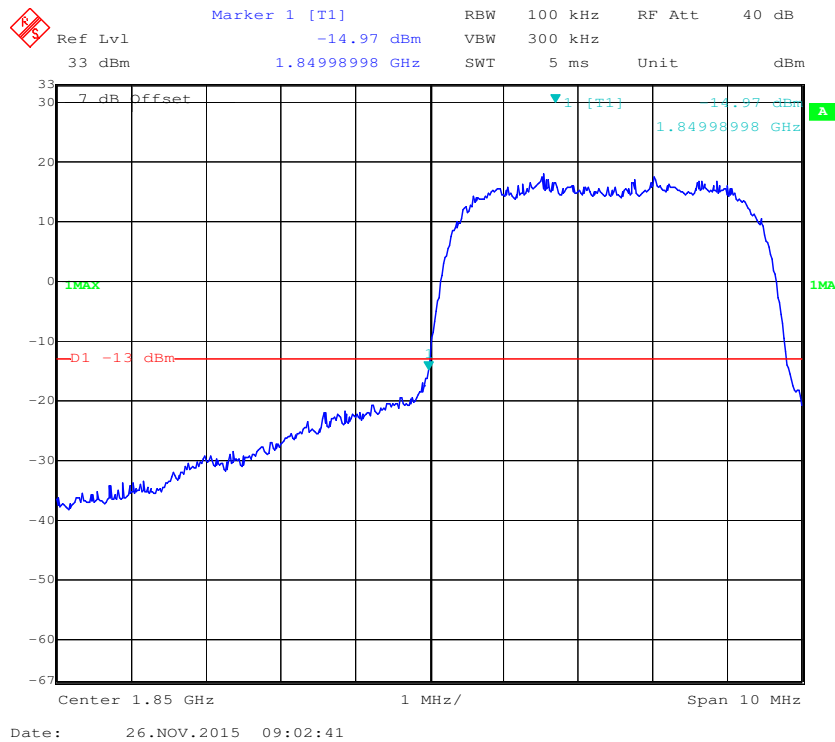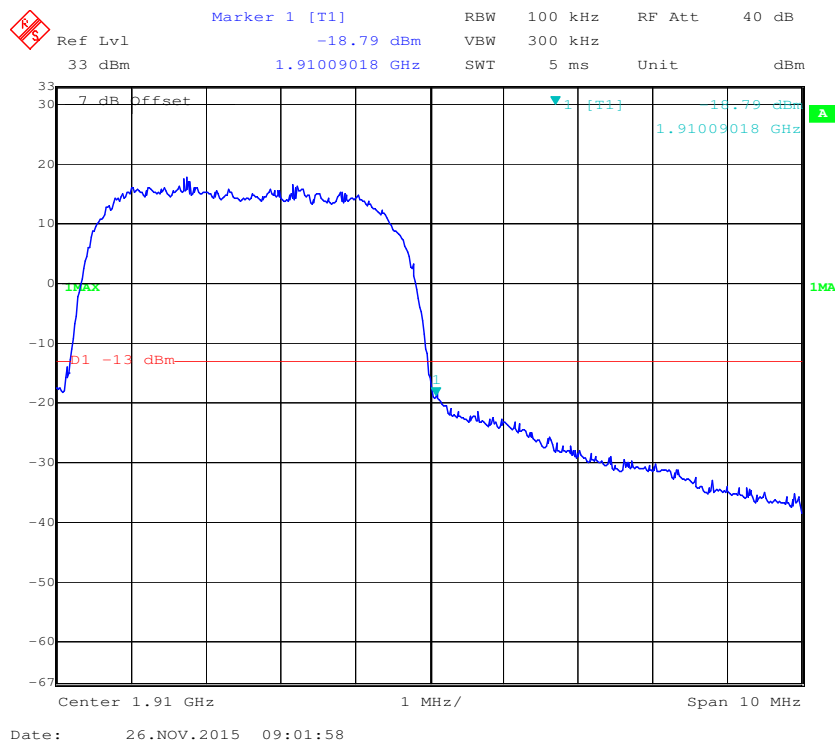PCS Band, Left Band Edge for WCDMA (BPSK) Mode**PCS Band, Right Band Edge for WCDMA (BPSK) Mode**


PCS Band, Left Band Edge for HSDPA (16QAM) Mode

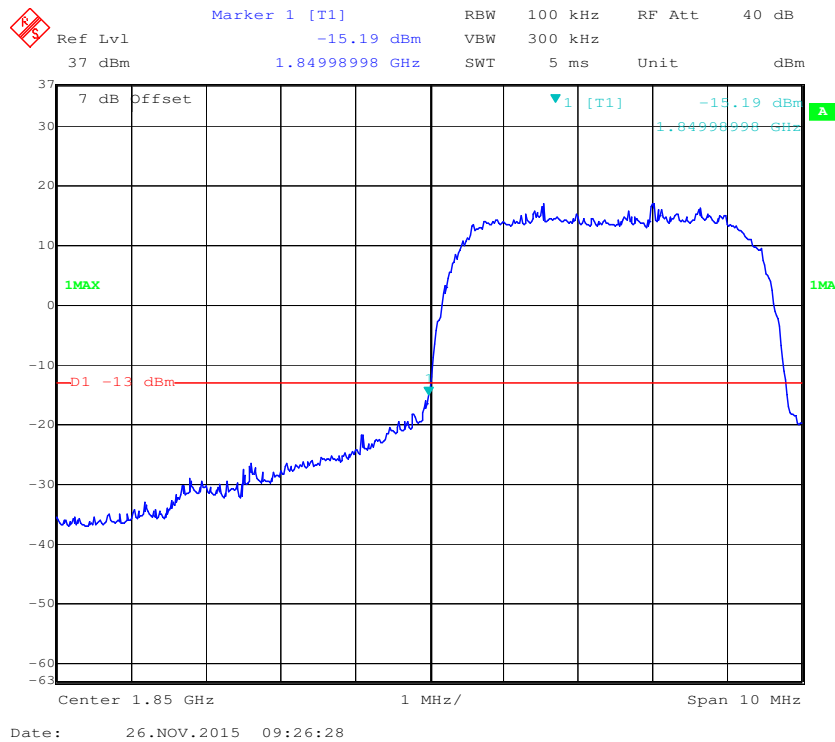


PCS Band, Right Band Edge for HSDPA (16QAM) Mode

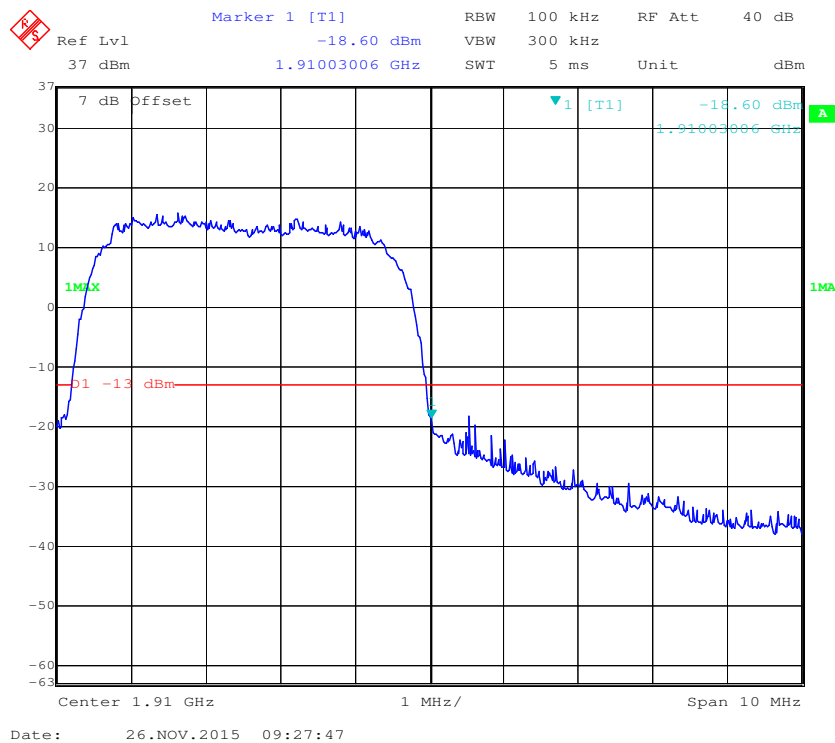


PCS Band, Left Band Edge for HSUPA (BPSK) Mode

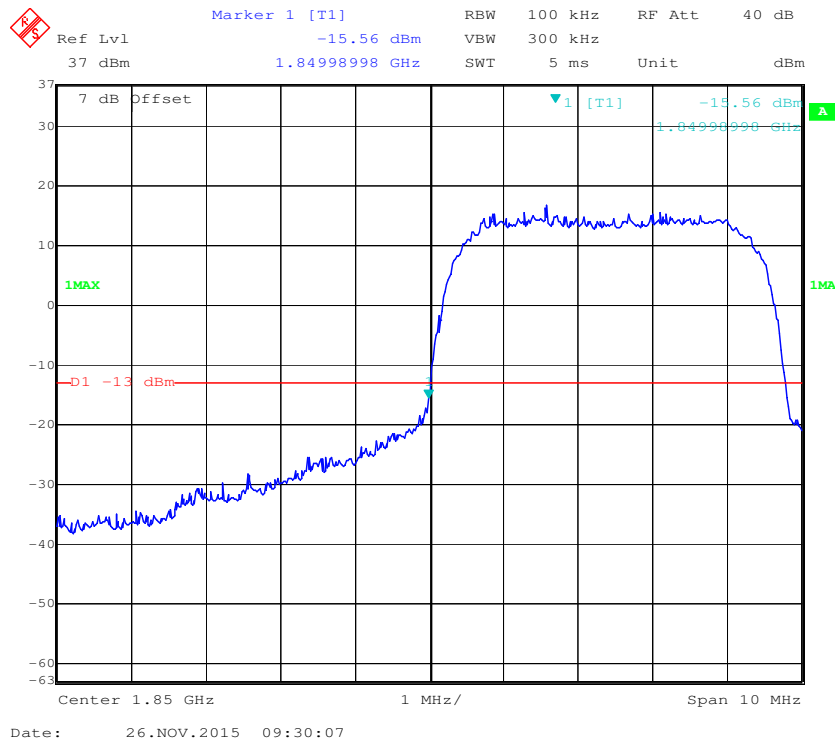


PCS Band, Right Band Edge for HSUPA (BPSK) Mode

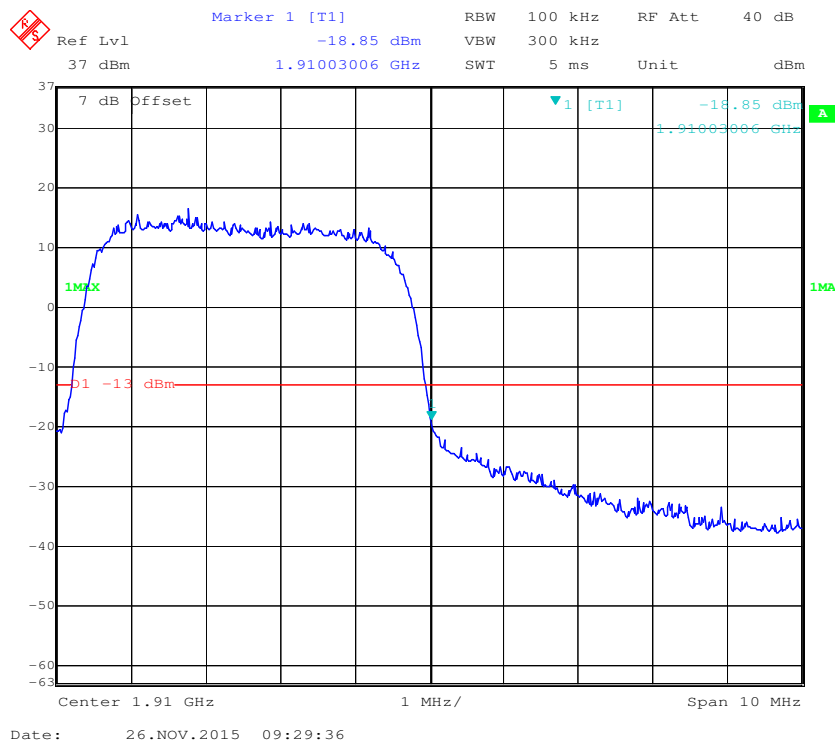


AWS Band, Left Band Edge for WCDMA (BPSK) Mode

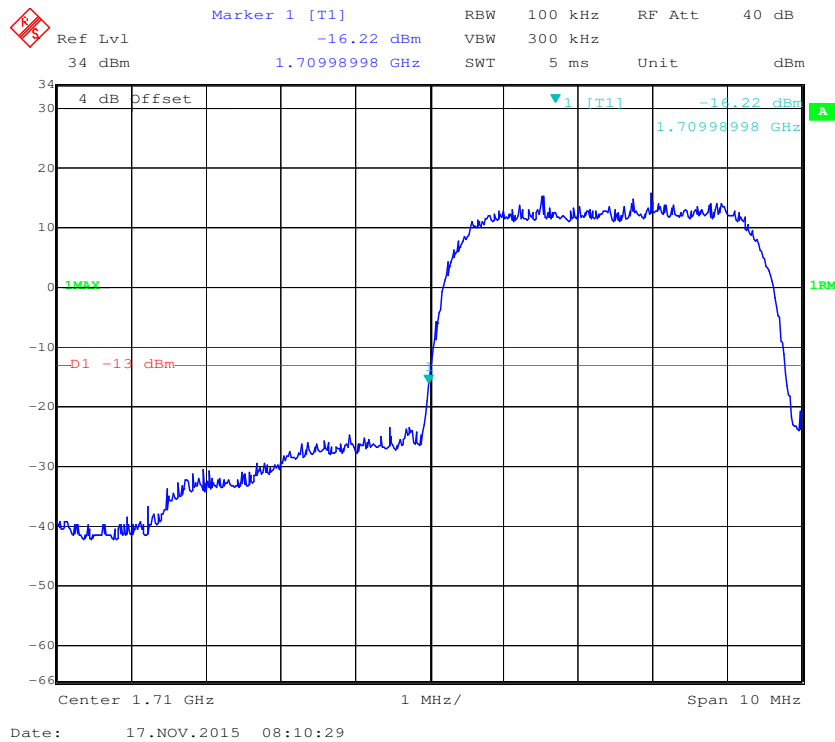


AWS Band, Right Band Edge for WCDMA (BPSK) Mode

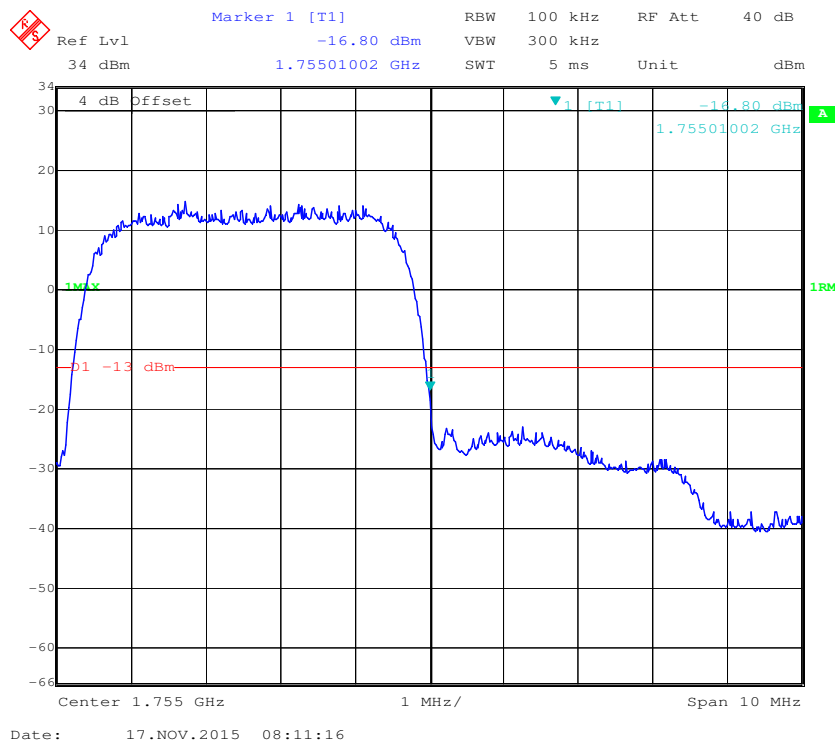


AWS Band, Left Band Edge for HSDPA (16QAM) Mode

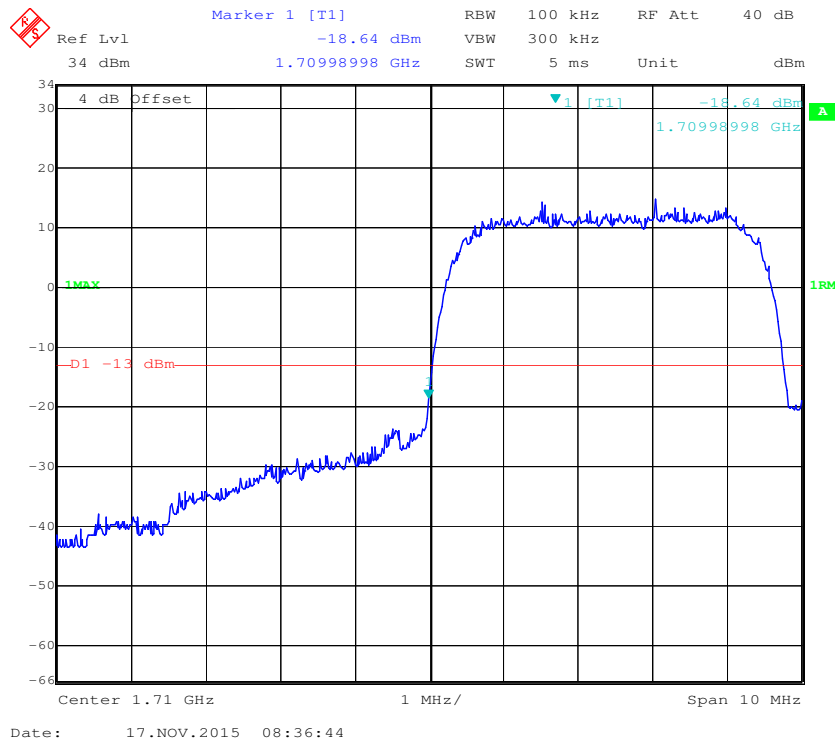


AWS Band, Right Band Edge for HSDPA (16QAM) Mode

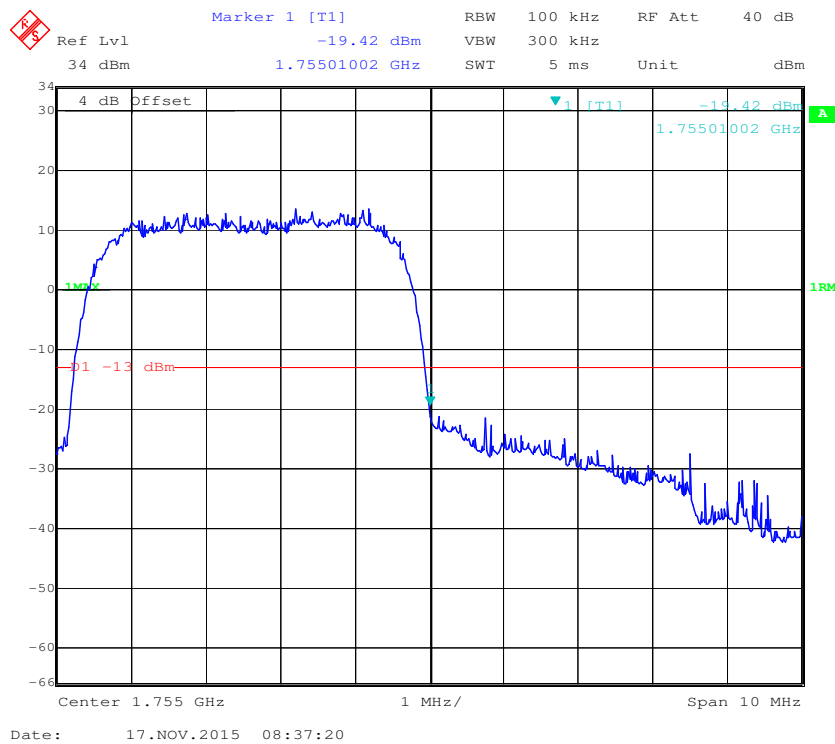

AWS Band, Left Band Edge for HSUPA (BPSK) Mode

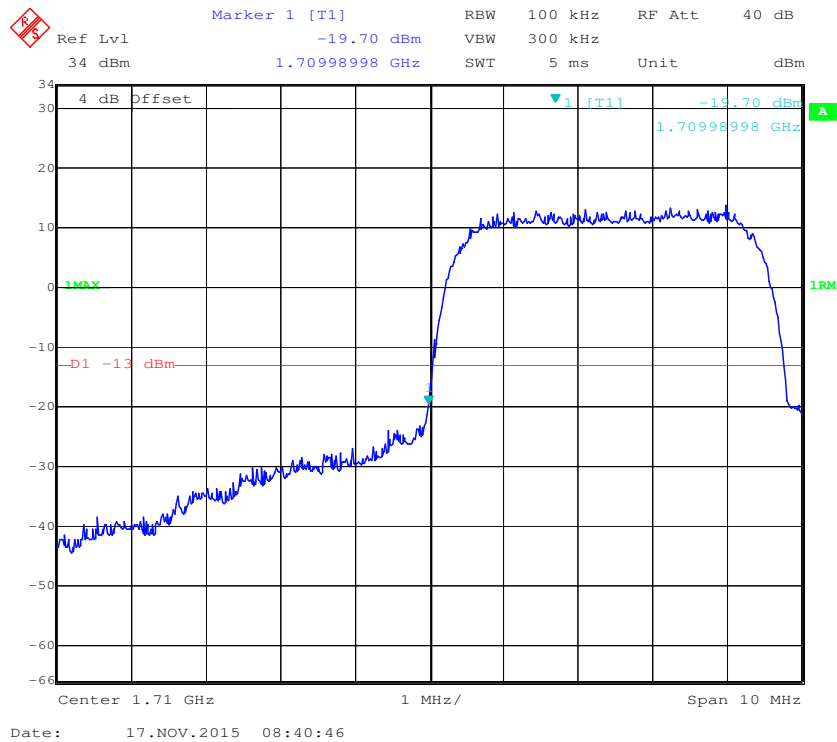

AWS Band, Right Band Edge for HSUPA (BPSK) Mode

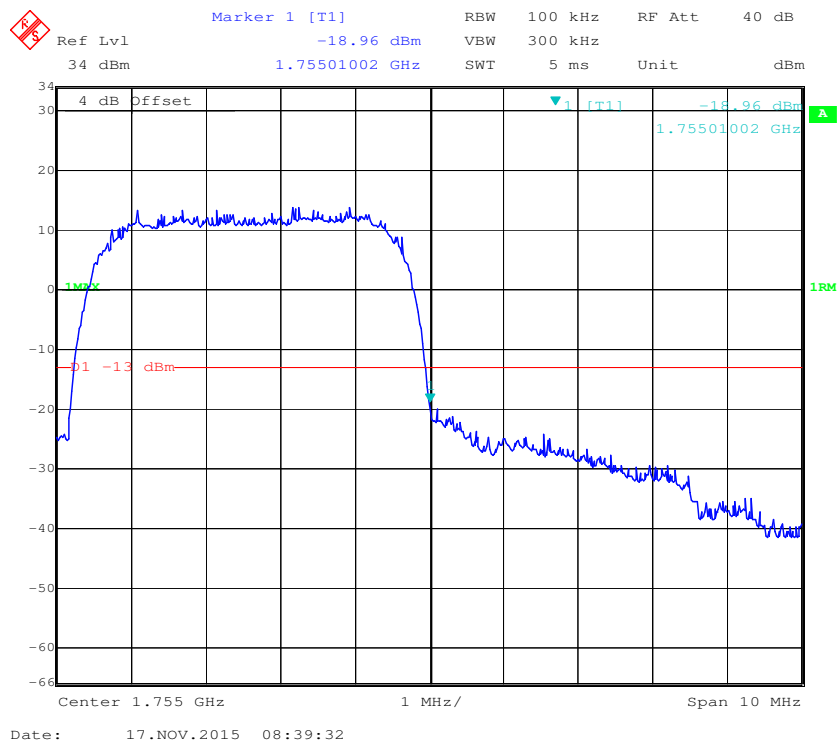

FCC §2.1055, §22.355 & §24.235 & §27.54 - FREQUENCY STABILITY**Applicable Standards**

FCC § 2.1055, §22.355, §24.235 and § 27.54.

According to FCC §2.1055, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency Range (MHz)	Base, fixed (ppm)	Mobile > 3 watts (ppm)	Mobile ≤ 3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929.	5.0	N/A	N/A
929 to 960.	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A


According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stays within the authorized frequency block.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

Frequency Stability vs. Voltage: For hand carried, battery powered equipment; reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

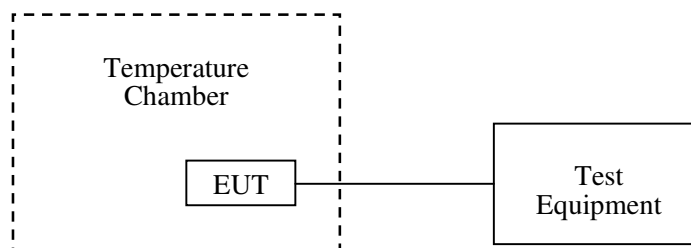

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
ESPEC	Temperature & Humidity Chamber	EL-10KA	09107726	2015-11-01	2016-11-01
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891	2015-11-23	2016-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	24 °C
Relative Humidity:	48 %
ATM Pressure:	101.0 kPa

The testing was performed by Rocky Kang on 2015-11-26.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to the following tables.

Cellular Band (Part 22H)**GSM Mode**

Middle Channel, $f_0 = 836.6$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	3.8	-12	-0.01434	2.5
-20		-7	-0.00837	2.5
-10		-4	-0.00478	2.5
0		-5	-0.00598	2.5
10		-3	-0.00359	2.5
20		-5	-0.00598	2.5
30		-2	-0.00239	2.5
40		-5	-0.00598	2.5
50		-6	-0.00717	2.5
25	V min.= 3.5	-11	-0.01315	2.5
25	V max.= 4.2	-12	-0.01434	2.5

EDGE Mode

Middle Channel, $f_0 = 836.6$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	3.8	13	0.01554	2.5
-20		11	0.01315	2.5
-10		6	0.00717	2.5
0		5	0.00598	2.5
10		3	0.00359	2.5
20		3	0.00359	2.5
30		8	0.00956	2.5
40		12	0.01434	2.5
50		15	0.01793	2.5
25	V min.= 3.5	11	0.01315	2.5
25	V max.= 4.2	16	0.01913	2.5

WCDMA Mode

Middle Channel, $f_0 = 836.6$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	3.8	8	0.00956	2.5
-20		3	0.00359	2.5
-10		5	0.00598	2.5
0		6	0.00717	2.5
10		11	0.01315	2.5
20		9	0.01076	2.5
30		7	0.00837	2.5
40		11	0.01315	2.5
50		14	0.01673	2.5
25	V min.= 3.5	6	0.00717	2.5
25	V max.= 4.2	12	0.01434	2.5

PCS Band (Part 24E)**GSM Mode**

Middle Channel, $f_0=1880.0$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	3.8	-4	-0.00213	pass
-20		-5	-0.00266	pass
-10		-3	-0.00160	pass
0		-2	-0.00106	pass
10		-4	-0.00213	pass
20		-5	-0.00266	pass
30		-1	-0.00053	pass
40		-7	-0.00372	pass
50		-6	-0.00319	pass
25	V min.= 3.5	-14	-0.00745	pass
25	V max.= 4.2	-2	-0.00106	pass

EDGE Mode

Middle Channel, $f_0=1880.0$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	3.8	-7	-0.00372	pass
-20		-4	-0.00213	pass
-10		-9	-0.00479	pass
0		-5	-0.00266	pass
10		-7	-0.00372	pass
20		-12	-0.00638	pass
30		-8	-0.00426	pass
40		-7	-0.00372	pass
50		-11	-0.00585	pass
25	V min.= 3.5	-6	-0.00319	pass
25	V max.= 4.2	-17	-0.00904	pass

WCDMA Mode

Middle Channel, $f_0=1880.0$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	3.8	-16	-0.00851	pass
-20		-9	-0.00479	pass
-10		-10	-0.00532	pass
0		-11	-0.00585	pass
10		-8	-0.00426	pass
20		-6	-0.00319	pass
30		-7	-0.00372	pass
40		-8	-0.00426	pass
50		-10	-0.00532	pass
25	V min.= 3.5	-14	-0.00745	pass
25	V max.= 4.2	-12	-0.00638	pass

AWS Band

Middle Channel, $f_0=1732.6$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	3.8	-7	-0.00404	Pass
-20		-1	-0.00058	Pass
-10		-4	-0.00231	Pass
0		-6	-0.00346	Pass
10		-7	-0.00404	Pass
20		-6	-0.00346	Pass
30		-4	-0.00231	Pass
40		-5	-0.00289	Pass
50		-9	-0.00519	Pass
25	V min.= 3.5	-2	-0.00115	Pass
25	V max.= 4.2	-4	-0.00231	Pass

***** END OF REPORT *****