
FCC Test Report

Report No.: AGC01665141101FE04

FCC ID : 2ADN6S52
APPLICATION PURPOSE : Original Equipment
PRODUCT DESIGNATION : 3G Smart Phone
BRAND NAME : TIGER
MODEL NAME : S52
CLIENT : Tiger International Electronic Company
DATE OF ISSUE : Nov.25, 2014
STANDARD(S) : FCC Part 15.247
TEST PROCEDURE(S) : KDB 558074 v03r02
REPORT VERSION : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Nov.25, 2014	Valid	Original Report

TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	5
2. GENERAL INFORMATION	6
2.1. PRODUCT DESCRIPTION.....	6
2.2. TABLE OF CARRIER FREQUENCIES.....	6
2.3. IEEE 802.11N MODULATION SCHEME	7
2.4. RELATED SUBMITTAL(S) / GRANT (S).....	7
2.5. TEST METHODOLOGY.....	7
2.6. SPECIAL ACCESSORIES	7
2.7. EQUIPMENT MODIFICATIONS	7
3. MEASUREMENT UNCERTAINTY.....	8
4. DESCRIPTION OF TEST MODES.....	8
5. SYSTEM TEST CONFIGURATION	9
5.1. CONFIGURATION OF EUT SYSTEM	9
5.2. EQUIPMENT USED IN EUT SYSTEM	9
5.3. SUMMARY OF TEST RESULTS	9
6. TEST FACILITY	10
7. PEAK OUTPUT POWER	11
7.1. MEASUREMENT PROCEDURE	11
7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	12
7.3. LIMITS AND MEASUREMENT RESULT	13
8. 6DB BANDWIDTH	15
8.1. MEASUREMENT PROCEDURE	15
8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	15
8.3. LIMITS AND MEASUREMENT RESULTS.....	15
9. CONDUCTED SPURIOUS EMISSION	20
9.1. MEASUREMENT PROCEDURE	20
9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	20
9.3. MEASUREMENT EQUIPMENT USED.....	20
9.4. LIMITS AND MEASUREMENT RESULT	20
10. MAXIMUM CONDUCTED OUTPUT PEAK POWER SPECTRAL DENSITY	49
10.1 MEASUREMENT PROCEDURE	49
10.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	49
10.3 MEASUREMENT EQUIPMENT USED.....	49
10.4 LIMITS AND MEASUREMENT RESULT	49

11. RADIATED EMISSION 54
11.1. MEASUREMENT PROCEDURE54
11.2. TEST SETUP55
11.3. LIMITS AND MEASUREMENT RESULT56
11.4. TEST RESULT56

12. BAND EDGE EMISSION 65
12.1. MEASUREMENT PROCEDURE65
12.2. TEST SET-UP65
12.3. Radiated Test Result66
12.4. Conducted Test Result.....70

13. FCC LINE CONDUCTED EMISSION TEST 74
13.1. LIMITS OF LINE CONDUCTED EMISSION TEST74
13.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST74
13.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST75
13.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST75
13.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST76

APPENDIX A: PHOTOGRAPHS OF TEST SETUP 78
APPENDIX B: PHOTOGRAPHS OF EUT 79

1. VERIFICATION OF CONFORMITY

Applicant	Tiger International Electronic Company
Address	Dera, Naif Satellite Market, Nakhil Road, Dubai, UAE
Manufacturer	SHENZHEN ELECTRONICAL TECHNOLOGY CO., LTD.
Address	C028 Third Floor, Foreign Trade Wholesale Market, Huaqiangbei, Futian District, Shenzhen, China
Product Designation	3G Smart Phone
Brand Name	TIGER
Test Model	S52
Date of test	Nov.18, 2014 to Nov.24, 2014
Deviation	None
Condition of Test Sample	Normal
Report Template	AGCRT-US-BGN/RF

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2003) and the energy emitted by the sample EUT tested as described in this report is in compliance with requirement of FCC Part 15 Rules requirement.

Prepared By

Matt Zhang

Matt Zhang

Nov.25, 2014

Checked By

Kidd Yang

Kidd Yang

Nov.25, 2014

Authorized By

Solger Zhang

Solger Zhang

Nov.25, 2014

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

The EUT is designed as “3G Smart Phone”. It is designed by way of utilizing the DSSS and OFDM technology to achieve the system operation.

A major technical description of EUT is described as following

Operation Frequency	2.412 GHz~2.462GHz
Output Power	IEEE 802.11b:11.76dBm; IEEE 802.11g:9.77dBm; IEEE 802.11n(20):9.68dBm; IEEE 802.11n(40):6.64dBm
Modulation	DSSS(DBPSK/DQPSK/CCK);OFDM(BPSK/QPSK/16-QAM/64-QAM)
Number of channels	11
Hardware Version	S130_MB_V1.11
Software Version	N/A
Antenna Designation	Integrated Antenna
Antenna Gain	0.8dBi
Power Supply	DC3.7V by Built-in Li-ion Battery

2.2. TABLE OF CARRIER FREQUENCIES

Frequency Band	Channel Number	Frequency
2400~2483.5MHZ	1	2412 MHZ
	2	2417 MHZ
	3	2422 MHZ
	4	2427 MHZ
	5	2432 MHZ
	6	2437 MHZ
	7	2442 MHZ
	8	2447 MHZ
	9	2452 MHZ
	10	2457 MHZ
	11	2462 MHZ

Note: For 20MHZ bandwidth system use Channel 1 to Channel 11

For 40MHZ bandwidth system use Channel 3 to Channel 9

2.3. IEEE 802.11N MODULATION SCHEME

MCS Index	Nss	Modulation	R	NBPSC	NCBPS		NDBPS		Data rate(Mbps)	
									800nsGI	
					20MHz	40MHz	20MHz	40MHz	20MHz	40MHz
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0
6	1	64-QAM	3/4	6	312	648	234	489	58.5	121.5
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0

Symbol	Explanation
NSS	Number of spatial streams
R	Code rate
NBPSC	Number of coded bits per single carrier
NCBPS	Number of coded bits per symbol
NDBPS	Number of data bits per symbol
GI	Guard interval

2.4. RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2ADN6S52** filing to comply with the FCC Part 15 requirements.

2.5. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4 (2003). Radiated testing was performed at an antenna to EUT distance 3 meters.

Others testing (listed at item 5.3) was performed according to the procedures in FCC Part 15.247 rules KDB 558074 D01 DTS Meas Guidance v03r02.

2.6. SPECIAL ACCESSORIES

Refer to section 5.2.

2.7. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

3. MEASUREMENT UNCERTAINTY

Conducted measurement: +/- 2.75dB

Radiated measurement: +/- 3.2dB

4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel TX
2	Middle channel TX
3	High channel TX
4	Normal operating

Note:

Transmit by 802.11b with Data rate (1/2/5.5/11)

Transmit by 802.11g with Data rate (6/9/12/18/24/36/48/54)

Transmit by 802.11n (20MHz) with Data rate (6.5/13/19.5/26/39/52/58.5/65)

Transmit by 802.11n (40MHz) with Data rate

(13.5/27/40.5/54/81/108/121.5/135)


Note:

1. The EUT has been set to operate continuously on the lowest, middle and highest operation frequency Individually, and the eut is operating at its maximum duty cycle>or equal 98%
2. All modes under which configure applicable have been tested and the worst mode test data recording in the test report, if no other mode data.
3. For Radiated Emission, 3axis were chosen for testing for each applicable mode.

5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF EUT SYSTEM

Configure:

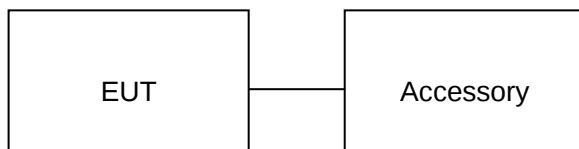

5.2. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1	3G Smart Phone	S52	FCCID:2ADN6S52	EUT
2	Adapter	GMT-050120A	DC5V / 1200mA	Accessory
3	Battery	S52	DC3.7V / 2000 mAh	Accessory
4	Earphone	S52	N/A	Accessory
5	USB Cable	S52	N/A	Accessory

Note: All the accessories have been used during the test in conduction emission test.

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.247	Peak Output Power	Compliant
§15.247	6 dB Bandwidth	Compliant
§15.247	Conducted Spurious Emission	Compliant
§15.247	Maximum Conducted Output Power SPECTRAL Density	Compliant
§15.209	Radiated Emission	Compliant
§15.247	Band Edges	Compliant
§15.207	Line Conduction Emission	Compliant

Note: The EUT received power from DC3.7V lithium battery.

6. TEST FACILITY

Site	Attestation of Global Compliance (Shenzhen) Co., Ltd
Location	2/F., Building 2, No.1-No.4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China
Description	The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2003.

ALL TEST EQUIPMENT LIST

Description	Manufacturer	Model	Cal. Date	Cal. Due
Power Probe	R&S	NRP-Z23	07/25/2014	07/24/2015
Power Meter	Agilent	N1911A	04/20/2014	04/20/2015
RF attenuator	N/A	RFA20db	N/A	N/A
Spectrum Analyzer	Agilent	E4440A	02/17/2014	02/16/2015
Amplifier	EM	EM30180	02/17/2014	02/16/2015
Horn Antenna	EM	EM-AH-10180	02/17/2014	02/16/2015
Horn Antenna	A.H. Systems Inc.	SAS-574	07/25/2014	07/24/2015
EMI Test Receiver	Rohde & Schwarz	ESCI	07/25/2014	07/24/2015
WIDEBAND REQUENCY ANTENNA	SCHWARZBECK	VULB9168	08/16/2014	08/15/2015
Loop Antenna	A.H.	SAS-526B	05/10/2014	05/09/2015
LISN	R&S	ESH3-Z5	07/25/2014	07/24/2015
Radiation Cable 1	Sat	RE1	06/04/2014	06/03/2015
Radiation Cable 2	Sat	RE2	06/04/2014	06/03/2015
Conduction Cable	Sat	CE1	06/04/2014	06/03/2015

7. PEAK OUTPUT POWER

7.1. MEASUREMENT PROCEDURE

For peak power test:

1. Use a direct connection between the antenna port of the transmitter and the power meter, through suitable attenuation
2. Set the bandwidth of the power meter is 40MHz
3. Record the peak value


For average power test:

1. Connect EUT RF output port to power probe through an RF attenuator.
2. Connect the power probe to the PC.
3. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
4. Record the maximum power from the software.
5. The maximum peak power shall be less 1 Watt (30dBm).


Note : The EUT was tested according to KDB 558074v03r02 for compliance to FCC 47CFR 15.247 requirements.

7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

PEAK POWER TEST SETUP



AVERAGE POWER SETUP

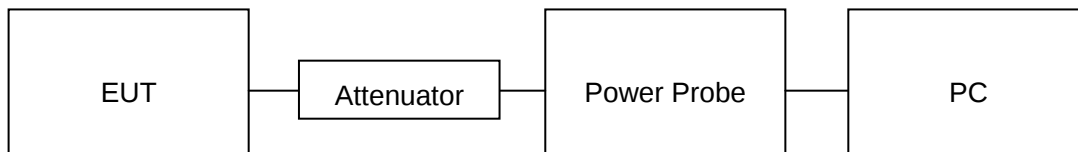

7.3. LIMITS AND MEASUREMENT RESULT

TEST ITEM	PEAK POWER
TEST MODE	802.11b with data rate 1

LIMITS AND MEASUREMENT RESULT				
Frequency (GHz)	Average Power (dBm)	Peak Power (dBm)	Applicable Limits (dBm)	Pass or Fail
2.412	9.78	11.76	30	Pass
2.437	9.71	11.69	30	Pass
2.462	9.74	11.72	30	Pass

TEST ITEM	PEAK POWER
TEST MODE	802.11g with data rate 6

LIMITS AND MEASUREMENT RESULT				
Frequency (GHz)	Average Power (dBm)	Peak Power (dBm)	Applicable Limits (dBm)	Pass or Fail
2.412	7.79	9.77	30	Pass
2.437	7.5	9.48	30	Pass
2.462	7.59	9.57	30	Pass

TEST ITEM	PEAK POWER
TEST MODE	802.11n 20 with data rate 6.5

LIMITS AND MEASUREMENT RESULT				
Frequency (GHz)	Average Power (dBm)	Peak Power (dBm)	Applicable Limits (dBm)	Pass or Fail
2.412	7.7	9.68	30	Pass
2.437	7.58	9.56	30	Pass
2.462	7.51	9.49	30	Pass

TEST ITEM	PEAK POWER
TEST MODE	802.11n 40 with data rate 13.5

LIMITS AND MEASUREMENT RESULT				
Frequency (GHz)	Average Power (dBm)	Peak Power (dBm)	Applicable Limits (dBm)	Pass or Fail
2.422	4.66	6.64	30	Pass
2.437	4.55	6.53	30	Pass
2.452	4.44	6.42	30	Pass


8. 6DB BANDWIDTH

8.1. MEASUREMENT PROCEDURE

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 KHz, VBW $\geq$ 3 $\times$ RBW.
4. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements.


8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

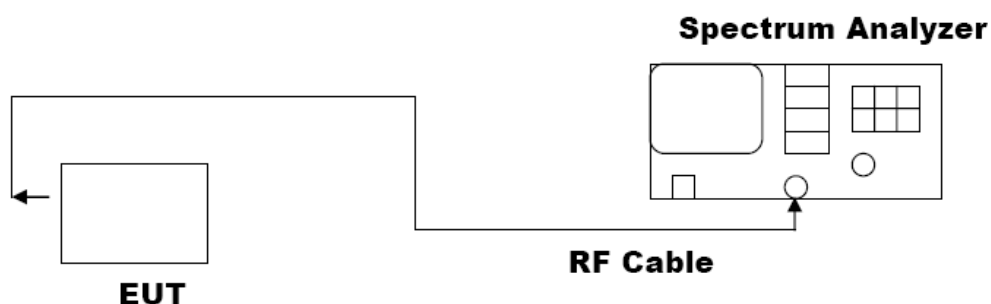

8.3. LIMITS AND MEASUREMENT RESULTS

Mode	Channel	6dB Bandwidth [MHz]	OBW [MHz]	Verdict
11B	LCH	9.11	12.97	PASS
11B	MCH	10.08	13.21	PASS
11B	HCH	10.11	13.67	PASS
11G	LCH	15.16	16.36	PASS
11G	MCH	15.77	16.36	PASS
11G	HCH	15.95	16.37	PASS
11N20SISO	LCH	17.60	17.53	PASS
11N20SISO	MCH	17.58	17.54	PASS
11N20SISO	HCH	17.55	17.53	PASS
11N40SISO	LCH	35.31	35.79	PASS
11N40SISO	MCH	35.28	35.81	PASS
11N40SISO	HCH	35.22	35.79	PASS

Test Graph

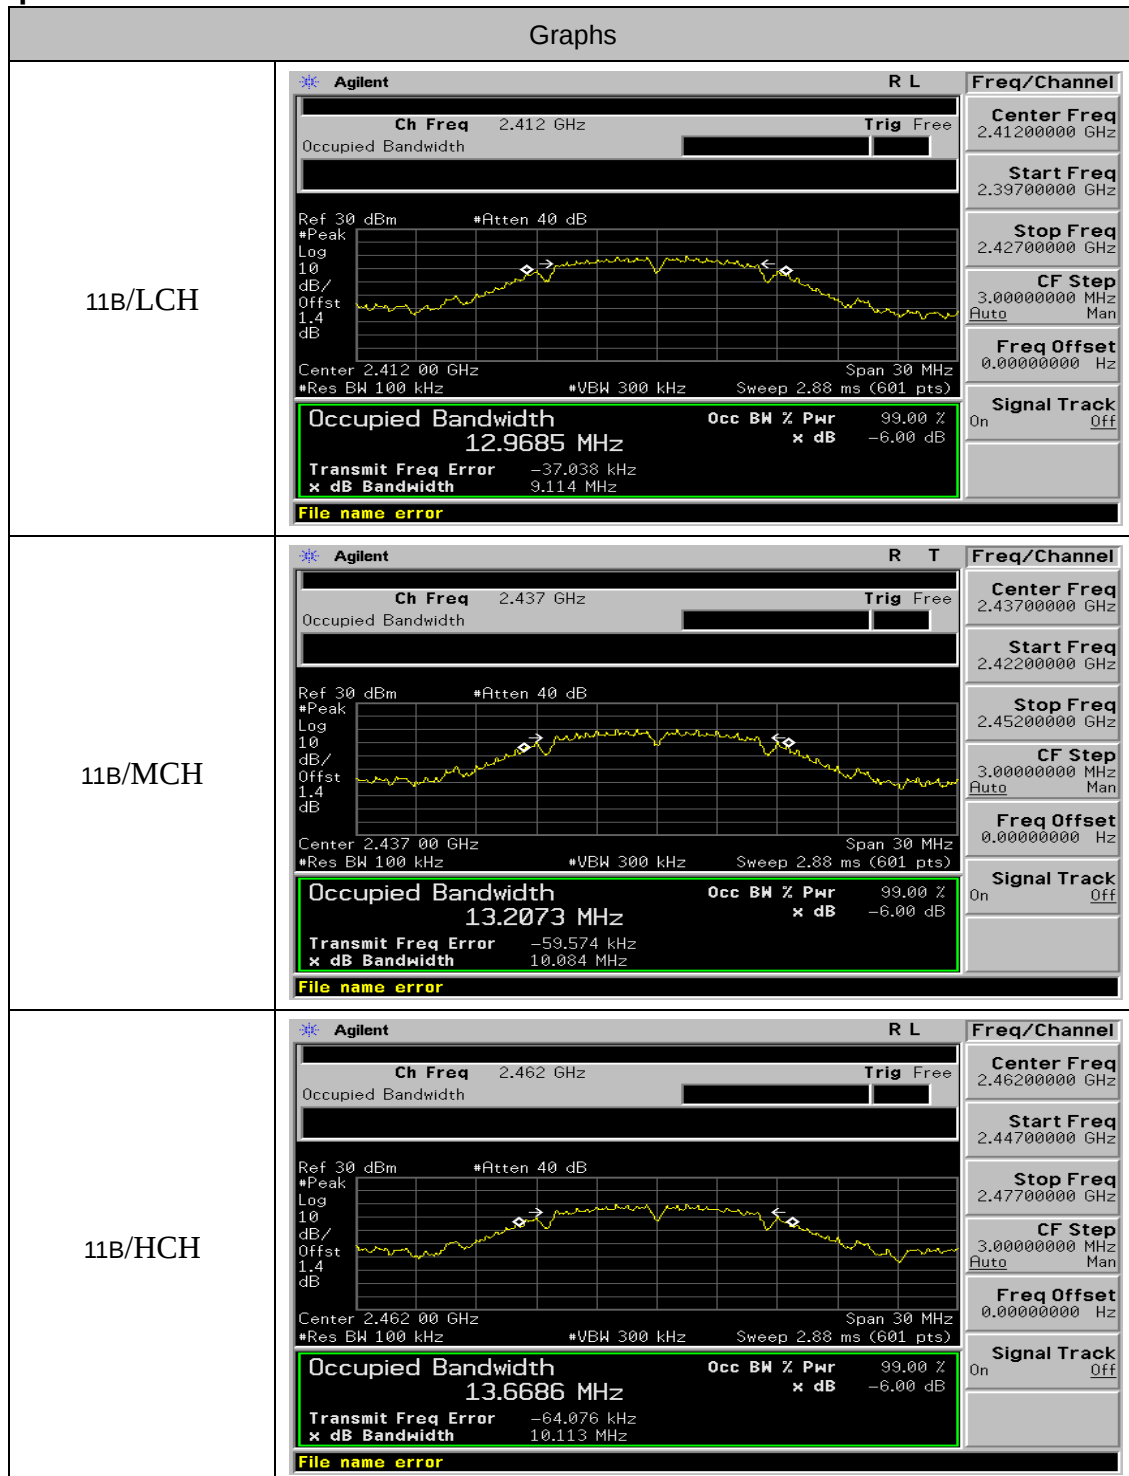

11G/LCH	Agilent Ch Freq 2.412 GHz Trig Free Occupied Bandwidth Ref 30 dBm *Atten 40 dB Peak Log 10 dB/ Offst 1.4 dB Center 2.412 00 GHz *Res BW 100 kHz *VBW 300 kHz Sweep 2.88 ms (601 pts) Span 30 MHz Occupied Bandwidth 16.3583 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -20.958 kHz x dB Bandwidth 15.165 MHz File name error	Freq/Channel Center Freq 2.41200000 GHz Start Freq 2.39700000 GHz Stop Freq 2.42700000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off
11G/MCH	Agilent Ch Freq 2.437 GHz Trig Free Occupied Bandwidth Ref 30 dBm *Atten 40 dB Peak Log 10 dB/ Offst 1.4 dB Center 2.437 00 GHz *Res BW 100 kHz *VBW 300 kHz Sweep 2.88 ms (601 pts) Span 30 MHz Occupied Bandwidth 16.3565 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -14.070 kHz x dB Bandwidth 15.766 MHz File name error	Freq/Channel Center Freq 2.43700000 GHz Start Freq 2.42200000 GHz Stop Freq 2.45200000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off
11G/HCH	Agilent Ch Freq 2.462 GHz Trig Free Occupied Bandwidth Ref 30 dBm *Atten 40 dB Peak Log 10 dB/ Offst 1.4 dB Center 2.462 00 GHz *Res BW 100 kHz *VBW 300 kHz Sweep 2.88 ms (601 pts) Span 30 MHz Occupied Bandwidth 16.3699 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -12.618 kHz x dB Bandwidth 15.945 MHz File name error	Freq/Channel Center Freq 2.46200000 GHz Start Freq 2.44700000 GHz Stop Freq 2.47700000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off

11N20SISO/LCH	Agilent R L Freq/Channel Ch Freq 2.412 GHz Trig Free Occupied Bandwidth Ref 30 dBm *Atten 40 dB *Peak Log 10 dB/ Offst 1.4 dB Center 2.412 00 GHz *Res BW 100 kHz *VBW 300 kHz Sweep 2.88 ms (601 pts) Span 30 MHz Occupied Bandwidth 17.5338 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -7.375 kHz x dB Bandwidth 17.598 MHz File name error Center Freq 2.41200000 GHz Start Freq 2.39700000 GHz Stop Freq 2.42700000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off
11N20SISO/MCH	Agilent R L Freq/Channel Ch Freq 2.437 GHz Trig Free Occupied Bandwidth Ref 30 dBm *Atten 40 dB *Peak Log 10 dB/ Offst 1.4 dB Center 2.437 00 GHz *Res BW 100 kHz *VBW 300 kHz Sweep 2.88 ms (601 pts) Span 30 MHz Occupied Bandwidth 17.5443 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -14.278 kHz x dB Bandwidth 17.582 MHz File name error Center Freq 2.43700000 GHz Start Freq 2.42200000 GHz Stop Freq 2.45200000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off
11N20SISO/HCH	Agilent R T Freq/Channel Ch Freq 2.462 GHz Trig Free Occupied Bandwidth Ref 30 dBm *Atten 40 dB *Peak Log 10 dB/ Offst 1.4 dB Center 2.462 00 GHz *Res BW 100 kHz *VBW 300 kHz Sweep 2.88 ms (601 pts) Span 30 MHz Occupied Bandwidth 17.5329 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -12.902 kHz x dB Bandwidth 17.547 MHz File name error Center Freq 2.46200000 GHz Start Freq 2.44700000 GHz Stop Freq 2.47700000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off

11N40SISO/LCH	Agilent R L Freq/Channel Ch Freq 2.422 GHz Trig Free Occupied Bandwidth Ref 30 dBm *Atten 40 dB *Peak Log 10 dB/ Offst 1.4 dB Center 2.422 00 GHz *Res BW 100 kHz *VBW 300 kHz Sweep 5.76 ms (601 pts) Span 60 MHz Occupied Bandwidth 35.7867 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -53.032 kHz x dB Bandwidth 35.310 MHz File name error Center Freq 2.42200000 GHz Start Freq 2.39200000 GHz Stop Freq 2.45200000 GHz CF Step 6.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off
11N40SISO/MCH	Agilent R L Freq/Channel Ch Freq 2.437 GHz Trig Free Occupied Bandwidth Ref 30 dBm *Atten 40 dB *Peak Log 10 dB/ Offst 1.4 dB Center 2.437 00 GHz *Res BW 100 kHz *VBW 300 kHz Sweep 5.76 ms (601 pts) Span 60 MHz Occupied Bandwidth 35.8065 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -53.364 kHz x dB Bandwidth 35.285 MHz File name error Center Freq 2.43700000 GHz Start Freq 2.40700000 GHz Stop Freq 2.46700000 GHz CF Step 6.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off
11N40SISO/HCH	Agilent R L Freq/Channel Ch Freq 2.452 GHz Trig Free Occupied Bandwidth Ref 30 dBm *Atten 40 dB *Peak Log 10 dB/ Offst 1.4 dB Center 2.452 00 GHz *Res BW 100 kHz *VBW 300 kHz Sweep 5.76 ms (601 pts) Span 60 MHz Occupied Bandwidth 35.7940 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -55.296 kHz x dB Bandwidth 35.223 MHz File name error Center Freq 2.45200000 GHz Start Freq 2.42200000 GHz Stop Freq 2.48200000 GHz CF Step 6.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off

9. CONDUCTED SPURIOUS EMISSION

9.1. MEASUREMENT PROCEDURE

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements.

Owing to satisfy the requirements of the number of measurement points, we set the RBW=1MHz, VBW>RBW, scan up through 10th harmonic, and consider the tested results as the worst case, if the tested results conform to the requirement, we can deem that the real tested results(set the RBW=100KHz, VBW>RBW) are conform to the requirement.

9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 8.2.


9.3. MEASUREMENT EQUIPMENT USED


The same as described in section 6.



9.4. LIMITS AND MEASUREMENT RESULT


LIMITS AND MEASUREMENT RESULT		
Applicable Limits	Measurement Result	
	Test Data	Criteria
In any 100 KHz Bandwidth Outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power. In addition, radiation emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in§15.209(a))	At least -20dBc than the limit Specified on the BOTTOM Channel	PASS
	At least -20dBc than the limit Specified on the TOP Channel	PASS



Test Graph

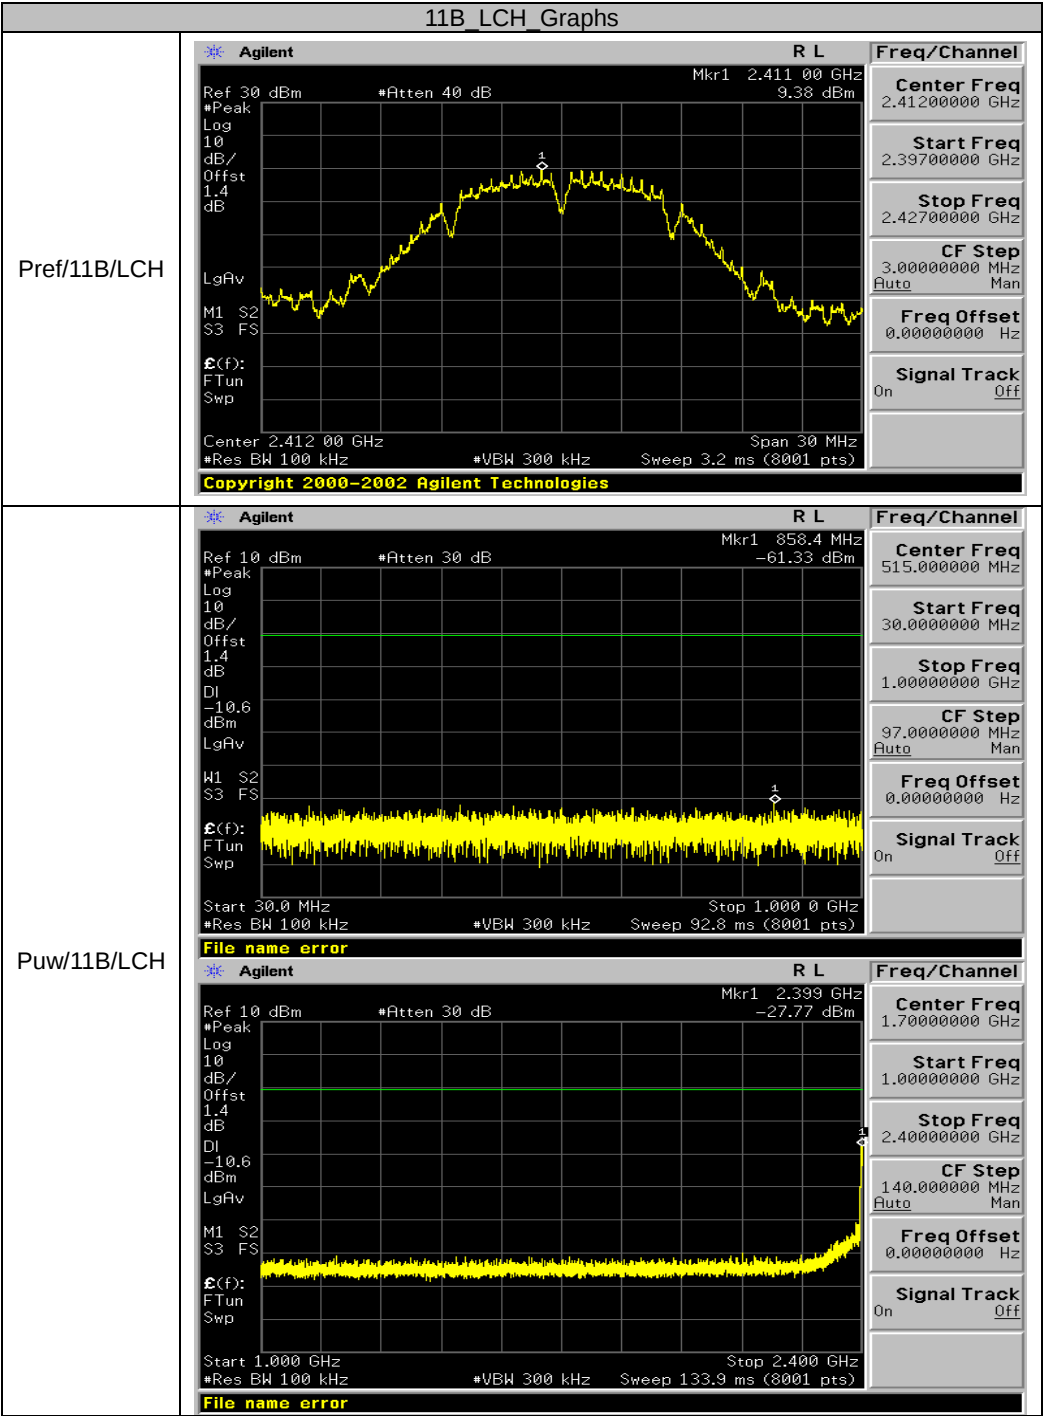


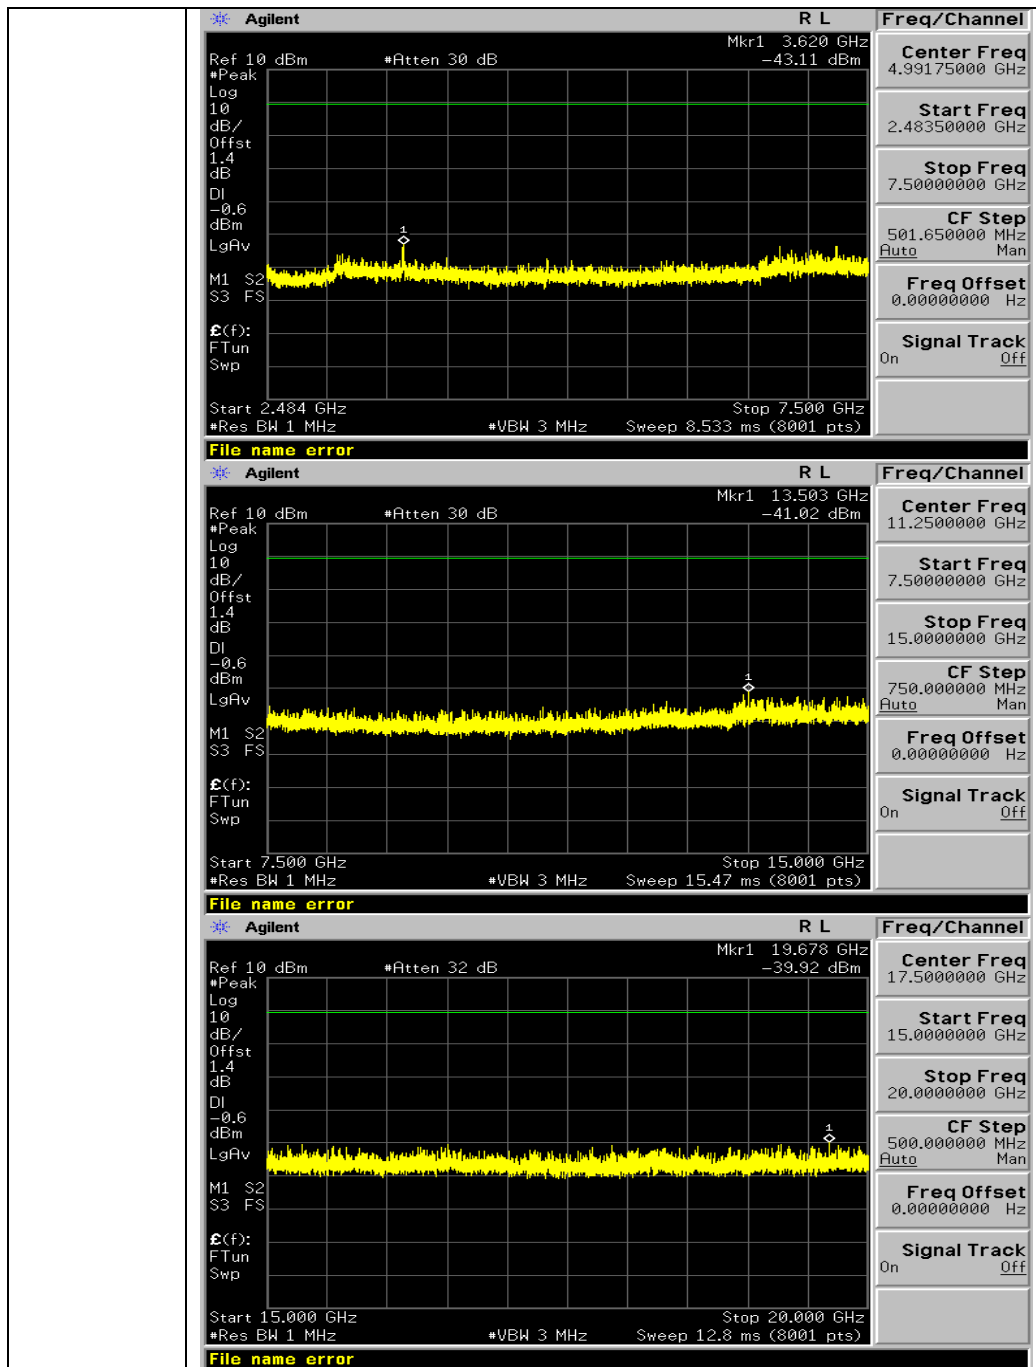


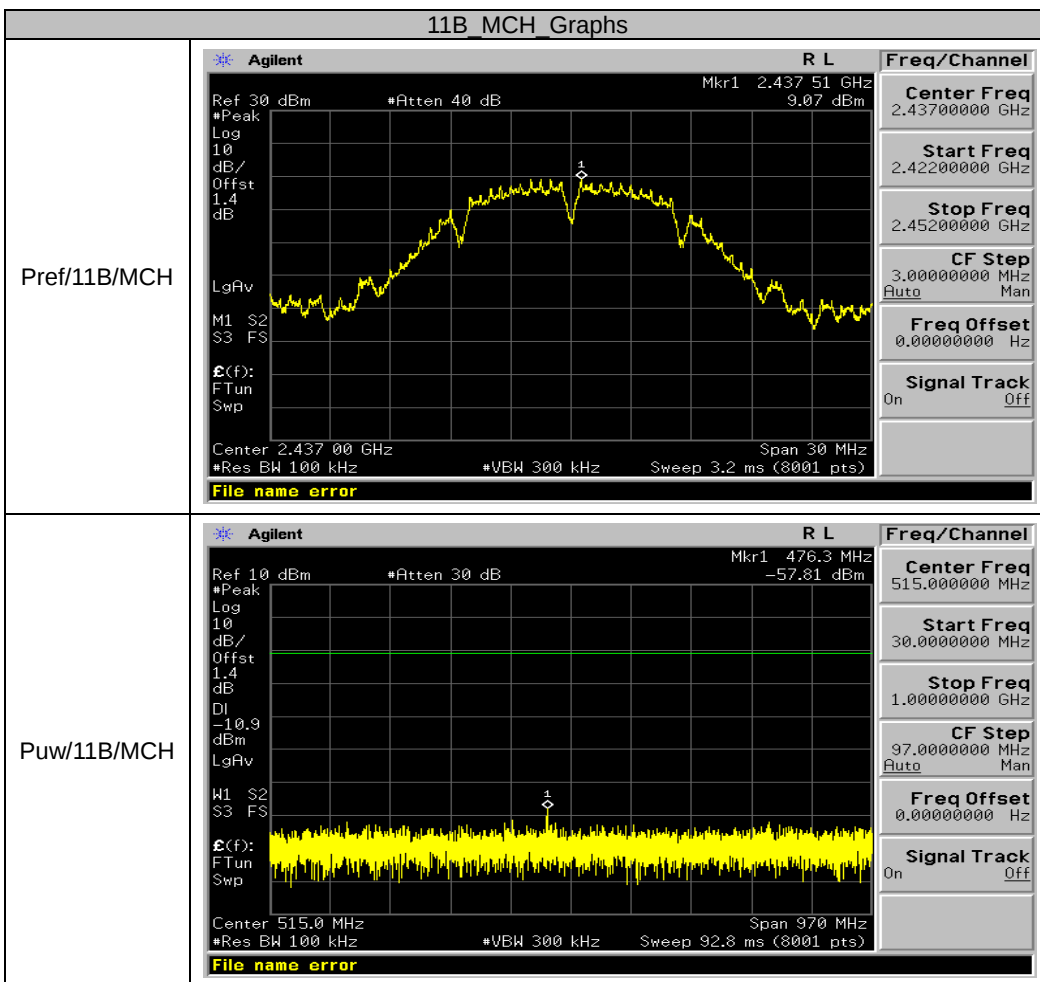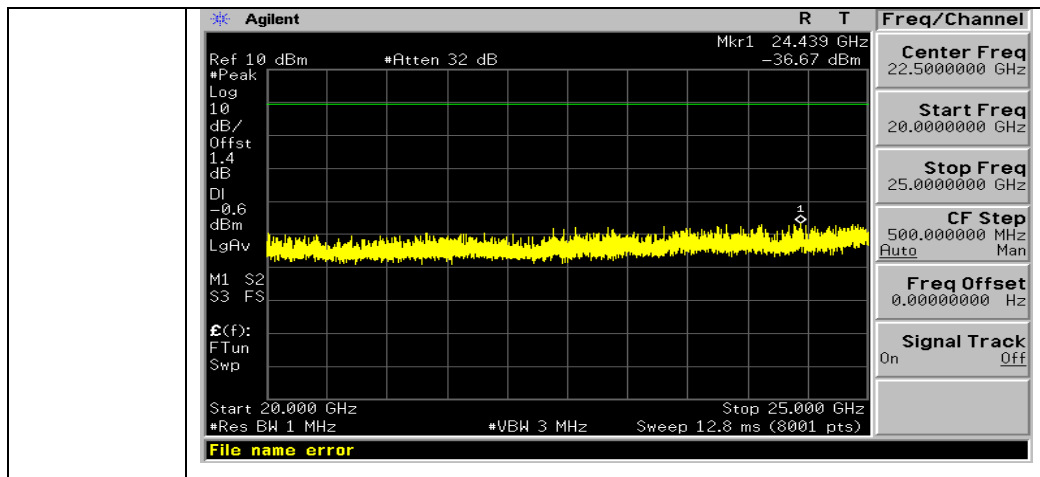


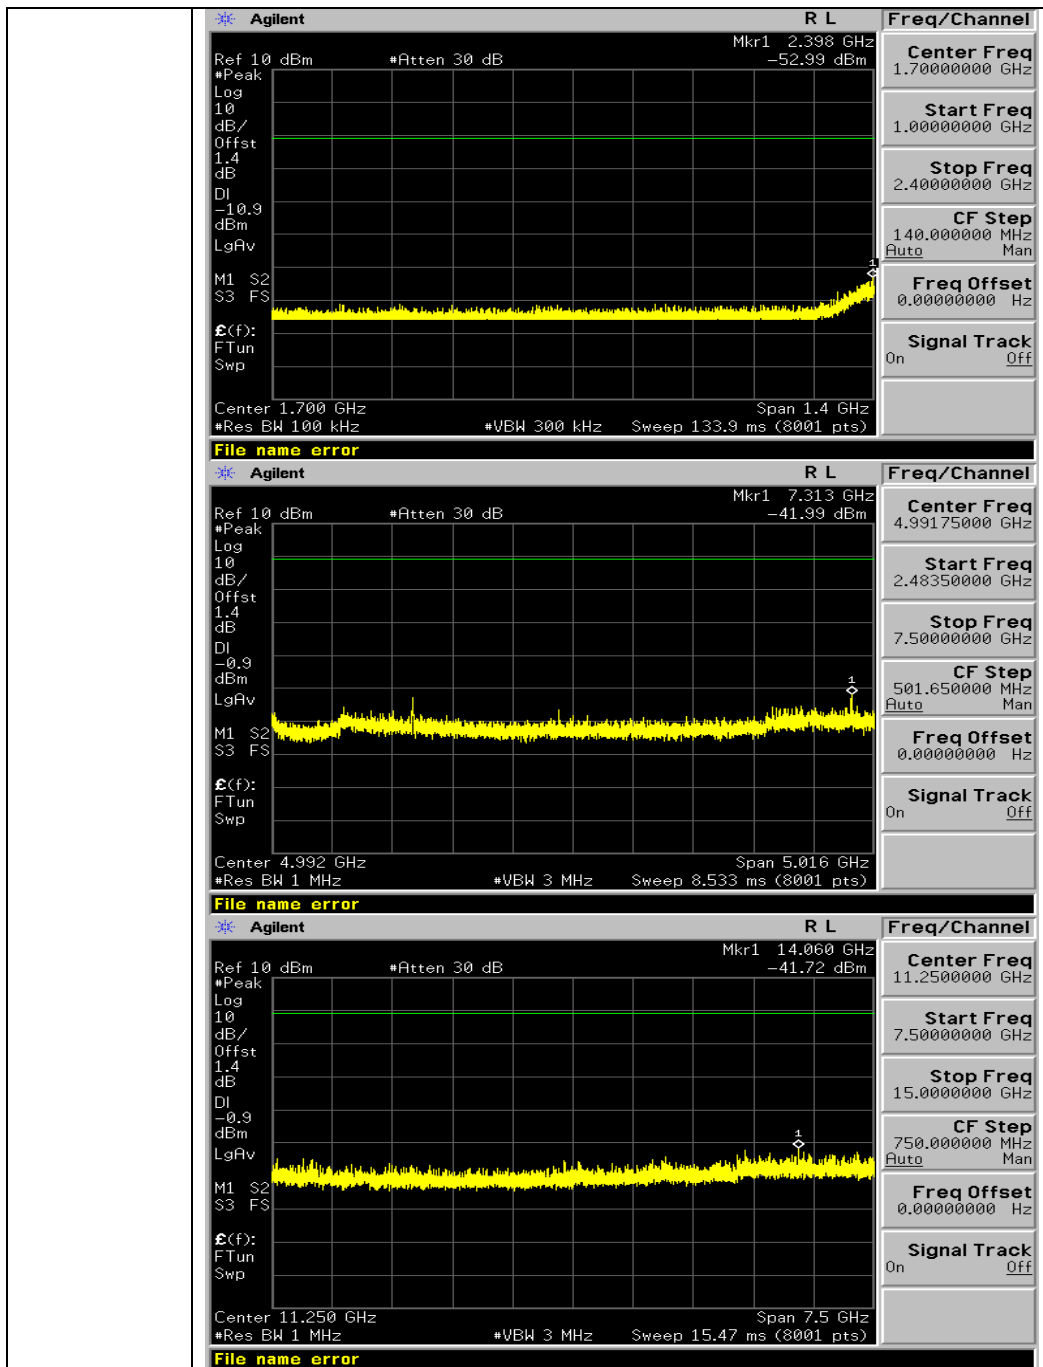


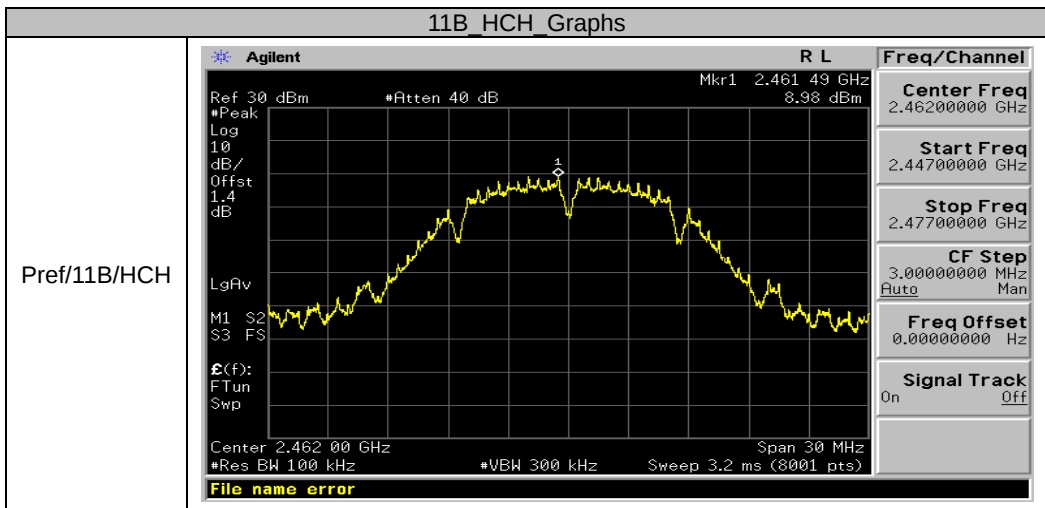
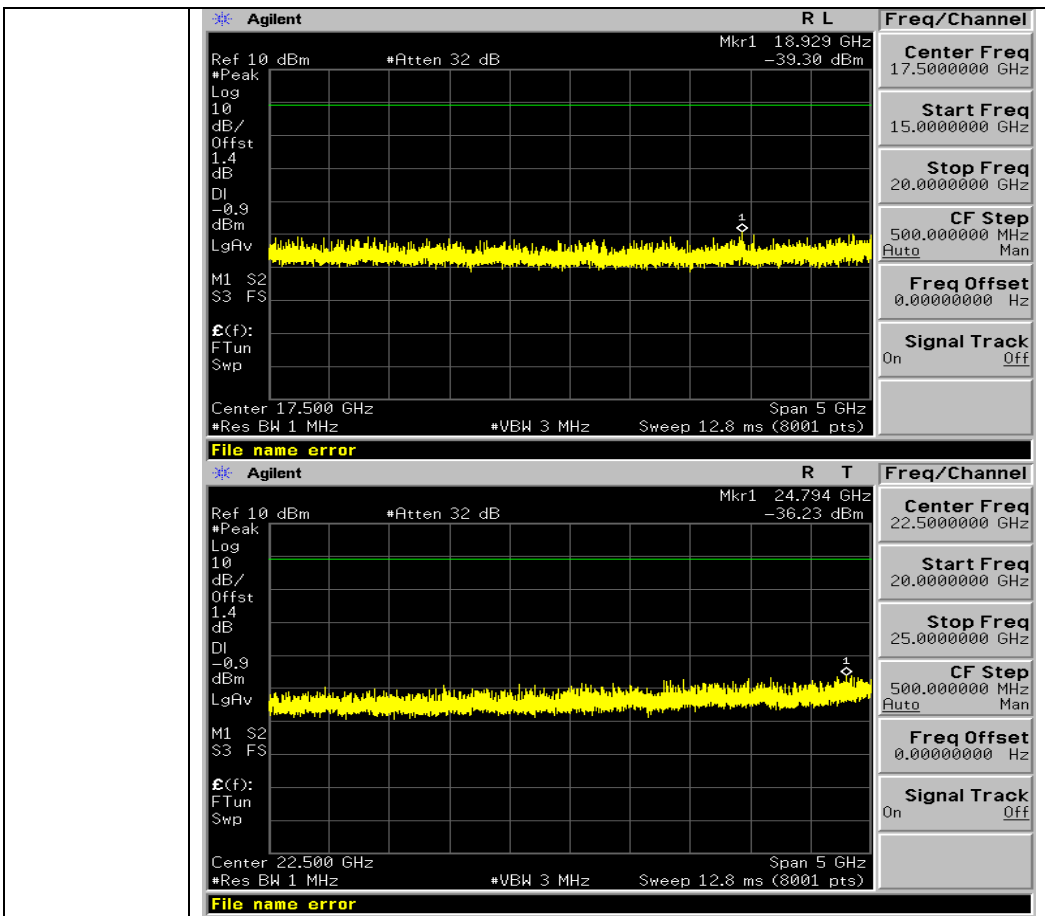


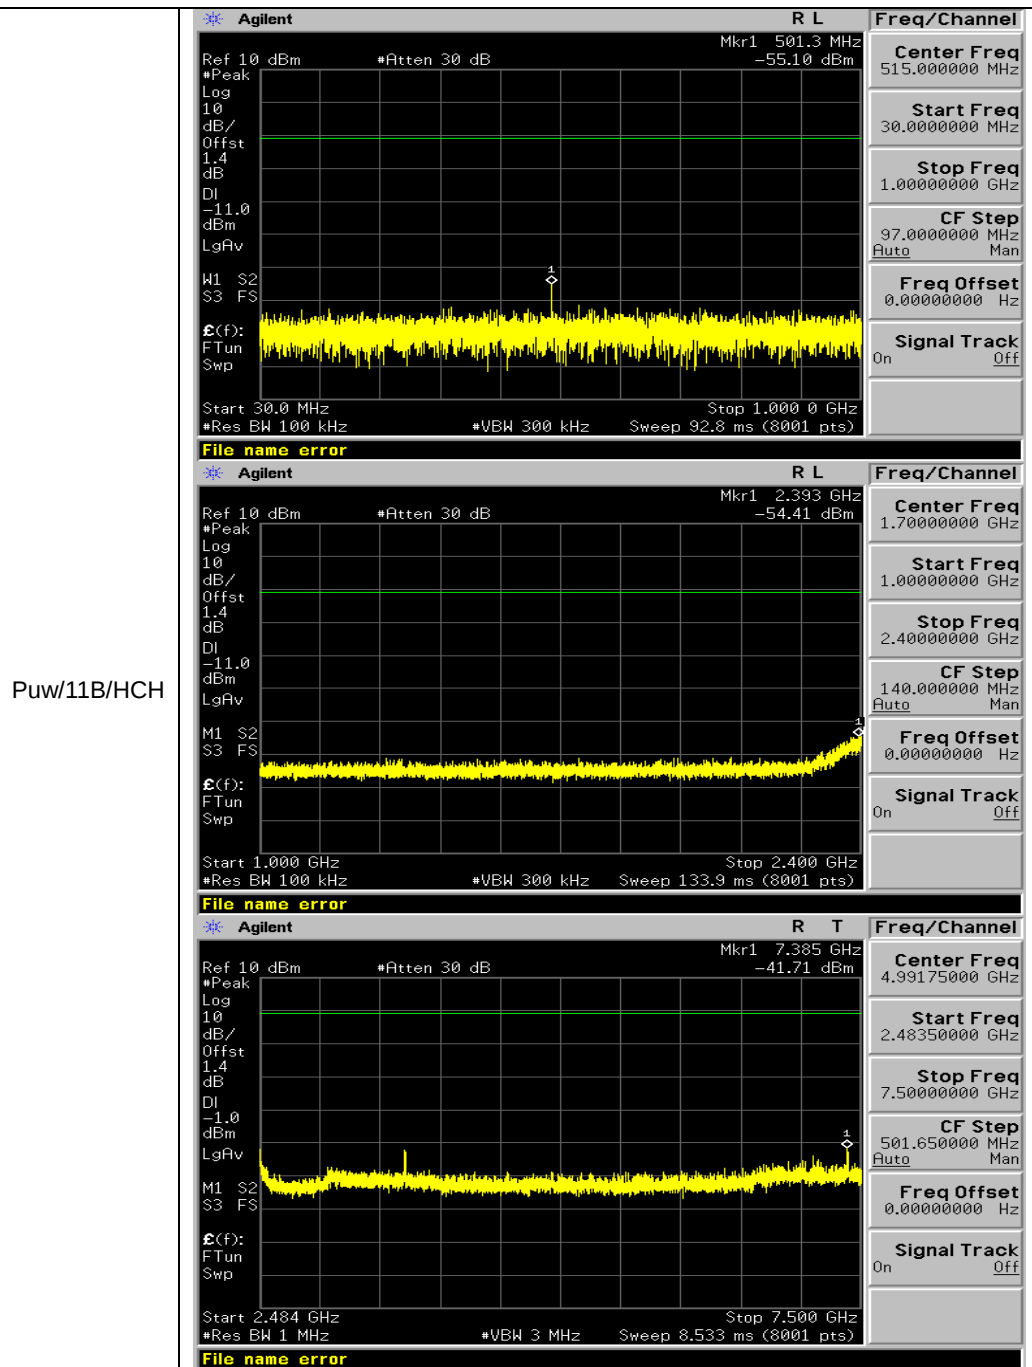



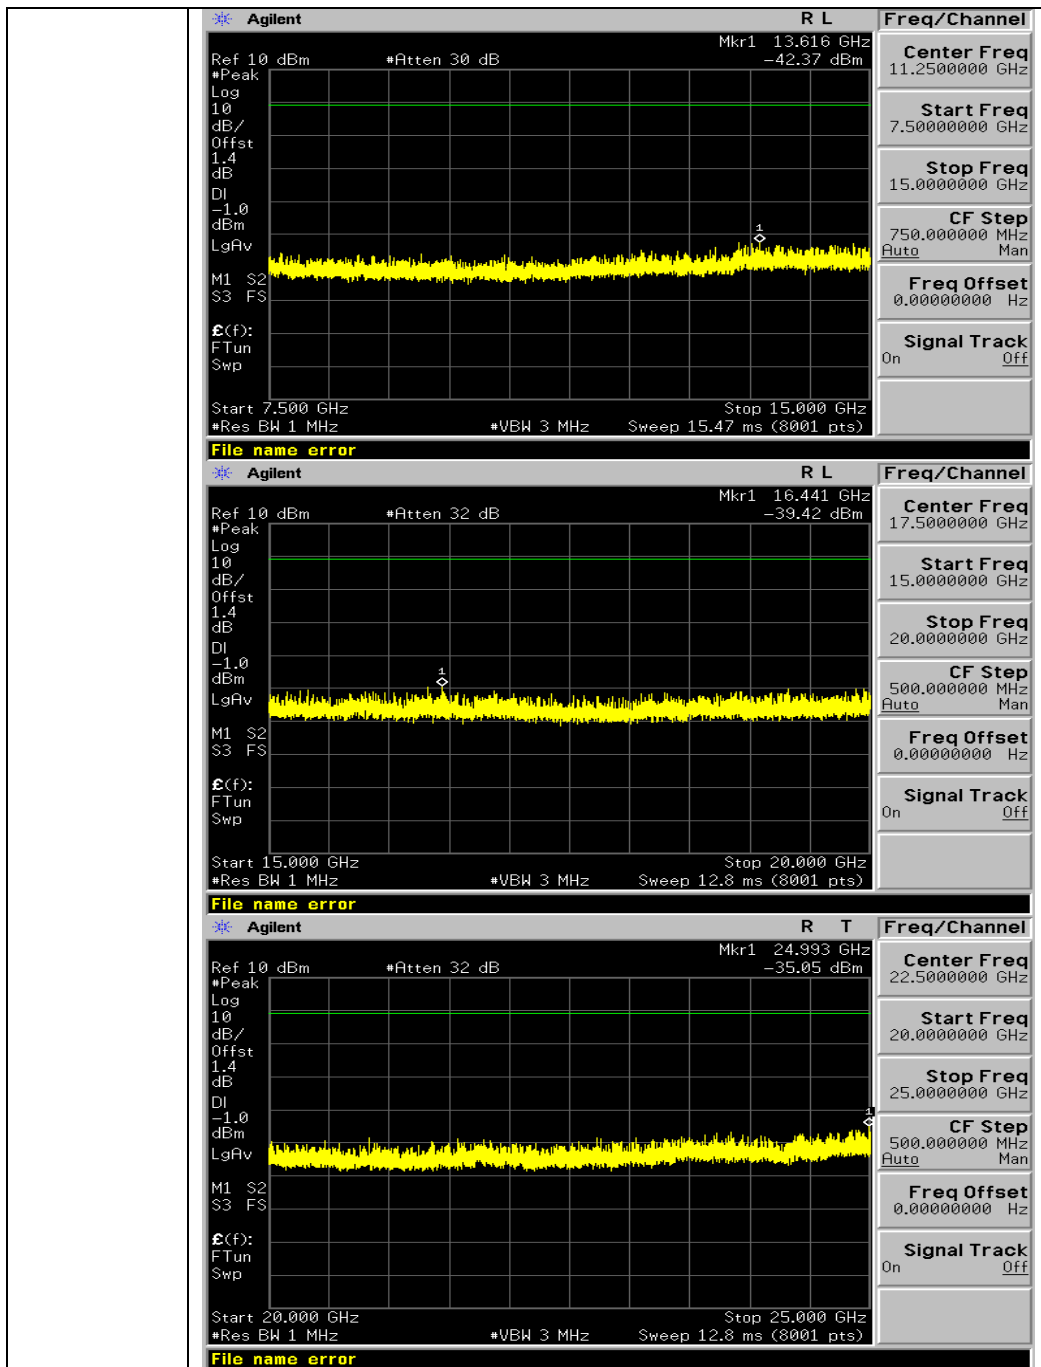


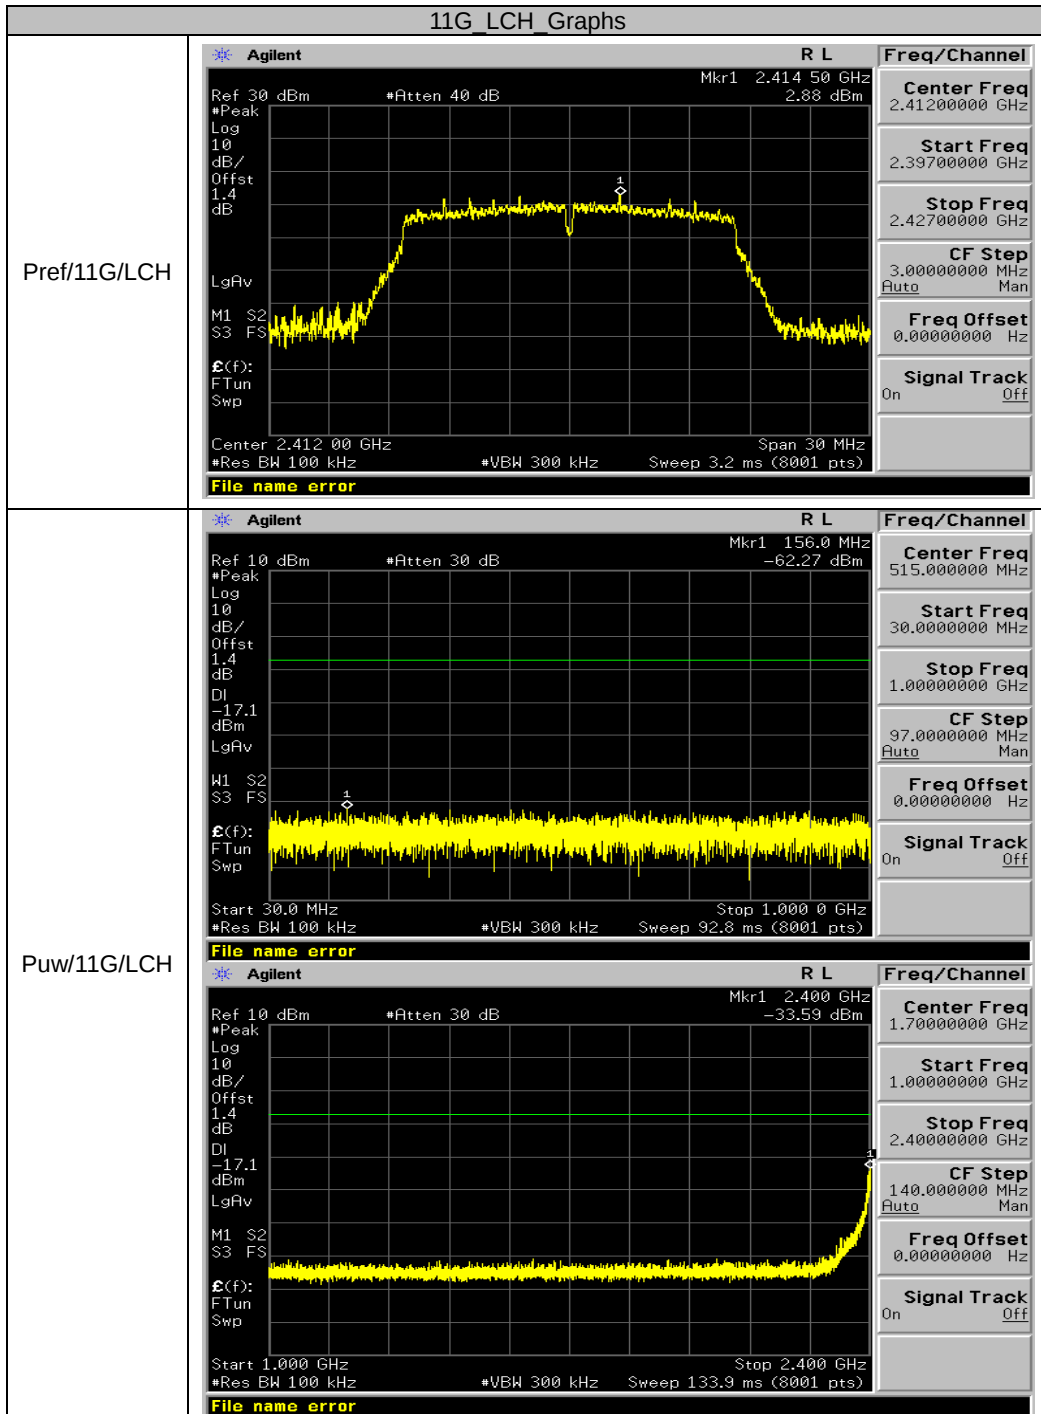


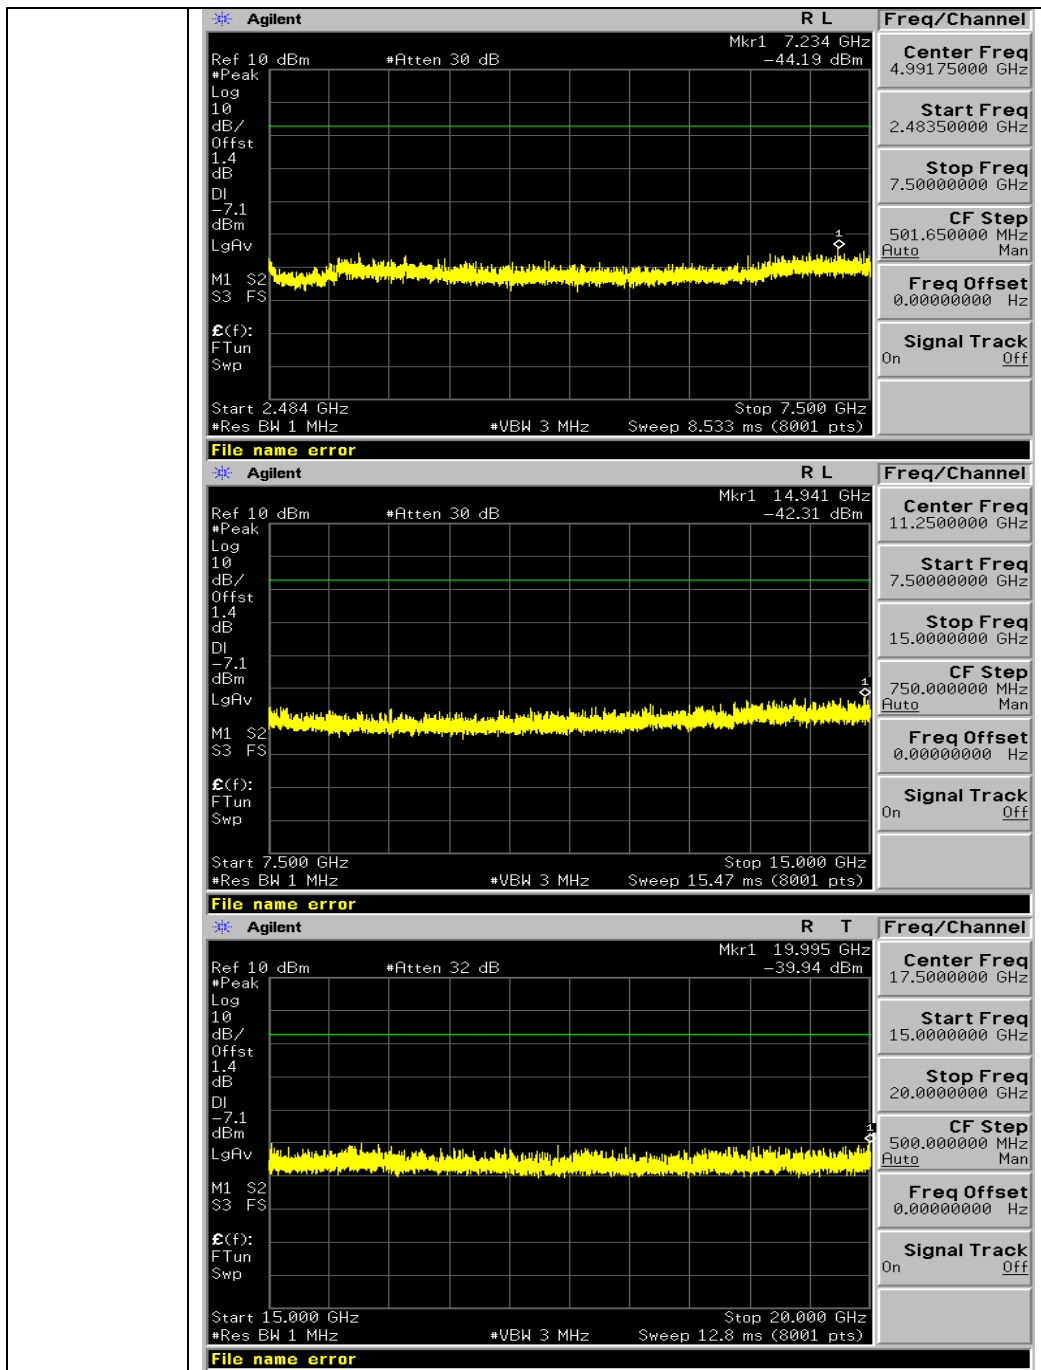


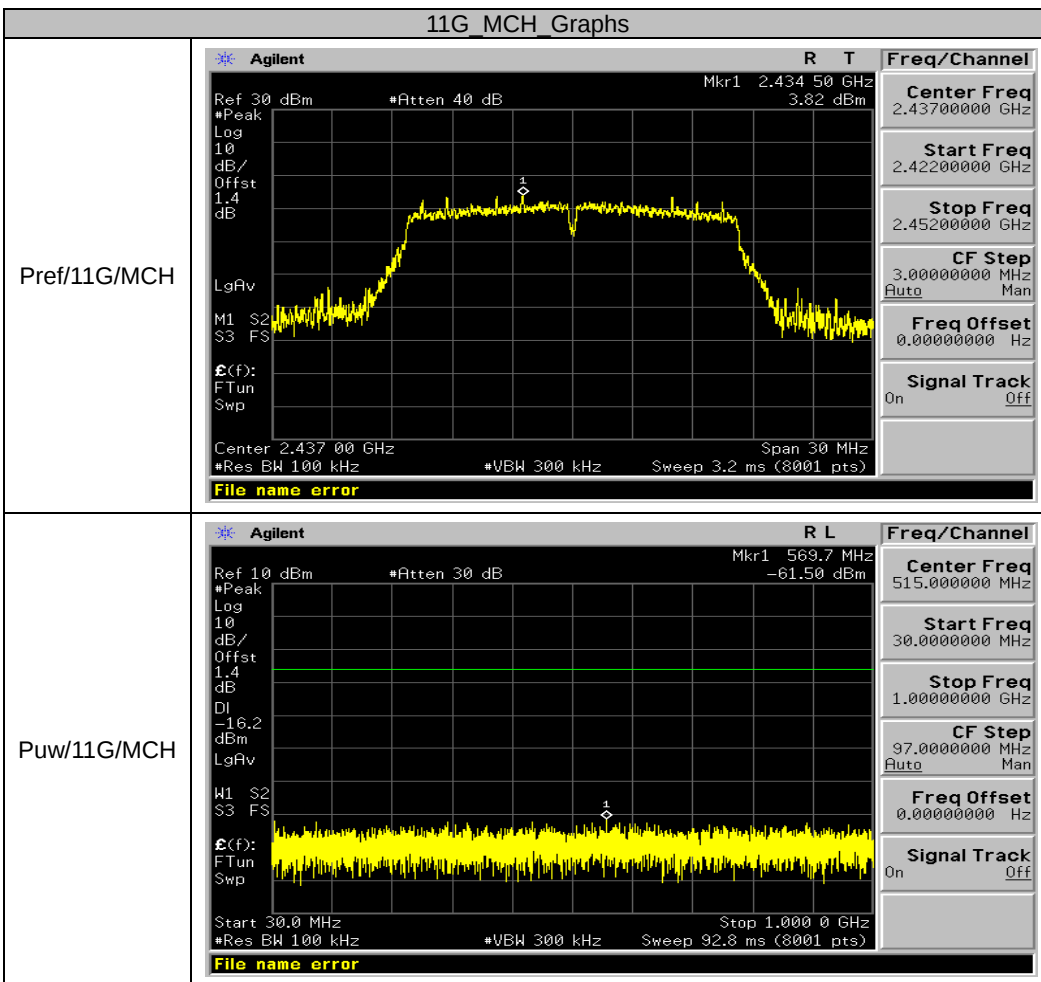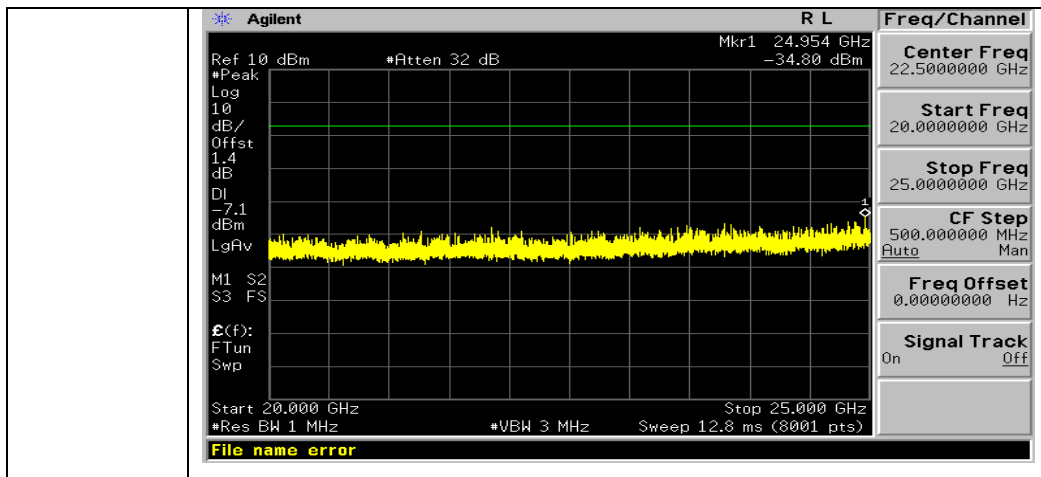


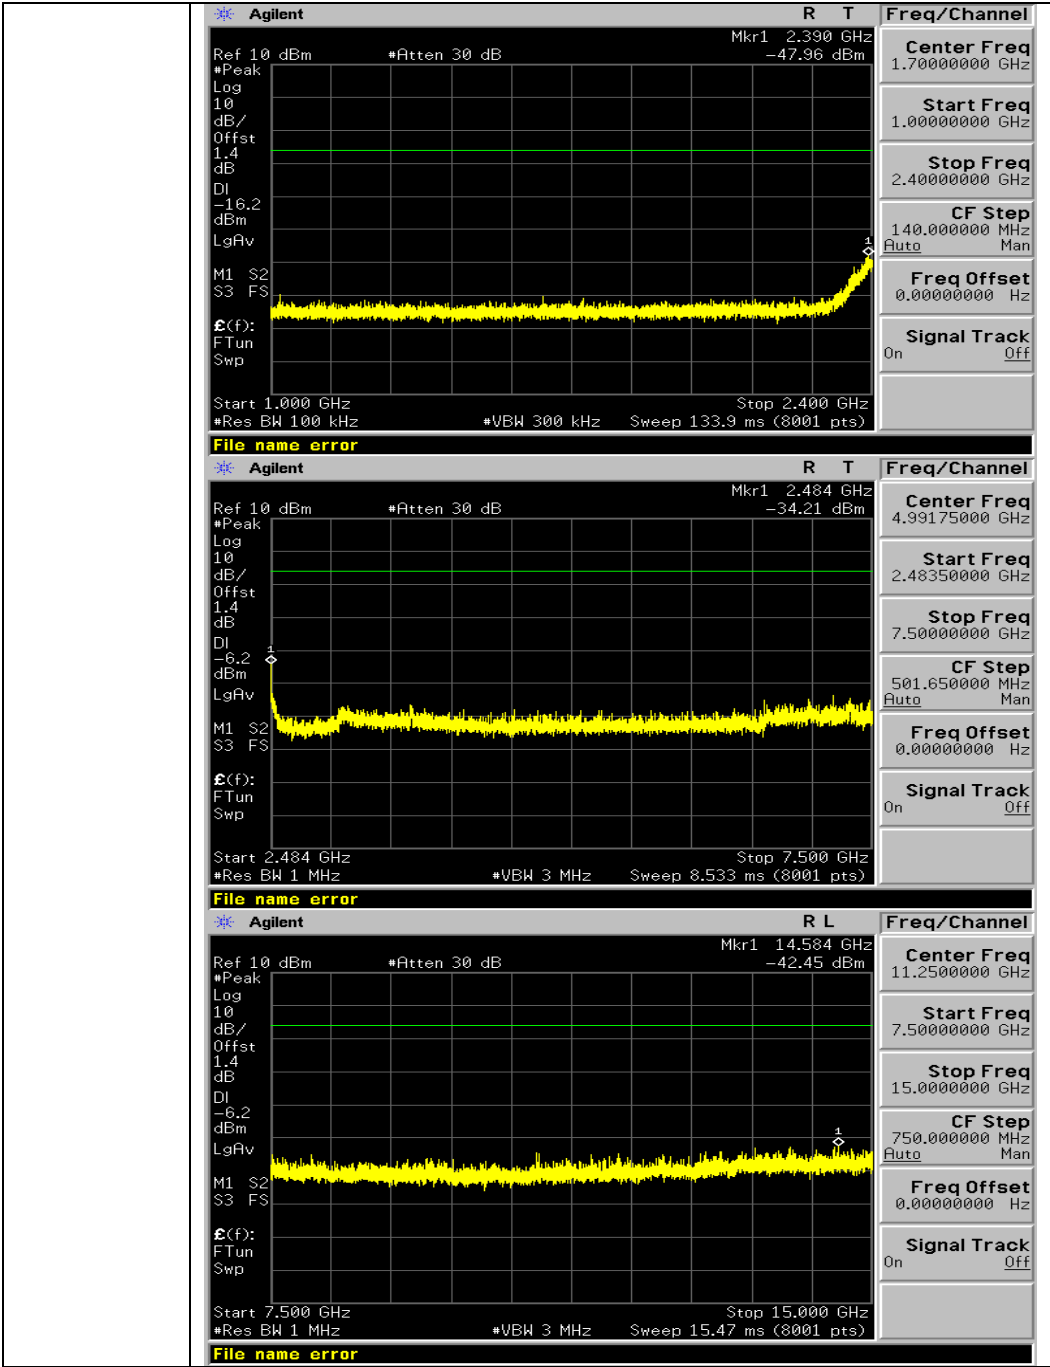


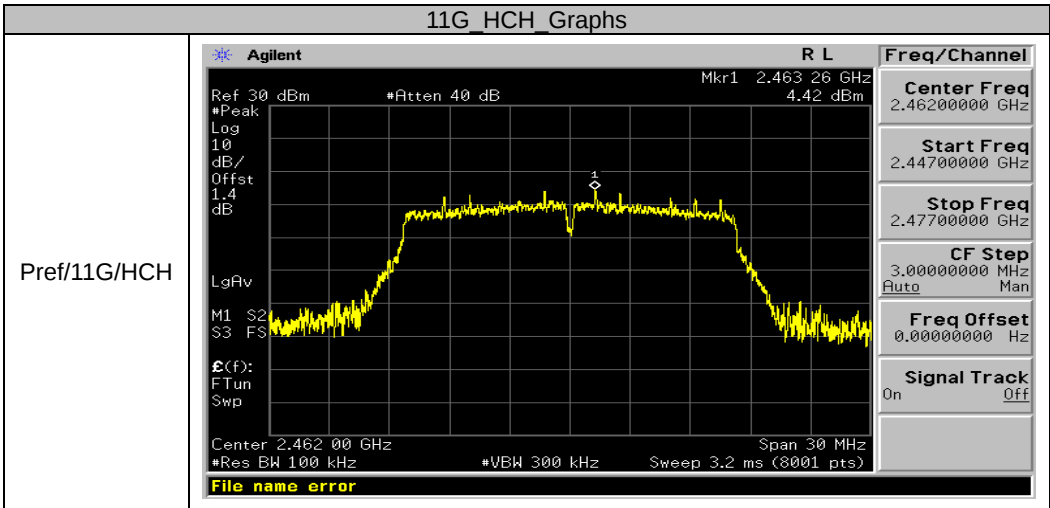
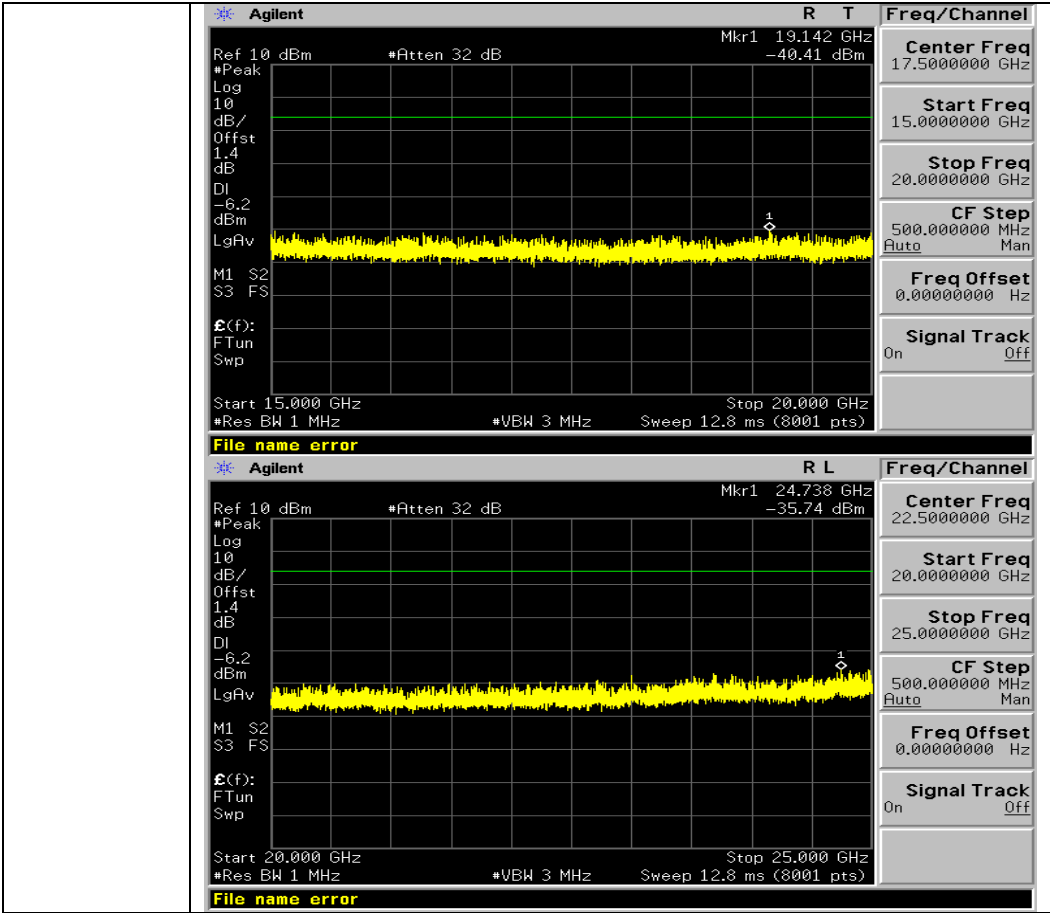


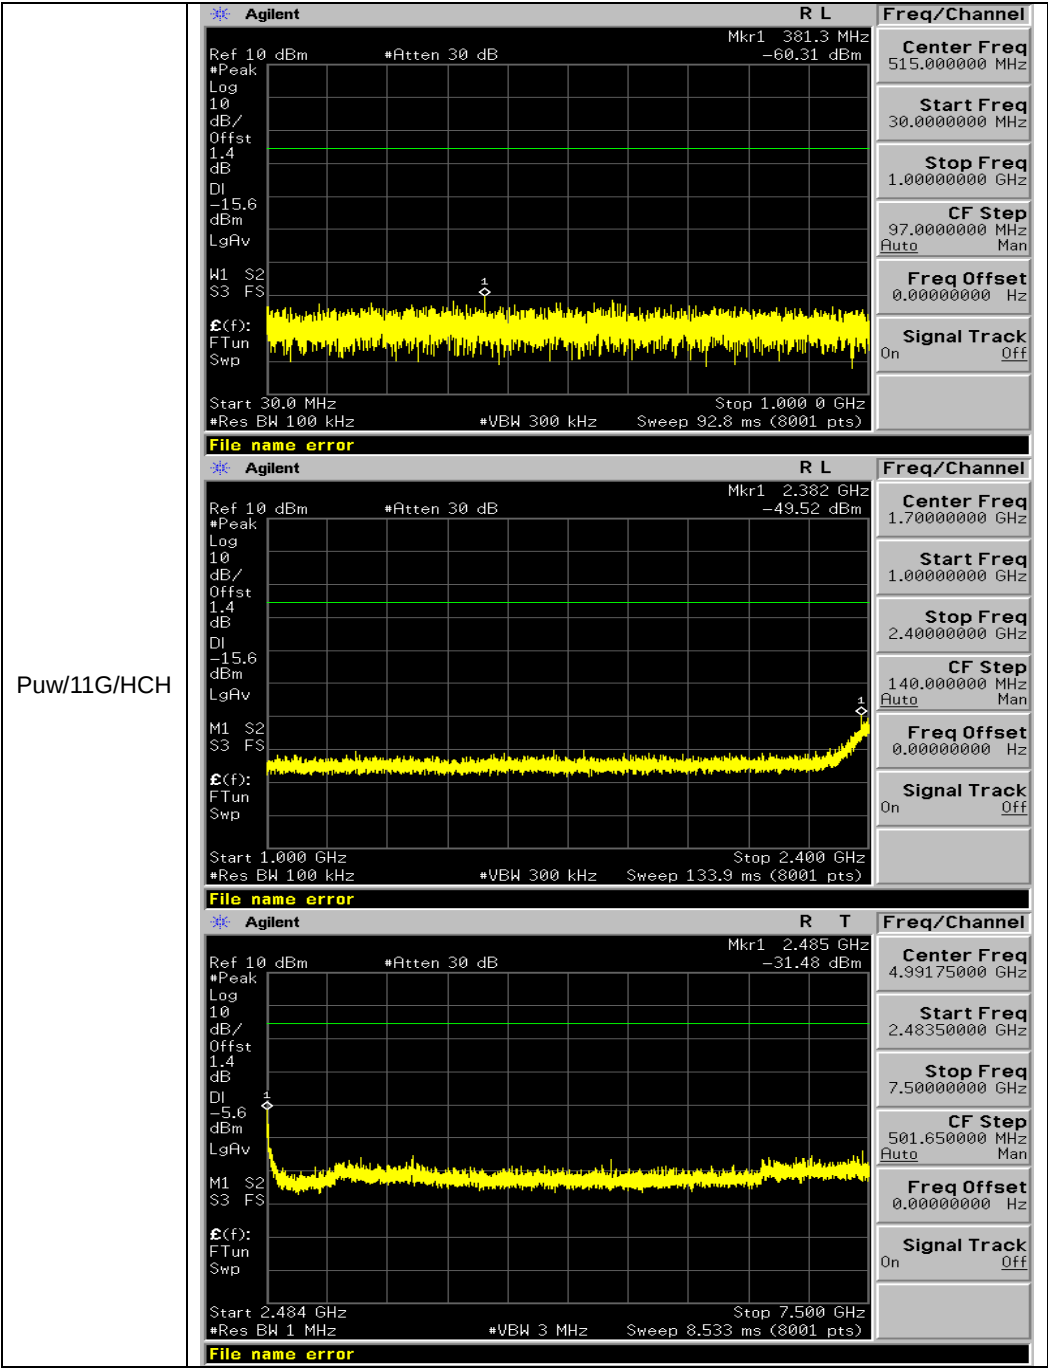



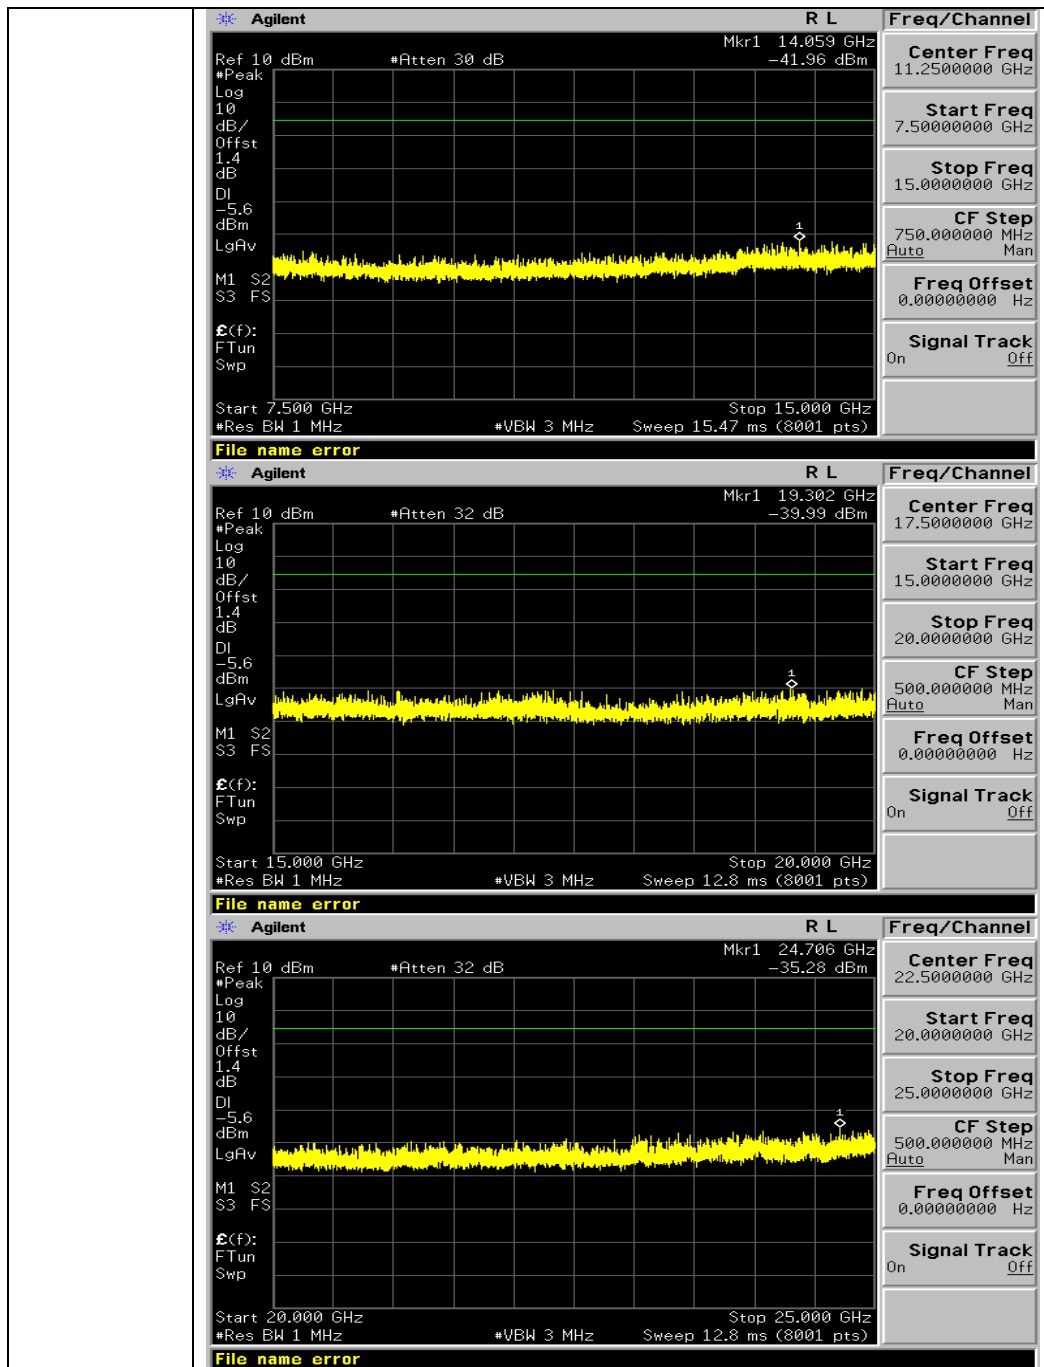


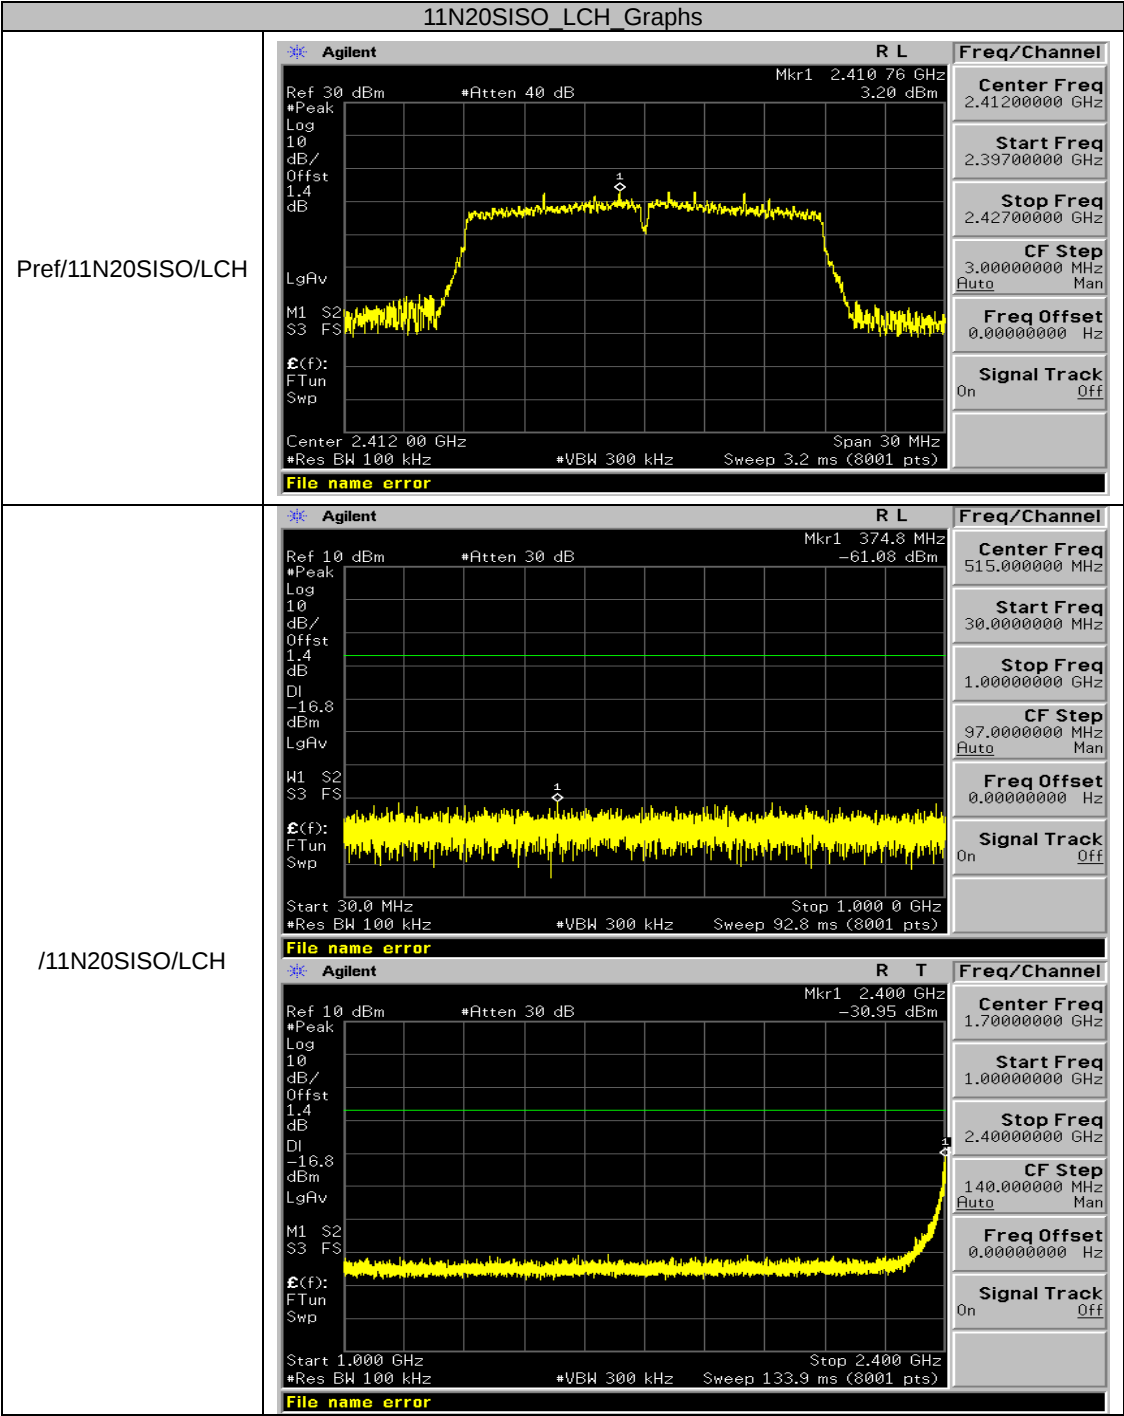

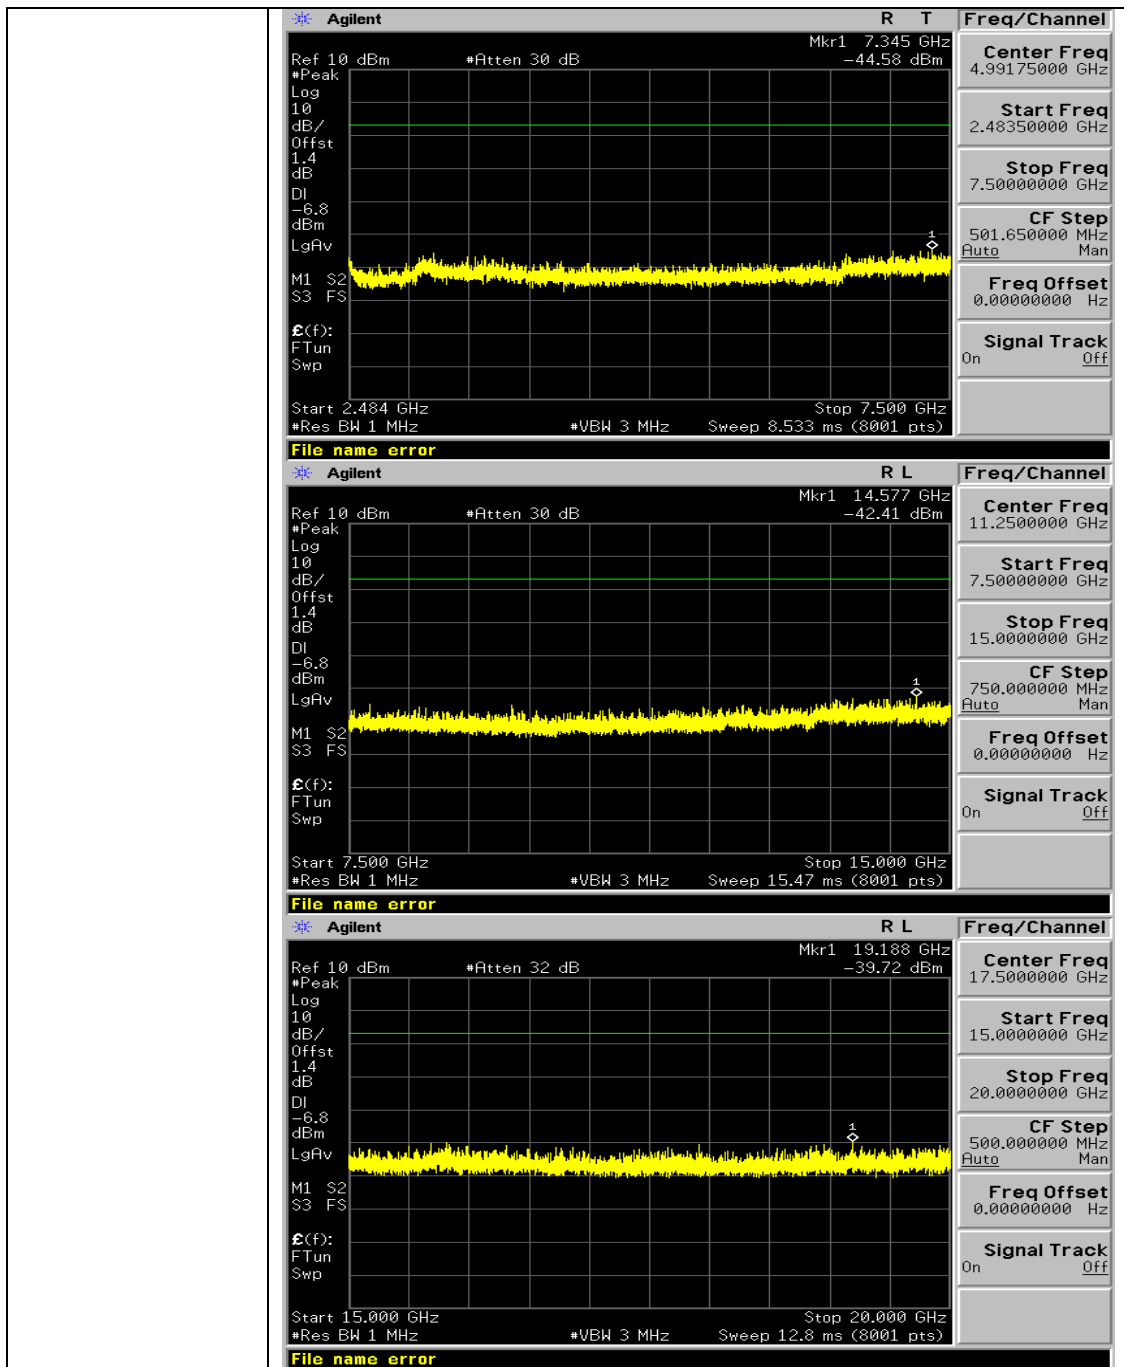


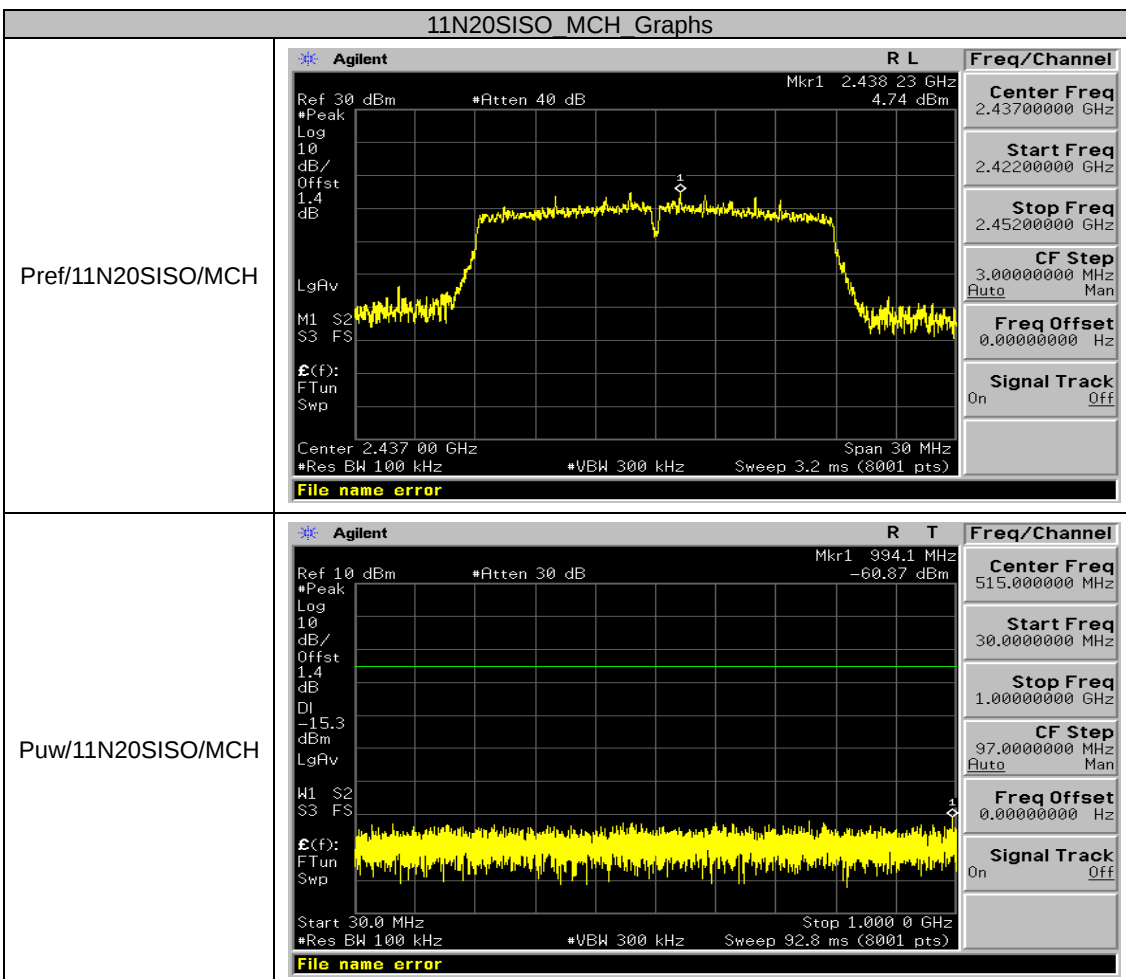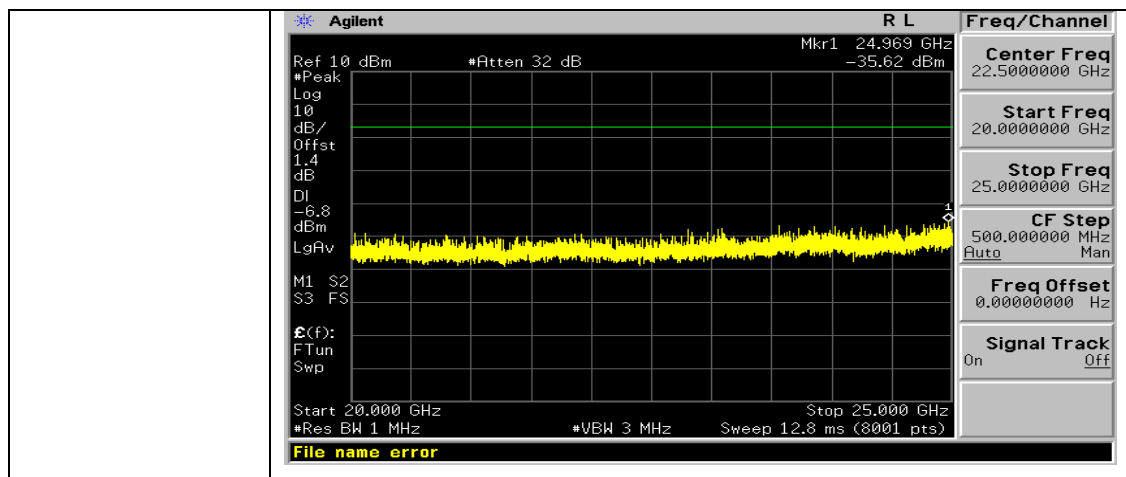


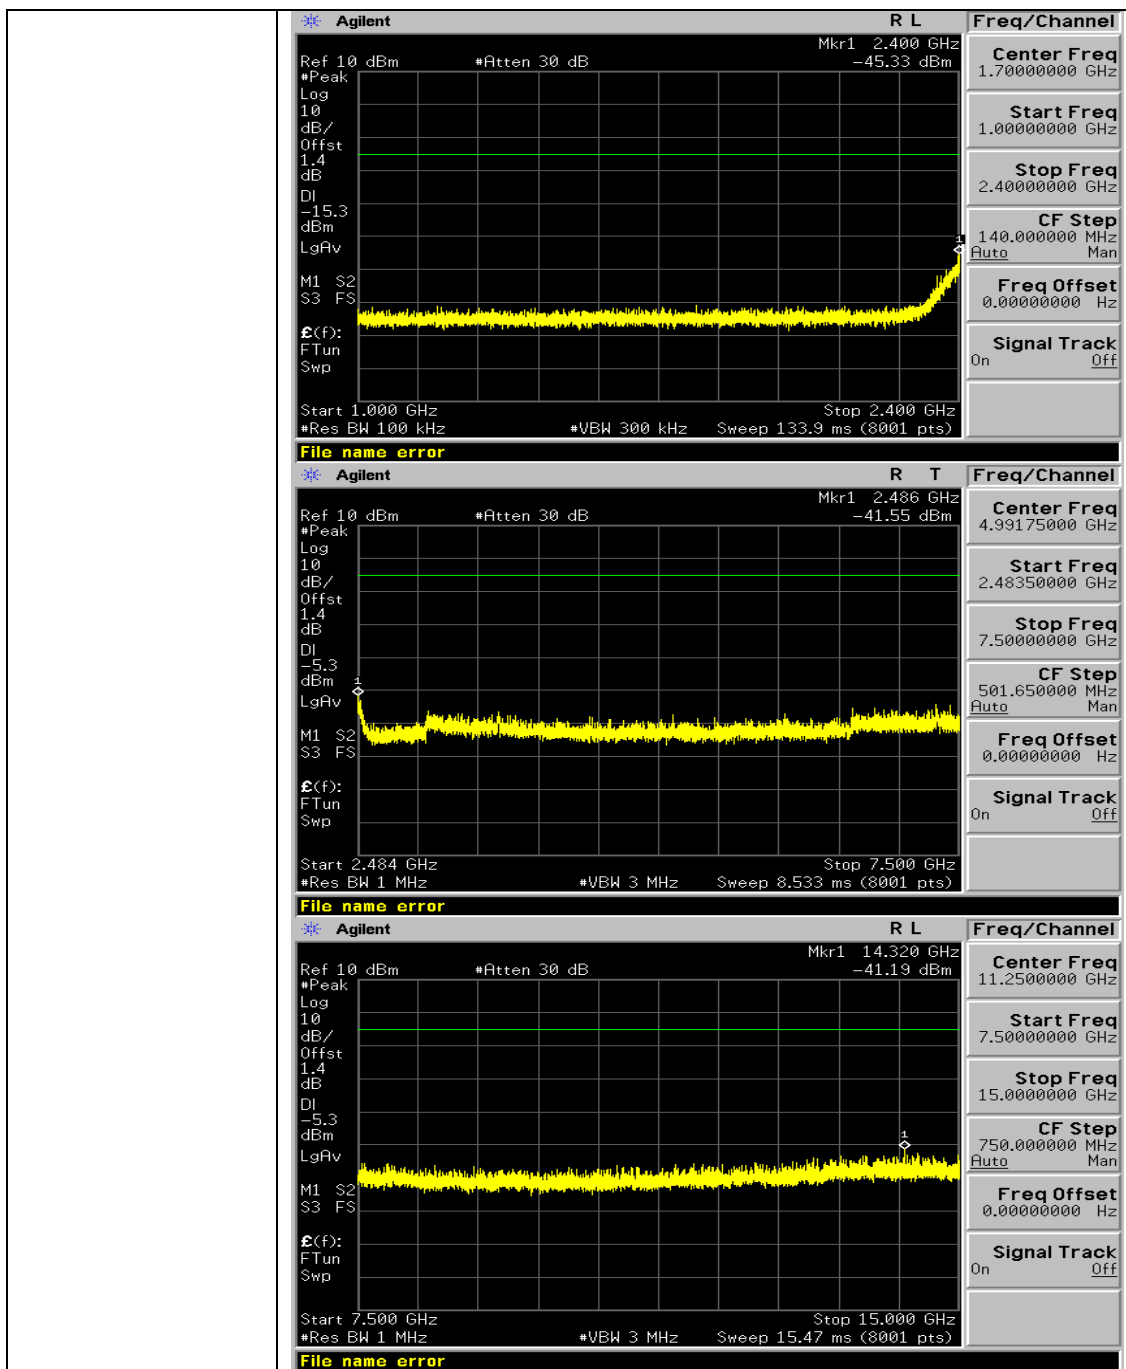


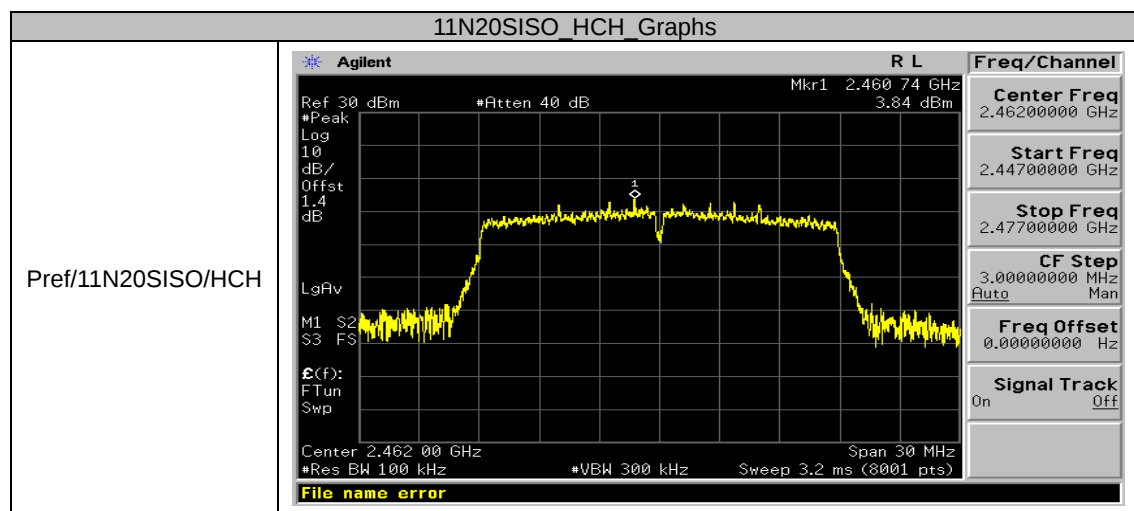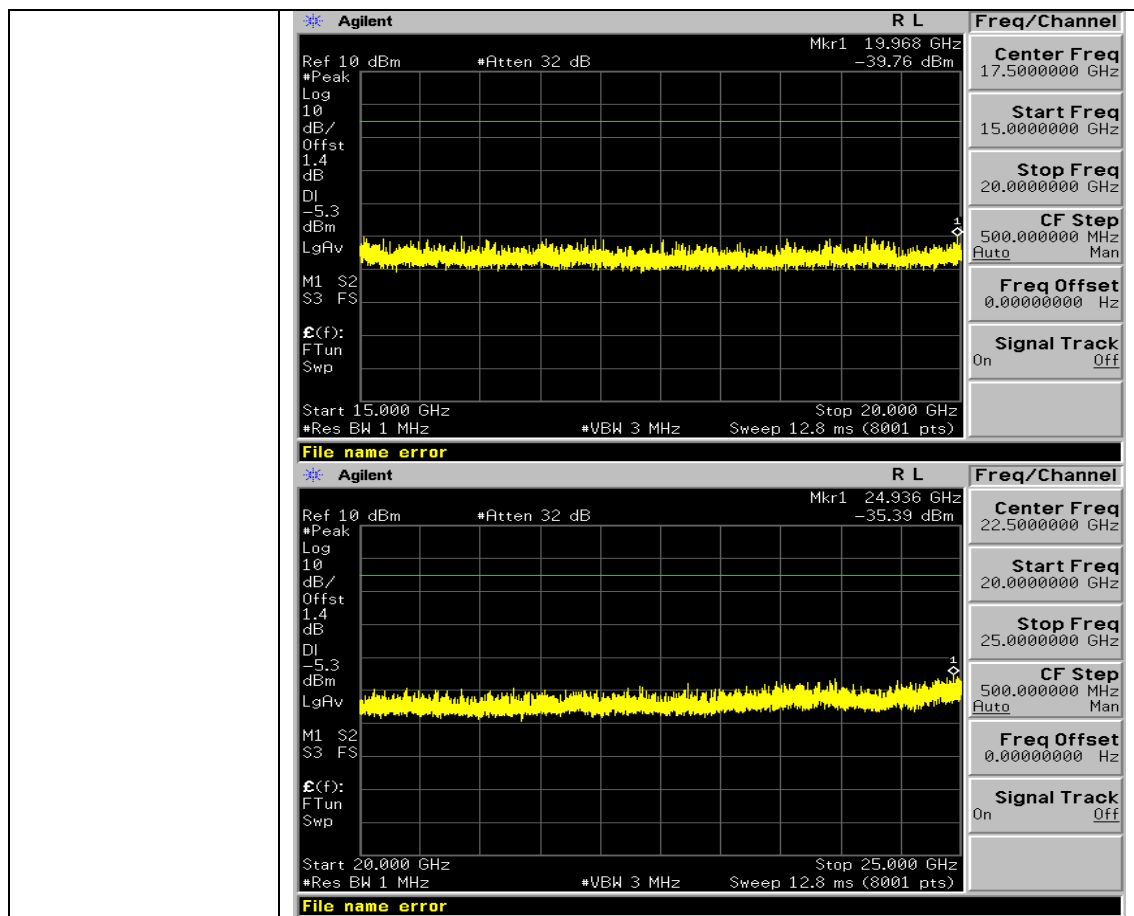




Puw/11N20SISO/HCH

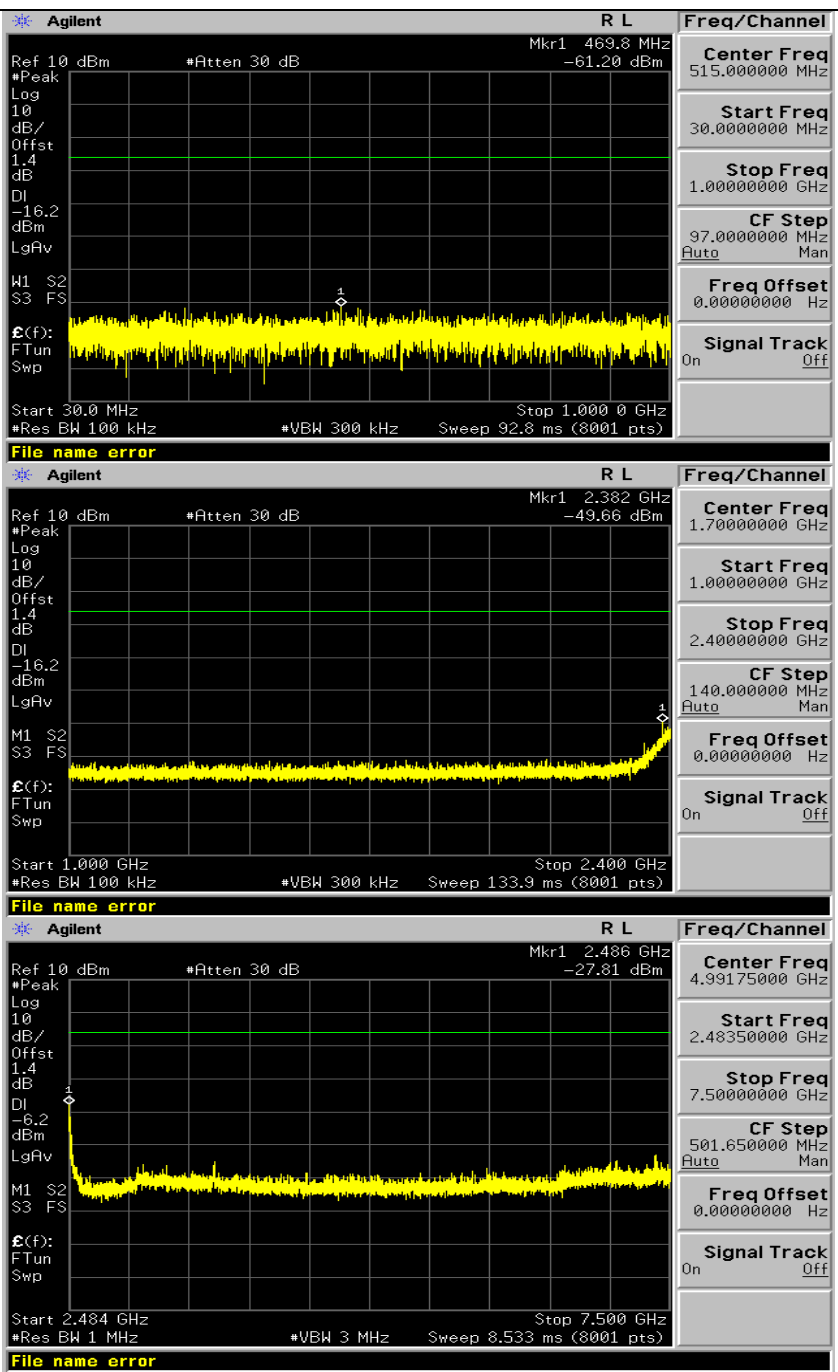



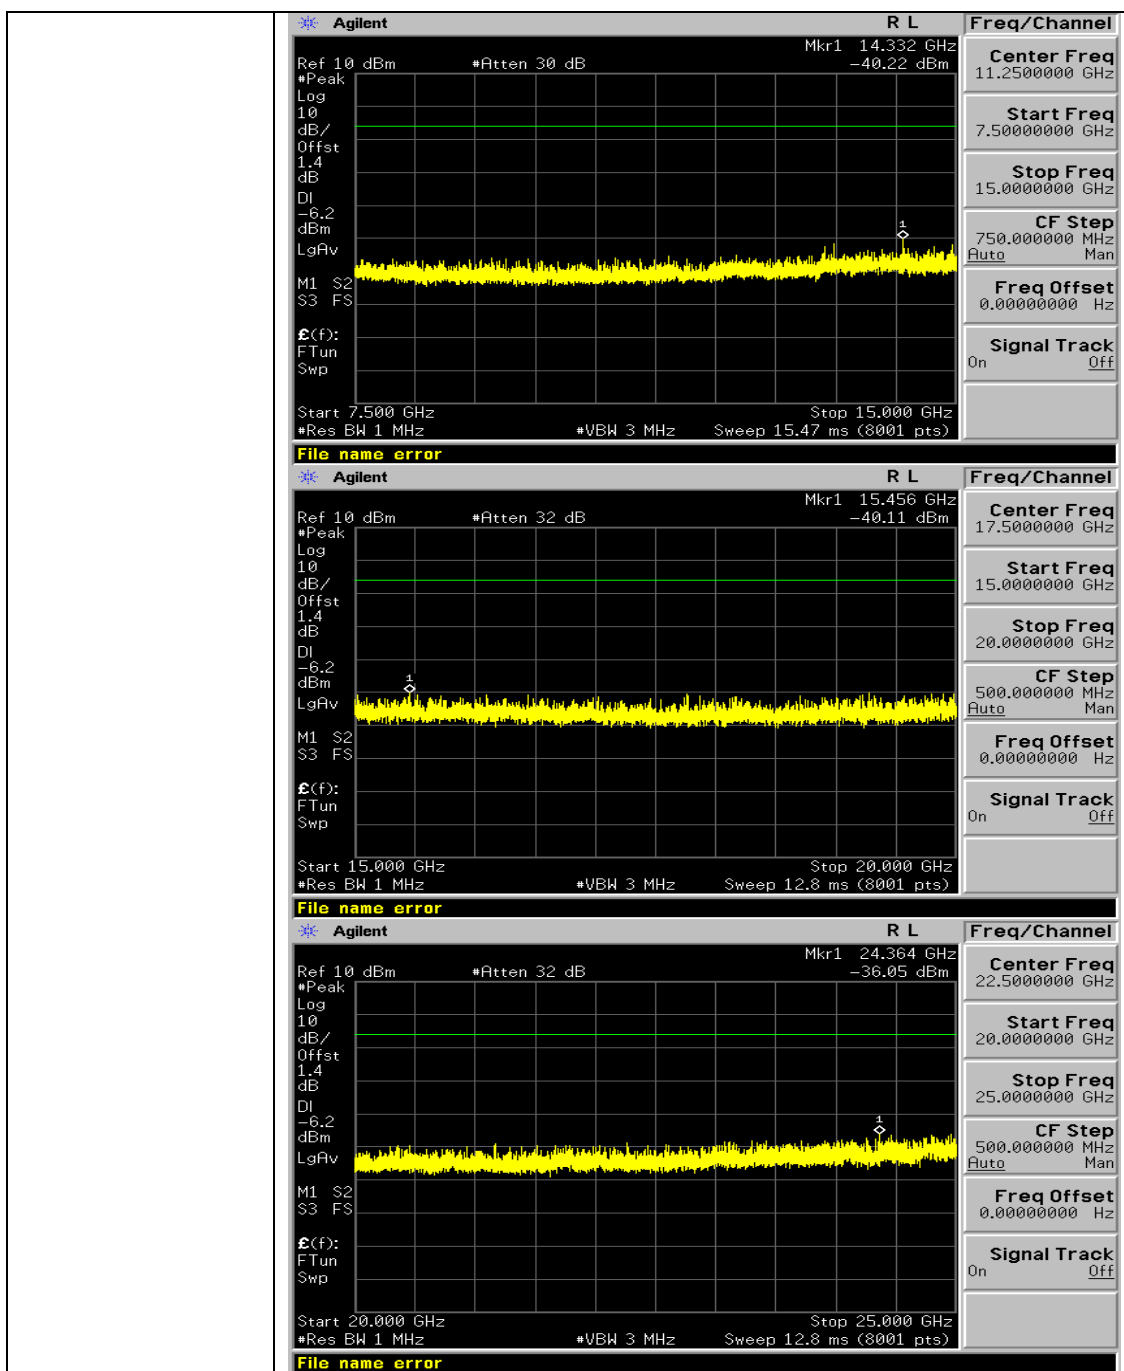


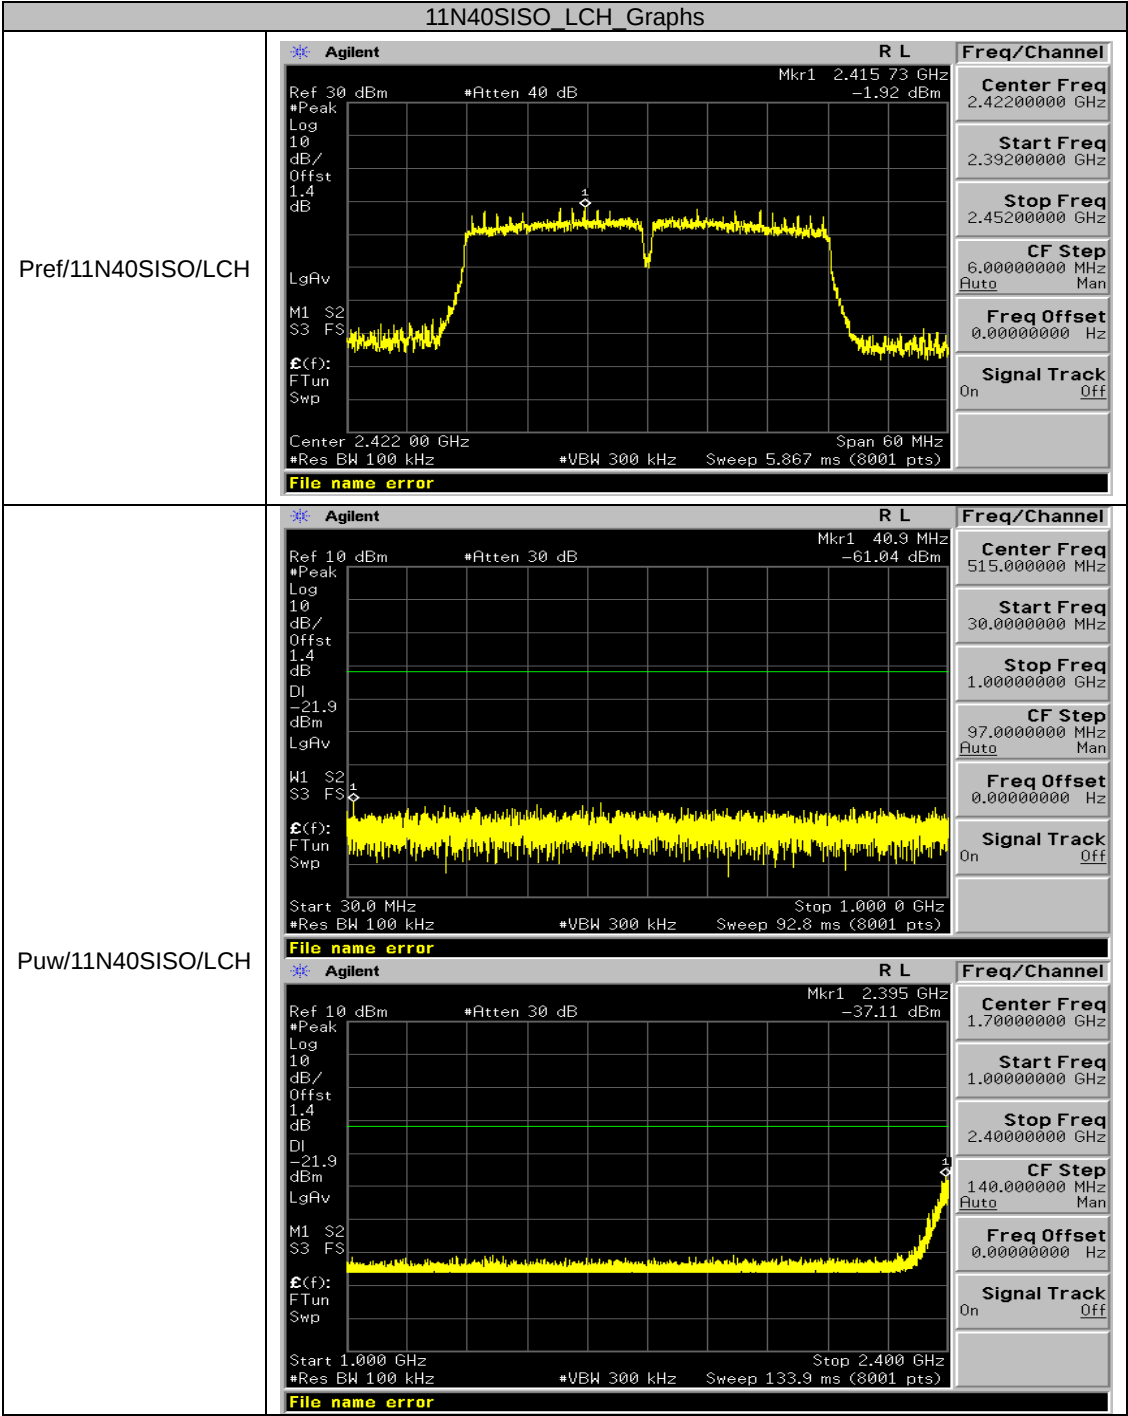


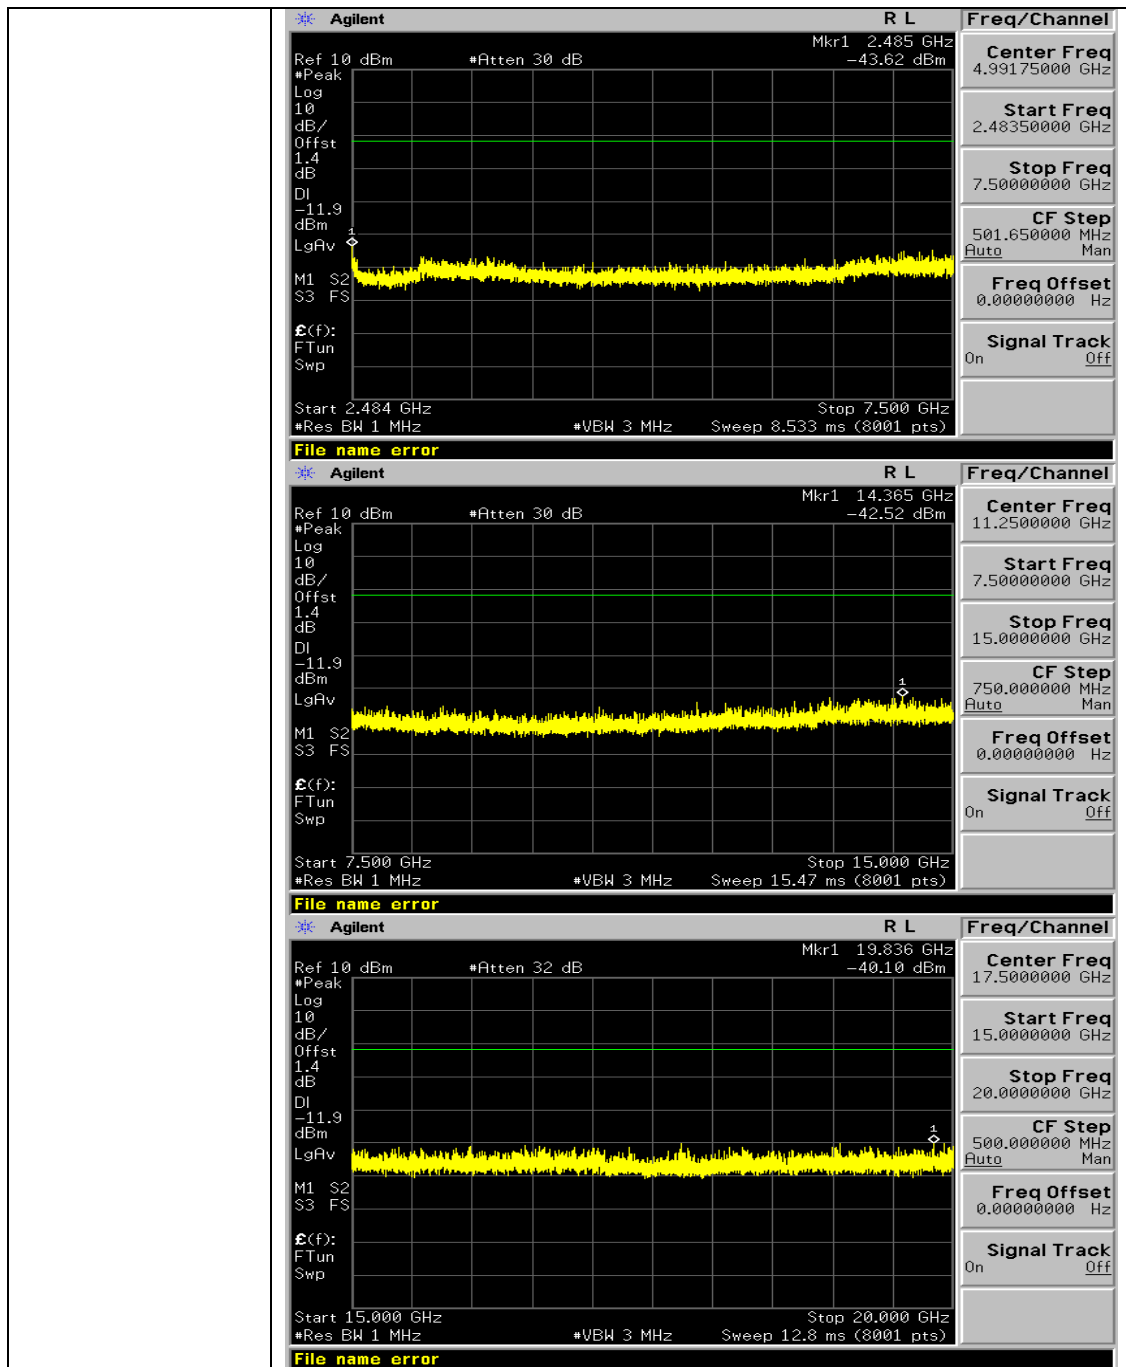


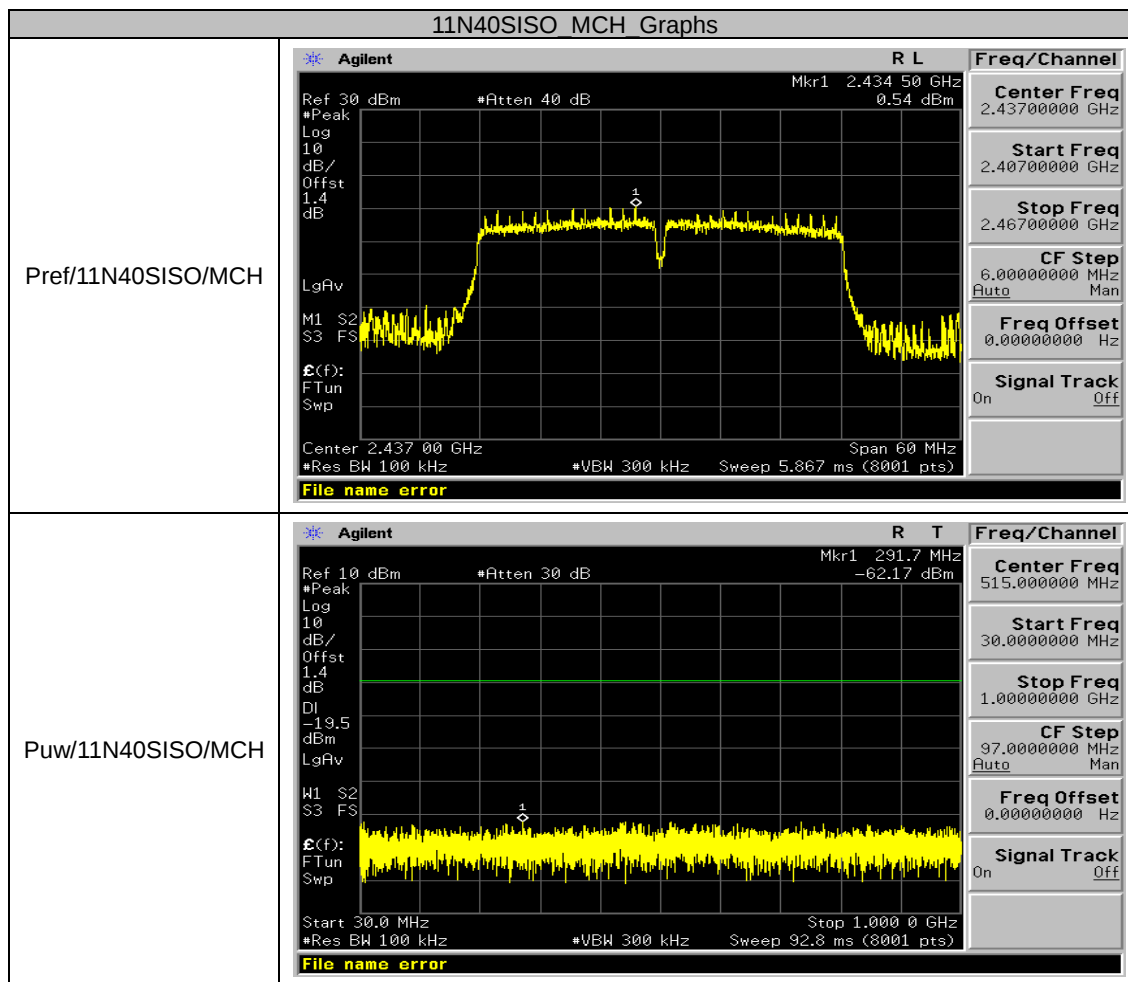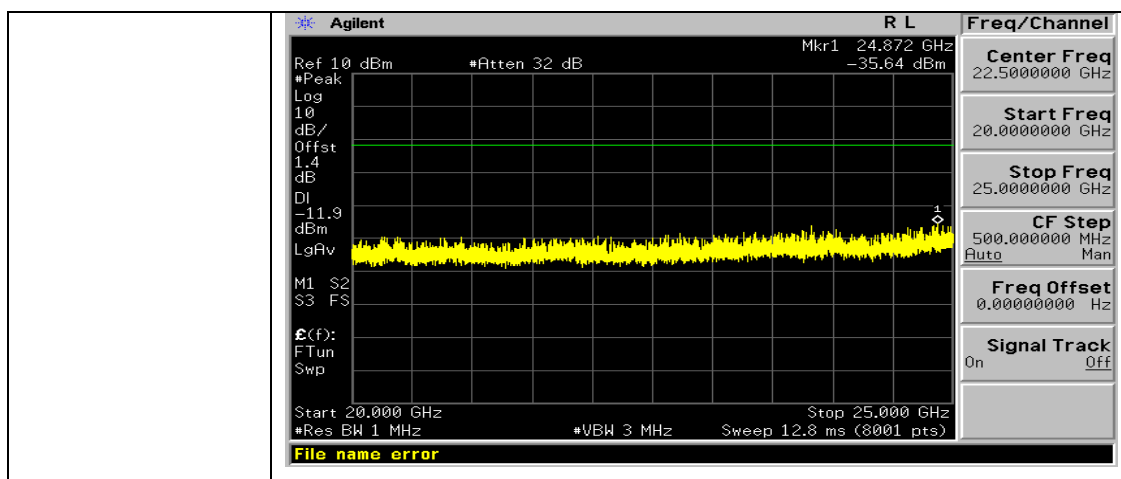

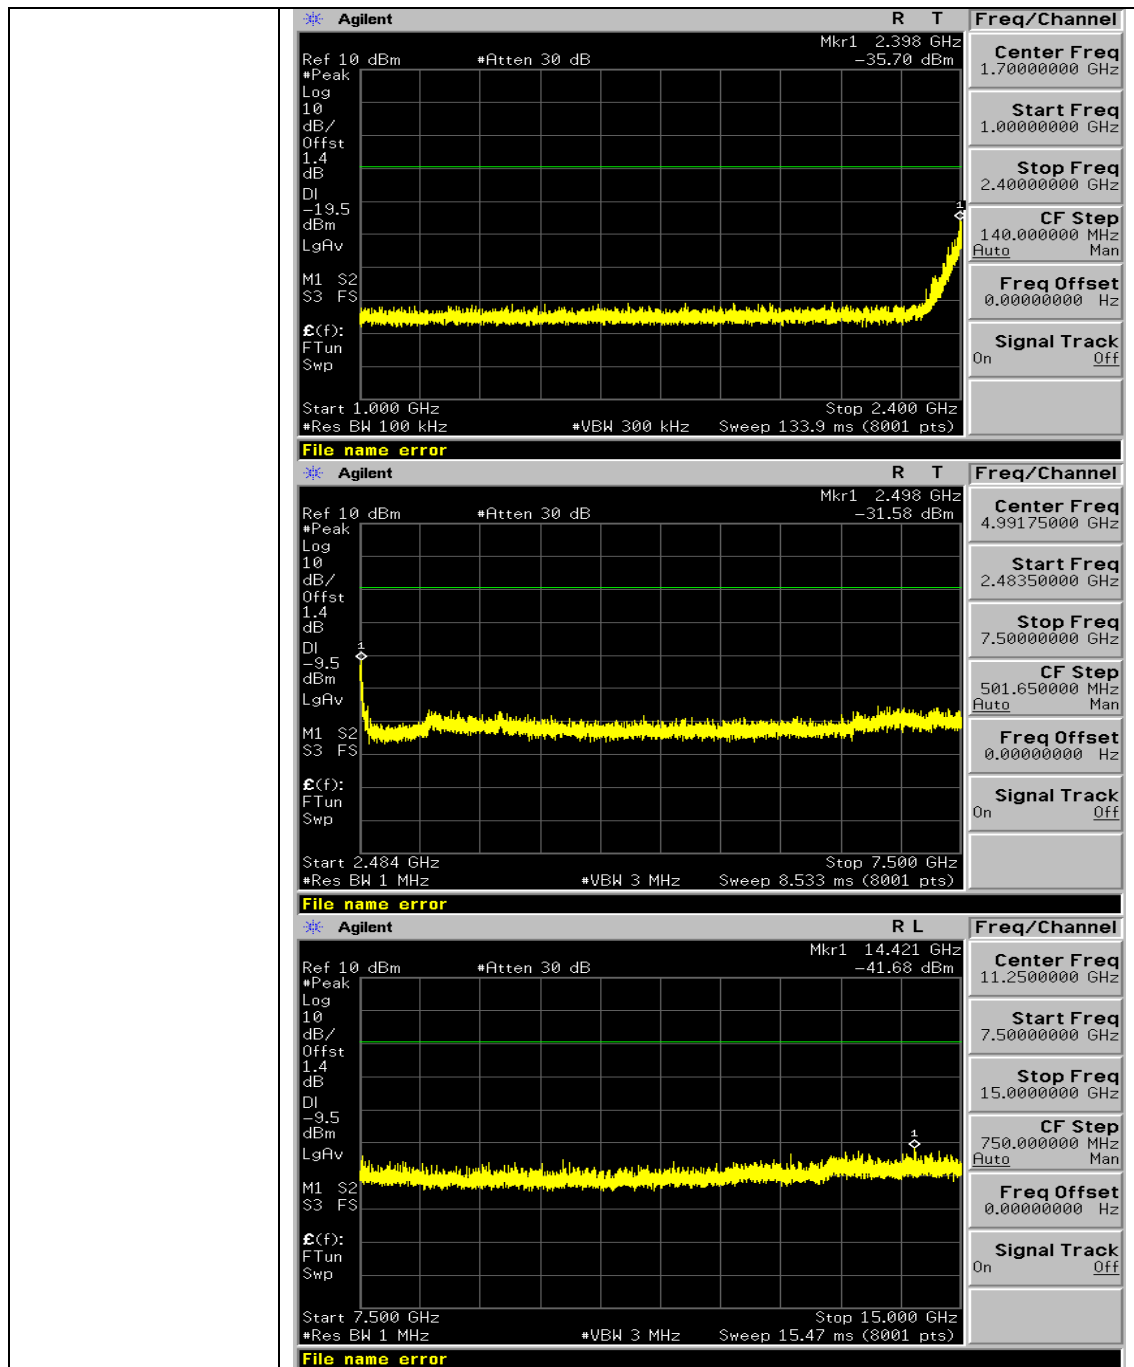

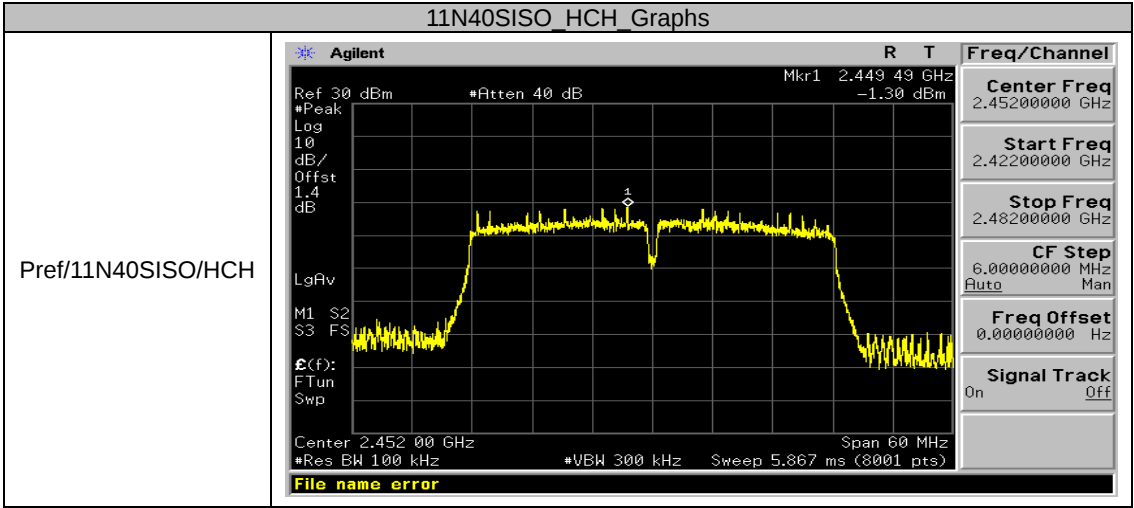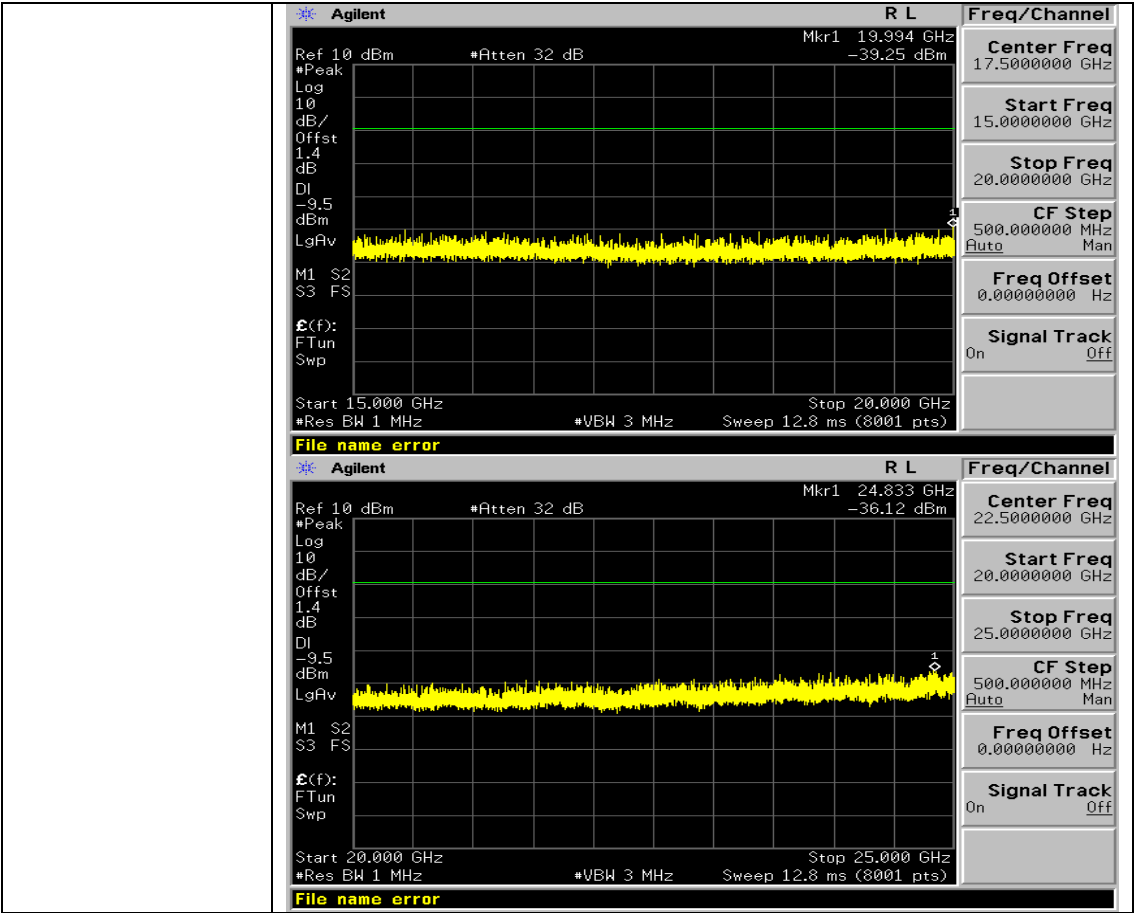

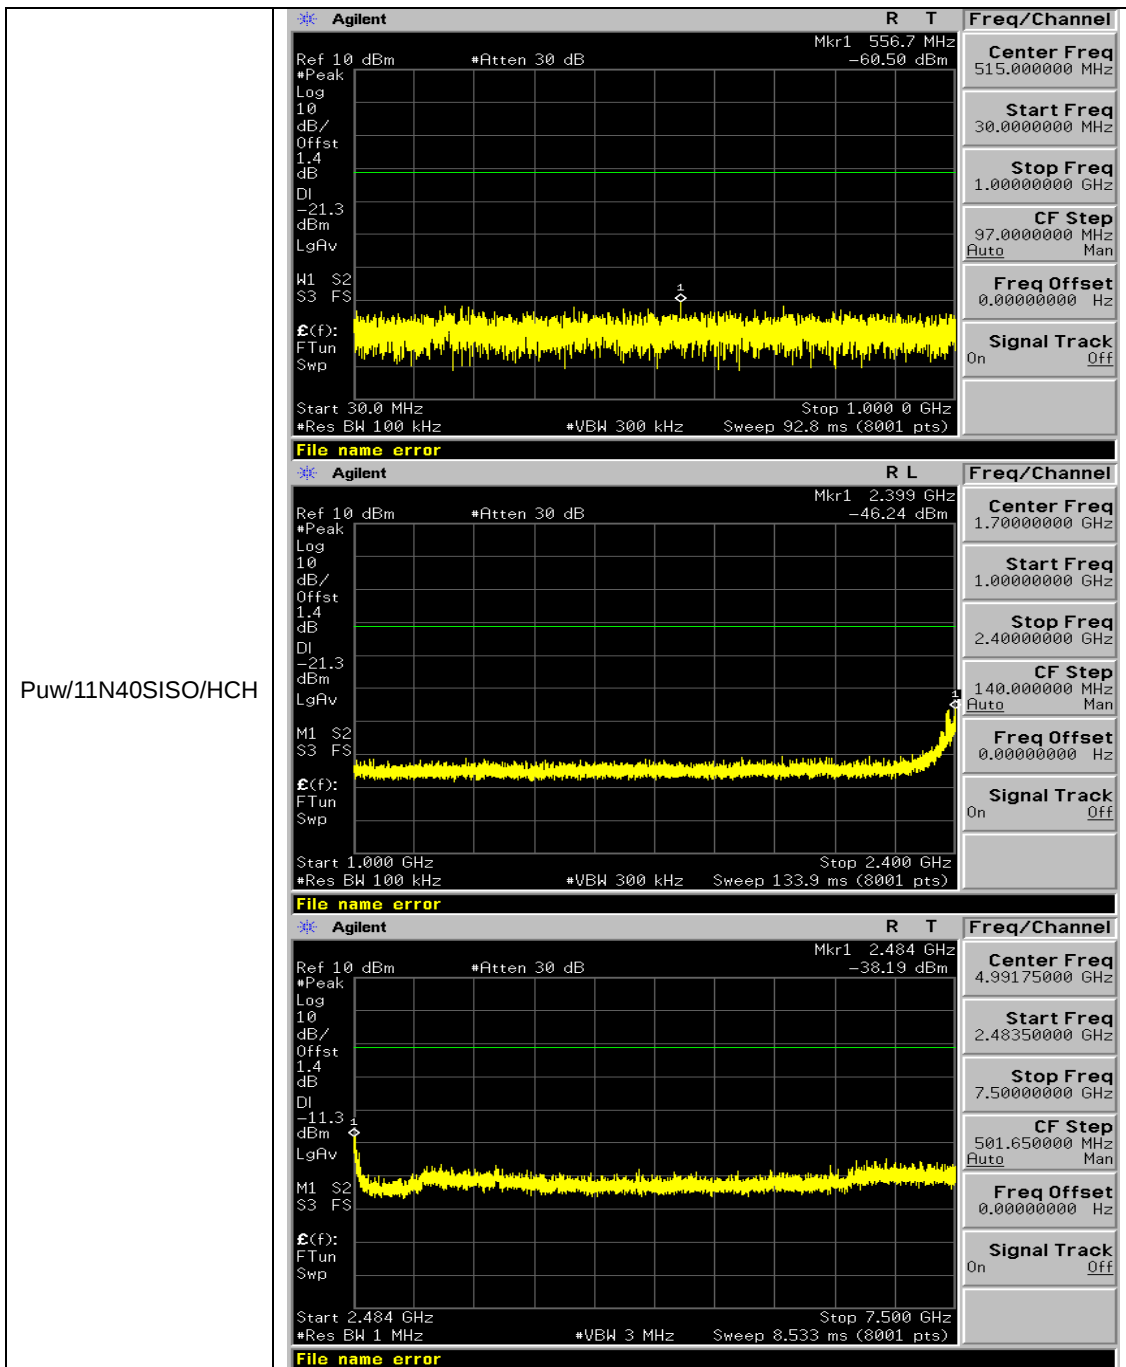

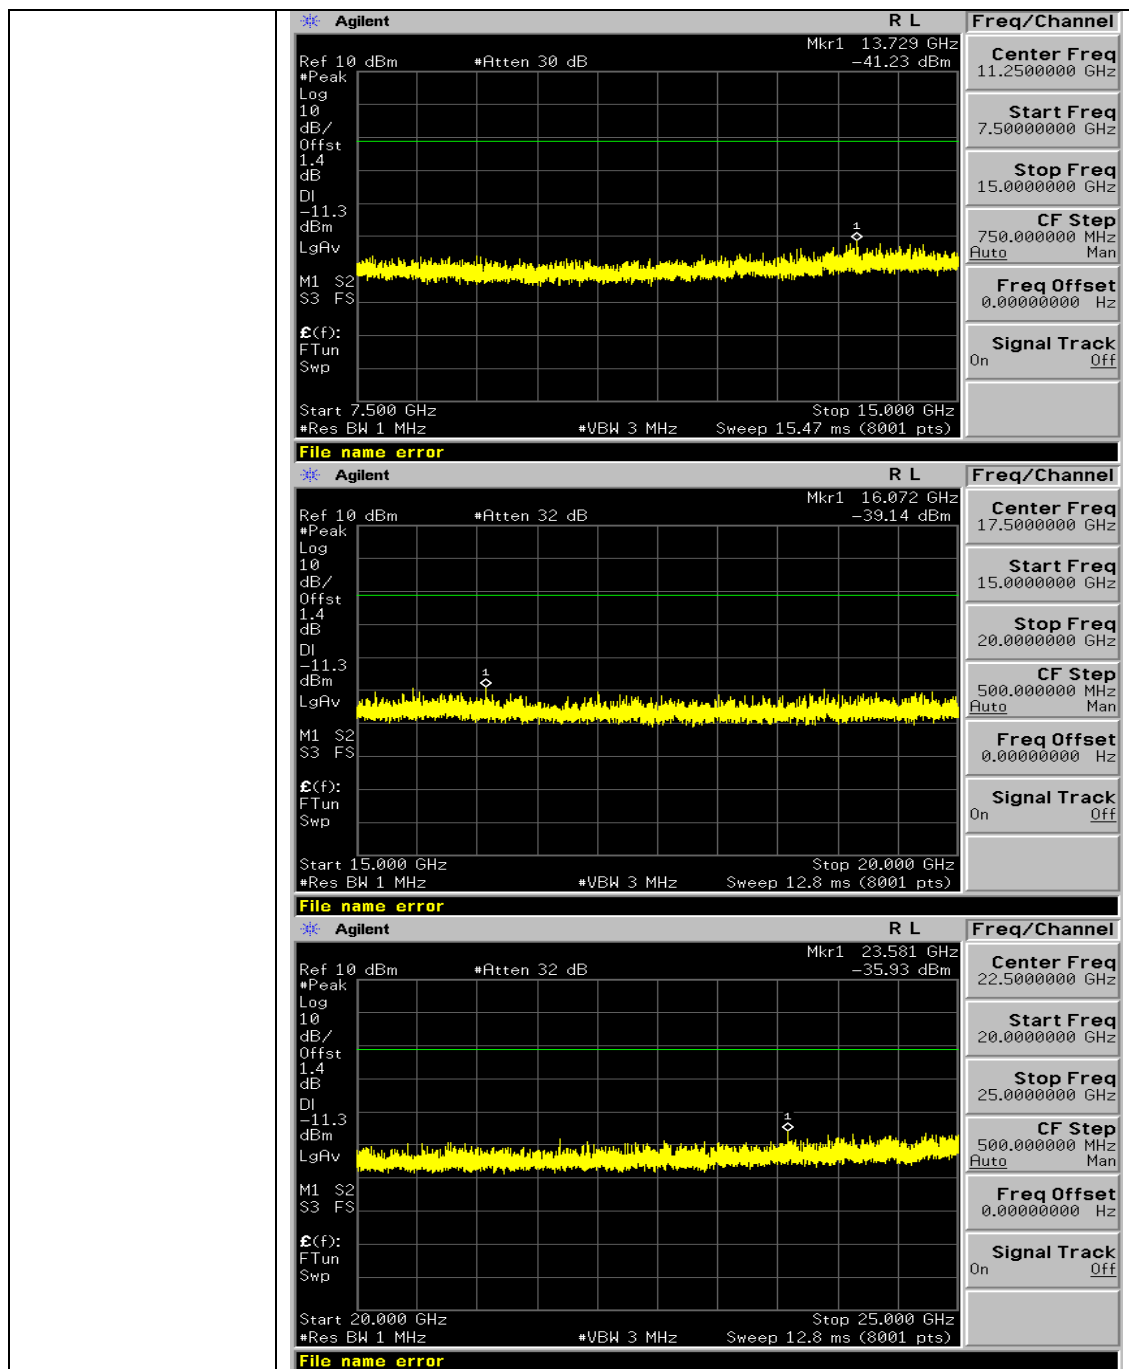

10. MAXIMUM CONDUCTED OUTPUT PEAK POWER SPECTRAL DENSITY

10.1 MEASUREMENT PROCEDURE

- (1). Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- (2). Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (3). Set SPA Trace 1 Max hold, then View.

Note: The method of PKPSD in the KDB 558074 item 10.2 was used in this testing.

10.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

Refer To Section 8.2.


10.3 MEASUREMENT EQUIPMENT USED

Refer To Section 6.

10.4 LIMITS AND MEASUREMENT RESULT

Mode	Channel	Meas.Level [dBm]	Av.PSD [dBm]	Verdict
11B	LCH	8.87	8.956	PASS
11B	MCH	9.17	9.257	PASS
11B	HCH	-50.56	-50.473	PASS
11G	LCH	3.43	3.946	PASS
11G	MCH	4.59	5.113	PASS
11G	HCH	3.95	4.473	PASS
11N20SISO	LCH	2.74	3.29	PASS
11N20SISO	MCH	4.64	5.19	PASS
11N20SISO	HCH	3.17	3.728	PASS
11N40SISO	LCH	-2.11	-1.066	PASS
11N40SISO	MCH	-0.24	0.804	PASS
11N40SISO	HCH	-1.45	-0.403	PASS

Test Graph

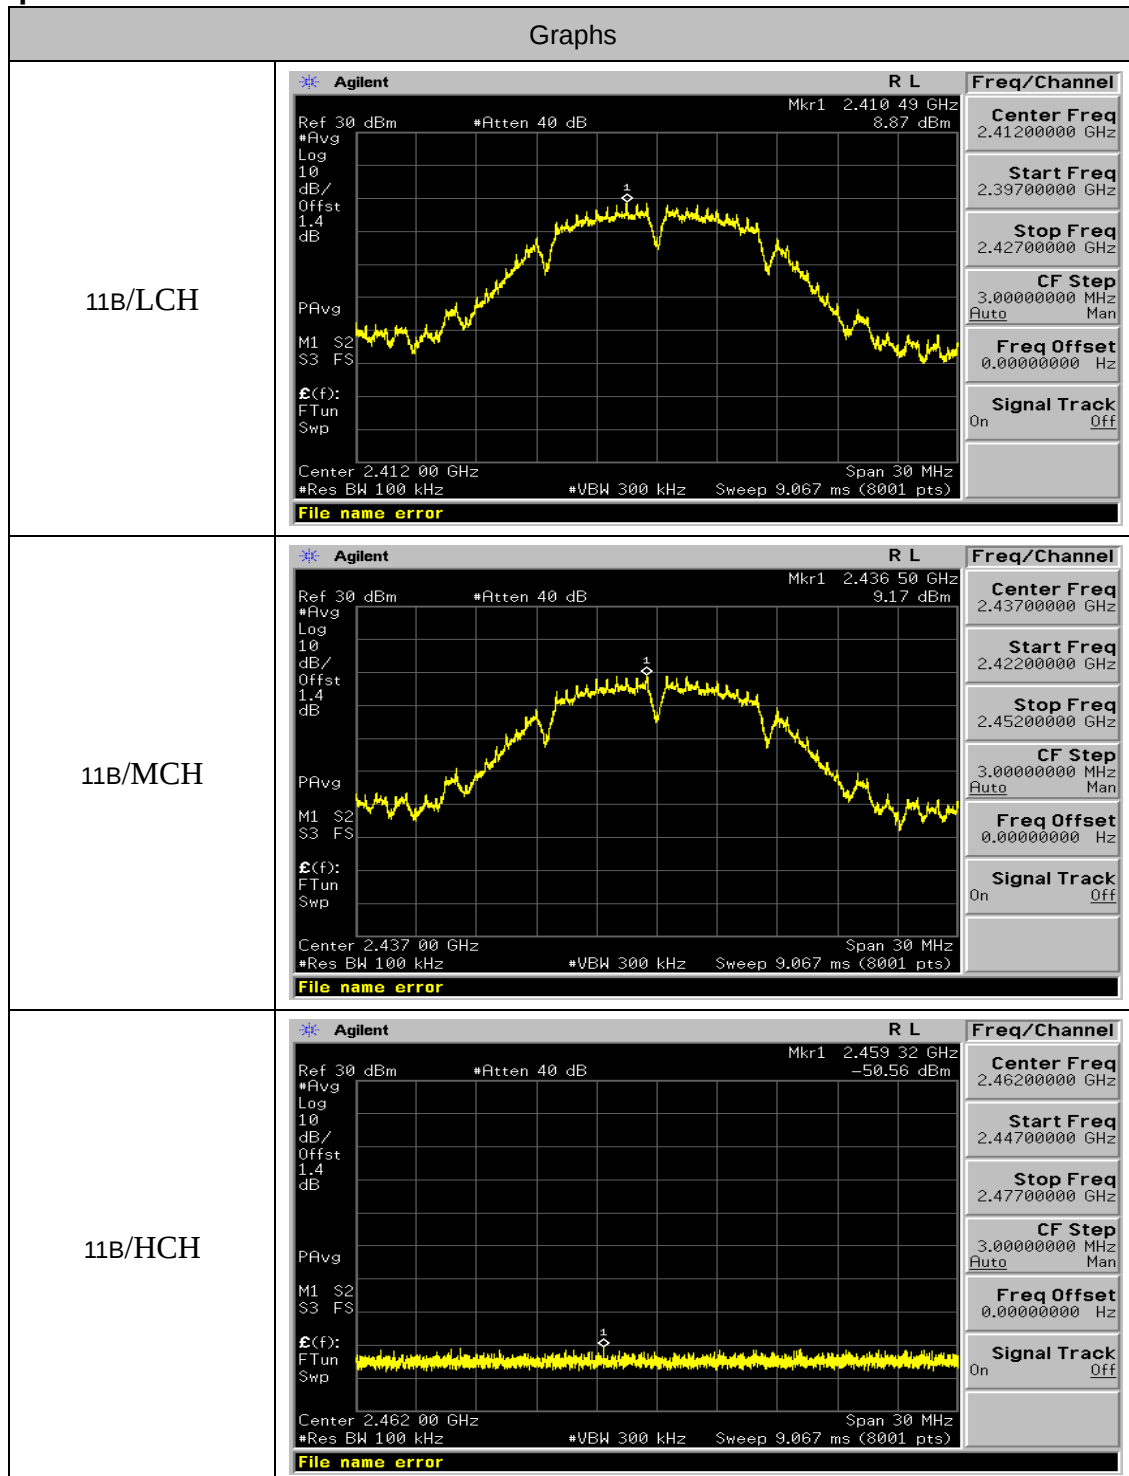

11N20SISO/LCH	Agilent Ref 30 dBm *Atten 40 dB Mkr1 2.414 47 GHz 2.74 dBm Log 10 dB/Offst 1.4 dB PAvg M1 S2 S3 FS $\mathcal{E}(f)$: FTun Swp Center 2.412 00 GHz Span 30 MHz *Res BW 100 kHz *VBW 300 kHz Sweep 9.067 ms (8001 pts) File name error Freq/Channel Center Freq 2.41200000 GHz Start Freq 2.39700000 GHz Stop Freq 2.42700000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off
11N20SISO/MCH	Agilent Ref 30 dBm *Atten 40 dB Mkr1 2.435 74 GHz 4.64 dBm Log 10 dB/Offst 1.4 dB PAvg M1 S2 S3 FS $\mathcal{E}(f)$: FTun Swp Center 2.437 00 GHz Span 30 MHz *Res BW 100 kHz *VBW 300 kHz Sweep 9.067 ms (8001 pts) File name error Freq/Channel Center Freq 2.43700000 GHz Start Freq 2.42200000 GHz Stop Freq 2.45200000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off
11N20SISO/HCH	Agilent Ref 30 dBm *Atten 40 dB Mkr1 2.460 70 GHz 3.17 dBm Log 10 dB/Offst 1.4 dB PAvg M1 S2 S3 FS $\mathcal{E}(f)$: FTun Swp Center 2.462 00 GHz Span 30 MHz *Res BW 100 kHz *VBW 300 kHz Sweep 9.067 ms (8001 pts) File name error Freq/Channel Center Freq 2.46200000 GHz Start Freq 2.44700000 GHz Stop Freq 2.47700000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off

11N40SISO/LCH	Agilent R L Freq/Channel Ref 30 dBm *Atten 40 dB Mkr1 2.425 74 GHz -2.11 dBm #PAvg Log 10 dB/ Offst 1.4 dB PAvg M1 S2 S3 FS $\mathcal{E}(f)$: FTun Swp Center 2.422 00 GHz Span 60 MHz *Res BW 100 kHz *VBW 300 kHz Sweep 18.13 ms (8001 pts) File name error Center Freq 2.42200000 GHz Start Freq 2.39200000 GHz Stop Freq 2.45200000 GHz CF Step 6.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off
11N40SISO/MCH	Agilent R L Freq/Channel Ref 30 dBm *Atten 40 dB Mkr1 2.441 99 GHz -0.24 dBm #PAvg Log 10 dB/ Offst 1.4 dB PAvg M1 S2 S3 FS $\mathcal{E}(f)$: FTun Swp Center 2.437 00 GHz Span 60 MHz *Res BW 100 kHz *VBW 300 kHz Sweep 18.13 ms (8001 pts) File name error Center Freq 2.43700000 GHz Start Freq 2.40700000 GHz Stop Freq 2.46700000 GHz CF Step 6.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off
11N40SISO/HCH	Agilent R L Freq/Channel Ref 30 dBm *Atten 40 dB Mkr1 2.449 49 GHz -1.45 dBm #PAvg Log 10 dB/ Offst 1.4 dB PAvg M1 S2 S3 FS $\mathcal{E}(f)$: FTun Swp Center 2.452 00 GHz Span 60 MHz *Res BW 100 kHz *VBW 300 kHz Sweep 18.13 ms (8001 pts) File name error Center Freq 2.45200000 GHz Start Freq 2.42200000 GHz Stop Freq 2.48200000 GHz CF Step 6.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off


11. RADIATED EMISSION

11.1. MEASUREMENT PROCEDURE


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.

11.2. TEST SETUP

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

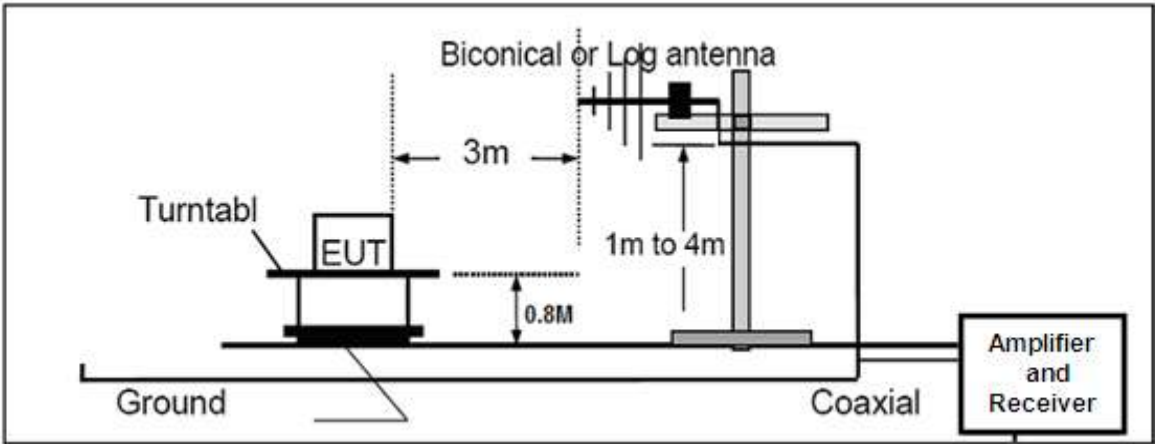

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

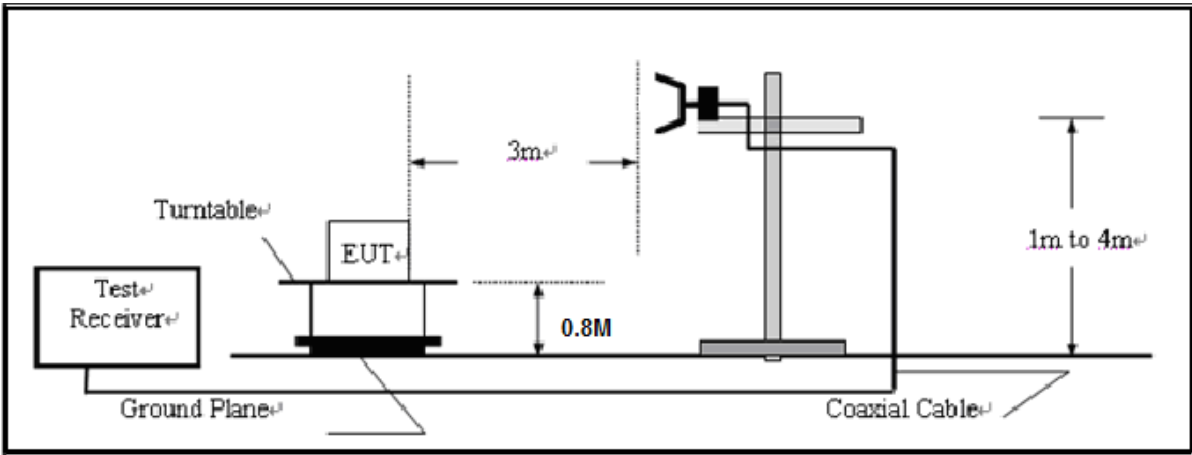

11.3. LIMITS AND MEASUREMENT RESULT

15.209(a) Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested For restricted band radiated emission,
the test records reported below are the worst result compared to other modes.


11.4. TEST RESULT

RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.

RADIATED EMISSION BELOW 1GHZ

EUT	3G Smart Phone	Model Name	S52
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2412MHZ	Antenna	Horizontal

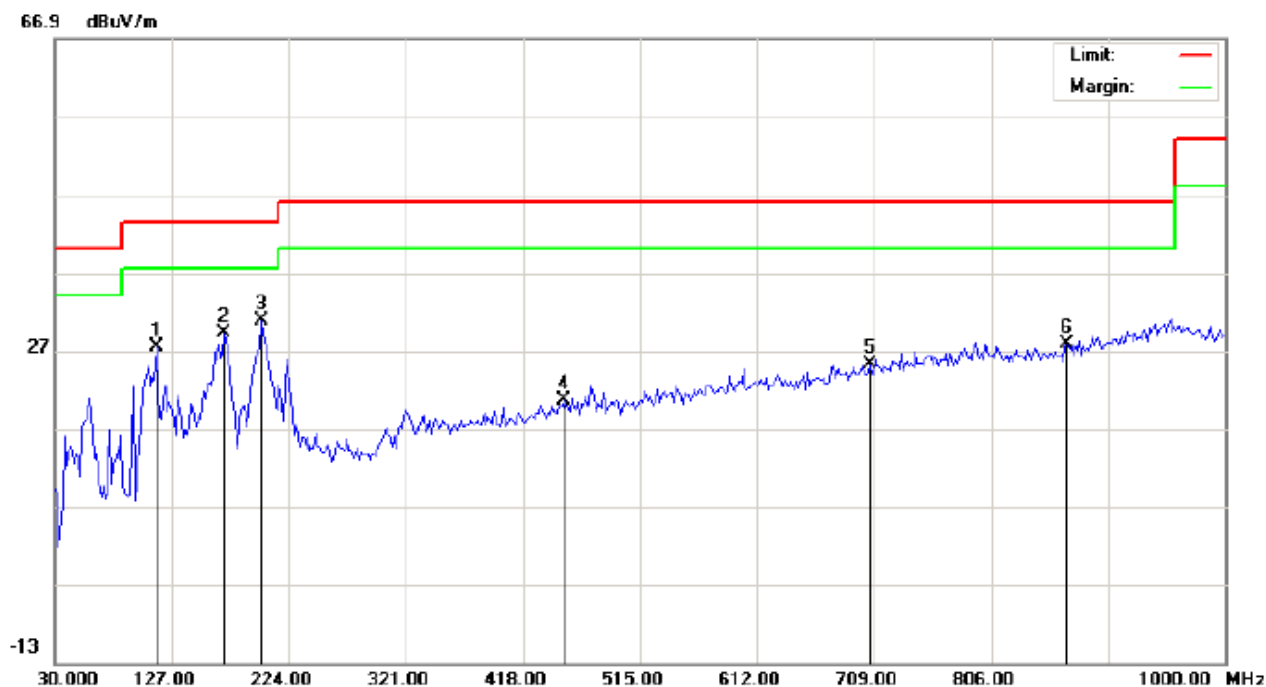

Site: site #1

Polarization: *Horizontal*

Temperature: 26

Limit: FCC Class B 3M Radiation

Power: AC 120V/60Hz

Humidity: 60 %

EUT: 3G Smart Phone

Distance: 3m

M/N: S52


Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		114.0667	16.01	11.45	27.46	43.50	-16.04	peak			
2		170.6500	16.09	13.06	29.15	43.50	-14.35	peak			
3	*	201.3667	18.77	12.05	30.82	43.50	-12.68	peak			
4		451.9500	-0.03	20.61	20.58	46.00	-25.42	peak			
5		705.7667	-0.06	25.36	25.30	46.00	-20.70	peak			
6		869.0500	0.03	27.81	27.84	46.00	-18.16	peak			

RESULT: PASS

EUT	3G Smart Phone	Model Name	S52
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2412MHZ	Antenna	Vertical

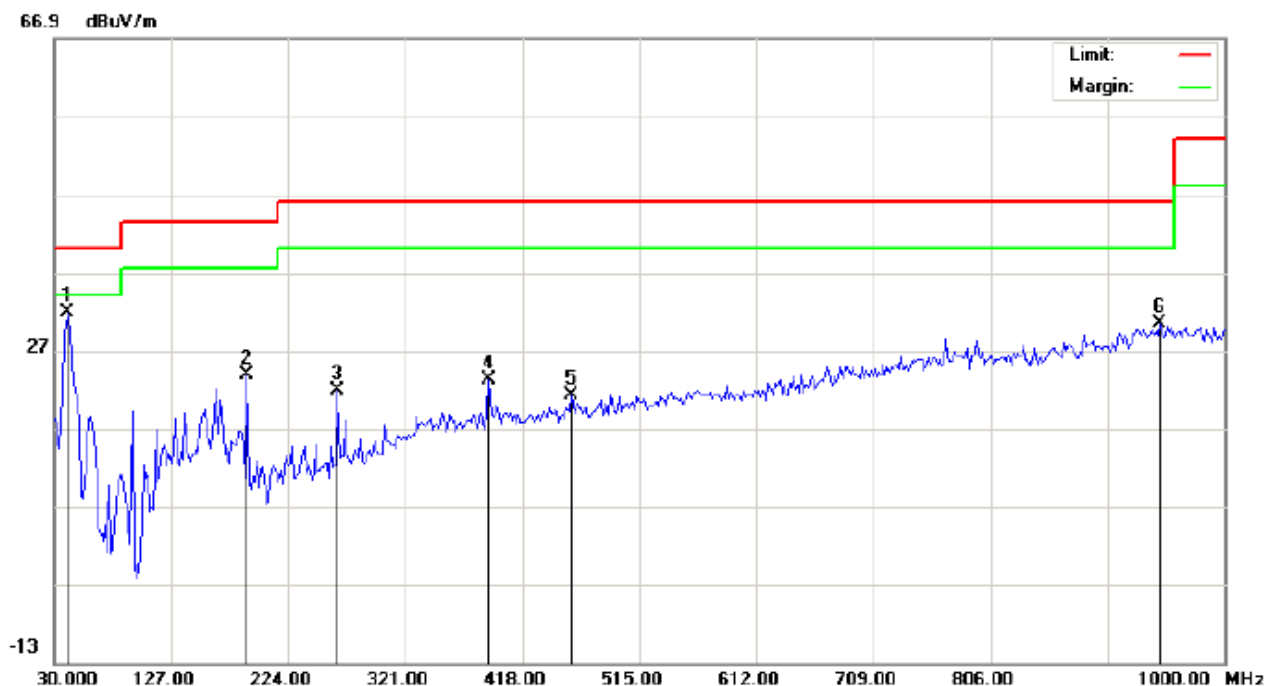


Site: site #1 Polarization: **Vertical** Temperature: 26
Limit: FCC Class B 3M Radiation Power: AC 120V/60Hz Humidity: 60 %
EUT: 3G Smart Phone Distance: 3m
M/N: S52
Mode: Low Channel TX
Note:

No.	Mk	Freq. MHz	Reading dBuV	Factor dB/m	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1	*	41.3167	22.90	8.81	31.71	40.00	-8.29	peak			
2		190.0500	12.22	11.52	23.74	43.50	-19.76	peak			
3		264.4166	7.43	14.34	21.77	46.00	-24.23	peak			
4		390.5167	4.14	19.01	23.15	46.00	-22.85	peak			
5		458.4167	0.43	20.68	21.11	46.00	-24.89	peak			
6		946.6500	0.42	29.91	30.33	46.00	-15.67	peak			

RESULT: PASS

EUT	3G Smart Phone	Model Name	S52
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2437MHZ	Antenna	Horizontal

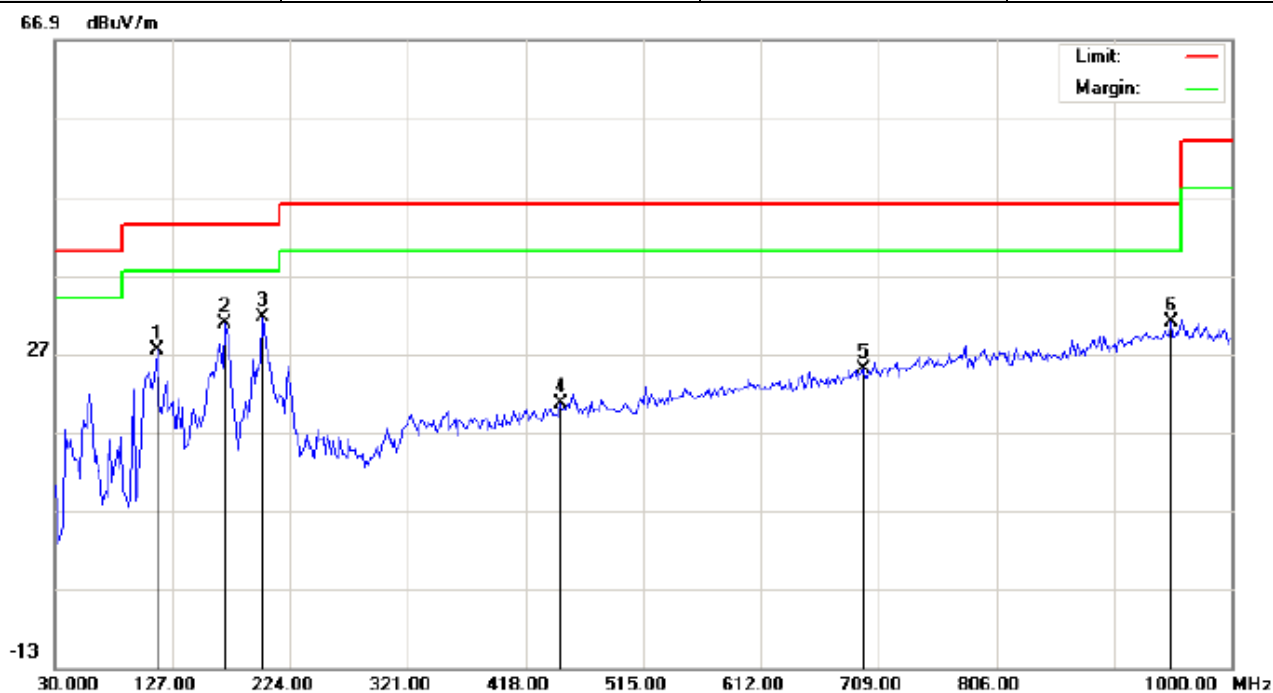

Site: site #1
Limit: FCC Class B 3M Radiation
EUT: 3G Smart Phone
M/N: S52
Mode: Middle Channel TX
Note:


Polarization: **Horizontal**
Power: AC 120V/60Hz
Distance: 3m

Temperature: 26
Humidity: 60 %

No.	Mk	Freq. MHz	Reading dBuV	Factor dB/m	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		114.0667	16.03	11.45	27.48	43.50	-16.02	peak			
2		170.6500	17.65	13.06	30.71	43.50	-12.79	peak			
3	*	201.3667	19.58	12.05	31.63	43.50	-11.87	peak			
4		447.1000	0.15	20.50	20.65	46.00	-25.35	peak			
5		696.0667	-0.12	25.08	24.96	46.00	-21.04	peak			
6		949.8833	0.93	30.00	30.93	46.00	-15.07	peak			

RESULT: PASS

EUT	3G Smart Phone	Model Name	S52
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2437MHZ	Antenna	Vertical

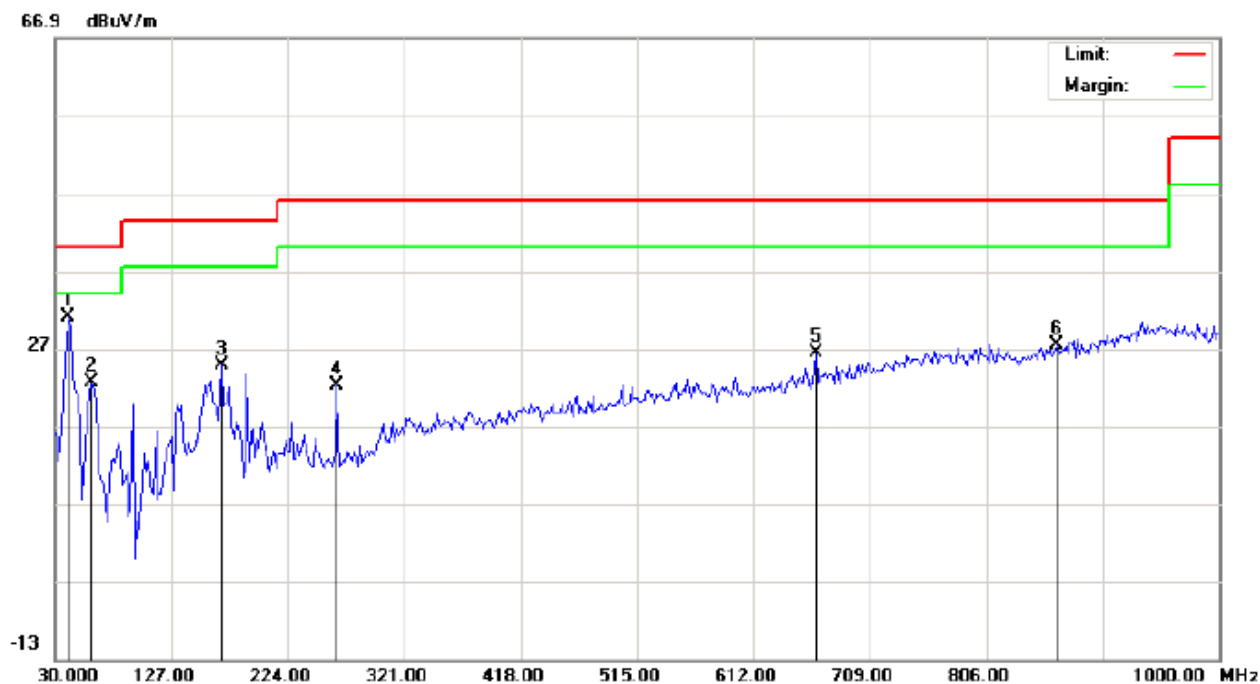


Site: site #1 Polarization: **Vertical** Temperature: 26
Limit: FCC Class B 3M Radiation Power: AC 120V/60Hz Humidity: 60 %
EUT: 3G Smart Phone Distance: 3m
M/N: S52
Mode: Middle Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	41.3167	22.22	8.81	31.03	40.00	-8.97	peak			
2		60.7167	14.64	7.87	22.51	40.00	-17.49	peak			
3		169.0333	10.03	14.76	24.79	43.50	-18.71	peak			
4		264.4166	7.90	14.34	22.24	46.00	-23.76	peak			
5		663.7333	2.22	24.22	26.44	46.00	-19.56	peak			
6		864.2000	-0.28	27.68	27.40	46.00	-18.60	peak			

RESULT: PASS

EUT	3G Smart Phone	Model Name	S52
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2462MHZ	Antenna	Horizontal

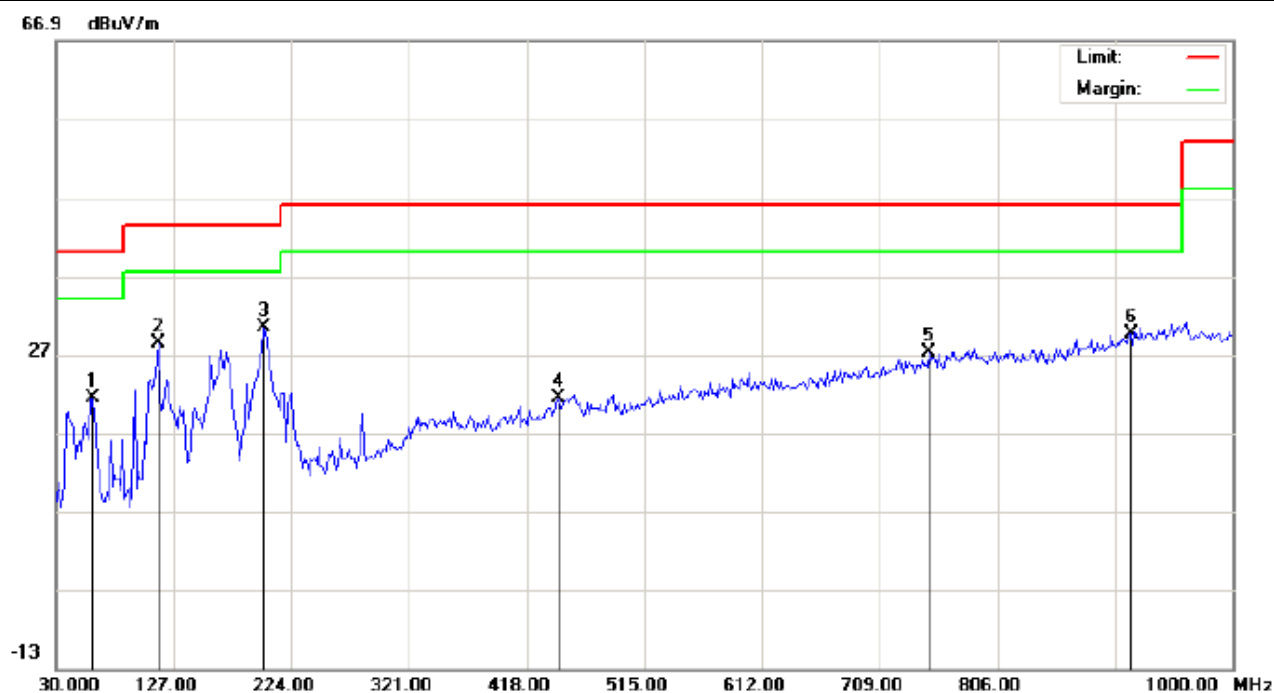

Site: site #1
Limit: FCC Class B 3M Radiation
EUT: 3G Smart Phone
M/N: S52
Mode: High Channel TX
Note:


Polarization: **Horizontal**
Power: AC 120V/60Hz
Distance: 3m

Temperature: 26
Humidity: 60 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		60.7167	10.41	11.09	21.50	40.00	-18.50	peak			
2		114.0667	17.00	11.45	28.45	43.50	-15.05	peak			
3	*	201.3667	18.42	12.05	30.47	43.50	-13.03	peak			
4		443.8667	1.05	20.40	21.45	46.00	-24.55	peak			
5		749.4167	0.64	26.61	27.25	46.00	-18.75	peak			
6		915.9333	0.50	29.05	29.55	46.00	-16.45	peak			

RESULT: PASS

EUT	3G Smart Phone	Model Name	S52
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2462MHZ	Antenna	Vertical

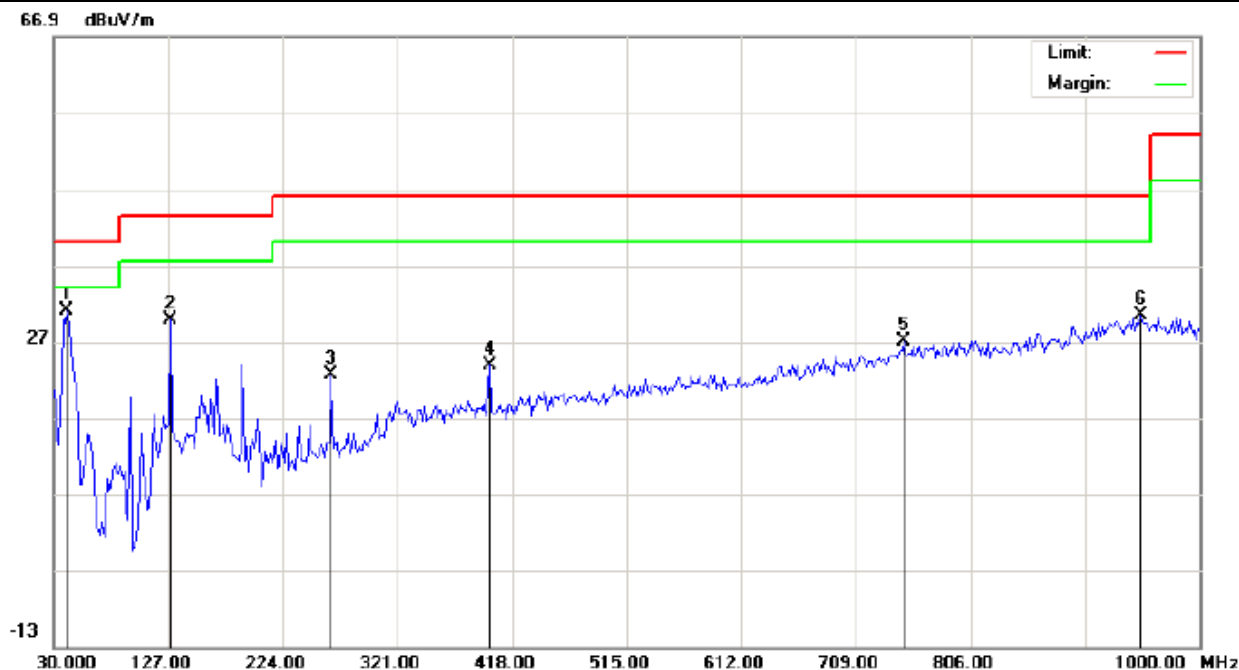

Site: site #1
Limit: FCC Class B 3M Radiation
EUT: 3G Smart Phone
M/N: S52
Mode: High Channel TX
Note:

Polarization: **Vertical**
Power: AC 120V/60Hz
Distance: 3m

Temperature: 26
Humidity: 60 %

No.	Mk	Freq. MHz	Reading dBuV	Factor dB/m	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1	*	41.3167	22.10	8.81	30.91	40.00	-9.09	peak			
2		128.6167	19.30	10.45	29.75	43.50	-13.75	peak			
3		264.4166	8.33	14.34	22.67	46.00	-23.33	peak			
4		398.6000	4.84	19.06	23.90	46.00	-22.10	peak			
5		749.4167	0.48	26.61	27.09	46.00	-18.91	peak			
6		949.8833	0.38	30.00	30.38	46.00	-15.62	peak			


RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION ABOVE 1GHZ

EUT	3G Smart Phone	Model Name	S52
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2412MHZ	Antenna	Horizontal

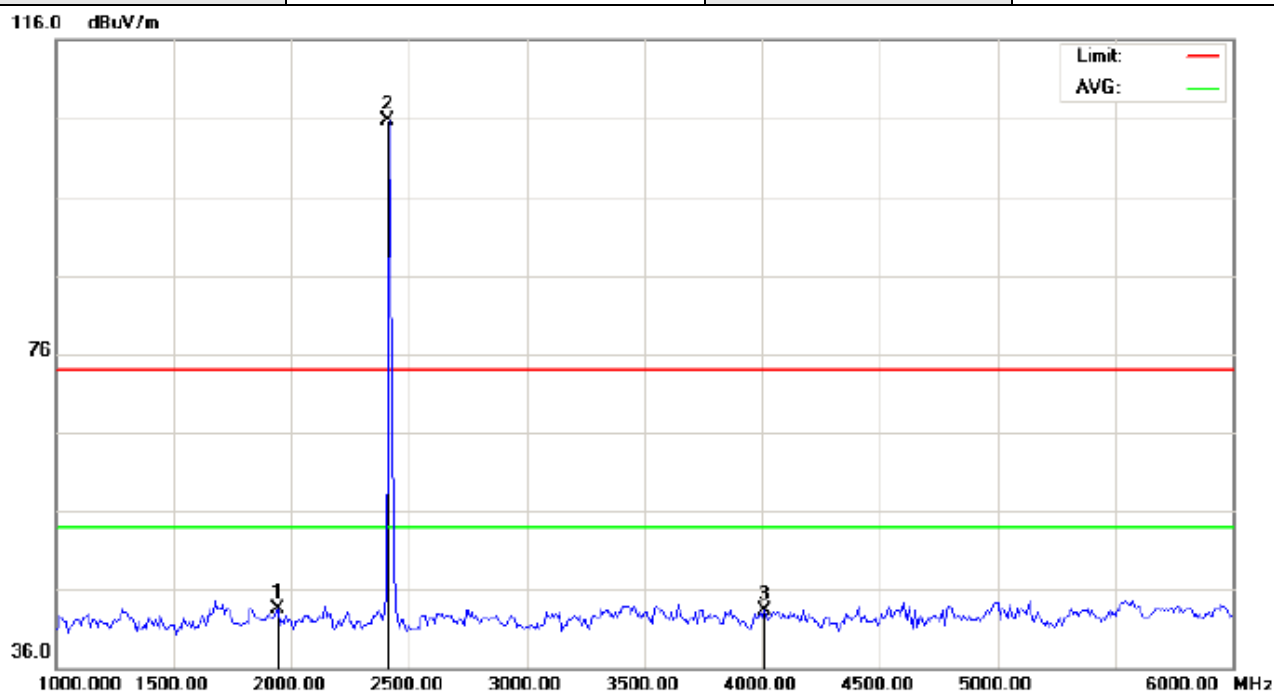


Site: site #1 Polarization: **Horizontal** Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %
EUT: 3G Smart Phone Distance: 3m
M/N: S52
Mode: 802.11b Low Channel TX
Note:

No.	Mk	Freq. MHz	Reading dBuV	Factor dB/m	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		1941.667	54.33	-10.73	43.60	74.00	-30.40	peak			
2	*	2412.000	115.28	-9.67	105.61	74.00	31.61	peak			
3		4008.333	48.06	-4.78	43.28	74.00	-30.72	peak			

RESULT: PASS

EUT	3G Smart Phone	Model Name	S52
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2412MHZ	Antenna	Vertical

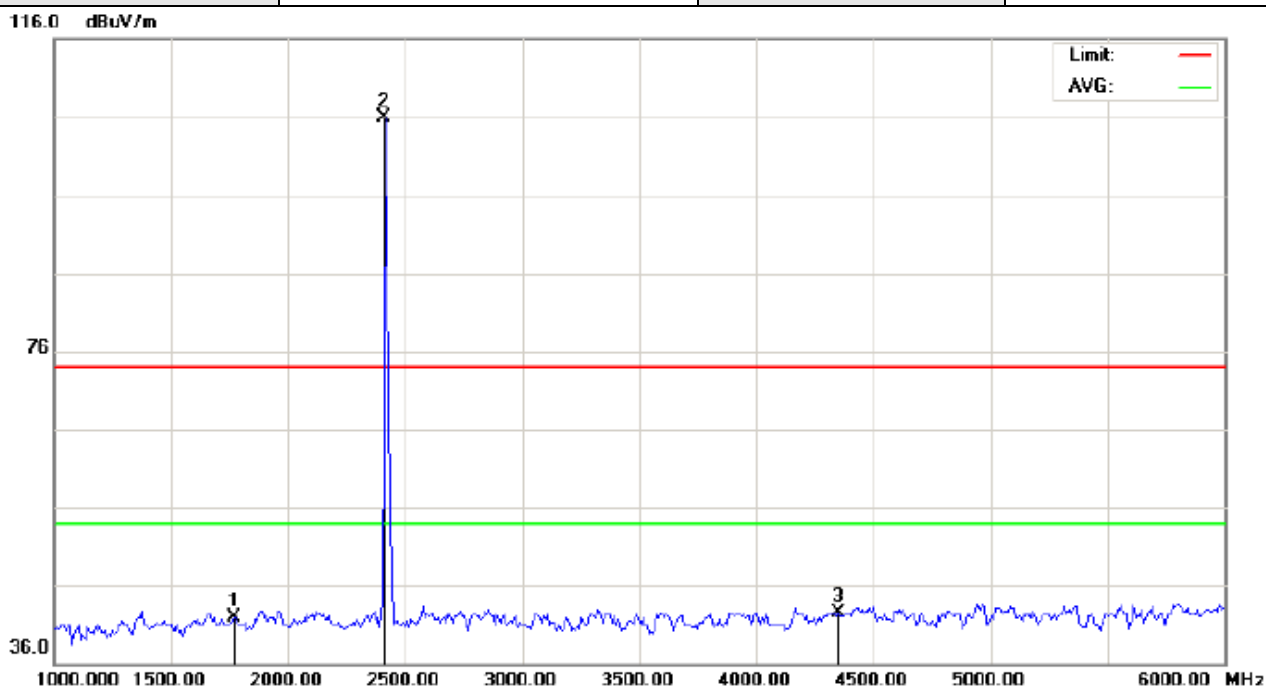

Site: site #1 Polarization: **Vertical** Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %
EUT: 3G Smart Phone Distance: 3m
M/N: S52
Mode: 802.11b Low Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		1766.667	54.49	-12.57	41.92	74.00	-32.08	peak			
2	*	2412.000	115.57	-9.67	105.90	74.00	31.90	peak			
3		4350.000	46.19	-3.62	42.57	74.00	-31.43	peak			

RESULT: PASS

Note: The other modes radiation emissions have more than 20dB margin.

All modes radiation emission from 6GHz to 25GHz at least have 20dB margin.

Factor = Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

12. BAND EDGE EMISSION

12.1. MEASUREMENT PROCEDURE

1) Radiated restricted band edge measurements

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting

2) Conducted Emissions at the bang edge

a) The transmitter output was connected to the spectrum analyzer


b) Set RBW=100kHz, VBW=300kHz

c) Suitable frequency span including 100kHz bandwidth from band edge

12.2. TEST SET-UP


Radiated same as 11.2

Conducted set up



12.3. Radiated Test Result

EUT	3G Smart Phone	Model Name	S52
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2412MHZ	Antenna	Horizontal

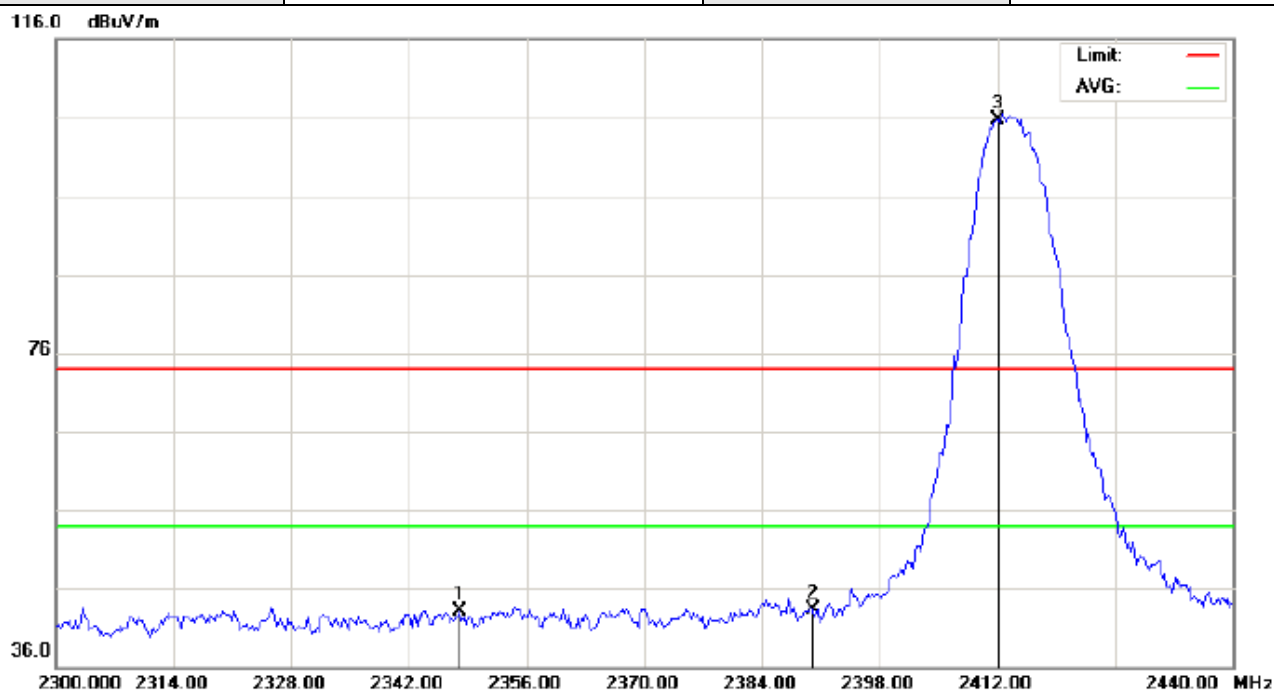


Site: site #1 Polarization: **Horizontal** Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %
EUT: 3G Smart Phone Distance: 3m
M/N: S52
Mode: 802.11b Low Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2348.067	52.88	-9.74	43.14	74.00	-30.86	peak			
2		2390.000	52.90	-9.69	43.21	74.00	-30.79	peak			
3	*	2412.000	115.36	-9.67	105.69	74.00	31.69	peak			

RESULT: PASS

EUT	3G Smart Phone	Model Name	S52
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2412MHZ	Antenna	Vertical

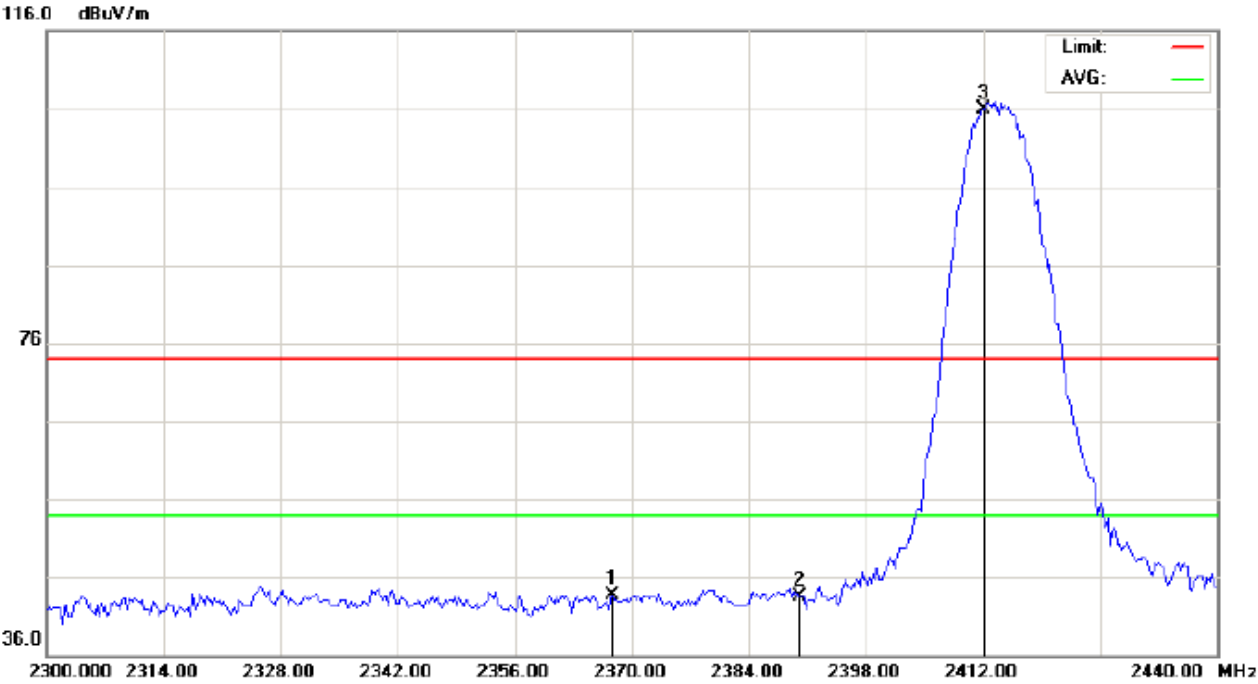

Site: site #1

Limit: FCC Class B 3M Radiation above 1GHZ(PK)

EUT: 3G Smart Phone

M/N: S52

Mode: 802.11b Low Channel TX

Note:

Polarization: *Vertical*

Power:

Distance: 3m


Temperature: 26

Humidity: 60 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2367.667	53.37	-9.72	43.65	74.00	-30.35	peak			
2		2390.000	53.27	-9.69	43.58	74.00	-30.42	peak			
3	*	2412.000	115.58	-9.67	105.91	74.00	31.91	peak			

RESULT: PASS

EUT	3G Smart Phone	Model Name	S52
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2462MHZ	Antenna	Horizontal

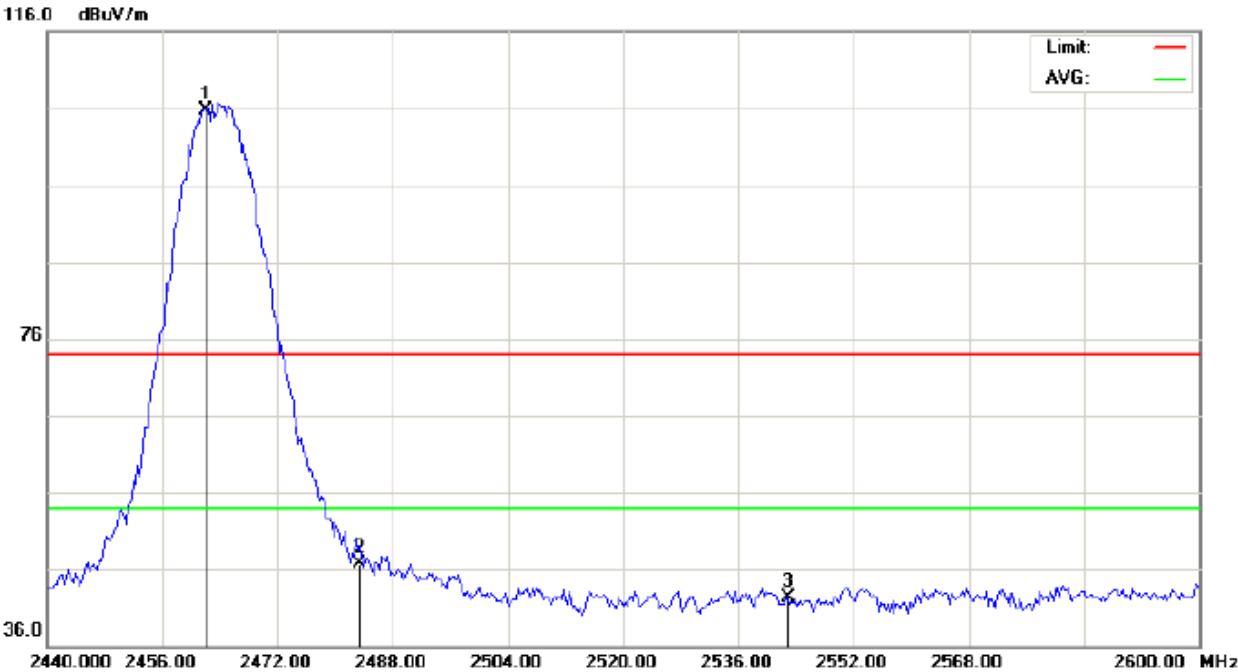

Site: site #1
Limit: FCC Class B 3M Radiation above 1GHZ(PK)
EUT: 3G Smart Phone
M/N: S52
Mode: 802.11b High Channel TX
Note:


Polarization: *Horizontal*
Power:
Distance: 3m

Temperature: 26
Humidity: 60 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2462.000	115.39	-9.61	105.78	74.00	31.78	peak			
2		2483.500	56.31	-9.59	46.72	74.00	-27.28	peak			
3		2542.933	51.80	-9.47	42.33	74.00	-31.67	peak			

RESULT: PASS

EUT	3G Smart Phone	Model Name	S52
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2462MHZ	Antenna	Vertical

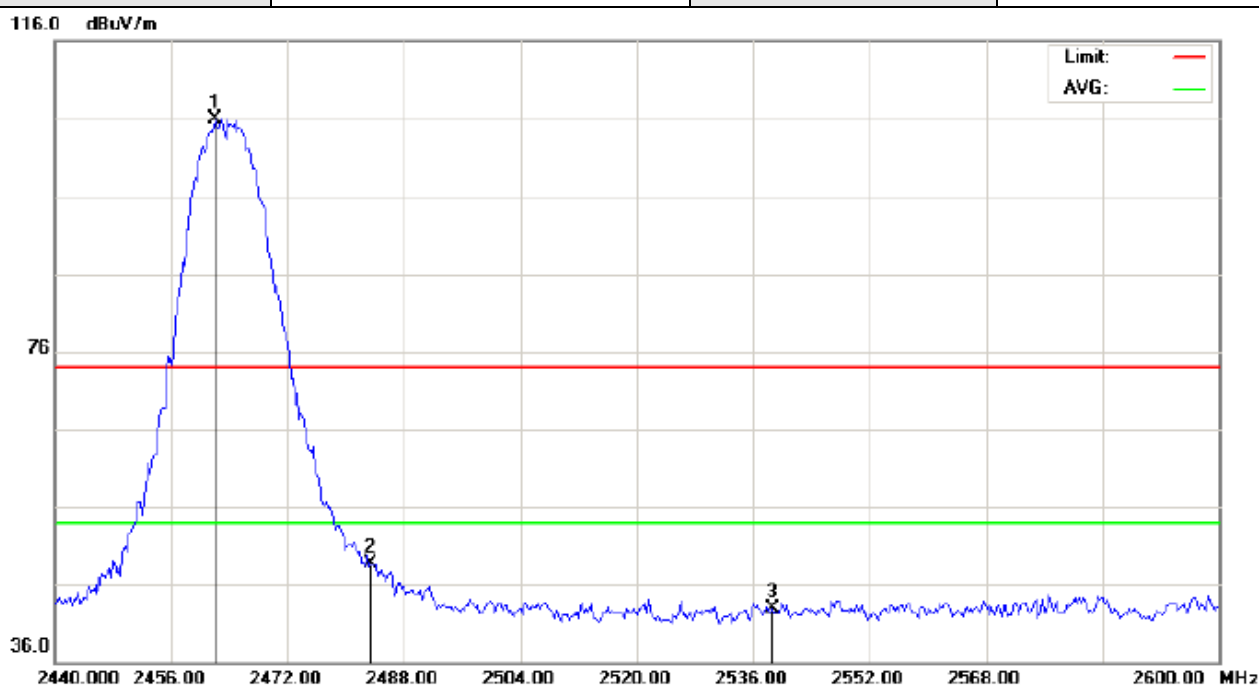

Site: site #1 Polarization: **Vertical** Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %
EUT: 3G Smart Phone Distance: 3m
M/N: S52
Mode: 802.11b High Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2462.000	115.42	-9.61	105.81	74.00	31.81	peak			
2		2483.500	58.22	-9.59	48.63	74.00	-25.37	peak			
3		2538.667	52.34	-9.48	42.86	74.00	-31.14	peak			

RESULT: PASS

Note: The other modes radiation emission have enough 20dB margin.


Factor = Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.


12.4. Conducted Test Result

Mode	Channel	Carrier Power[dBm]	Max.Spurious Level [dBm]	Limit [dBm]	Verdict
11B	LCH	9.28	-27.25	-10.72	PASS
11B	HCH	9.05	-49.25	-10.95	PASS
11G	LCH	3.6	-30.27	-16.4	PASS
11G	HCH	3.72	-39.34	-16.28	PASS
11N20SISO	LCH	2.64	-30.04	-17.36	PASS
11N20SISO	HCH	3.34	-36.42	-16.66	PASS
11N40SISO	LCH	-1.55	-36.37	-21.55	PASS
11N40SISO	HCH	-1.46	-38.75	-21.46	PASS

Test Graph

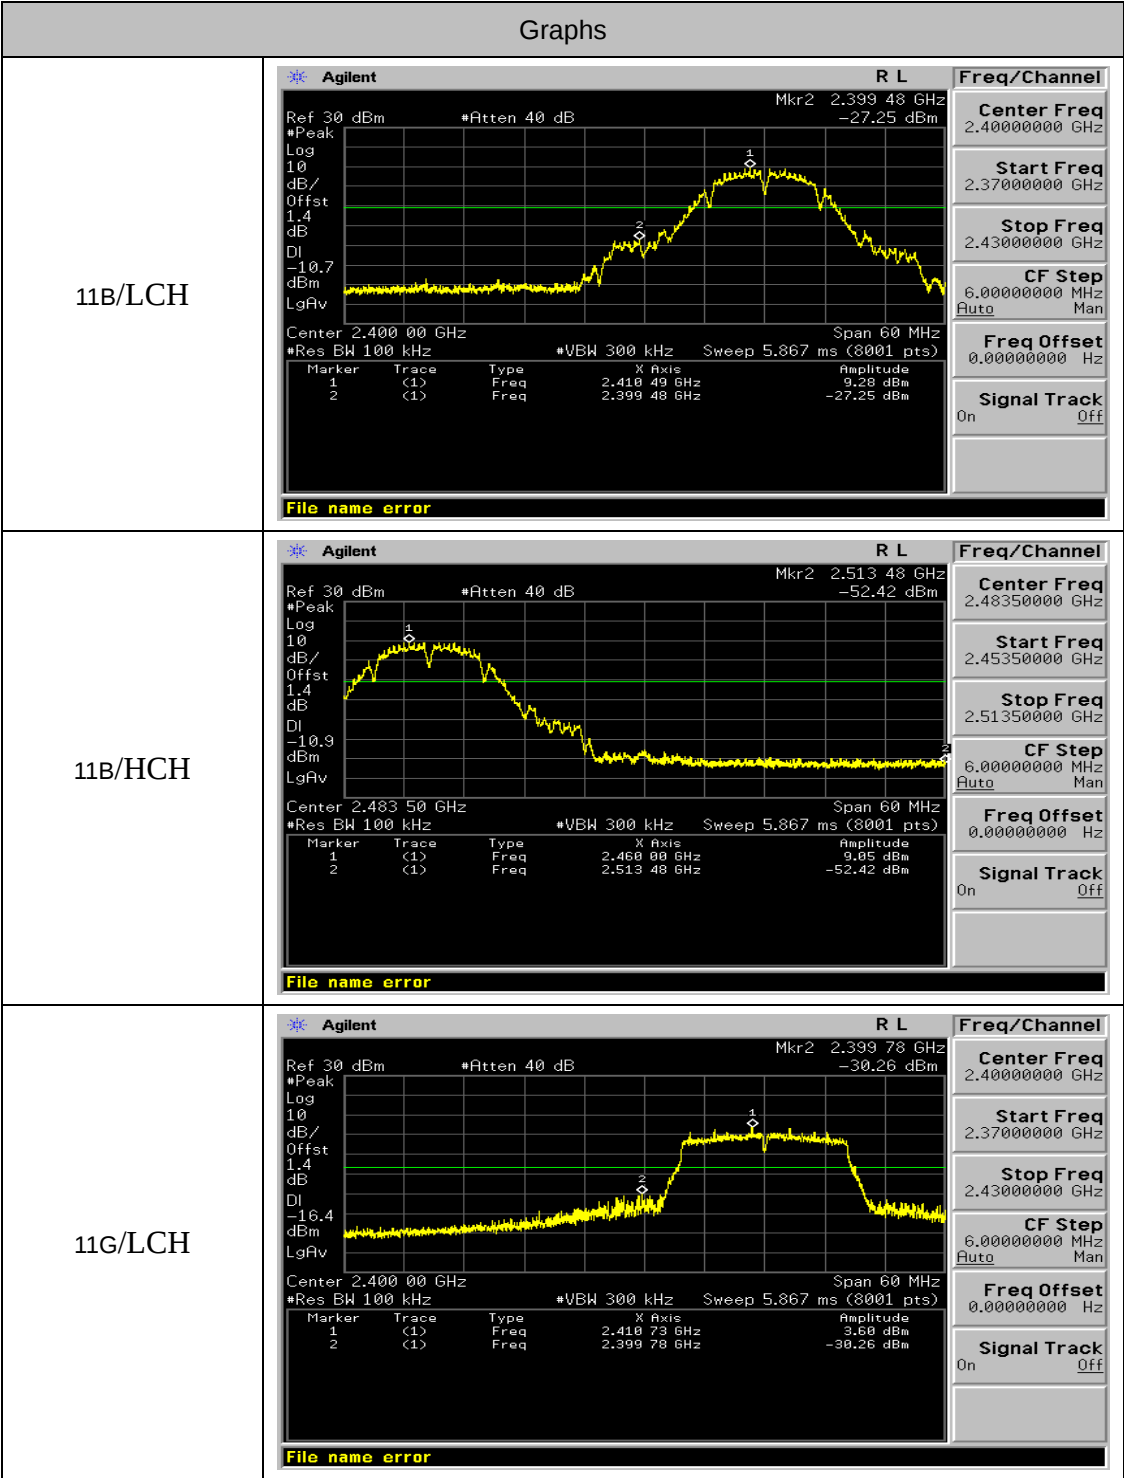

11G/HCH	Agilent R L Freq/Channel Ref 30 dBm *Atten 40 dB Mkr2 2.483 89 GHz -39.34 dBm Center Freq 2.48350000 GHz Start Freq 2.45350000 GHz Stop Freq 2.51350000 GHz CF Step 6.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Center 2.483 50 GHz *Res BW 100 kHz *VBW 300 kHz Sweep 5.867 ms (8001 pts) Span 60 MHz Marker 1 (1) Freq 2.460 72 GHz Amplitude 3.72 dBm Marker 2 (1) Freq 2.483 89 GHz Amplitude -39.34 dBm File name error
11N20SISO/LCH	Agilent R L Freq/Channel Ref 30 dBm *Atten 40 dB Mkr2 2.399 40 GHz -30.04 dBm Center Freq 2.40000000 GHz Start Freq 2.37000000 GHz Stop Freq 2.43000000 GHz CF Step 6.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Center 2.400 00 GHz *Res BW 100 kHz *VBW 300 kHz Sweep 5.867 ms (8001 pts) Span 60 MHz Marker 1 (1) Freq 2.407 00 GHz Amplitude 2.64 dBm Marker 2 (1) Freq 2.399 40 GHz Amplitude -30.04 dBm File name error
11N20SISO/HCH	Agilent R L Freq/Channel Ref 30 dBm *Atten 40 dB Mkr2 2.484 84 GHz -36.42 dBm Center Freq 2.48350000 GHz Start Freq 2.45350000 GHz Stop Freq 2.51350000 GHz CF Step 6.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Center 2.483 50 GHz *Res BW 100 kHz *VBW 300 kHz Sweep 5.867 ms (8001 pts) Span 60 MHz Marker 1 (1) Freq 2.464 49 GHz Amplitude 3.34 dBm Marker 2 (1) Freq 2.484 84 GHz Amplitude -36.42 dBm File name error

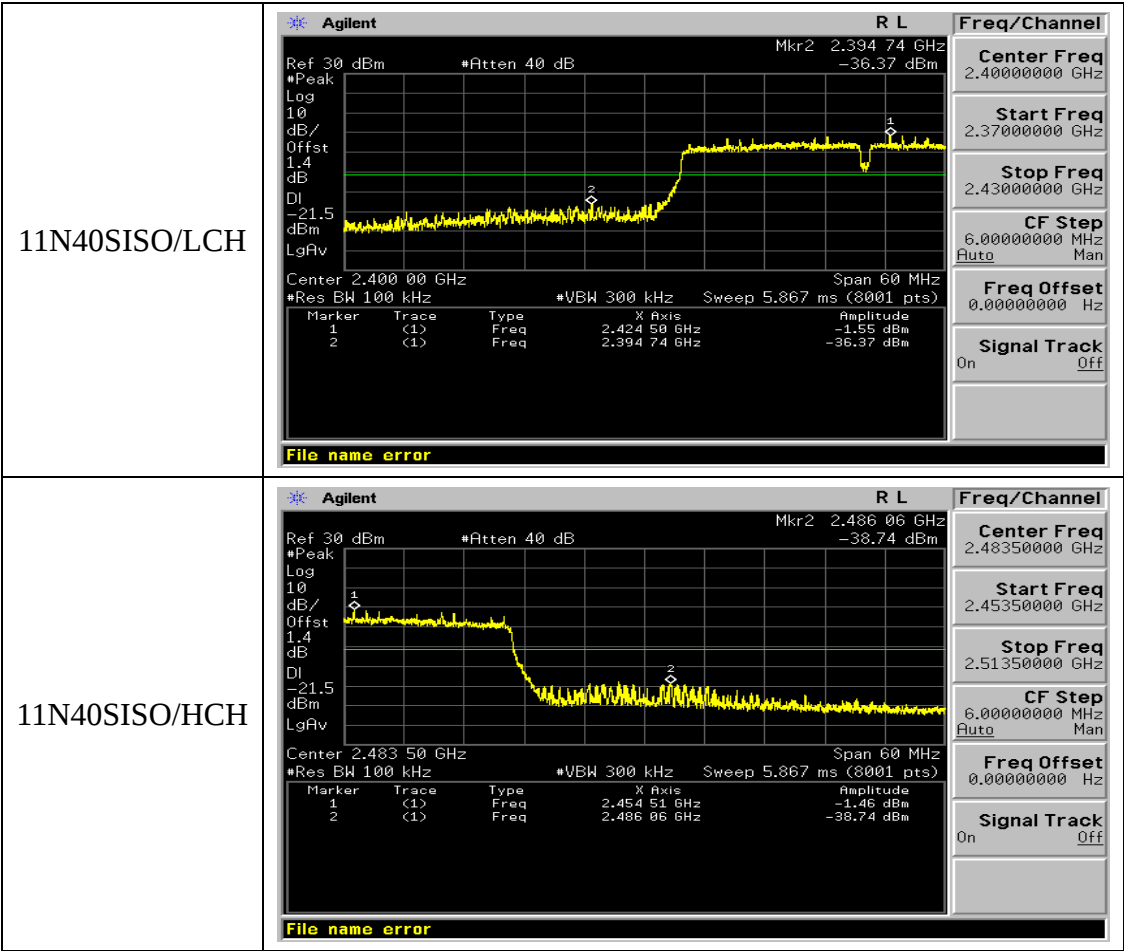

13. FCC LINE CONDUCTED EMISSION TEST


13.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage	
	Q.P.(dBuV)	Average(dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Note:

1. The lower limit shall apply at the transition frequency.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

13.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

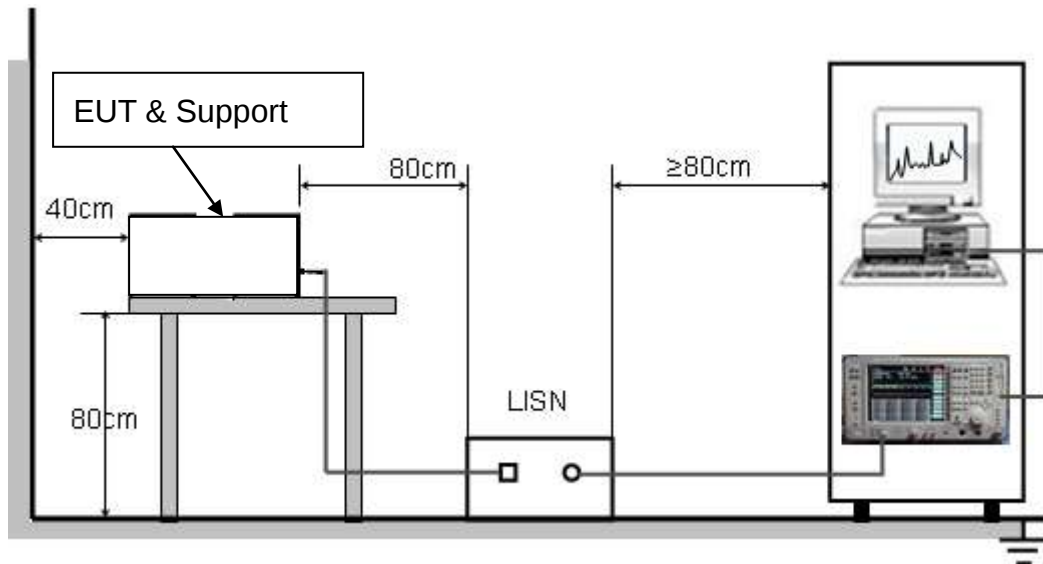

13.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
2. Support equipment, if needed, was placed as per ANSI C63.4.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
4. All support equipments received AC120V/60Hz power from a LISN, if any.
5. The EUT received charging voltage by adapter which received 120V/60Hz power by a LISN..
6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.
9. The test mode(s) were scanned during the preliminary test.


Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

13.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
3. The test data of the worst case condition(s) was reported on the Summary Data page.

13.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

LINE CONDUCTED EMISSION TEST LINE 1-L

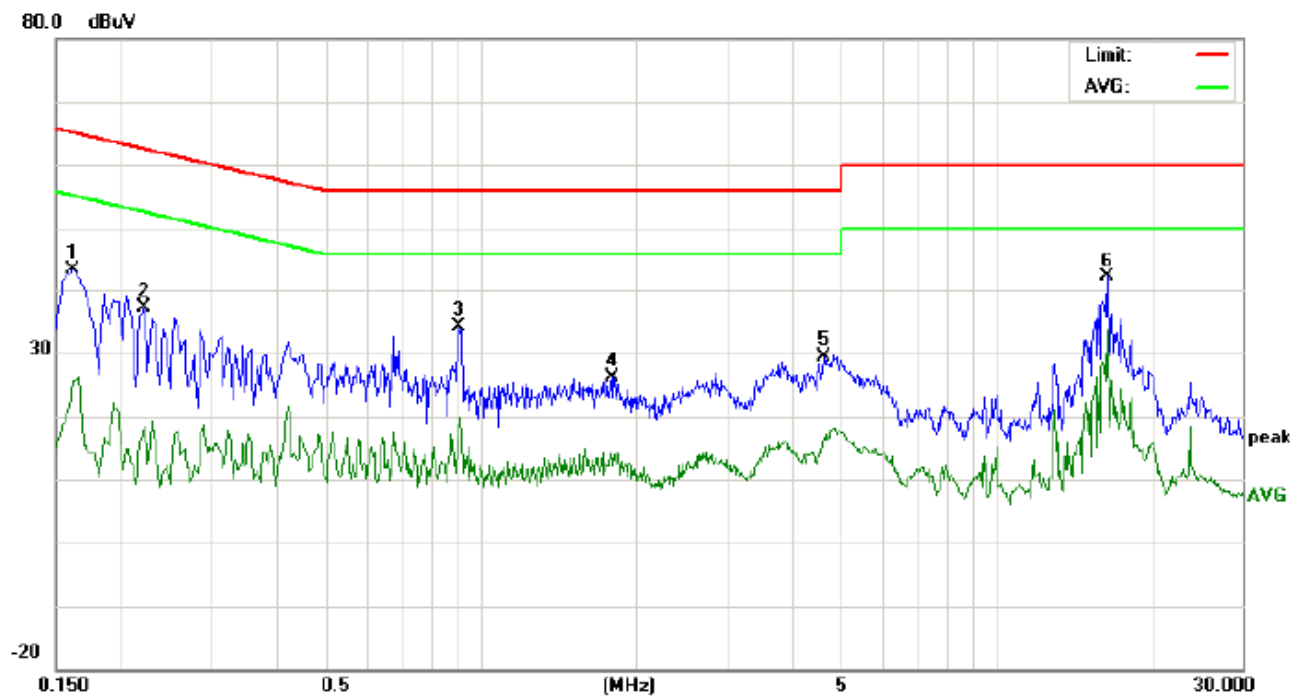


Site: Conduction
Limit: FCC Class B Conduction(QP)
EUT: 3G Smart Phone
M/N: S52
Mode: Normal Operating(WIFI)
Note:

Phase: **L1**
Power: AC 120V/60Hz
Temperature: 26
Humidity: 60 %

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1620	33.14		15.44	10.17	43.31		25.61	65.36	55.36	-22.05	-29.75	P	
2	0.2220	26.85		8.08	10.24	37.09		18.32	62.74	52.74	-25.65	-34.42	P	
3	0.9060	23.66		7.44	10.41	34.07		17.85	56.00	46.00	-21.93	-28.15	P	
4	1.7980	15.81		2.81	10.28	26.09		13.09	56.00	46.00	-29.91	-32.91	P	
5	4.6420	19.21		6.13	10.22	29.43		16.35	56.00	46.00	-26.57	-29.65	P	
6	16.4260	31.89		23.47	10.12	42.01		33.59	60.00	50.00	-17.99	-16.41	P	

Line Conducted Emission Test Line 2-N

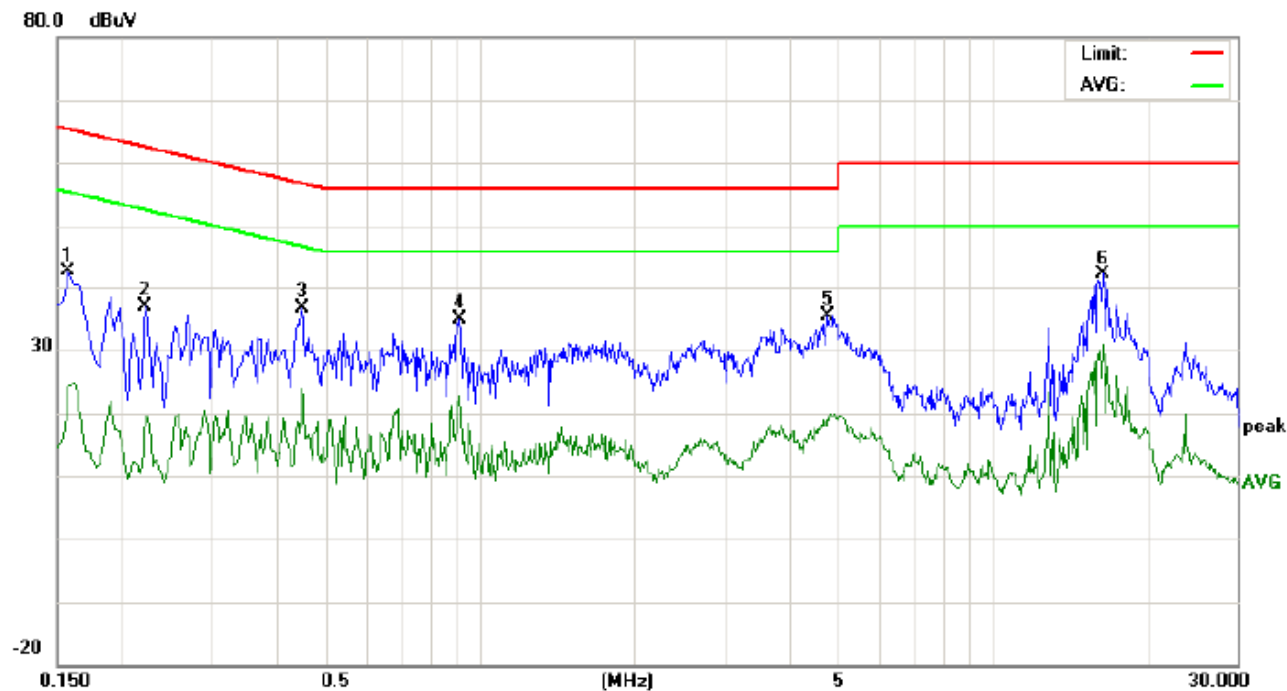

Site: Conduction
Limit: FCC Class B Conduction(QP)
EUT: 3G Smart Phone
M/N: S52
Mode: Normal Operating(WIFI)
Note:

Phase: **N**
Power: AC 120V/60Hz
Temperature: 26
Humidity: 60 %


No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1580	27.02		4.35	10.17	37.19		14.52	65.56	55.56	-28.37	-41.04	P	
2	0.2220	26.95		4.28	10.24	37.19		14.52	62.74	52.74	-25.55	-38.22	P	
3	0.4500	26.20		13.45	10.37	36.57		23.82	56.87	46.87	-20.30	-23.05	P	
4	0.9100	24.39		12.34	10.41	34.80		22.75	56.00	46.00	-21.20	-23.25	P	
5	4.7740	25.08		8.00	10.23	35.31		18.23	56.00	46.00	-20.69	-27.77	P	
6	16.4300	32.08		20.85	10.12	42.20		30.97	60.00	50.00	-17.80	-19.03	P	

APPENDIX A: PHOTOGRAPHS OF TEST SETUP

FCC LINE CONDUCTED EMISSION TEST SETUP



FCC RADIATED EMISSION TEST SETUP

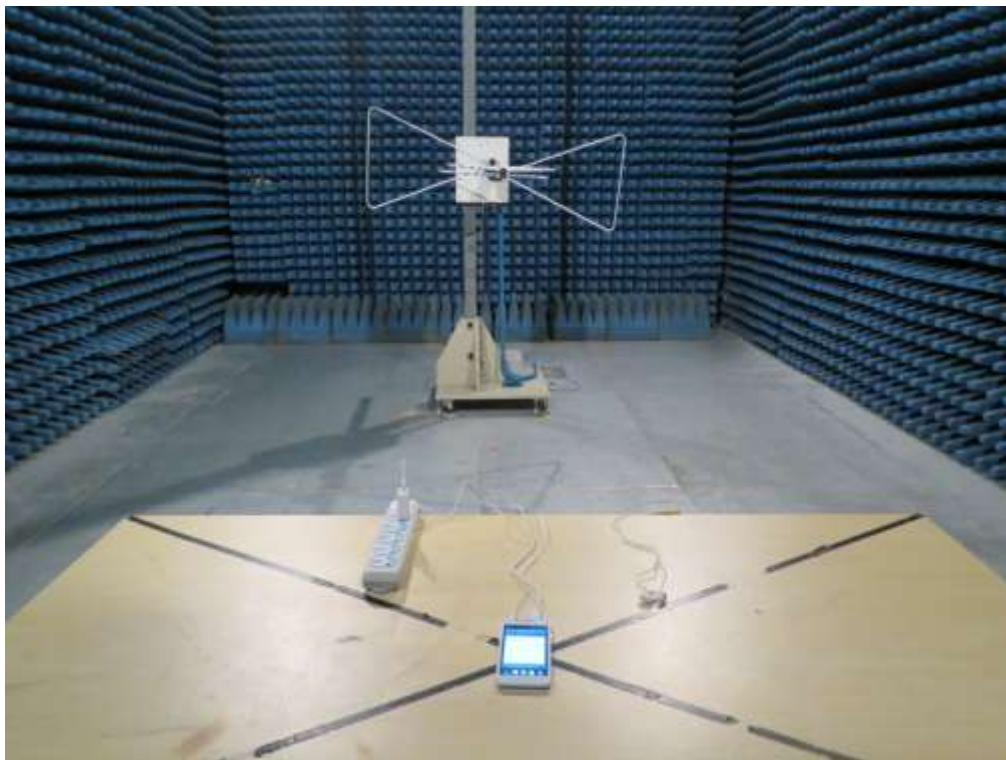

APPENDIX B: PHOTOGRAPHS OF EUT

TOTAL VIEW OF EUT



TOP VIEW OF EUT



BOTTOM VIEW OF EUT



FRONT VIEW OF EUT



BACK VIEW OF EUT



LEFT VIEW OF EUT



RIGHT VIEW OF EUT



BT&WIFI&GPS
Antenna

OPEN VIEW OF EUT-1



GSM &
WCDMA
Antenna


OPEN VIEW OF EUT-2




OPEN VIEW OF EUT-3



INTERNAL VIEW OF EUT-1

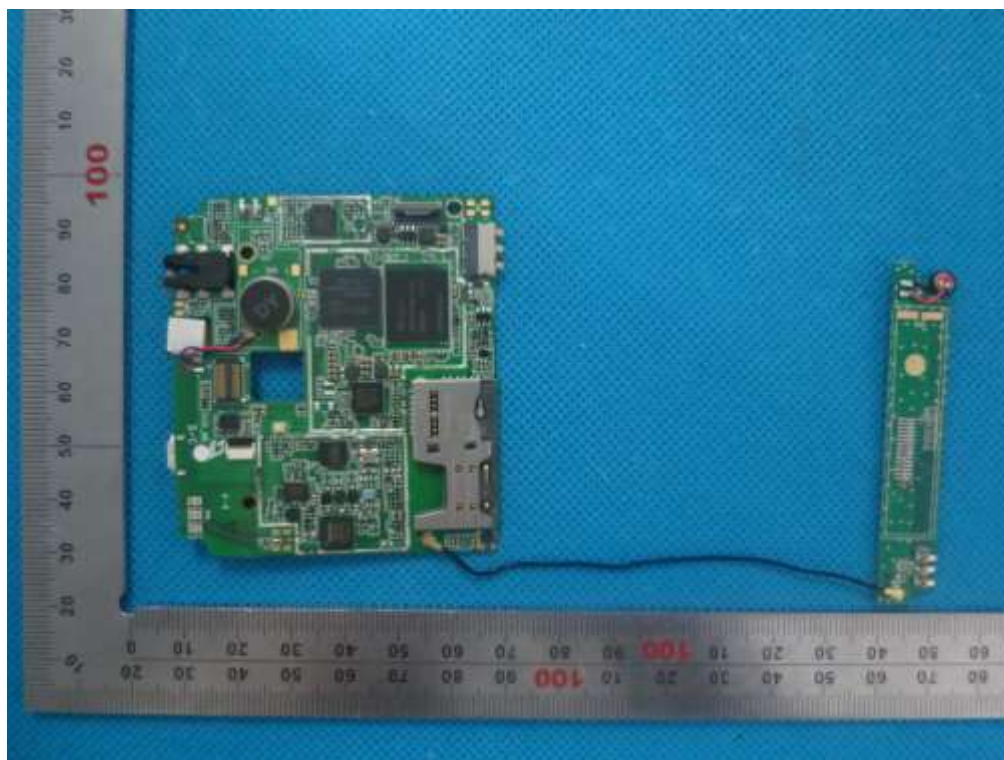

INTERNAL VIEW OF EUT-2

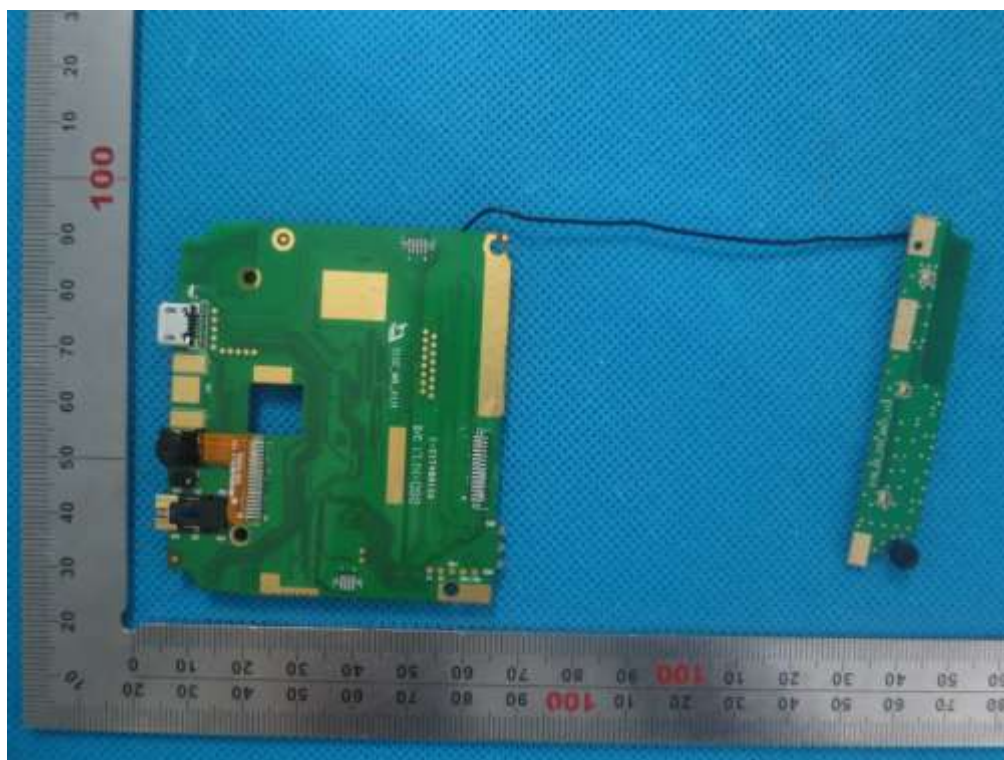

-----END OF REPORT-----