

# FCC Test Report

## (PART 22)

**Report No.:** RF160504W010-3

**FCC ID:** 2ADOBF20

**Test Model:** Hisense F20

**Received Date:** May 04, 2016

**Test Date:** May 05, 2016 ~ Jun. 02, 2016

**Issued Date:** Jun. 03, 2016

**Applicant:** Hisense International Co., Ltd.

**Address:** Floor 22, Hisense Tower, 17 Donghai Xi Road, Qingdao,  
266071, China

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd.,  
Taoyuan Branch

**Lab Address:** No. 47-2, 14th Ling, Chia Cau Vil., Lin Kou Dist., New Taipei  
City, Taiwan (R.O.C.)

**Test Location:** No. 19, Hwa Ya 2nd Rd., Wen Hwa Tsuen, Kwei Shan Hsiang,  
Taoyuan Hsien 333, Taiwan, R.O.C.

This report should not be used by the client to claim  
product certification, approval, or endorsement by  
TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies

## TABLE OF CONTENTS

|                                                                 |           |
|-----------------------------------------------------------------|-----------|
| <b>RELEASE CONTROL RECORD .....</b>                             | <b>3</b>  |
| <b>1 Certificate of Conformity.....</b>                         | <b>4</b>  |
| <b>2 Summary of Test Results .....</b>                          | <b>5</b>  |
| 2.1 Measurement Uncertainty .....                               | 5         |
| 2.2 Test Site And Instruments .....                             | 5         |
| <b>3 General Information.....</b>                               | <b>7</b>  |
| 3.1 General Description of EUT .....                            | 7         |
| 3.2 Configuration Of System Under Test.....                     | 9         |
| 3.2.1 Description Of Support Units.....                         | 9         |
| 3.3 Test Mode Applicability and Tested Channel Detail .....     | 10        |
| 3.4 EUT Operating Conditions .....                              | 13        |
| 3.5 General Description of Applied Standards .....              | 13        |
| <b>4 Test Types and Results .....</b>                           | <b>14</b> |
| 4.1 Output Power Measurement .....                              | 14        |
| 4.1.1 Limits of Output Power Measurement.....                   | 14        |
| 4.1.2 Test Procedures.....                                      | 14        |
| 4.1.3 Test Setup.....                                           | 15        |
| 4.1.4 Test Results .....                                        | 16        |
| 4.2 Frequency Stability Measurement.....                        | 23        |
| 4.2.1 Limits of Frequency Stability Measurement.....            | 23        |
| 4.2.2 Test Procedure .....                                      | 23        |
| 4.2.3 Test Setup.....                                           | 23        |
| 4.2.4 Test Results .....                                        | 23        |
| 4.3 Occupied Bandwidth Measurement .....                        | 25        |
| 4.3.1 Test Procedure .....                                      | 25        |
| 4.3.2 Test Setup.....                                           | 25        |
| 4.3.3 Test Result.....                                          | 26        |
| 4.4 Band Edge Measurement .....                                 | 32        |
| 4.4.1 Limits of Band Edge Measurement .....                     | 32        |
| 4.4.2 Test Setup.....                                           | 32        |
| 4.4.3 Test Procedures.....                                      | 32        |
| 4.4.4 Test Results .....                                        | 33        |
| 4.5 Peak To Average Ratio.....                                  | 38        |
| 4.5.1 Limits of Peak To Average Ratio Measurement .....         | 38        |
| 4.5.2 Test Setup.....                                           | 38        |
| 4.5.3 Test Procedures.....                                      | 38        |
| 4.5.4 Test Results .....                                        | 39        |
| 4.6 Conducted Spurious Emissions .....                          | 42        |
| 4.6.1 Limits of Conducted Spurious Emissions Measurement.....   | 42        |
| 4.6.2 Test Setup.....                                           | 42        |
| 4.6.3 Test Procedure .....                                      | 42        |
| 4.6.4 Test Results .....                                        | 43        |
| 4.7 Radiated Emission Measurement .....                         | 47        |
| 4.7.1 Limits of Radiated Emission Measurement.....              | 47        |
| 4.7.2 Test Procedure .....                                      | 47        |
| 4.7.3 Deviation from Test Standard .....                        | 47        |
| 4.7.4 Test Setup.....                                           | 48        |
| 4.7.5 Test Results .....                                        | 49        |
| <b>5 Pictures of Test Arrangements.....</b>                     | <b>65</b> |
| <b>Appendix – Information on the Testing Laboratories .....</b> | <b>66</b> |



A D T

## RELEASE CONTROL RECORD

| Issue No.      | Description      | Date Issued   |
|----------------|------------------|---------------|
| RF160517W010-3 | Original release | Jun. 03, 2016 |

## 1 Certificate of Conformity

**Product:** Mobile phone

**Brand:** Hisense

**Test Model:** Hisense F20

**Sample Status:** Identical Prototype

**Applicant:** Hisense International Co., Ltd.

**Test Date:** May 05, 2016 ~ Jun. 02, 2016

**Standards:** FCC Part 22, Subpart H

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**Prepared by :**  , **Date:** Jun. 03, 2016  
Amyee Qian / Engineer

**Approved by :**  , **Date:** Jun. 03, 2016  
William Chung / Manager

## 2 Summary of Test Results

| Applied Standard: FCC Part 22 & Part 2 |                              |        |                                                                                   |
|----------------------------------------|------------------------------|--------|-----------------------------------------------------------------------------------|
| FCC Clause                             | Test Item                    | Result | Remarks                                                                           |
| 2.1046<br>22.913 (a)                   | Effective radiated power     | PASS   | Meet the requirement of limit.                                                    |
| ---                                    | Peak To Average Ratio        | PASS   | Meet the requirement of limit.                                                    |
| 2.1055<br>22.355                       | Frequency Stability          | PASS   | Meet the requirement of limit.                                                    |
| 2.1049<br>22.917b                      | Occupied Bandwidth           | PASS   | Meet the requirement of limit.                                                    |
| 22.917                                 | Band Edge Measurements       | PASS   | Meet the requirement of limit.                                                    |
| 2.1051<br>22.917                       | Conducted Spurious Emissions | PASS   | Meet the requirement of limit.                                                    |
| 2.1053<br>22.917                       | Radiated Spurious Emissions  | PASS   | Meet the requirement of limit.<br>Minimum passing margin is -17.36dB at 42.61MHz. |

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

| Measurement                        | Frequency       | Expanded Uncertainty (k=2) (±) |
|------------------------------------|-----------------|--------------------------------|
| Conducted Emissions at mains ports | 150kHz ~ 30MHz  | 2.44 dB                        |
| Radiated Emissions up to 1 GHz     | 30MHz ~ 200MHz  | 2.93 dB                        |
|                                    | 200MHz ~1000MHz | 2.95 dB                        |
| Radiated Emissions above 1 GHz     | 1GHz ~ 18GHz    | 2.26 dB                        |
|                                    | 18GHz ~ 40GHz   | 1.94 dB                        |

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## 2.2 Test Site And Instruments

| Equipment                        | Manufacturer    | Model No.                | Serial No.  | Last Cal.   | Next Cal.   |
|----------------------------------|-----------------|--------------------------|-------------|-------------|-------------|
| EMI Test Receiver                | Rohde&Schwarz   | ESR7                     | 101494      | Apr. 05,16  | Apr. 04,17  |
| Signal and Spectrum Analyzer     | Rohde&Schwarz   | FSV40                    | 101094      | Apr. 05,16  | Apr. 04,17  |
| Bilog Antenna 1                  | Teseq           | CBL 6111D                | 30643       | Jun. 25,15  | Jun. 24,16  |
| Bilog Antenna 2                  | Teseq           | CBL 6111D                | 27089       | Jun. 25,15  | Jun. 24,16  |
| Horn Antenna                     | ETS-Lindgren    | 3117                     | 00062558    | May 30,14   | May 29,17   |
| Horn Antenna (15GHz-40GHz)       | SCHWARZBECK     | BBHA 9170                | BBHA9170147 | Jan. 21,14  | Jan. 20,17  |
| Amplifier                        | Burgeon         | BPA-530                  | 100220      | Apr. 05,16  | Apr. 04,17  |
| Pre-Amplifier                    | HP              | 8449B                    | 3008A00409  | Apr. 24,16  | Apr. 23,17  |
| Pre-Amplifier (18GHz-40GHz)      | EMCI            | EMC 184045               | 980102      | Nov. 11,15  | Nov. 10,16  |
| GPS Generator+ Antenna           | TOJOIN          | GNSS-5000A               | E1-010119   | Aug. 08, 14 | Aug. 07, 16 |
| 3m Semi-anechoic Chamber         | ETS-LINDGREN    | 9m*6m*6m                 | NSEMC003    | Mar. 12,16  | Mar. 11,18  |
| Test Software                    | ADT             | ADT_Radiated_V7.6.15.9.2 | N/A         | N/A         | N/A         |
| Power Meter                      | Anritsu         | ML2495A                  | 1139001     | Feb.19,16   | Feb. 18,17  |
| Power Sensor                     | Anritsu         | MA2411B                  | 1126068     | Feb.19,16   | Feb. 18,17  |
| Power Sensor                     | Keysight        | U2021XA                  | MY55060016  | May 27,15   | May 26,17   |
| Power Sensor                     | Keysight        | U2021XA                  | MY55060018  | May 27,15   | May 26,17   |
| Digital Multimeter               | FLUKE           | 15B                      | A1220010DG  | Oct. 12, 15 | Oct. 11, 16 |
| Humid & Temp Programmable Tester | Haida           | HD-2257                  | 110807201   | Sep.07,15   | Sep. 06,16  |
| Oscilloscope                     | Agilent         | DSO9254A                 | MY51260160  | Nov. 09,15  | Nov. 08,16  |
| Signal Analyzer                  | Rohde & Schwarz | FSV7                     | 102331      | Nov. 09,15  | Nov. 08,16  |
| Signal Generator                 | Agilent         | N5183A                   | MY50140980  | Apr. 21, 16 | Apr. 20, 17 |
| ESG Vector Signal Generator      | Agilent         | E4438C                   | MY49072505  | Sep. 01,15  | Aug. 31,16  |
| BLUETOOTH TESTER                 | Rohde&Schwarz   | CBT32                    | 100811      | Oct. 12, 15 | Oct. 11, 16 |

**NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The calibration interval of the loop antenna is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.

3. The test was performed in HwaYa Chamber 4.

4. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.

5. The FCC Site Registration No. is 460141.

6. The IC Site Registration No. is IC7450F-4.

### 3 General Information

#### 3.1 General Description of EUT

|                            |                                                        |                                 |
|----------------------------|--------------------------------------------------------|---------------------------------|
| <b>PRODUCT</b>             | Mobile phone                                           |                                 |
| <b>BRAND</b>               | Hisense                                                |                                 |
| <b>MODEL NAME</b>          | Hisense F20                                            |                                 |
| <b>POWER SUPPLY</b>        | 5.0Vdc (adapter or host equipment)<br>3.8Vdc (battery) |                                 |
| <b>MODULATION TYPE</b>     | <b>GSM/GPRS</b>                                        | GMSK                            |
|                            | <b>EDGE</b>                                            | GMSK, 8PSK                      |
|                            | <b>WCDMA</b>                                           | BPSK                            |
|                            | <b>LTE</b>                                             | QPSK, 16QAM                     |
| <b>FREQUENCY RANGE</b>     | <b>GSM/GPRS/EDGE</b>                                   | 824.2MHz ~ 848.8MHz             |
|                            | <b>WCDMA</b>                                           | 826.4MHz ~ 846.6MHz             |
|                            | <b>LTE Band 5<br/>(Channel Bandwidth: 1.4MHz)</b>      | 824.7MHz ~ 848.3MHz             |
|                            | <b>LTE Band 5<br/>(Channel Bandwidth: 3MHz)</b>        | 825.5MHz ~ 847.5MHz             |
|                            | <b>LTE Band 5<br/>(Channel Bandwidth: 5MHz)</b>        | 826.5MHz ~ 846.5MHz             |
|                            | <b>LTE Band 5<br/>(Channel Bandwidth: 10MHz)</b>       | 829MHz ~ 844MHz                 |
| <b>MAX. ERP POWER</b>      | <b>GSM</b>                                             | 503mW                           |
|                            | <b>EDGE</b>                                            | 137mW                           |
|                            | <b>WCDMA</b>                                           | 24mW                            |
|                            | <b>LTE Band 5<br/>(Channel Bandwidth: 1.4MHz)</b>      | 223mW                           |
|                            | <b>LTE Band 5<br/>(Channel Bandwidth: 3MHz)</b>        | 227mW                           |
|                            | <b>LTE Band 5<br/>(Channel Bandwidth: 5MHz)</b>        | 225mW                           |
|                            | <b>LTE Band 5<br/>(Channel Bandwidth: 10MHz)</b>       | 190mW                           |
| <b>EMISSION DESIGNATOR</b> | <b>GSM</b>                                             | 247KGXW                         |
|                            | <b>EDGE</b>                                            | 243KG7W                         |
|                            | <b>WCDMA</b>                                           | 4M15F9W                         |
|                            | <b>LTE Band 5<br/>(Channel Bandwidth: 1.4MHz)</b>      | QPSK: 1M09G7D                   |
|                            |                                                        | 16QAM: 1M09W7D                  |
|                            | <b>LTE Band 5<br/>(Channel Bandwidth: 3MHz)</b>        | QPSK: 2M69G7D                   |
|                            |                                                        | 16QAM: 2M69W7D                  |
|                            | <b>LTE Band 5<br/>(Channel Bandwidth: 5MHz)</b>        | QPSK: 4M48G7D                   |
|                            |                                                        | 16QAM: 4M48W7D                  |
|                            | <b>LTE Band 5<br/>(Channel Bandwidth: 10MHz)</b>       | QPSK: 8M96G7D<br>16QAM: 8M94W7D |
| <b>ANTENNA TYPE</b>        | Fixed Internal antenna with 0.6dBi gain                |                                 |
| <b>HW VERSION</b>          | V1.0                                                   |                                 |

|                         |                                                                                         |
|-------------------------|-----------------------------------------------------------------------------------------|
| <b>SW VERSION</b>       | L1259.6.01.00.MX05                                                                      |
| <b>ACCESSORY DEVICE</b> | Refer to note as below                                                                  |
| <b>DATA CABLE</b>       | USB cable: shielded, detachable, 0.8 m<br>Earphone cable: Unshielded, detachable, 0.8 m |

Note:

1. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.
2. The EUT was powered by the following adapter:

|                |                    |
|----------------|--------------------|
| <b>ADAPTER</b> |                    |
| <b>BRAND:</b>  | Hisense            |
| <b>MODEL:</b>  | A31-501000         |
| <b>INPUT:</b>  | AC 100-240V, 150mA |
| <b>OUTPUT:</b> | DC 5V, 1000mA      |

3. The EUT matched the following USB Cable and Earphone.


|                     |                                             |
|---------------------|---------------------------------------------|
| <b>USB CABLE</b>    |                                             |
| <b>BRAND:</b>       | SHENZHEN FKY-QY HARDWARE ELECTRONIC CO.,LTD |
| <b>MODEL:</b>       | FKYM1-2828L08BKR/FKYM1-2828L08WHR           |
| <b>SIGNAL LINE:</b> | 0.8 METER                                   |

|                     |                                    |
|---------------------|------------------------------------|
| <b>EARPHONE</b>     |                                    |
| <b>BRAND:</b>       | NEW LEADER                         |
| <b>MODEL:</b>       | NLD-EM116T-055S<br>NLD-EM116T-056S |
| <b>SIGNAL LINE:</b> | 0.8 METER                          |


4. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.

### 3.2 Configuration of System Under Test

#### FOR RADIATION EMISSION TEST

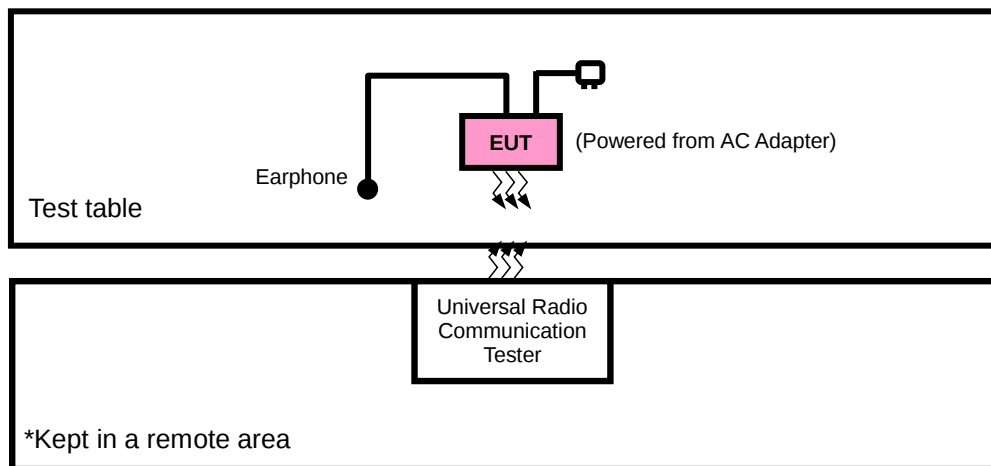

#### FOR E.R.P. TEST

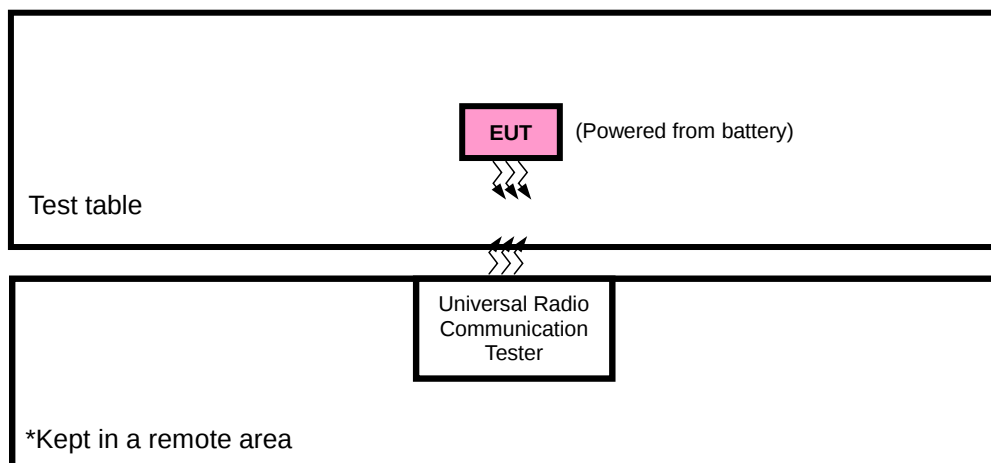

#### 3.2.1 Description Of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| NO. | PRODUCT   | BRAND    | MODEL NO. | SERIAL NO. | FCC ID |
|-----|-----------|----------|-----------|------------|--------|
| 1   | DC source | LONG WEI | PS-6403D  | 010934269  | N/A    |
| 2   | PC        | HP       | A6608CN   | 3CR83825X3 | N/A    |

| NO. | SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS |
|-----|-----------------------------------------------------|
| 1   | DC Line: Unshielded, Detachable 1.0m                |
| 2   | AC Line: Unshielded, Detachable 1.5m                |

#### NOTE:

1. All power cords of the above support units are non shielded (1.8m).

### 3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports

The worst case was found when positioned on Z-plane. Following channel(s) was (were) selected for the final test as listed below:

Test results are presented in the report as below.

| Test Mode | Test Condition     |
|-----------|--------------------|
| A         | Power from adapter |
| B         | Power from battery |

#### GSM MODE

| EUT Configure Mode | Test Item                    | Available Channel | Tested Channel | Mode      |
|--------------------|------------------------------|-------------------|----------------|-----------|
| A                  | ERP                          | 128 to 251        | 128, 190, 251  | GSM       |
| B                  | Frequency Stability          | 128 to 251        | 190            | GSM       |
| A                  | Occupied Bandwidth           | 128 to 251        | 128, 190, 251  | GSM, EDGE |
| A                  | Band Edge                    | 128 to 251        | 128, 251       | GSM, EDGE |
| A                  | Peak To Average Ratio        | 128 to 251        | 128, 190, 251  | GSM, EDGE |
| A                  | Condcudeted Emission         | 128 to 251        | 128, 190, 251  | GSM, EDGE |
| A                  | Radiated Emission Below 1GHz | 128 to 251        | 128            | GSM       |
| A                  | Radiated Emission Above 1GHz | 128 to 251        | 128, 190, 251  | GSM       |

#### WCDMA MODE

| EUT Configure Mode | Test Item                    | Available Channel | Tested Channel   | Mode  |
|--------------------|------------------------------|-------------------|------------------|-------|
| A                  | ERP                          | 4132 to 4233      | 4132, 4182, 4233 | WCDMA |
| B                  | Frequency Stability          | 4132 to 4233      | 4182             | WCDMA |
| A                  | Occupied Bandwidth           | 4132 to 4233      | 4132, 4182, 4233 | WCDMA |
| A                  | Band Edge                    | 4132 to 4233      | 4132, 4233       | WCDMA |
| A                  | Peak To Average Ratio        | 4132 to 4233      | 4132, 4182, 4233 | WCDMA |
| A                  | Condcudeted Emission         | 4132 to 4233      | 4132, 4182, 4233 | WCDMA |
| A                  | Radiated Emission Below 1GHz | 4132 to 4233      | 4132             | WCDMA |
| A                  | Radiated Emission Above 1GHz | 4132 to 4233      | 4132, 4182, 4233 | WCDMA |

# LTE BAND 5 MODE

| TEST ITEM           | Available Channel | Tested Channel      | Channel bandwidth | modulation | mode                |
|---------------------|-------------------|---------------------|-------------------|------------|---------------------|
| ERP                 | 20407 to 20643    | 20407, 20525, 20643 | 1.4MHz            | QPSK,16QAM | 1 RB / 0 RB Offset  |
|                     | 20415 to 20635    | 20415, 20525, 20635 | 3MHz              | QPSK,16QAM | 1 RB / 0 RB Offset  |
|                     | 20425 to 20625    | 20425, 20525, 20625 | 5MHz              | QPSK,16QAM | 1 RB / 0 RB Offset  |
|                     | 20450 to 20600    | 20450, 20525, 20600 | 10MHz             | QPSK,16QAM | 1 RB / 0 RB Offset  |
| FREQUENCY STABILITY | 20407 to 20643    | 20525               | 1.4MHz            | QPSK       | 1 RB / 0 RB Offset  |
|                     | 20415 to 20635    | 20525               | 3MHz              | QPSK       | 1 RB / 0 RB Offset  |
|                     | 20425 to 20625    | 20525               | 5MHz              | QPSK       | 1 RB / 0 RB Offset  |
|                     | 20450 to 20600    | 20525               | 10MHz             | QPSK       | 1 RB / 0 RB Offset  |
| OCCUPIED BANDWIDTH  | 20407 to 20643    | 20407, 20525, 20643 | 1.4MHz            | QPSK       | 6 RB / 0 RB Offset  |
|                     |                   |                     |                   | 16QAM      | 6 RB / 0 RB Offset  |
|                     | 20415 to 20635    | 20415, 20525, 20635 | 3MHz              | QPSK       | 15 RB / 0 RB Offset |
|                     |                   |                     |                   | 16QAM      | 15 RB / 0 RB Offset |
|                     | 20425 to 20625    | 20425, 20525, 20625 | 5MHz              | QPSK       | 25 RB / 0 RB Offset |
|                     |                   |                     |                   | 16QAM      | 25 RB / 0 RB Offset |
|                     | 20450 to 20600    | 20450, 20525, 20600 | 10MHz             | QPSK       | 50 RB / 0 RB Offset |
|                     |                   |                     |                   | 16QAM      | 50 RB / 0 RB Offset |

|                    |                |       |         |      |                     |
|--------------------|----------------|-------|---------|------|---------------------|
| BAND EDGE          | 20407 to 20643 | 20407 | 1.4 MHz | QPSK | 1 RB / 0 RB Offset  |
|                    |                |       |         |      | 6 RB / 0 RB Offset  |
|                    | 20407 to 20643 | 20643 | 1.4 MHz | QPSK | 1 RB / 5 RB Offset  |
|                    |                |       |         |      | 6 RB / 0 RB Offset  |
|                    | 20415 to 20635 | 20415 | 3 MHz   | QPSK | 1 RB / 0 RB Offset  |
|                    |                |       |         |      | 15 RB / 0 RB Offset |
|                    | 20415 to 20635 | 20635 | 3 MHz   | QPSK | 1 RB / 14 RB Offset |
|                    |                |       |         |      | 15 RB / 0 RB Offset |
|                    | 20425 to 20625 | 20425 | 5MHz    | QPSK | 1 RB / 0 RB Offset  |
|                    |                |       |         |      | 25 RB / 0 RB Offset |
| CONDCUDED EMISSION | 20425 to 20625 | 20625 | 5MHz    | QPSK | 1 RB / 24 RB Offset |
|                    |                |       |         |      | 25 RB / 0 RB Offset |
|                    | 20450 to 20600 | 20450 | 10MHz   | QPSK | 1 RB / 0 RB Offset  |
|                    |                |       |         |      | 50 RB / 0 RB Offset |
| RADIATED EMISSION  | 20450 to 20600 | 20600 | 10MHz   | QPSK | 1 RB / 49 RB Offset |
|                    |                |       |         |      | 50 RB / 0 RB Offset |
|                    | 20407 to 20643 | 20525 | 1.4MHz  | QPSK | 1 RB / 0 RB Offset  |
|                    | 20415 to 20635 | 20525 | 3MHz    | QPSK | 1 RB / 0 RB Offset  |
| RADIATED EMISSION  | 20425 to 20625 | 20525 | 5MHz    | QPSK | 1 RB / 0 RB Offset  |
|                    | 20450 to 20600 | 20525 | 10MHz   | QPSK | 1 RB / 0 RB Offset  |
|                    | 20407 to 20643 | 20525 | 1.4MHz  | QPSK | 1 RB / 0 RB Offset  |
|                    | 20415 to 20635 | 20525 | 3MHz    | QPSK | 1 RB / 0 RB Offset  |
| RADIATED EMISSION  | 20425 to 20625 | 20525 | 5MHz    | QPSK | 1 RB / 0 RB Offset  |
|                    | 20450 to 20600 | 20525 | 10MHz   | QPSK | 1 RB / 0 RB Offset  |

### **Test Condition:**

| Test Item             | Environmental Conditions | Input Power          | Tested By   |
|-----------------------|--------------------------|----------------------|-------------|
| ERP                   | 23deg. C, 62%RH          | DC 3.8V from battery | Yuqiang Yin |
| Frequency Stability   | 23deg. C, 62%RH          | DC 3.8V from battery | Yuqiang Yin |
| Occupied Bandwidth    | 23deg. C, 62%RH          | DC 3.8V from battery | Yuqiang Yin |
| Band Edge             | 23deg. C, 62%RH          | DC 3.8V from battery | Yuqiang Yin |
| Peak To Average Ratio | 23deg. C, 62%RH          | DC 3.8V from battery | Yuqiang Yin |
| Conducuted Emission   | 25deg. C, 63.6%RH        | 5Vdc from adapter    | Alex Chen   |
| Radiated Emission     | 23deg. C, 62%RH          | DC 3.8V from battery | Yuqiang Yin |

### **3.4 EUT Operating Conditions**

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

### **3.5 General Description of Applied Standards**

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC 47 CFR Part 2**

**FCC 47 CFR Part 22**

**KDB 971168 D01 Power Meas License Digital Systems v02r02**

**ANSI/TIA/EIA-603-D**

**NOTE:** All test items have been performed and recorded as per the above standards.

## 4 Test Types and Results

### 4.1 Output Power Measurement

#### 4.1.1 Limits of Output Power Measurement

Mobile / Portable station are limited to 7 watts e.r.p.

#### 4.1.2 Test Procedures

##### EIRP / ERP Measurement:


- a. All measurements were done at low, middle and high operational frequency range. RBW and VBW is 1MHz for GSM, GPRS & EDGE, 5MHz for WCDMA mode, and 10MHz for LTE mode.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step b. Record the power level of S.G
- d.  $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$ . E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole,  $E.R.P \text{ power} = E.I.R.P \text{ power} - 2.15\text{dBi}$ .

##### Conducted Power Measurement:

The EUT was set up for the maximum power with GSM, GPRS & WCDMA link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

#### 4.1.3 Test Setup

##### EIRP / ERP MEASUREMENT:

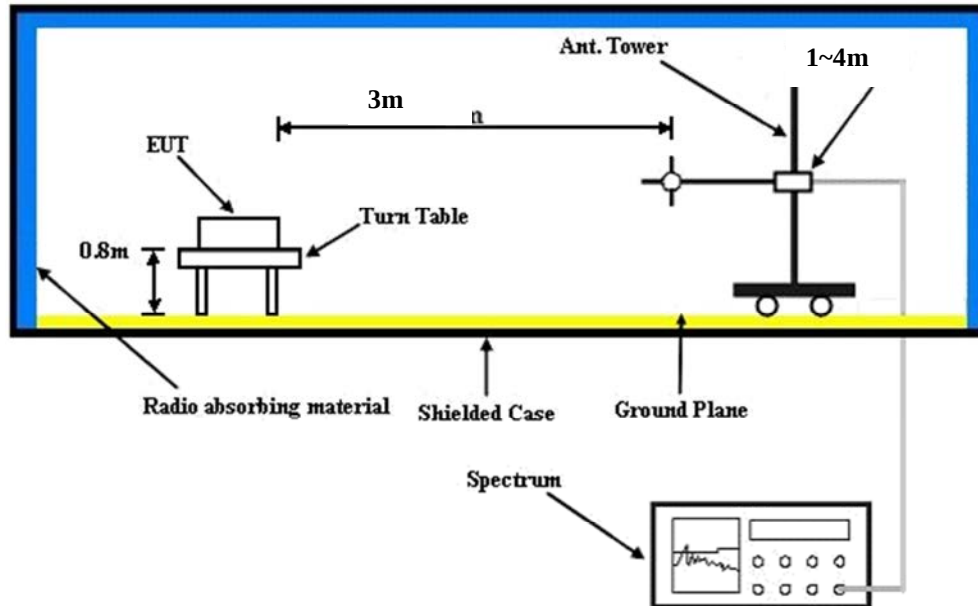

For the actual test configuration, please refer to the attached file (Test Setup Photo).

##### CONDUCTED POWER MEASUREMENT:



For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.4 Test Results

##### CONDUCTED OUTPUT POWER (dBm)

| Band            | GSM850 |       |       |
|-----------------|--------|-------|-------|
| Channel         | 128    | 190   | 251   |
| Frequency (MHz) | 824.2  | 836.6 | 848.8 |
| GSM             | 32.66  | 32.74 | 33.06 |
| GPRS 8          | 32.56  | 32.55 | 32.97 |
| GPRS 10         | 31.14  | 31.11 | 31.35 |
| GPRS 11         | 29.53  | 29.58 | 29.71 |
| GPRS 12         | 27.91  | 27.86 | 28.09 |
| EDGE 8 (MCS1)   | 26.73  | 26.70 | 26.80 |
| EDGE 10 (MCS1)  | 25.66  | 25.61 | 25.75 |
| EDGE 11 (MCS9)  | 24.09  | 24.04 | 24.16 |
| EDGE 12 (MCS9)  | 22.51  | 22.50 | 22.60 |

| Band            | WCDMA V |       |       |
|-----------------|---------|-------|-------|
| Channel         | 4132    | 4182  | 4233  |
| Frequency (MHz) | 826.4   | 836.4 | 846.6 |
| RMC 12.2K       | 23.60   | 23.64 | 23.55 |
| HSPA            |         |       |       |
| HSDPA Subtest-1 | 22.76   | 22.71 | 22.72 |
| HSDPA Subtest-2 | 22.76   | 22.70 | 22.71 |
| HSDPA Subtest-3 | 22.26   | 22.22 | 22.21 |
| HSDPA Subtest-4 | 22.23   | 22.25 | 22.19 |
| HSUPA Subtest-1 | 22.57   | 22.59 | 22.60 |
| HSUPA Subtest-2 | 20.68   | 20.69 | 20.66 |
| HSUPA Subtest-3 | 21.51   | 21.45 | 21.35 |
| HSUPA Subtest-4 | 20.41   | 20.28 | 19.98 |
| HSUPA Subtest-5 | 22.73   | 22.74 | 22.70 |

| Band/BW | Modulation | RB Size | RB Offset | Low CH 20407        | Mid CH 20525        | High CH 20643       | 3GPP MPR (dB) |
|---------|------------|---------|-----------|---------------------|---------------------|---------------------|---------------|
|         |            |         |           | Frequency 824.7 MHz | Frequency 836.5 MHz | Frequency 848.3 MHz |               |
| 5/1.4   | QPSK       | 1       | 0         | 23.16               | 23.02               | 23.06               | 0             |
|         |            | 1       | 2         | 22.92               | 23.15               | 23.05               | 0             |
|         |            | 1       | 5         | 22.90               | 22.97               | 22.87               | 0             |
|         |            | 3       | 0         | 23.14               | 23.00               | 23.04               | 0             |
|         |            | 3       | 1         | 22.90               | 23.13               | 23.03               | 0             |
|         |            | 3       | 3         | 22.88               | 22.95               | 22.85               | 0             |
|         |            | 6       | 0         | 22.12               | 22.01               | 22.06               | 1             |
|         | 16QAM      | 1       | 0         | 22.24               | 22.11               | 22.04               | 1             |
|         |            | 1       | 2         | 22.11               | 22.23               | 22.18               | 1             |
|         |            | 1       | 5         | 22.04               | 22.10               | 22.20               | 1             |
|         |            | 3       | 0         | 22.23               | 22.10               | 22.03               | 1             |
|         |            | 3       | 1         | 22.10               | 22.22               | 22.17               | 1             |
|         |            | 3       | 3         | 22.03               | 22.09               | 22.19               | 1             |
|         |            | 6       | 0         | 20.95               | 21.02               | 20.81               | 2             |

| Band/BW | Modulation | RB Size | RB Offset | Low CH 20415        | Mid CH 20525        | High CH 20635       | 3GPP MPR (dB) |
|---------|------------|---------|-----------|---------------------|---------------------|---------------------|---------------|
|         |            |         |           | Frequency 825.5 MHz | Frequency 836.5 MHz | Frequency 847.5 MHz |               |
| 5/3     | QPSK       | 1       | 0         | 23.20               | 23.06               | 23.10               | 0             |
|         |            | 1       | 7         | 22.96               | 23.19               | 23.09               | 0             |
|         |            | 1       | 14        | 22.94               | 23.01               | 22.91               | 0             |
|         |            | 8       | 0         | 22.19               | 22.02               | 22.03               | 1             |
|         |            | 8       | 3         | 22.10               | 22.01               | 22.01               | 1             |
|         |            | 8       | 7         | 22.09               | 21.98               | 21.93               | 1             |
|         |            | 15      | 0         | 22.16               | 22.05               | 22.10               | 1             |
|         | 16QAM      | 1       | 0         | 22.28               | 22.15               | 22.08               | 1             |
|         |            | 1       | 7         | 22.15               | 22.27               | 22.22               | 1             |
|         |            | 1       | 14        | 22.08               | 22.14               | 22.24               | 1             |
|         |            | 8       | 0         | 21.08               | 21.14               | 21.12               | 2             |
|         |            | 8       | 3         | 21.02               | 20.93               | 21.07               | 2             |
|         |            | 8       | 7         | 20.99               | 20.96               | 20.92               | 2             |
|         |            | 15      | 0         | 20.99               | 21.06               | 20.85               | 2             |

| Band/BW | Modulation | RB Size | RB Offset | Low CH<br>20425        | Mid CH<br>20525        | High CH<br>20625       | 3GPP<br>MPR<br>(dB) |
|---------|------------|---------|-----------|------------------------|------------------------|------------------------|---------------------|
|         |            |         |           | Frequency<br>826.5 MHz | Frequency<br>836.5 MHz | Frequency<br>846.5 MHz |                     |
| 5/5     | QPSK       | 1       | 0         | 23.26                  | 23.12                  | 23.16                  | 0                   |
|         |            | 1       | 12        | 23.02                  | 23.25                  | 23.15                  | 0                   |
|         |            | 1       | 24        | 23.00                  | 23.07                  | 22.97                  | 0                   |
|         |            | 12      | 0         | 22.25                  | 22.08                  | 22.09                  | 1                   |
|         |            | 12      | 6         | 22.16                  | 22.07                  | 22.07                  | 1                   |
|         |            | 12      | 13        | 22.15                  | 22.04                  | 21.99                  | 1                   |
|         |            | 25      | 0         | 22.22                  | 22.11                  | 22.16                  | 1                   |
|         | 16QAM      | 1       | 0         | 22.34                  | 22.21                  | 22.14                  | 1                   |
|         |            | 1       | 12        | 22.21                  | 22.33                  | 22.28                  | 1                   |
|         |            | 1       | 24        | 22.14                  | 22.20                  | 22.30                  | 1                   |
|         |            | 12      | 0         | 21.14                  | 21.20                  | 21.18                  | 2                   |
|         |            | 12      | 6         | 21.08                  | 20.99                  | 21.13                  | 2                   |
|         |            | 12      | 13        | 21.05                  | 21.02                  | 20.98                  | 2                   |
|         |            | 25      | 0         | 21.05                  | 21.12                  | 20.91                  | 2                   |

| Band/BW | Modulation | RB Size | RB Offset | Low CH<br>20450      | Mid CH<br>20525        | High CH<br>20600     | 3GPP<br>MPR<br>(dB) |
|---------|------------|---------|-----------|----------------------|------------------------|----------------------|---------------------|
|         |            |         |           | Frequency<br>829 MHz | Frequency<br>836.5 MHz | Frequency<br>844 MHz |                     |
| 5/10    | QPSK       | 1       | 0         | 23.29                | 23.15                  | 23.19                | 0                   |
|         |            | 1       | 24        | 23.05                | 23.28                  | 23.18                | 0                   |
|         |            | 1       | 49        | 23.03                | 23.10                  | 23.00                | 0                   |
|         |            | 25      | 0         | 22.28                | 22.11                  | 22.12                | 1                   |
|         |            | 25      | 12        | 22.19                | 22.10                  | 22.10                | 1                   |
|         |            | 25      | 25        | 22.18                | 22.07                  | 22.02                | 1                   |
|         |            | 50      | 0         | 22.25                | 22.14                  | 22.19                | 1                   |
|         | 16QAM      | 1       | 0         | 22.37                | 22.24                  | 22.17                | 1                   |
|         |            | 1       | 24        | 22.24                | 22.36                  | 22.31                | 1                   |
|         |            | 1       | 49        | 22.17                | 22.23                  | 22.33                | 1                   |
|         |            | 25      | 0         | 21.17                | 21.23                  | 21.21                | 2                   |
|         |            | 25      | 12        | 21.11                | 21.02                  | 21.16                | 2                   |
|         |            | 25      | 25        | 21.08                | 21.05                  | 21.01                | 2                   |
|         |            | 50      | 0         | 21.08                | 21.15                  | 20.94                | 2                   |

## ERP POWER (dBm)

### GSM

| Channel | Frequency (MHz) | LVL (dBm) | Correction Factor(dB) | ERP(dBm) | ERP(mW)       | Polarization (H/V) |
|---------|-----------------|-----------|-----------------------|----------|---------------|--------------------|
| 128     | 824.2           | -5.09     | 33.56                 | 26.32    | 428.45        | H                  |
| 189     | 836.4           | -4.46     | 33.63                 | 27.02    | <b>503.38</b> | H                  |
| 251     | 848.8           | -5.21     | 33.57                 | 26.21    | 417.64        | H                  |
| 128     | 824.2           | -12.59    | 34.24                 | 19.50    | 89.04         | V                  |
| 189     | 836.4           | -12.16    | 34.59                 | 20.28    | 106.56        | V                  |
| 251     | 848.8           | -11.51    | 34.62                 | 20.96    | 124.82        | V                  |

### EDGE

| Channel | Frequency (MHz) | LVL (dBm) | Correction Factor(dB) | ERP(dBm) | ERP(mW)       | Polarization (H/V) |
|---------|-----------------|-----------|-----------------------|----------|---------------|--------------------|
| 128     | 824.2           | -10.79    | 33.56                 | 20.62    | 115.32        | H                  |
| 189     | 836.4           | -10.12    | 33.63                 | 21.36    | <b>136.74</b> | H                  |
| 251     | 848.8           | -11.01    | 33.57                 | 20.41    | 109.85        | H                  |
| 128     | 824.2           | -17.96    | 34.24                 | 14.13    | 25.86         | V                  |
| 189     | 836.4           | -17.55    | 34.59                 | 14.89    | 30.80         | V                  |
| 251     | 848.8           | -17.08    | 34.62                 | 15.39    | 34.62         | V                  |

### WCDMA

| Channel | Frequency (MHz) | LVL (dBm) | Correction Factor(dB) | ERP(dBm) | ERP(mW)      | Polarization (H/V) |
|---------|-----------------|-----------|-----------------------|----------|--------------|--------------------|
| 4132    | 826.4           | -17.99    | 33.56                 | 13.42    | 21.97        | H                  |
| 4182    | 836.4           | -17.93    | 33.63                 | 13.55    | 22.64        | H                  |
| 4233    | 846.6           | -17.63    | 33.57                 | 13.79    | <b>23.92</b> | H                  |
| 4132    | 826.4           | -22.37    | 34.24                 | 9.72     | 9.37         | V                  |
| 4182    | 836.4           | -22.89    | 34.59                 | 9.55     | 9.01         | V                  |
| 4233    | 846.6           | -22.51    | 34.62                 | 9.96     | 9.92         | V                  |

## LTE BAND 5

### CHANNEL BANDWIDTH: 1.4MHz QPSK

| Channel | Frequency (MHz) | LVL (dBm) | Correction Factor(dB) | ERP(dBm) | ERP(mW)       | Polarization (H/V) | LIMIT (W) |
|---------|-----------------|-----------|-----------------------|----------|---------------|--------------------|-----------|
| 20407   | 824.7           | -16.85    | 33.67                 | 14.67    | 29.33         | H                  | 7         |
| 20525   | 836.5           | -16.02    | 33.62                 | 15.45    | 35.11         | H                  | 7         |
| 20643   | 848.3           | -15.63    | 33.65                 | 15.87    | 38.59         | H                  | 7         |
| 20407   | 824.7           | -10.23    | 34.25                 | 21.87    | 153.74        | V                  | 7         |
| 20525   | 836.5           | -9.69     | 34.60                 | 22.76    | 188.71        | V                  | 7         |
| 20643   | 848.3           | -8.99     | 34.63                 | 23.49    | <b>223.36</b> | V                  | 7         |

### CHANNEL BANDWIDTH: 1.4MHz 16QAM

| Channel | Frequency (MHz) | LVL (dBm) | Correction Factor(dB) | ERP(dBm) | ERP(mW) | Polarization (H/V) | LIMIT (W) |
|---------|-----------------|-----------|-----------------------|----------|---------|--------------------|-----------|
| 20407   | 824.7           | -17.68    | 33.67                 | 13.84    | 24.23   | H                  | 7         |
| 20525   | 836.5           | -17.04    | 33.62                 | 14.43    | 27.76   | H                  | 7         |
| 20643   | 848.3           | -16.73    | 33.65                 | 14.77    | 29.96   | H                  | 7         |
| 20407   | 824.7           | -11.06    | 34.25                 | 21.04    | 127.00  | V                  | 7         |
| 20525   | 836.5           | -10.71    | 34.60                 | 21.74    | 149.21  | V                  | 7         |
| 20643   | 848.3           | -10.09    | 34.63                 | 22.39    | 173.38  | V                  | 7         |

### CHANNEL BANDWIDTH: 3MHz QPSK

| Channel | Frequency (MHz) | LVL (dBm) | Correction Factor(dB) | ERP(dBm) | ERP(mW)       | Polarization (H/V) | LIMIT (W) |
|---------|-----------------|-----------|-----------------------|----------|---------------|--------------------|-----------|
| 20415   | 825.5           | -16.66    | 33.72                 | 14.91    | 30.98         | H                  | 7         |
| 20525   | 836.5           | -15.96    | 33.62                 | 15.51    | 35.60         | H                  | 7         |
| 20635   | 847.5           | -15.50    | 33.65                 | 16.00    | 39.80         | H                  | 7         |
| 20415   | 825.5           | -10.04    | 34.30                 | 22.11    | 162.59        | V                  | 7         |
| 20525   | 836.5           | -9.63     | 34.60                 | 22.82    | 191.34        | V                  | 7         |
| 20635   | 847.5           | -8.86     | 34.57                 | 23.56    | <b>227.04</b> | V                  | 7         |

### CHANNEL BANDWIDTH: 3MHz 16QAM

| Channel | Frequency (MHz) | LVL (dBm) | Correction Factor(dB) | ERP(dBm) | ERP(mW) | Polarization (H/V) | LIMIT (W) |
|---------|-----------------|-----------|-----------------------|----------|---------|--------------------|-----------|
| 20415   | 825.5           | -17.81    | 33.72                 | 13.76    | 23.77   | H                  | 7         |
| 20525   | 836.5           | -17.06    | 33.62                 | 14.41    | 27.63   | H                  | 7         |
| 20635   | 847.5           | -16.66    | 33.65                 | 14.84    | 30.47   | H                  | 7         |
| 20415   | 825.5           | -11.19    | 34.30                 | 20.96    | 124.77  | V                  | 7         |
| 20525   | 836.5           | -10.73    | 34.60                 | 21.72    | 148.53  | V                  | 7         |
| 20635   | 847.5           | -10.02    | 34.57                 | 22.40    | 173.82  | V                  | 7         |

### CHANNEL BANDWIDTH: 5MHz QPSK

| Channel | Frequency (MHz) | LVL (dBm) | Correction Factor(dB) | ERP(dBm) | ERP(mW)       | Polarization (H/V) | LIMIT (W) |
|---------|-----------------|-----------|-----------------------|----------|---------------|--------------------|-----------|
| 20425   | 826.5           | -16.67    | 33.69                 | 14.87    | 30.72         | H                  | 7         |
| 20525   | 836.5           | -16.03    | 33.62                 | 15.44    | 35.03         | H                  | 7         |
| 20625   | 846.5           | -15.57    | 33.66                 | 15.94    | 39.27         | H                  | 7         |
| 20425   | 826.5           | -10.05    | 34.85                 | 22.65    | 184.03        | V                  | 7         |
| 20525   | 836.5           | -9.70     | 34.60                 | 22.75    | 188.28        | V                  | 7         |
| 20625   | 846.5           | -8.93     | 34.59                 | 23.51    | <b>224.59</b> | V                  | 7         |

### CHANNEL BANDWIDTH: 5MHz 16QAM

| Channel | Frequency (MHz) | LVL (dBm) | Correction Factor(dB) | ERP(dBm) | ERP(mW) | Polarization (H/V) | LIMIT (W) |
|---------|-----------------|-----------|-----------------------|----------|---------|--------------------|-----------|
| 20425   | 826.5           | -17.53    | 33.69                 | 14.01    | 25.20   | H                  | 7         |
| 20525   | 836.5           | -16.90    | 33.62                 | 14.57    | 28.67   | H                  | 7         |
| 20625   | 846.5           | -16.42    | 33.66                 | 15.09    | 32.29   | H                  | 7         |
| 20425   | 826.5           | -10.91    | 34.85                 | 21.79    | 150.97  | V                  | 7         |
| 20525   | 836.5           | -10.57    | 34.60                 | 21.88    | 154.10  | V                  | 7         |
| 20625   | 846.5           | -9.78     | 34.59                 | 22.66    | 184.67  | V                  | 7         |

### CHANNEL BANDWIDTH: 10MHz QPSK

| Channel | Frequency (MHz) | LVL (dBm) | Correction Factor(dB) | ERP(dBm) | ERP(mW)       | Polarization (H/V) | LIMIT (W) |
|---------|-----------------|-----------|-----------------------|----------|---------------|--------------------|-----------|
| 20450   | 829             | -17.25    | 33.73                 | 14.33    | 27.07         | H                  | 7         |
| 20525   | 836.5           | -16.48    | 33.62                 | 14.99    | 31.58         | H                  | 7         |
| 20600   | 844             | -16.15    | 33.51                 | 15.21    | 33.21         | H                  | 7         |
| 20450   | 829             | -10.63    | 34.54                 | 21.76    | 149.83        | V                  | 7         |
| 20525   | 836.5           | -10.15    | 34.60                 | 22.30    | 169.75        | V                  | 7         |
| 20600   | 844             | -9.51     | 34.46                 | 22.80    | <b>190.33</b> | V                  | 7         |

### CHANNEL BANDWIDTH: 10MHz 16QAM

| Channel | Frequency (MHz) | LVL (dBm) | Correction Factor(dB) | ERP(dBm) | ERP(mW) | Polarization (H/V) | LIMIT (W) |
|---------|-----------------|-----------|-----------------------|----------|---------|--------------------|-----------|
| 20450   | 829             | -18.18    | 33.73                 | 13.40    | 21.85   | H                  | 7         |
| 20525   | 836.5           | -17.55    | 33.62                 | 13.92    | 24.68   | H                  | 7         |
| 20600   | 844             | -16.98    | 33.51                 | 14.38    | 27.43   | H                  | 7         |
| 20450   | 829             | -11.56    | 34.54                 | 20.83    | 120.95  | V                  | 7         |
| 20525   | 836.5           | -11.22    | 34.60                 | 21.23    | 132.68  | V                  | 7         |
| 20600   | 844             | -10.34    | 34.46                 | 21.97    | 157.22  | V                  | 7         |

**REMARKS:** 1. ERP Output Power (dBm) = SPA Reading (dBm) + Correction Factor (dB).  
2. Correction factor (dB) = Free Space Loss + Antenna Factor + Cable Loss.

## 4.2 Frequency Stability Measurement

### 4.2.1 Limits of Frequency Stability Measurement


1.5 ppm is for base and fixed station. 2.5 ppm is for mobile station.

### 4.2.2 Test Procedure

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the  $\pm 0.5^{\circ}\text{C}$  during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

**NOTE:** The frequency error was recorded frequency error from the communication simulator.

### 4.2.3 Test Setup

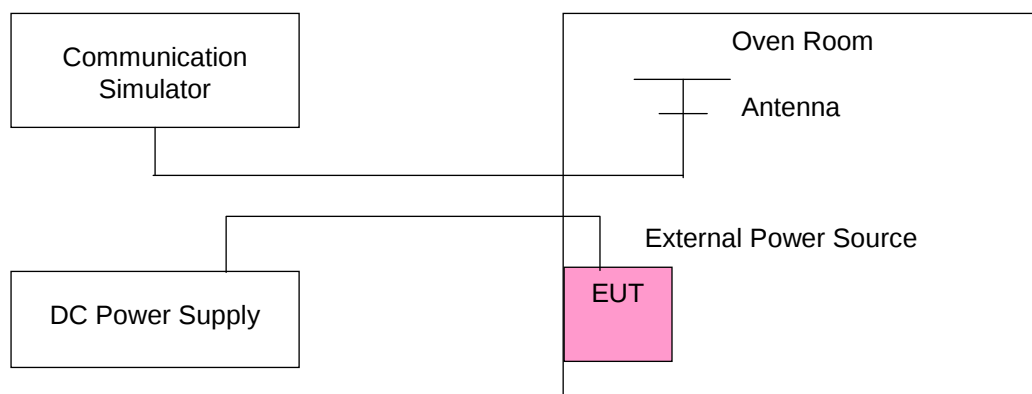

#### 4.2.4 Test Results

##### FREQUENCY ERROR VS. VOLTAGE

| Voltage<br>(Volts) | Frequency Error (ppm) |        |        |            |        |        |        | Limit<br>(ppm) |
|--------------------|-----------------------|--------|--------|------------|--------|--------|--------|----------------|
|                    | GSM                   | EDGE   | WCDMA  | LTE Band 5 |        |        |        |                |
|                    |                       |        |        | 1.4 MHz    | 3 MHz  | 5 MHz  | 10MHz  |                |
| 3.8                | 0.0038                | 0.0030 | 0.0031 | 0.0027     | 0.0025 | 0.0015 | 0.0039 | 2.5            |
| 3.55               | 0.0023                | 0.0025 | 0.0023 | 0.0039     | 0.0034 | 0.0039 | 0.0026 | 2.5            |
| 4.3                | 0.0027                | 0.0017 | 0.0028 | 0.0034     | 0.0037 | 0.0035 | 0.0048 | 2.5            |

**NOTE:** The applicant defined the normal working voltage of the battery is from 3.55Vdc to 4.3Vdc.

##### FREQUENCY ERROR vs. TEMPERATURE.


| TEMP. (°C) | Frequency Error (ppm) |        |        |            |        |        |        | Limit (ppm) |
|------------|-----------------------|--------|--------|------------|--------|--------|--------|-------------|
|            | GSM                   | EDGE   | WCDMA  | LTE Band 5 |        |        |        |             |
|            |                       |        |        | 1.4 MHz    | 3 MHz  | 5 MHz  | 10MHz  |             |
| -30        | 0.0113                | 0.0090 | 0.0097 | 0.0105     | 0.0113 | 0.0109 | 0.0103 | 2.5         |
| -20        | 0.0098                | 0.0101 | 0.0086 | 0.0086     | 0.0100 | 0.0099 | 0.0085 | 2.5         |
| -10        | 0.0077                | 0.0082 | 0.0078 | 0.0078     | 0.0093 | 0.0084 | 0.0069 | 2.5         |
| 0          | 0.0086                | 0.0087 | 0.0070 | 0.0066     | 0.0078 | 0.0078 | 0.0050 | 2.5         |
| 10         | 0.0075                | 0.0108 | 0.0059 | 0.0052     | 0.0065 | 0.0064 | 0.0060 | 2.5         |
| 20         | 0.0048                | 0.0050 | 0.0077 | 0.0046     | 0.0054 | 0.0052 | 0.0038 | 2.5         |
| 30         | 0.0035                | 0.0040 | 0.0056 | 0.0032     | 0.0038 | 0.0038 | 0.0025 | 2.5         |
| 40         | 0.0054                | 0.0058 | 0.0060 | 0.0028     | 0.0029 | 0.0036 | 0.0022 | 2.5         |
| 50         | 0.0072                | 0.0060 | 0.0073 | 0.0013     | 0.0019 | 0.0021 | 0.0008 | 2.5         |
| 60         | 0.0059                | 0.0032 | 0.0040 | 0.0004     | 0.0008 | 0.0008 | 0.0001 | 2.5         |

### 4.3 Occupied Bandwidth Measurement

#### 4.3.1 Test Procedure


The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

#### 4.3.2 Test Setup

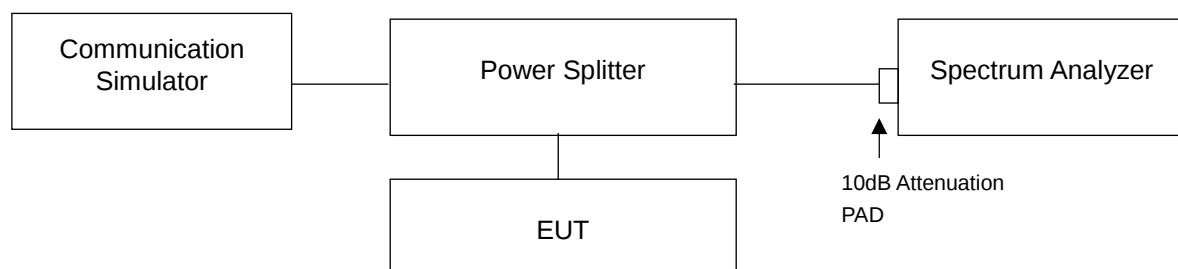

### 4.3.3 Test Result


| Channel | Frequency (MHz) | 99% Occupied Bandwidth (kHz) |        | Channel | FREQ. (MHz) | 99% Occupied Bandwidth (MHz) |
|---------|-----------------|------------------------------|--------|---------|-------------|------------------------------|
|         |                 | GSM                          | EDGE   |         |             | WCDMA                        |
| 128     | 824.2           | 246.00                       | 243.00 | 4132    | 826.4       | 4.14                         |
| 190     | 836.6           | 247.00                       | 241.00 | 4182    | 836.6       | 4.14                         |
| 251     | 848.8           | 247.00                       | 242.00 | 4233    | 846.6       | 4.15                         |

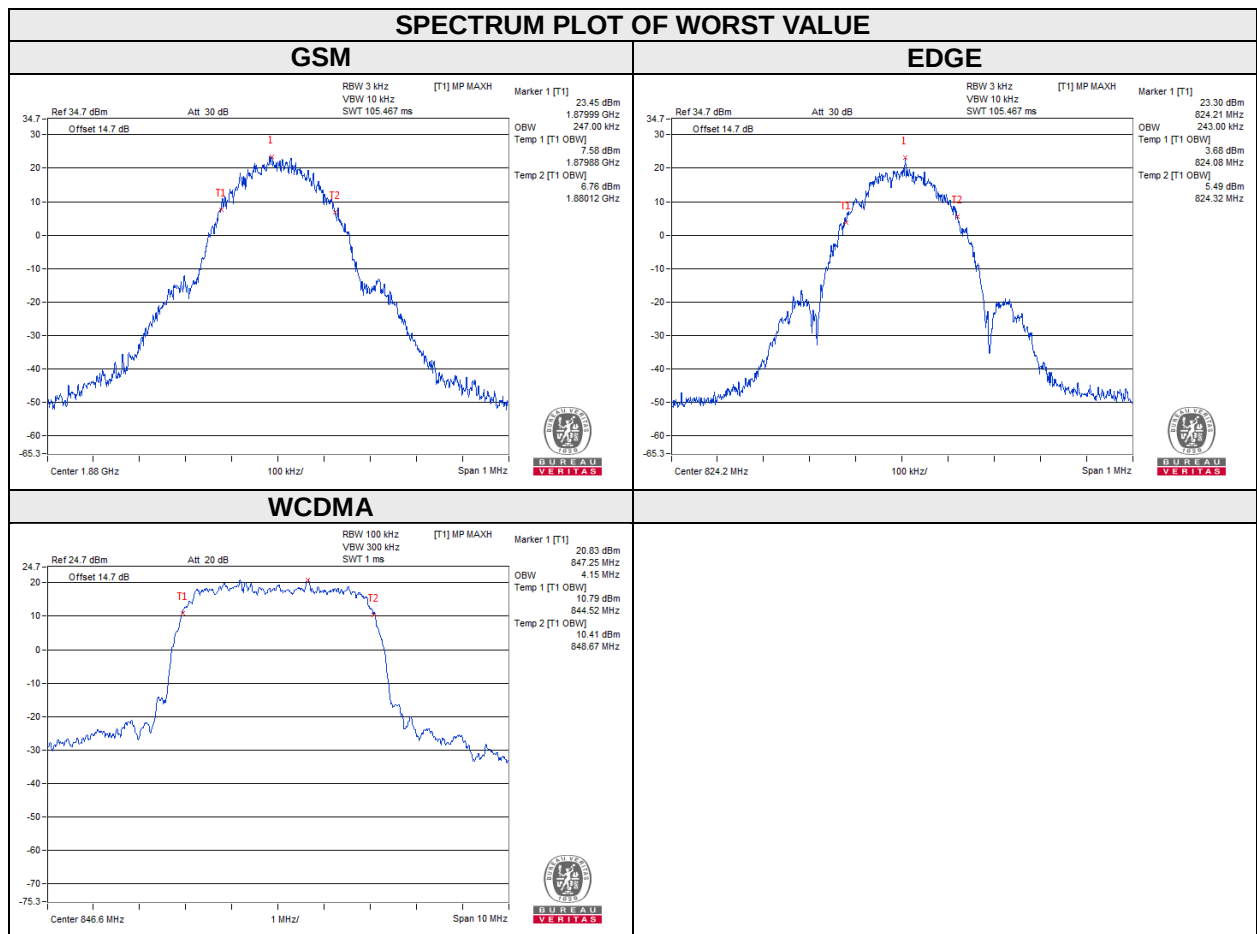


| CHANNEL | Frequency (MHz) | 26dB Bandwidth (kHz) |        | CHANNEL | Frequency (MHz) | 26dB Bandwidth (MHz) |
|---------|-----------------|----------------------|--------|---------|-----------------|----------------------|
|         |                 | GSM                  | EDGE   |         |                 | WCDMA                |
| 128     | 824.2           | 320.50               | 318.54 | 4132    | 826.4           | 4.75                 |
| 190     | 836.6           | 316.48               | 309.19 | 4182    | 836.4           | 4.72                 |
| 251     | 848.8           | 315.97               | 312.95 | 4233    | 846.6           | 4.73                 |

# SPECTRUM PLOT OF WORST VALUE


## GSM

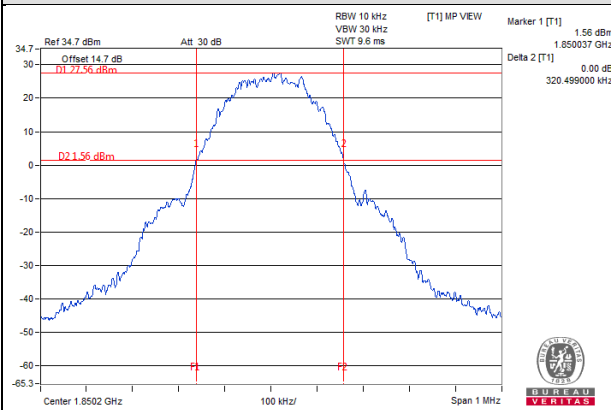

## EDGE

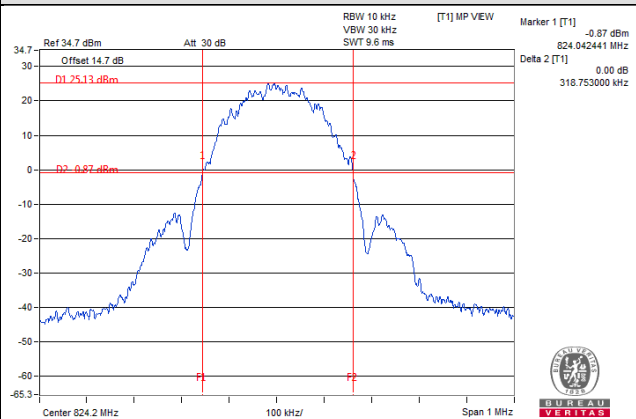

## WCDMA

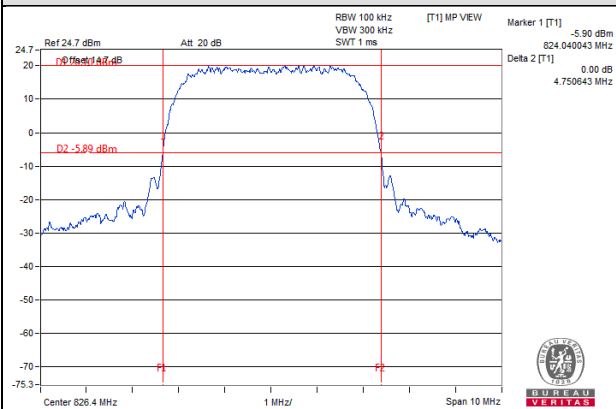

# LTE band 5

## Channel Bandwidth : 1.4MHz

| Channel | Frequency (MHz) | 99% Occupied bandwidth (MHz) |       | Channel | Frequency (MHz) | 26 dB bandwidth (MHz) |       |
|---------|-----------------|------------------------------|-------|---------|-----------------|-----------------------|-------|
|         |                 | QPSK                         | 16QAM |         |                 | QPSK                  | 16QAM |
| 20407   | 824.7           | 1.09                         | 1.09  | 20407   | 824.7           | 1.26                  | 1.27  |
| 20525   | 836.5           | 1.09                         | 1.08  | 20525   | 836.5           | 1.26                  | 1.26  |
| 20643   | 848.3           | 1.08                         | 1.09  | 20643   | 848.3           | 1.25                  | 1.28  |

## SPECTRUM PLOT OF WORST VALUE of 99% Occupied Bandwidth

### 1.4MHz/QPSK




### 1.4MHz/16QAM




## SPECTRUM PLOT OF WORST VALUE of 26dB Occupied Bandwidth

### 1.4MHz/QPSK

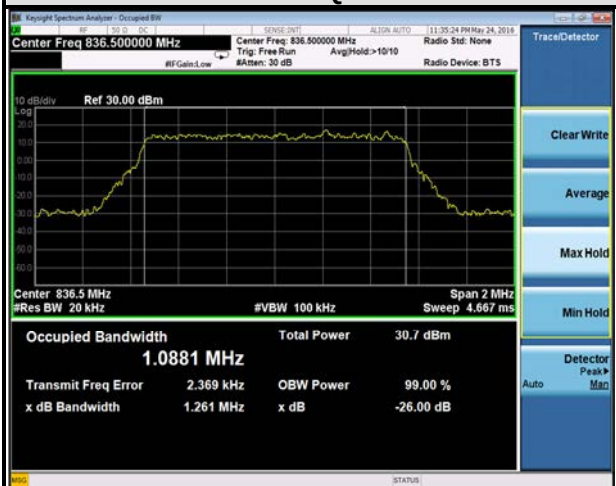

### 1.4MHz/16QAM

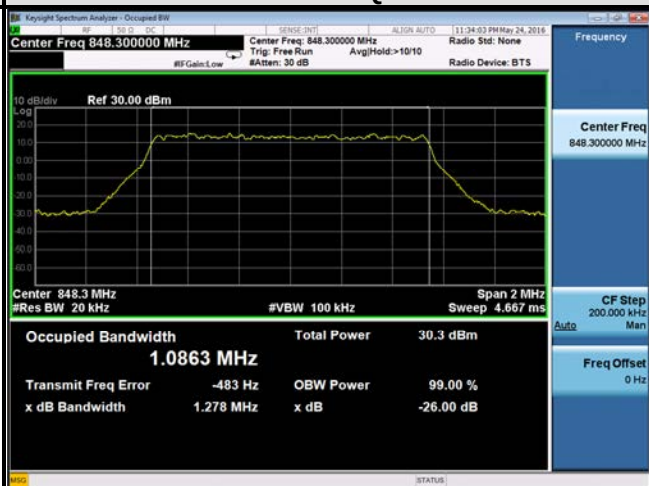


# LTE band 5

## Channel Bandwidth : 3MHz


| Channel | Frequency (MHz) | 99% Occupied bandwidth (MHz) |       | Channel | Frequency (MHz) | 26 dB bandwidth (MHz) |       |
|---------|-----------------|------------------------------|-------|---------|-----------------|-----------------------|-------|
|         |                 | QPSK                         | 16QAM |         |                 | QPSK                  | 16QAM |
| 20415   | 825.5           | 2.69                         | 2.68  | 20415   | 825.5           | 2.92                  | 2.91  |
| 20525   | 836.5           | 2.69                         | 2.69  | 20525   | 836.5           | 2.92                  | 2.93  |
| 20635   | 847.5           | 2.69                         | 2.69  | 20635   | 847.5           | 2.92                  | 2.92  |

## SPECTRUM PLOT OF WORST VALUE of 99% Occupied Bandwidth

### 3MHz/QPSK

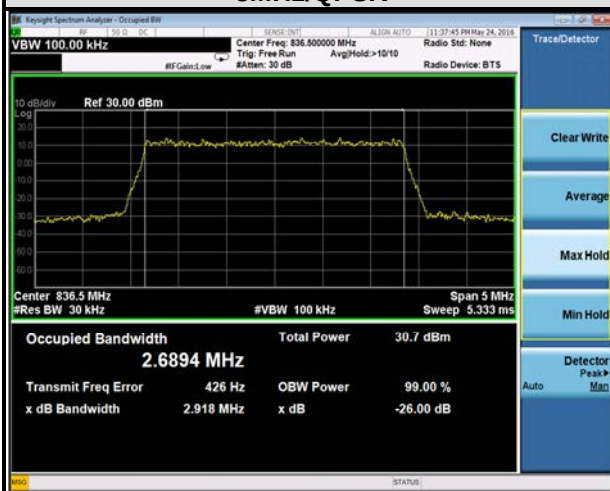


### 3MHz/16QAM

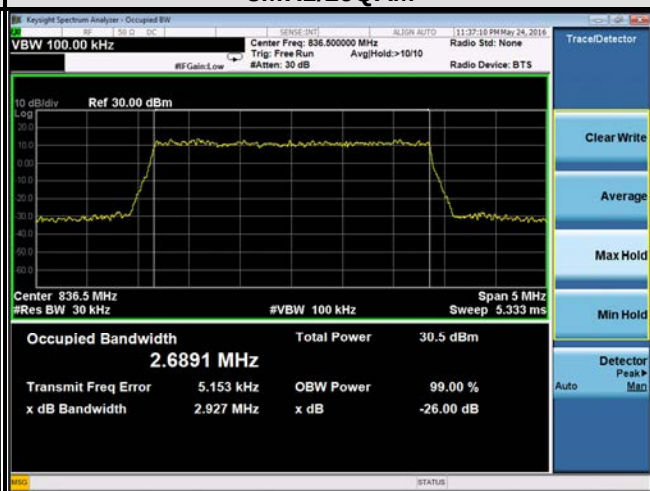


## SPECTRUM PLOT OF WORST VALUE of 26dB Occupied Bandwidth

### 3MHz/QPSK

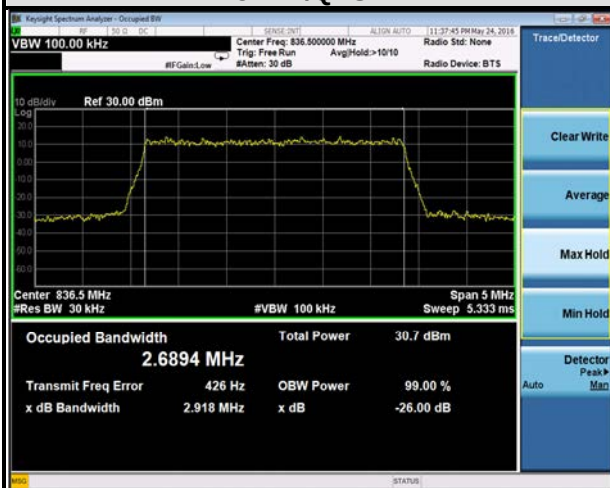

### 3MHz/16QAM

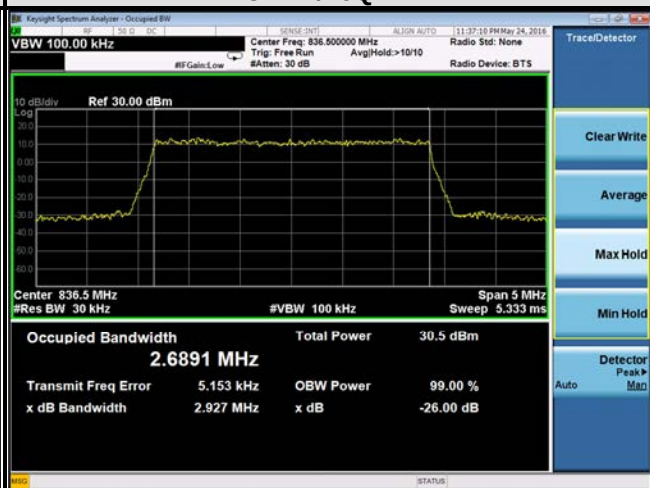


# LTE band 5


## Channel Bandwidth : 5 MHz

| Channel | Frequency (MHz) | 99% Occupied bandwidth (MHz) |       | Channel | Frequency (MHz) | 26 dB bandwidth (MHz) |       |
|---------|-----------------|------------------------------|-------|---------|-----------------|-----------------------|-------|
|         |                 | QPSK                         | 16QAM |         |                 | QPSK                  | 16QAM |
| 20425   | 826.5           | 4.47                         | 4.48  | 20425   | 826.5           | 4.89                  | 4.88  |
| 20525   | 836.5           | 4.48                         | 4.48  | 20525   | 836.5           | 4.88                  | 4.88  |
| 20625   | 846.5           | 4.47                         | 4.48  | 20625   | 846.5           | 4.94                  | 4.88  |

## SPECTRUM PLOT OF WORST VALUE of 99% Occupied Bandwidth

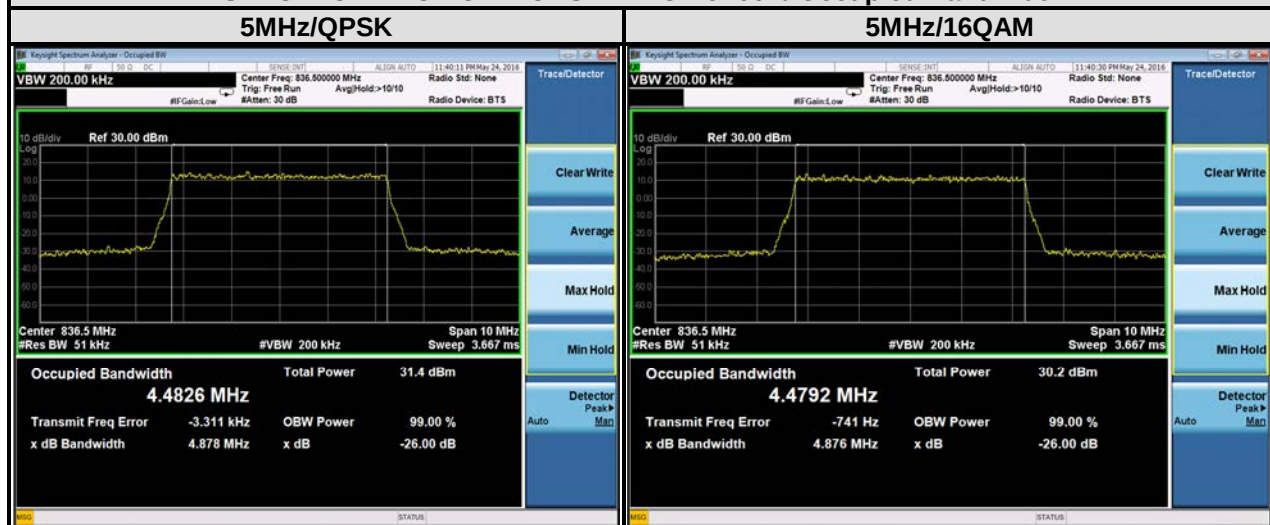

## SPECTRUM PLOT OF WORST VALUE of 26dB Occupied Bandwidth

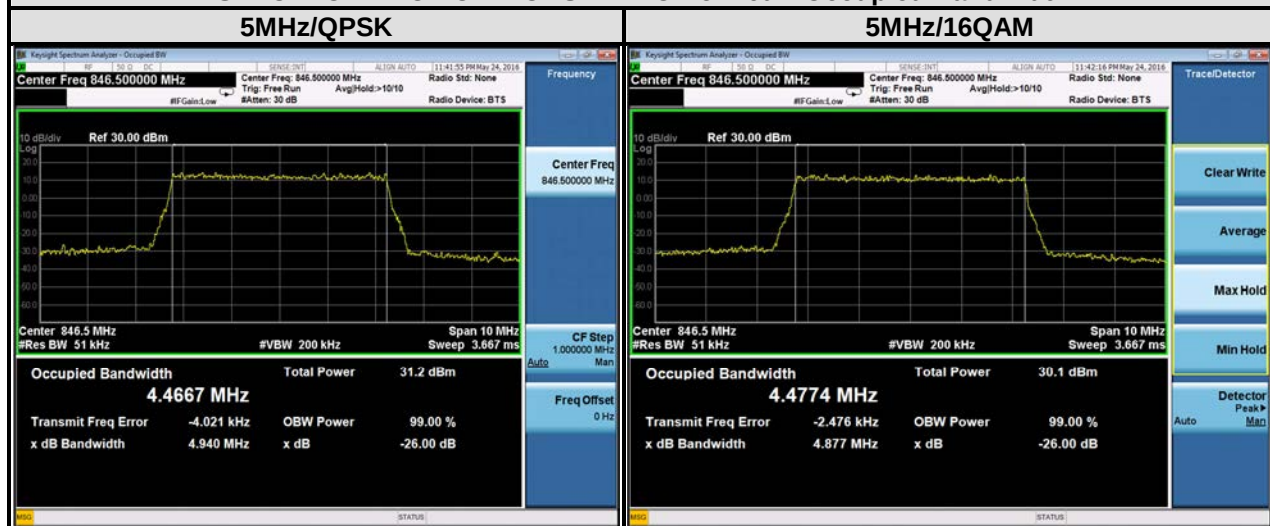


# LTE band 5

## Channel Bandwidth : 10 MHz


| Channel | Frequency (MHz) | 99% Occupied bandwidth (MHz) |       | Channel | Frequency (MHz) | 26 dB bandwidth (MHz) |       |
|---------|-----------------|------------------------------|-------|---------|-----------------|-----------------------|-------|
|         |                 | QPSK                         | 16QAM |         |                 | QPSK                  | 16QAM |
| 20450   | 829             | 8.91                         | 8.93  | 20450   | 829             | 9.70                  | 9.67  |
| 20525   | 836.5           | 8.96                         | 8.92  | 20525   | 836.5           | 9.76                  | 9.68  |
| 20600   | 844             | 8.92                         | 8.94  | 20600   | 844             | 9.63                  | 9.67  |

## SPECTRUM PLOT OF WORST VALUE of 99% Occupied Bandwidth

### 10MHz/QPSK

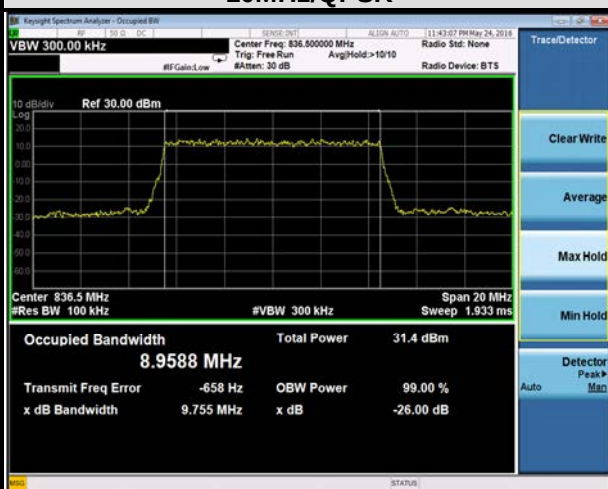


### 10MHz/16QAM

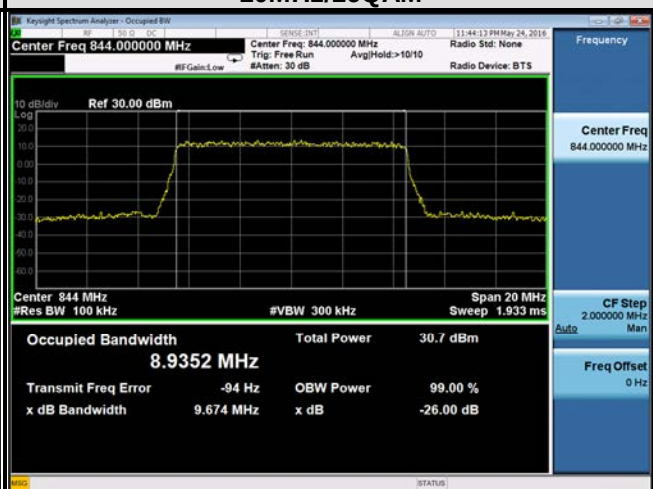


## SPECTRUM PLOT OF WORST VALUE of 26dB Occupied Bandwidth

### 10MHz/QPSK

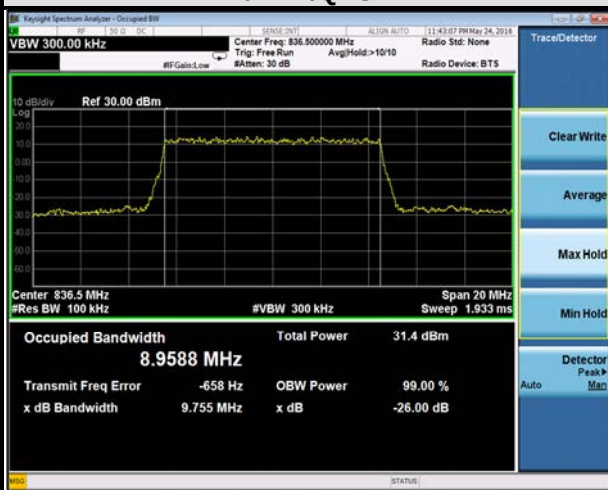

### 10MHz/16QAM

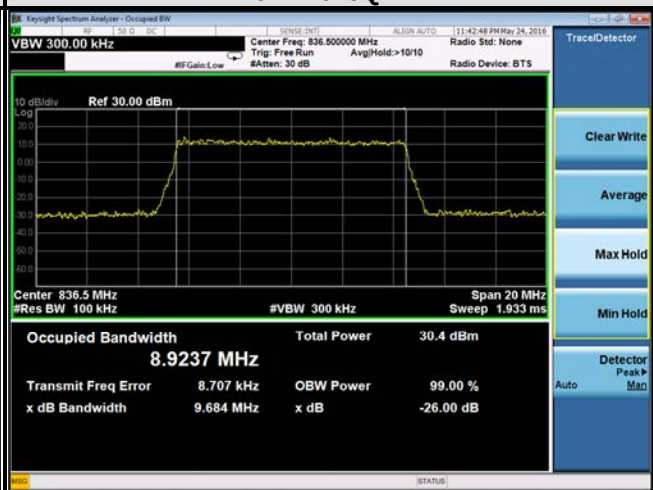


## 4.4 Band Edge Measurement

### 4.4.1 Limits of Band Edge Measurement

Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.


### 4.4.2 Test Setup

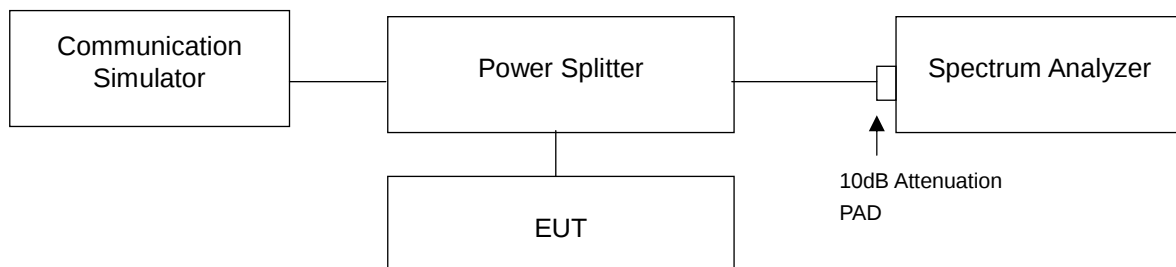

### 4.4.3 Test Procedures

- All measurements were done at low and high operational frequency range.
- The center frequency of spectrum is the band edge frequency and span is 1.5MHz. RB of the spectrum is 3kHz and VB of the spectrum is 10kHz (GSM/EDGE).
- The center frequency of spectrum is the band edge frequency and span is 10MHz. RB of the spectrum is 100kHz and VB of the spectrum is 300kHz (WCDMA).
- The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RB of the spectrum is 20kHz and VB of the spectrum is 100 kHz. (LTE bandwidth 1.4MHz).
- The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RB of the spectrum is 30kHz and VB of the spectrum is 100kHz. (LTE bandwidth 3MHz)
- The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RB of the spectrum is 50kHz and VB of the spectrum is 200kHz. (LTE bandwidth 5MHz)
- The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RB of the spectrum is 100kHz and VB of the spectrum is 300kHz. (LTE bandwidth 10MHz)
- Record the max trace plot into the test report.

#### 4.4.4 Test Results

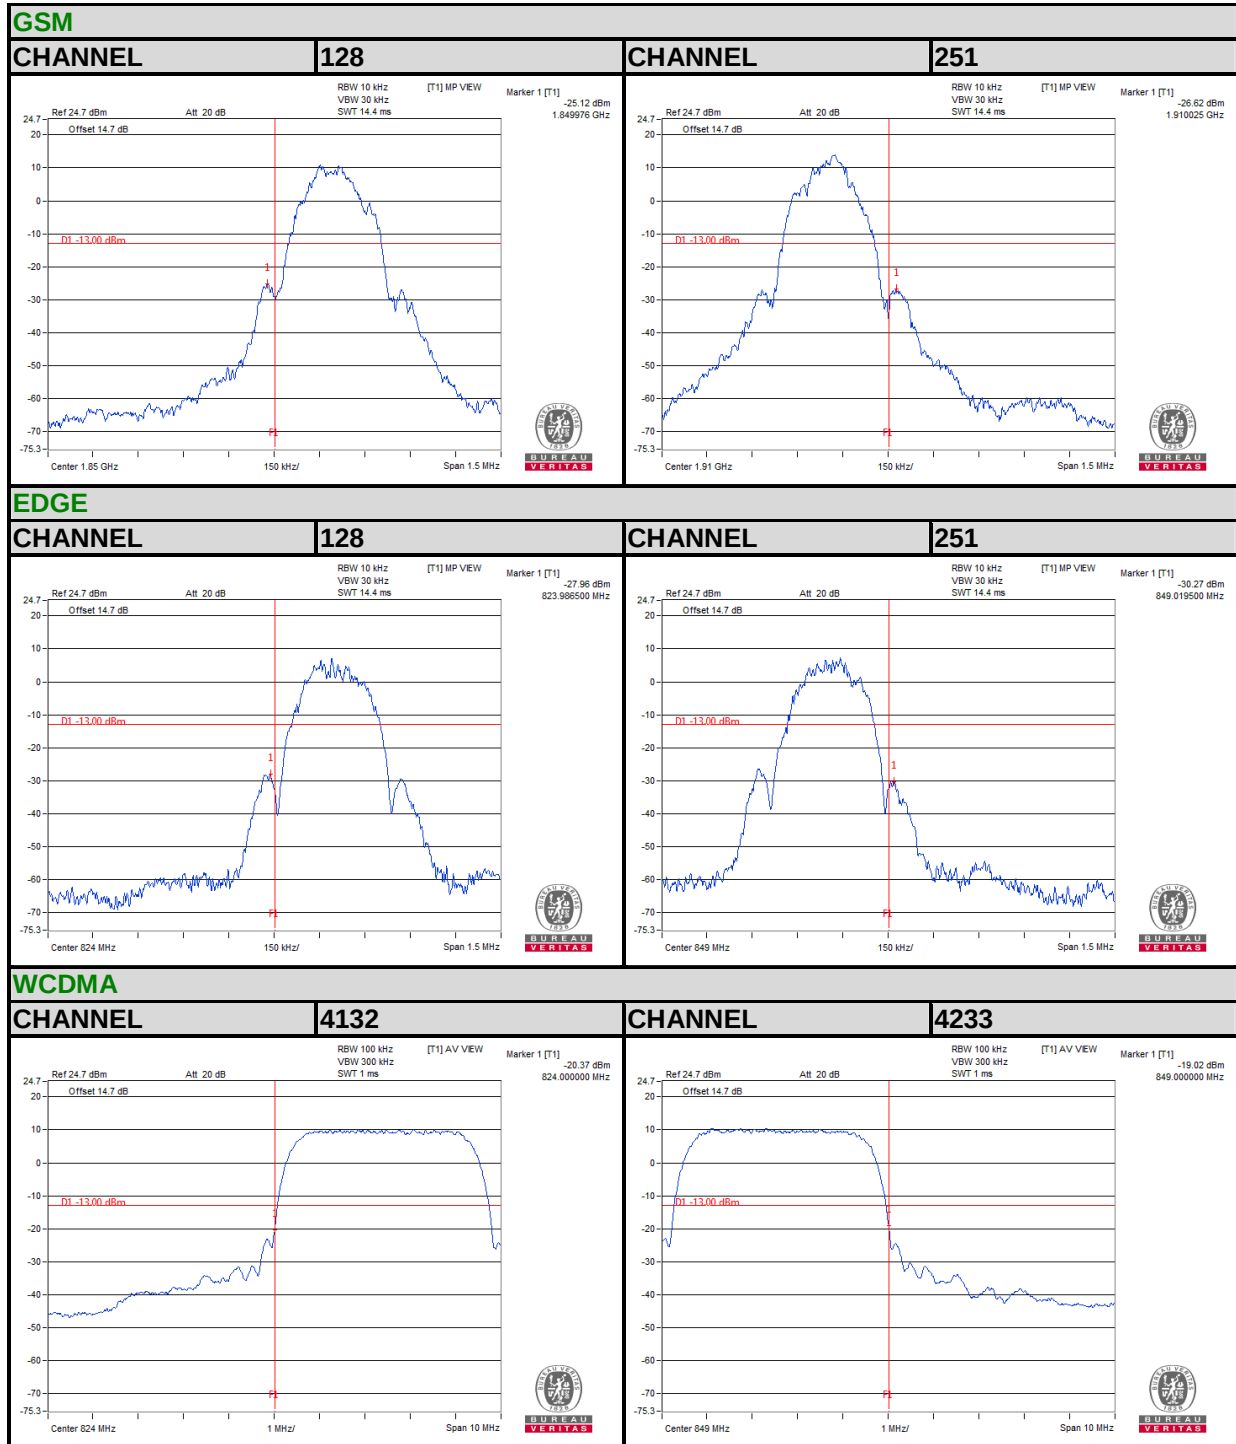


## LTE Band5

Channel Bandwidth: 1.4MHz



## LTE Band5

Channel Bandwidth: 1.4MHz

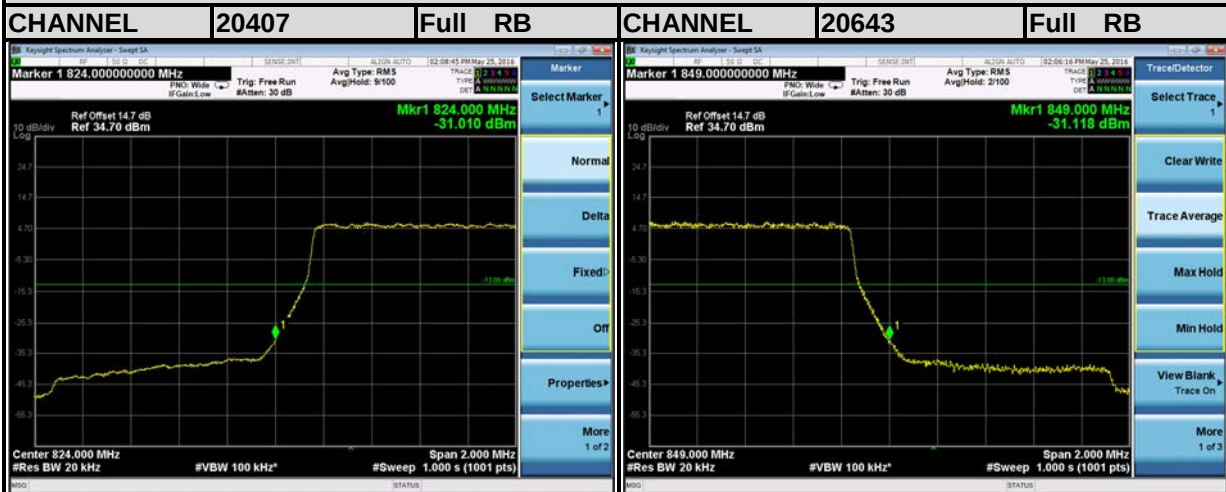


## LTE Band5

### Channel Bandwidth: 3MHz



## LTE Band5

### Channel Bandwidth: 3MHz

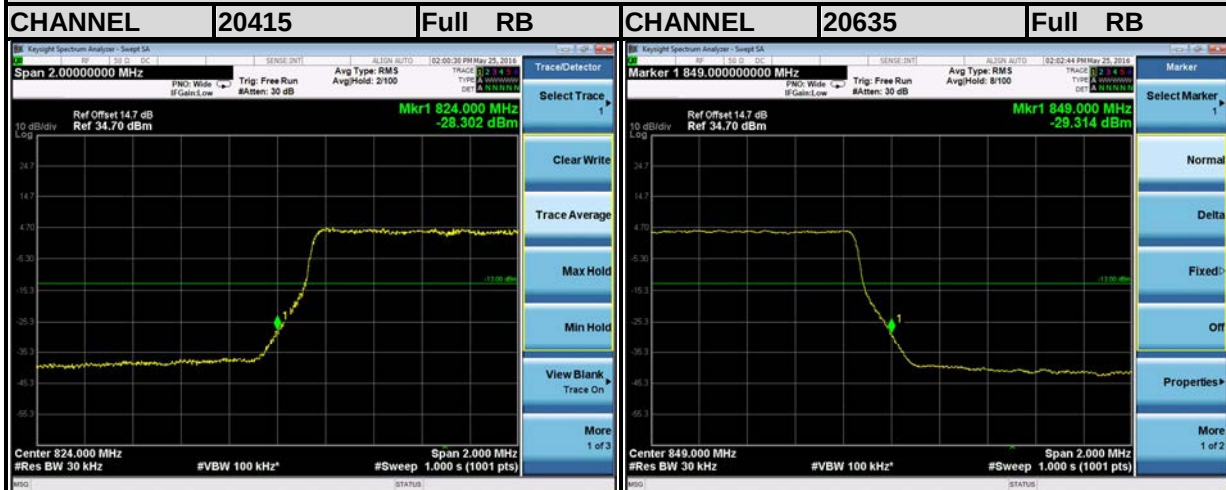


## LTE Band5

### Channel Bandwidth: 5MHz




## LTE Band5

### Channel Bandwidth: 5MHz

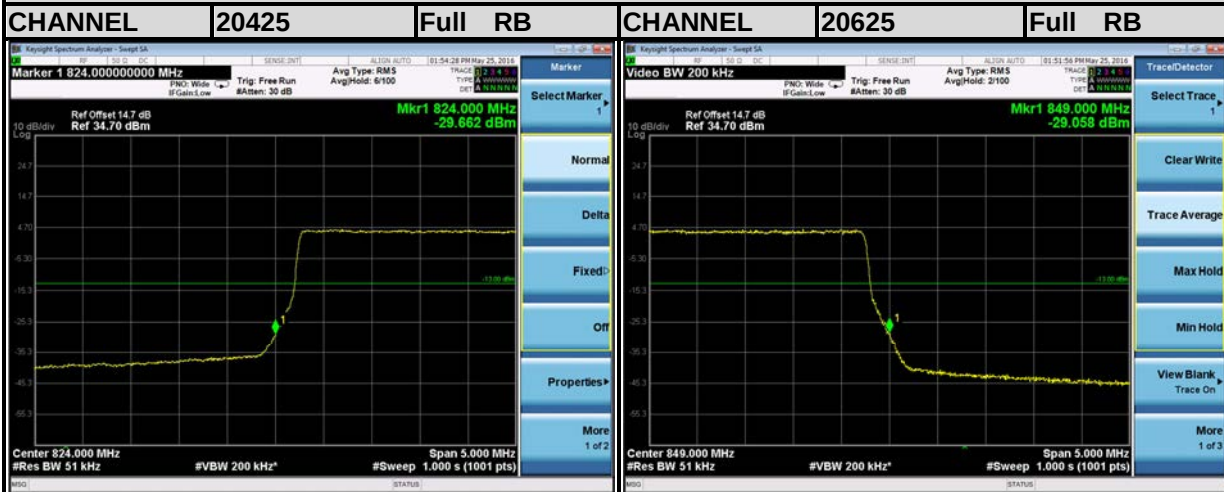


## LTE Band5

Channel Bandwidth: 10MHz

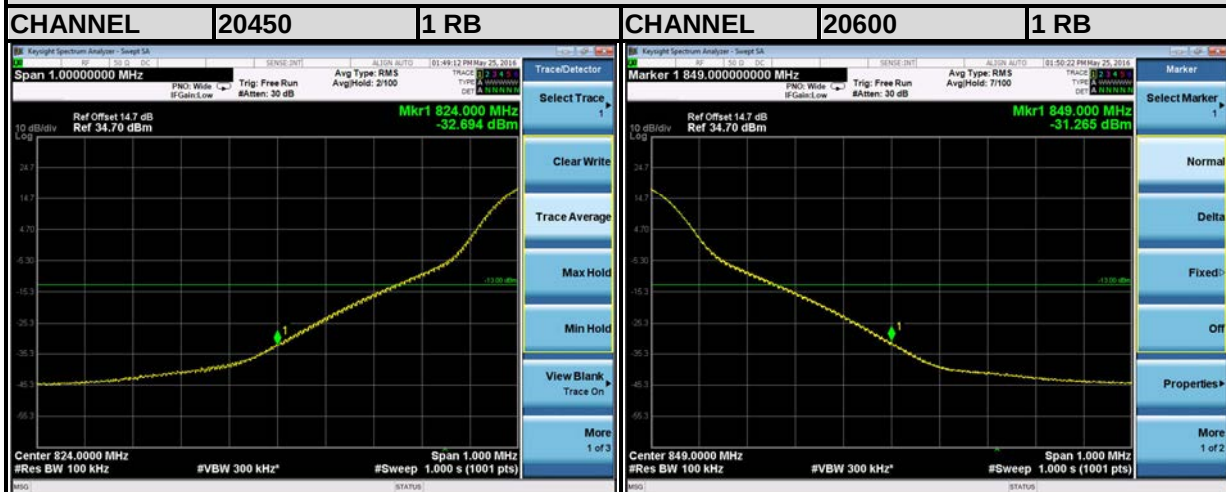

## LTE Band5

Channel Bandwidth: 10MHz

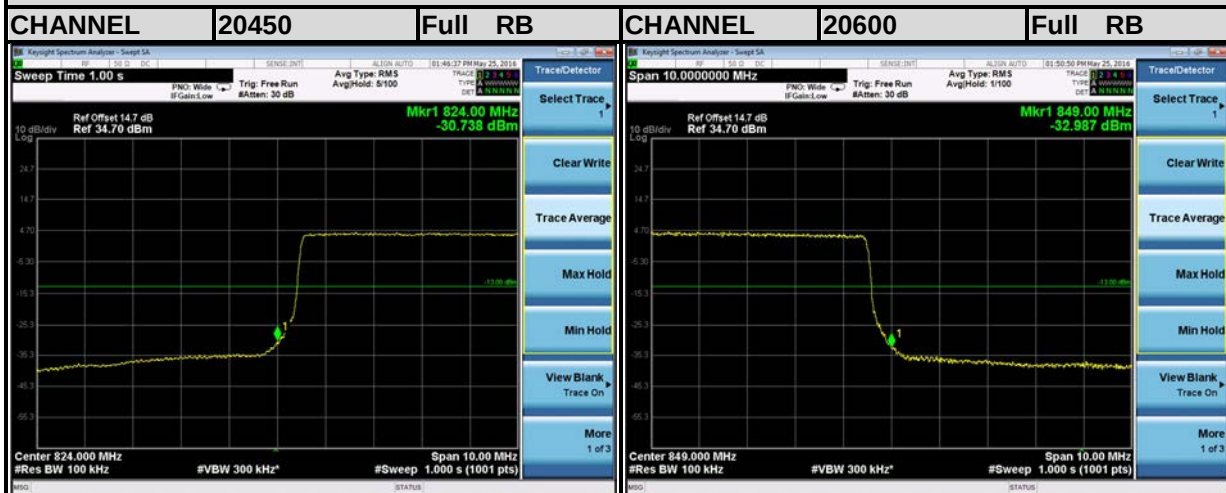


## 4.5 Peak To Average Ratio

### 4.5.1 Limits of Peak To Average Ratio Measurement

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB

### 4.5.2 Test Setup

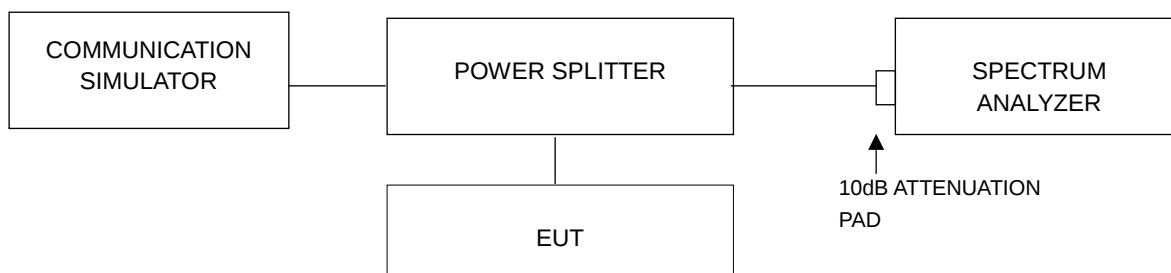


### 4.5.3 Test Procedures

1. Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.

#### 4.5.4 Test Results


| Channel | Frequency (MHz) | Peak To Average Ratio (dB) |      | Channel | Frequency (MHz) | Peak To Average Ratio (dB) |
|---------|-----------------|----------------------------|------|---------|-----------------|----------------------------|
|         |                 | GSM                        | EDGE |         |                 | WCDMA                      |
| 189     | 836.4           | 9.52                       | 9.64 | 4182    | 836.4           | 3.30                       |

#### SPECTRUM PLOT OF WORST VALUE

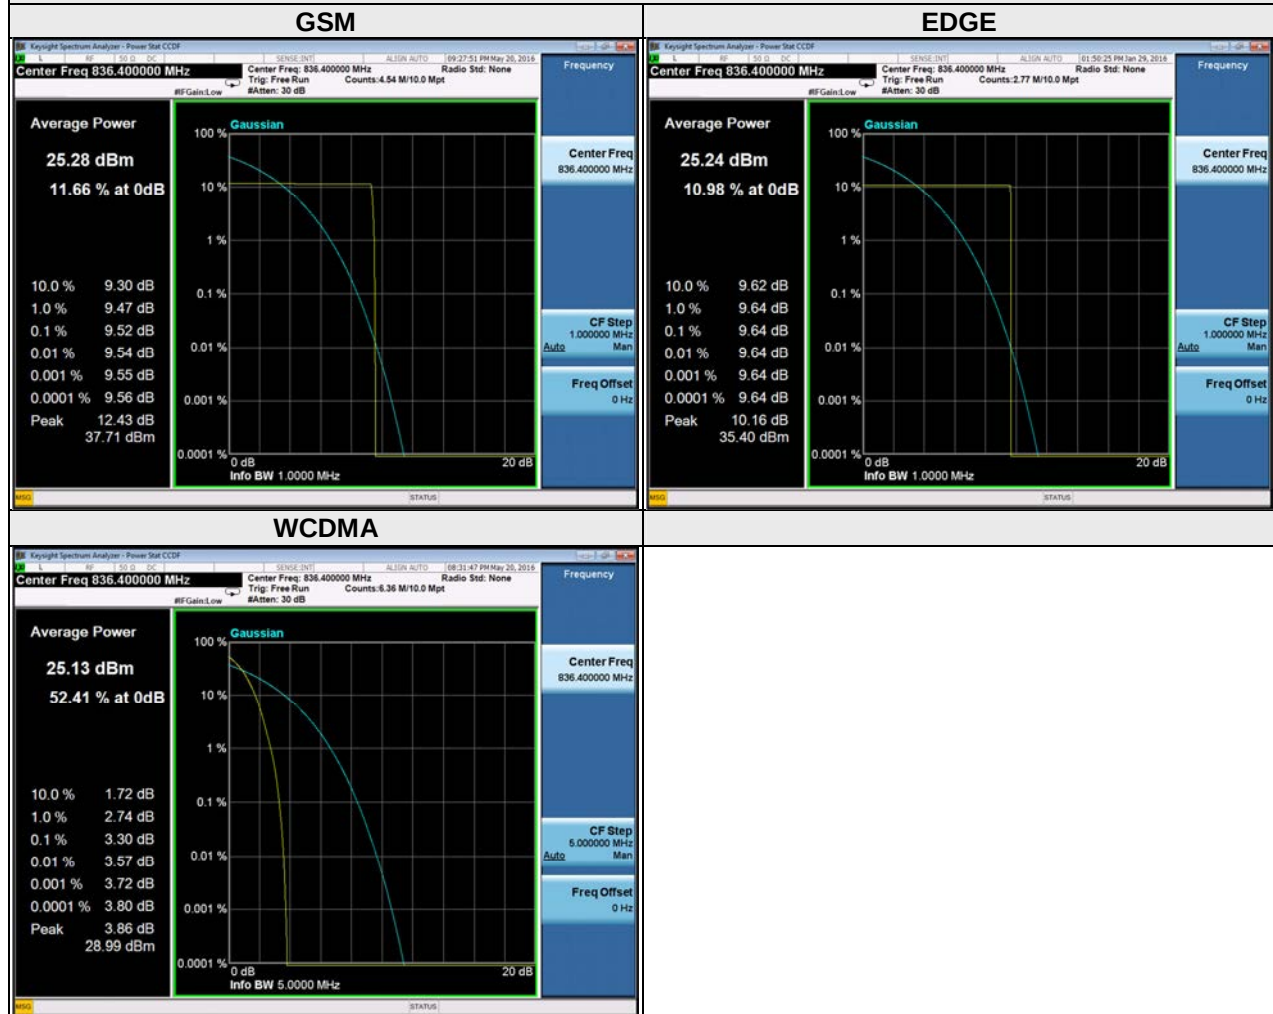


# LTE BAND 5

| CHANNEL BANDWIDTH: 1.4MHz |                 |                            |       | CHANNEL BANDWIDTH: 3MHz |                 |                            |       |
|---------------------------|-----------------|----------------------------|-------|-------------------------|-----------------|----------------------------|-------|
| CHANNEL                   | FREQUENCY (MHz) | PEAK TO AVERAGE RATIO (dB) |       | CHANNEL                 | FREQUENCY (MHz) | PEAK TO AVERAGE RATIO (dB) |       |
|                           |                 | QPSK                       | 16QAM |                         |                 | QPSK                       | 16QAM |
| 20407                     | 824.7           | 5.27                       | 6.10  | 20415                   | 825.5           | 5.35                       | 6.13  |
| 20525                     | 836.5           | 5.56                       | 6.37  | 20525                   | 836.5           | 5.68                       | 6.45  |
| 20643                     | 848.3           | 5.26                       | 6.11  | 20635                   | 847.5           | 5.34                       | 6.12  |

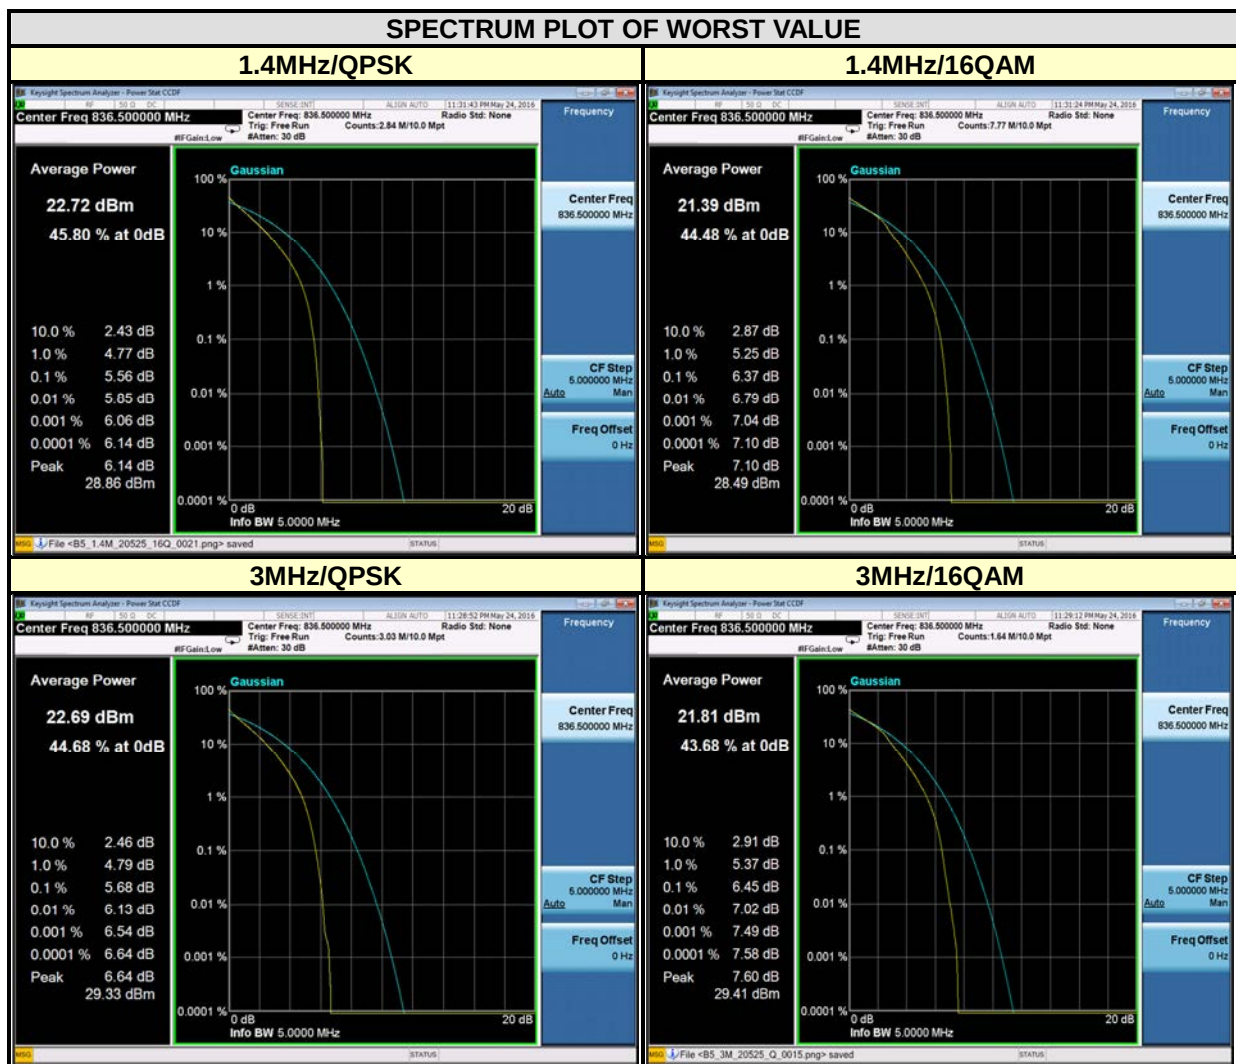

| CHANNEL BANDWIDTH: 5MHz |                 |                            |       | CHANNEL BANDWIDTH: 10MHz |                 |                            |       |
|-------------------------|-----------------|----------------------------|-------|--------------------------|-----------------|----------------------------|-------|
| CHANNEL                 | FREQUENCY (MHz) | PEAK TO AVERAGE RATIO (dB) |       | CHANNEL                  | FREQUENCY (MHz) | PEAK TO AVERAGE RATIO (dB) |       |
|                         |                 | QPSK                       | 16QAM |                          |                 | QPSK                       | 16QAM |
| 20425                   | 826.5           | 5.33                       | 6.08  | 20450                    | 829             | 5.43                       | 6.15  |
| 20525                   | 836.5           | 5.56                       | 6.33  | 20525                    | 836.5           | 5.70                       | 6.40  |
| 20625                   | 846.5           | 5.35                       | 6.12  | 20600                    | 844             | 5.47                       | 6.25  |

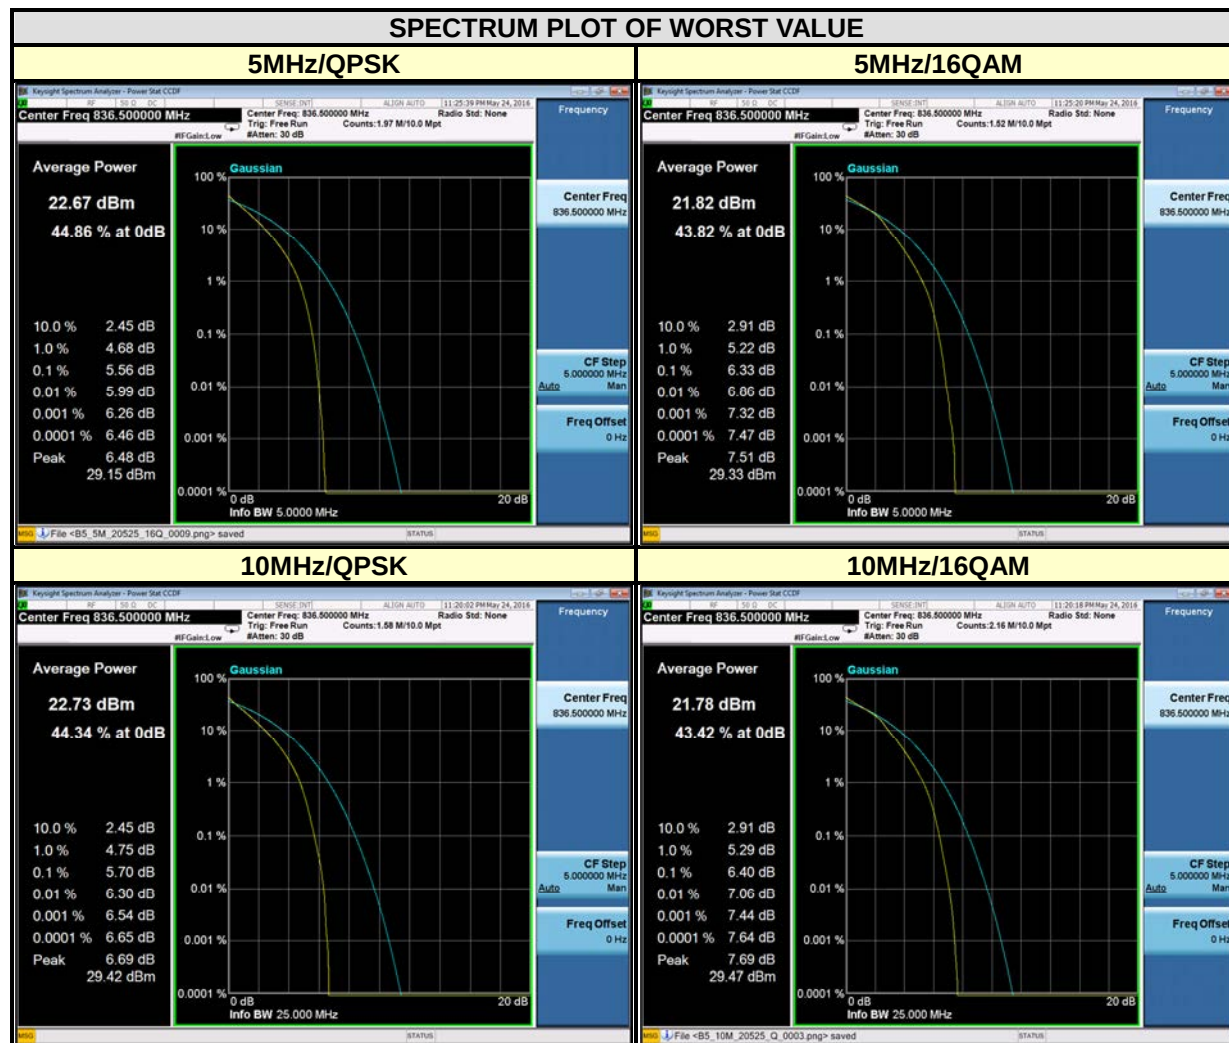


## 4.6 Conducted Spurious Emissions

### 4.6.1 Limits of Conducted Spurious Emissions Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. The emission limit equal to  $-13\text{dBm}$ .

### 4.6.2 Test Setup

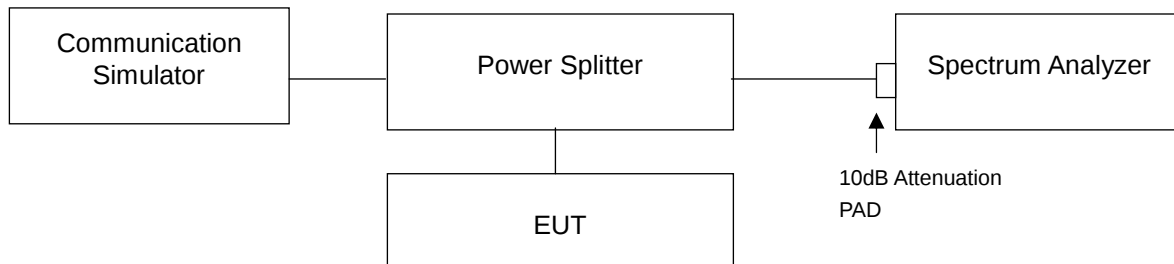

### 4.6.3 Test Procedure

- The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- Measuring frequency range is from 9 kHz to 10GHz. 20dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz is used for conducted emission measurement.


#### 4.6.4 Test Results




# EDGE

## CHANNEL 189


### FREQUENCY RANGE : 30MHz~1GHz

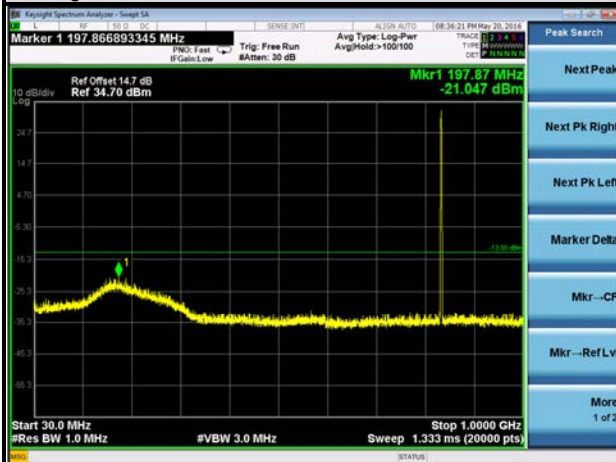


### FREQUENCY RANGE : 1GHz~3GHz

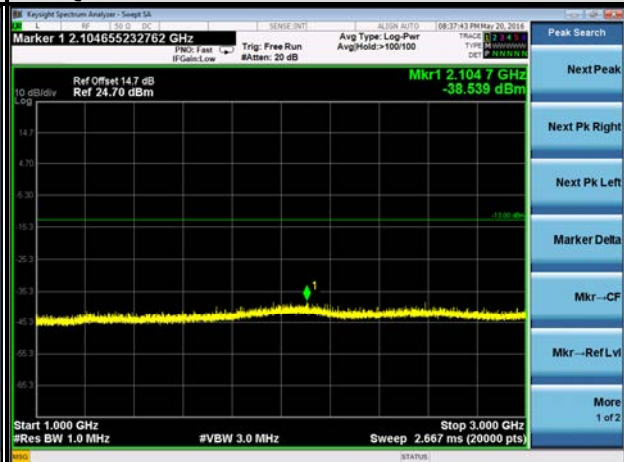

### FREQUENCY RANGE : 3GHz~7GHz

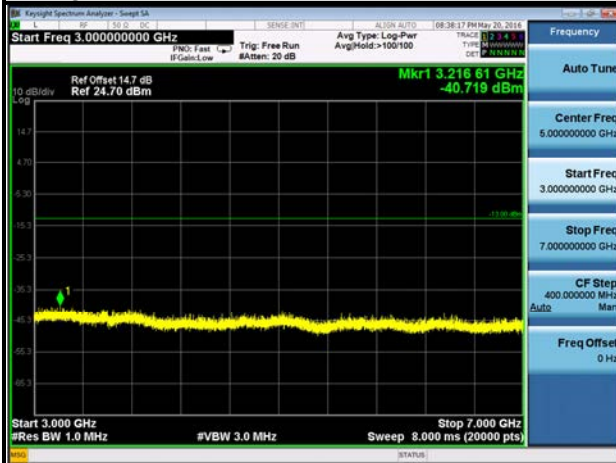


### FREQUENCY RANGE : 7GHz~9GHz

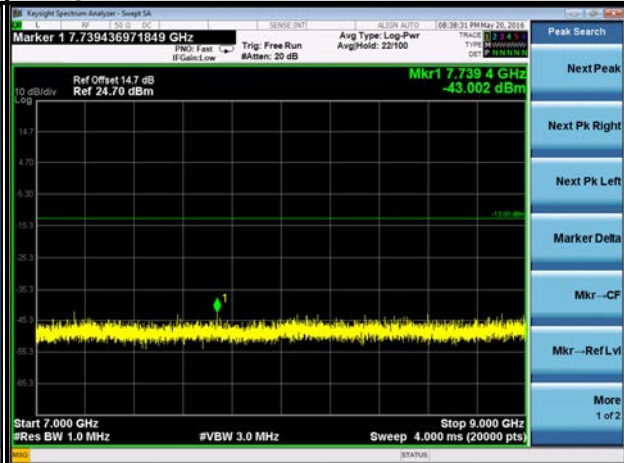


# WCDMA

## CHANNEL 4182


### FREQUENCY RANGE : 30MHz~1GHz

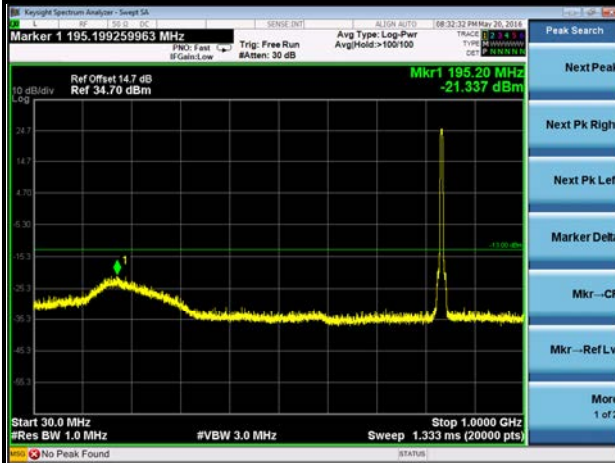


### FREQUENCY RANGE : 1GHz~3GHz

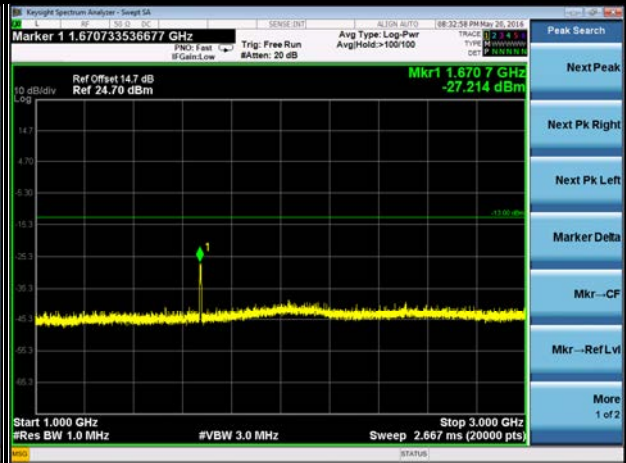

### FREQUENCY RANGE : 3GHz~7GHz

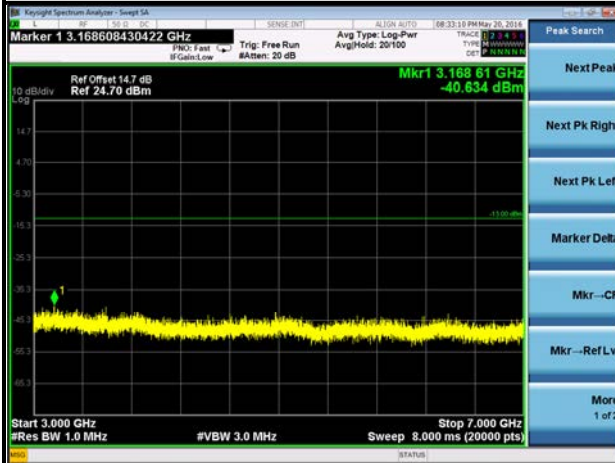

### FREQUENCY RANGE : 7GHz~9GHz

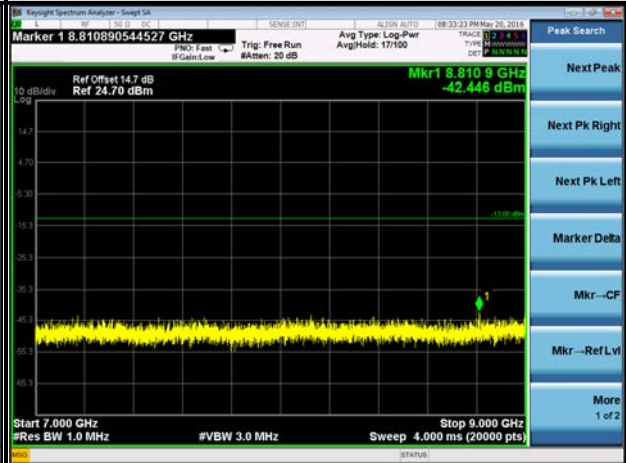



## 4.7 Radiated Emission Measurement

### 4.7.1 Limits of Radiated Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. The emission limit equal to  $-13\text{dBm}$ .

### 4.7.2 Test Procedure


- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value " of step a. Record the power level of S.G
- c.  $\text{EIRP} = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$ .
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole,  $\text{E.R.P power} = \text{E.I.R.P power} - 2.15\text{dBi}$ .

**NOTE:** The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

### 4.7.3 Deviation from Test Standard

No deviation.

#### 4.7.4 Test Setup

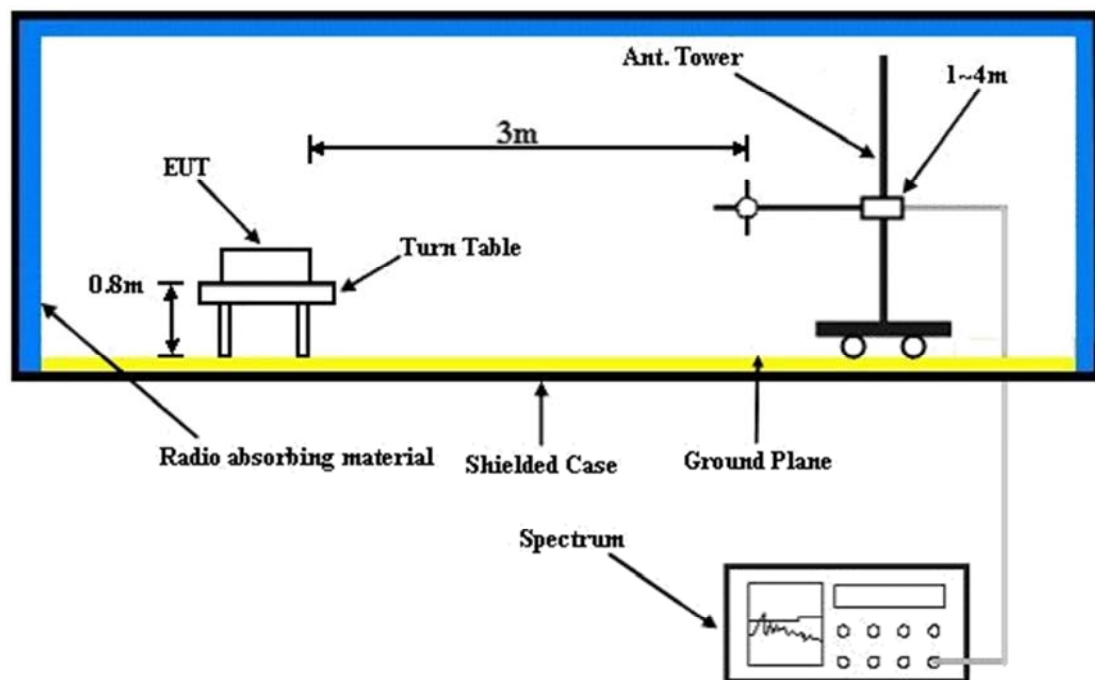

For the actual test configuration, please refer to the attached file (Test Setup Photo).


#### 4.7.5 Test Results

#### BELOW 1GHz WORST-CASE DATA

##### GSM 850:


|                                                     |                 |                 |                    |
|-----------------------------------------------------|-----------------|-----------------|--------------------|
| MODE                                                | TX channel 189  | FREQUENCY RANGE | Below 1000MHz      |
| ENVIRONMENTAL CONDITIONS                            | 26deg. C, 56%RH | INPUT POWER     | DC 5V from adapter |
| TESTED BY                                           | Alex Chen       |                 |                    |
| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                 |                 |                    |

|      |         |        | Read   | Limit  | Over   |        |            |        |
|------|---------|--------|--------|--------|--------|--------|------------|--------|
|      | Freq    | Level  | Level  | Line   | Limit  | Factor | Pol/Phase  | Remark |
|      | MHz     | dBm/m  | dBm    | dBm/m  | dB     | dB/m   |            |        |
| 1 PP | 42.610  | -30.36 | -40.14 | -13.00 | -17.36 | 9.78   | Horizontal | Peak   |
| 2    | 92.080  | -63.33 | -53.84 | -13.00 | -50.33 | -9.49  | Horizontal | Peak   |
| 3    | 176.470 | -77.85 | -59.96 | -13.00 | -64.85 | -17.89 | Horizontal | Peak   |
| 4    | 384.050 | -75.31 | -64.32 | -13.00 | -62.31 | -10.99 | Horizontal | Peak   |
| 5    | 486.870 | -71.45 | -61.06 | -13.00 | -58.45 | -10.39 | Horizontal | Peak   |
| 6    | 825.400 | -60.29 | -56.38 | -13.00 | -47.29 | -3.91  | Horizontal | Peak   |

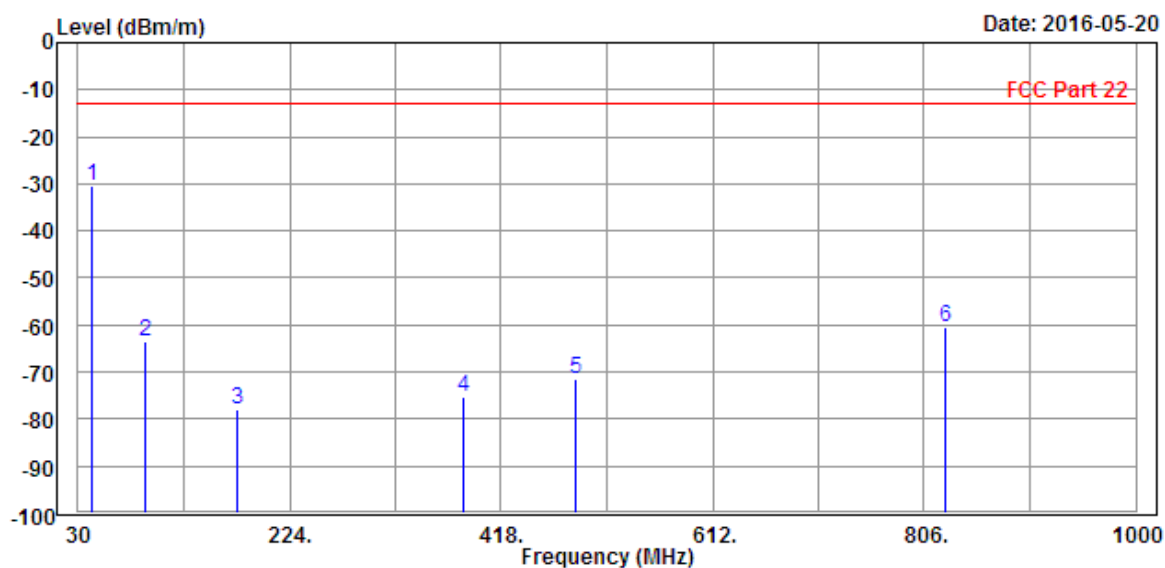

|                                                   |                 |                 |                    |
|---------------------------------------------------|-----------------|-----------------|--------------------|
| MODE                                              | TX channel 189  | FREQUENCY RANGE | Below 1000MHz      |
| ENVIRONMENTAL CONDITIONS                          | 26deg. C, 56%RH | INPUT POWER     | DC 5V from adapter |
| TESTED BY                                         | Alex Chen       |                 |                    |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |                 |                 |                    |

|      |         |        | Read   | Limit  | Over   |        |           |        |
|------|---------|--------|--------|--------|--------|--------|-----------|--------|
|      | Freq    | Level  | Level  | Line   | Limit  | Factor | Pol/Phase | Remark |
|      | MHz     | dBm/m  | dBm    | dBm/m  | dB     | dB/m   |           |        |
| 1 PP | 43.580  | -32.22 | -29.58 | -13.00 | -19.22 | -2.64  | Vertical  | Peak   |
| 2    | 89.170  | -62.42 | -51.91 | -13.00 | -49.42 | -10.51 | Vertical  | Peak   |
| 3    | 210.420 | -71.61 | -60.79 | -13.00 | -58.61 | -10.82 | Vertical  | Peak   |
| 4    | 304.510 | -73.65 | -62.37 | -13.00 | -60.65 | -11.28 | Vertical  | Peak   |
| 5    | 538.280 | -62.71 | -55.43 | -13.00 | -49.71 | -7.28  | Vertical  | Peak   |
| 6    | 897.180 | -58.75 | -56.22 | -13.00 | -45.75 | -2.53  | Vertical  | Peak   |

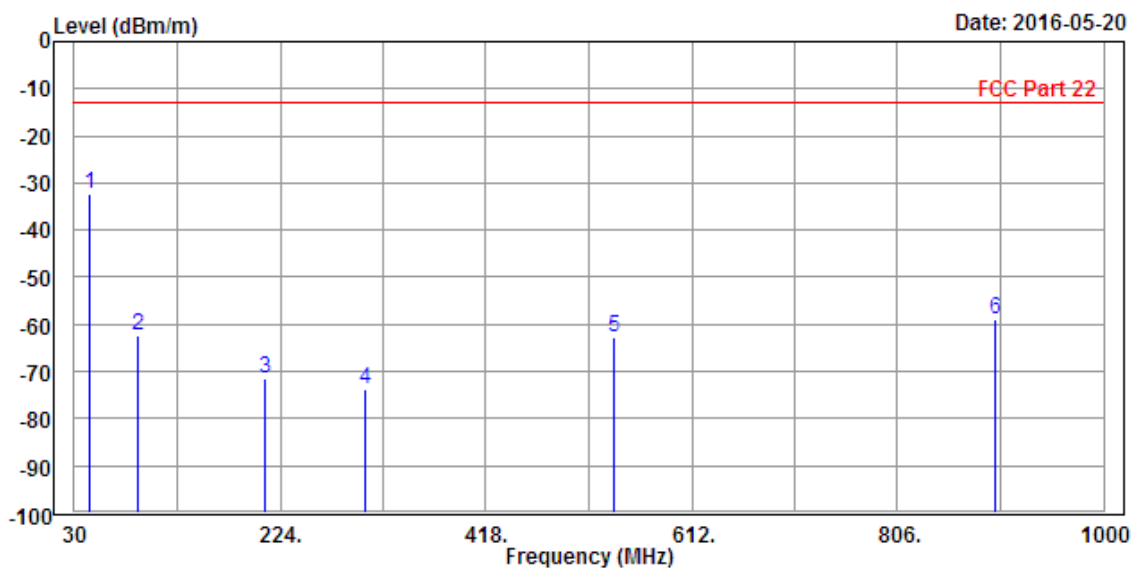


# ABOVE 1GHz DATA

GSM 850:


|                                                     |                 |                 |                    |
|-----------------------------------------------------|-----------------|-----------------|--------------------|
| MODE                                                | TX channel 189  | FREQUENCY RANGE | Above 1000MHz      |
| ENVIRONMENTAL CONDITIONS                            | 26deg. C, 56%RH | INPUT POWER     | DC 5V from adapter |
| TESTED BY                                           | Alex Chen       |                 |                    |
| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                 |                 |                    |

|   |             |        | Read   | Limit  | Over   |        |        |
|---|-------------|--------|--------|--------|--------|--------|--------|
|   | Freq        | Level  | Level  | Line   | Limit  | Factor | Remark |
|   | MHz         | dBm/m  | dBm    | dBm/m  | dB     | dB/m   |        |
| 1 | PP 1666.000 | -45.49 | -40.67 | -13.00 | -32.49 | -4.82  | Peak   |
| 2 | 2512.000    | -50.89 | -49.30 | -13.00 | -37.89 | -1.59  | Peak   |

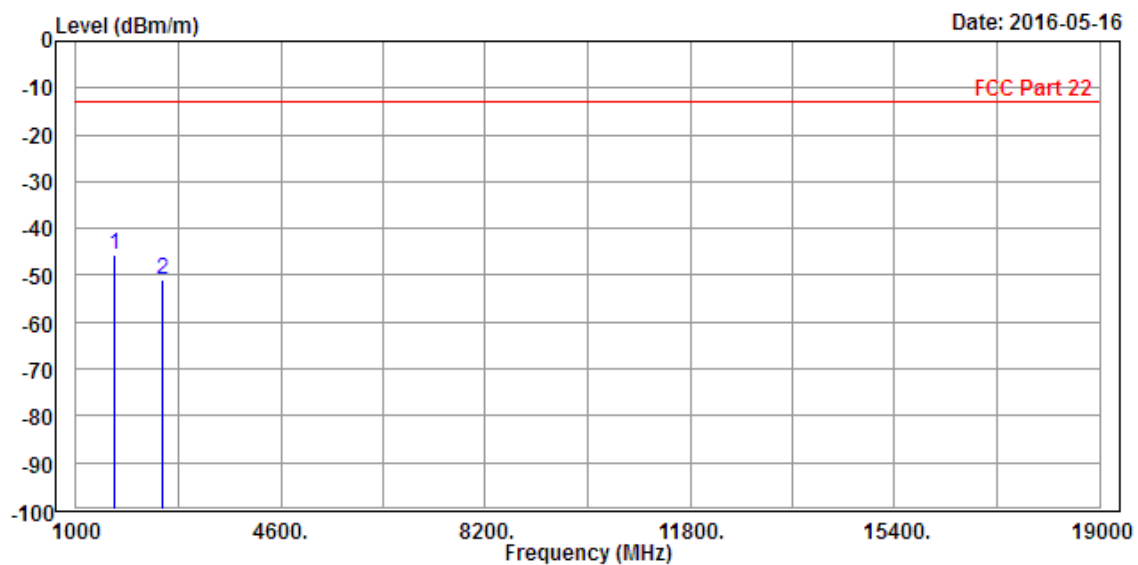

|                                                   |                 |                 |                    |
|---------------------------------------------------|-----------------|-----------------|--------------------|
| MODE                                              | TX channel 189  | FREQUENCY RANGE | Above 1000MHz      |
| ENVIRONMENTAL CONDITIONS                          | 26deg. C, 56%RH | INPUT POWER     | DC 5V from adapter |
| TESTED BY                                         | Alex Chen       |                 |                    |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |                 |                 |                    |


|               |        |        | Read   | Limit  | Over   |        |  |
|---------------|--------|--------|--------|--------|--------|--------|--|
| Freq          | Level  | Level  | Line   | Limit  | Factor | Remark |  |
| MHz           | dBm/m  | dBm    | dBm/m  | dB     | dB/m   |        |  |
| 1 PP 1666.000 | -48.21 | -44.83 | -13.00 | -35.21 | -3.38  | Peak   |  |
| 2 2512.000    | -48.38 | -48.26 | -13.00 | -35.38 | -0.12  | Peak   |  |

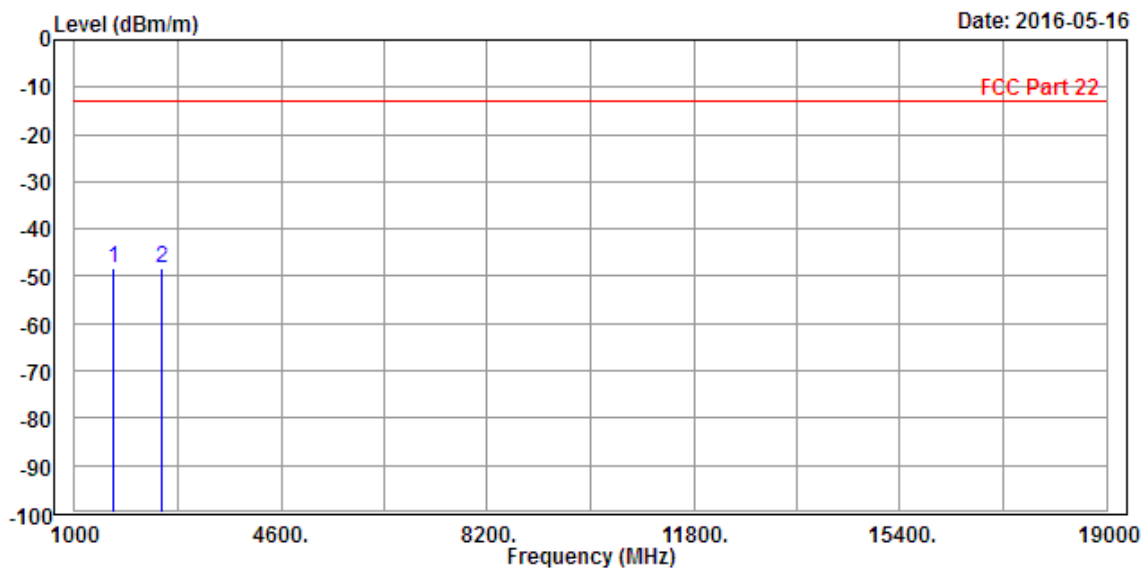

# EDGE 850:


|                                                     |                 |                 |                    |
|-----------------------------------------------------|-----------------|-----------------|--------------------|
| MODE                                                | TX channel 189  | FREQUENCY RANGE | Above 1000MHz      |
| ENVIRONMENTAL CONDITIONS                            | 26deg. C, 56%RH | INPUT POWER     | DC 5V from adapter |
| TESTED BY                                           | Alex Chen       |                 |                    |
| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                 |                 |                    |

|   |             |        | Read   | Limit  | Over   |        |        |
|---|-------------|--------|--------|--------|--------|--------|--------|
|   | Freq        | Level  | Level  | Line   | Limit  | Factor | Remark |
|   | MHz         | dBm/m  | dBm    | dBm/m  | dB     | dB/m   |        |
| 1 | PP 1666.000 | -54.98 | -50.16 | -13.00 | -41.98 | -4.82  | Peak   |
| 2 | 2512.000    | -56.56 | -54.97 | -13.00 | -43.56 | -1.59  | Peak   |

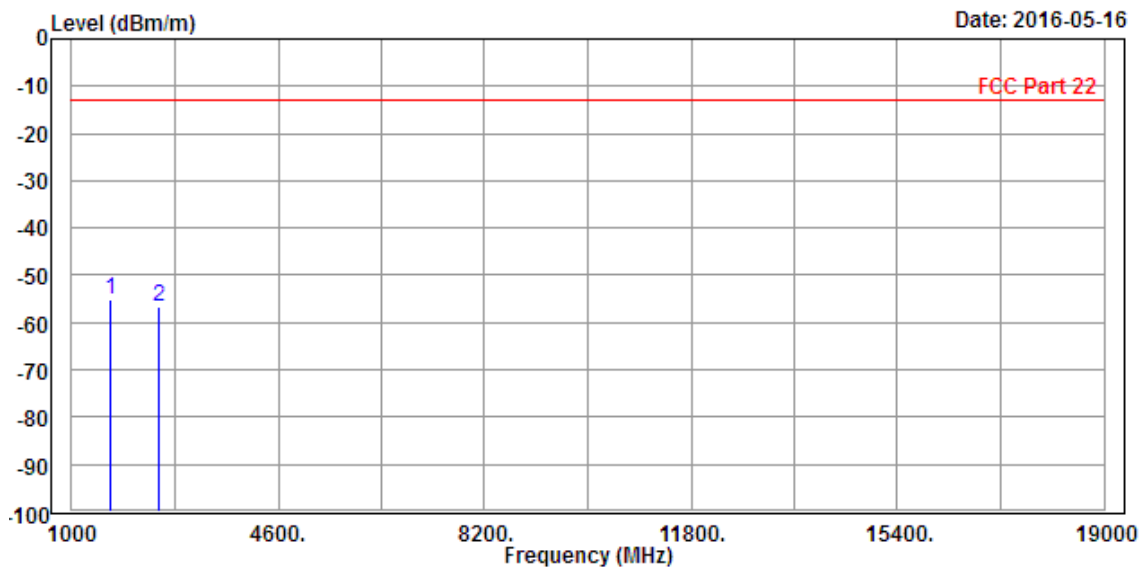

|                                                   |                 |                 |                    |
|---------------------------------------------------|-----------------|-----------------|--------------------|
| MODE                                              | TX channel 189  | FREQUENCY RANGE | Above 1000MHz      |
| ENVIRONMENTAL CONDITIONS                          | 26deg. C, 56%RH | INPUT POWER     | DC 5V from adapter |
| TESTED BY                                         | Alex Chen       |                 |                    |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |                 |                 |                    |


|               |        |        | Read   | Limit  | Over   |        |  |
|---------------|--------|--------|--------|--------|--------|--------|--|
| Freq          | Level  | Level  | Line   | Limit  | Factor | Remark |  |
| MHz           | dBm/m  | dBm    | dBm/m  | dB     | dB/m   |        |  |
| 1 PP 1666.000 | -53.76 | -50.38 | -13.00 | -40.76 | -3.38  | Peak   |  |
| 2 2512.000    | -53.82 | -53.70 | -13.00 | -40.82 | -0.12  | Peak   |  |

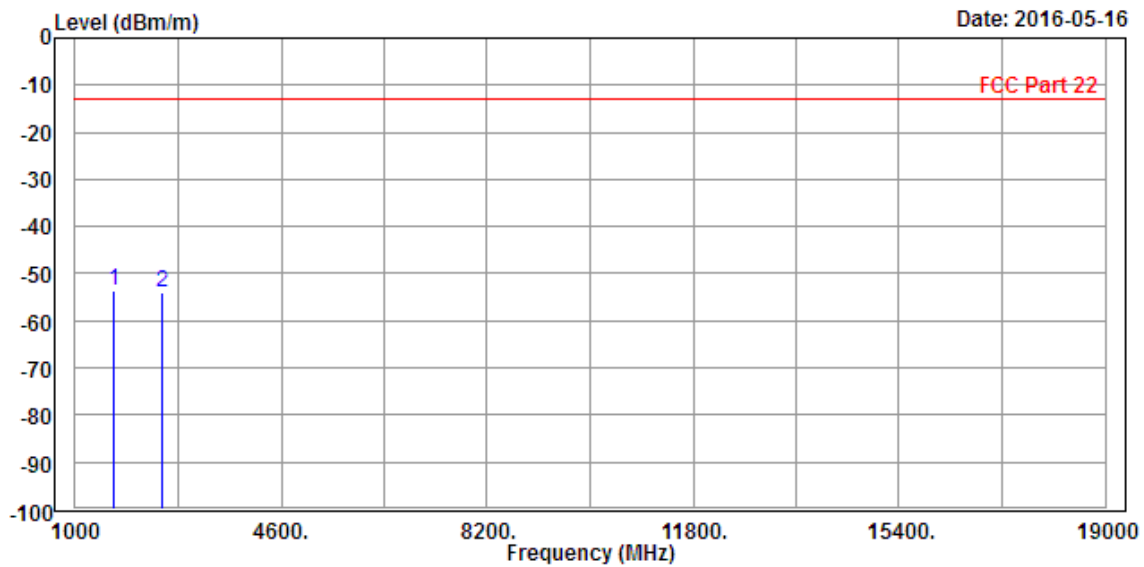

# WCDMA Band V:


|                                                     |                 |                 |                    |
|-----------------------------------------------------|-----------------|-----------------|--------------------|
| MODE                                                | TX channel 4182 | FREQUENCY RANGE | Above 1000MHz      |
| ENVIRONMENTAL CONDITIONS                            | 26deg. C, 56%RH | INPUT POWER     | DC 5V from adapter |
| TESTED BY                                           | Alex Chen       |                 |                    |
| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                 |                 |                    |

|   |             |        | Read   | Limit  | Over   |        |        |
|---|-------------|--------|--------|--------|--------|--------|--------|
|   | Freq        | Level  | Level  | Line   | Limit  | Factor | Remark |
|   | MHz         | dBm/m  | dBm    | dBm/m  | dB     | dB/m   |        |
| 1 | PP 1666.000 | -53.94 | -49.12 | -13.00 | -40.94 | -4.82  | Peak   |
| 2 | 2512.000    | -56.08 | -54.49 | -13.00 | -43.08 | -1.59  | Peak   |

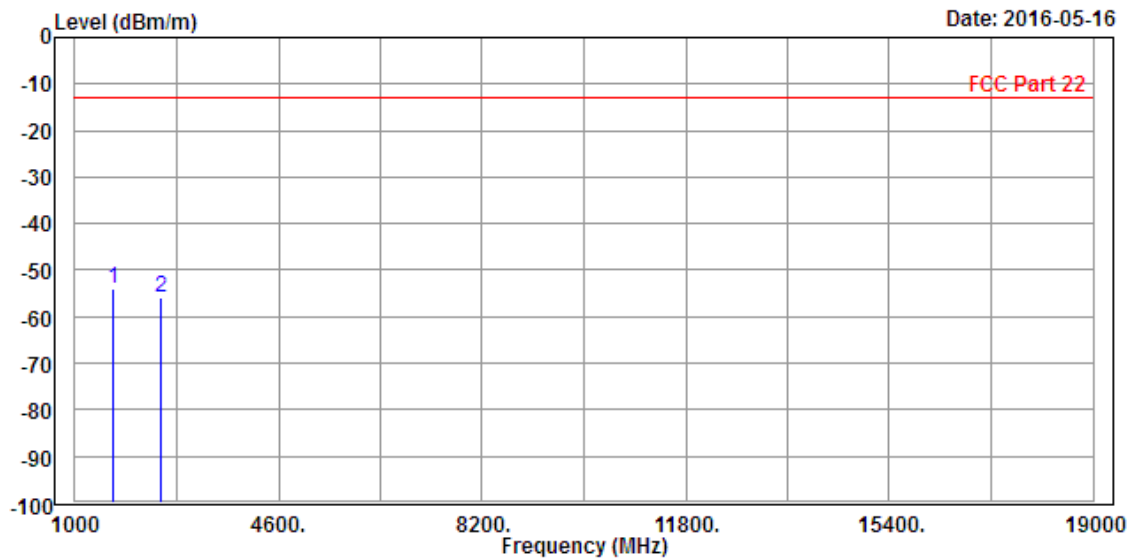

|                                                   |                 |                 |                    |
|---------------------------------------------------|-----------------|-----------------|--------------------|
| MODE                                              | TX channel 4182 | FREQUENCY RANGE | Above 1000MHz      |
| ENVIRONMENTAL CONDITIONS                          | 26deg. C, 56%RH | INPUT POWER     | DC 5V from adapter |
| TESTED BY                                         | Alex Chen       |                 |                    |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |                 |                 |                    |

|               |        |        | Read   | Limit  | Over   |        |  |
|---------------|--------|--------|--------|--------|--------|--------|--|
| Freq          | Level  | Level  | Line   | Limit  | Factor | Remark |  |
| MHz           | dBm/m  | dBm    | dBm/m  | dB     | dB/m   |        |  |
| 1 PP 1666.000 | -53.57 | -50.19 | -13.00 | -40.57 | -3.38  | Peak   |  |
| 2 2512.000    | -54.59 | -54.47 | -13.00 | -41.59 | -0.12  | Peak   |  |

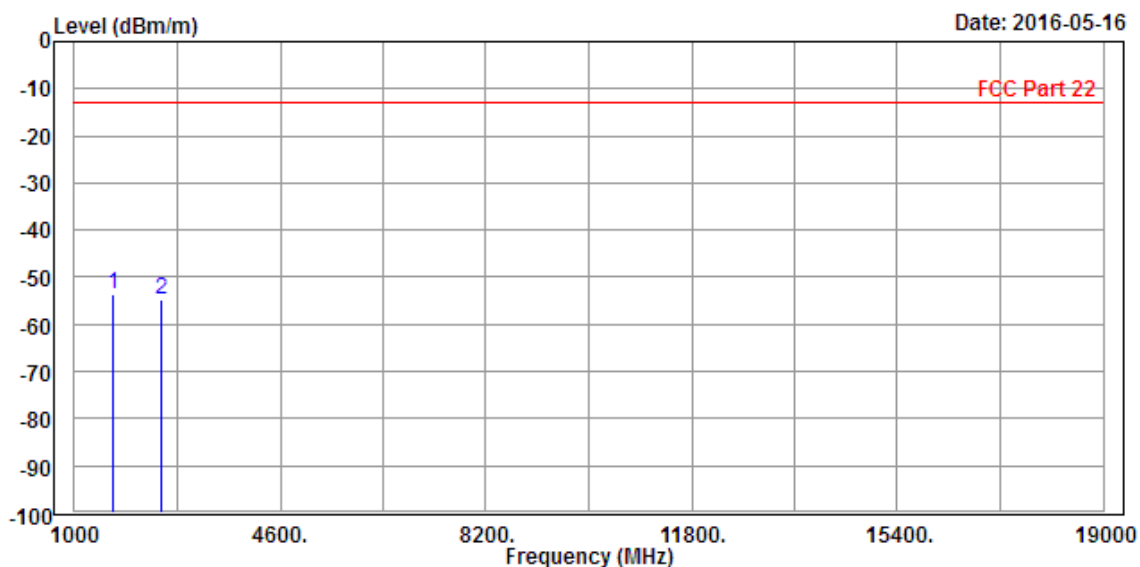


# LTE Band 5

CHANNEL BANDWIDTH: 1.4MHz / QPSK


|                                                     |                  |                 |                    |
|-----------------------------------------------------|------------------|-----------------|--------------------|
| MODE                                                | TX channel 20525 | FREQUENCY RANGE | Above 1000MHz      |
| ENVIRONMENTAL CONDITIONS                            | 26deg. C, 56%RH  | INPUT POWER     | DC 5V from adapter |
| TESTED BY                                           | Alex Chen        |                 |                    |
| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                  |                 |                    |

|               |        |        | Read   | Limit  | Over   |        |  |
|---------------|--------|--------|--------|--------|--------|--------|--|
| Freq          | Level  | Level  | Line   | Limit  | Factor | Remark |  |
| MHz           | dBm/m  | dBm    | dBm/m  | dB     | dB/m   |        |  |
| 1 PP 1666.000 | -54.69 | -49.87 | -13.00 | -41.69 | -4.82  | Peak   |  |
| 2 2502.000    | -56.44 | -54.81 | -13.00 | -43.44 | -1.63  | Peak   |  |

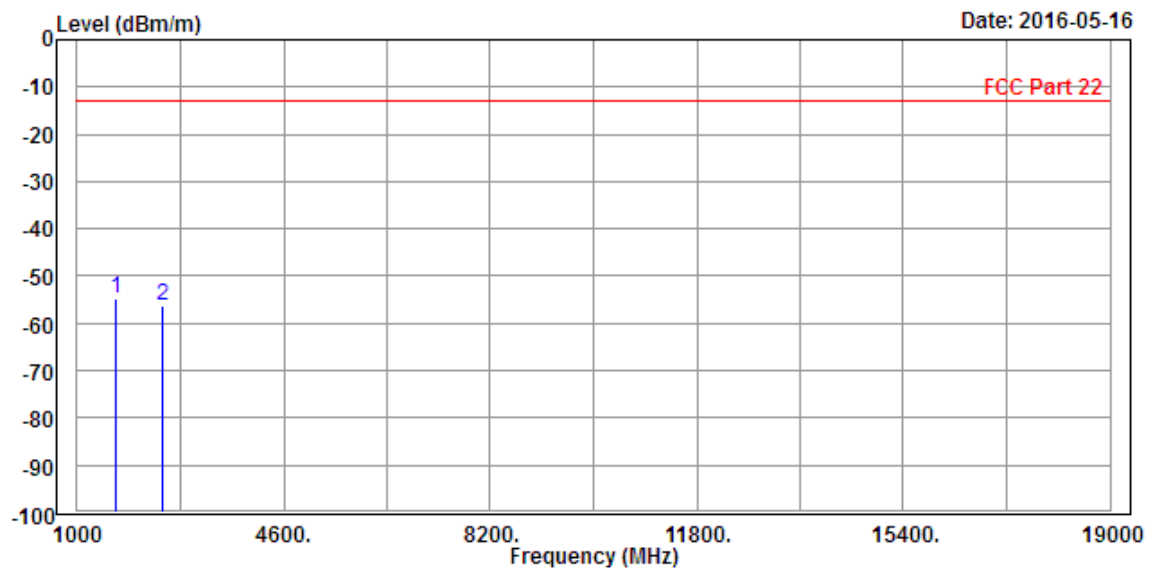

|                                                   |                  |                 |                    |
|---------------------------------------------------|------------------|-----------------|--------------------|
| MODE                                              | TX channel 20525 | FREQUENCY RANGE | Above 1000MHz      |
| ENVIRONMENTAL CONDITIONS                          | 26deg. C, 56%RH  | INPUT POWER     | DC 5V from adapter |
| TESTED BY                                         | Alex Chen        |                 |                    |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |                  |                 |                    |


|               |        |        | Read   | Limit  | Over   |        |  |
|---------------|--------|--------|--------|--------|--------|--------|--|
| Freq          | Level  | Level  | Line   | Limit  | Factor | Remark |  |
| MHz           | dBm/m  | dBm    | dBm/m  | dB     | dB/m   |        |  |
| 1 PP 1666.000 | -49.08 | -45.70 | -13.00 | -36.08 | -3.38  | Peak   |  |
| 2 2502.000    | -55.36 | -55.20 | -13.00 | -42.36 | -0.16  | Peak   |  |

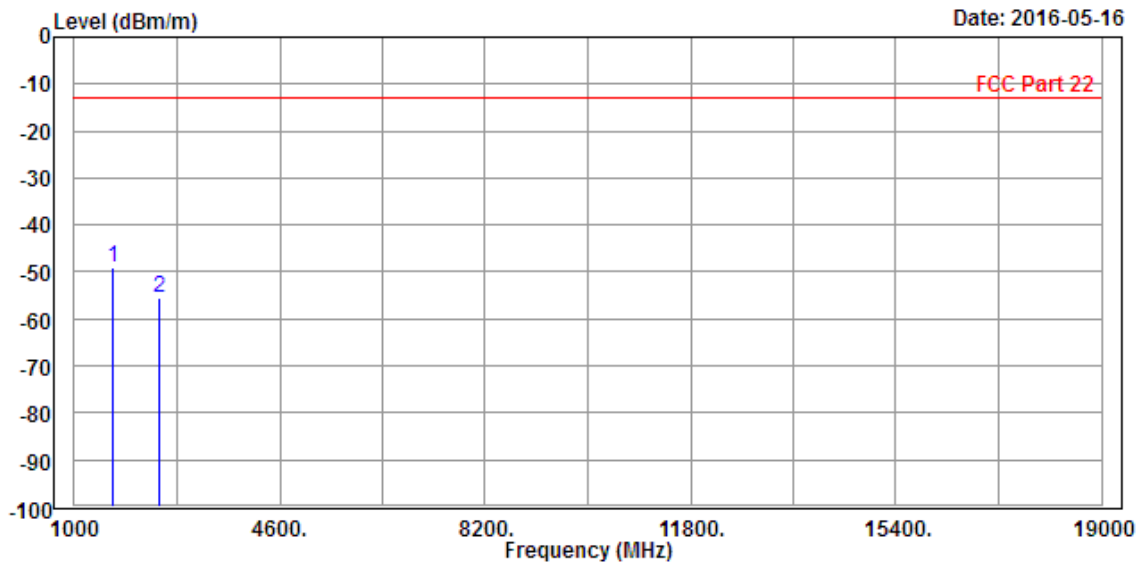

# CHANNEL BANDWIDTH: 3MHz / QPSK


|                                                     |                  |                 |                    |
|-----------------------------------------------------|------------------|-----------------|--------------------|
| MODE                                                | TX channel 20525 | FREQUENCY RANGE | Above 1000MHz      |
| ENVIRONMENTAL CONDITIONS                            | 26deg. C, 56%RH  | INPUT POWER     | DC 5V from adapter |
| TESTED BY                                           | Alex Chen        |                 |                    |
| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                  |                 |                    |

|               |        |        | Read   | Limit  | Over   |        |  |
|---------------|--------|--------|--------|--------|--------|--------|--|
| Freq          | Level  | Level  | Line   | Limit  | Factor | Remark |  |
| MHz           | dBm/m  | dBm    | dBm/m  | dB     | dB/m   |        |  |
| 1 PP 1666.000 | -53.88 | -49.06 | -13.00 | -40.88 | -4.82  | Peak   |  |
| 2 2502.000    | -57.27 | -55.64 | -13.00 | -44.27 | -1.63  | Peak   |  |

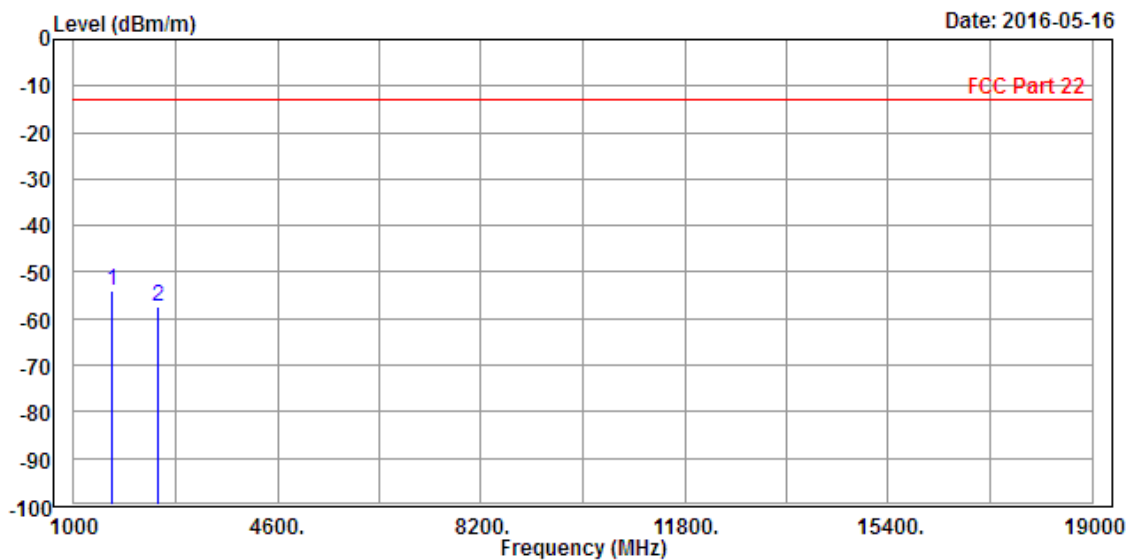

|                                                   |                  |                 |                    |
|---------------------------------------------------|------------------|-----------------|--------------------|
| MODE                                              | TX channel 20525 | FREQUENCY RANGE | Above 1000MHz      |
| ENVIRONMENTAL CONDITIONS                          | 26deg. C, 56%RH  | INPUT POWER     | DC 5V from adapter |
| TESTED BY                                         | Alex Chen        |                 |                    |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |                  |                 |                    |


|               |        |        | Read   | Limit  | Over   |        |  |
|---------------|--------|--------|--------|--------|--------|--------|--|
| Freq          | Level  | Level  | Line   | Limit  | Factor | Remark |  |
| MHz           | dBm/m  | dBm    | dBm/m  | dB     | dB/m   |        |  |
| 1 PP 1666.000 | -48.71 | -45.33 | -13.00 | -35.71 | -3.38  | Peak   |  |
| 2 2502.000    | -54.38 | -54.22 | -13.00 | -41.38 | -0.16  | Peak   |  |

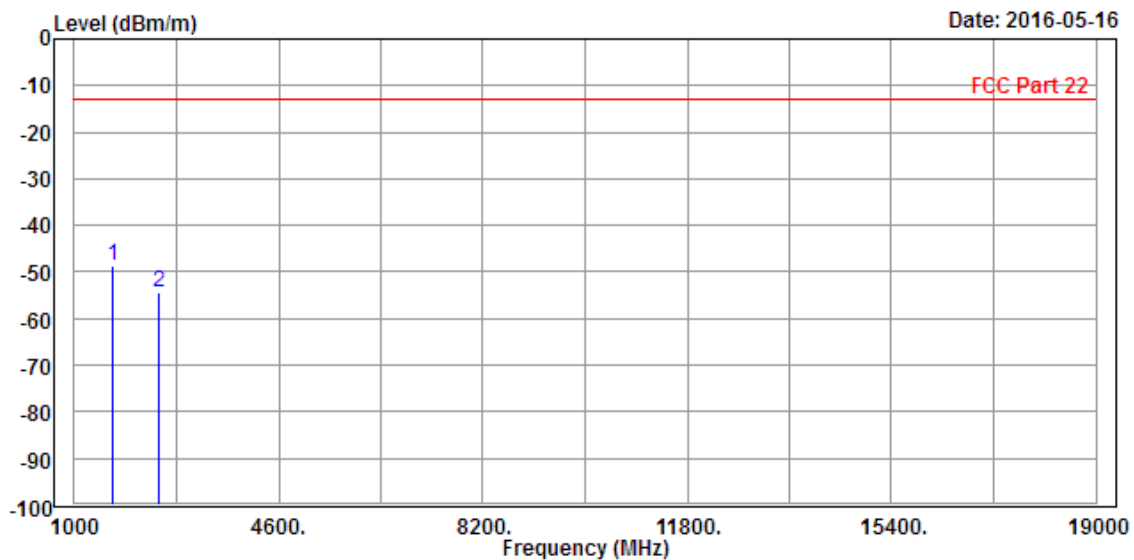

# CHANNEL BANDWIDTH: 5MHz / QPSK


|                                                     |                  |                 |                    |
|-----------------------------------------------------|------------------|-----------------|--------------------|
| MODE                                                | TX channel 20525 | FREQUENCY RANGE | Above 1000MHz      |
| ENVIRONMENTAL CONDITIONS                            | 26deg. C, 56%RH  | INPUT POWER     | DC 5V from adapter |
| TESTED BY                                           | Alex Chen        |                 |                    |
| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                  |                 |                    |

|               |        |        | Read   | Limit  | Over   |        |  |
|---------------|--------|--------|--------|--------|--------|--------|--|
| Freq          | Level  | Level  | Line   | Limit  | Factor | Remark |  |
| MHz           | dBm/m  | dBm    | dBm/m  | dB     | dB/m   |        |  |
| 1 PP 1666.000 | -53.45 | -48.63 | -13.00 | -40.45 | -4.82  | Peak   |  |
| 2 2502.000    | -54.63 | -53.00 | -13.00 | -41.63 | -1.63  | Peak   |  |

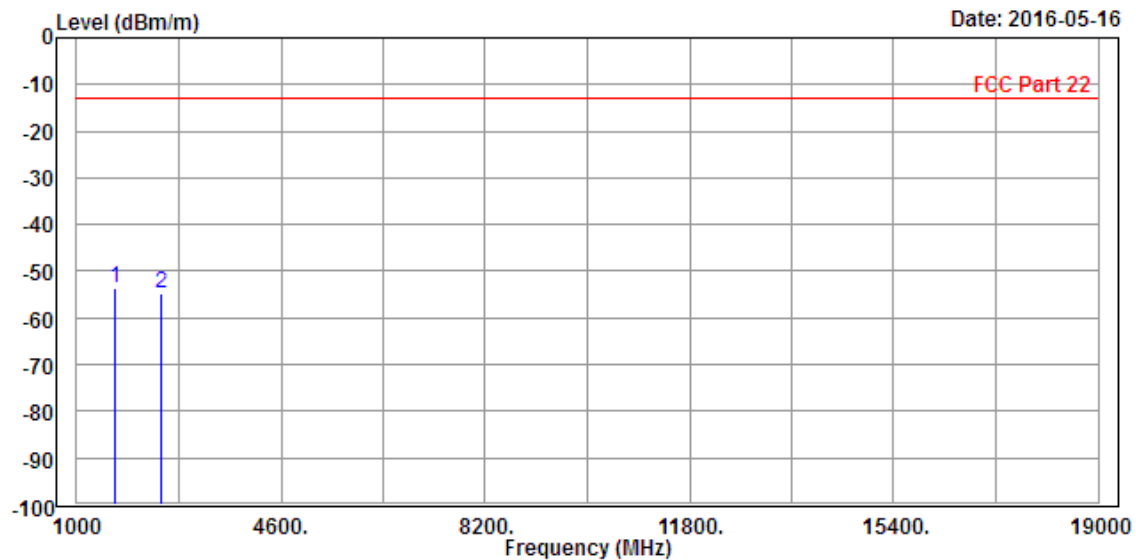

|                                                   |                  |                 |                    |
|---------------------------------------------------|------------------|-----------------|--------------------|
| MODE                                              | TX channel 20525 | FREQUENCY RANGE | Above 1000MHz      |
| ENVIRONMENTAL CONDITIONS                          | 26deg. C, 56%RH  | INPUT POWER     | DC 5V from adapter |
| TESTED BY                                         | Alex Chen        |                 |                    |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |                  |                 |                    |


|               |        |        | Read   | Limit  | Over   |        |  |
|---------------|--------|--------|--------|--------|--------|--------|--|
| Freq          | Level  | Level  | Line   | Limit  | Factor | Remark |  |
| MHz           | dBm/m  | dBm    | dBm/m  | dB     | dB/m   |        |  |
| 1 PP 1666.000 | -47.41 | -44.03 | -13.00 | -34.41 | -3.38  | Peak   |  |
| 2 2502.000    | -49.89 | -49.73 | -13.00 | -36.89 | -0.16  | Peak   |  |

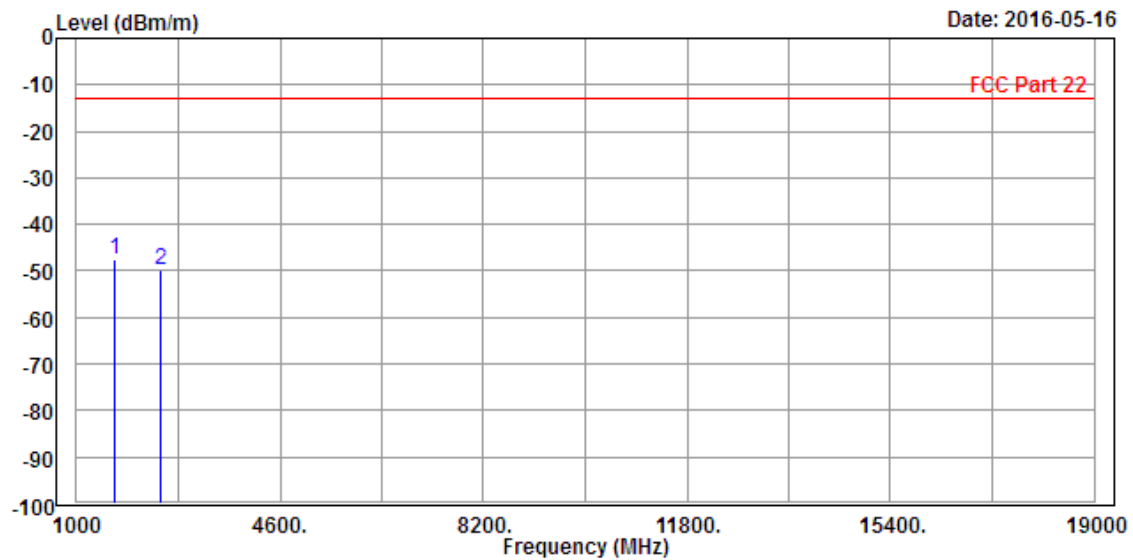

# CHANNEL BANDWIDTH: 10MHz / QPSK


|                                                     |                  |                 |                    |
|-----------------------------------------------------|------------------|-----------------|--------------------|
| MODE                                                | TX channel 20525 | FREQUENCY RANGE | Above 1000MHz      |
| ENVIRONMENTAL CONDITIONS                            | 26deg. C, 56%RH  | INPUT POWER     | DC 5V from adapter |
| TESTED BY                                           | Alex Chen        |                 |                    |
| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                  |                 |                    |

|      |          |        | Read   | Limit  | Over   |        |        |
|------|----------|--------|--------|--------|--------|--------|--------|
|      | Freq     | Level  | Level  | Line   | Limit  | Factor | Remark |
|      | MHz      | dBm/m  | dBm    | dBm/m  | dB     | dB/m   |        |
| 1 PP | 1666.000 | -50.39 | -45.57 | -13.00 | -37.39 | -4.82  | Peak   |
| 2    | 2512.000 | -55.46 | -53.87 | -13.00 | -42.46 | -1.59  | Peak   |

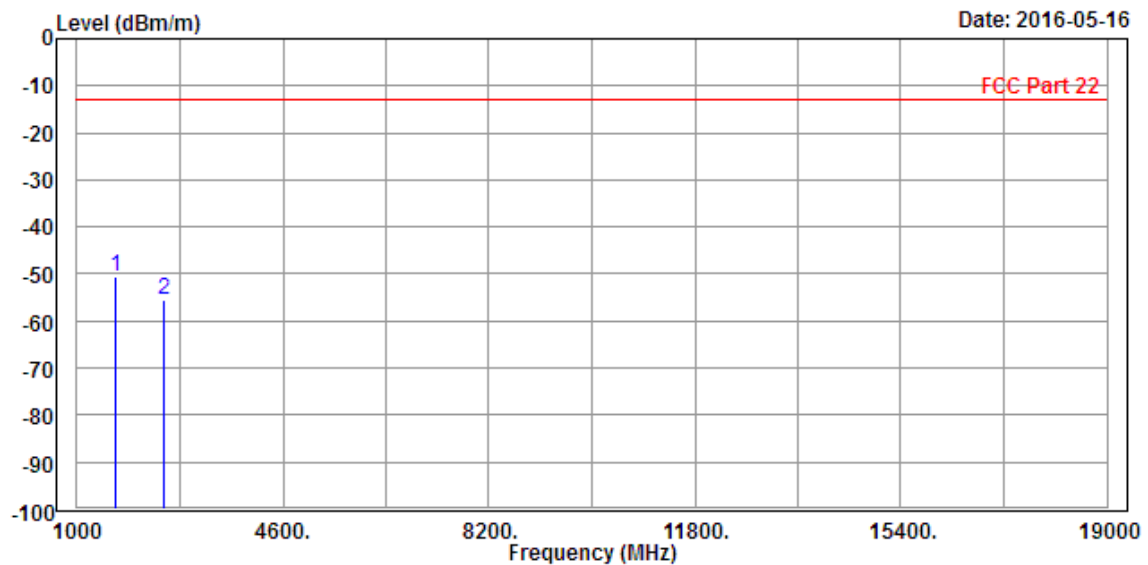

|                                                   |                  |                 |                    |
|---------------------------------------------------|------------------|-----------------|--------------------|
| MODE                                              | TX channel 20525 | FREQUENCY RANGE | Above 1000MHz      |
| ENVIRONMENTAL CONDITIONS                          | 26deg. C, 56%RH  | INPUT POWER     | DC 5V from adapter |
| TESTED BY                                         | Alex Chen        |                 |                    |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M |                  |                 |                    |

|               |        |        | Read   | Limit  | Over   |        |  |
|---------------|--------|--------|--------|--------|--------|--------|--|
| Freq          | Level  | Level  | Line   | Limit  | Factor | Remark |  |
| MHz           | dBm/m  | dBm    | dBm/m  | dB     | dB/m   |        |  |
| 1 PP 1666.000 | -47.92 | -44.54 | -13.00 | -34.92 | -3.38  | Peak   |  |
| 2 2512.000    | -54.47 | -54.35 | -13.00 | -41.47 | -0.12  | Peak   |  |

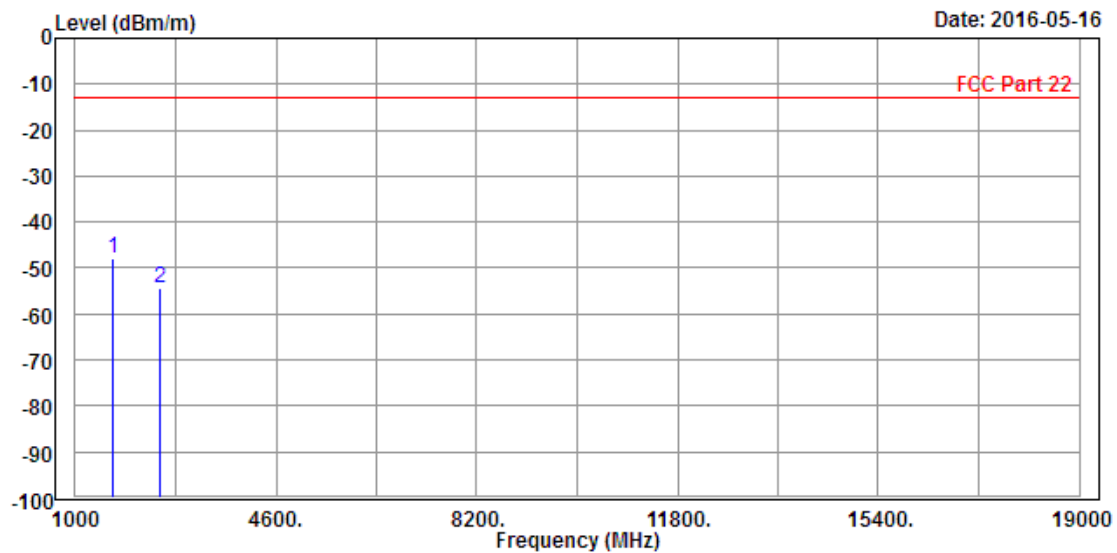

## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

## Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF Lab/Telecom Lab**

Tel: 886-3-5935343

Fax: 886-3-5935342

**Hwa Ya EMC/RF/Safety**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---