

SKYBELL TECHNOLOGIES INC

TEST REPORT

SCOPE OF WORK

FCC TESTING—TRIM2 S, TRIM2 B

REPORT NUMBER

200603023SZN-001

ISSUE DATE

14 September 2020

[REVISED DATE]

[-----]

PAGES

115

DOCUMENT CONTROL NUMBER

FCC ID 247_b

© 2017 INTERTEK



SKYBELL TECHNOLOGIES INC

Application
For
Certification

FCC ID: 2ADXI-SBHD20**TRIM II PRO****Model: TRIM2 S, TRIM2 B****2.4GHz Wi-Fi Transceiver**

Report No.: 200603023SZN-001

We hereby certify that the sample of the above item is considered to comply with the requirements of FCC Part 15, Subpart C for Intentional Radiator, mention 47 CFR [10-1-19]

Prepared and Checked by:**Approved by:****Steven Zhou**
Engineer

Kidd Yang
Technical Supervisor
Date: 14 September 2020

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Intertek Testing Services Shenzhen Ltd. Longhua Branch

101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing Community, GuanHu Subdistrict, LongHua District, Shenzhen, P.R. China.

Tel: (86 755) 8601 6288 Fax: (86 755) 8601 6751

MEASUREMENT/TECHNICAL REPORT

This report concerns (check one) Original Grant ☒ Class II Change ☐

Equipment Type: DTS - Part 15 Digital Transmission Systems (Wi-Fi transmitter portion)

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? Yes ☐ No ☒

If yes, defer until :
date

Company Name agrees to notify the Commission by:
date

of the intended date of announcement of the product so that the grant can be issued on that date.

Transition Rules Request per 15.37? Yes ☐ No ☒

If no, assumed Part 15, Subpart C for intentional radiator - the new 47 CFR [10-01-19] Edition] provision.

Report prepared by:

Steven Zhou
Intertek Testing Services Shenzhen Ltd. Longhua Branch
101, 201, Building B, No. 308 Wuhe Avenue,
Zhangkengjing Community, GuanHu Subdistrict, LongHua
District, Shenzhen, P.R. China.
Tel: (86 755) 8601 6288 Fax: (86 755) 8601 6661

Table of Contents

1.0	<u>Summary of Test results</u>	4
2.0	<u>General Description</u>	5
2.1	Product Description	5
2.2	Related Submittal(s) Grants	5
2.3	Test Methodology	5
2.4	Test Facility	5
3.0	<u>System Test Configuration</u>	6
3.1	Justification	6
3.2	EUT Exercising Software	6
3.3	Special Accessories	6
3.4	Measurement Uncertainty	7
3.5	Equipment Modification	7
3.6	Support Equipment List and Description	7
4.0	<u>Measurement Results</u>	8
4.1	Maximum Conducted Output Power at Antenna Terminals	8
4.2	Minimum 6 dB RF Bandwidth	10
4.3	Maximum Power Density Reading	24
4.4	Out of Band Conducted Emissions	38
4.5	Out of Band Radiated Emissions	79
4.6	Transmitter Radiated Emissions in Restricted Bands	80
4.7	Field Strength Calculation	81
4.8	Radiated Spurious Emission	82
4.9	Conducted Emission	109
4.10	Radiated Emissions from Digital Section of Transceiver	112
4.11	Transmitter Duty Cycle Calculation and Measurements	113
5.0	<u>Equipment Photographs</u>	114
6.0	<u>Product Labelling</u>	114
7.0	<u>Technical Specifications</u>	114
8.0	<u>Instruction Manual</u>	114
9.0	<u>Confidentiality Request</u>	114
10.0	<u>Discussion of Pulse Desensitization</u>	114
11.0	<u>Test Equipment List</u>	115

1.0 Summary of Test results

Applicant: SKYBELL TECHNOLOGIES INC

Applicant Address: 1 JENNER STE 100, IRVINE CA 92618, USA

Manufacturer: Same as applicant

Manufacturer Address: Same as applicant

Model: TRIM2 S
FCC ID: 2ADXI-SBHD20

TEST ITEM	REFERENCE	RESULTS
Max. Output power	15.247(b)(3)	Pass
6 dB Bandwidth	15.247(a)(2)	Pass
Max. Power Density	15.247(e)	Pass
Out of Band Antenna Conducted Emission	15.247(d)	Pass
Radiated Emission in Restricted Bands	15.247(d), 15.209, FCC 15.205	Pass
AC Conducted Emission	15.207	Pass
Antenna Requirement	15.203	Pass (See Notes)

Notes: The EUT uses an Integral Antenna which in accordance to Section 15.203 is considered sufficient to comply with the provisions of this section.

2.0 General Description

2.1 Product Description

The equipment under test (EUT) is a TRIM II PRO with WIFI function operating in 2412-2462MHz and 5745~5825MHZ. The EUT is equipped with two antennas, they can't transmit at the same time. The 2.4G transmitter and 5G transmitter can't transmit at the same time. The EUT is powered by 10-30VAC 50/60Hz, 0.5A Max or 12VDC, 0.5-1.0A. For more detailed features description, please refer to the user's manual.

Type of Modulation: BPSK, QPSK, 16QAM, 64QAM for OFDM; CCK, DQPSK, DBPSK for DSSS.

Antenna Type: Integral Antenna

Antenna Gain: 1.0dBi(Antenna 1), 0.2dBi(Antenna 2)

The Model: TRIM2 B is the same as the Model: TRIM2 S in hardware and electrical aspect. The difference in model number and appearance serves as marketing strategy.

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

2.2 Related Submittal(s) Grants

This is an application for certification of:

DTS- Part 15 Digital Transmission Systems (2.4GHz Wi-Fi transmitter portion).

Remaining portions are subject to the following procedures:

1. Receiver portion of WiFi: exempt from technical requirement of this Part.
2. Other Digital Function: Subject to FCC Part 15B SDOC.
3. 5G WiFi function: Subjected to report 200603023SZN-002.

2.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013) and KDB 558074 D01 v05r02. Radiated emission measurement was performed in semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application.

2.4 Test Facility

The Semi-anechoic chamber and shielded room used to collect the radiated data and conducted data are **Intertek Testing Services Shenzhen Ltd. Longhua Branch** and located at 101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing Community, GuanHu Subdistrict, LongHua District, Shenzhen, P.R. China. This test facility and site measurement data have been fully placed on file with File Number: CN1188.

3.0 System Test Configuration

3.1 Justification

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, all cables were manipulated to produce worst case emissions. The EUT was powered by 10-30VAC 50/60Hz, 0.5A Max or 12VDC, 0.5-1.0A during the test.

On 802.11b/g/n-HT20/n-HT40 mode, each antenna and all data rate were tested and only the worst case data is shown in the report.

For maximizing emissions, the EUT was rotated through 360°, the EUT was placed on the styrene turntable with 0.8m up to 1GHz and 1.5 m above 1GHz. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance.

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000 MHz. The resolution is 1 MHz or greater for frequencies above 1000 MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

The rear of unit shall be flushed with the rear of the table.

Radiated emission measurement were performed the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

3.2 EUT Exercising Software

The EUT exercise program (provided by client) used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use. The worst case configuration is used in all specified testing.

The parameters of test software setting:

During the test, Channel and power controlling software provided by the applicant was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the application and is going to be fixed on the firmware of the end product.

Test software: Trim 2 V8072

3.3 Special Accessories

N/A.

3.4 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test has been considered.

3.5 Equipment Modification

Any modifications installed previous to testing by SKYBELL TECHNOLOGIES INC will be incorporated in each production model sold / leased in the United States.

No modifications were installed by Intertek Testing Services Shenzhen Ltd. Longhua Branch.

3.6 Support Equipment List and Description

Description	Manufacturer	Model No.
Adapter	FEIHE	TY1200200E1mn
USB cable	/	Unshielded 20cm Length
SD card	Kingston	U3 V30 A2
AC cable	/	Unshielded 90cm Length

Applicant: SKYBELL TECHNOLOGIES INC

Date of Test: September 03, 2020

Model: TRIM2 S

4.0 Measurement Results

4.1 Maximum Conducted Output Power at Antenna Terminals, FCC Rules 15.247(b)(3):

The antenna power of the EUT was connected to the input of a broadband peak RF power meter. The power meter have a video bandwidth that is greater than DTS bandwidth and utilize a fast-responding diode detector. Power was read directly at the EUT antenna terminals with cable loss added.

For antennas with gains of 6 dBi or less, maximum allowed Transmitter output is 1 watt (+30 dBm).

Antenna 1:

IEEE 802.11b (Antenna Gain = 1dBi) (CCK, 1Mbps)		
Frequency (MHz)	Output in dBm (Peak Reading)	Output in mWatt
Low Channel: 2412	17.6	57.54
Middle Channel: 2437	17.7	58.88
High Channel: 2462	17.4	54.95

IEEE 802.11g (Antenna Gain = 1dBi) (16QAM, 6Mbps)		
Frequency (MHz)	Output in dBm (Peak Reading)	Output in mWatt
Low Channel: 2412	25.1	323.59
Middle Channel: 2437	25.4	346.74
High Channel: 2462	25.5	354.81

IEEE 802.11n-HT20 (Antenna Gain = 1dBi) (64QAM, 6Mbps)		
Frequency (MHz)	Output in dBm (Peak Reading)	Output in mWatt
Low Channel: 2412	24.6	288.40
Middle Channel: 2437	24.7	295.12
High Channel: 2462	24.5	281.84

IEEE 802.11n-HT40 (Antenna Gain = 1dBi) (64QAM, 13.5Mbps)		
Frequency (MHz)	Output in dBm (Peak Reading)	Output in mWatt
Low Channel: 2422	24.8	302.00
Middle Channel: 2437	24.7	295.12
High Channel: 2452	24.6	288.40

Antenna 2:

IEEE 802.11b (Antenna Gain = 0.2dBi) (CCK, 1Mbps)		
Frequency (MHz)	Output in dBm (Peak Reading)	Output in mWatt
Low Channel: 2412	17.4	54.95
Middle Channel: 2437	16.7	46.77
High Channel: 2462	16.7	46.77

IEEE 802.11g (Antenna Gain = 0.2dBi) (16QAM, 6Mbps)		
Frequency (MHz)	Output in dBm (Peak Reading)	Output in mWatt
Low Channel: 2412	23.7	234.42
Middle Channel: 2437	23.9	245.47
High Channel: 2462	24.1	257.04

IEEE 802.11n-HT20 (Antenna Gain = 0.2dBi) (64QAM, 6Mbps)		
Frequency (MHz)	Output in dBm (Peak Reading)	Output in mWatt
Low Channel: 2412	23.7	234.42
Middle Channel: 2437	23.5	223.87
High Channel: 2462	23.4	218.78

IEEE 802.11n-HT40 (Antenna Gain = 0.2dBi) (64QAM, 13.5Mbps)		
Frequency (MHz)	Output in dBm (Peak Reading)	Output in mWatt
Low Channel: 2422	23.4	218.78
Middle Channel: 2437	23.8	239.88
High Channel: 2452	24.0	251.19

Cable loss: 0.5 dB External Attenuation: 0 dB

Cable loss, external attenuation has been included in OFFSET function

EUT max. output level = 25.5dBm

EUT max. E.I.R.P = 25.5dBm + 1.0dBi = 26.5dBm = 446.68mW

For RF Exposure, the information is saved with filename: RF exposure.pdf.

Applicant: SKYBELL TECHNOLOGIES INC

Date of Test: September 01 -September 02, 2020 Model: TRIM2 S

4.2 Minimum 6 dB RF Bandwidth, FCC Rule 15.247(a) (2):

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RES BW was set to 100 KHz according to FCC KDB 558074 D01 v05r02. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A PEAK output reading was taken, a DISPLAY line was drawn 6 dB lower than PEAK level. The 6dB bandwidth was determined from where the channel output spectrum intersected the display line.

Limit: The 6 dB Bandwidth is at least 500 kHz.

Antenna 1:

IEEE 802.11b (CCK, 1Mbps)	
Frequency (MHz)	6 dB Bandwidth (MHz)
2412	10.116
2437	10.116
2462	10.116


IEEE 802.11g (16QAM, 6Mbps)	
Frequency (MHz)	6 dB Bandwidth (MHz)
2412	16.281
2437	16.281
2462	16.281

IEEE 802.11n-HT20 (64QAM, 6Mbps)	
Frequency (MHz)	6 dB Bandwidth (MHz)
2412	17.279
2437	17.279
2462	17.279


IEEE 802.11n-HT40 (64QAM, 13.5Mbps)	
Frequency (MHz)	6 dB Bandwidth (MHz)
2422	35.687
2437	35.948
2452	35.948

The test plots are attached as below.


802.11b

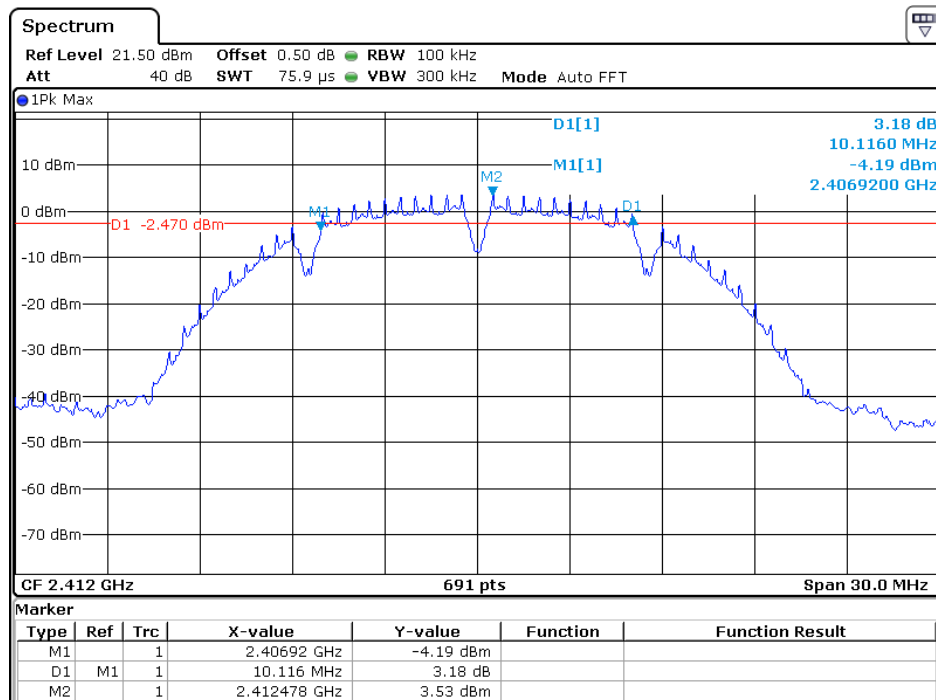

Date: 2 SEP 2020 17:29:00

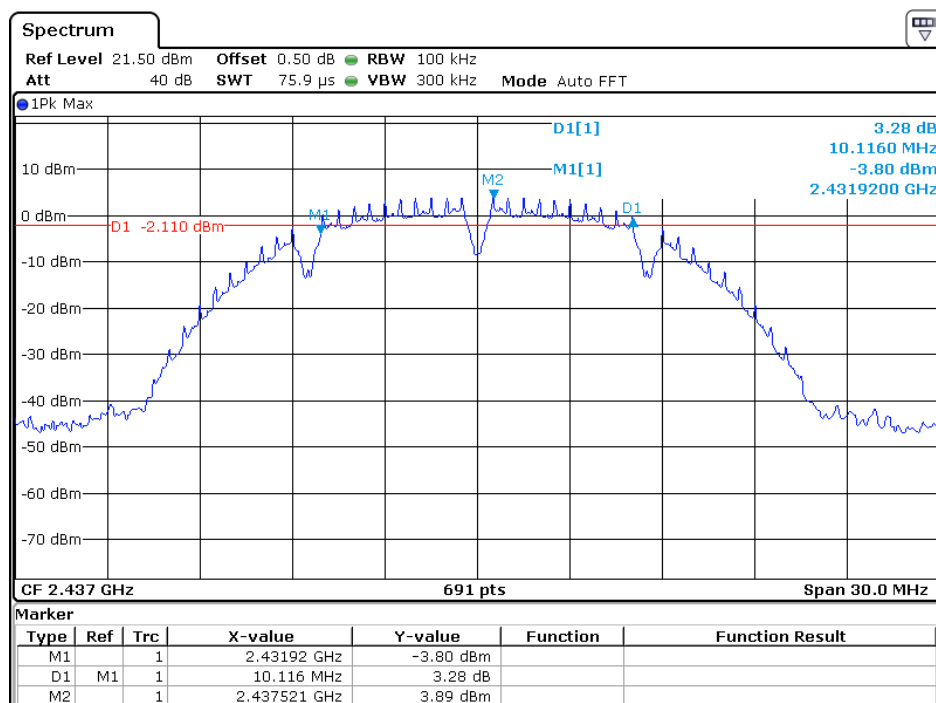


Date: 2 SEP 2020 17:32:29

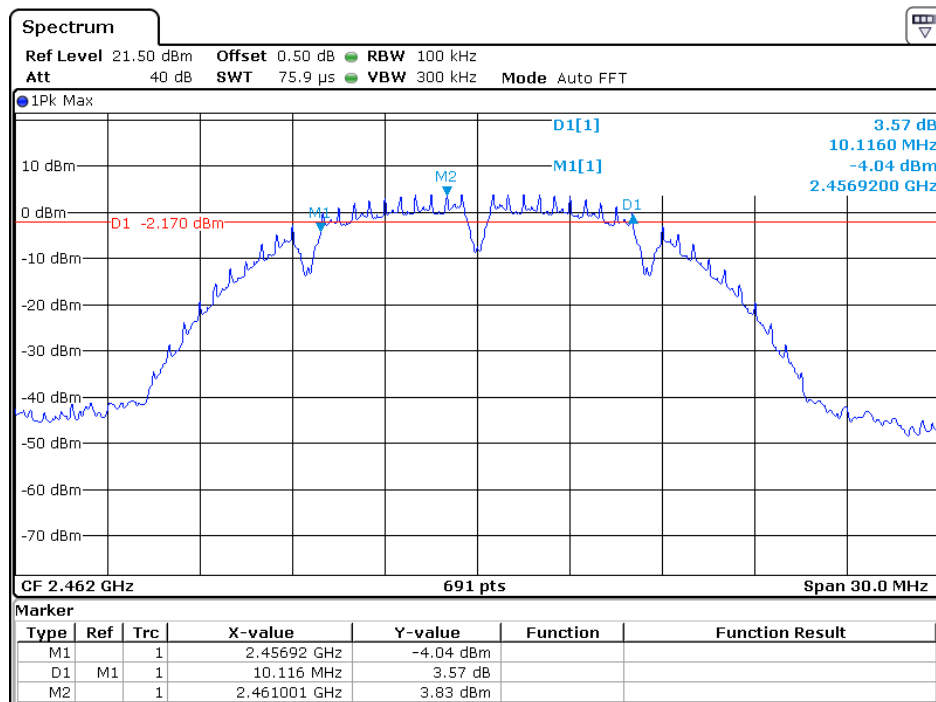


Date: 2 SEP 2020 17:36:24


802.11g

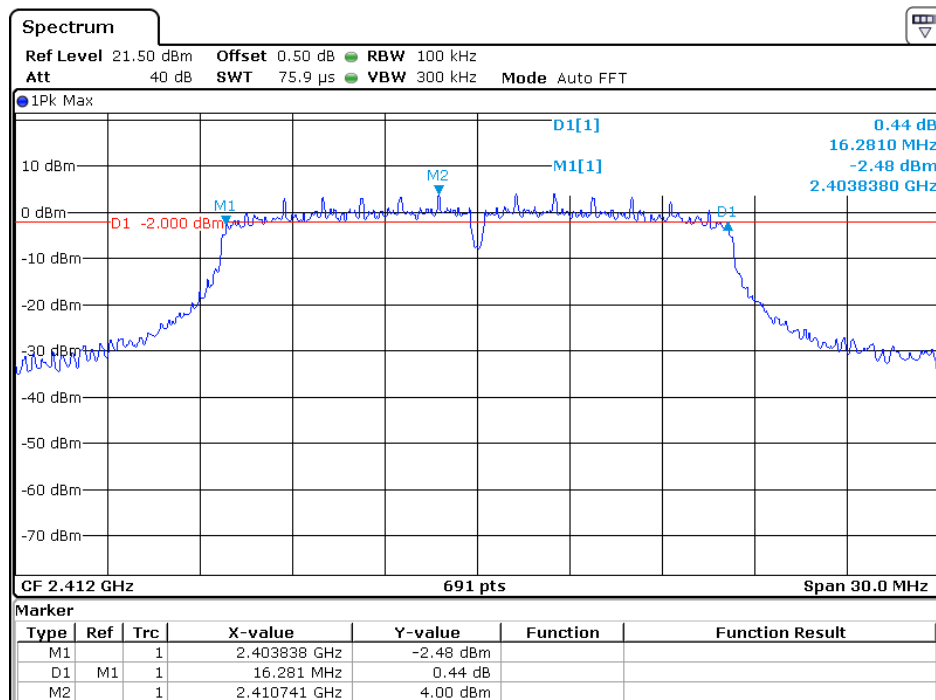

Date: 2 SEP 2020 19:12:55

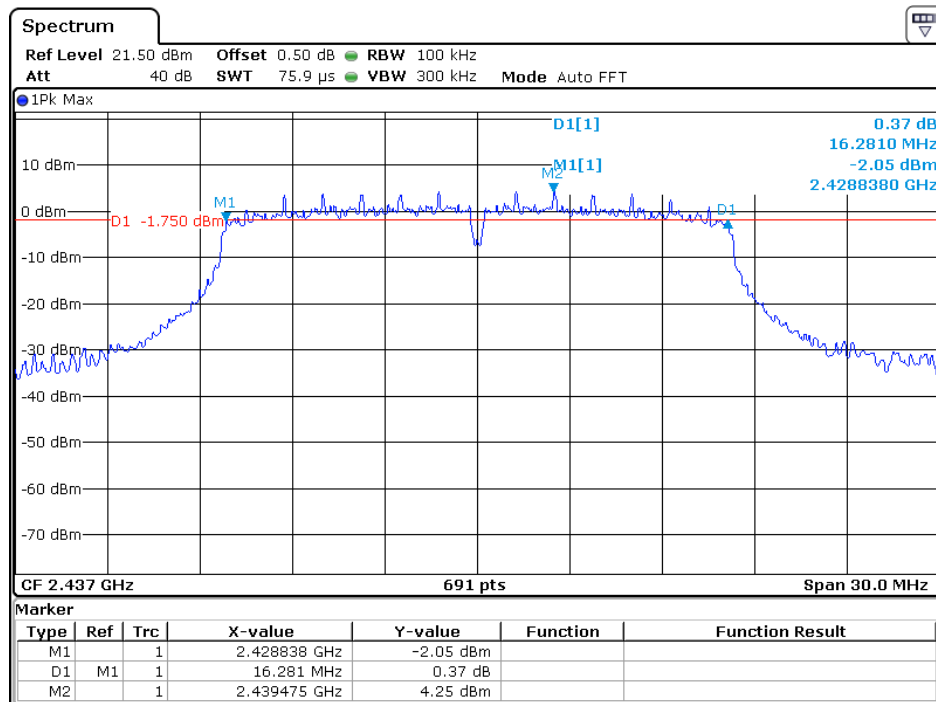


Date: 2 SEP 2020 19:08:24

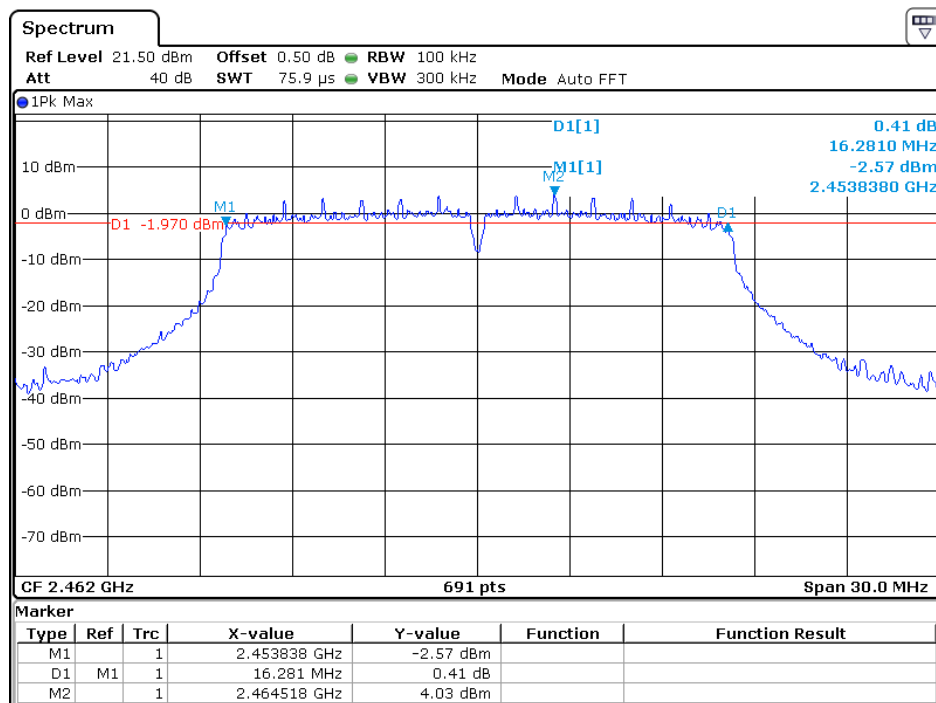


Date: 2 SEP 2020 17:41:04


802.11n-HT20

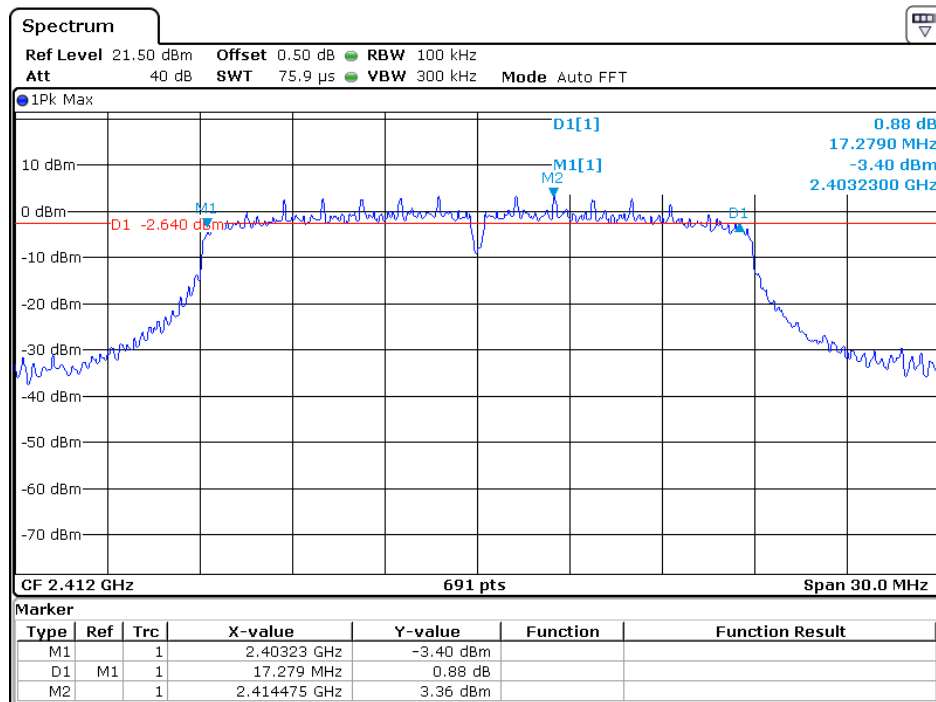

Date: 2 SEP 2020 19:21:19

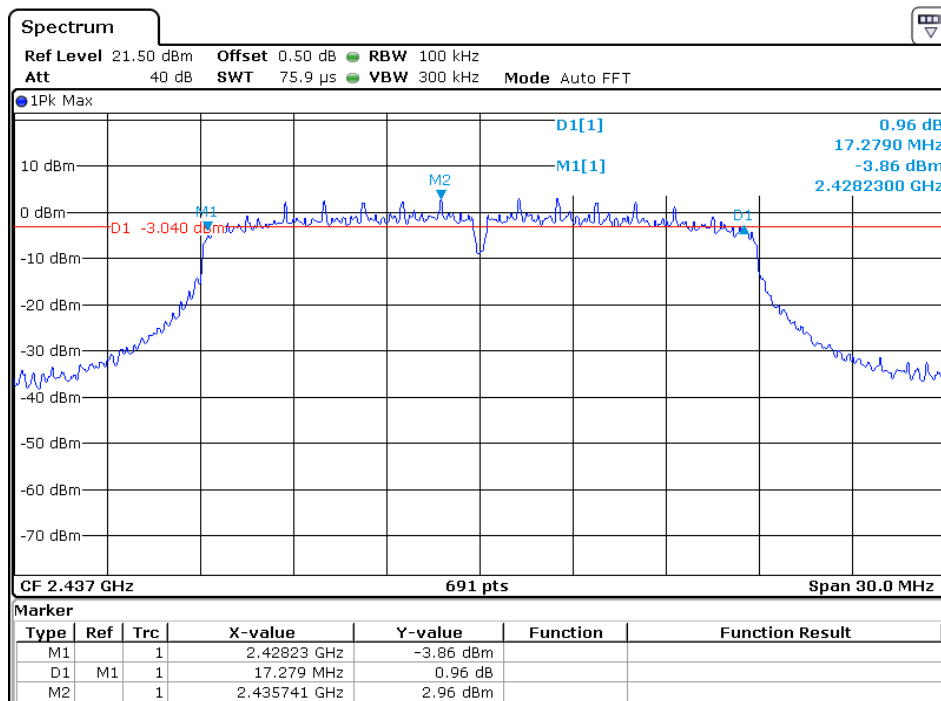


Date: 2 SEP 2020 19:25:45

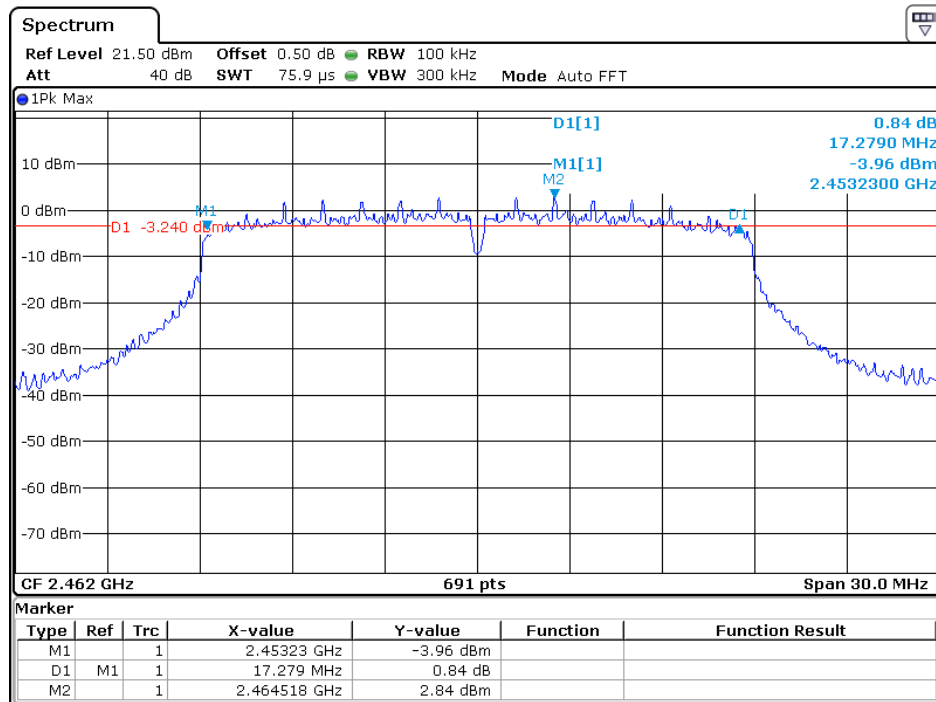


Date: 2 SEP 2020 19:33:38


802.11n-HT40

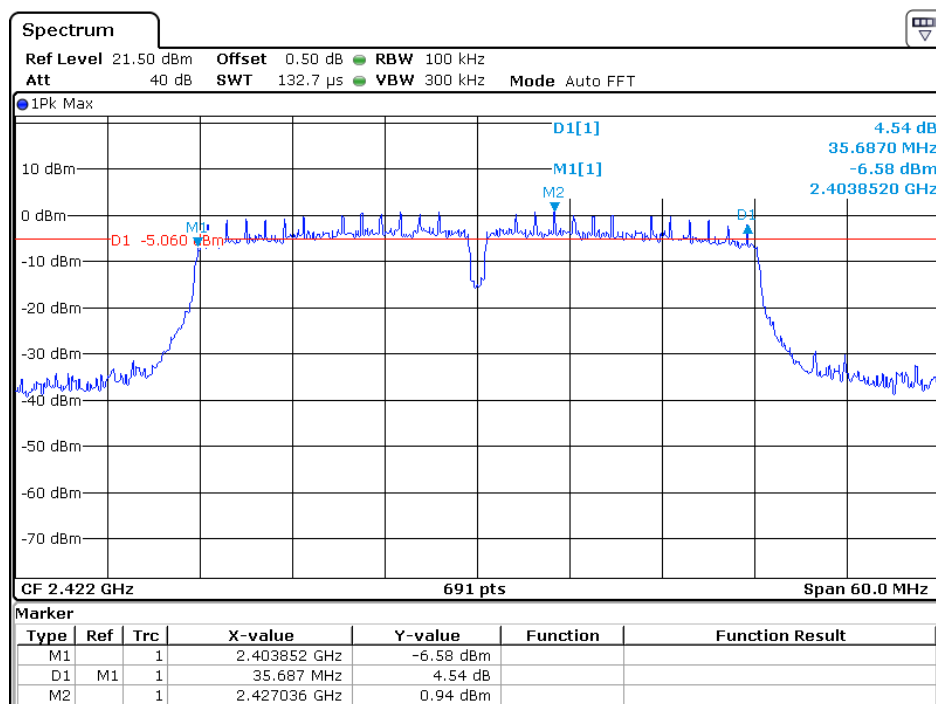

Date: 2 SEP 2020 20:05:22

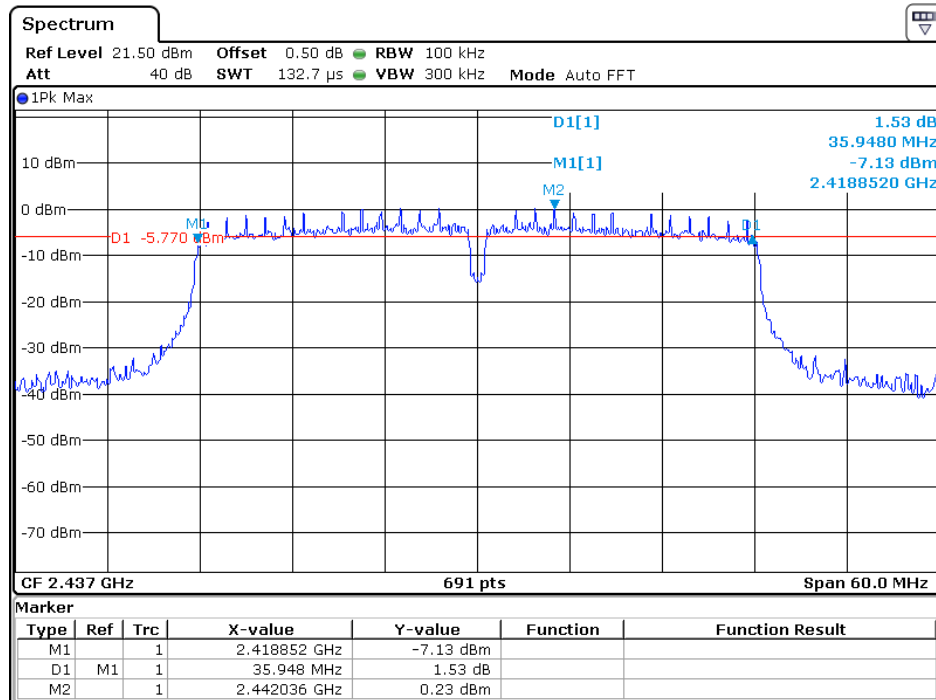

Date: 2 SEP 2020 19:53:05

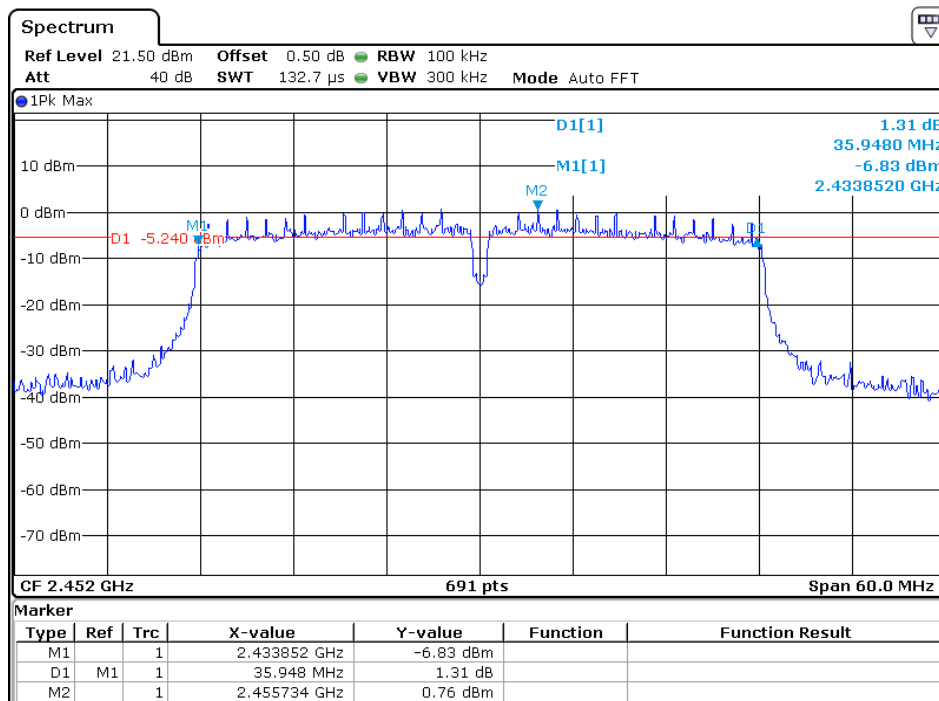

Date: 2 SEP 2020 19:49:11

Antenna 2:

IEEE 802.11b (CCK, 1Mbps)	
Frequency (MHz)	6 dB Bandwidth (MHz)
2412	10.116
2437	10.116
2462	10.116


IEEE 802.11g (16QAM, 6Mbps)	
Frequency (MHz)	6 dB Bandwidth (MHz)
2412	16.281
2437	16.281
2462	16.064

IEEE 802.11n-HT20 (64QAM, 6Mbps)	
Frequency (MHz)	6 dB Bandwidth (MHz)
2412	17.149
2437	17.279
2462	17.279


IEEE 802.11n-HT40 (64QAM, 13.5Mbps)	
Frequency (MHz)	6 dB Bandwidth (MHz)
2422	35.427
2437	35.427
2452	35.427

The test plots are attached as below.


802.11b

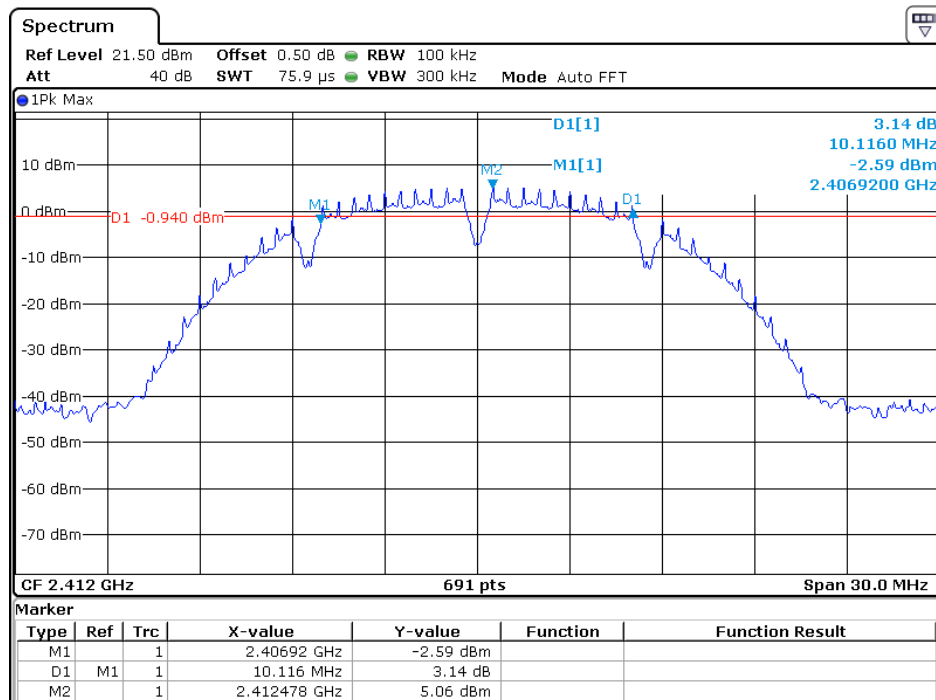

Date: 1 SEP 2020 18:50:23

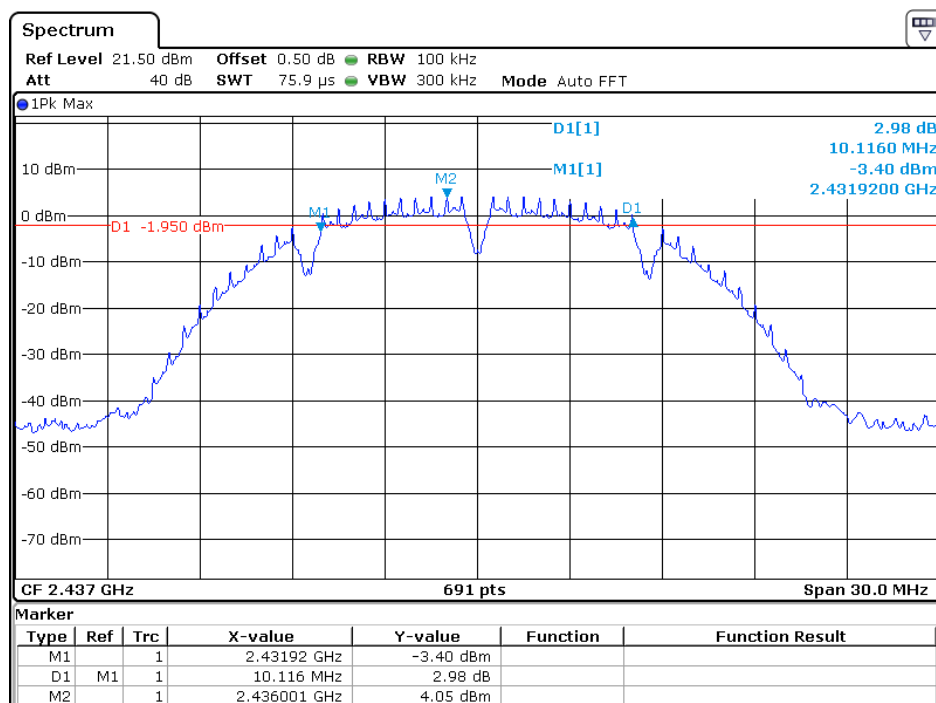


Date: 1 SEP 2020 18:55:14

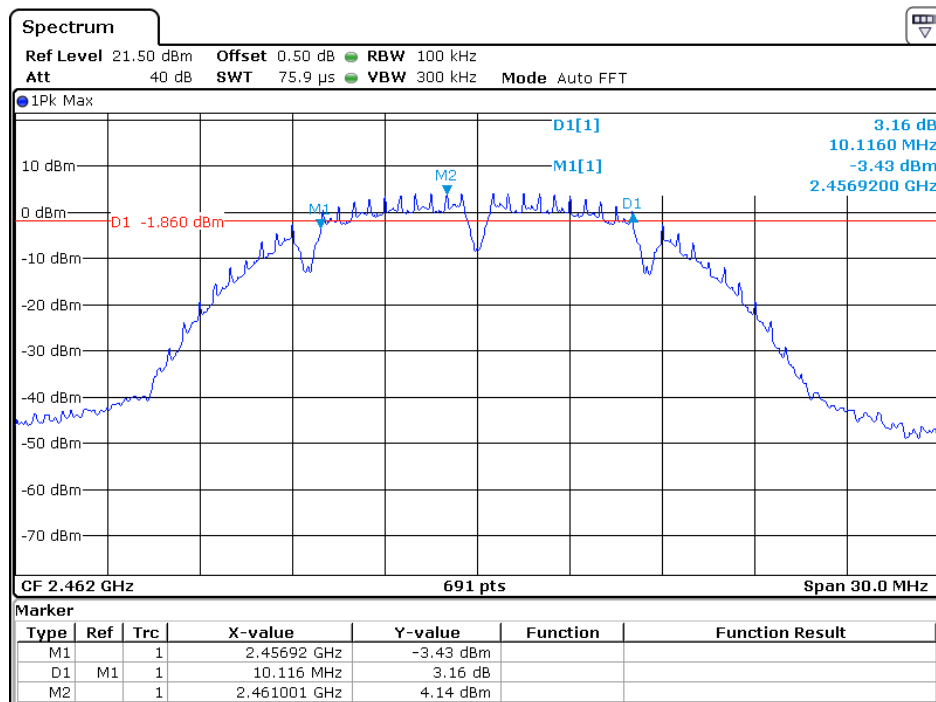


Date: 1 SEP 2020 18:58:15


802.11g

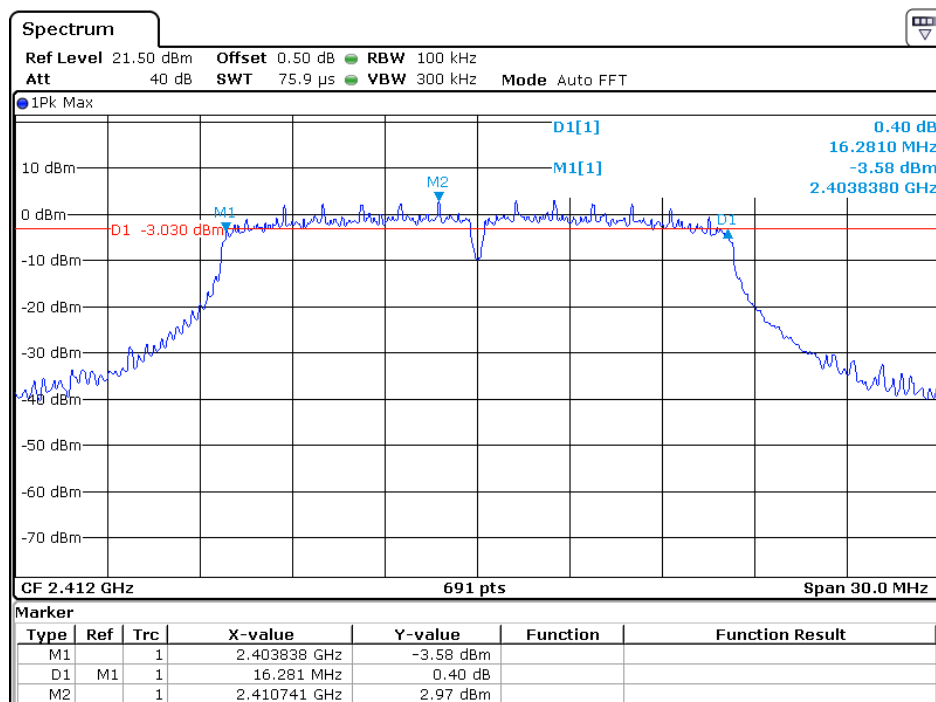

Date: 1 SEP 2020 19:21:17

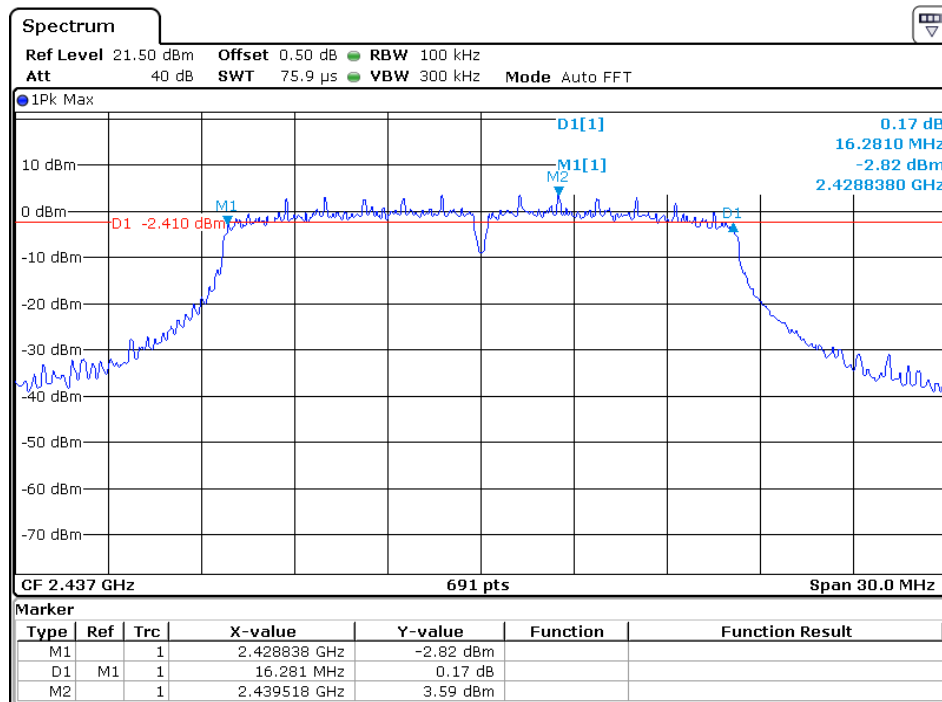


Date: 1 SEP 2020 19:17:47

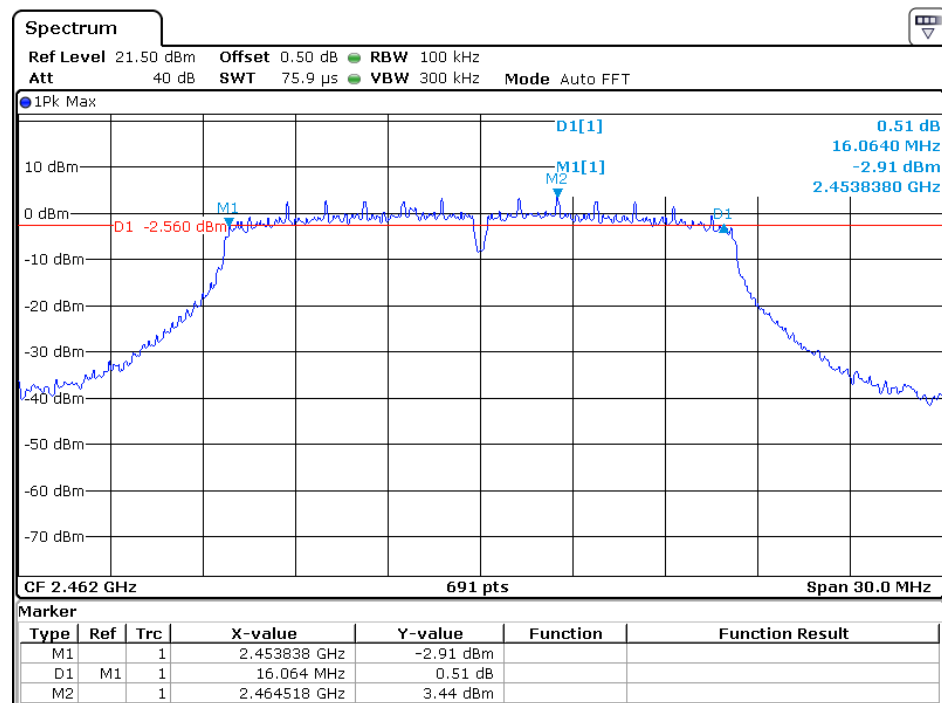


Date: 1 SEP 2020 19:07:16


802.11n-HT20

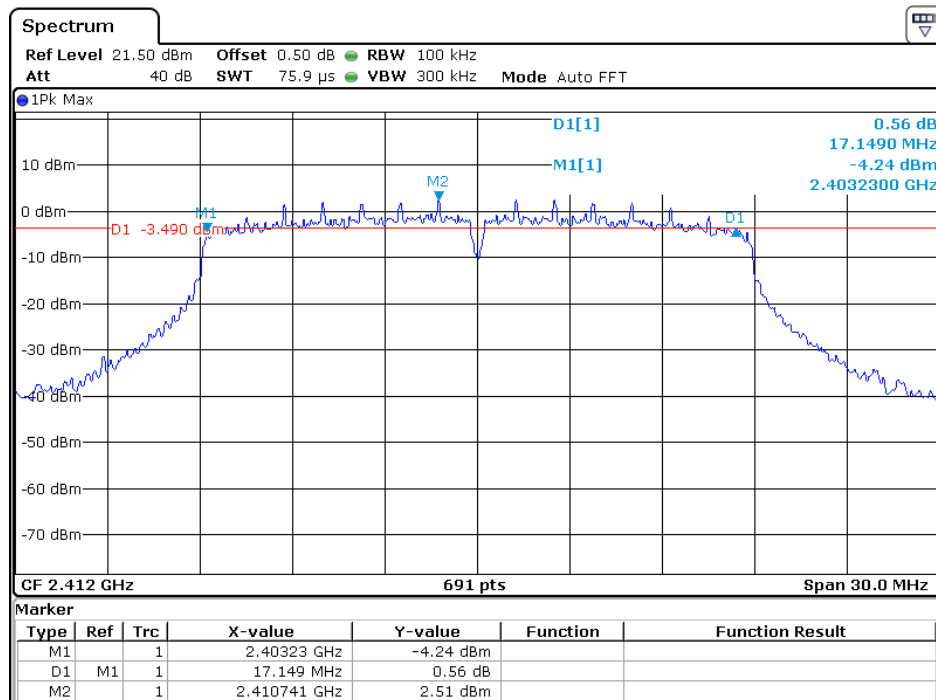

Date: 1 SEP 2020 19:30:15

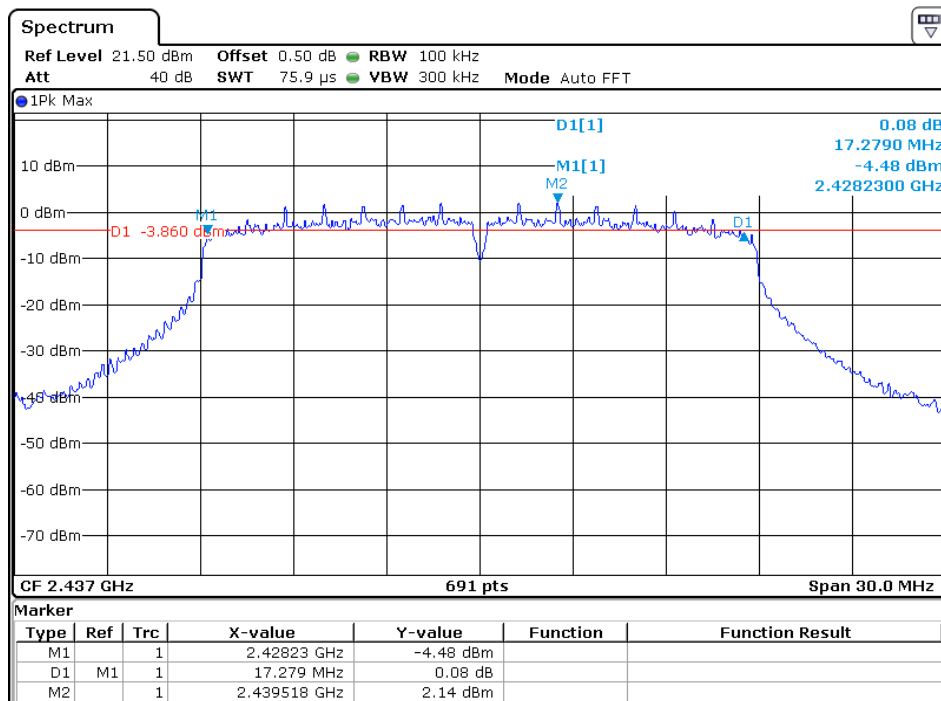


Date: 1 SEP 2020 19:34:26

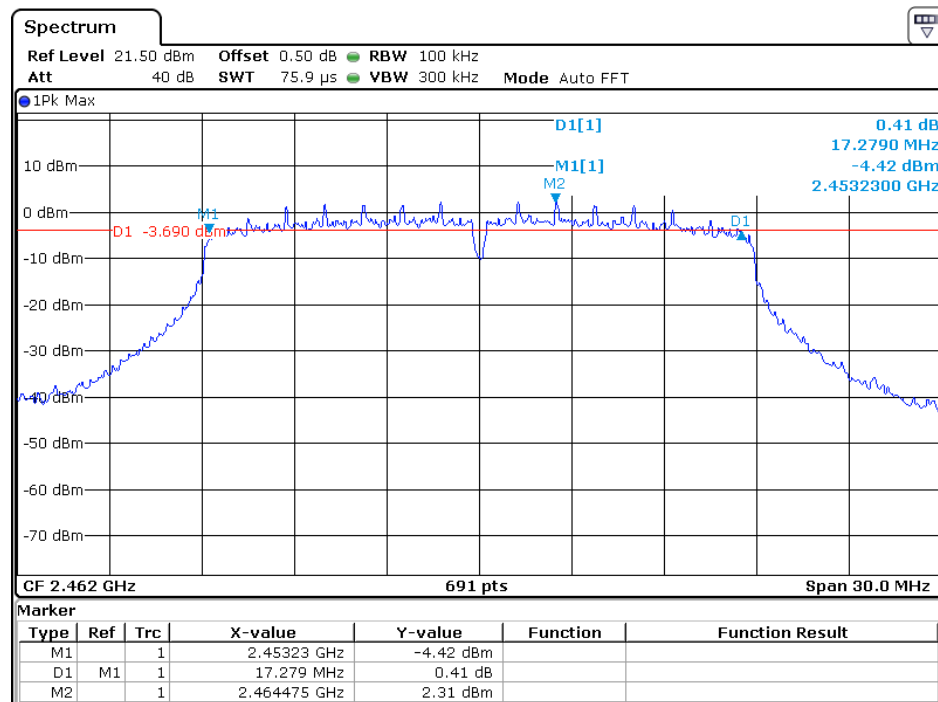


Date: 2 SEP 2020 16:02:44


802.11n-HT40

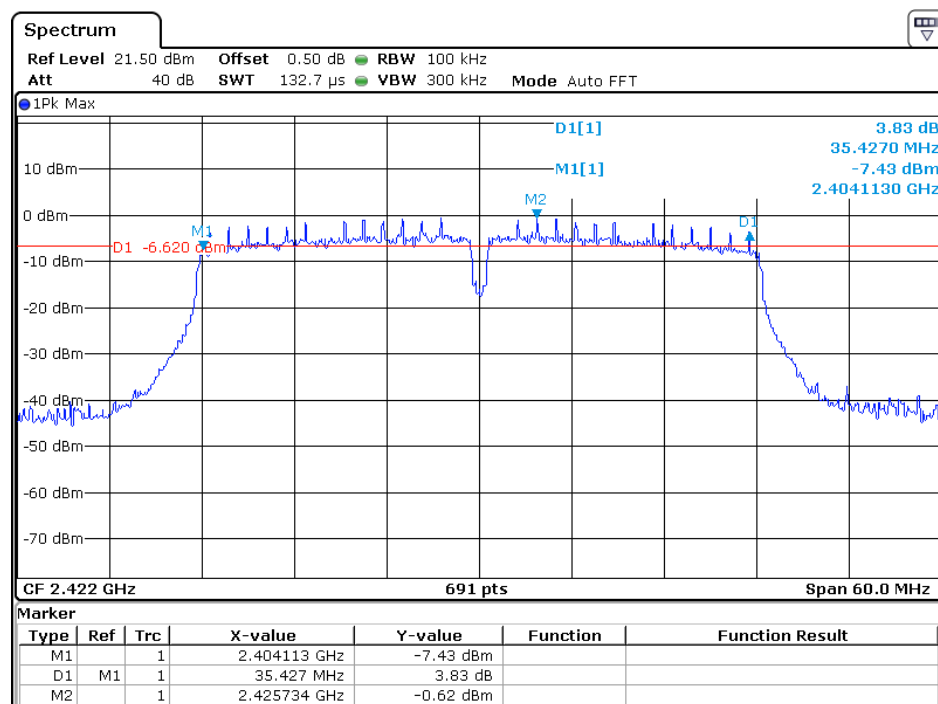

Date: 2 SEP 2020 16:21:15

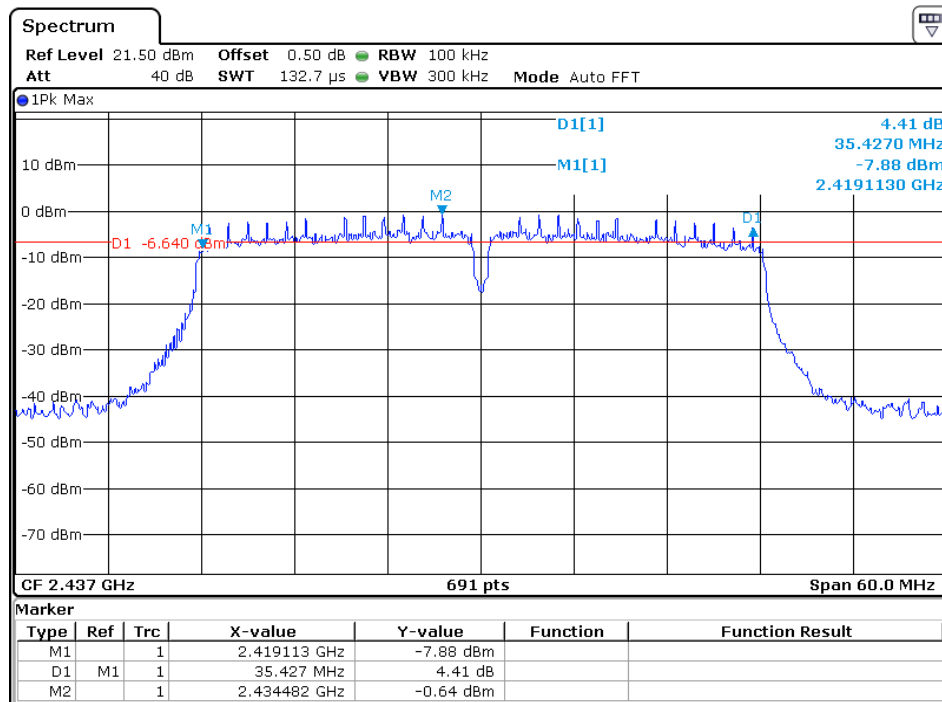

Date: 2 SEP 2020 16:15:23

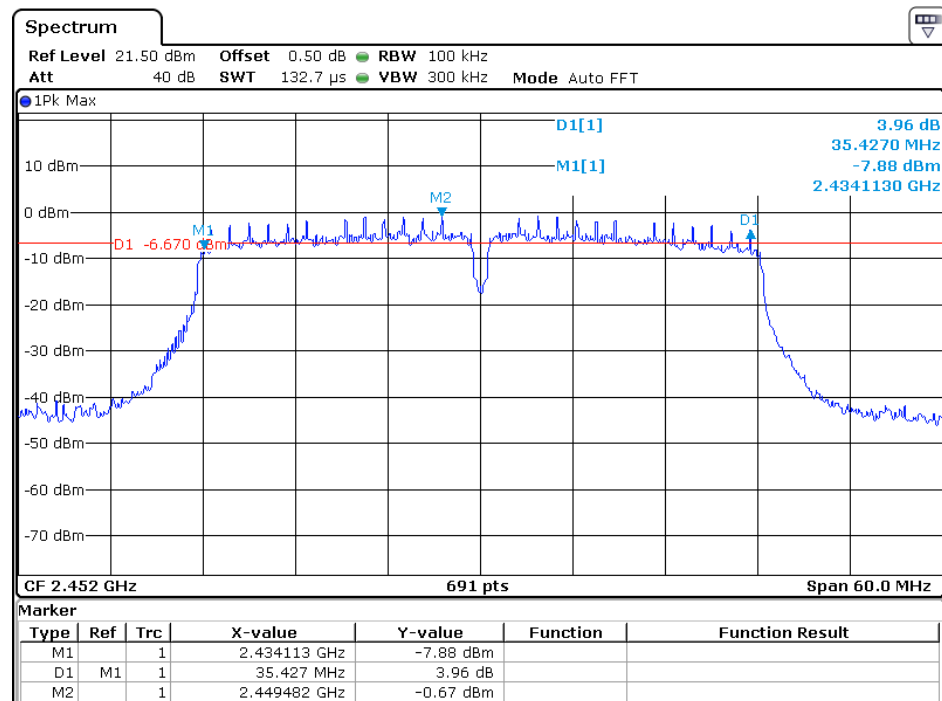

Date: 2 SEP 2020 16:10:59

Applicant: SKYBELL TECHNOLOGIES INC

Date of Test: September 01-September 02, 2020 Model: TRIM2 S

4.3 Maximum Power Density Reading, FCC Rule 15.247(e):

The Measurement Procedure PKPSD was set according to the FCC KDB 558074 D01 v05r02.

Antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function.

Limit: The Power Density does not exceed 8dBm/3 kHz.

Antenna 1:

IEEE 802.11b (CCK, 1Mbps)	
Frequency (MHz)	Power Density with RBW 100KHz
2412	3.35
2437	3.93
2462	3.95


IEEE 802.11g (16QAM, 6Mbps)	
Frequency (MHz)	Power Density with RBW 100KHz
2412	3.98
2437	4.17
2462	3.85

IEEE 802.11n-HT20 (64QAM, 6Mbps)	
Frequency (MHz)	Power Density with RBW 100KHz
2412	3.19
2437	2.89
2462	2.69


IEEE 802.11n-HT40 (64QAM, 13.5Mbps)	
Frequency (MHz)	Power Density with RBW 100KHz
2422	0.52
2437	0.26
2452	0.42

The test plots are attached as below.


802.11b

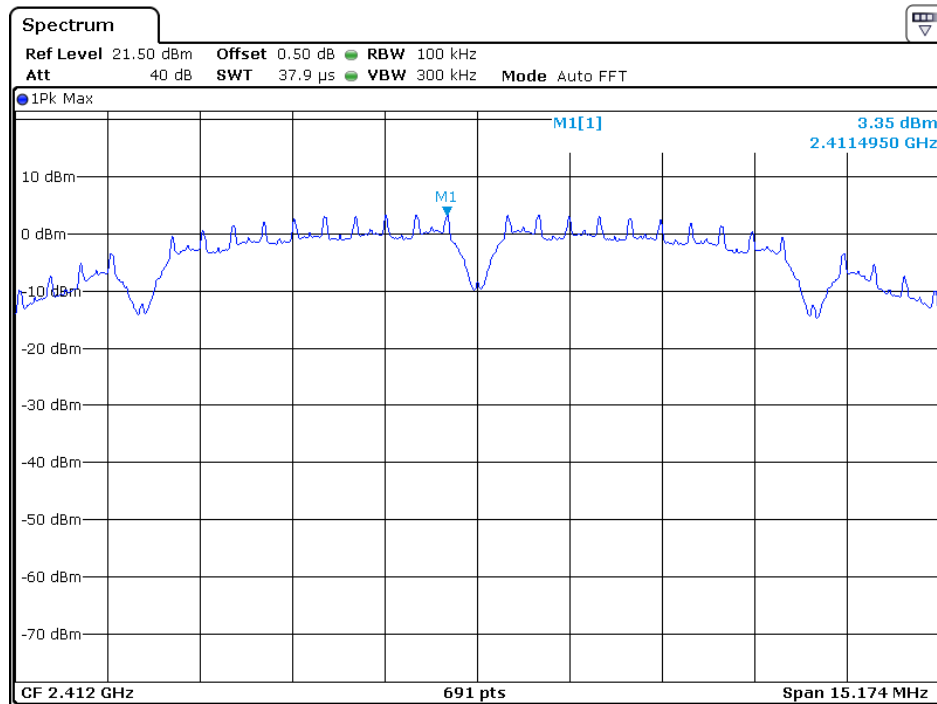

Date: 2 SEP 2020 17:29:41

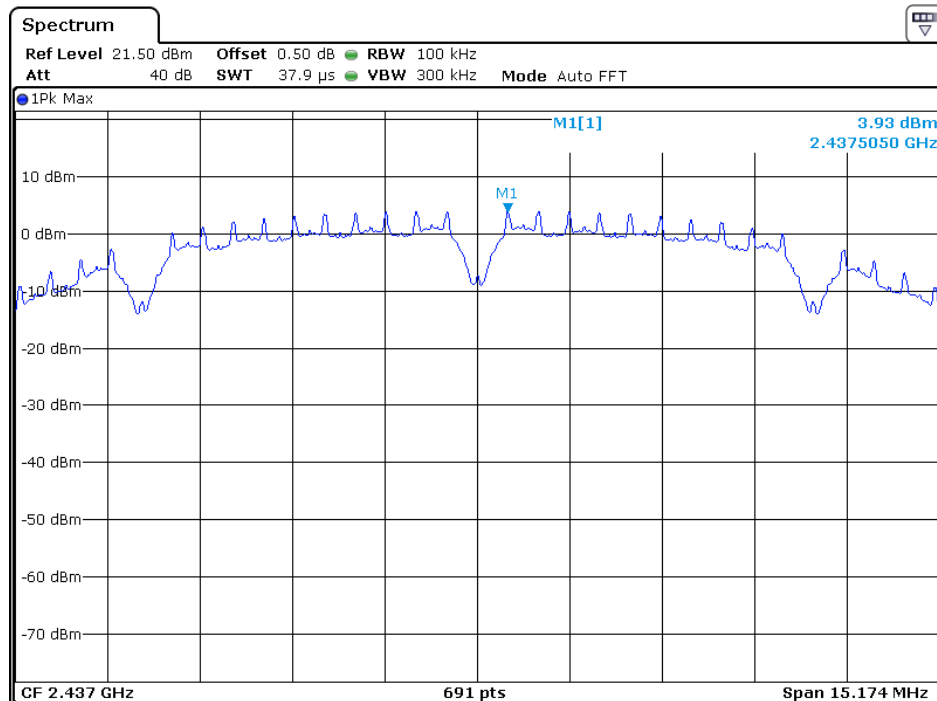


Date: 2 SEP 2020 17:33:40

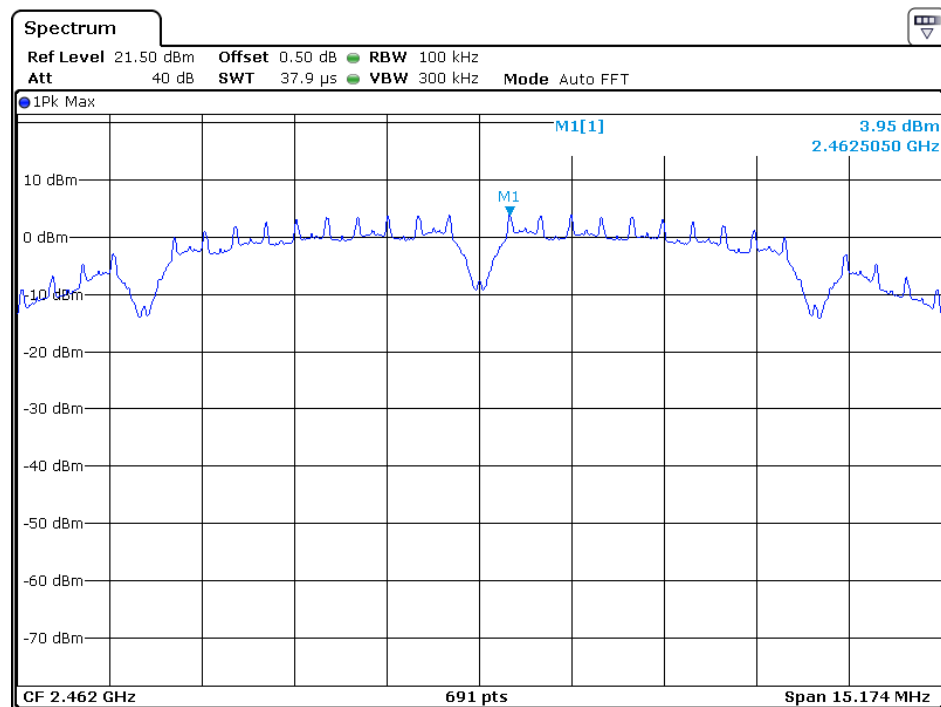


Date: 2 SEP 2020 17:36:58


802.11g

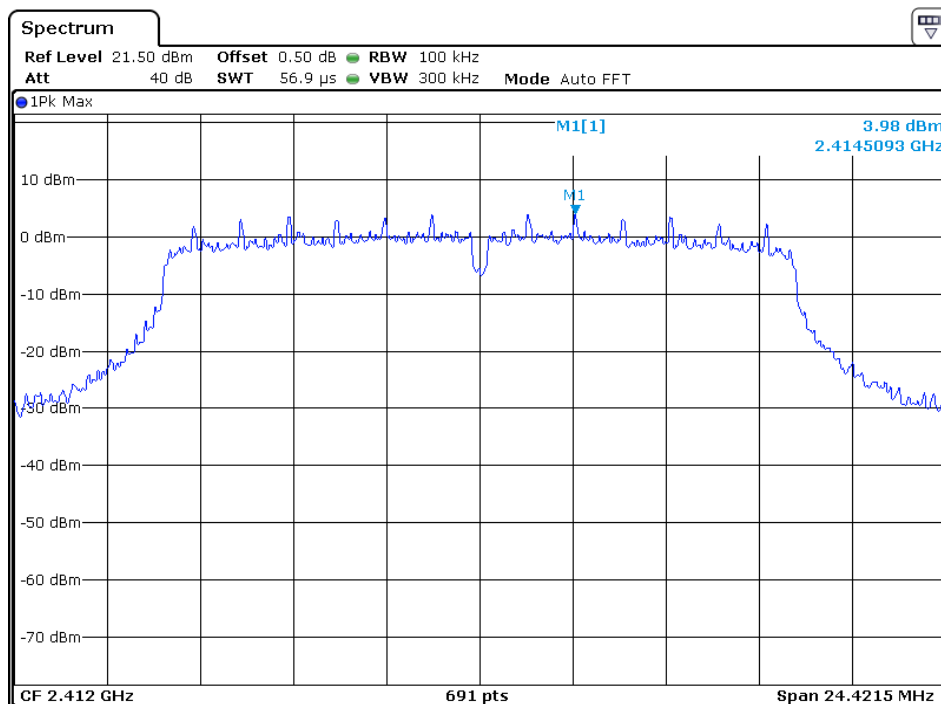

Date: 2 SEP 2020 19:13:41

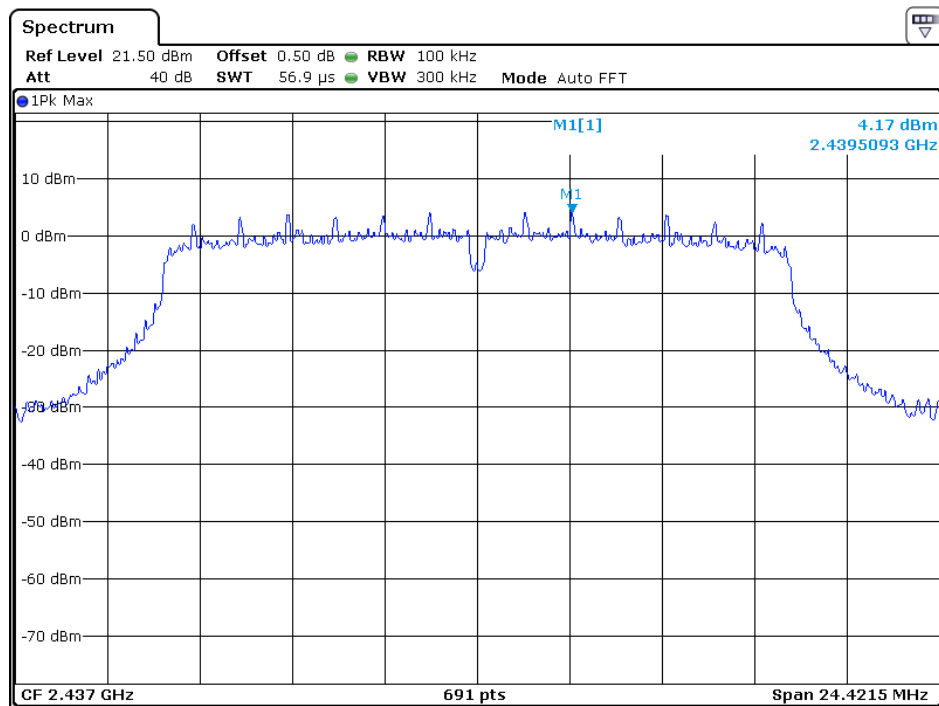


Date: 2 SEP 2020 19:09:30

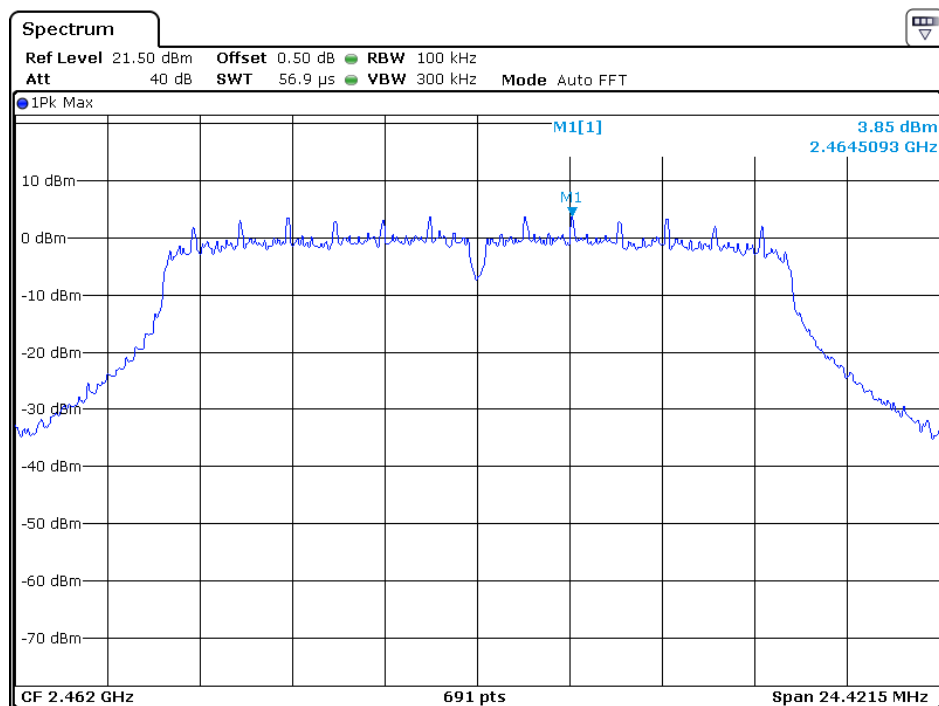


Date: 2 SEP 2020 17:41:44


802.11n-HT20

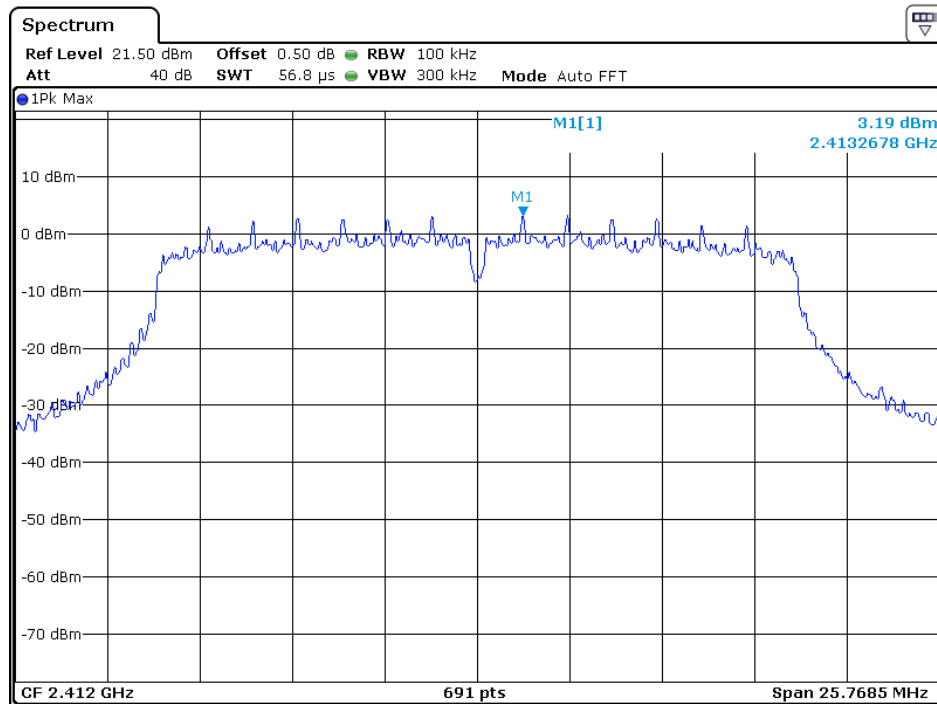

Date: 2 SEP 2020 19:22:11

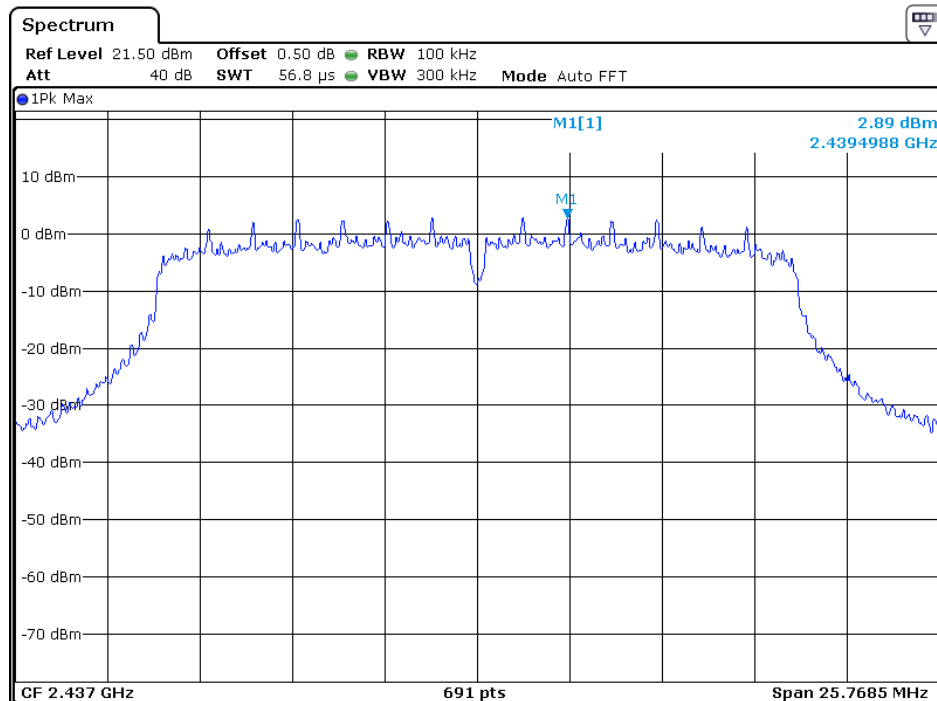


Date: 2 SEP 2020 19:27:13

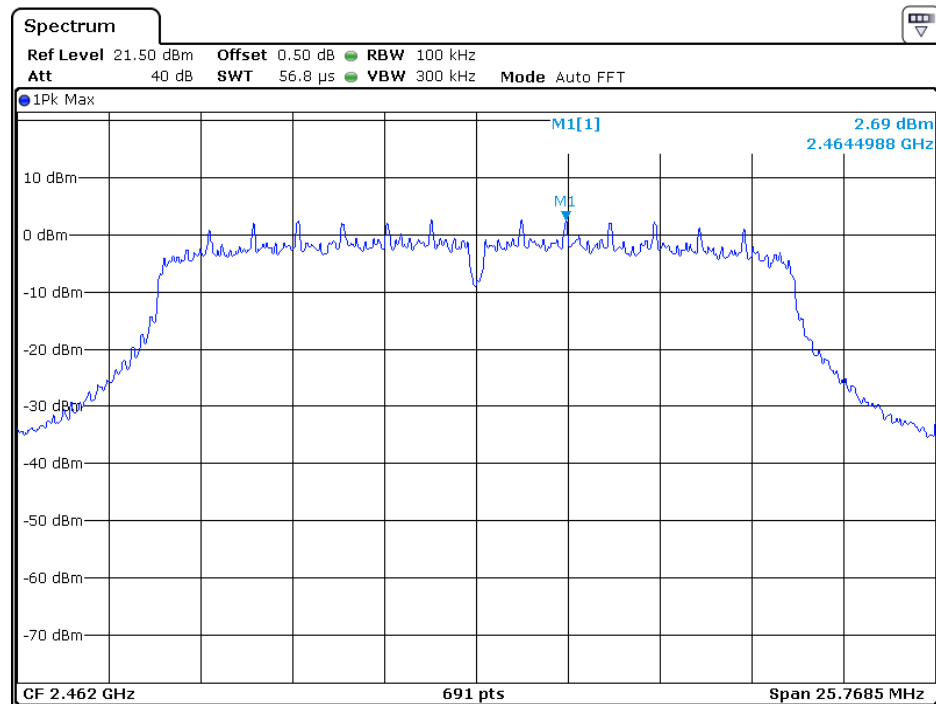


Date: 2 SEP 2020 19:35:59


802.11n-HT40

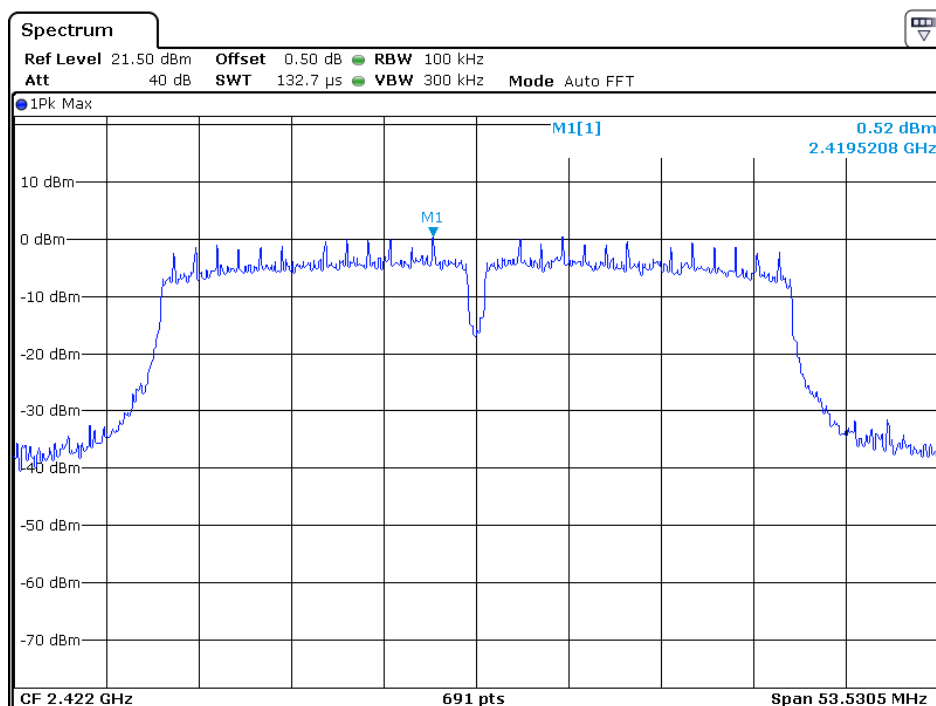

Date: 2 SEP 2020 20:05:56

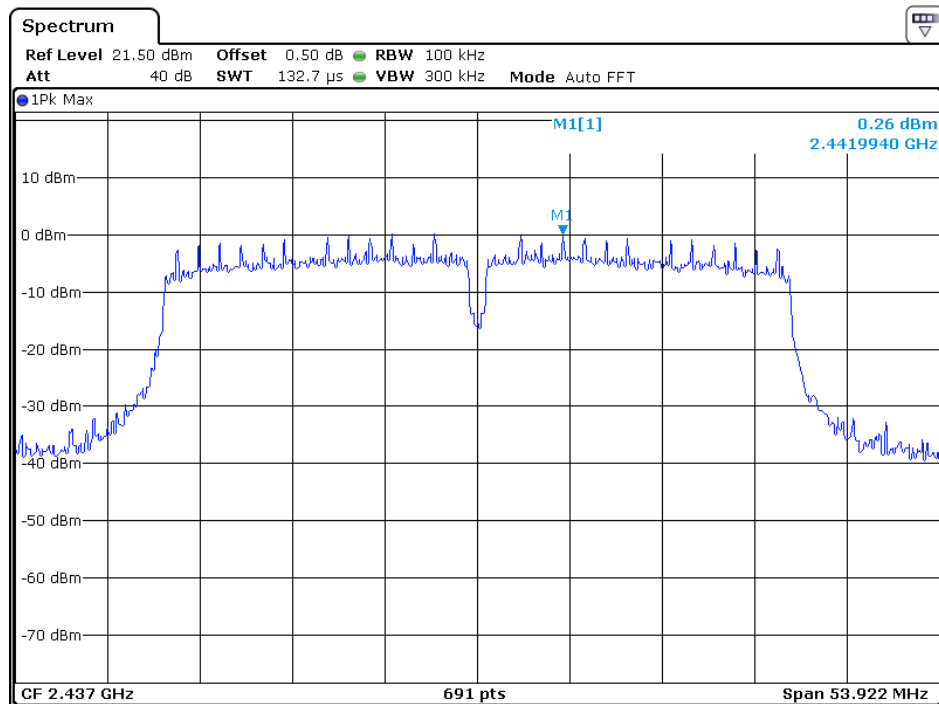

Date: 2 SEP 2020 19:54:05

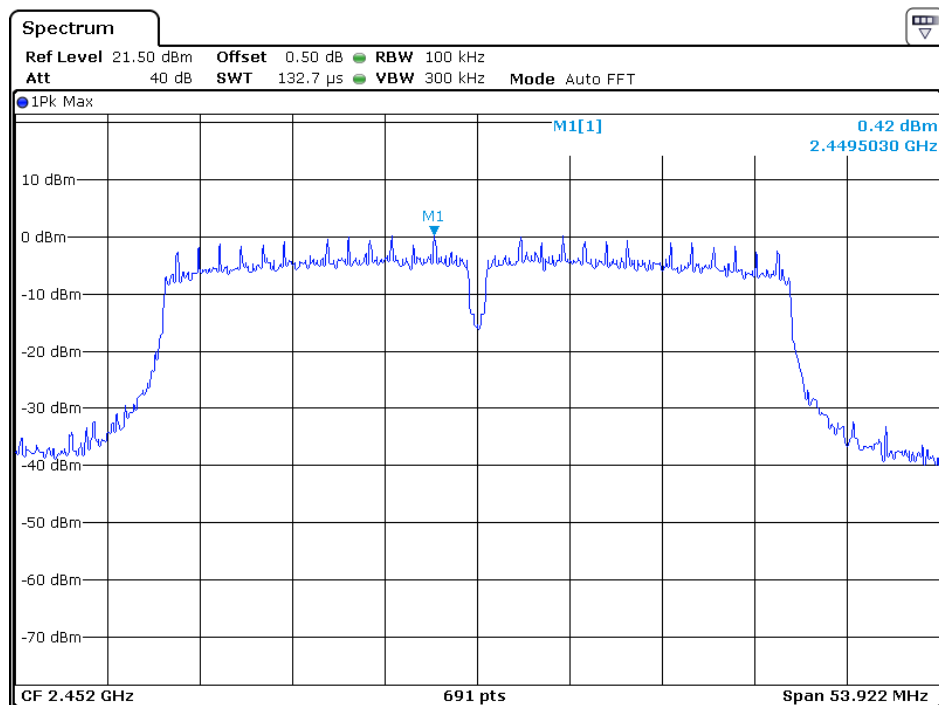

Date: 2 SEP 2020 19:50:10

Antenna 2:

IEEE 802.11b (CCK, 1Mbps)	
Frequency (MHz)	Power Density with RBW 100KHz
2412	4.76
2437	4.03
2462	4.14


IEEE 802.11g (16QAM, 6Mbps)	
Frequency (MHz)	Power Density with RBW 100KHz
2412	2.97
2437	3.37
2462	3.35

IEEE 802.11n-HT20 (64QAM, 6Mbps)	
Frequency (MHz)	Power Density with RBW 100KHz
2412	2.33
2437	2.83
2462	2.01


IEEE 802.11n-HT40 (64QAM, 13.5Mbps)	
Frequency (MHz)	Power Density with RBW 100KHz
2422	-0.69
2437	-0.72
2452	-0.65

The test plots are attached as below.


802.11b

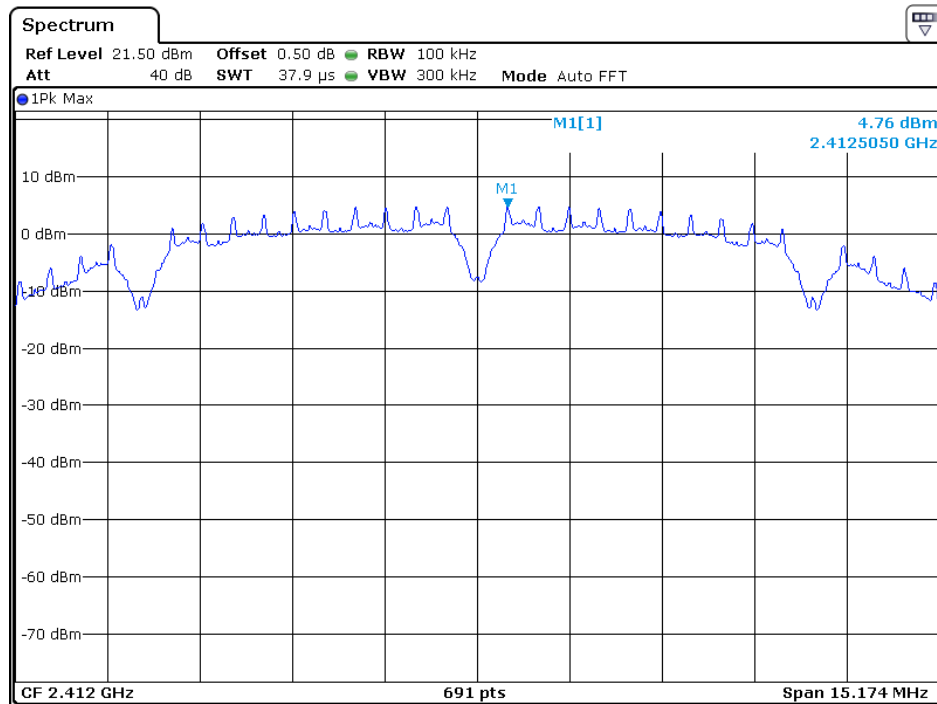

Date: 1 SEP 2020 18:51:20

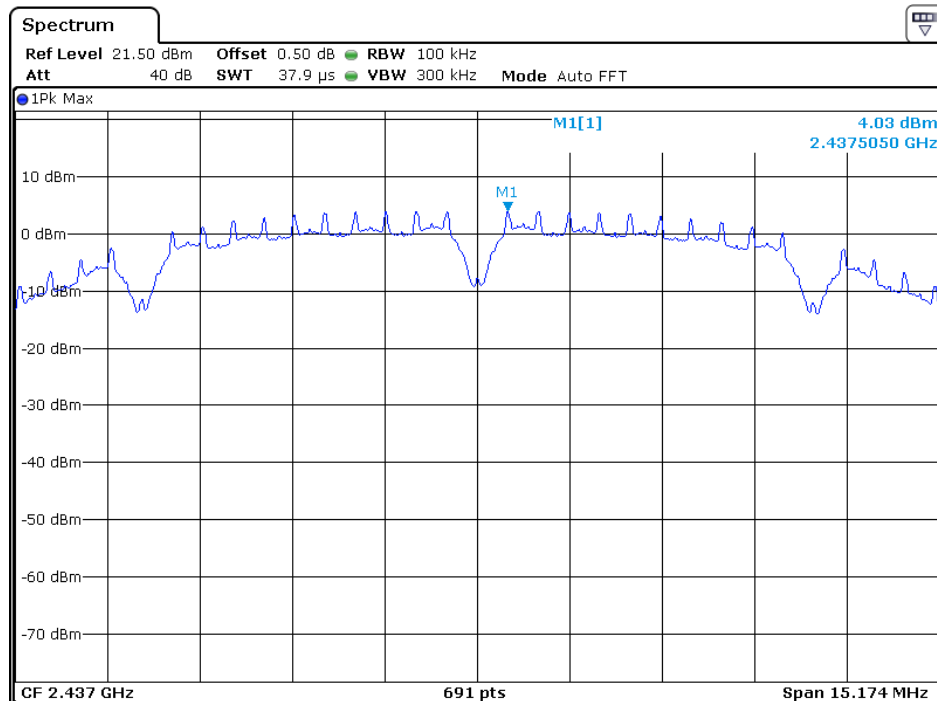


Date: 1 SEP 2020 18:56:00

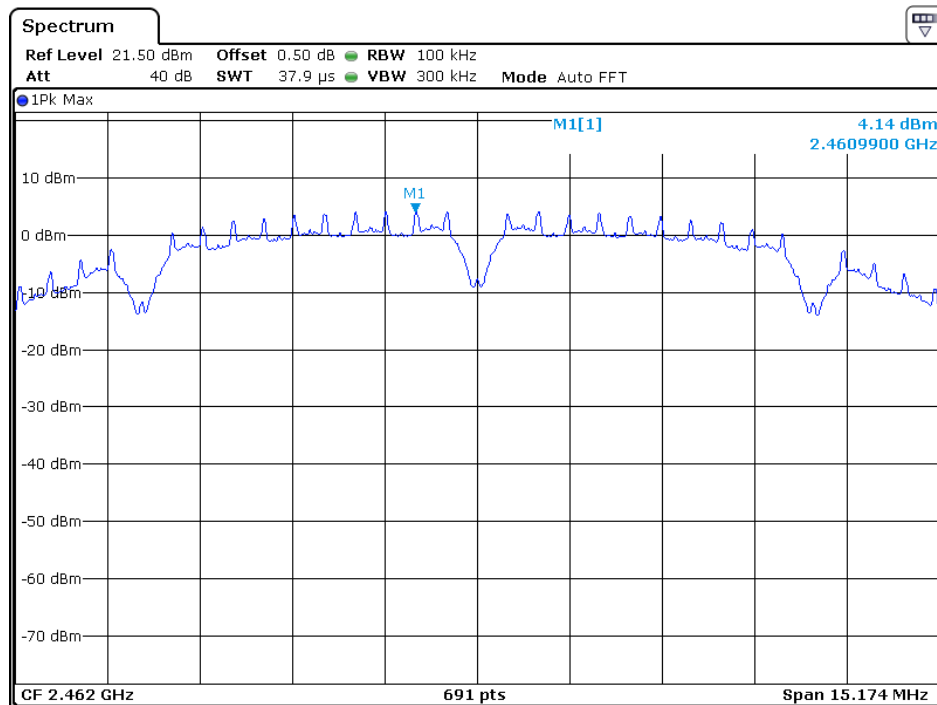


Date: 1 SEP 2020 18:58:47


802.11g

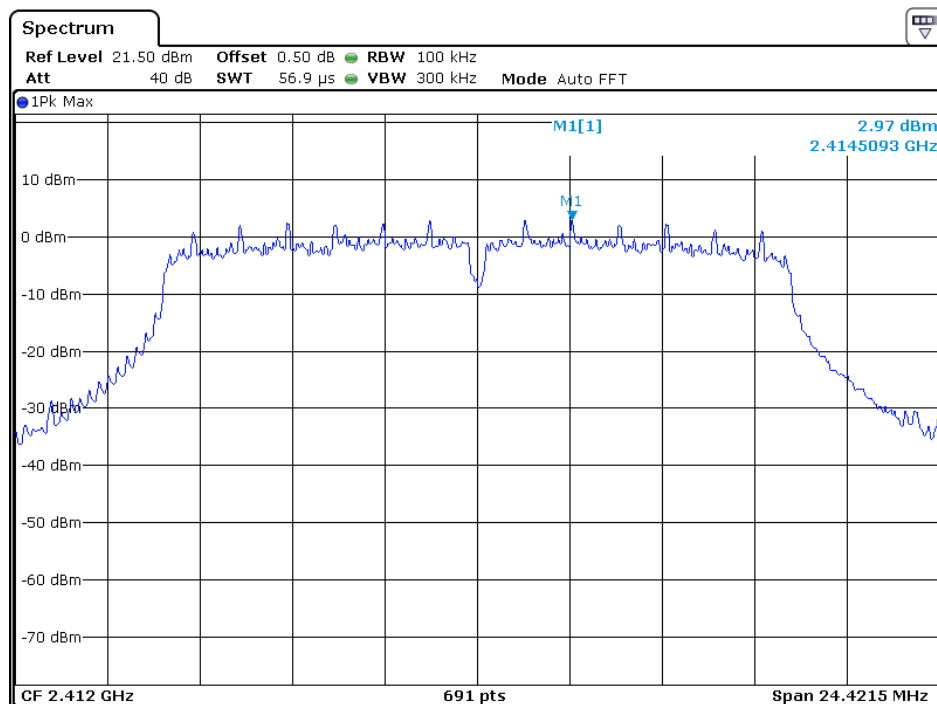

Date: 1 SEP 2020 19:21:58

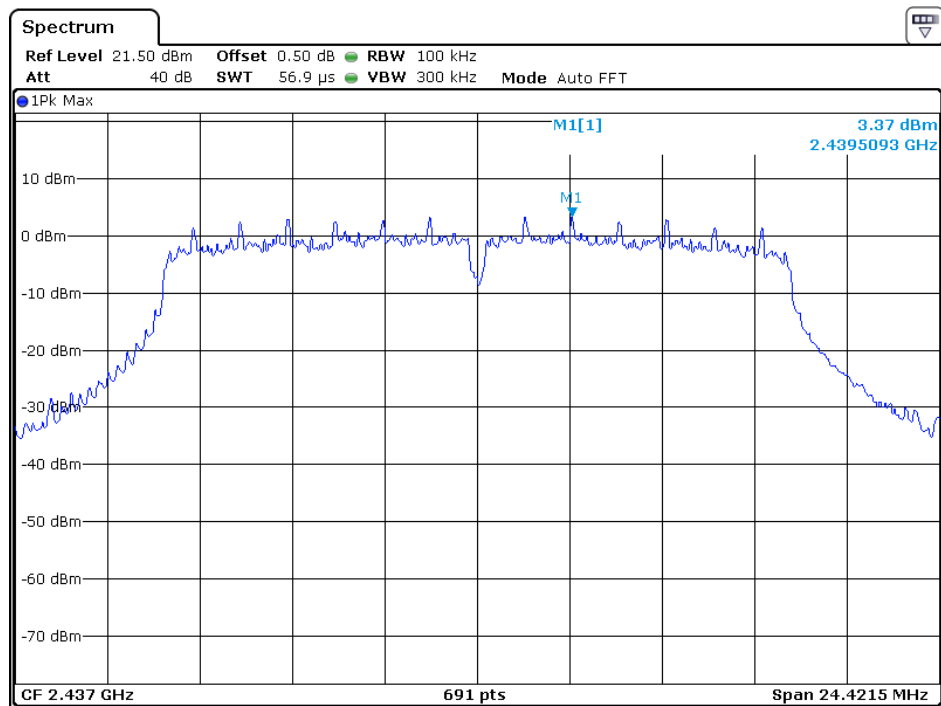


Date: 1 SEP 2020 19:18:34

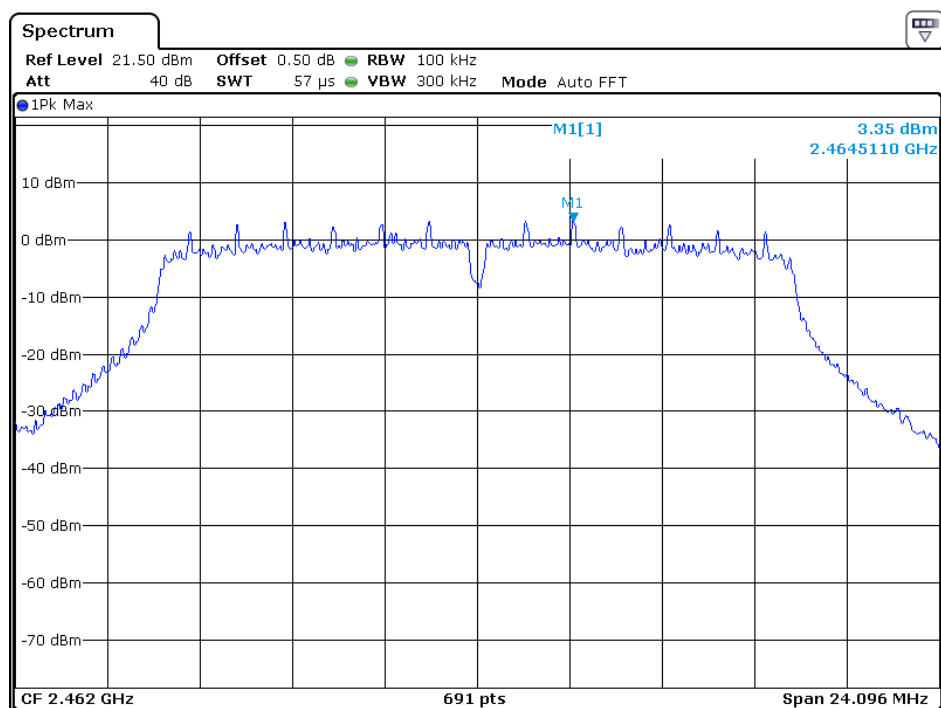


Date: 1 SEP 2020 19:08:11


802.11n-HT20

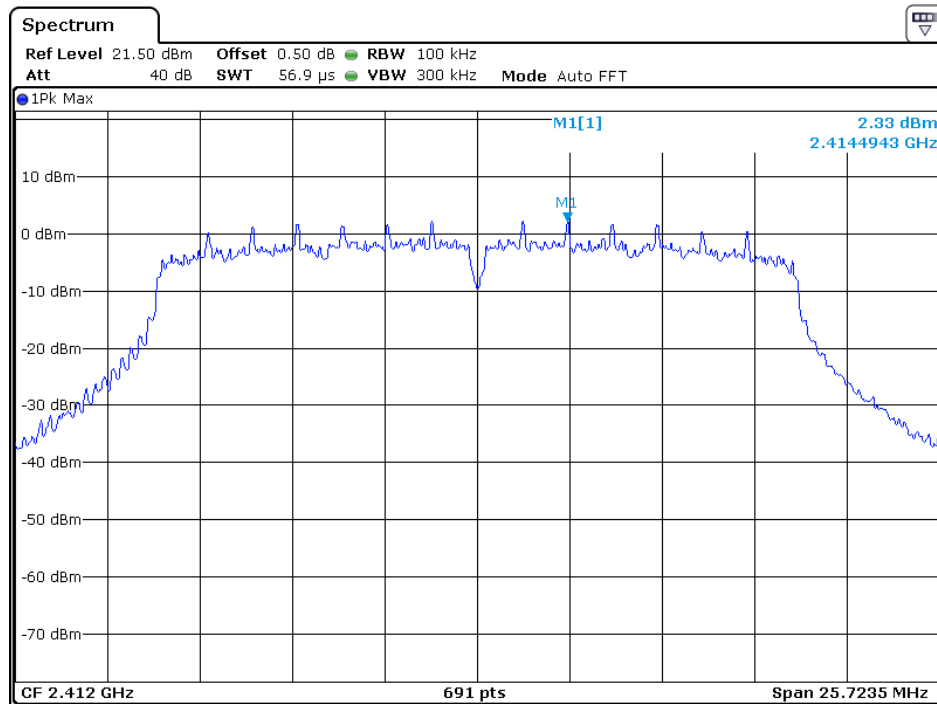

Date: 1 SEP 2020 19:31:01

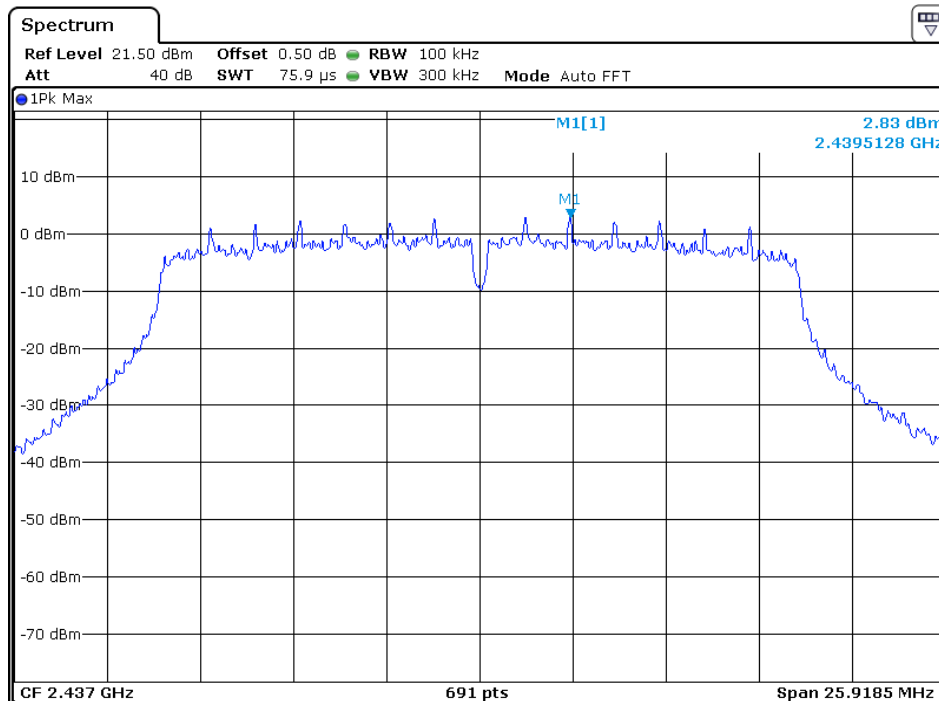


Date: 2 SEP 2020 15:59:28

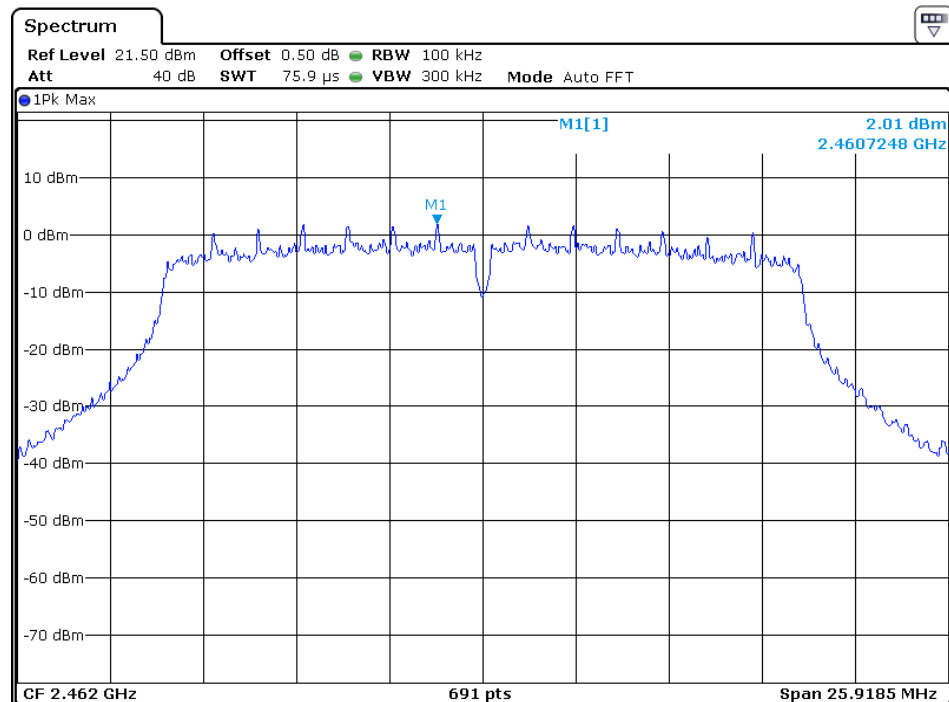


Date: 2 SEP 2020 16:03:20


802.11n-HT40

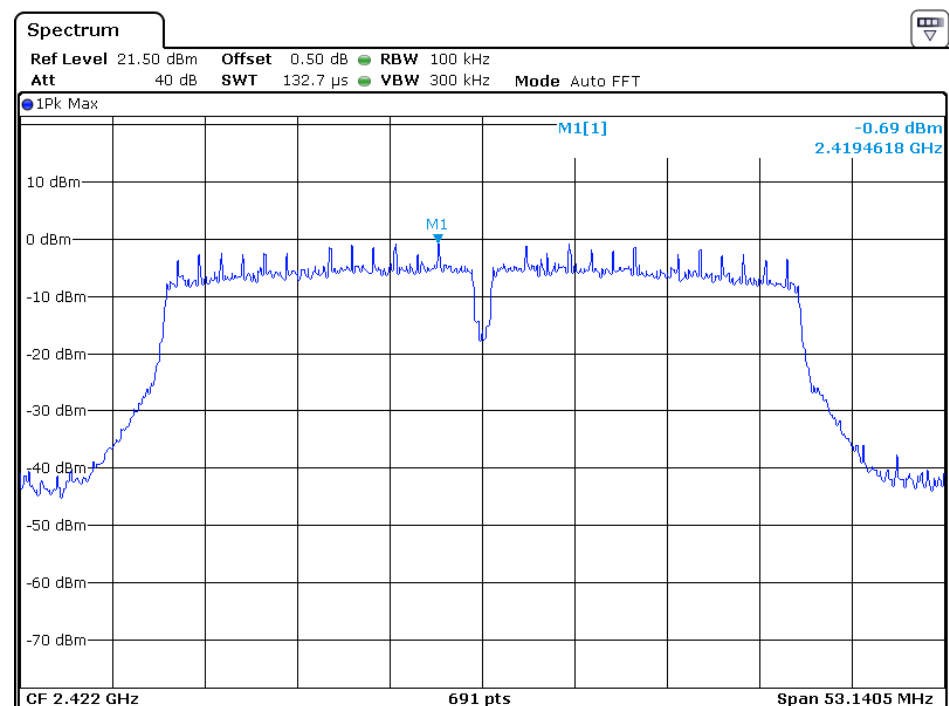

Date: 2 SEP 2020 16:22:03

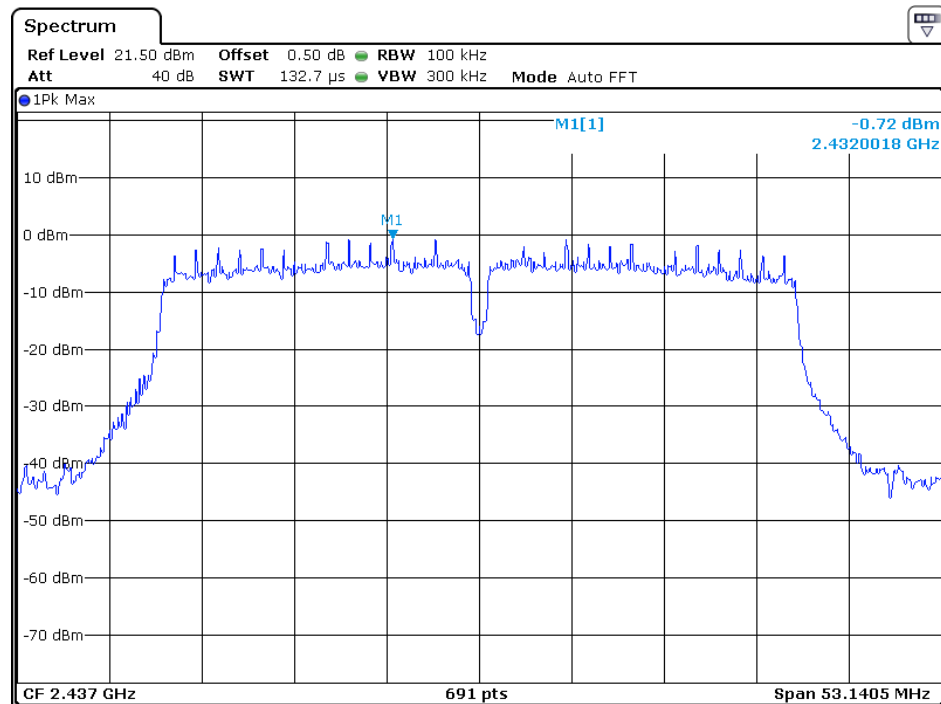

Date: 2 SEP 2020 16:16:04

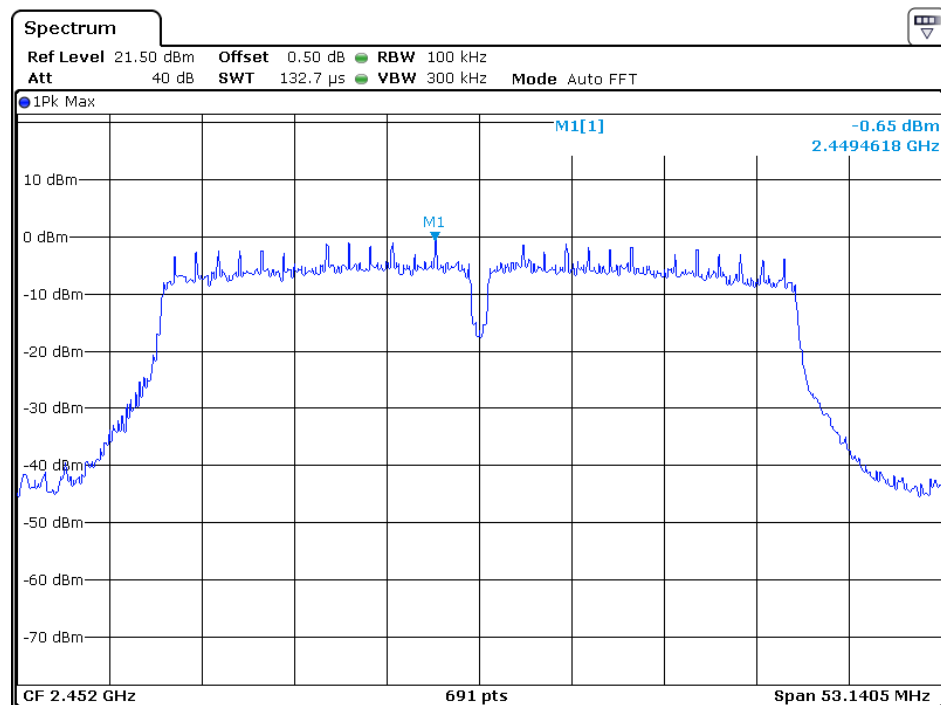

Date: 2 SEP 2020 16:11:56

Applicant: SKYBELL TECHNOLOGIES INC

Date of Test: September 01- September 02, 2020 Model: TRIM2 S

4.4 Out of Band Conducted Emissions, FCC Rule 15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. The Measurement Procedure was set according to the FCC KDB 558074 D01 v05r02.

All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the passband.

Refer to the attached test plots for out of band conducted emissions data with rate of 1Mbps for 802.11b and 6Mbps for 802.11g and 6Mbps for 802.11n-HT20 and 13.5Mbps for 802.11n-HT40.


The test plots showed all spurious emission up to the tenth harmonic were measured and they were found to be at least 20 dB below the highest level of the desired power in the passband.

The test plots are attached as below.


Antenna 1:

802.11b


Channel 01 (2412MHz) Reference Level: 3.35dBm

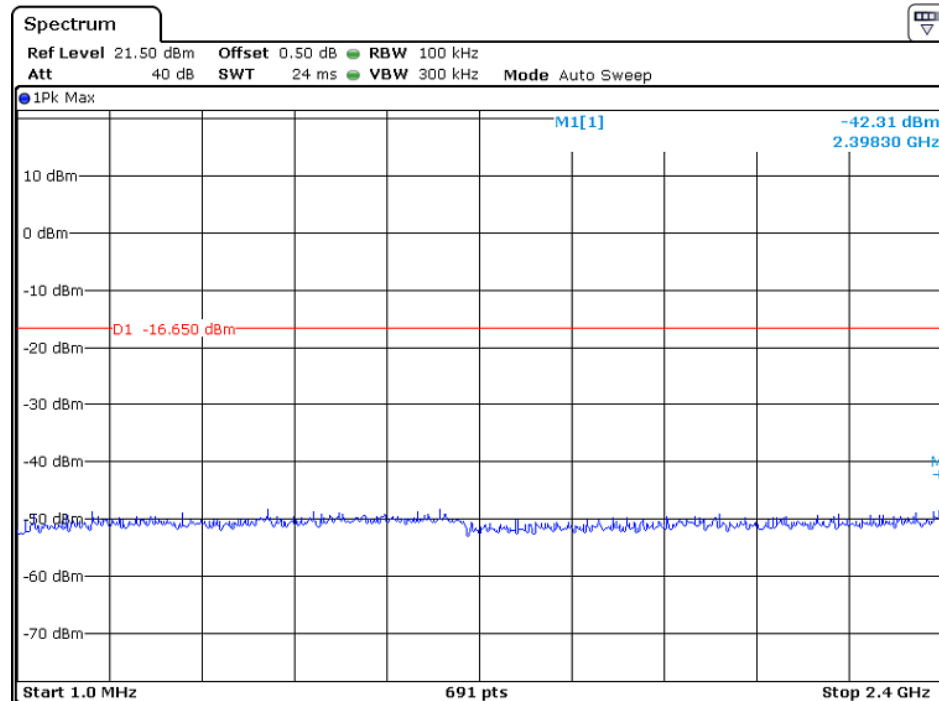

Date: 2.SEP.2020 17:30:26

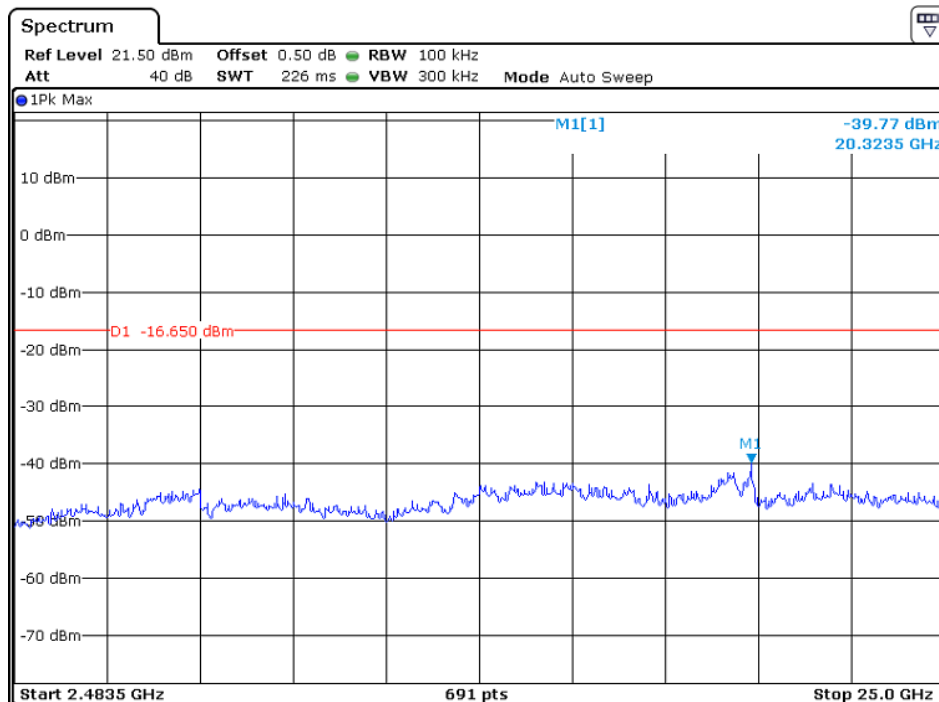


Date: 2.SEP.2020 17:30:55

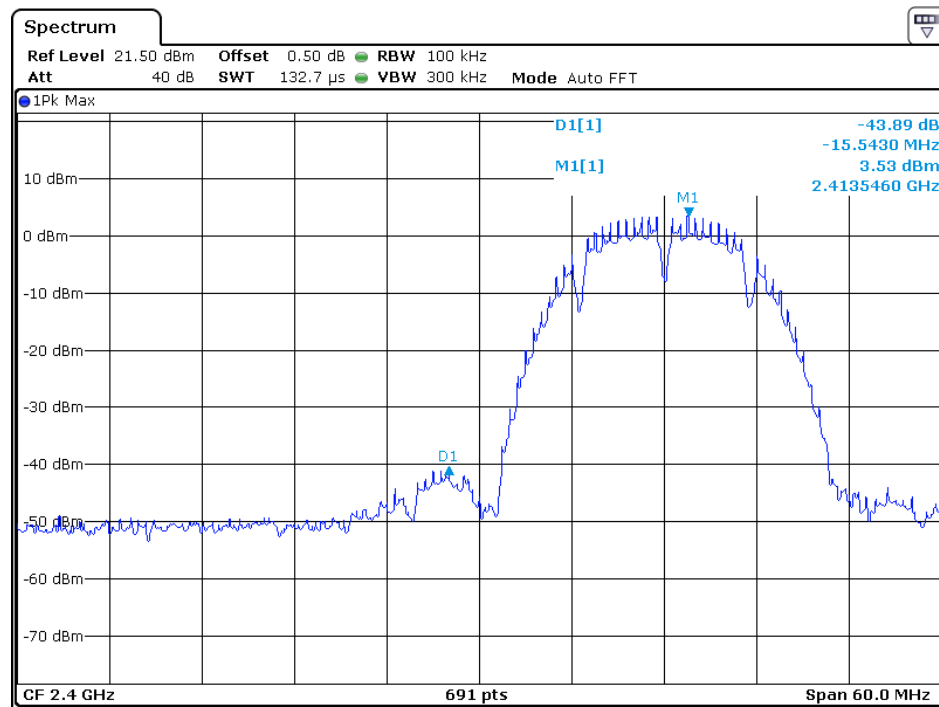

Date: 2 SEP 2020 17:27:16

Channel 06 (2437MHz) Reference Level: 3.93dBm

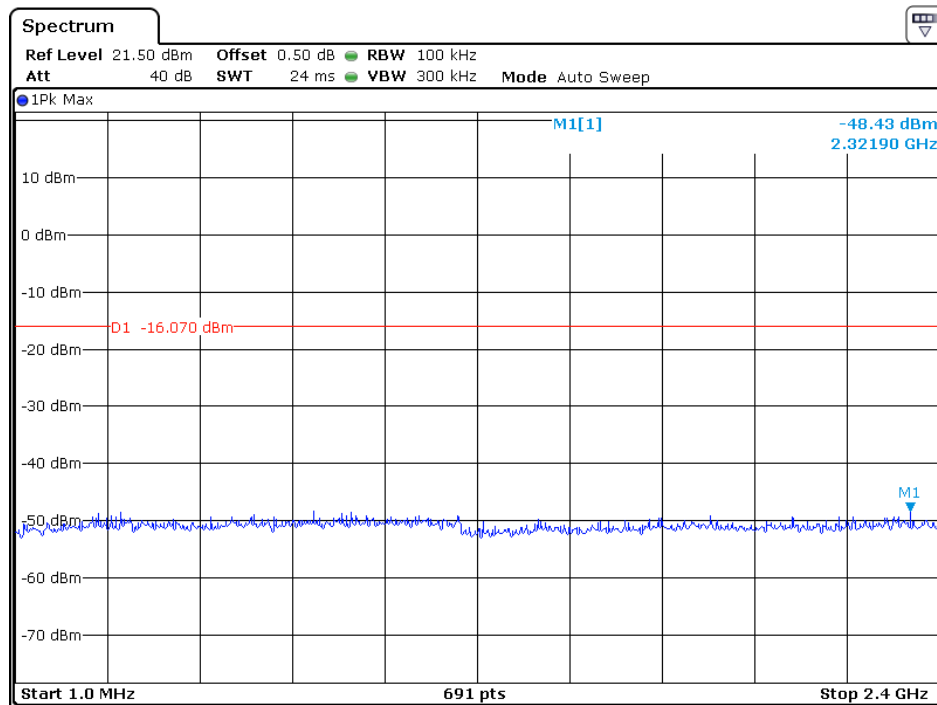


Date: 2 SEP 2020 17:34:41




Date: 2 SEP 2020 17:35:09


Channel 11 (2462MHz) Reference Level: 3.95dBm

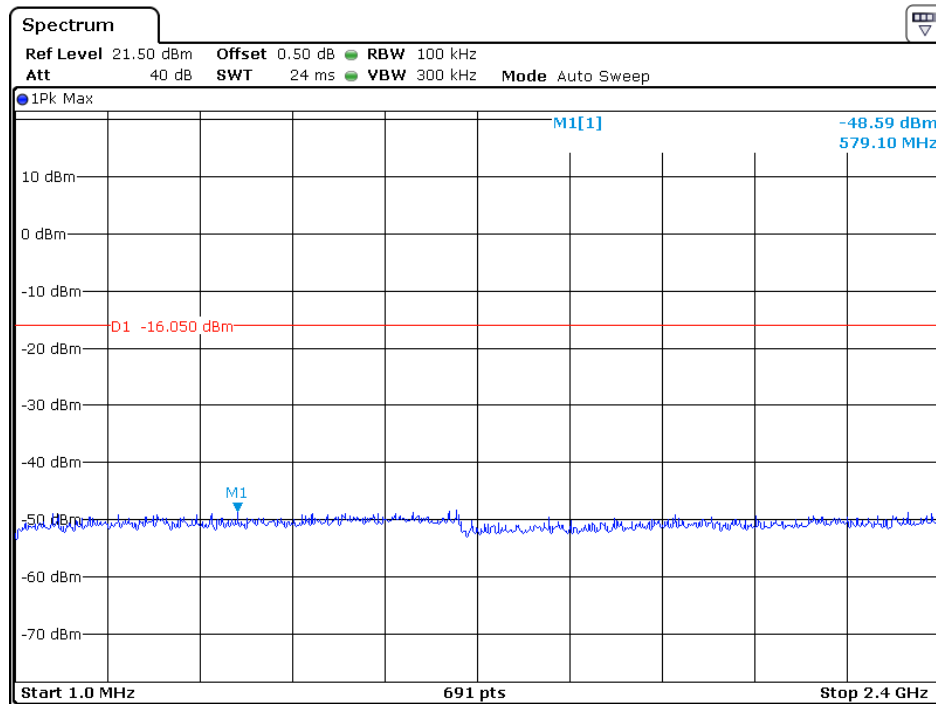

Date: 2.SEP.2020 17:37:46

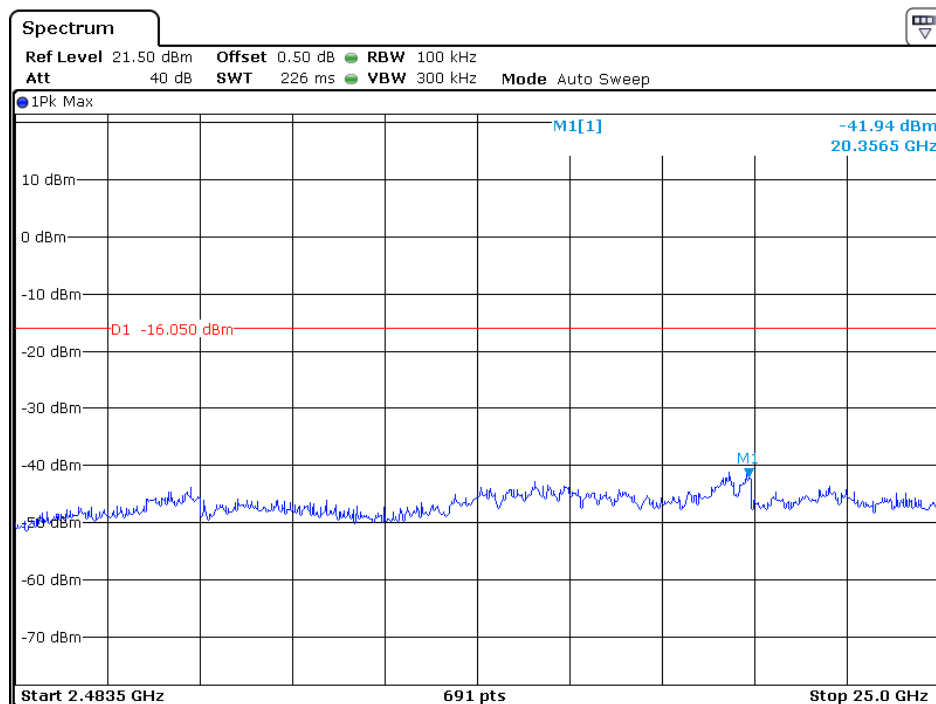


Date: 2.SEP.2020 17:38:10

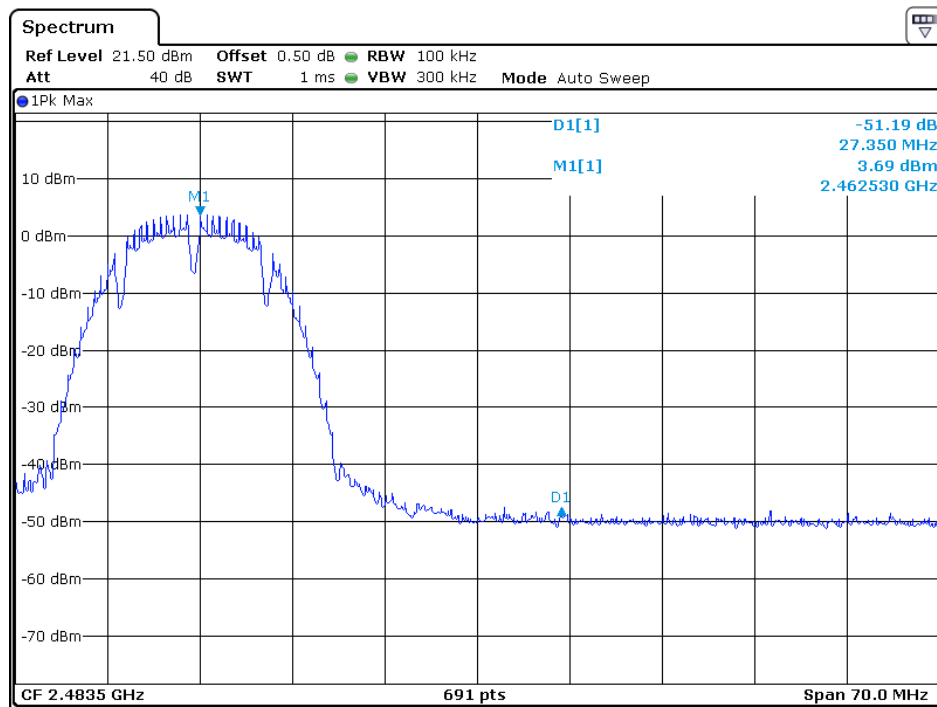


Date: 2 SEP 2020 17:38:30

802.11g


Channel 01 (2412MHz) Reference Level: 3.98dBm

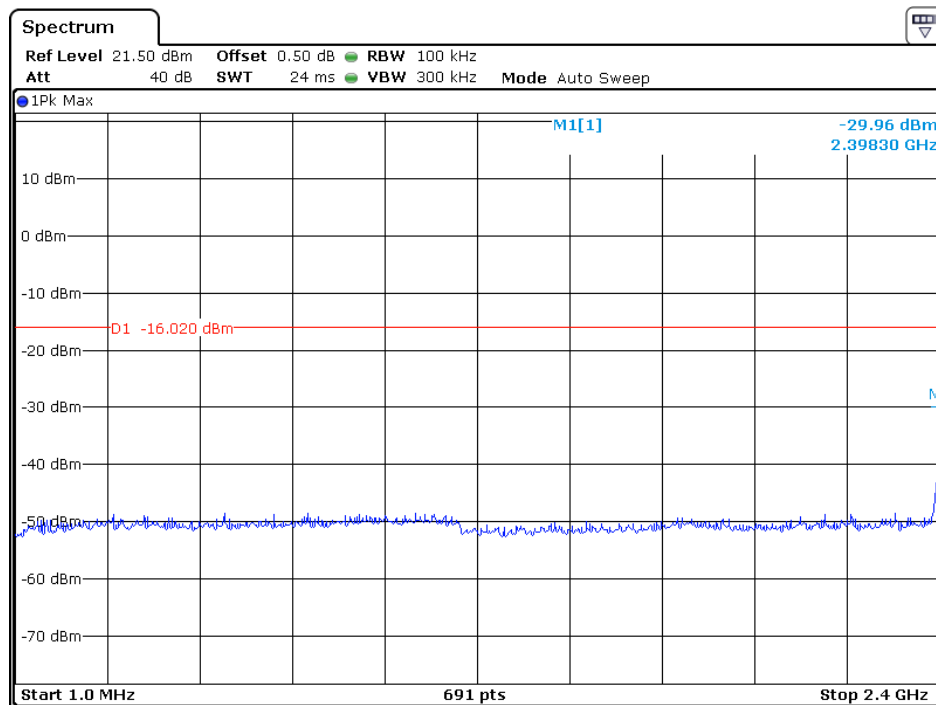

Date: 2 SEP 2020 19:14:40

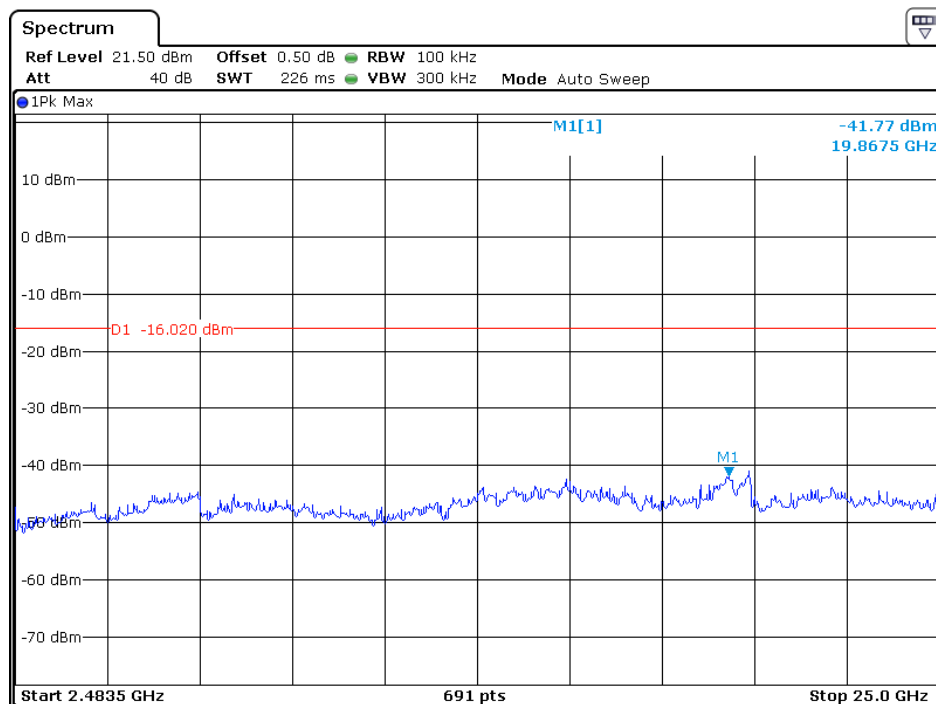


Date: 2 SEP 2020 19:18:15

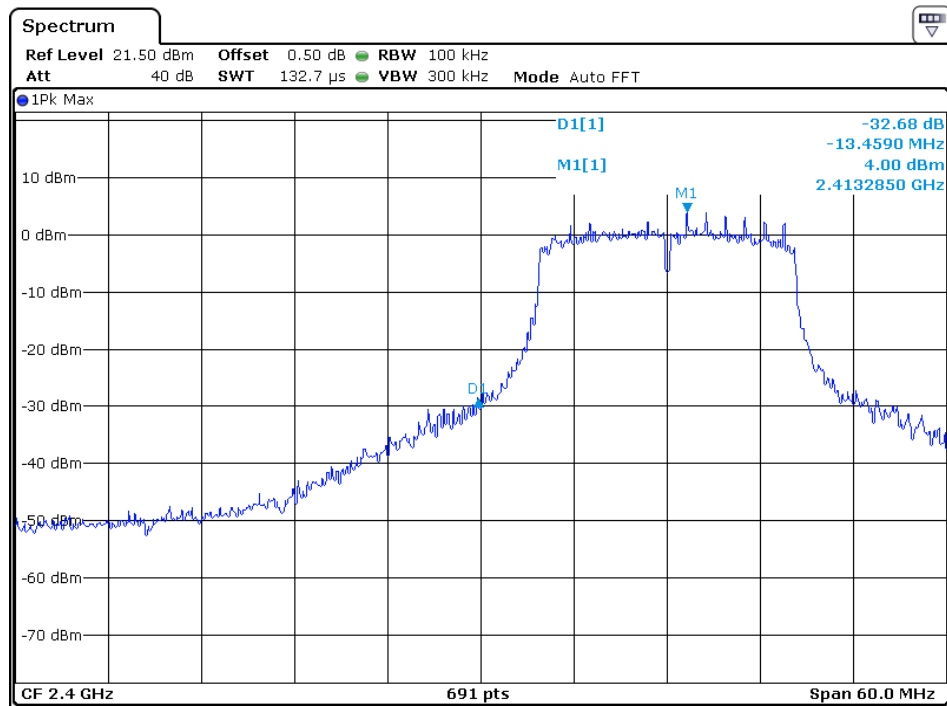


Date: 2 SEP 2020 19:11:31

Channel 06 (2437MHz) Reference Level: 4.17dBm

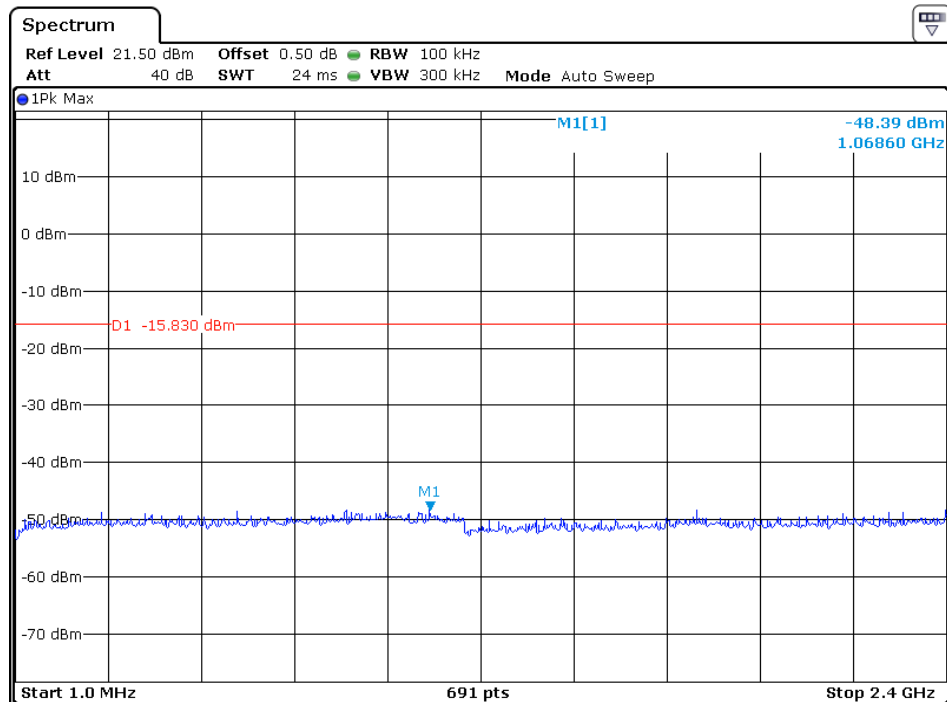


Date: 2 SEP 2020 19:10:25

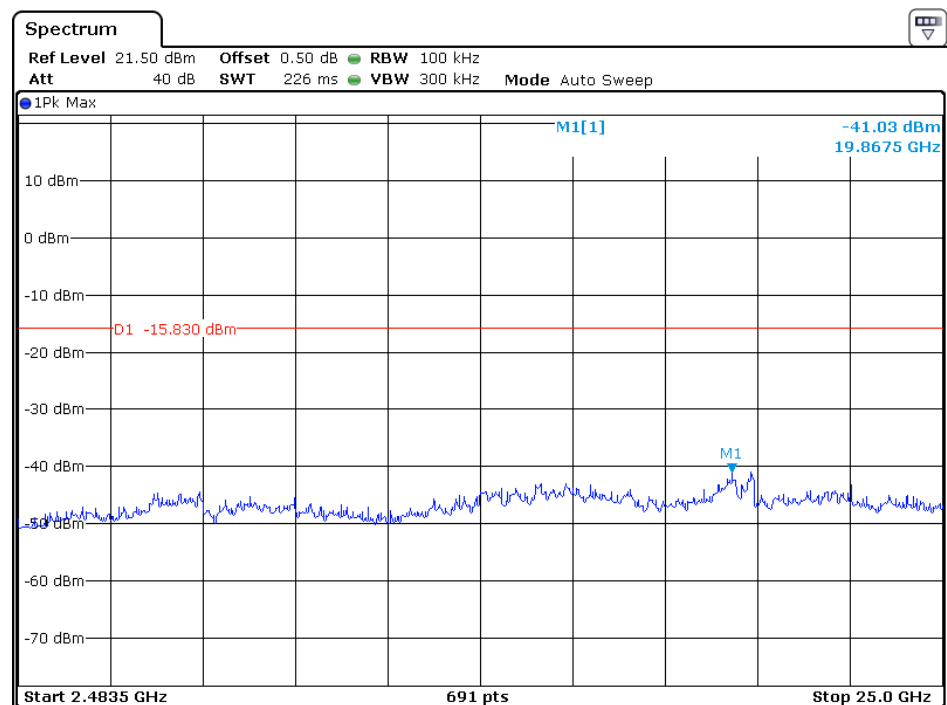


Date: 2 SEP 2020 19:10:50


Channel 11 (2462MHz) Reference Level: 3.85dBm

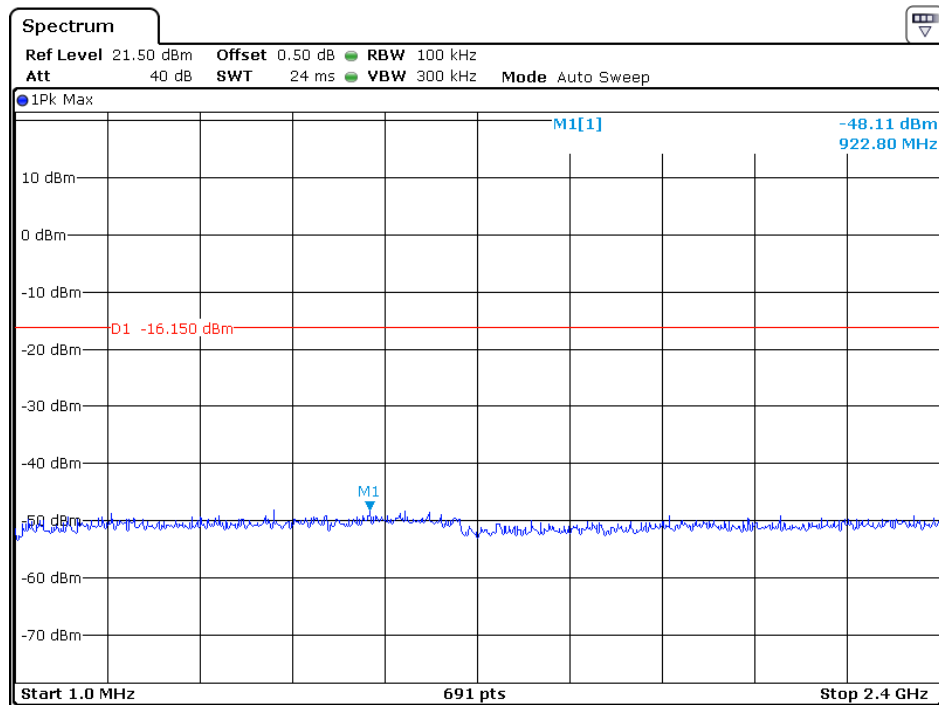

Date: 2 SEP 2020 19:06:31

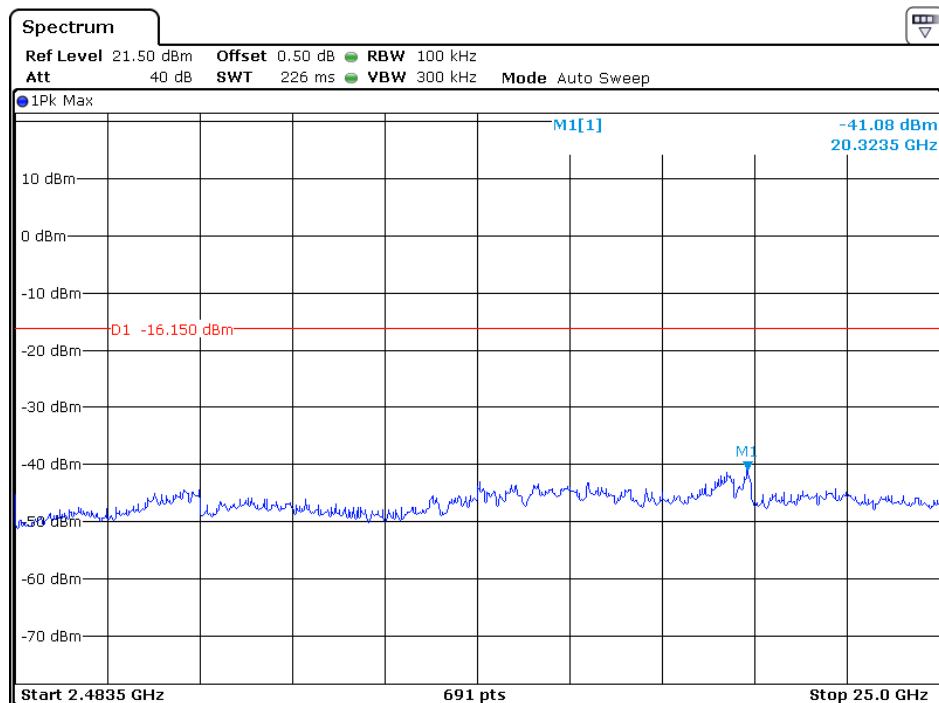


Date: 2 SEP 2020 19:06:55

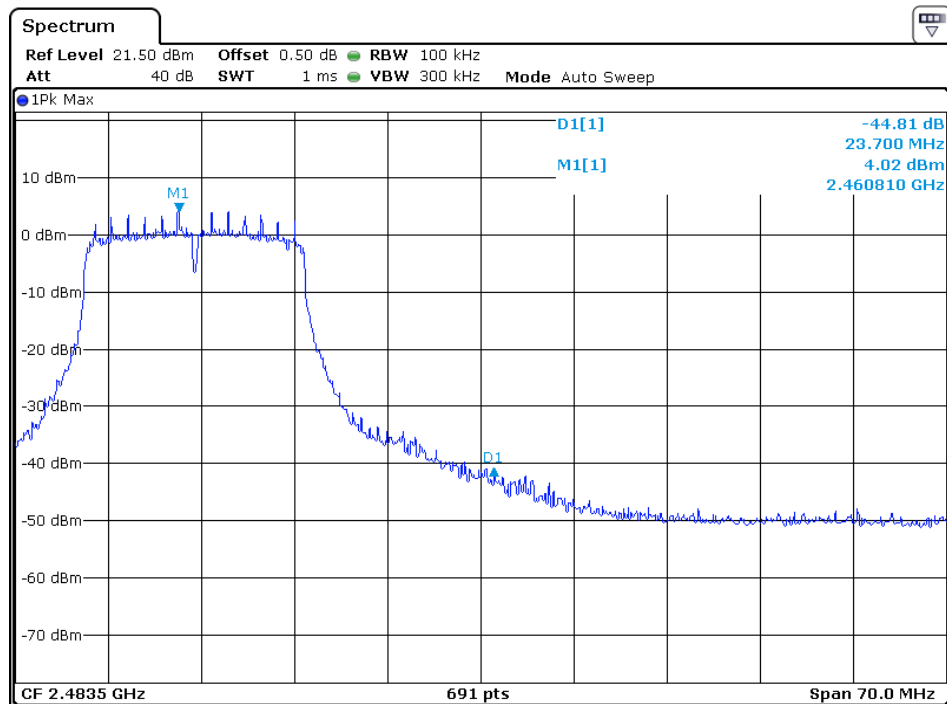


Date: 2 SEP 2020 17:39:32

802.11n-HT20


Channel 01 (2412MHz) Reference Level: 3.19dBm

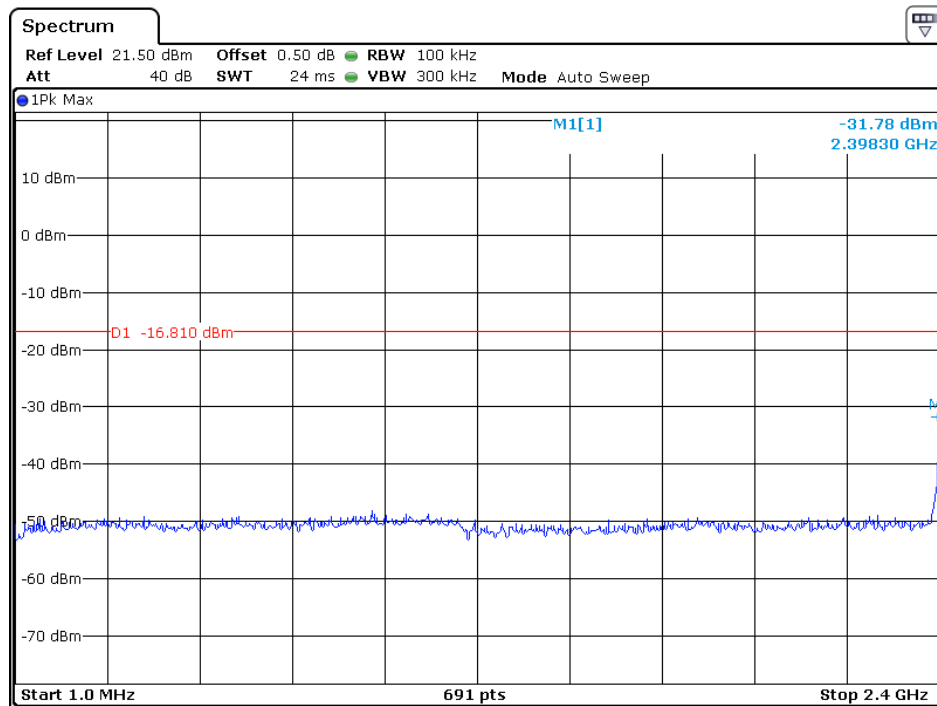

Date: 2 SEP 2020 19:23:00

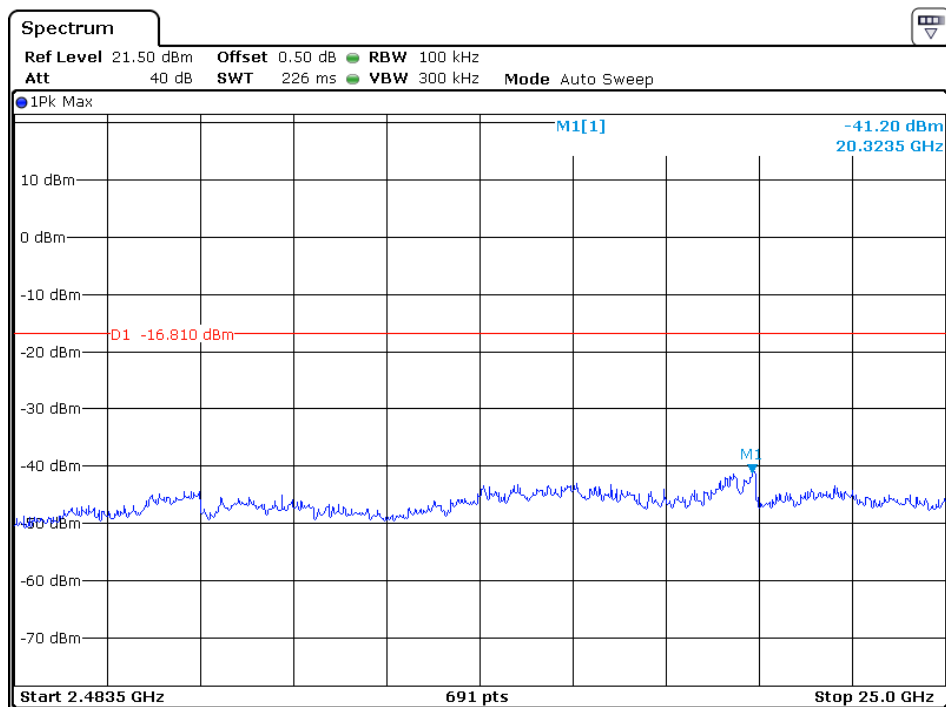


Date: 2 SEP 2020 19:23:30

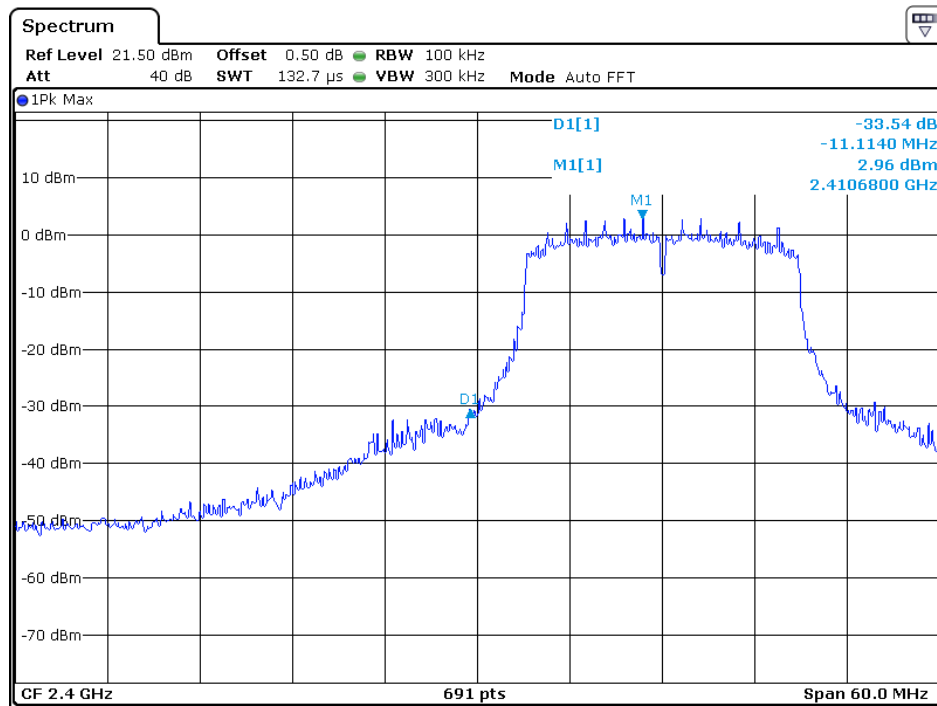

Date: 2 SEP 2020 19:20:09

Channel 06 (2437MHz) Reference Level: 2.89dBm

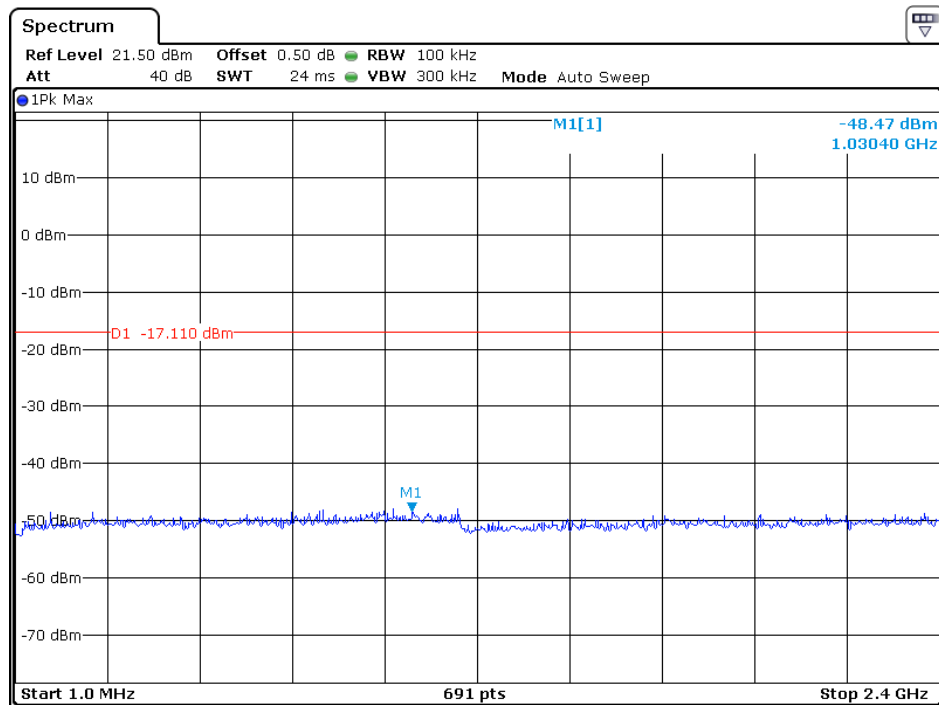


Date: 2 SEP 2020 19:29:21




Date: 2 SEP 2020 19:30:22


Channel 11 (2462MHz) Reference Level: 2.69dBm

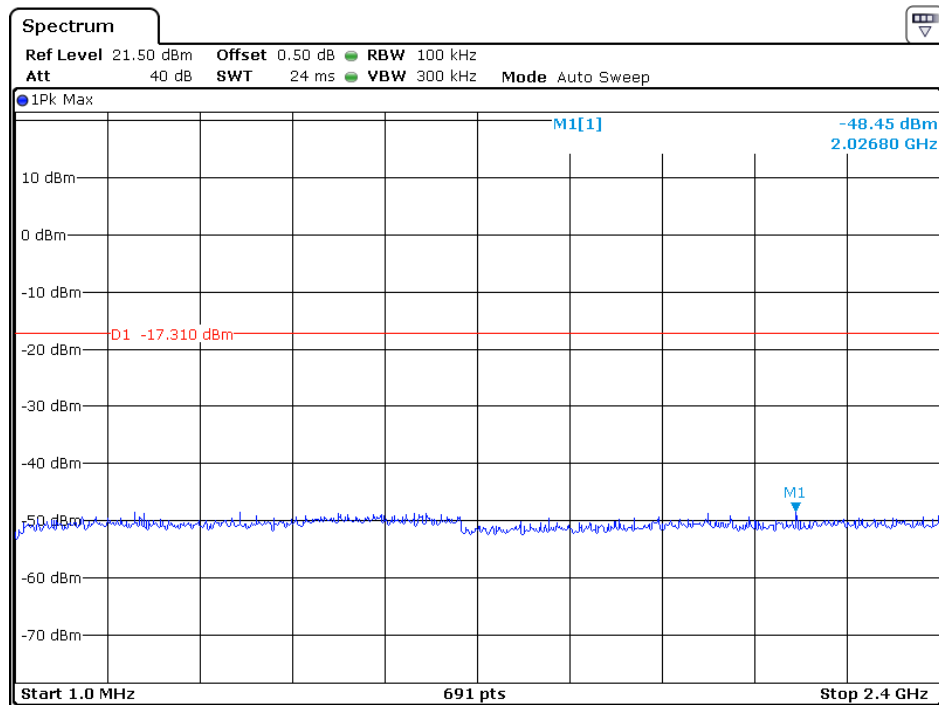

Date: 2 SEP 2020 19:37:26

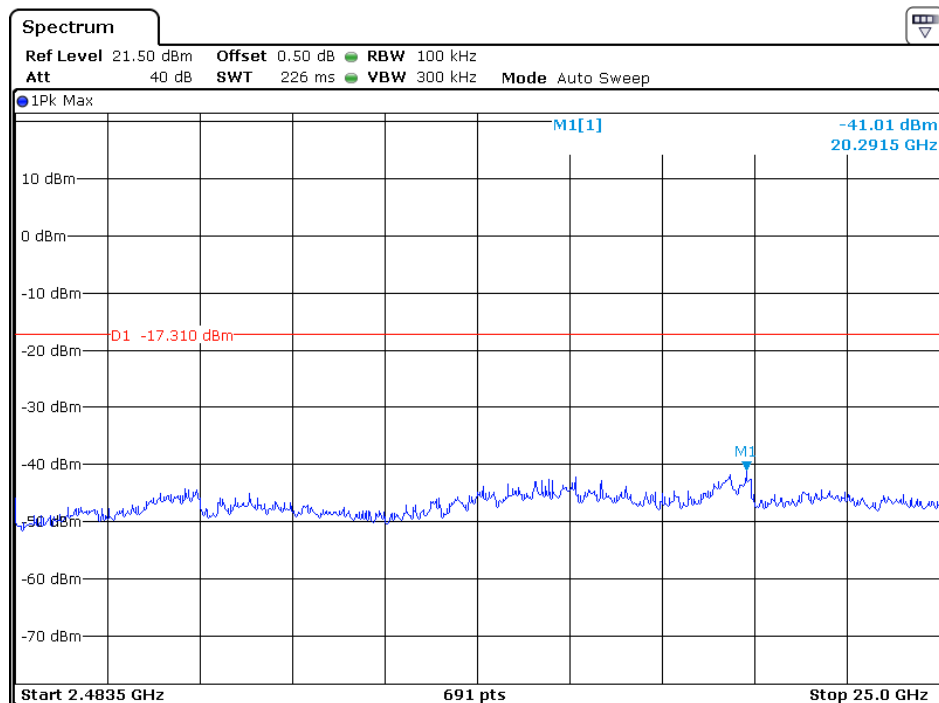


Date: 2 SEP 2020 19:37:50

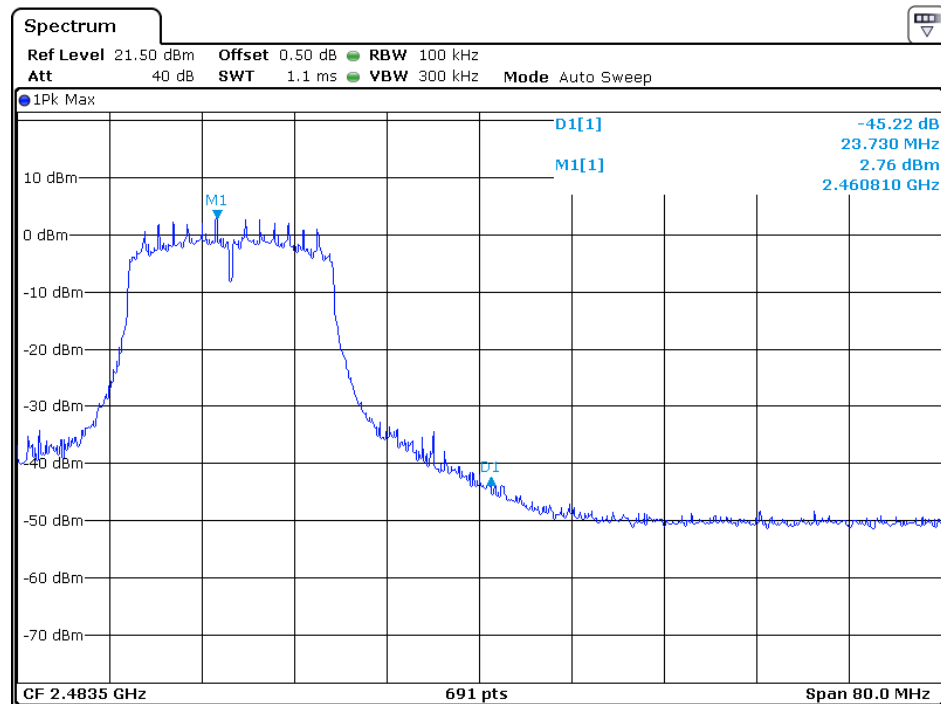


Date: 2 SEP 2020 19:38:11

802.11n-HT40


Channel 01 (2422MHz) Reference Level: 0.52dBm

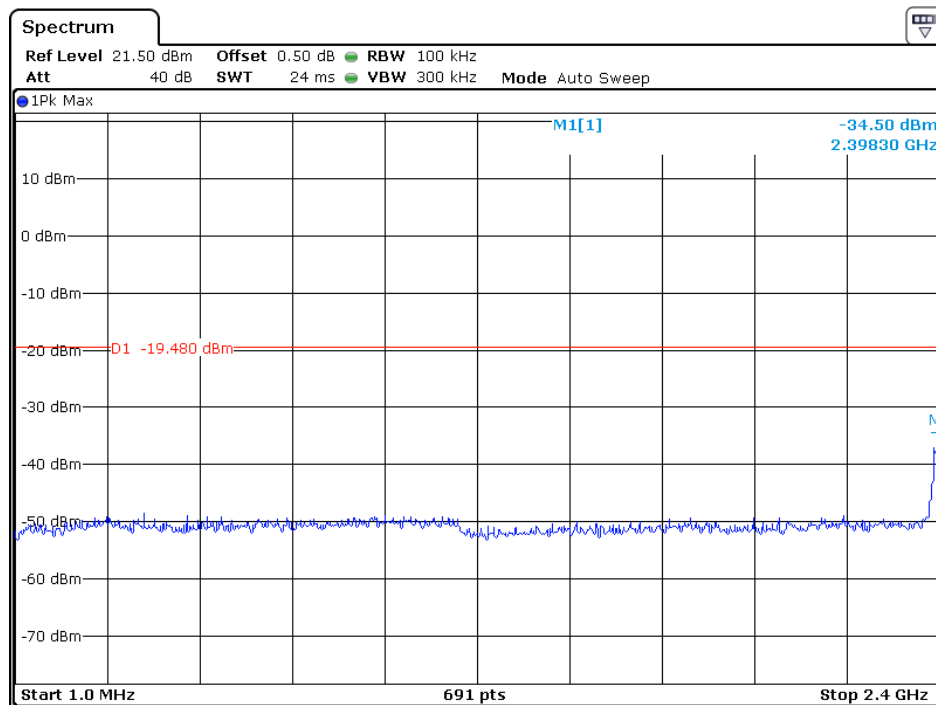

Date: 2.SEP.2020 20:06:44

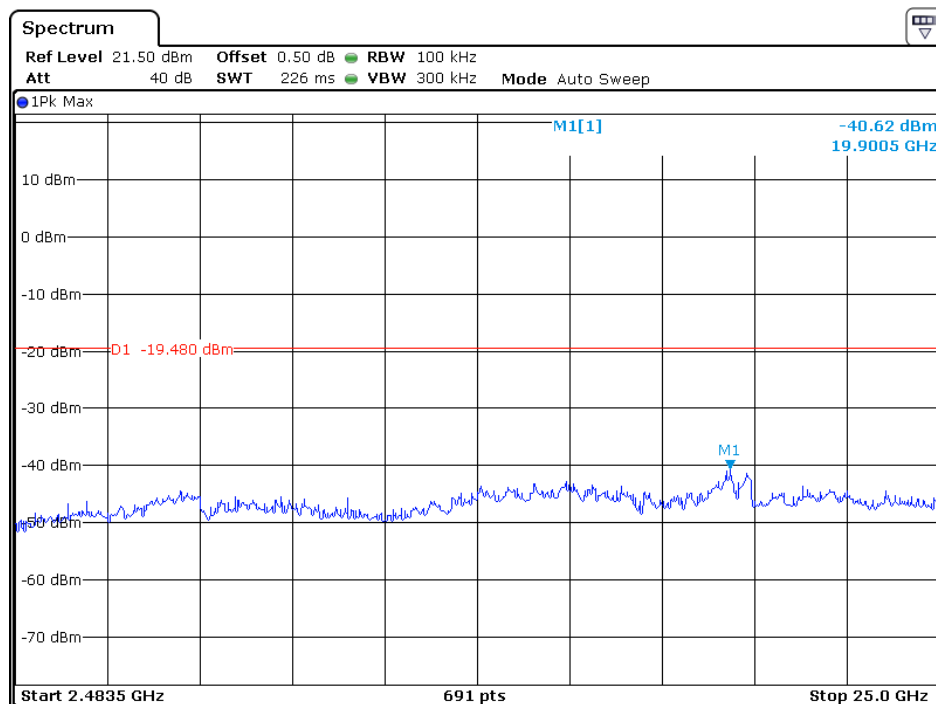


Date: 2.SEP.2020 20:07:06

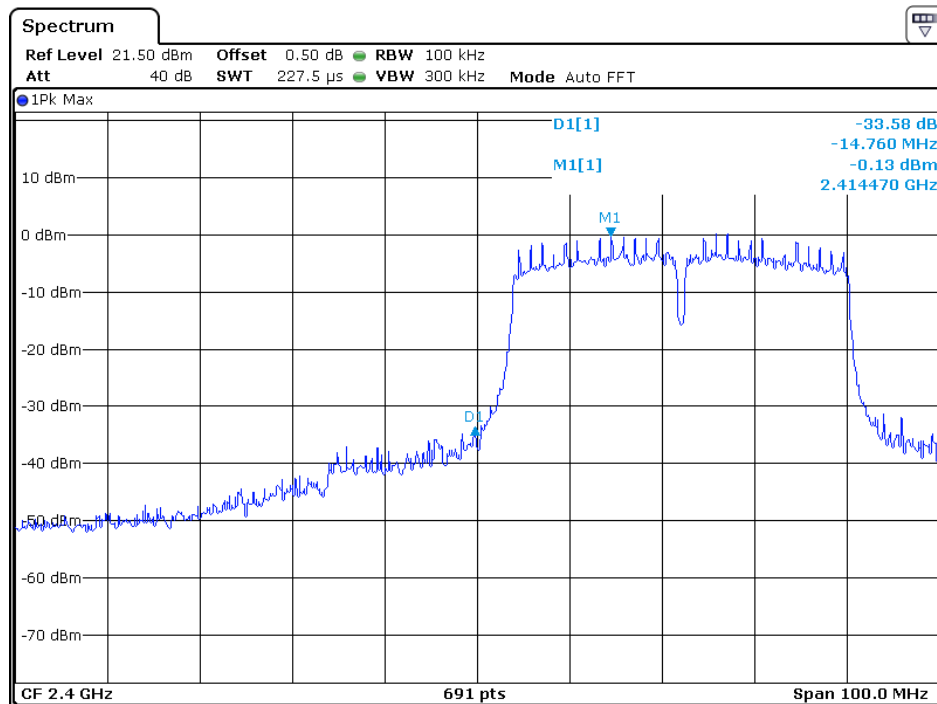


Date: 2 SEP 2020 19:56:36

Channel 06 (2437MHz) Reference Level: 0.26dBm

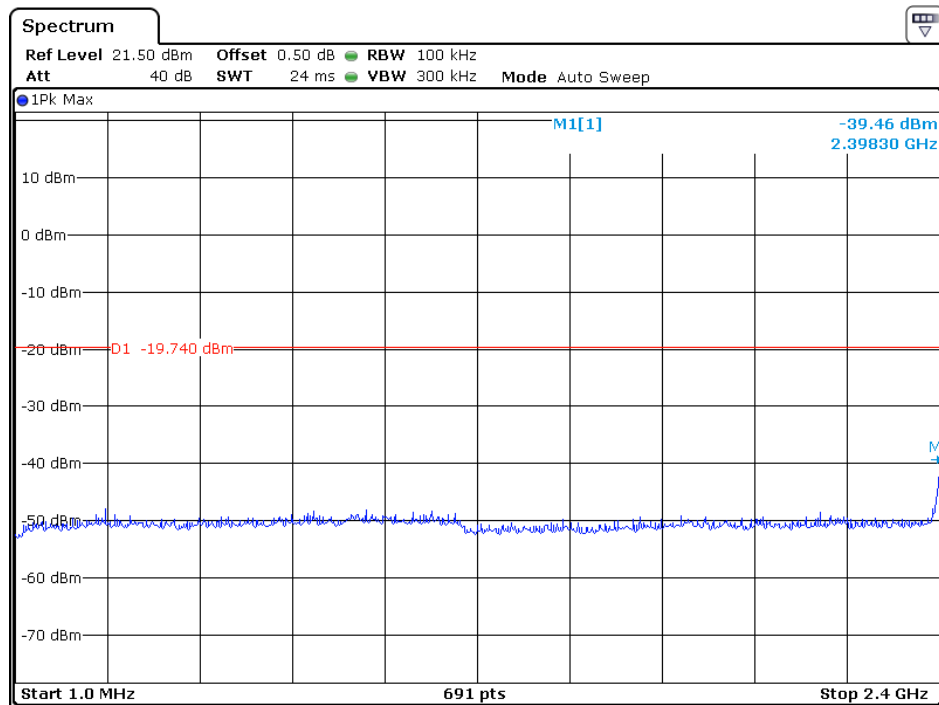


Date: 2 SEP 2020 19:55:02

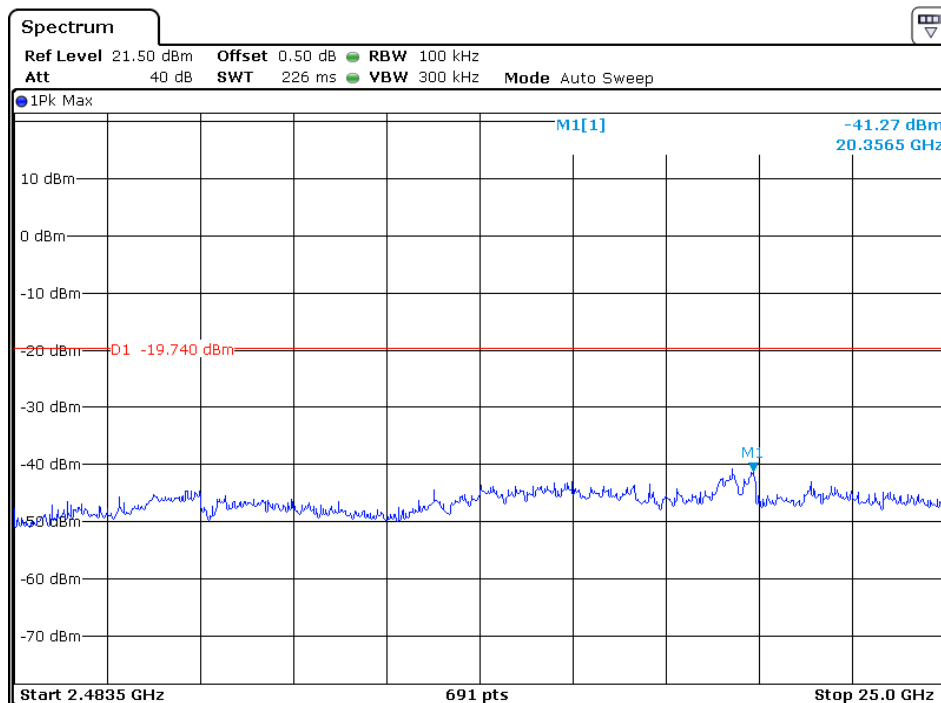


Date: 2 SEP 2020 19:55:31


Channel 11 (2452MHz) Reference Level: 0.42dBm

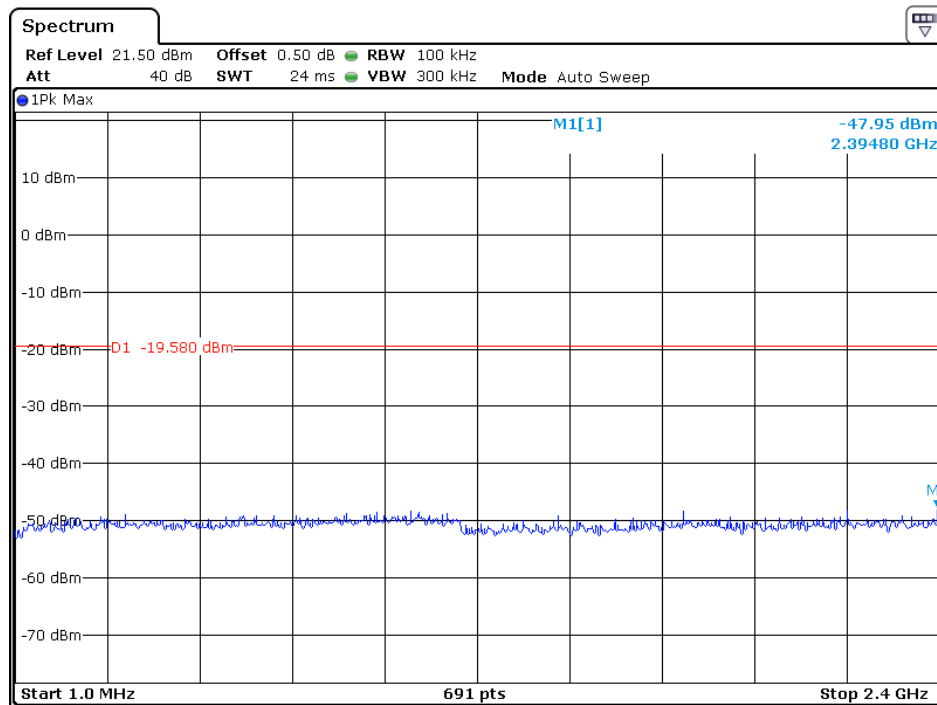

Date: 2 SEP 2020 19:50:59

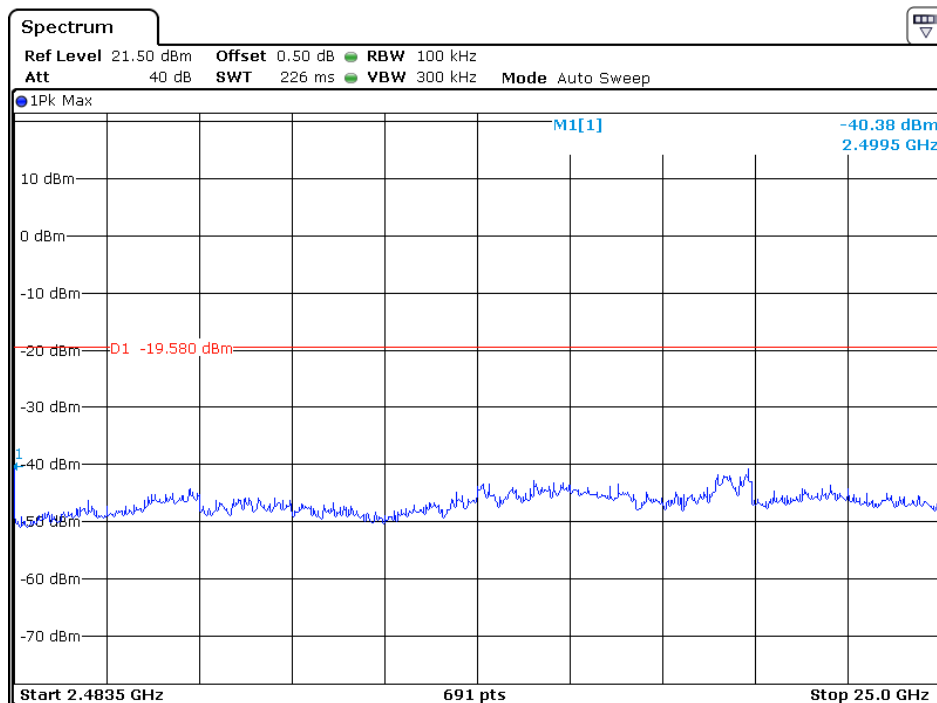

Date: 2 SEP 2020 19:51:22

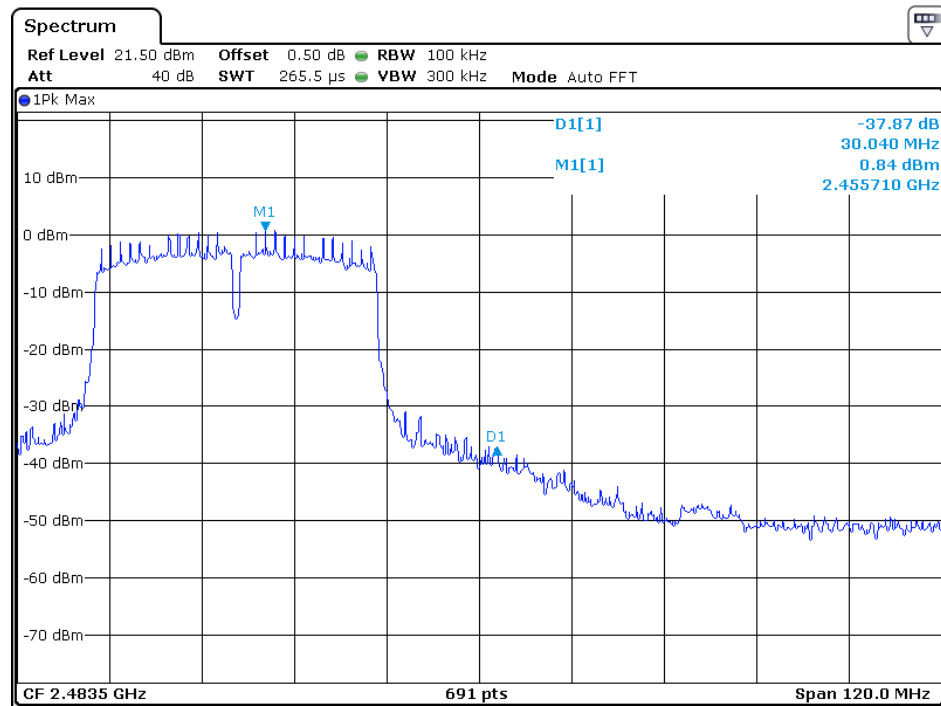


Date: 2 SEP 2020 19:48:03


Antenna 2:

802.11b


Channel 01 (2412MHz) Reference Level: 4.76dBm

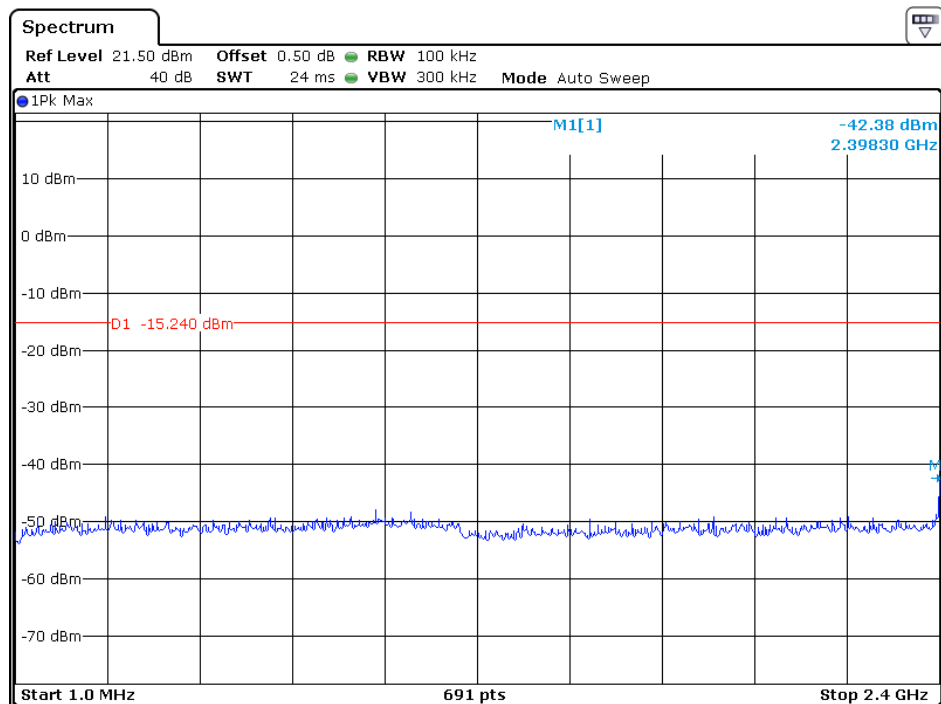

Date: 1 SEP 2020 18:52:17

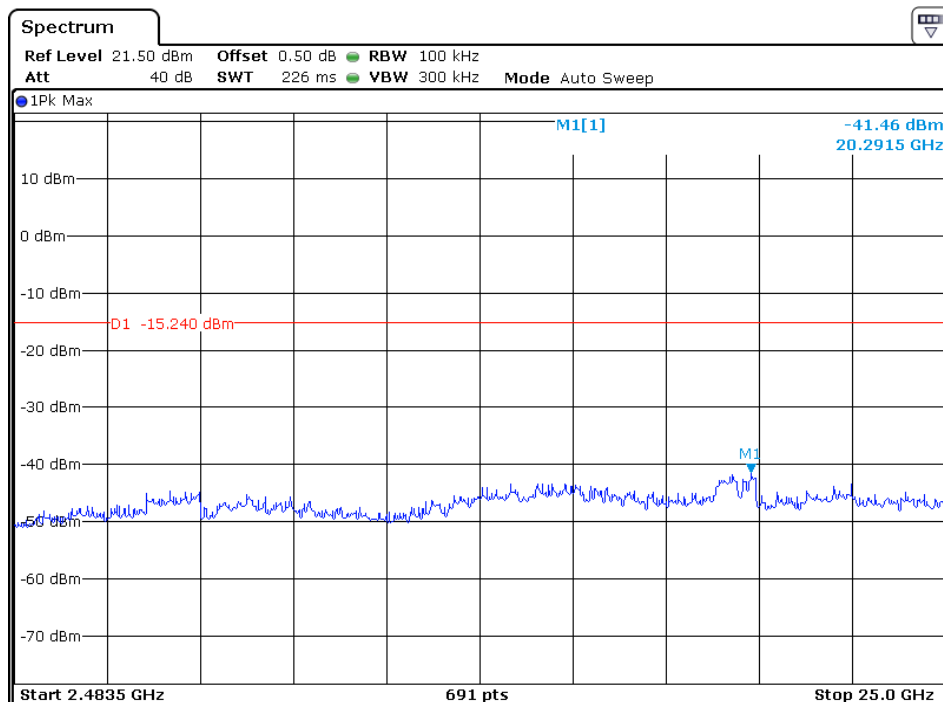


Date: 1 SEP 2020 18:52:38

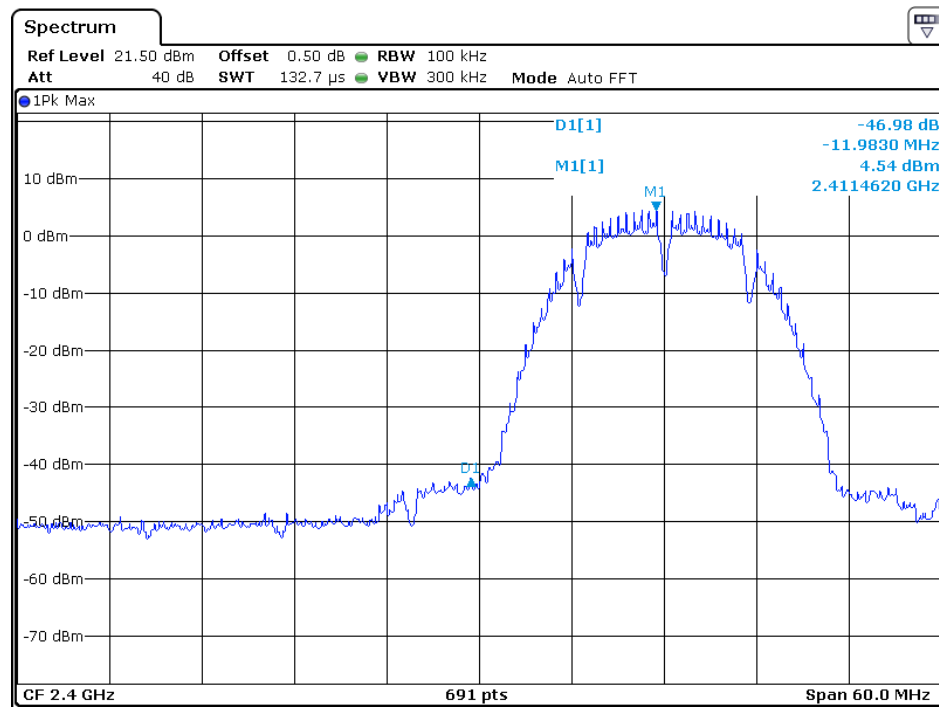


Date: 1 SEP 2020 18:53:08

Channel 06 (2437MHz) Reference Level: 4.03dBm

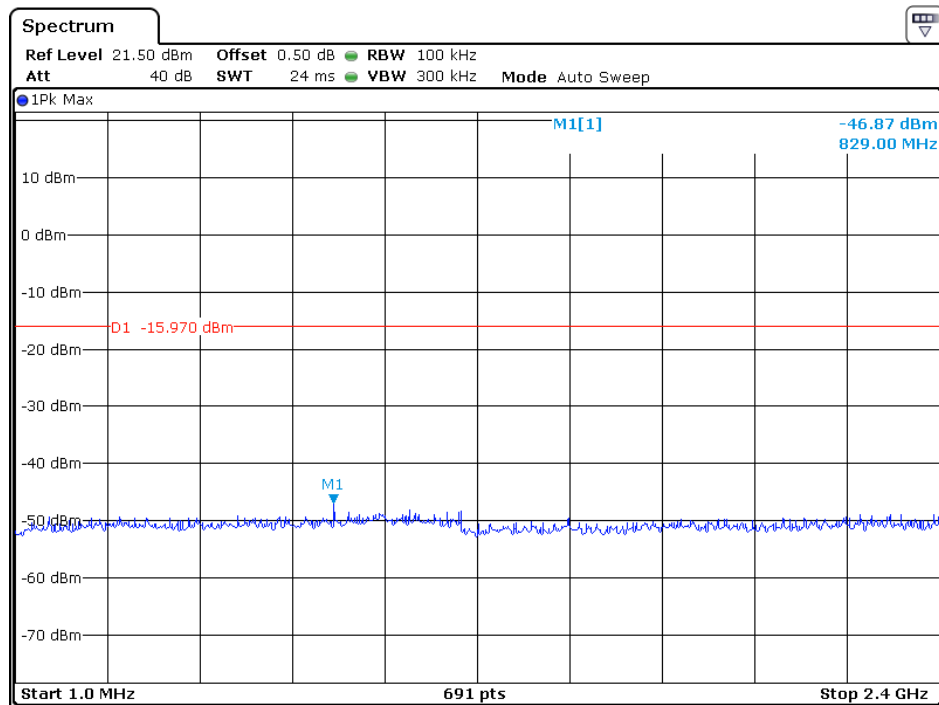


Date: 1 SEP 2020 18:56:48

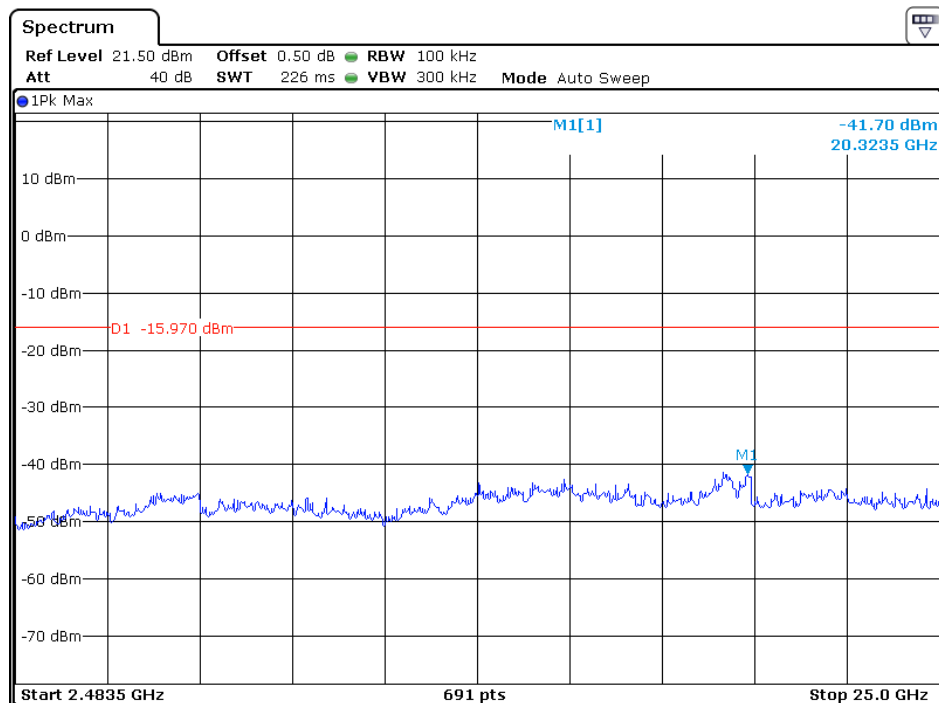


Date: 1 SEP 2020 18:57:11


Channel 11 (2462MHz) Reference Level: 4.14dBm

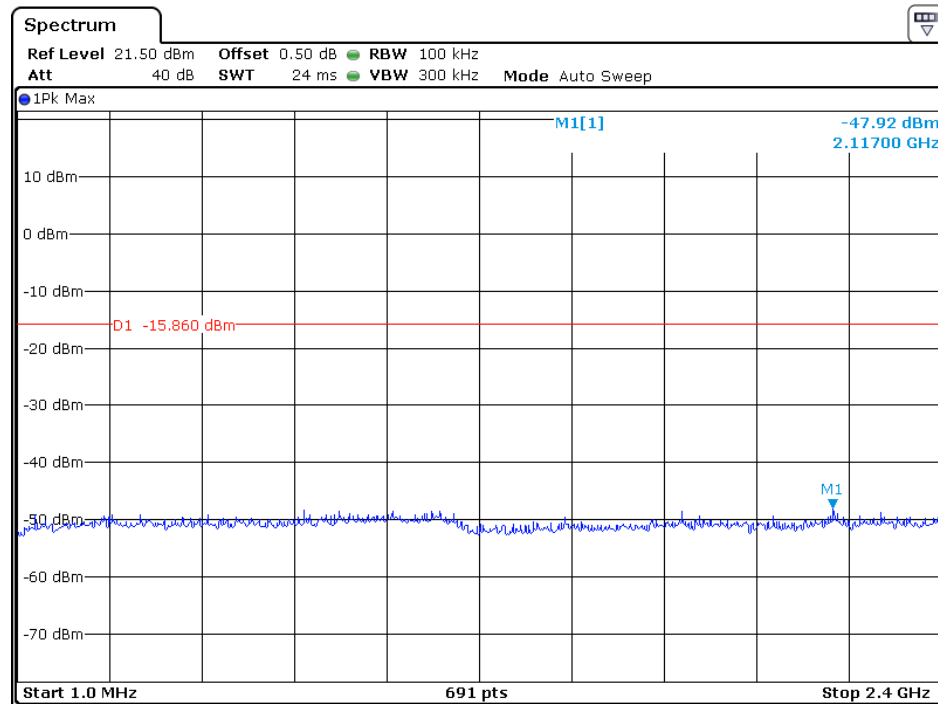

Date: 1 SEP 2020 18:59:41

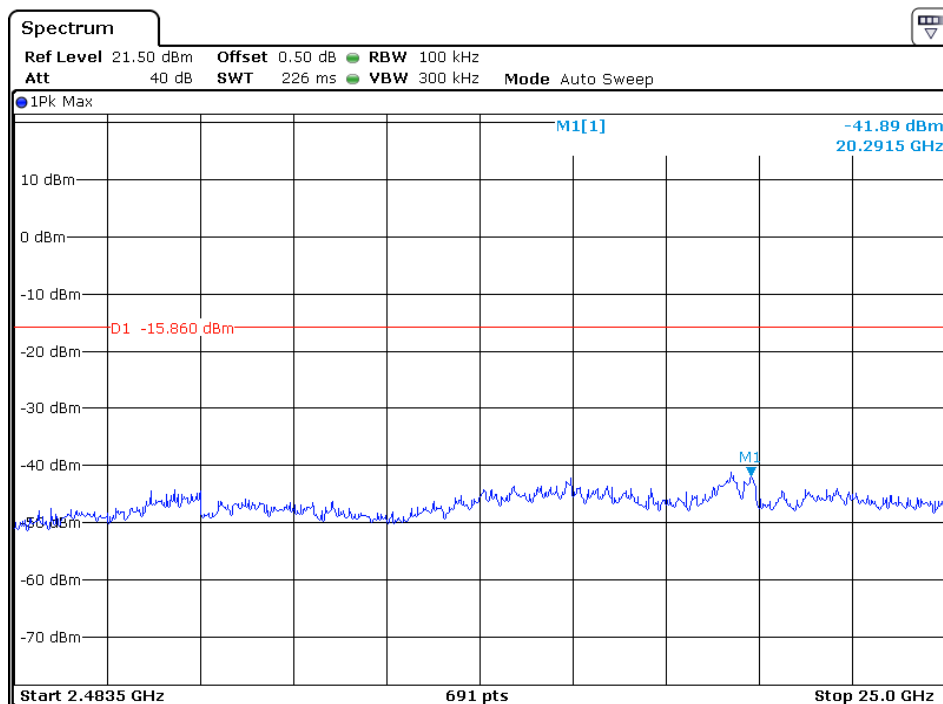


Date: 1 SEP 2020 19:00:07

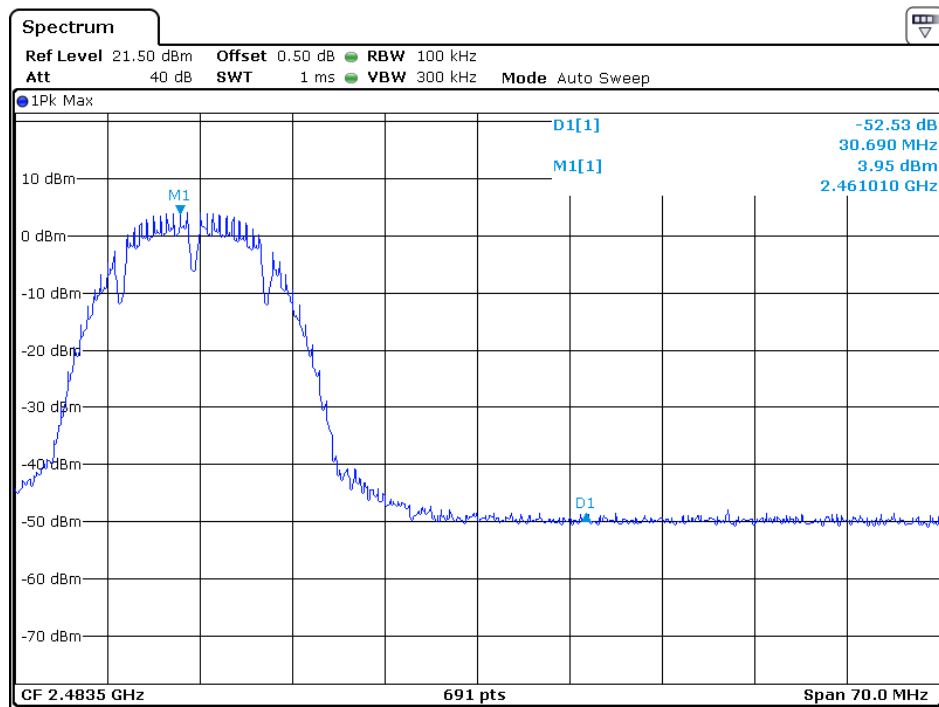


Date: 1 SEP 2020 19:00:40

802.11g


Channel 01 (2412MHz) Reference Level: 2.97dBm

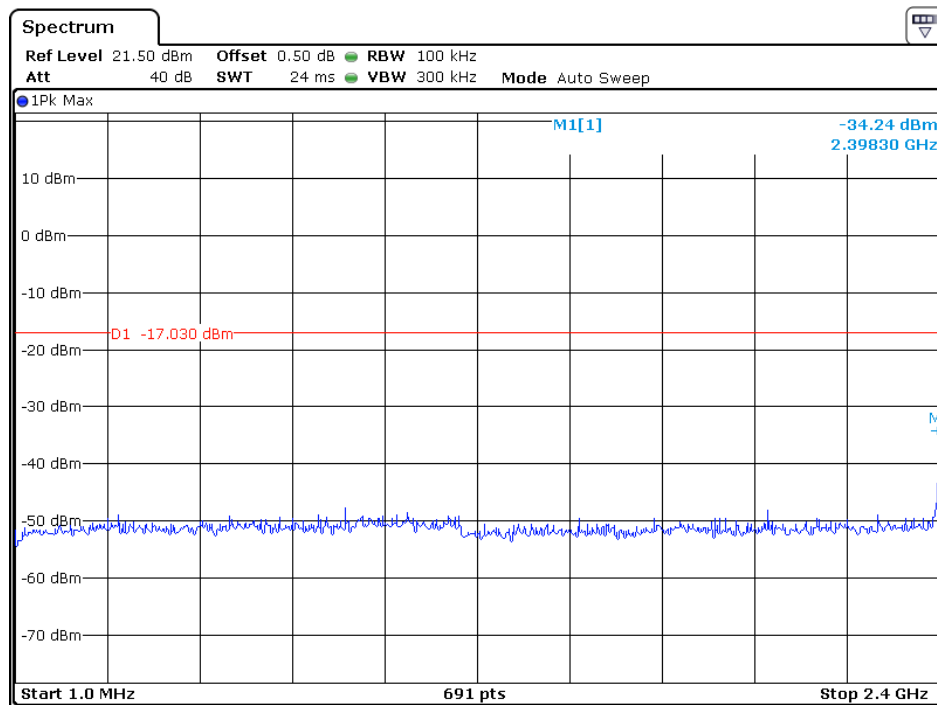

Date: 1 SEP 2020 19:23:13

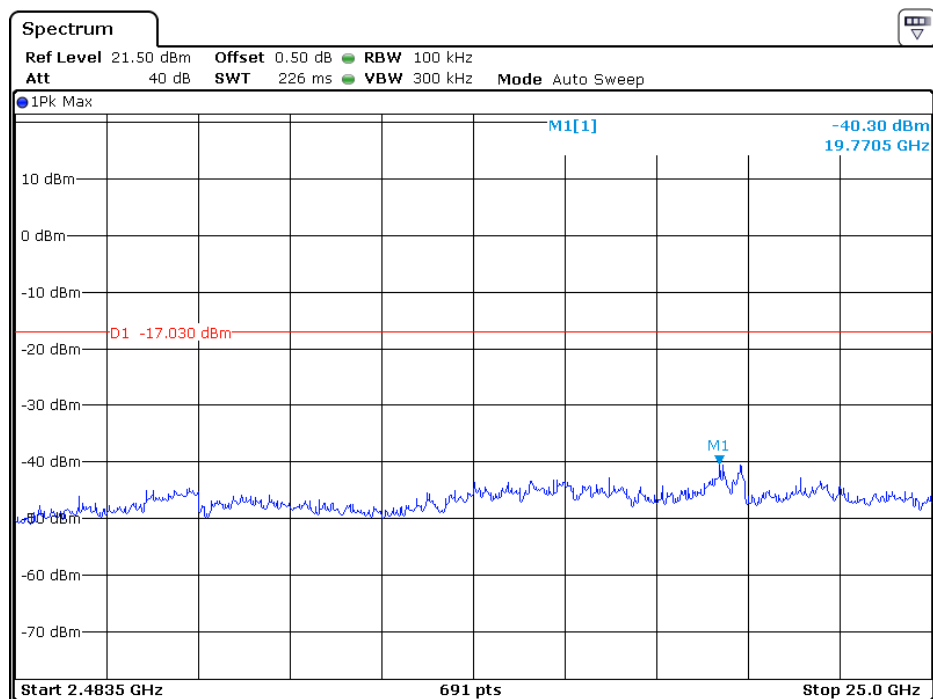


Date: 1 SEP 2020 19:23:36

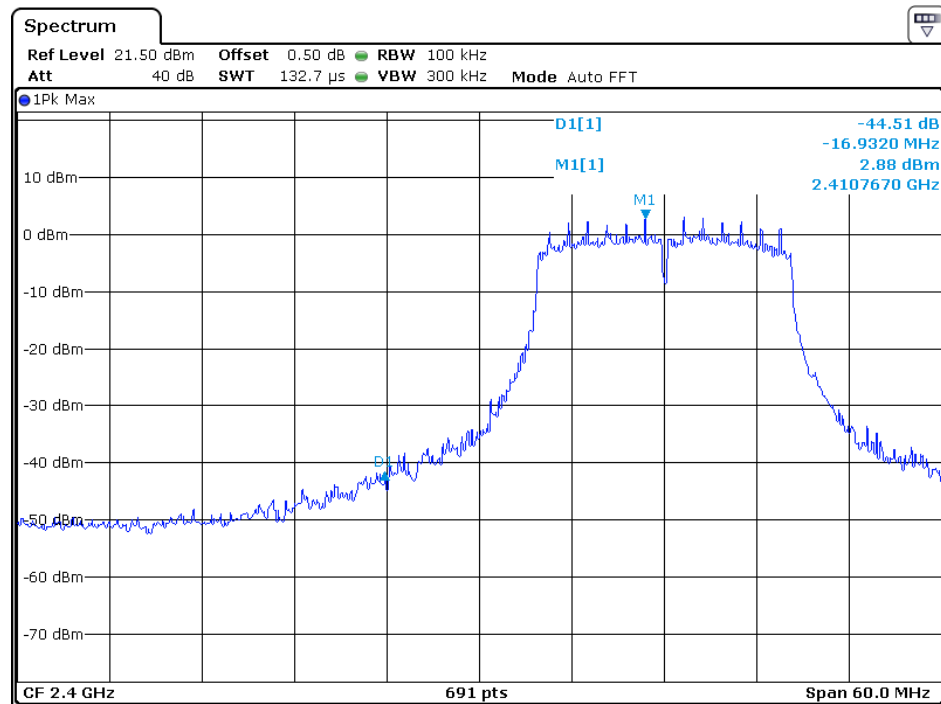


Date: 1 SEP 2020 19:24:07

Channel 06 (2437MHz) Reference Level: 3.37dBm

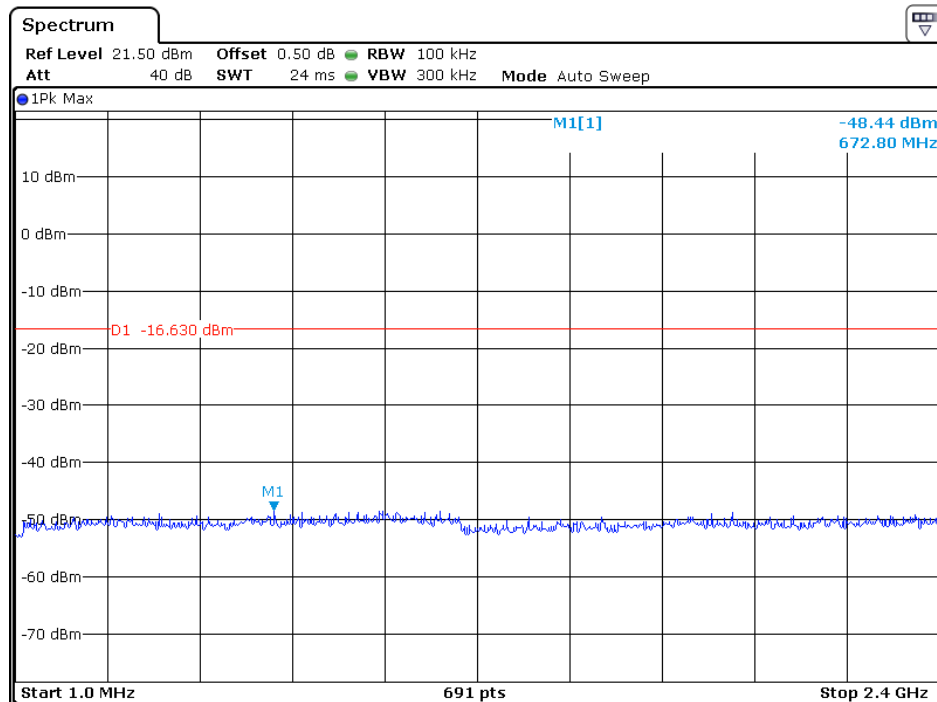


Date: 1 SEP 2020 19:19:43

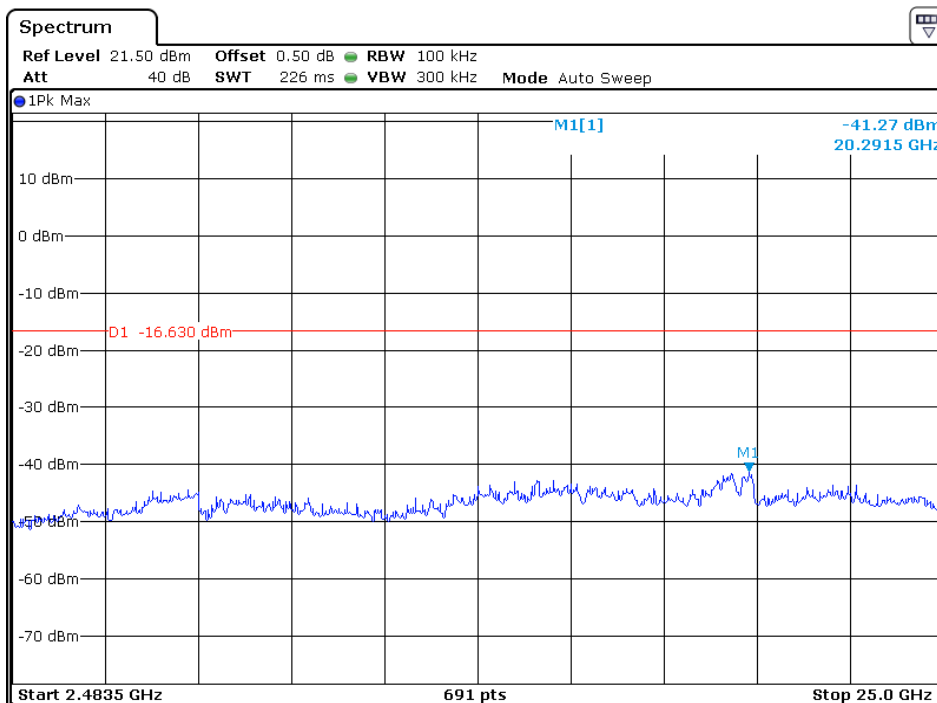


Date: 1 SEP 2020 19:20:12


Channel 11 (2462MHz) Reference Level: 3.35dBm

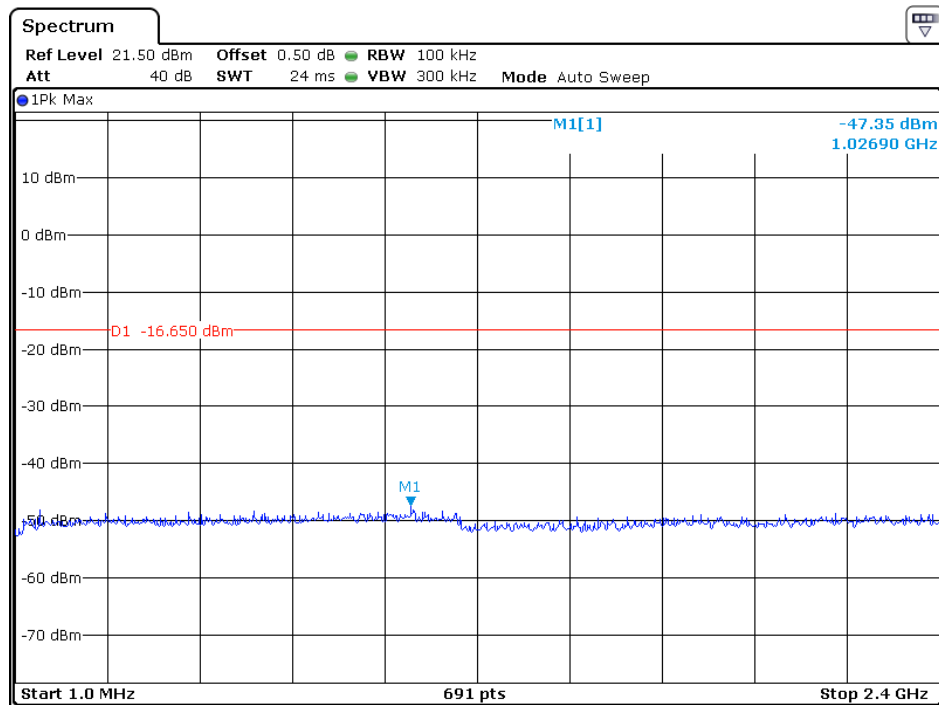

Date: 1 SEP 2020 19:15:26

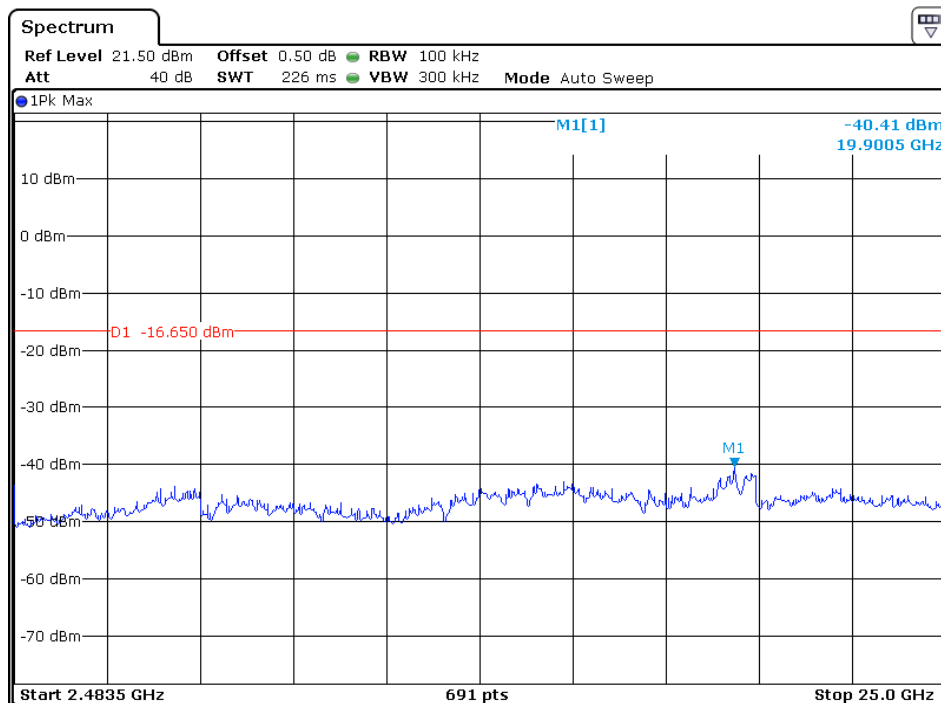


Date: 1 SEP 2020 19:15:57

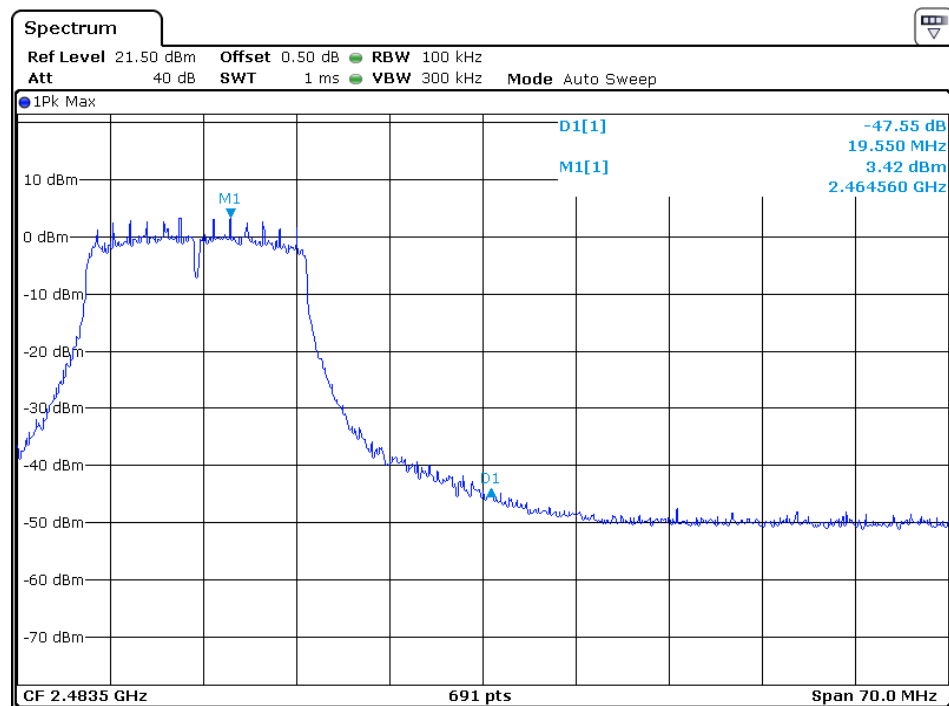


Date: 1 SEP 2020 19:05:40

802.11n-HT20


Channel 01 (2412MHz) Reference Level: 2.33dBm

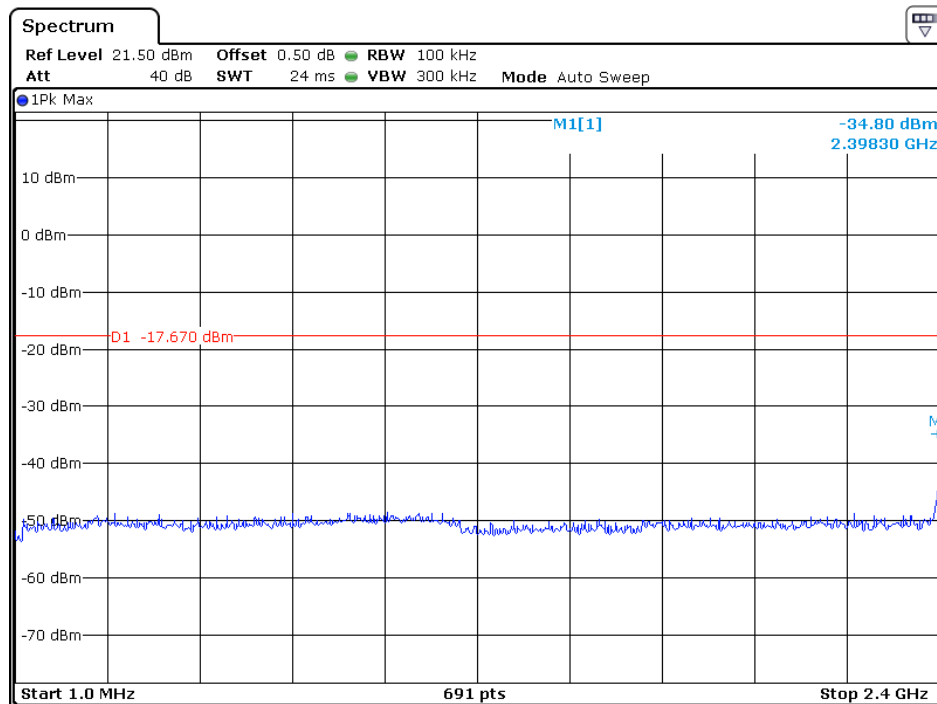

Date: 1 SEP 2020 19:31:47

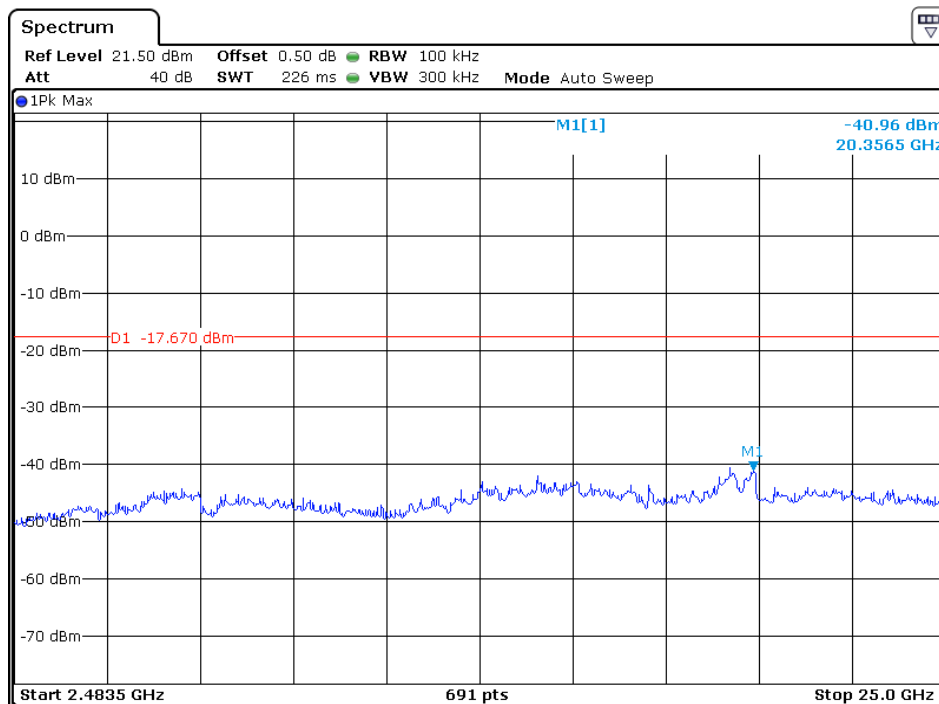


Date: 1 SEP 2020 19:32:22

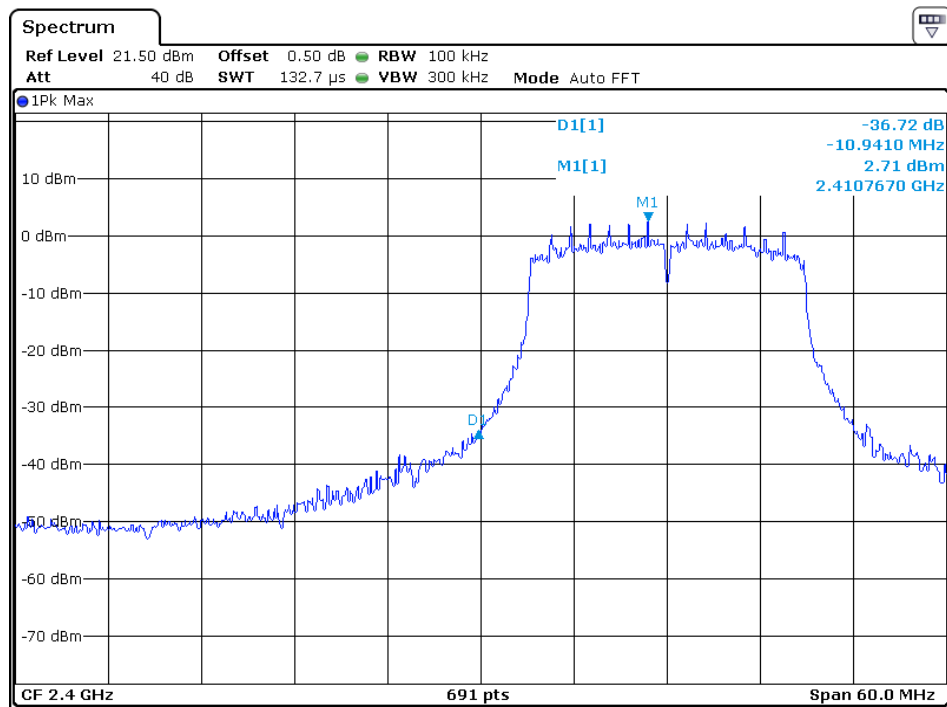

Date: 1 SEP 2020 19:28:50

Channel 06 (2437MHz) Reference Level: 2.83dBm

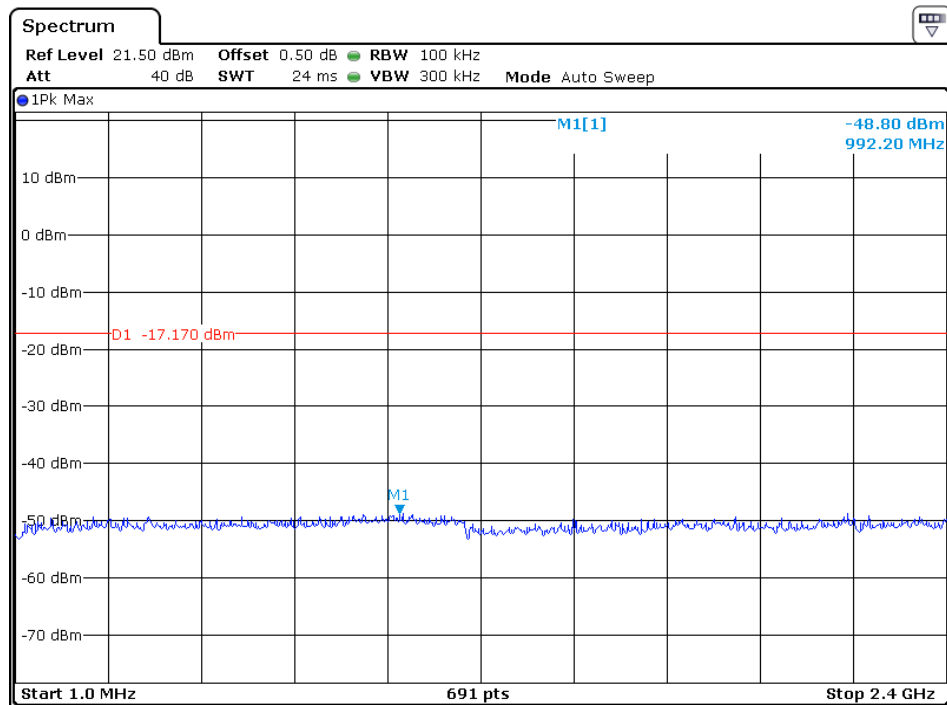


Date: 2 SEP 2020 16:00:29




Date: 2 SEP 2020 16:01:09


Channel 11 (2462MHz) Reference Level: 2.01dBm

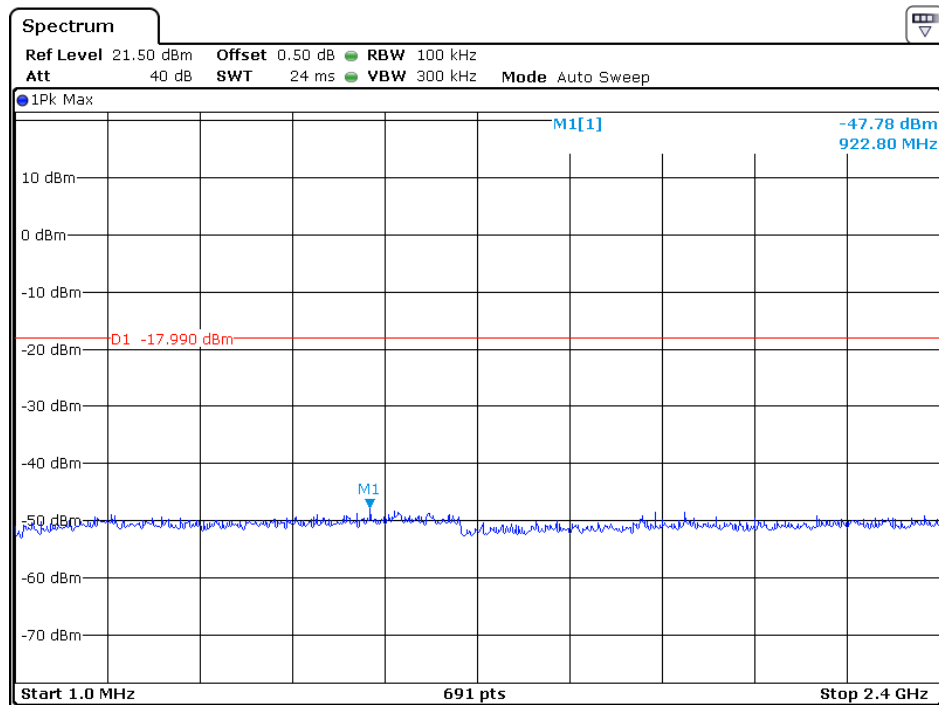

Date: 2 SEP 2020 16:04:12

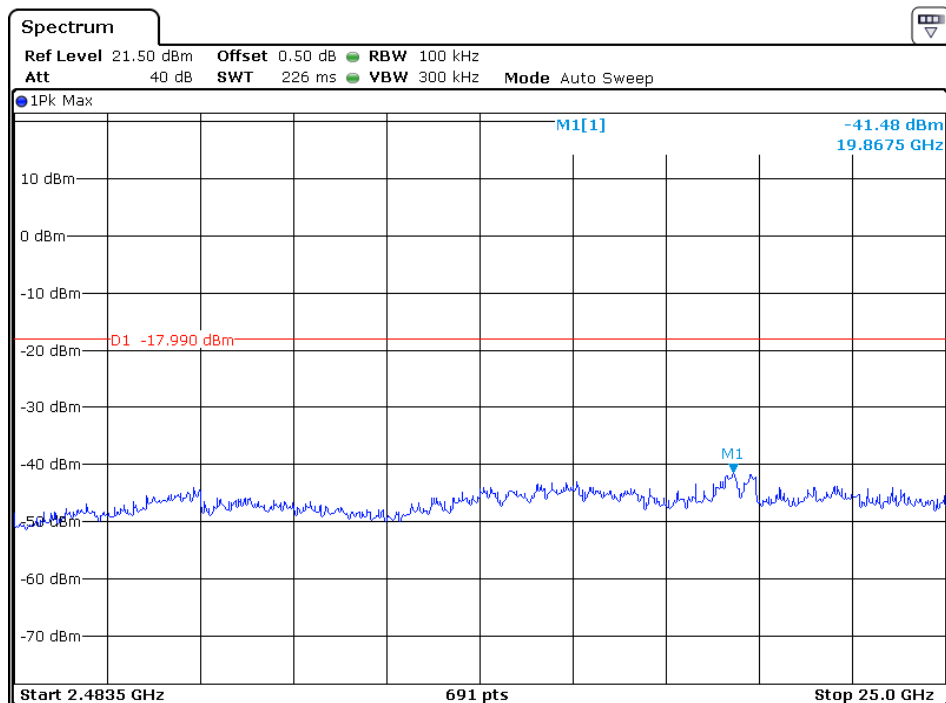


Date: 2 SEP 2020 16:04:43

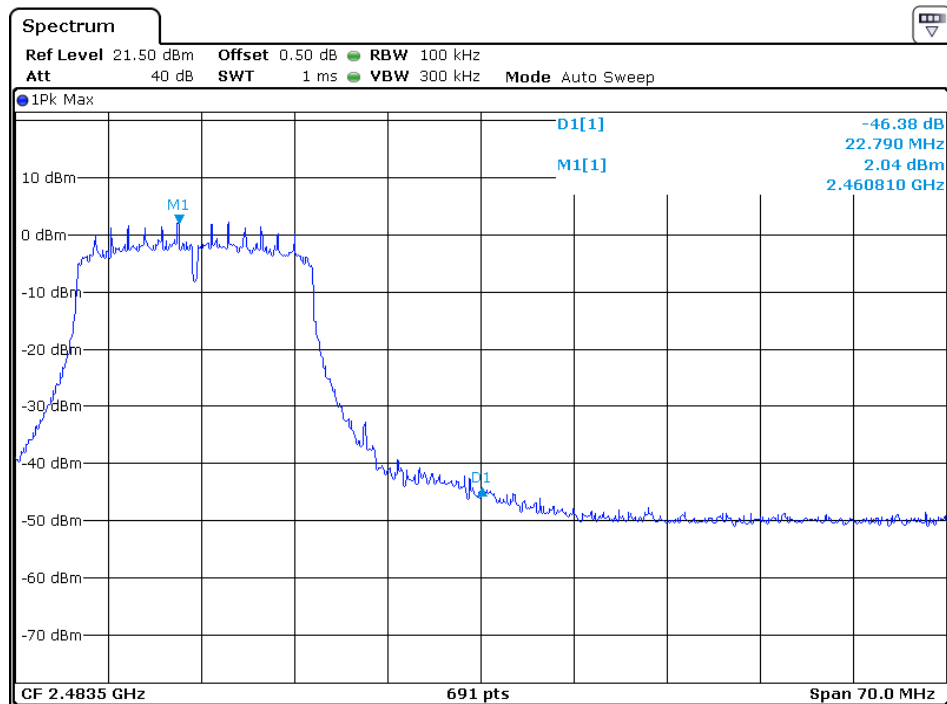


Date: 2 SEP 2020 16:05:09

802.11n-HT40


Channel 01 (2422MHz) Reference Level: -0.69dBm

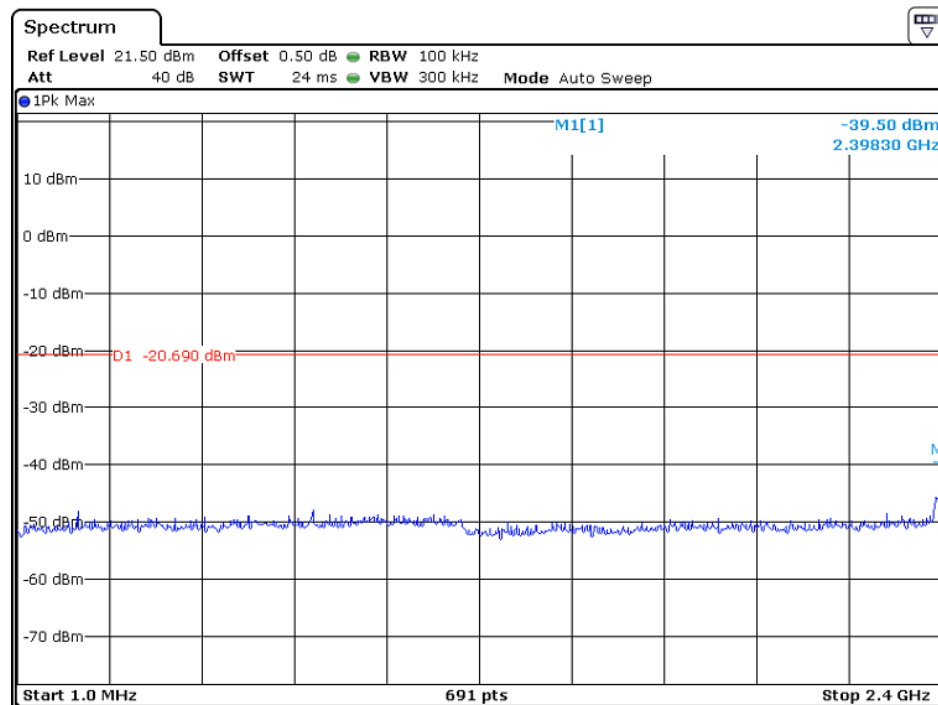

Date: 2.SEP.2020 16:23:12

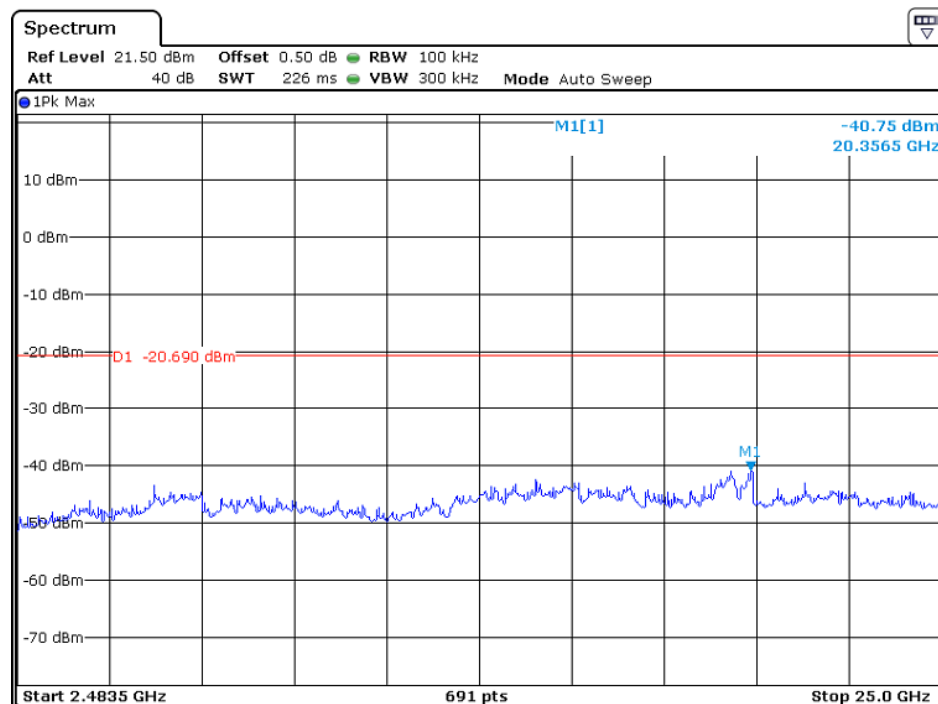


Date: 2.SEP.2020 16:23:42

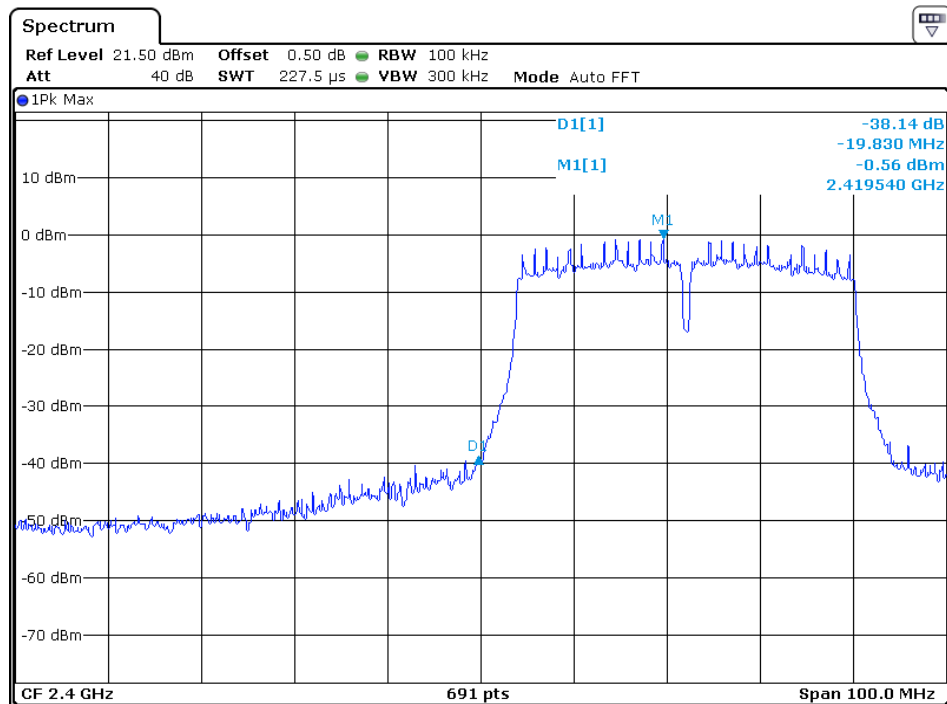


Date: 2 SEP 2020 16:19:48

Channel 06 (2437MHz) Reference Level: -0.72dBm

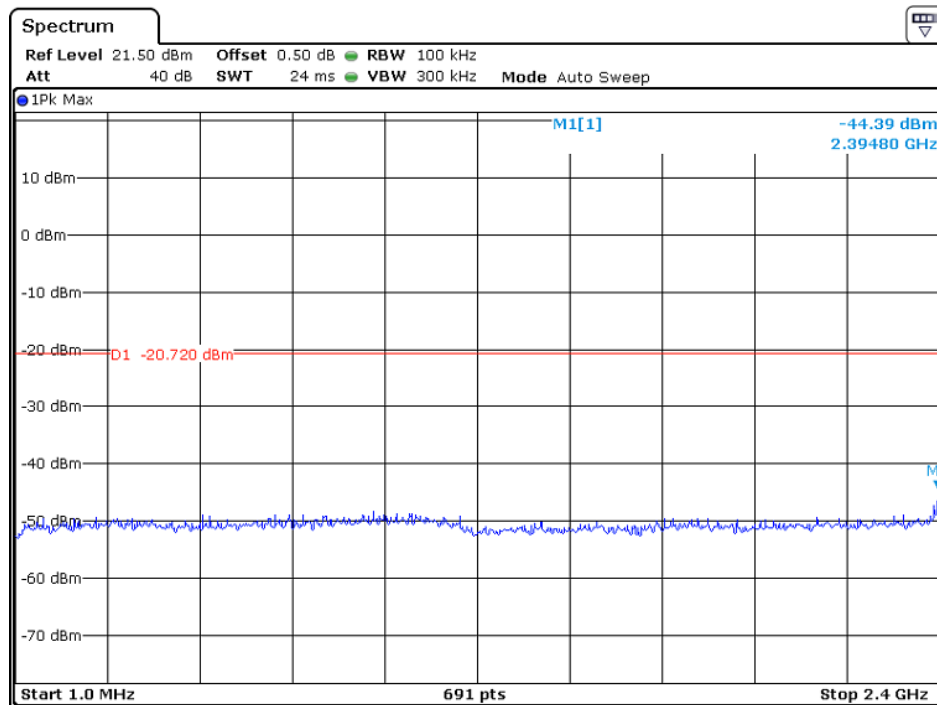


Date: 2 SEP 2020 16:18:31

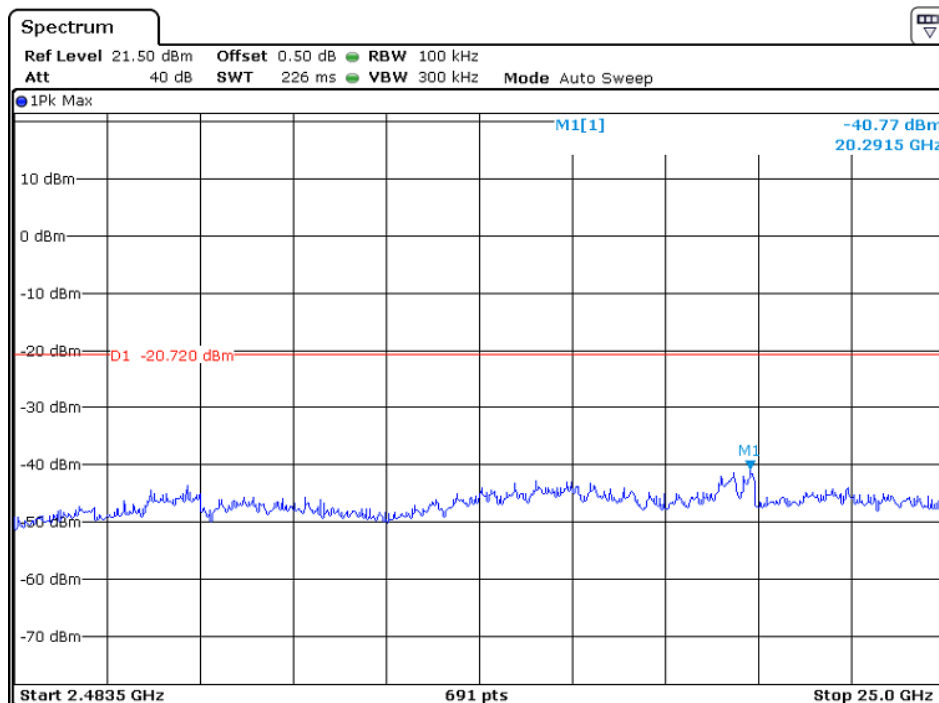


Date: 2 SEP 2020 16:19:07


Channel 11 (2452MHz) Reference Level: -0.65dBm

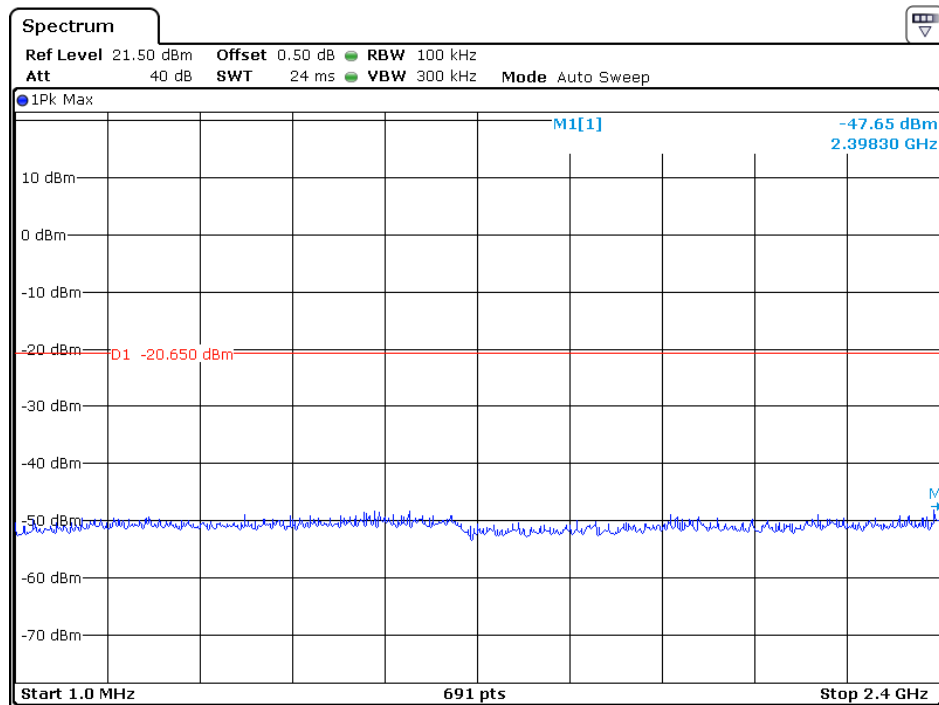

Date: 2 SEP 2020 16:12:43

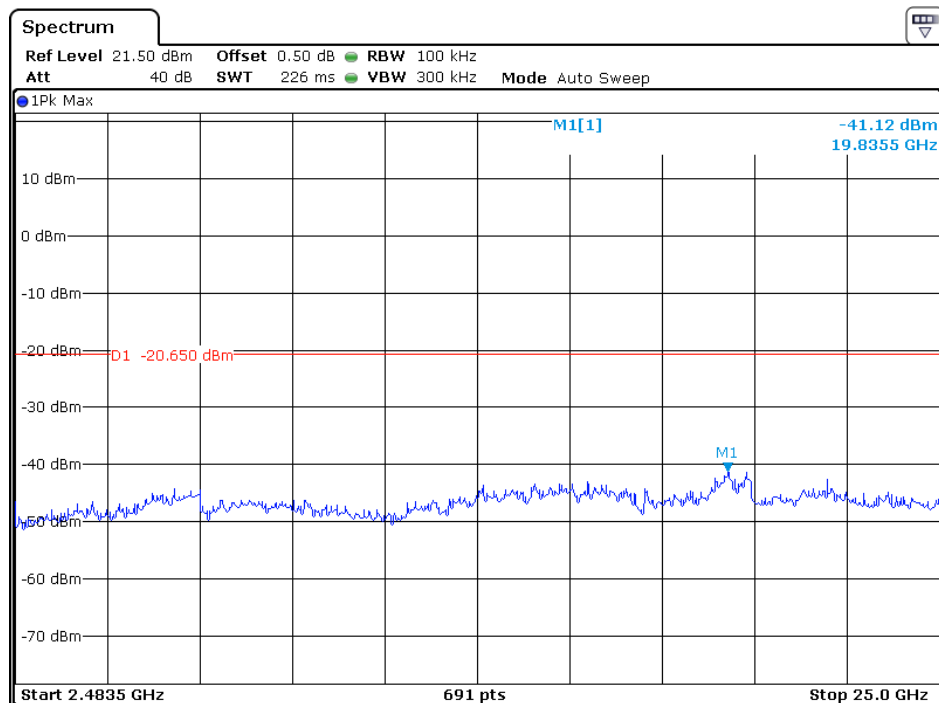

Date: 2 SEP 2020 16:13:09

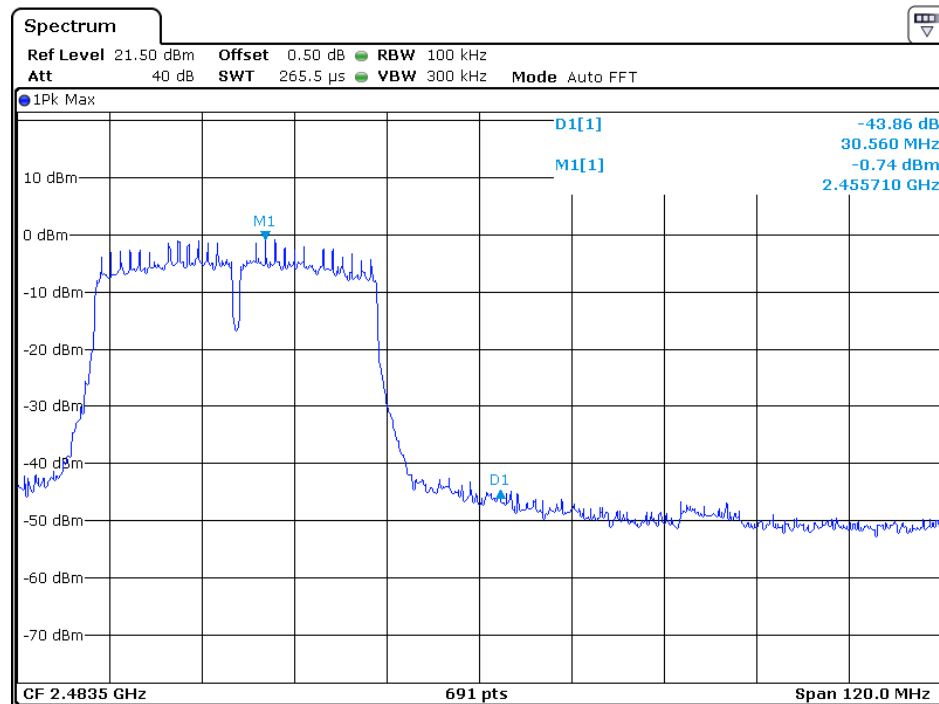

Date: 2 SEP 2020 16:13:43

Applicant: SKYBELL TECHNOLOGIES INC

Date of Test: September 03, 2020

Model: TRIM2 S

4.5 Out of Band Radiated Emissions (for emissions in 4.4 above that are less than 20dB below carrier), FCC Rule 15.247(d):

For out of band emissions that are close to or that exceed the 20dB attenuation requirement described in the specification, radiated measurements were performed at a 3m separation distance to determine whether these emissions complied with the general radiated emission requirement.

☒ Not required, since all emissions are more than 20dB below fundamental

☐ See attached data sheet

Applicant: SKYBELL TECHNOLOGIES INC

Date of Test: September 09, 2020

Model: TRIM2 S

4.6 Transmitter Radiated Emissions in Restricted Bands, FCC Rule 15.35(b) (c):

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included. All measurements were performed with peak detection unless otherwise specified.

The data on the following pages list the significant emission frequencies, the limit and the margin of compliance.

Applicant: SKYBELL TECHNOLOGIES INC

Date of Test: September 09, 2020

Model: TRIM2 S

4.7 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD$$

Where

- FS = Field Strength in dB μ V/m
- RA = Receiver Amplitude (including preamplifier) in dB μ V
- CF = Cable Attenuation Factor in dB
- AF = Antenna Factor in dB
- AG = Amplifier Gain in dB
- PD = Pulse Desensitization in dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD$$

Example

Assume a receiver reading of 62.0 dB μ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted. The pulse desensitization factor of the spectrum analyzer was 0 dB. The net field strength for comparison to the appropriate emission limit is 42 dB μ V/m. This value in dB μ V/m was converted to its corresponding level in μ V/m.

$$RA = 62.0 \text{ dB}\mu\text{V}$$

$$AF = 7.4 \text{ dB}$$

$$CF = 1.6 \text{ dB}$$

$$AG = 29.0 \text{ dB}$$

$$PD = 0 \text{ dB}$$

$$FS = 62 + 7.4 + 1.6 - 29 + 0 = 42 \text{ dB}\mu\text{V/m}$$

$$\text{Level in mV/m} = \text{Common Antilogarithm } [(42 \text{ dB}\mu\text{V/m})/20] = 125.9 \mu\text{V/m}$$

Applicant: SKYBELL TECHNOLOGIES INC

Date of Test: September 09, 2020

Model: TRIM2 S

4.8 Radiated Spurious Emission

Worst Case Radiated Spurious Emission (Antenna 1, 802.11b-Channel 01)
at 750.031MHz
is passed by 3.2dB margin.

For the electronic filing, the worst case radiated emission configuration photographs are saved with filename: radiated photos.pdf.

Applicant: SKYBELL TECHNOLOGIES INC


Date of Test: September 09, 2020

Worst Case Operating Mode:

Model: TRIM2 S

Transmitting (Antenna 1, 802.11b-Channel 01)

ANT Polarity: Horizontal

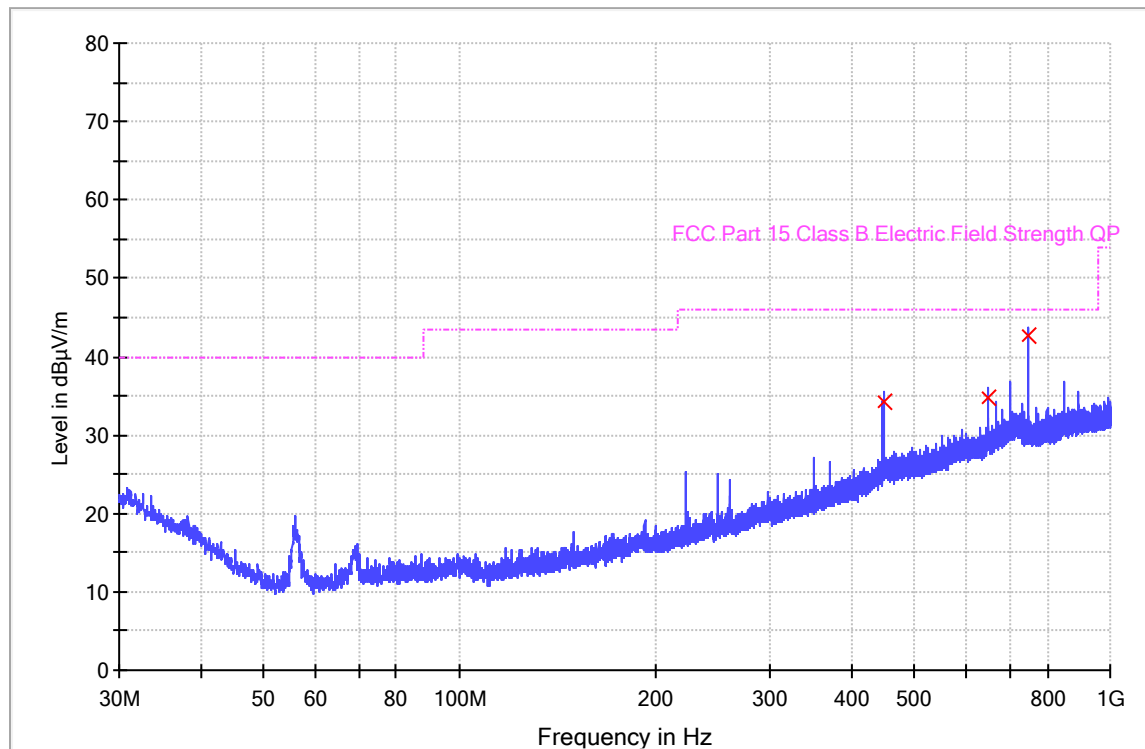

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
450.010000	34.3	1000.0	120.000	0.0	H	20.6	11.7	46.0
650.024000	34.9	1000.0	120.000	0.0	H	24.8	11.1	46.0
750.031000	42.8	1000.0	120.000	0.0	H	26.1	3.2	46.0

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Limit Line (dBuV/m) – Level (dBuV/m)

Applicant: SKYBELL TECHNOLOGIES INC


Date of Test: September 09, 2020

Worst Case Operating Mode:

Model: TRIM2 S

Transmitting (Antenna 1, 802.11b-Channel 01)

ANT Polarity: Vertical

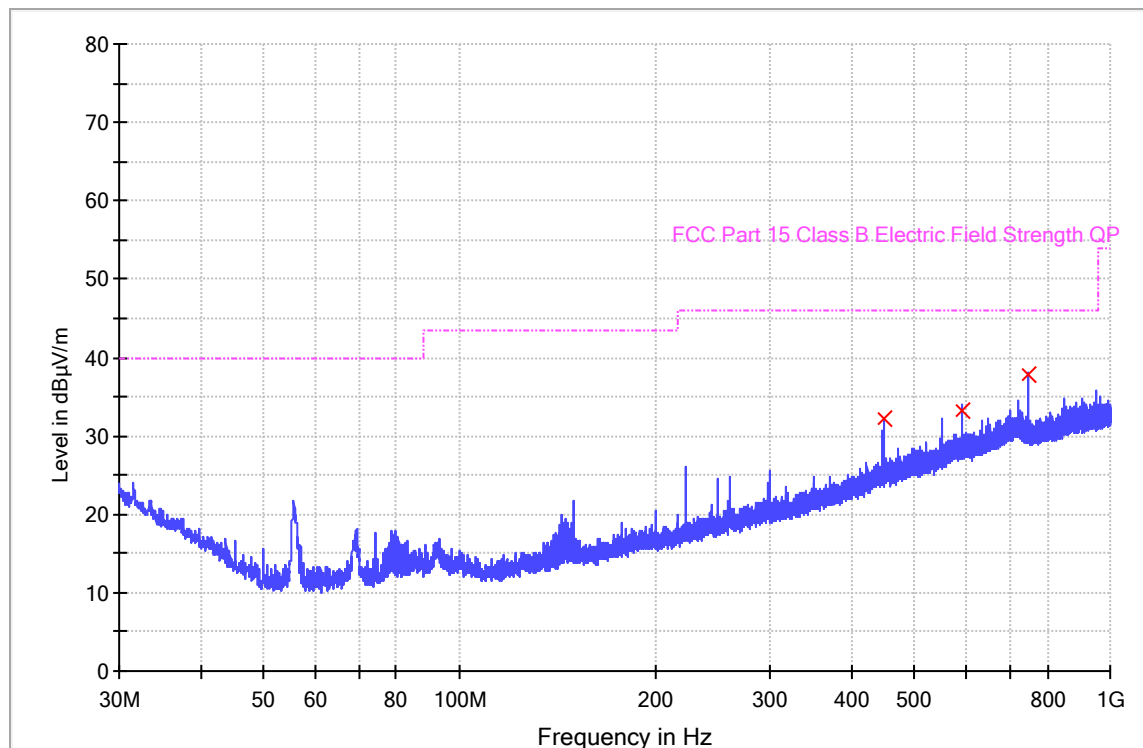

Frequency (MHz)	QuasiPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBμV/m)
450.010000	32.1	1000.0	120.000	0.0	V	20.6	13.9	46.0
593.990333	33.2	1000.0	120.000	0.0	V	23.6	12.8	46.0
750.080000	37.8	1000.0	120.000	0.0	V	26.1	8.2	46.0

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Limit Line (dBμV/m) – Level (dBμV/m)

Test data for Antenna 1

Applicant: SKYBELL TECHNOLOGIES INC

Date of Test: September 09, 2020

Model: TRIM2 S

Worst Case Operating Mode:

Transmitting (802.11b-Channel 01)

Radiated Emissions (above 1GHz)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4824.000	45.8	36.8	33.5	42.5	74.0	-31.5
Horizontal	*2390.000	40.0	36.4	29.1	32.7	74.0	-41.3

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4824.000	35.9	36.8	33.5	32.6	54.0	-21.4
Horizontal	*2390.000	33.6	36.4	29.1	26.3	54.0	-27.7

- NOTES:
1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz/VBW=10Hz for average value.
 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna used for the emission over 1000MHz.
- * Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: SKYBELL TECHNOLOGIES INC

Date of Test: September 09, 2020

Worst Case Operating Mode:

Model: TRIM2 S

Transmitting (802.11b-Channel 06)

Radiated Emissions (above 1GHz)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4874.000	39.7	36.7	33.4	36.4	74.0	-37.6
Horizontal	*7311.000	45.9	36.6	35.8	45.1	74.0	-28.9

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4874.000	33.5	36.7	33.4	30.2	54.0	-23.8
Horizontal	*7311.000	38.1	36.6	35.8	37.3	54.0	-16.7

- NOTES:
1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.
 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna used for the emission over 1000MHz.
- * Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: SKYBELL TECHNOLOGIES INC

Date of Test: September 09, 2020

Model: TRIM2 S

Worst Case Operating Mode:

Transmitting (802.11b-Channel 11)

Radiated Emissions (above 1GHz)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4924.000	38.8	36.8	33.3	35.3	74.0	-38.7
Horizontal	*7386.000	50.6	36.5	29.3	43.4	74.0	-30.6

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4924.000	33.7	36.8	33.3	30.2	54.0	-23.8
Horizontal	*7386.000	45.6	36.5	29.3	38.4	54.0	-15.6

- NOTES:
1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.
 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna used for the emission over 1000MHz.
- * Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: SKYBELL TECHNOLOGIES INC

Date of Test: September 09, 2020

Worst Case Operating Mode:

Model: TRIM2 S

Transmitting (802.11g-Channel 01)

Radiated Emissions (above 1GHz)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4824.000	38.9	36.8	33.5	35.6	74.0	-38.4
Horizontal	*2390.000	33.7	36.4	29.1	26.4	74.0	-47.6

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4824.000	33.5	36.8	33.5	30.2	54.0	-23.8
Horizontal	*2390.000	29.4	36.4	29.1	22.1	54.0	-31.9

- NOTES:
1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz/VBW=10Hz for average value.
 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna used for the emission over 1000MHz.
- * Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: SKYBELL TECHNOLOGIES INC

Date of Test: September 09, 2020

Model: TRIM2 S

Worst Case Operating Mode:

Transmitting (802.11g-Channel 06)

Radiated Emissions (above 1GHz)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4874.000	41.7	36.7	33.4	38.4	74.0	-35.6
Horizontal	*7311.000	45.1	36.6	35.8	44.3	74.0	-29.7

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4874.000	30.7	36.7	33.4	27.4	54.0	-26.6
Horizontal	*7311.000	39.1	36.6	35.8	38.3	54.0	-15.7

- NOTES:
1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.
 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna used for the emission over 1000MHz.
- * Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: SKYBELL TECHNOLOGIES INC

Date of Test: September 09, 2020

Model: TRIM2 S

Worst Case Operating Mode:

Transmitting (802.11g-Channel 11)

Radiated Emissions (above 1GHz)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4924.000	42.6	36.8	33.3	39.1	74.0	-34.9
Horizontal	*7386.000	49.6	36.5	29.3	42.4	74.0	-31.6

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4924.000	34.0	36.8	33.3	30.5	54.0	-23.5
Horizontal	*7386.000	37.3	36.5	29.3	30.1	54.0	-23.9

- NOTES:
1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.
 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna used for the emission over 1000MHz.
- * Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: SKYBELL TECHNOLOGIES INC

Date of Test: September 09, 2020

Model: TRIM2 S

Worst Case Operating Mode:

Transmitting (802.11n20-Channel 01)

Radiated Emissions (above 1GHz)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4824.000	38.3	36.8	33.5	35.0	74.0	-39.0
Horizontal	*2390.000	36.5	36.4	29.1	29.2	74.0	-44.8

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4824.000	29.4	36.8	33.5	26.1	54.0	-27.9
Horizontal	*2390.000	30.2	36.4	29.1	22.9	54.0	-31.1

- NOTES:
1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz/VBW=10Hz for average value.
 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna used for the emission over 1000MHz.
- * Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: SKYBELL TECHNOLOGIES INC

Date of Test: September 09, 2020

Model: TRIM2 S

Worst Case Operating Mode:

Transmitting (802.11n20-Channel 06)

Radiated Emissions (above 1GHz)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4874.000	38.7	36.7	33.4	35.4	74.0	-38.6
Horizontal	*7311.000	43.1	36.6	35.8	42.3	74.0	-31.7

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4874.000	33.5	36.7	33.4	30.2	54.0	-23.8
Horizontal	*7311.000	37.1	36.6	35.8	36.3	54.0	-17.7

- NOTES:
1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.
 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna used for the emission over 1000MHz.
- * Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: SKYBELL TECHNOLOGIES INC

Date of Test: September 09, 2020

Model: TRIM2 S

Worst Case Operating Mode:

Transmitting (802.11n20-Channel 11)

Radiated Emissions (above 1GHz)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4924.000	39.7	36.8	33.3	36.2	74.0	-37.8
Horizontal	*7386.000	52.4	36.5	29.3	45.2	74.0	-28.8

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4924.000	28.9	36.8	33.3	25.4	54.0	-28.6
Horizontal	*7386.000	43.8	36.5	29.3	36.6	54.0	-17.4

- NOTES:
1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.
 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna used for the emission over 1000MHz.
- * Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: SKYBELL TECHNOLOGIES INC

Date of Test: September 09, 2020

Model: TRIM2 S

Worst Case Operating Mode:

Transmitting (802.11n40-Channel 03)

Radiated Emissions (above 1GHz)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4844.000	38.6	36.8	33.5	35.3	74.0	-38.7
Horizontal	*2390.000	35.7	36.4	29.1	28.4	74.0	-45.6

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4844.000	28.4	36.8	33.5	25.1	54.0	-28.9
Horizontal	*2390.000	28.4	36.4	29.1	21.1	54.0	-32.9

- NOTES:
1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz/VBW=10Hz for average value.
 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna used for the emission over 1000MHz.
- * Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: SKYBELL TECHNOLOGIES INC

Date of Test: September 09, 2020

Model: TRIM2 S

Worst Case Operating Mode:

Transmitting (802.11n40-Channel 06)

Radiated Emissions (above 1GHz)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4874.000	38.6	36.7	33.4	35.3	74.0	-38.7
Horizontal	*7311.000	45.9	36.6	35.8	45.1	74.0	-28.9

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4874.000	28.5	36.7	33.4	25.2	54.0	-28.8
Horizontal	*7311.000	37.0	36.6	35.8	36.2	54.0	-17.8

- NOTES:
1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.
 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna used for the emission over 1000MHz.
- * Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: SKYBELL TECHNOLOGIES INC

Date of Test: September 09, 2020

Worst Case Operating Mode:

Model: TRIM2 S

Transmitting (802.11n40-Channel 09)

Radiated Emissions (above 1GHz)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4904.000	38.9	36.8	33.3	35.4	74.0	-38.6
Horizontal	*7356.000	52.7	36.5	29.3	45.5	74.0	-28.5

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4904.000	28.7	36.8	33.3	25.2	54.0	-28.8
Horizontal	*7356.000	42.5	36.5	29.3	35.3	54.0	-18.7

- NOTES:
1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.
 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna used for the emission over 1000MHz.
- * Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Test data for Antenna 2:

Applicant: SKYBELL TECHNOLOGIES INC

Date of Test: September 09, 2020

Worst Case Operating Mode:

Model: TRIM2 S

Transmitting (802.11b-Channel 01)

Radiated Emissions (above 1GHz)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4824.000	40.5	36.8	33.5	37.2	74.0	-36.8
Horizontal	*2390.000	37.4	36.4	29.1	30.1	74.0	-43.9

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4824.000	33.4	36.8	33.5	30.1	54.0	-23.9
Horizontal	*2390.000	32.5	36.4	29.1	25.2	54.0	-28.8

- NOTES:
1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz/VBW=10Hz for average value.
 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna used for the emission over 1000MHz.
- * Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: SKYBELL TECHNOLOGIES INC

Date of Test: September 09, 2020

Worst Case Operating Mode:

Model: TRIM2 S

Transmitting (802.11b-Channel 06)

Radiated Emissions (above 1GHz)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4874.000	40.6	36.7	33.4	37.3	74.0	-36.7
Horizontal	*7311.000	44.0	36.6	35.8	43.2	74.0	-30.8

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4874.000	31.8	36.7	33.4	28.5	54.0	-25.5
Horizontal	*7311.000	36.9	36.6	35.8	36.1	54.0	-17.9

- NOTES:
1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.
 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna used for the emission over 1000MHz.
- * Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: SKYBELL TECHNOLOGIES INC

Date of Test: September 09, 2020

Worst Case Operating Mode:

Model: TRIM2 S

Transmitting (802.11b-Channel 11)

Radiated Emissions (above 1GHz)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4924.000	41.0	36.8	33.3	37.5	74.0	-36.5
Horizontal	*7386.000	50.9	36.5	29.3	43.7	74.0	-30.3

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4924.000	33.3	36.8	33.3	29.8	54.0	-24.2
Horizontal	*7386.000	45.7	36.5	29.3	38.5	54.0	-15.5

- NOTES:
1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.
 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna used for the emission over 1000MHz.
- * Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: SKYBELL TECHNOLOGIES INC

Date of Test: September 09, 2020

Worst Case Operating Mode:

Model: TRIM2 S

Transmitting (802.11g-Channel 01)

Radiated Emissions (above 1GHz)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4824.000	46.8	36.8	33.5	43.5	74.0	-30.5
Horizontal	*2390.000	37.7	36.4	29.1	30.4	74.0	-43.6

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4824.000	33.9	36.8	33.5	30.6	54.0	-23.4
Horizontal	*2390.000	30.4	36.4	29.1	23.1	54.0	-30.9

- NOTES:
1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz/VBW=10Hz for average value.
 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna used for the emission over 1000MHz.
- * Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: SKYBELL TECHNOLOGIES INC

Date of Test: September 09, 2020

Worst Case Operating Mode:

Model: TRIM2 S

Transmitting (802.11g-Channel 06)

Radiated Emissions (above 1GHz)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4874.000	39.6	36.7	33.4	36.3	74.0	-37.7
Horizontal	*7311.000	43.9	36.6	35.8	43.1	74.0	-30.9

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4874.000	33.4	36.7	33.4	30.1	54.0	-23.9
Horizontal	*7311.000	37.3	36.6	35.8	36.5	54.0	-17.5

- NOTES:
1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.
 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna used for the emission over 1000MHz.
- * Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: SKYBELL TECHNOLOGIES INC

Date of Test: September 09, 2020

Worst Case Operating Mode:

Model: TRIM2 S

Transmitting (802.11g-Channel 11)

Radiated Emissions (above 1GHz)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4924.000	38.6	36.8	33.3	35.1	74.0	-38.9
Horizontal	*7386.000	51.4	36.5	29.3	44.2	74.0	-29.8

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4924.000	33.6	36.8	33.3	30.1	54.0	-23.9
Horizontal	*7386.000	45.6	36.5	29.3	38.4	54.0	-15.6

- NOTES:
1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.
 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna used for the emission over 1000MHz.
- * Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: SKYBELL TECHNOLOGIES INC

Date of Test: September 09, 2020

Worst Case Operating Mode:

Model: TRIM2 S

Transmitting (802.11n20-Channel 01)

Radiated Emissions (above 1GHz)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4824.000	38.3	36.8	33.5	35.0	74.0	-39.0
Horizontal	*2390.000	32.6	36.4	29.1	25.3	74.0	-48.7

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4824.000	31.4	36.8	33.5	28.1	54.0	-25.9
Horizontal	*2390.000	28.8	36.4	29.1	21.5	54.0	-32.5

- NOTES:
1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz/VBW=10Hz for average value.
 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna used for the emission over 1000MHz.
- * Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: SKYBELL TECHNOLOGIES INC

Date of Test: September 09, 2020

Worst Case Operating Mode:

Model: TRIM2 S

Transmitting (802.11n20-Channel 06)

Radiated Emissions (above 1GHz)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4874.000	38.7	36.7	33.4	35.4	74.0	-38.6
Horizontal	*7311.000	46.0	36.6	35.8	45.2	74.0	-28.8

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4874.000	32.4	36.7	33.4	29.1	54.0	-24.9
Horizontal	*7311.000	39.0	36.6	35.8	38.2	54.0	-15.8

- NOTES:
1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.
 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna used for the emission over 1000MHz.
- * Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: SKYBELL TECHNOLOGIES INC

Date of Test: September 09, 2020

Worst Case Operating Mode:

Model: TRIM2 S

Transmitting (802.11n20-Channel 11)

Radiated Emissions (above 1GHz)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4924.000	40.0	36.8	33.3	36.5	74.0	-37.5
Horizontal	*7386.000	50.4	36.5	29.3	43.2	74.0	-30.8

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4924.000	34.0	36.8	33.3	30.5	54.0	-23.5
Horizontal	*7386.000	45.3	36.5	29.3	38.1	54.0	-15.9

- NOTES:
1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.
 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna used for the emission over 1000MHz.
- * Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: SKYBELL TECHNOLOGIES INC

Date of Test: September 09, 2020

Worst Case Operating Mode:

Model: TRIM2 S

Transmitting (802.11n40-Channel 03)

Radiated Emissions (above 1GHz)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4844.000	34.7	36.8	33.5	31.4	74.0	-42.6
Horizontal	*2390.000	35.1	36.4	29.1	27.8	74.0	-46.2

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4844.000	29.4	36.8	33.5	26.1	54.0	-27.9
Horizontal	*2390.000	27.8	36.4	29.1	20.5	54.0	-33.5

- NOTES:
1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz/VBW=10Hz for average value.
 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna used for the emission over 1000MHz.
- * Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: SKYBELL TECHNOLOGIES INC

Date of Test: September 09, 2020

Worst Case Operating Mode:

Model: TRIM2 S

Transmitting (802.11n40-Channel 06)

Radiated Emissions (above 1GHz)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4874.000	46.5	36.7	33.4	43.2	74.0	-30.8
Horizontal	*7311.000	38.9	36.6	35.8	38.1	74.0	-35.9

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4874.000	41.8	36.7	33.4	38.5	54.0	-15.5
Horizontal	*7311.000	30.0	36.6	35.8	29.2	54.0	-24.8

- NOTES:
1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.
 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna used for the emission over 1000MHz.
- * Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: SKYBELL TECHNOLOGIES INC

Date of Test: September 09, 2020

Worst Case Operating Mode:

Model: TRIM2 S

Transmitting (802.11n40-Channel 09)

Radiated Emissions (above 1GHz)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4904.000	46.9	36.8	33.3	43.4	74.0	-30.6
Horizontal	*7356.000	36.3	36.5	29.3	29.1	74.0	-44.9

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4904.000	37.0	36.8	33.3	33.5	54.0	-20.5
Horizontal	*7356.000	30.1	36.5	29.3	22.9	54.0	-31.1

- NOTES:
1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.
 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna used for the emission over 1000MHz.
- * Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: SKYBELL TECHNOLOGIES INC

Date of Test: September 01, 2020

Model: TRIM2 S

4.9 Conducted Emission

Worst Case Conducted Emission (Antenna 1, 802.11b-Channel 01)
at 0.696MHz
is passed by 3.1dB margin.

For the electronic filing, the worst case radiated emission configuration photographs are saved with filename: conducted photos.pdf.

Applicant: SKYBELL TECHNOLOGIES INC

Date of Test: September 01, 2020


Model: TRIM2 S

Worst Case Operating Mode: Antenna 1, 802.11b-Channel 01

Phase: Live

Graphic / Data Table

Conducted Emissions Pursuant to FCC 15.207: Emissions Requirement

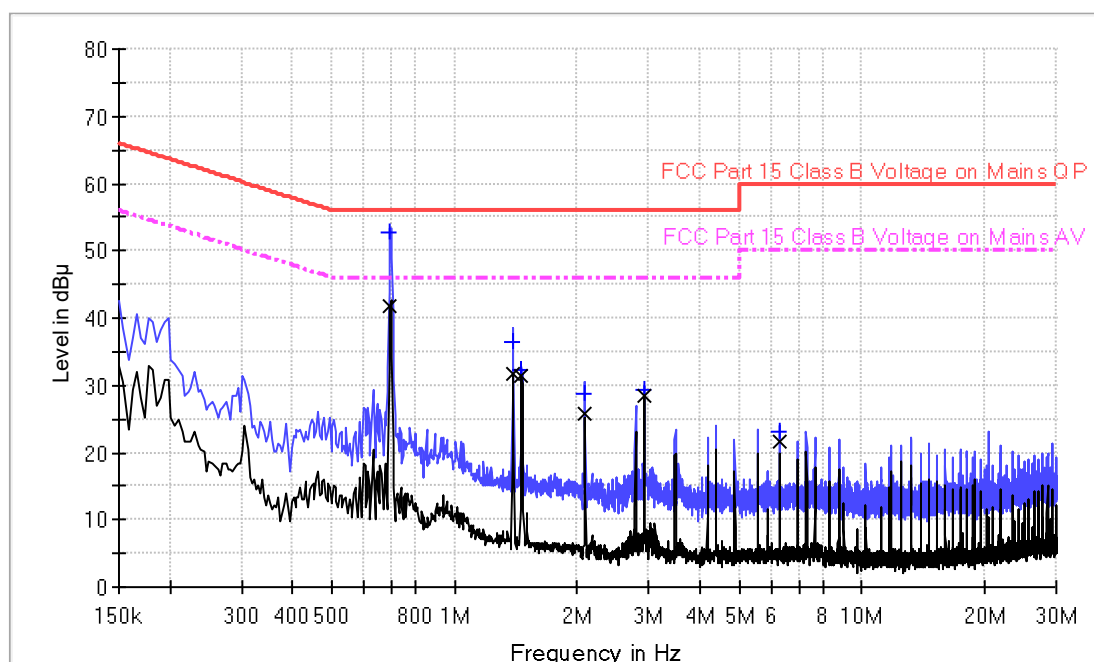

Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.696000	52.9	9.000	L1	9.7	3.1	56.0
1.392000	36.4	9.000	L1	9.7	19.6	56.0
1.458000	32.2	9.000	L1	9.7	23.8	56.0
2.086000	28.7	9.000	L1	9.7	27.3	56.0
2.926000	29.3	9.000	L1	9.8	26.7	56.0
6.262000	23.1	9.000	L1	9.8	36.9	60.0

Limit and Margin AV

Frequency (MHz)	Average (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.696000	41.9	9.000	L1	9.7	4.1	46.0
1.392000	31.6	9.000	L1	9.7	14.4	46.0
1.458000	31.5	9.000	L1	9.7	14.5	46.0
2.086000	25.8	9.000	L1	9.7	20.2	46.0
2.926000	28.4	9.000	L1	9.8	17.6	46.0
6.262000	21.6	9.000	L1	9.8	28.4	50.0

Applicant: SKYBELL TECHNOLOGIES INC

Date of Test: September 01, 2020


Model: TRIM2 S

Worst Case Operating Mode: Antenna 1, 802.11b-Channel 01

Phase: Neutral

Graphic / Data Table

Conducted Emissions Pursuant to FCC 15.207: Emissions Requirement

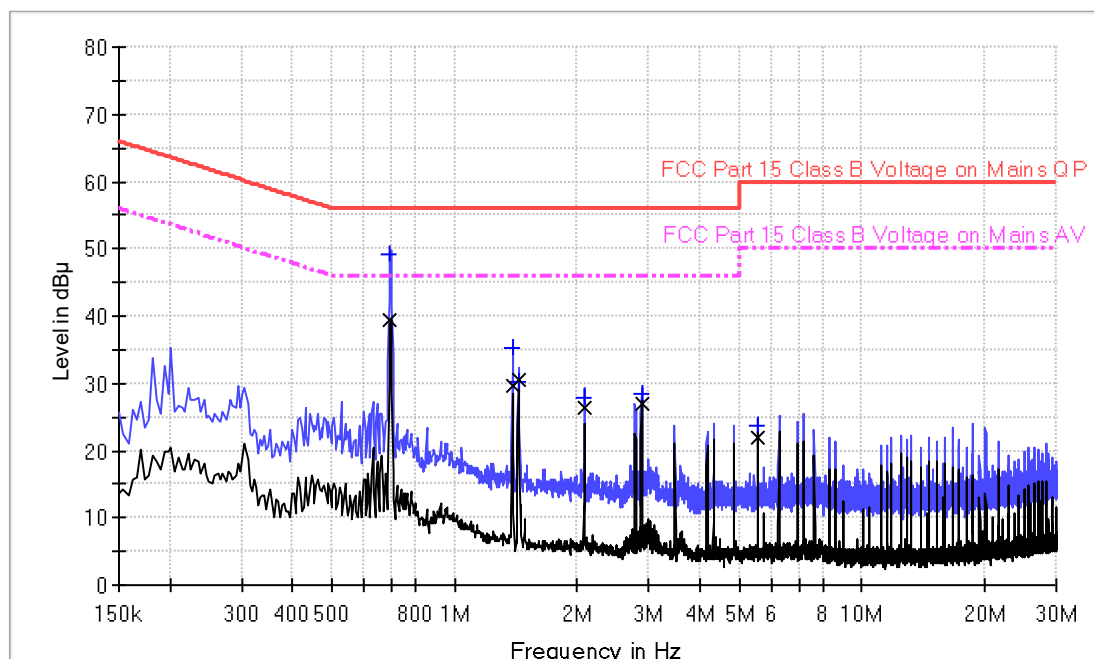

Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.694000	49.3	9.000	N	9.7	6.7	56.0
1.390000	35.4	9.000	N	9.7	20.6	56.0
1.434000	30.2	9.000	N	9.7	25.8	56.0
2.084000	27.9	9.000	N	9.8	28.1	56.0
2.878000	28.5	9.000	N	9.8	27.5	56.0
5.562000	23.8	9.000	N	9.8	36.2	60.0

Limit and Margin AV

Frequency (MHz)	Average (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.694000	39.4	9.000	N	9.7	6.6	46.0
1.390000	29.6	9.000	N	9.7	16.4	46.0
1.434000	30.5	9.000	N	9.7	15.5	46.0
2.084000	26.3	9.000	N	9.8	19.7	46.0
2.878000	27.1	9.000	N	9.8	18.9	46.0
5.562000	21.9	9.000	N	9.8	28.1	50.0

Applicant: SKYBELL TECHNOLOGIES INC

Date of Test: September 01, 2020

Model: TRIM2 S

4.10 Radiated Emissions from Digital Section of Transceiver, FCC Ref: 15.109

☐ Not required - No digital part

☐ Test results are attached

☒ Included in the separated report.

Applicant: SKYBELL TECHNOLOGIES INC

Date of Test: September 01, 2020

Model: TRIM2 S

4.11 Transmitter Duty Cycle Calculation and Measurements, FCC Rule 15.35(b), (c)

The EUT antenna output port was connected to the input of the spectrum analyzer. The analyzer center frequency was set to EUT RF channel carrier. The SWEP function on the analyzer was set to ZERO SPAN. The Transmitter ON time was determined from the resultant time-amplitude display:

	See attached spectrum analyzer chart (s) for Transmitter timing
	See Transmitter timing diagram provided by manufacturer
x	Not applicable, duty cycle was not used.

5.0 Equipment Photographs

For electronic filing, the photographs are saved with filename: external photos.pdf & internal photos.pdf.

6.0 Product Labeling

For electronic filing, the FCC ID label artwork and location is saved with filename: label.pdf.

7.0 Technical Specifications

For electronic filing, the block diagram and circuit diagram are saved with filename: block.pdf and circuit.pdf respectively.

8.0 Instruction Manual

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States.

9.0 Confidentiality Request

For electronic filing, the confidentiality request of the tested EUT is saved with filename: request.pdf.

10.0 Discussion of Pulse Desensitization

The determination of pulse desensitivity was made in accordance with Hewlett Packard Application Note 150-2, *Spectrum Analysis ... Pulsed RF*.

Pulse desensitivity is not applicable for this device since the transmitter transmits the RF signal continuously.

11.0 Test Equipment List

Equipment No.	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
SZ182-02	RF Power Meter	Anritsu	ML2496A	1302005	27-May-2020	27-May-2021
SZ182-02-01	Power Sensor	Anritsu	MA2411B	1207429	27-May-2020	27-May-2021
SZ061-03	BiConiLog Antenna	ETS	3142C	00078828	24-May-2019	24-May-2021
SZ185-01	EMI Receiver	R&S	ESCI	100547	24-Dec-2019	24-Dec-2020
SZ061-08	Horn Antenna	ETS	3115	00092346	07-Sep-2019	07-Sep-2021
SZ061-06	Active Loop Antenna	Electro-Metrics	EM-6876	217	24-May-2019	24-May-2021
SZ056-03	Spectrum Analyzer	R&S	FSP 30	101148	27-May-2020	27-May-2021
SZ056-06	Signal Analyzer	R&S	FSV 40	101101	27-May-2020	27-May-2021
SZ181-04	Preamplifier	Agilent	8449B	3008A02474	27-May-2020	27-May-2021
SZ188-01	Anechoic Chamber	ETS	RFD-F/A-100	4102	15-Dec-2018	15-Dec-2021
SZ062-02	RF Cable	RADIAL	RG 213U	--	12-Jun-2020	12-Dec-2020
SZ062-05	RF Cable	RADIAL	0.04-26.5GHz	--	24-Aug-2020	24-Dec-2020
SZ062-12	RF Cable	RADIAL	0.04-26.5GHz	--	24-Aug-2020	24-Feb-2021
SZ067-04	Notch Filter	Micro-Tronics	BRM50702-02	--	27-May-2020	27-May-2021
SZ185-02	EMI Test Receiver	R&S	ESCI	100692	29-Oct-2019	29-Oct-2020
SZ187-01	Two-Line V-Network	R&S	ENV216	100072	29-Oct-2019	29-Oct-2020
SZ187-02	Two-Line V-Network	R&S	ENV216	100072	27-May-2020	27-May-2021
SZ062-16	RF Cable	HUBER+SUHNER	CBL2-BN-1m	110127-2231000	30-Oct-2019	30-Oct-2020
SZ188-03	Shielding Room	ETS	RFD-100	4100	07-Jan-2020	07-Jan-2023

***** End of Report*****