




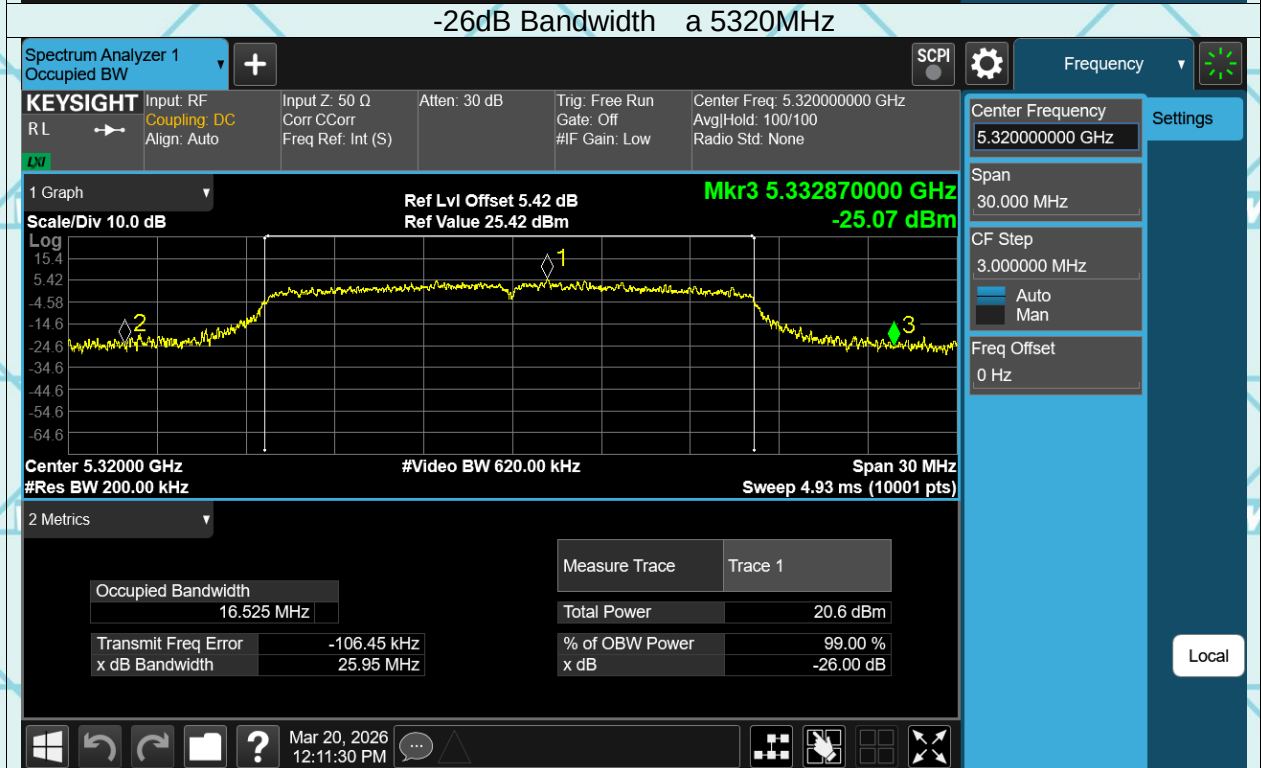
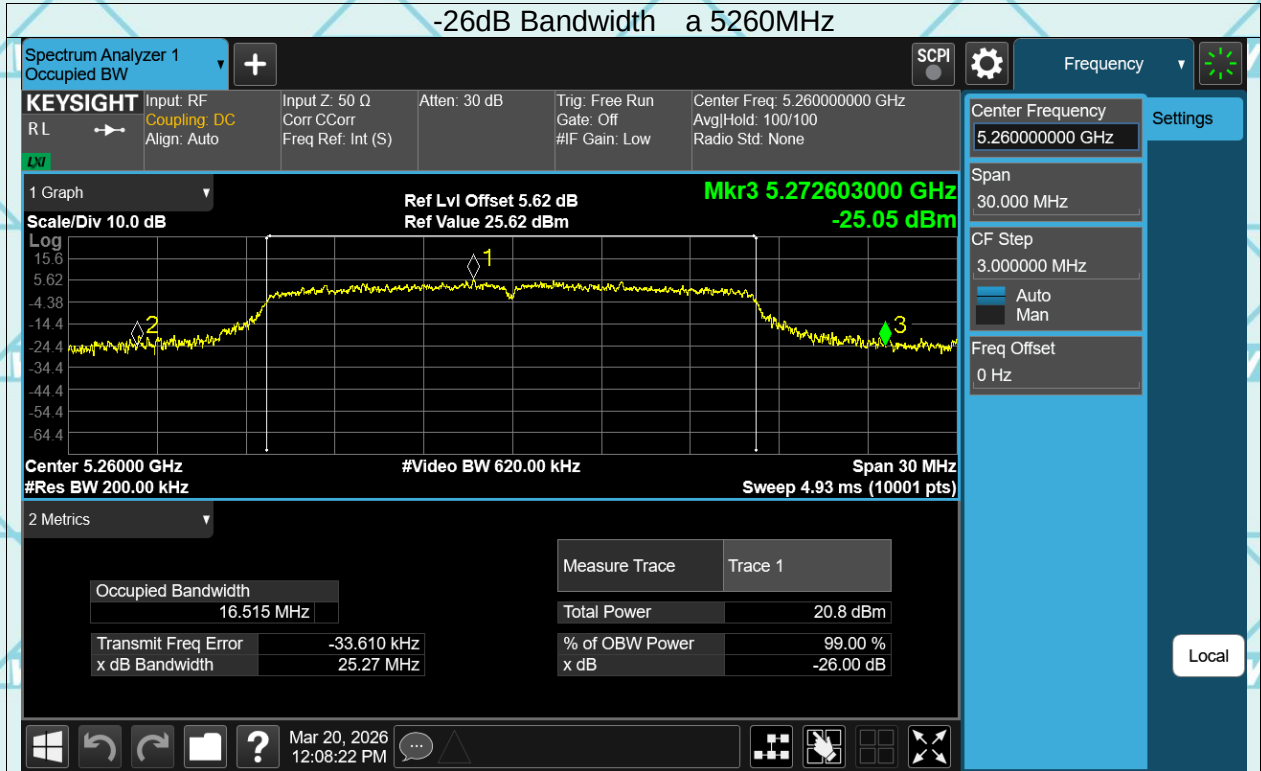
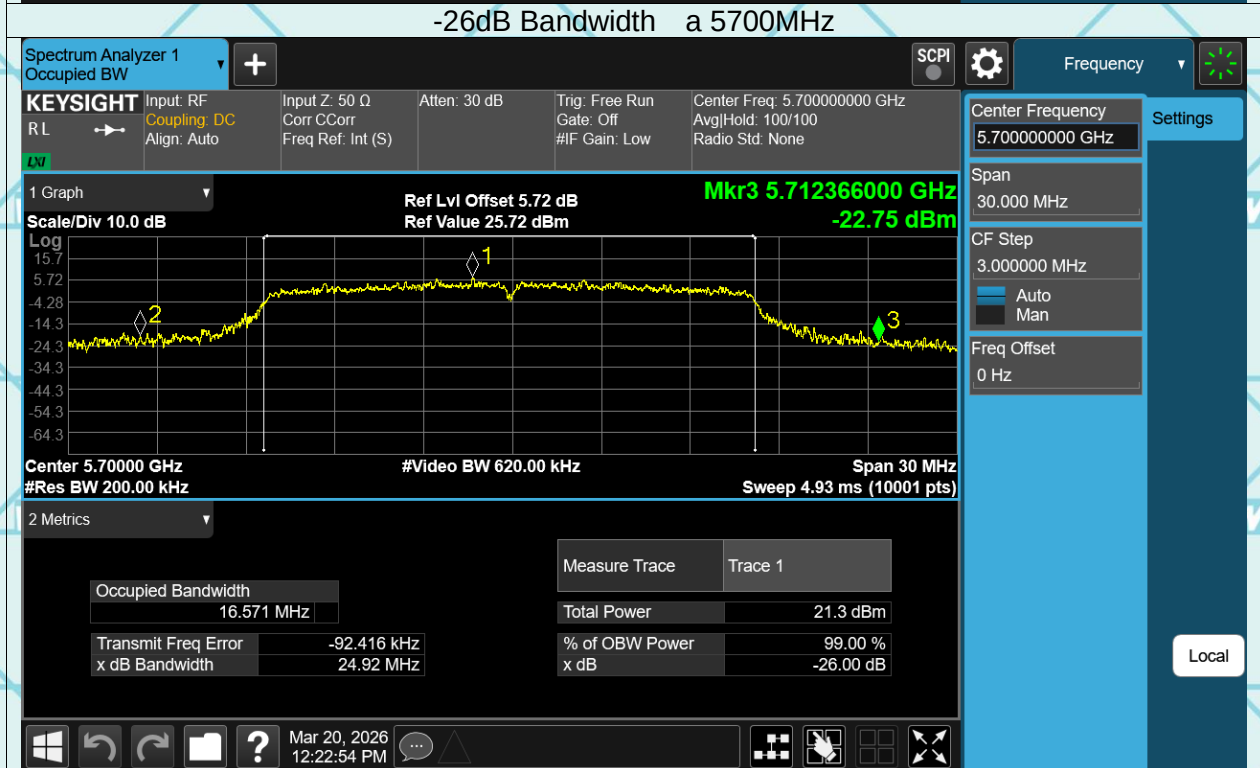
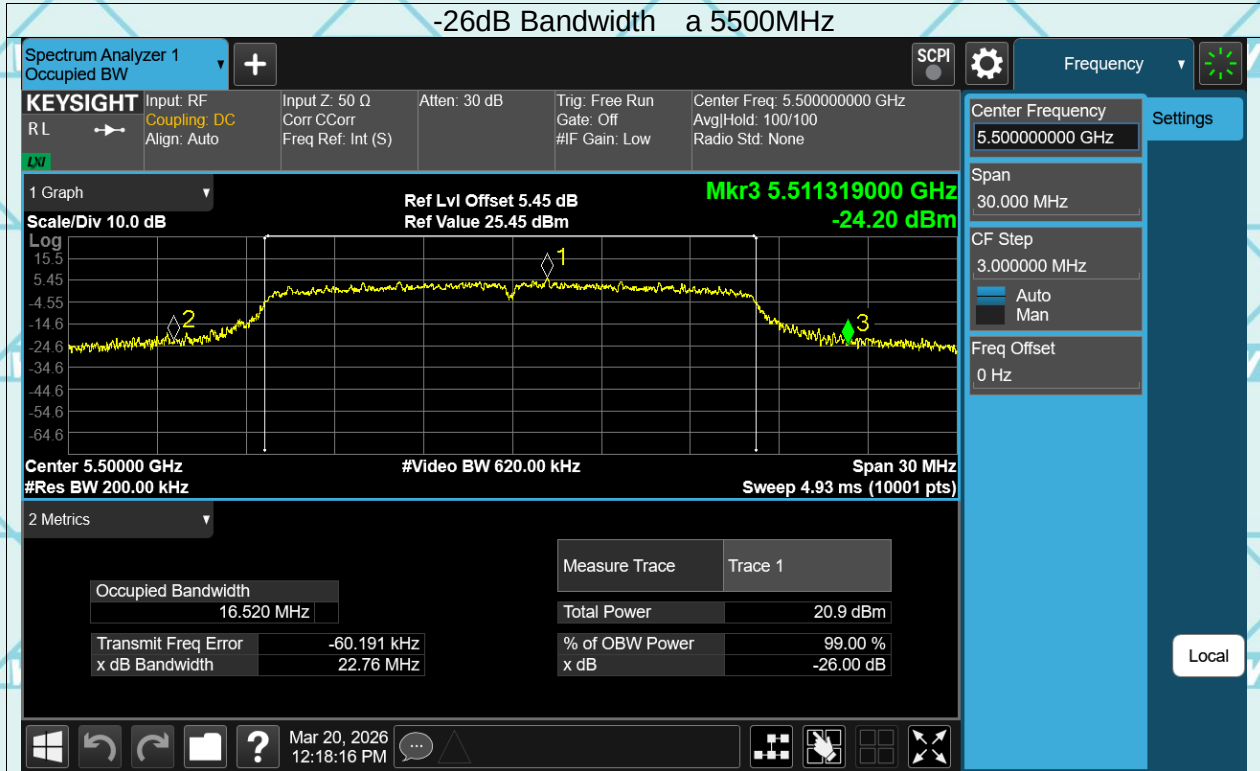
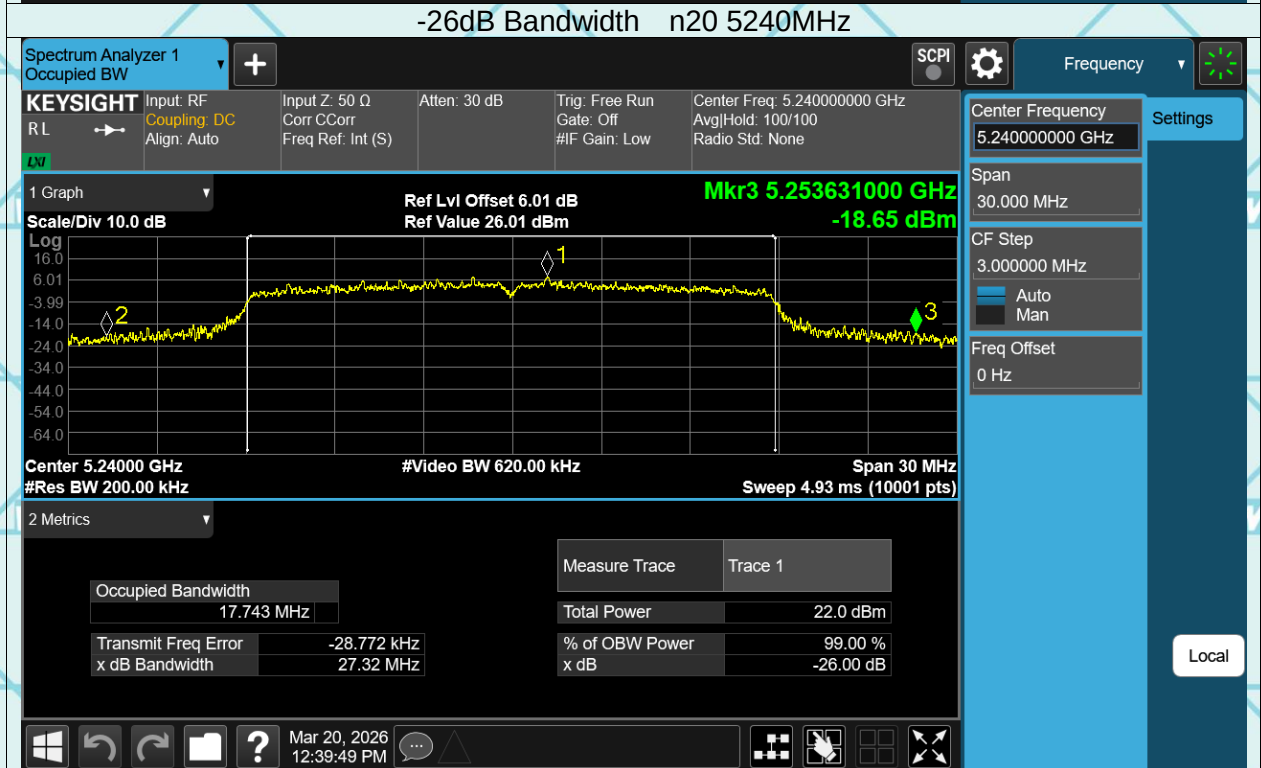



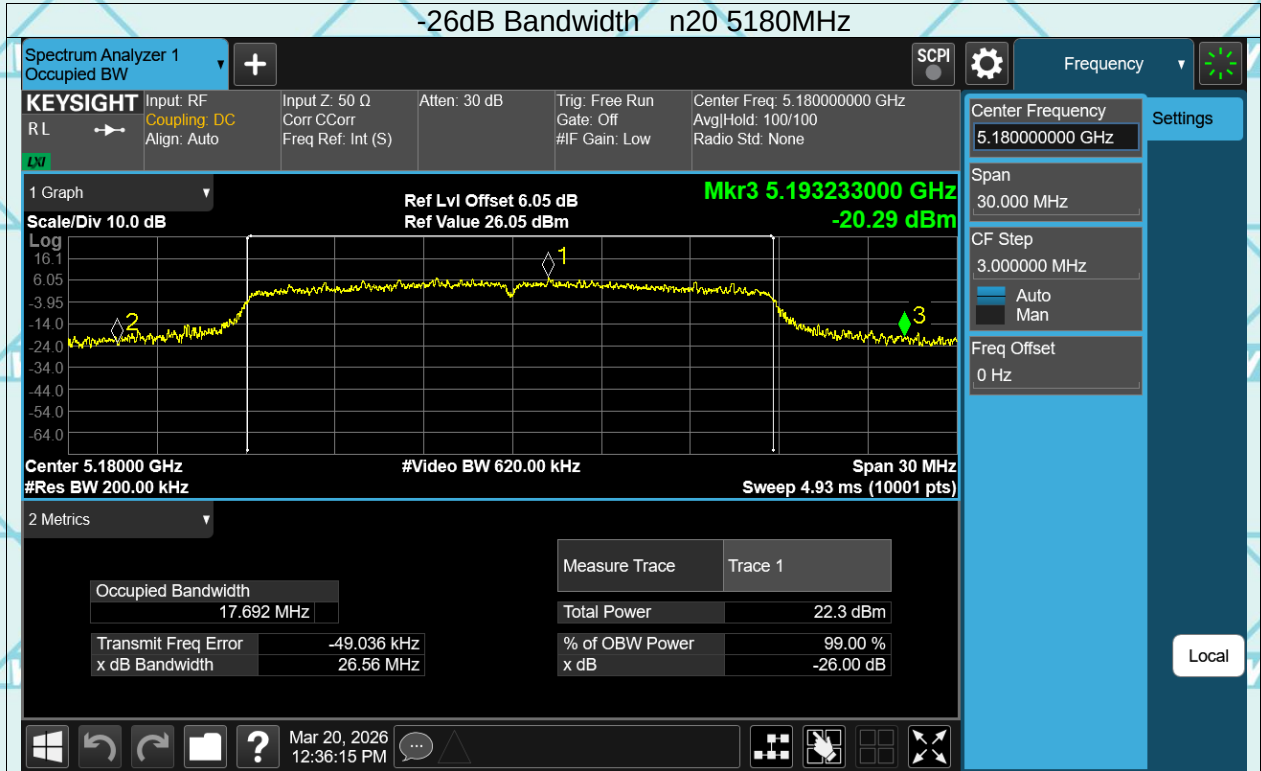



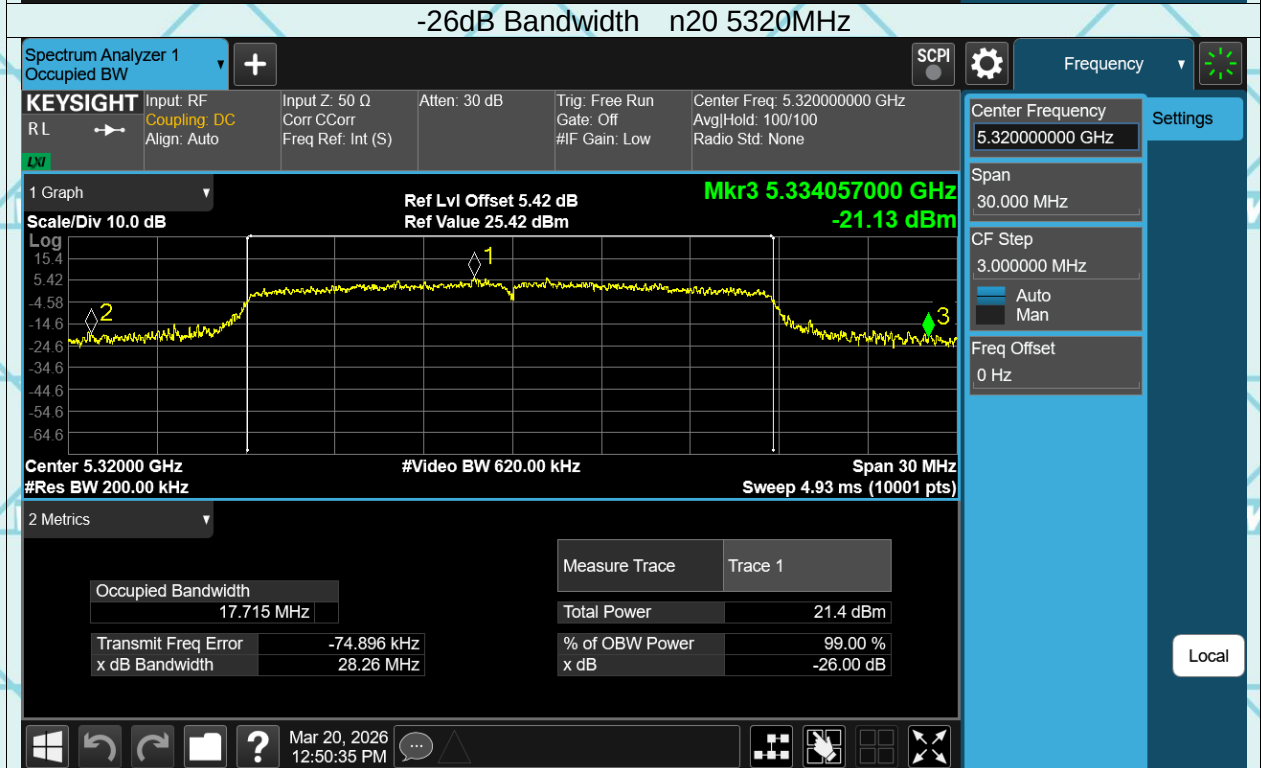



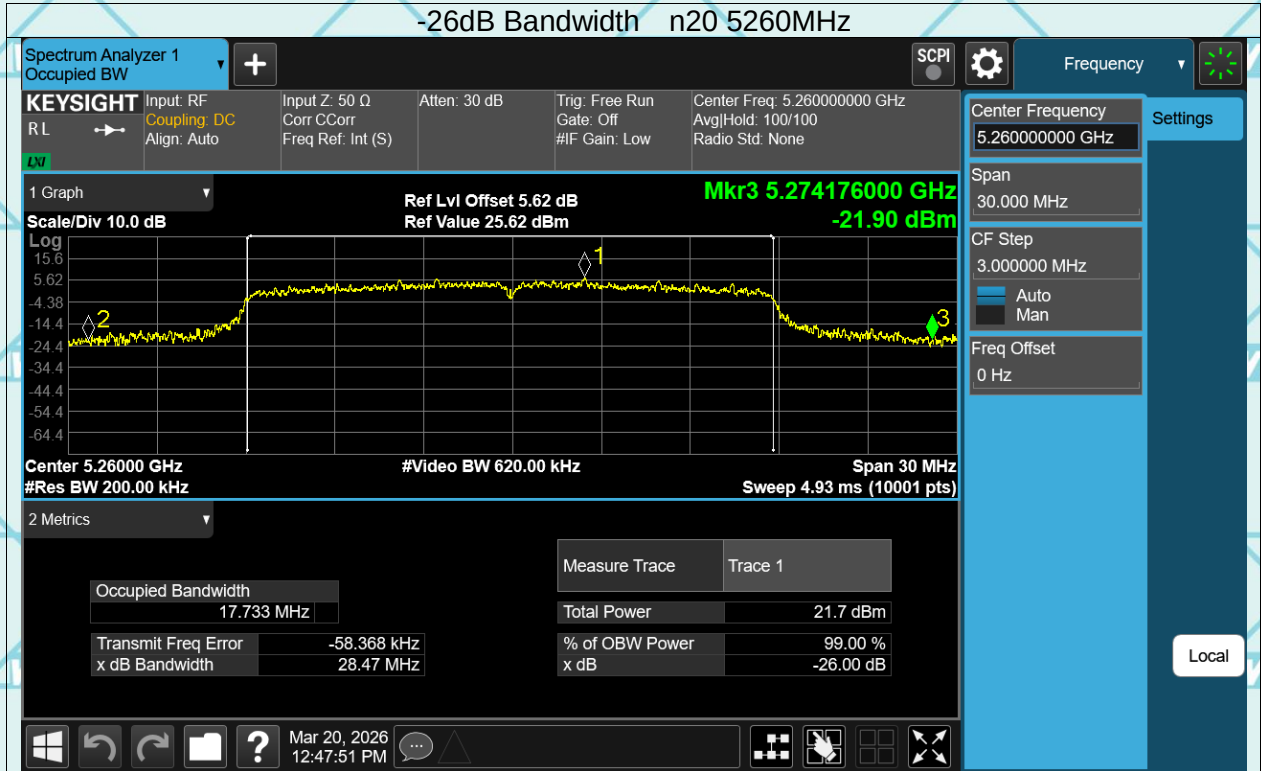



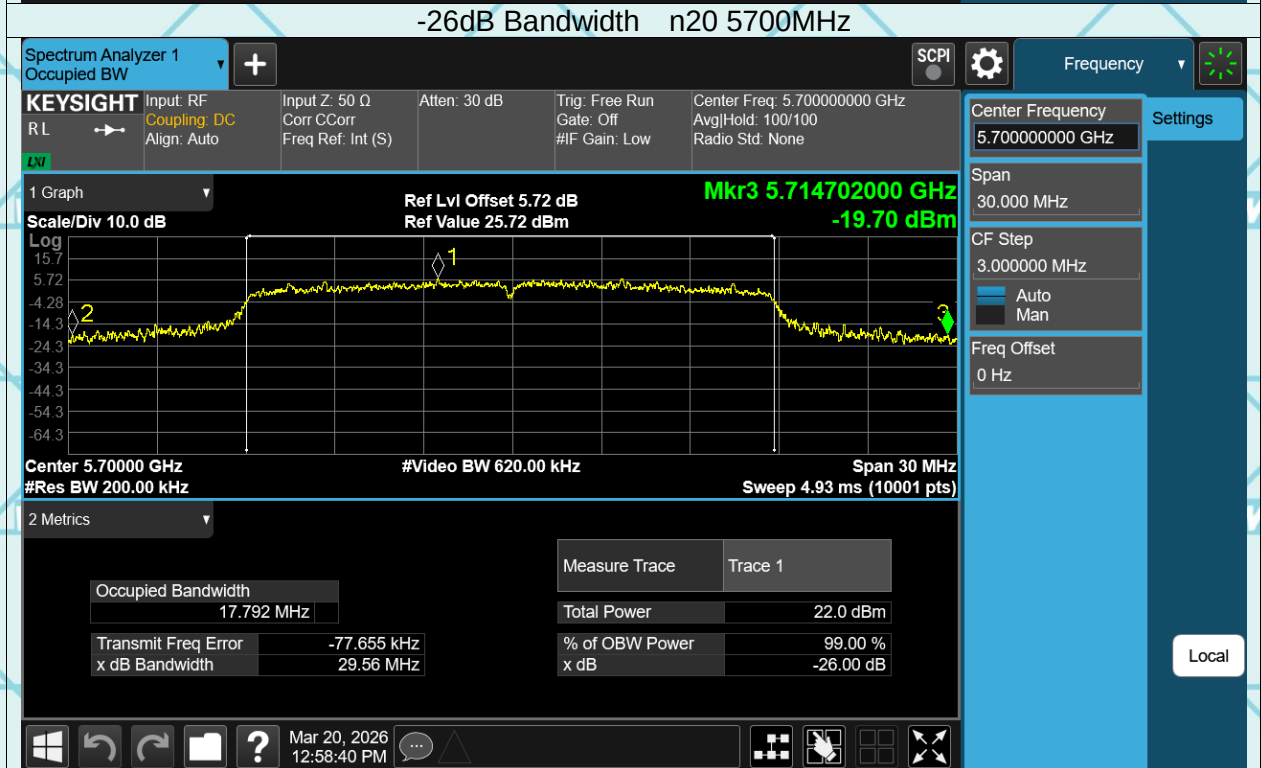



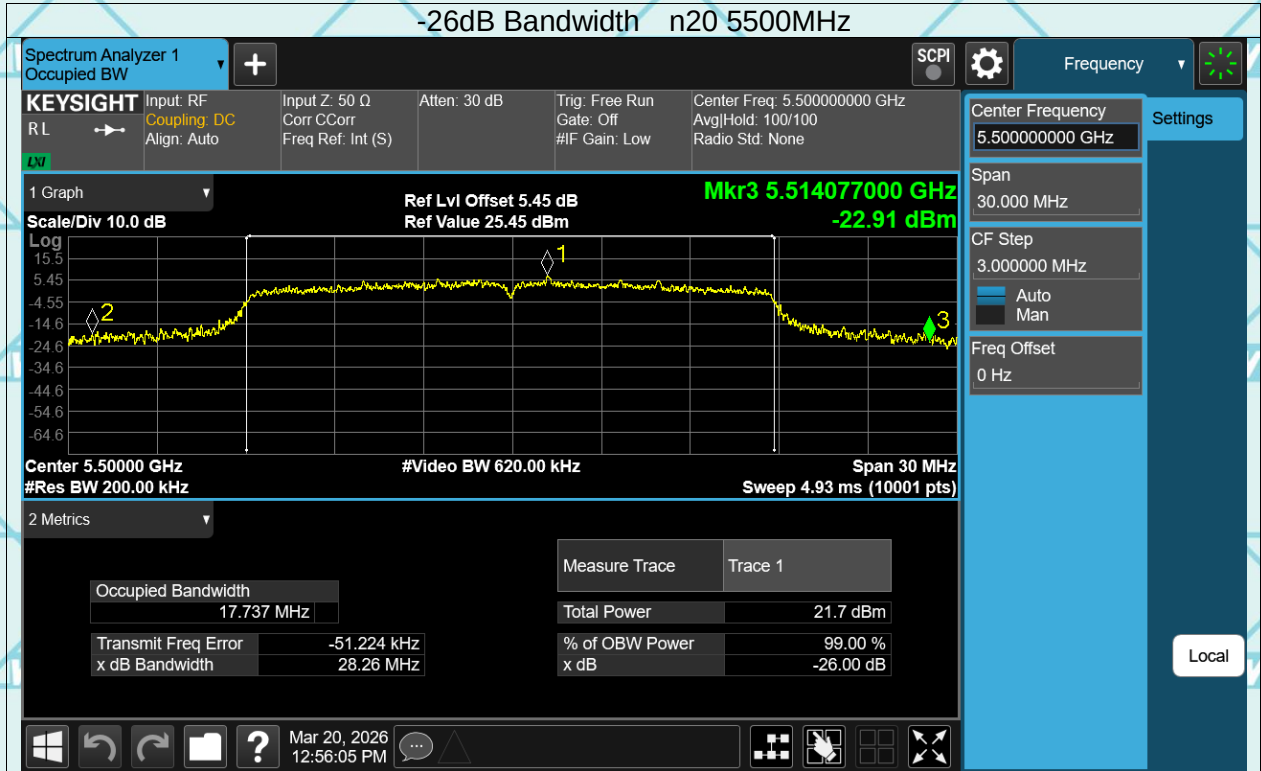


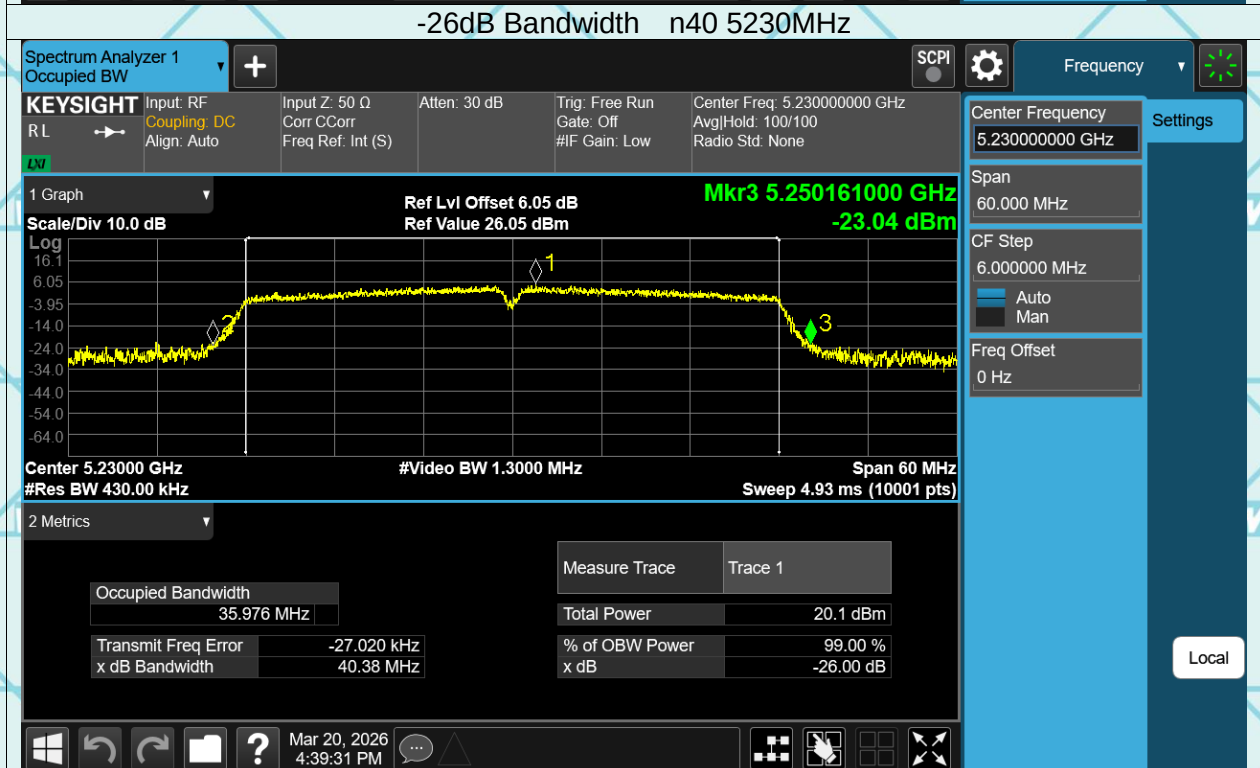
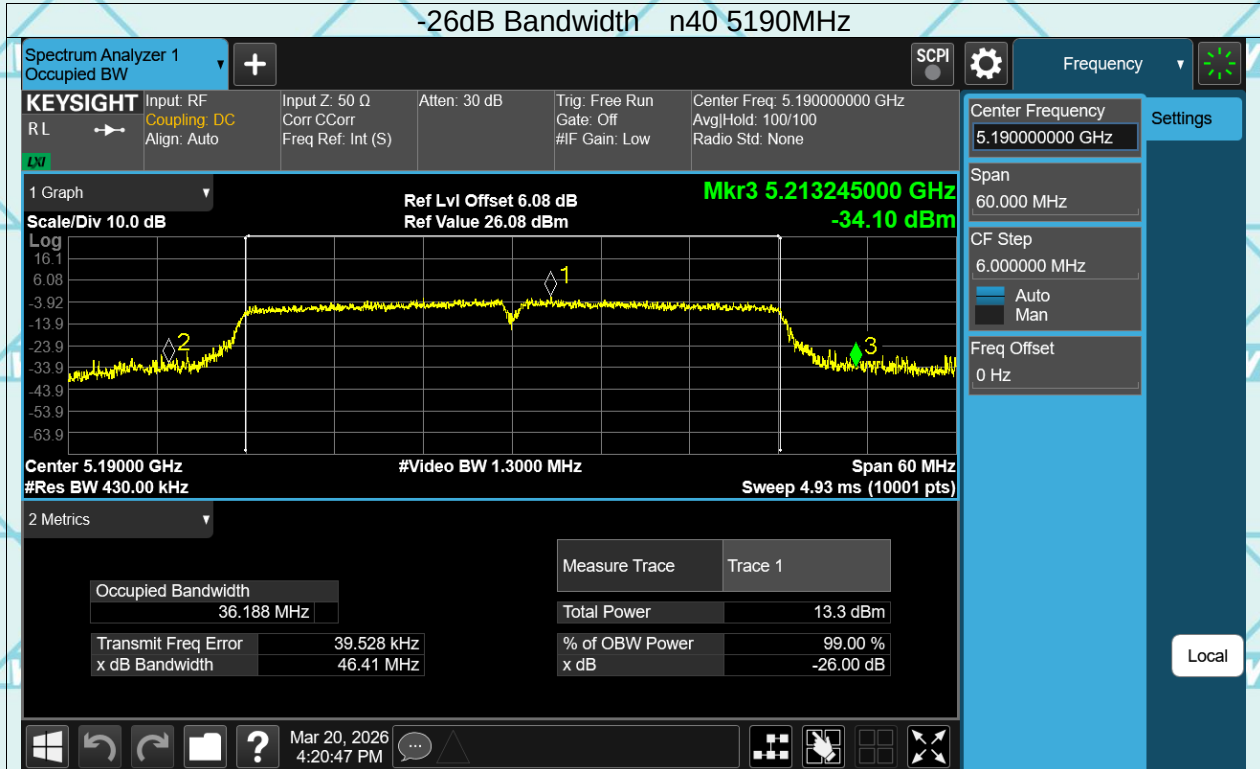


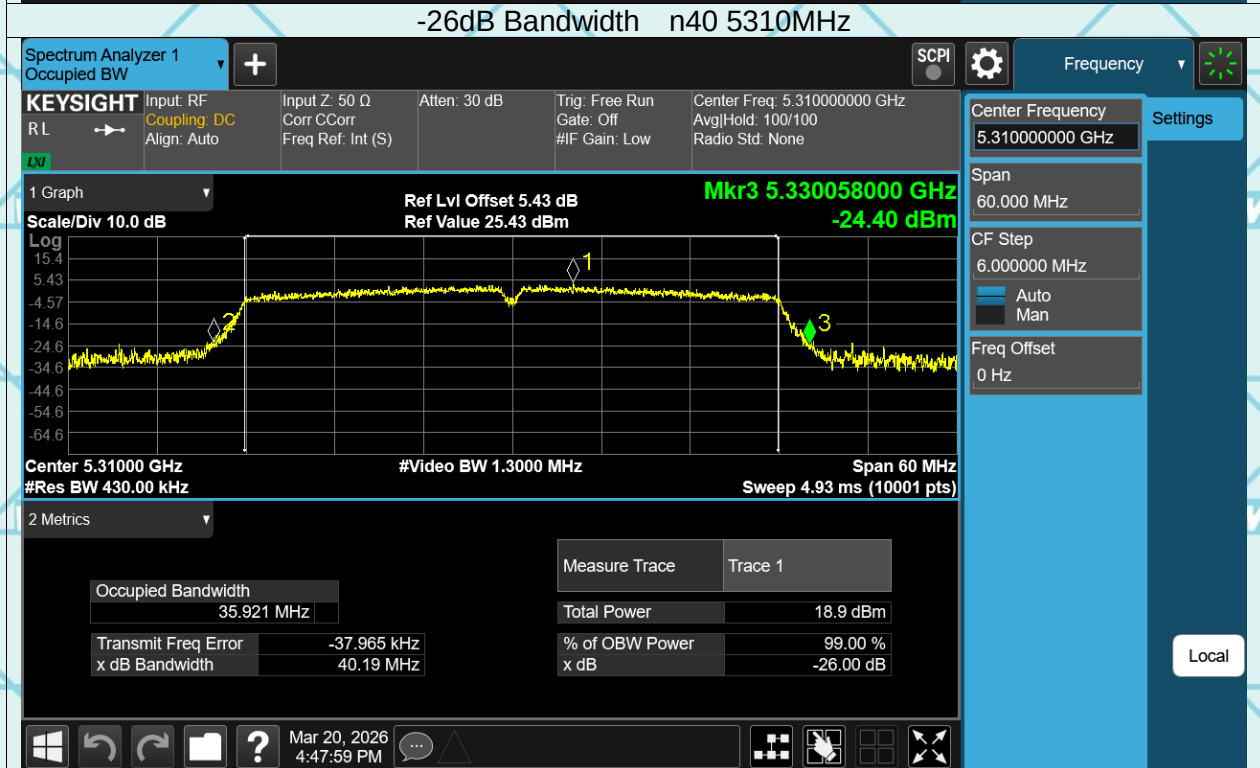
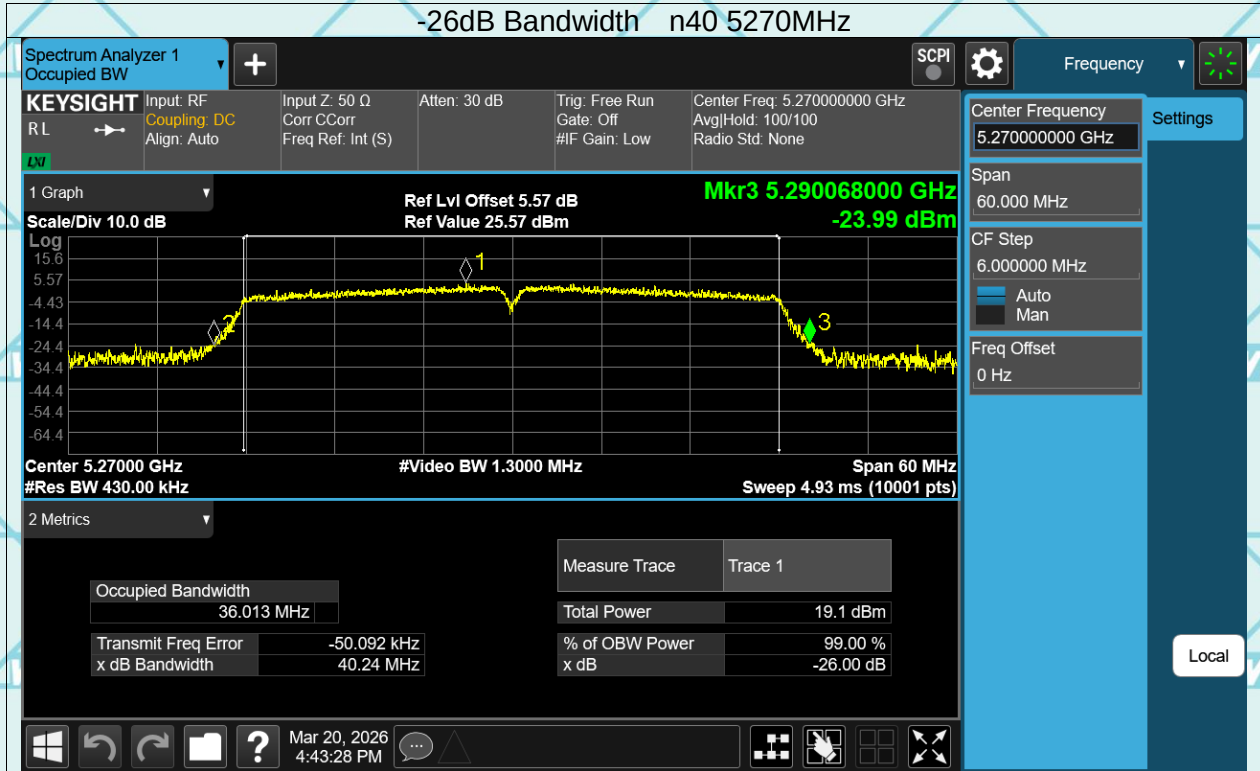


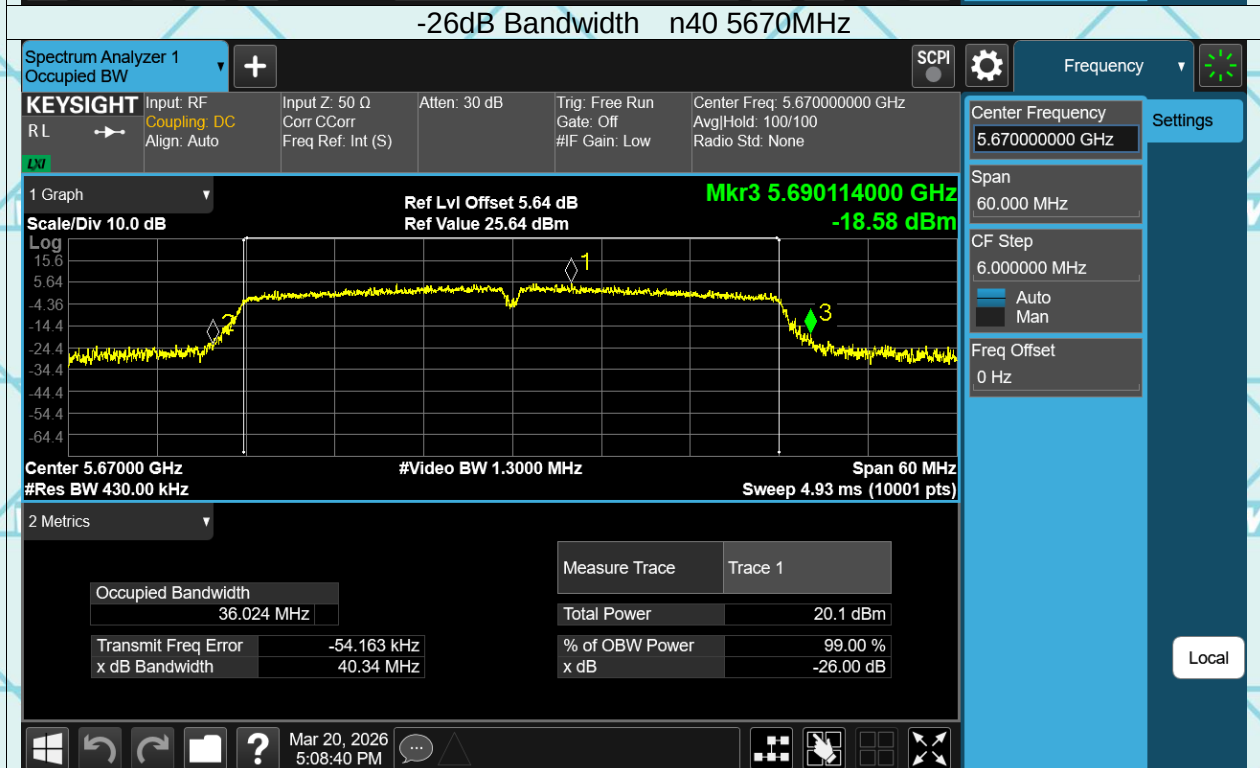
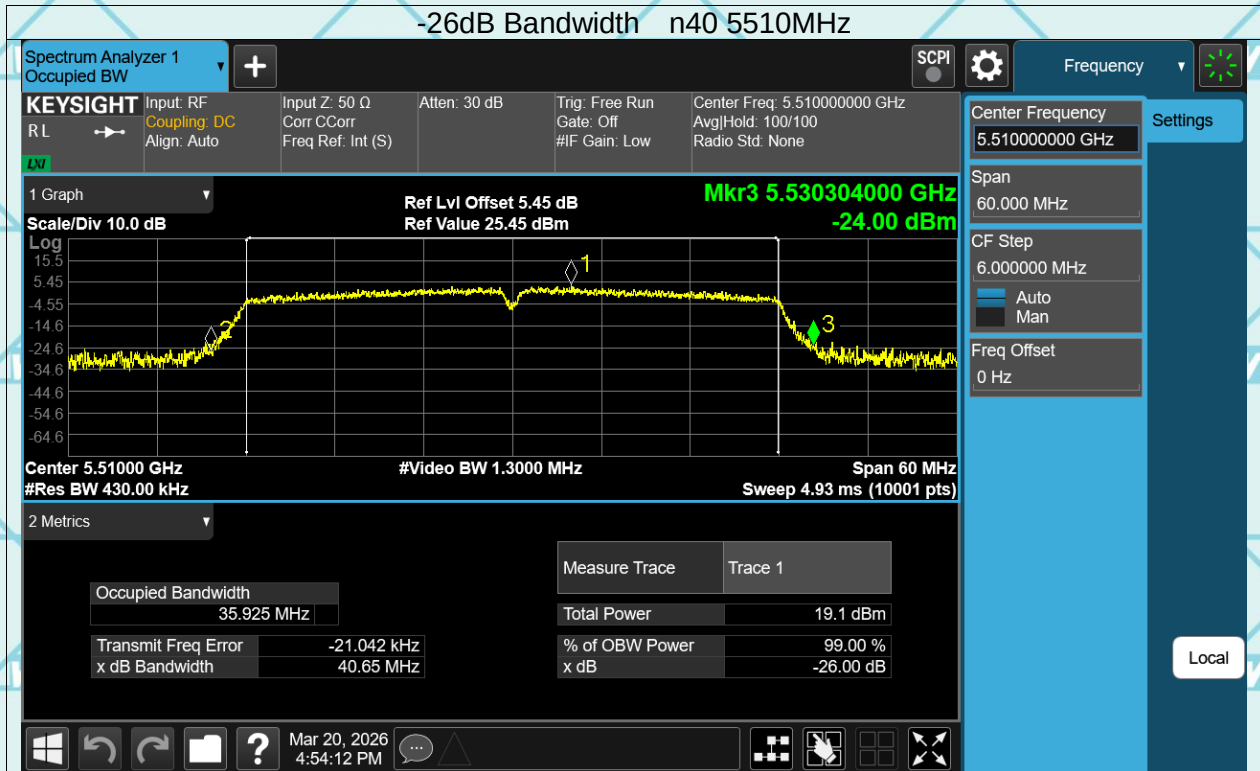


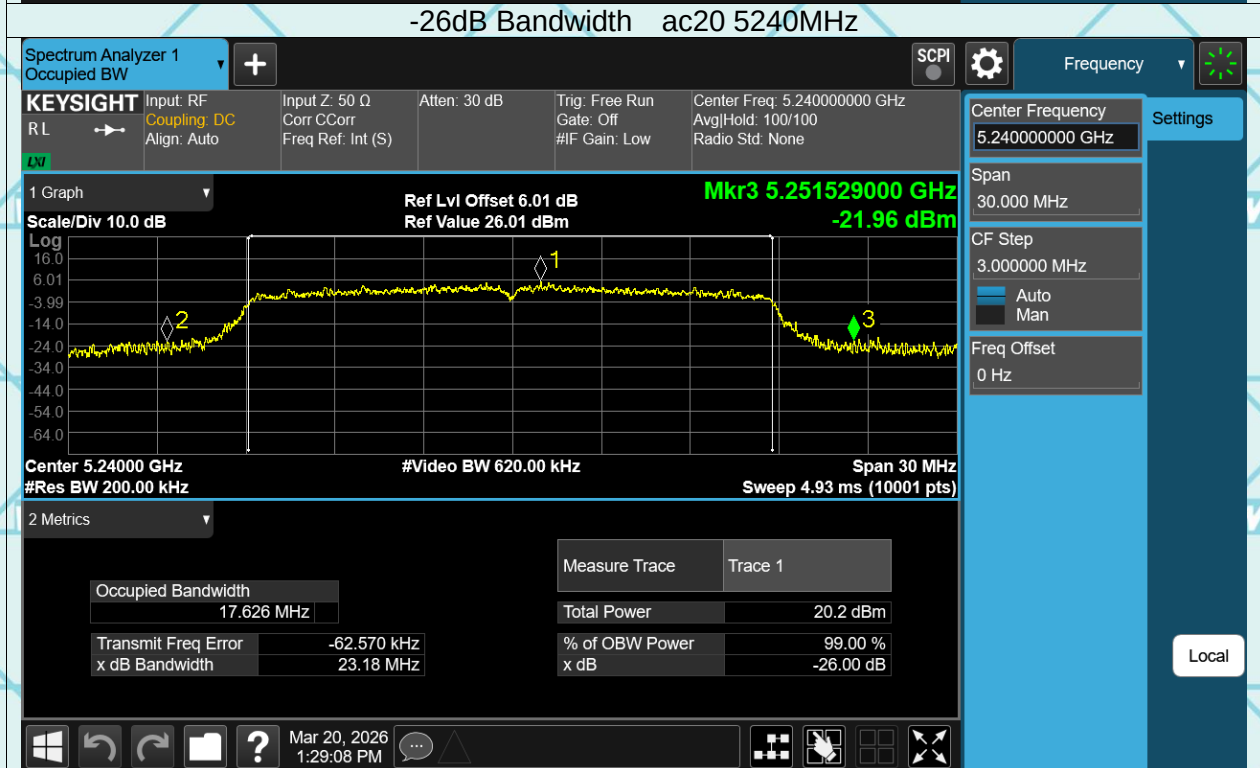
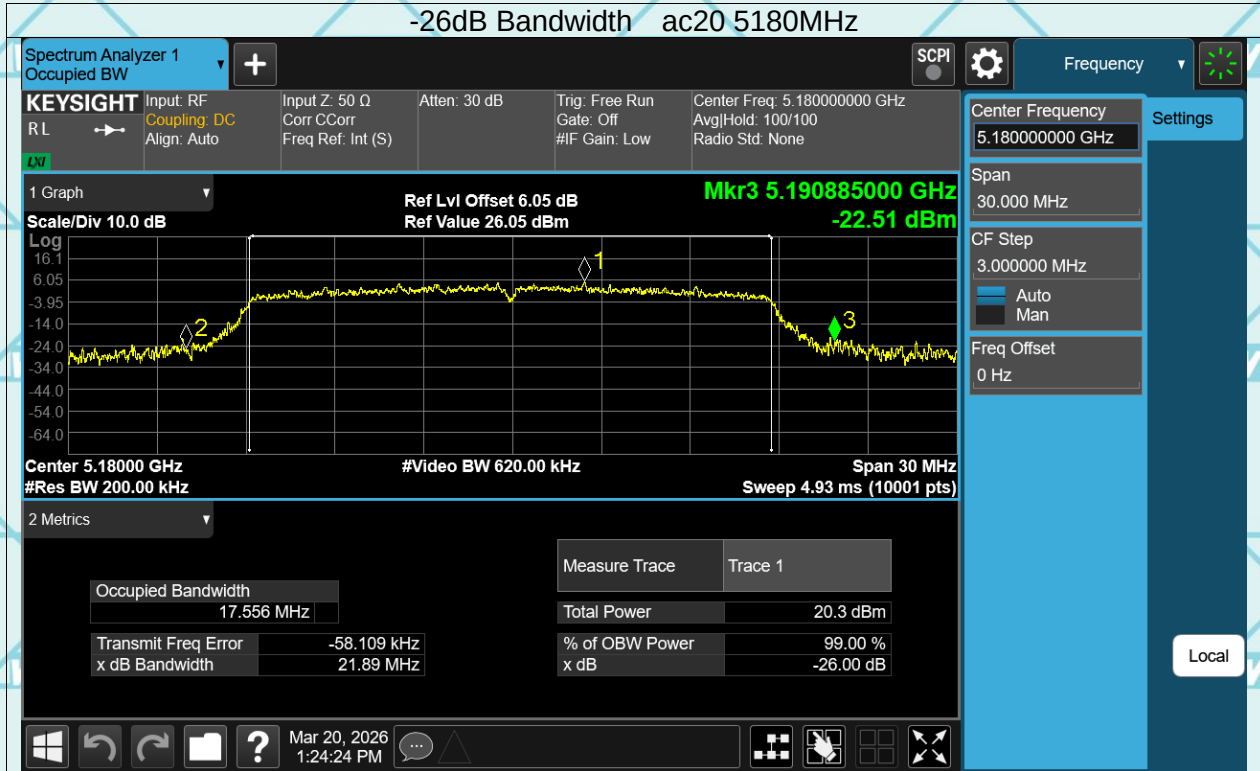


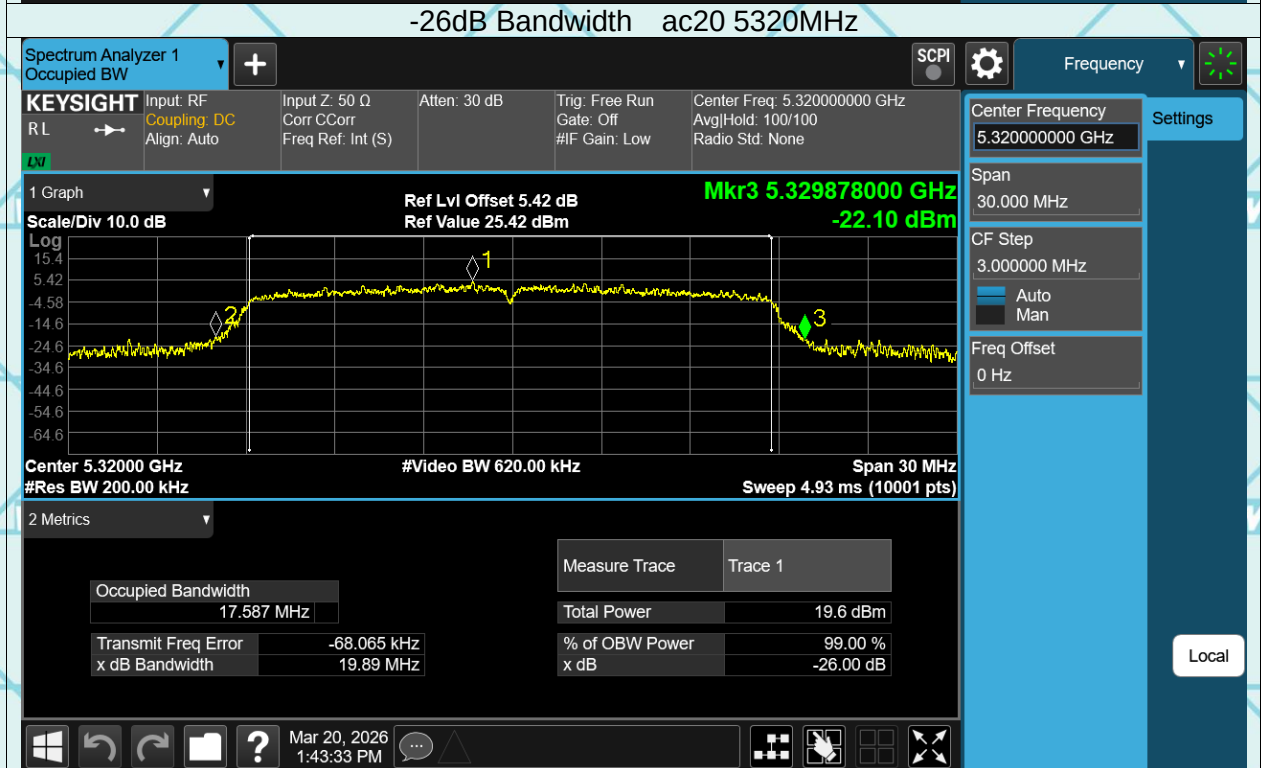
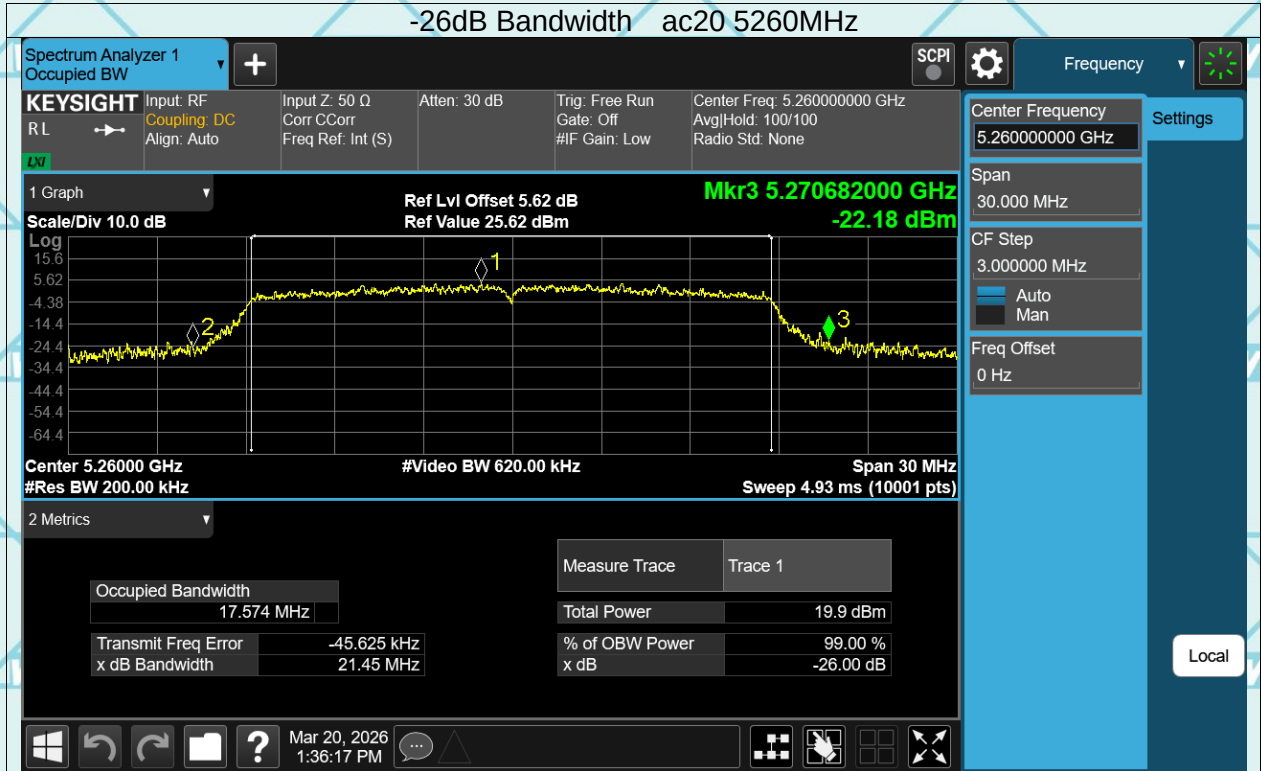


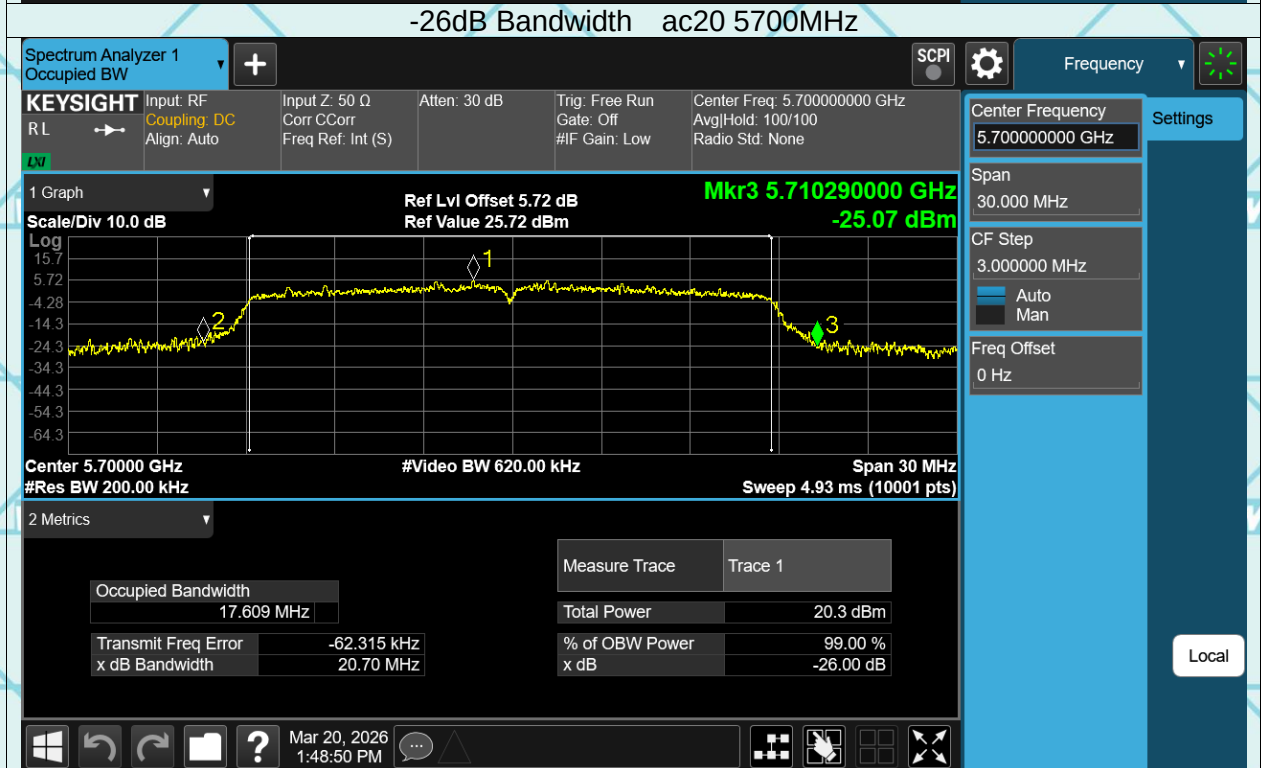
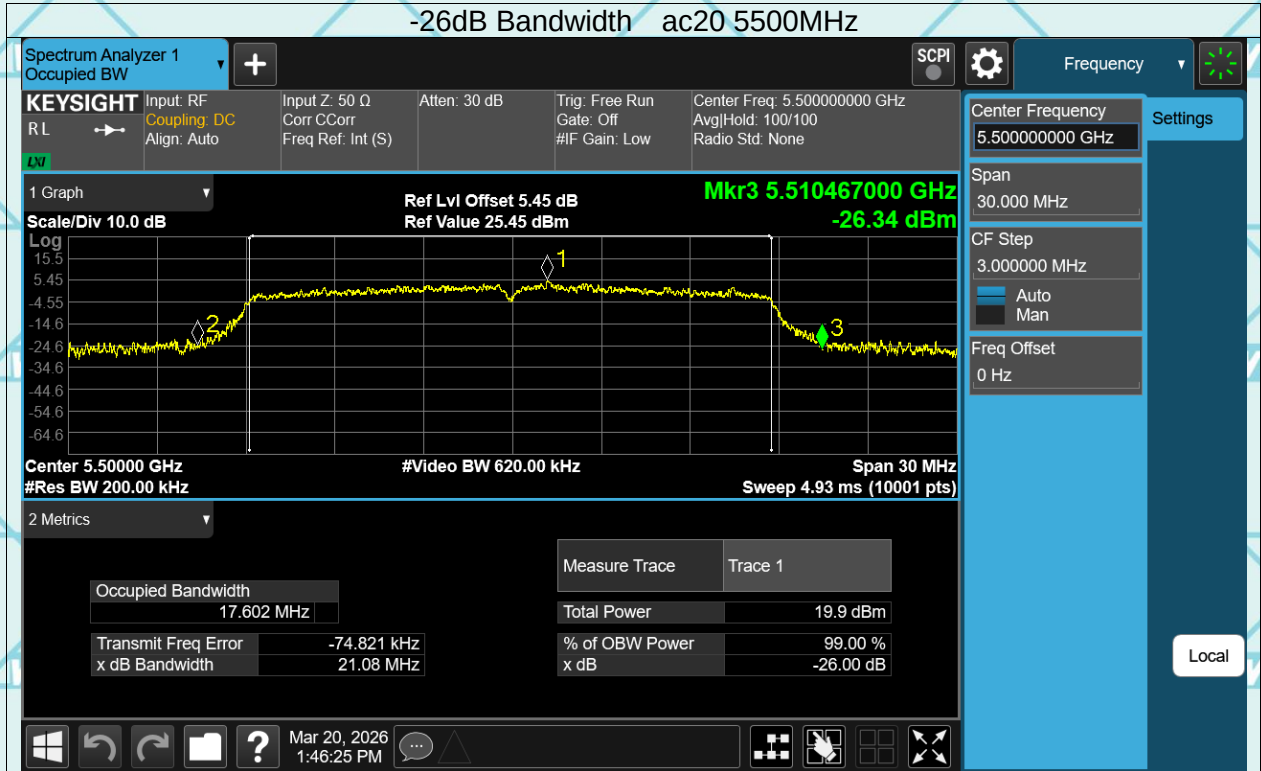


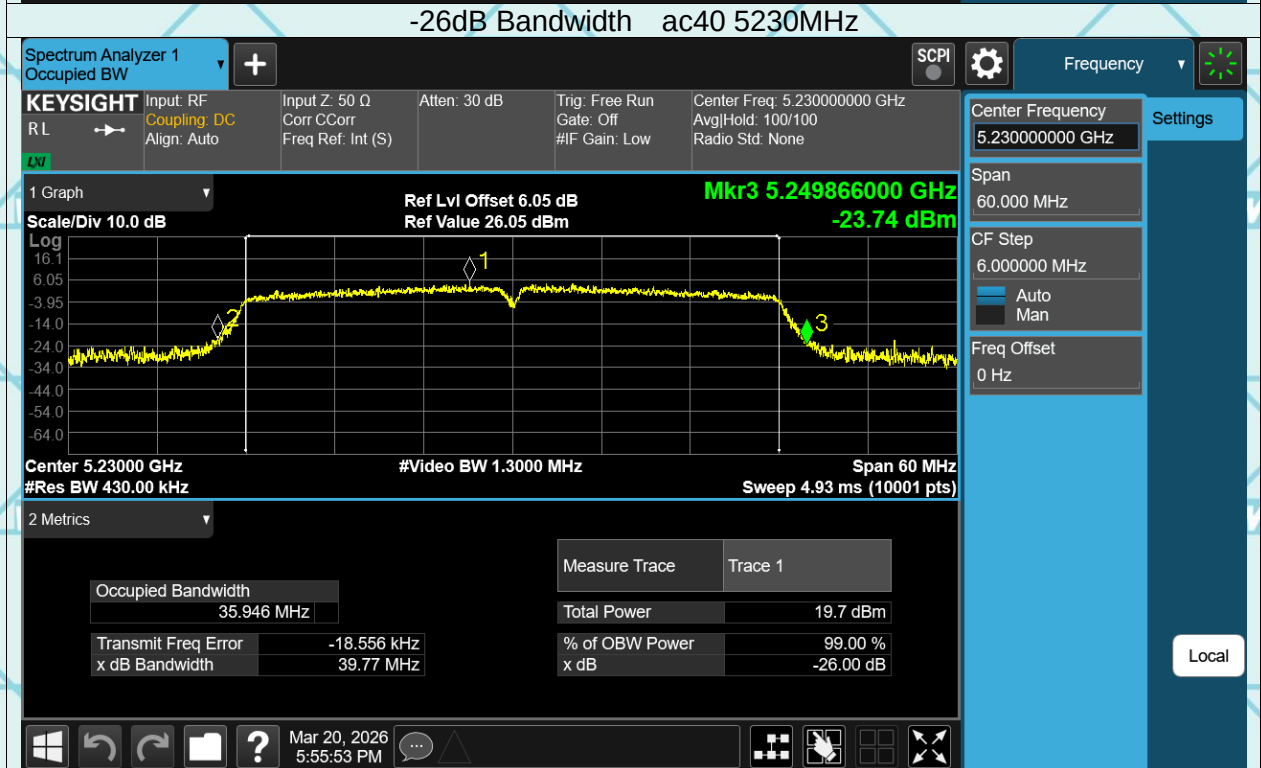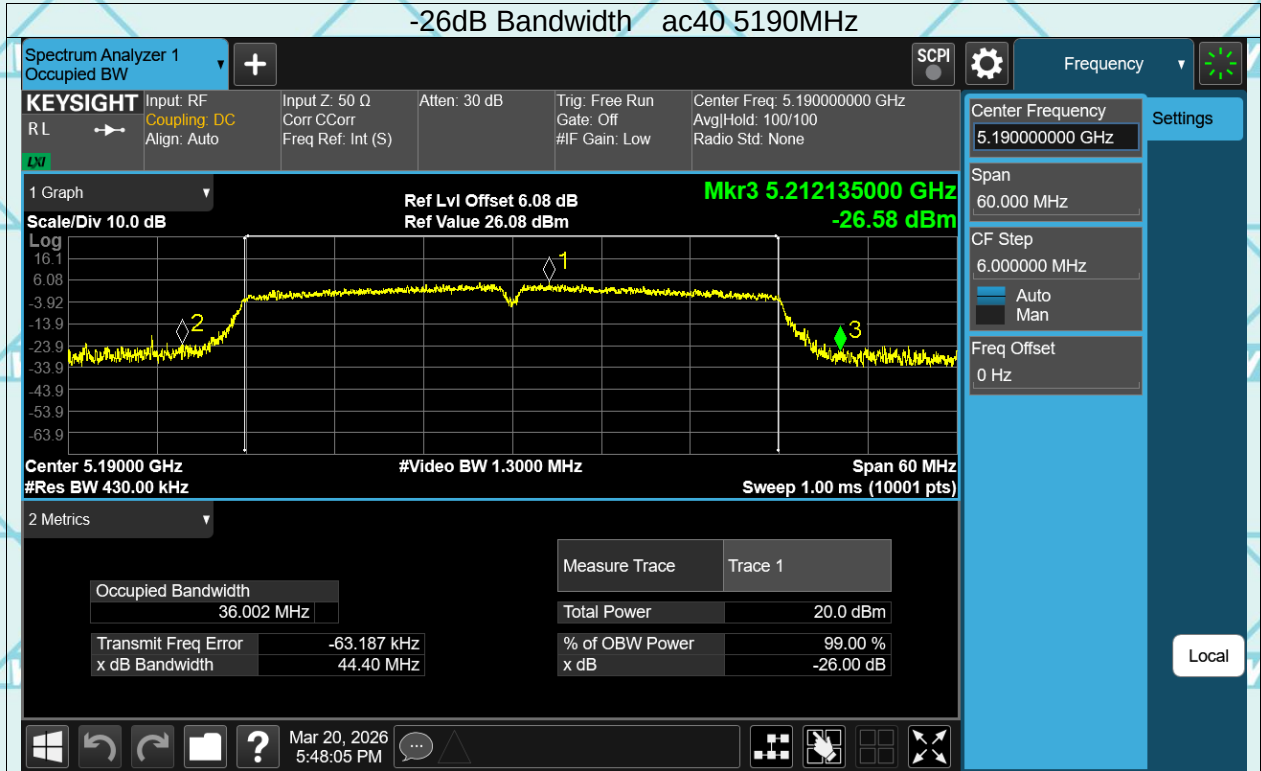

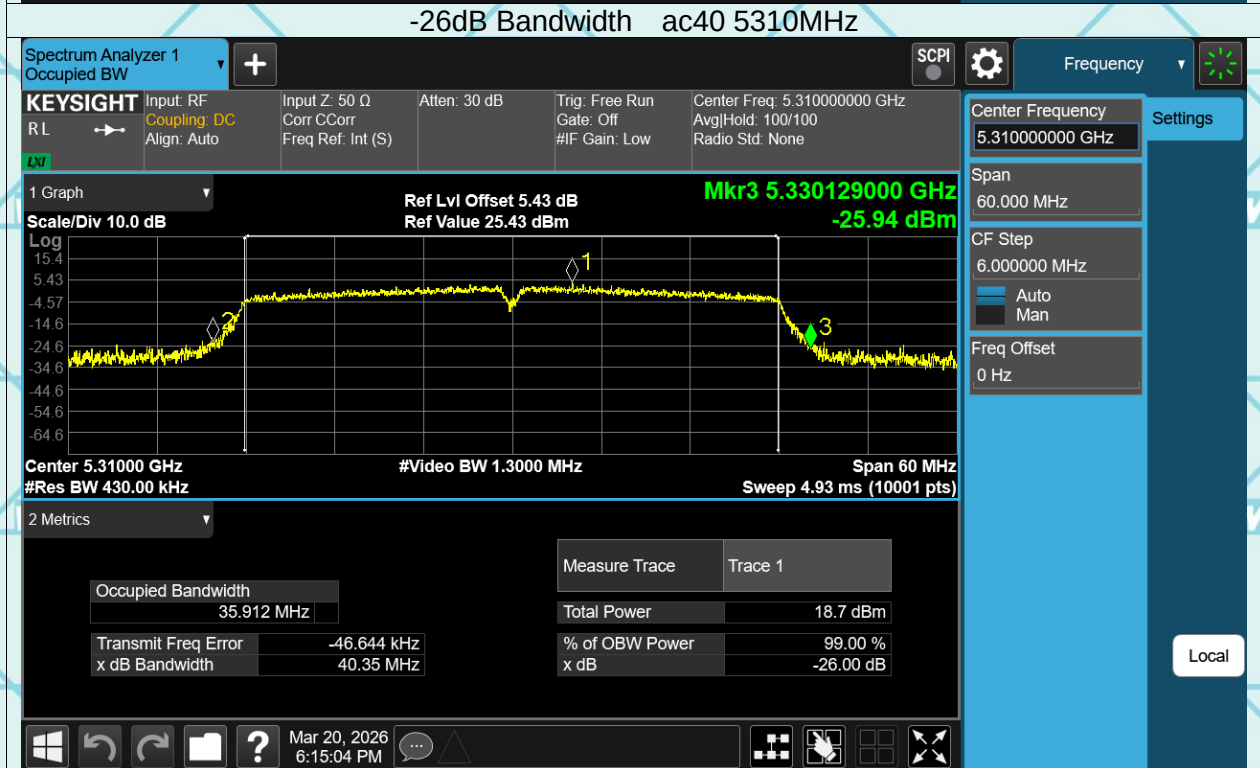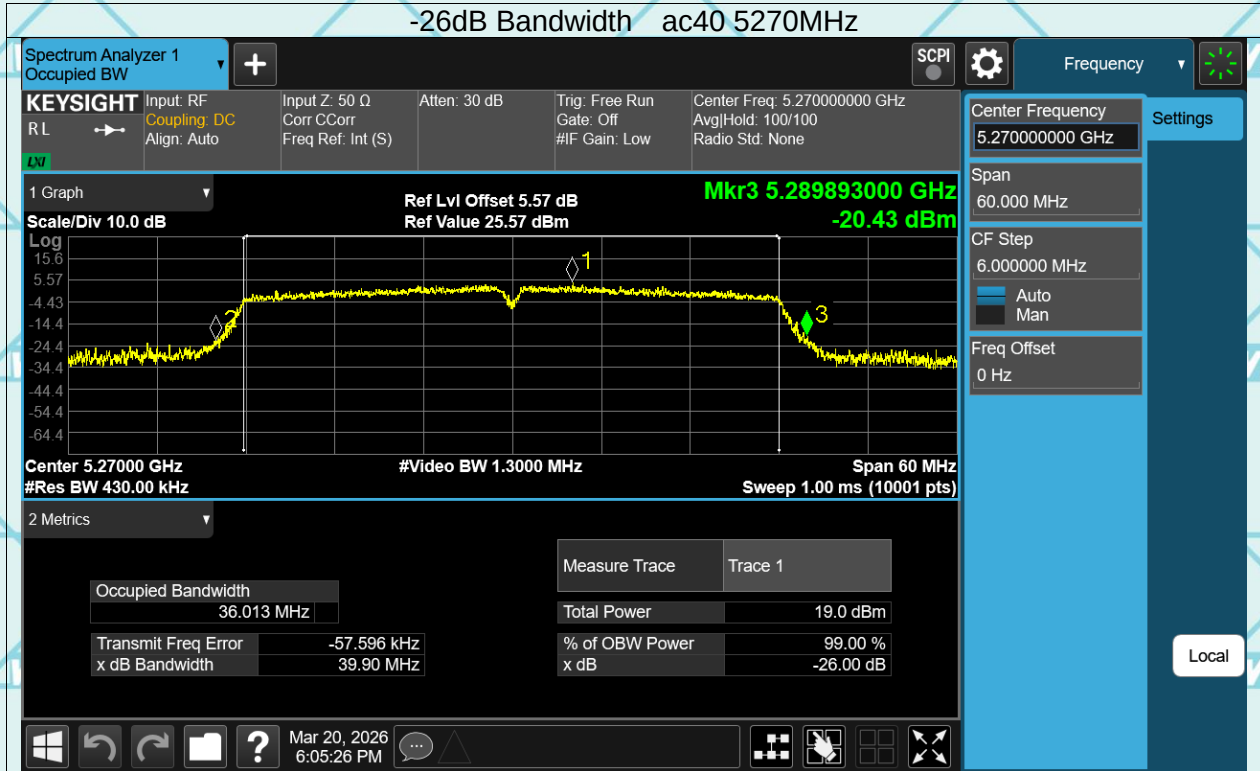

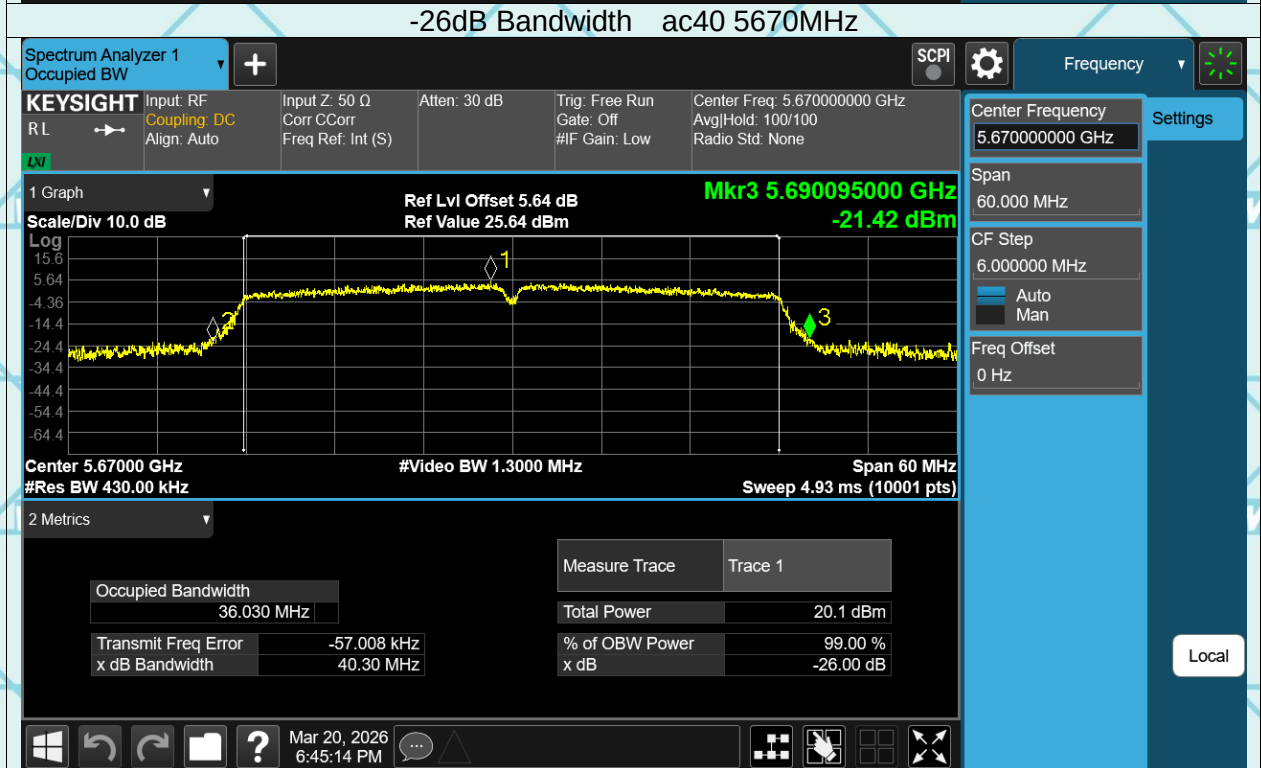
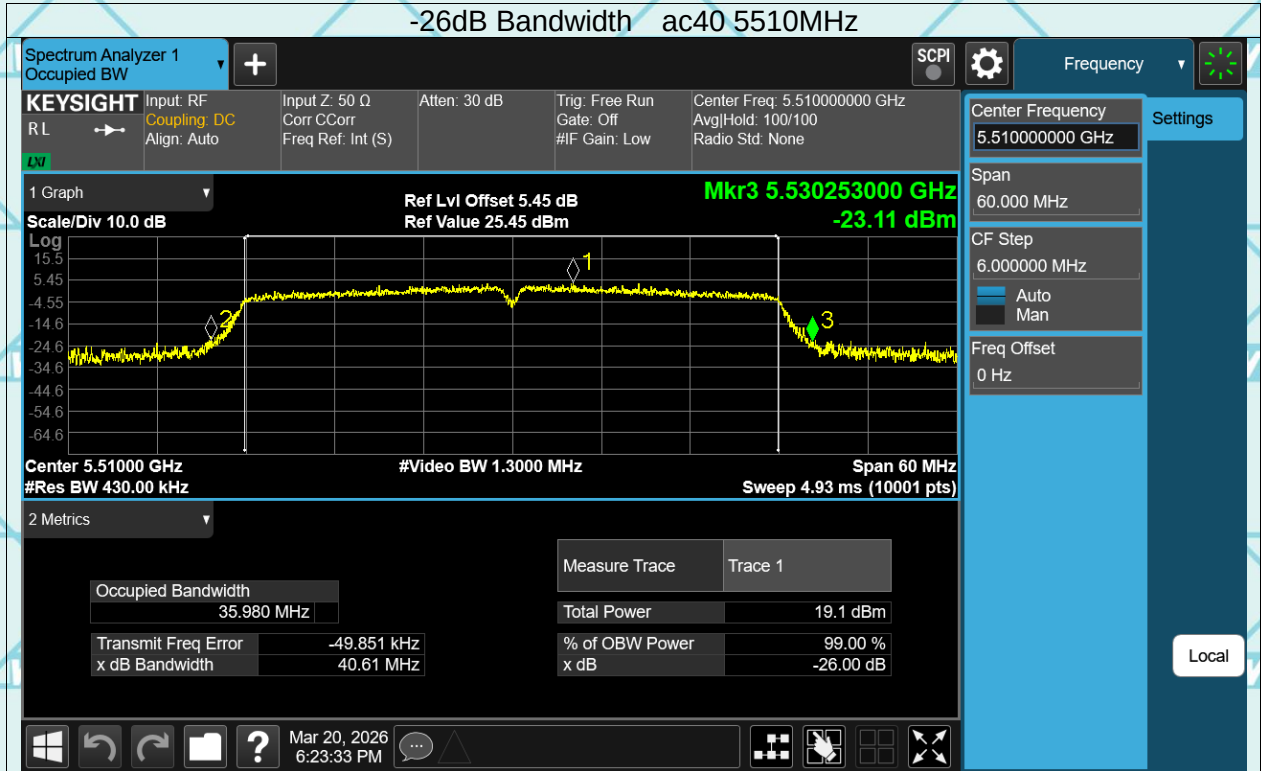


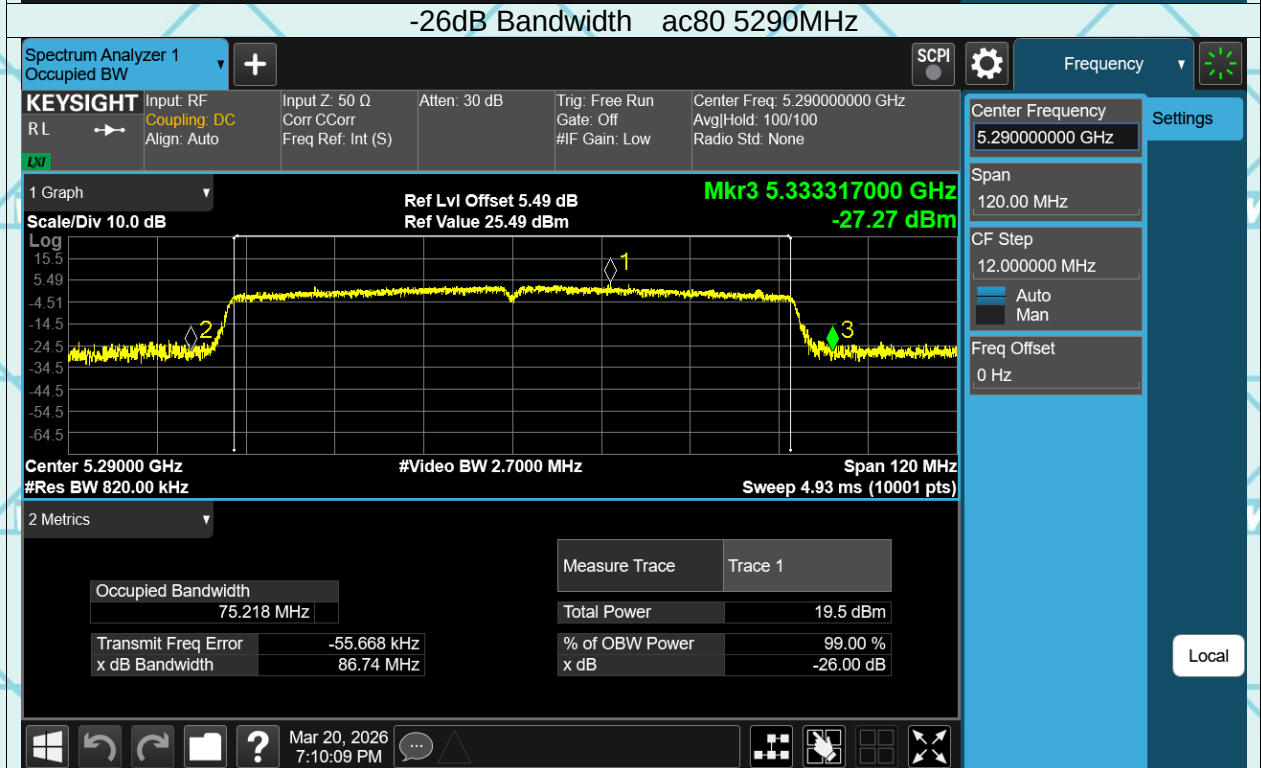
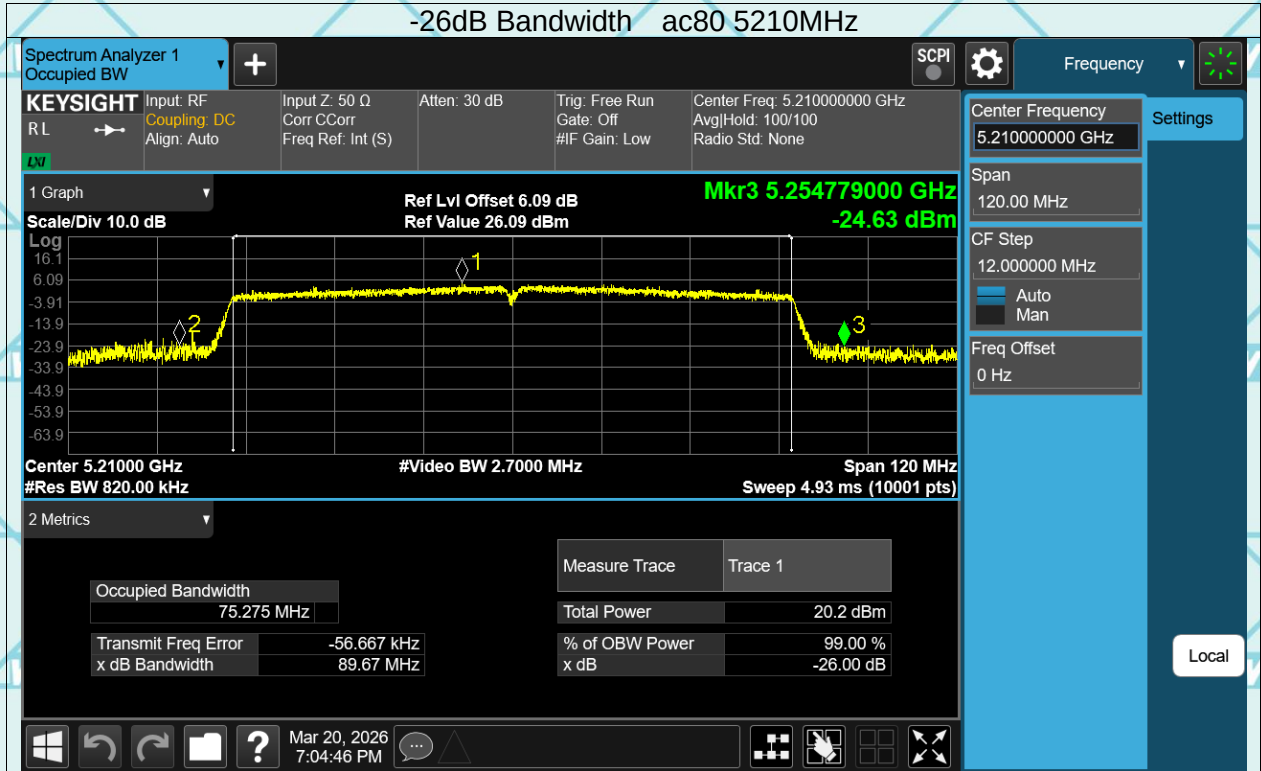


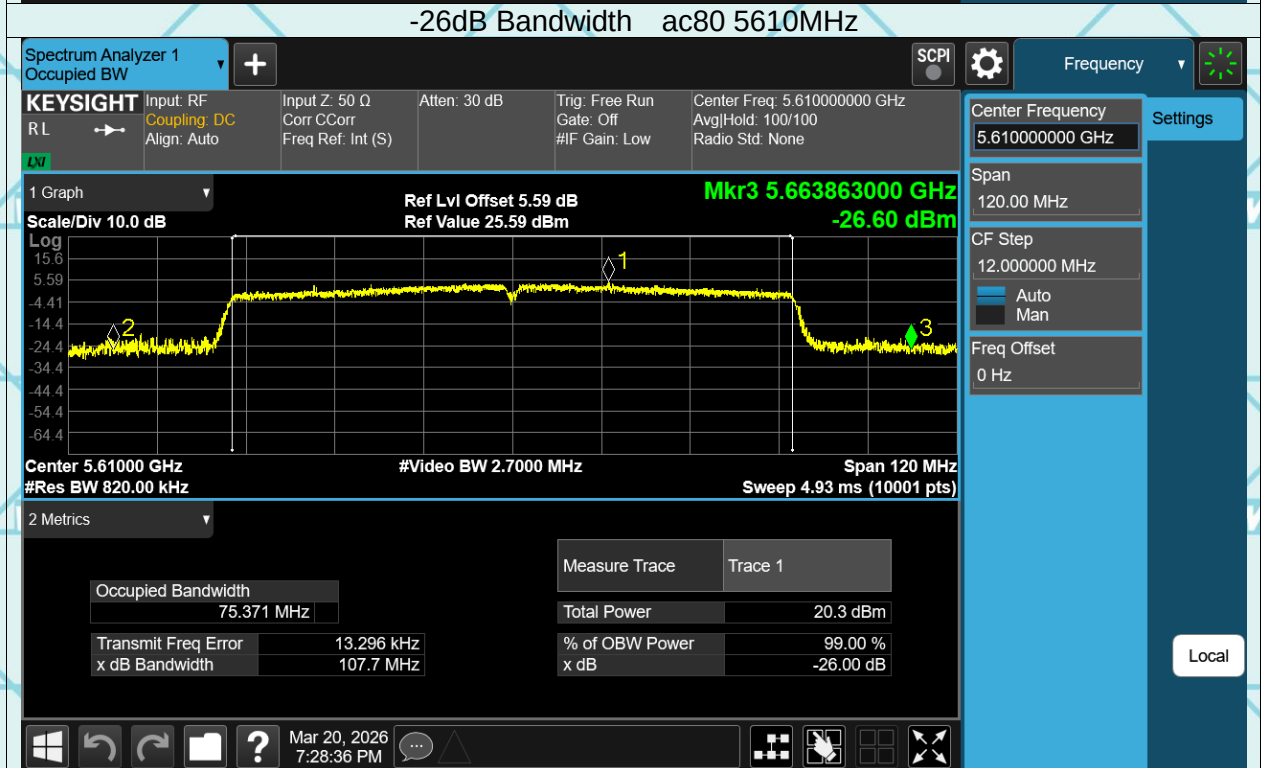
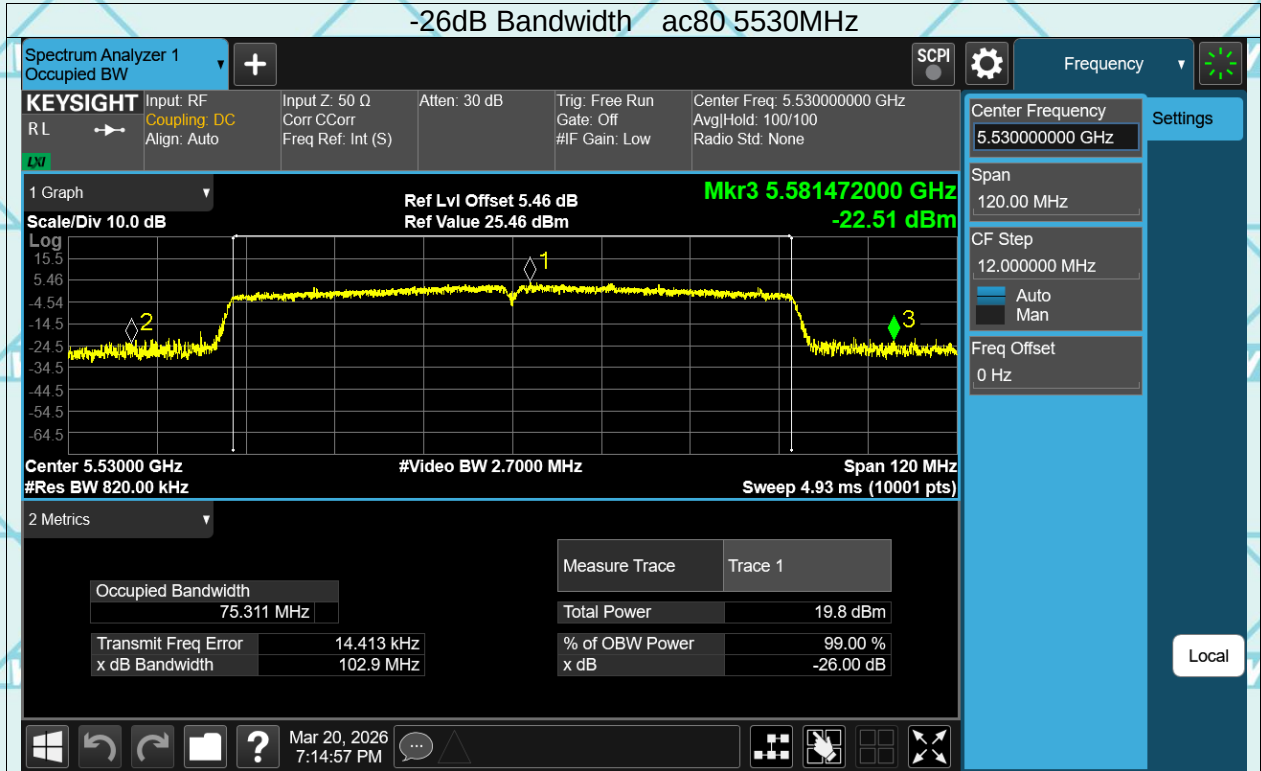




Report No.: WSCT-ANAB-R&E260200024A-Wi-Fi2 Issued Date: 09 April 2026



-6dB&99% Bandwidth

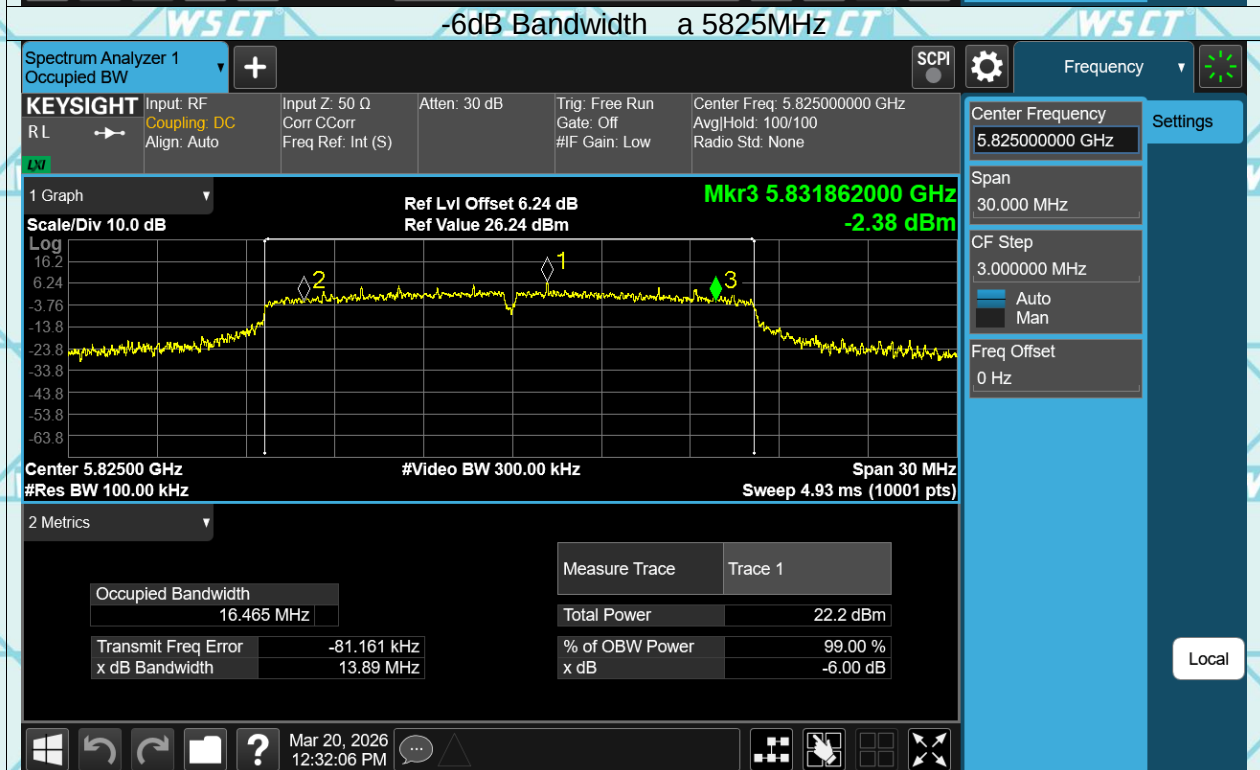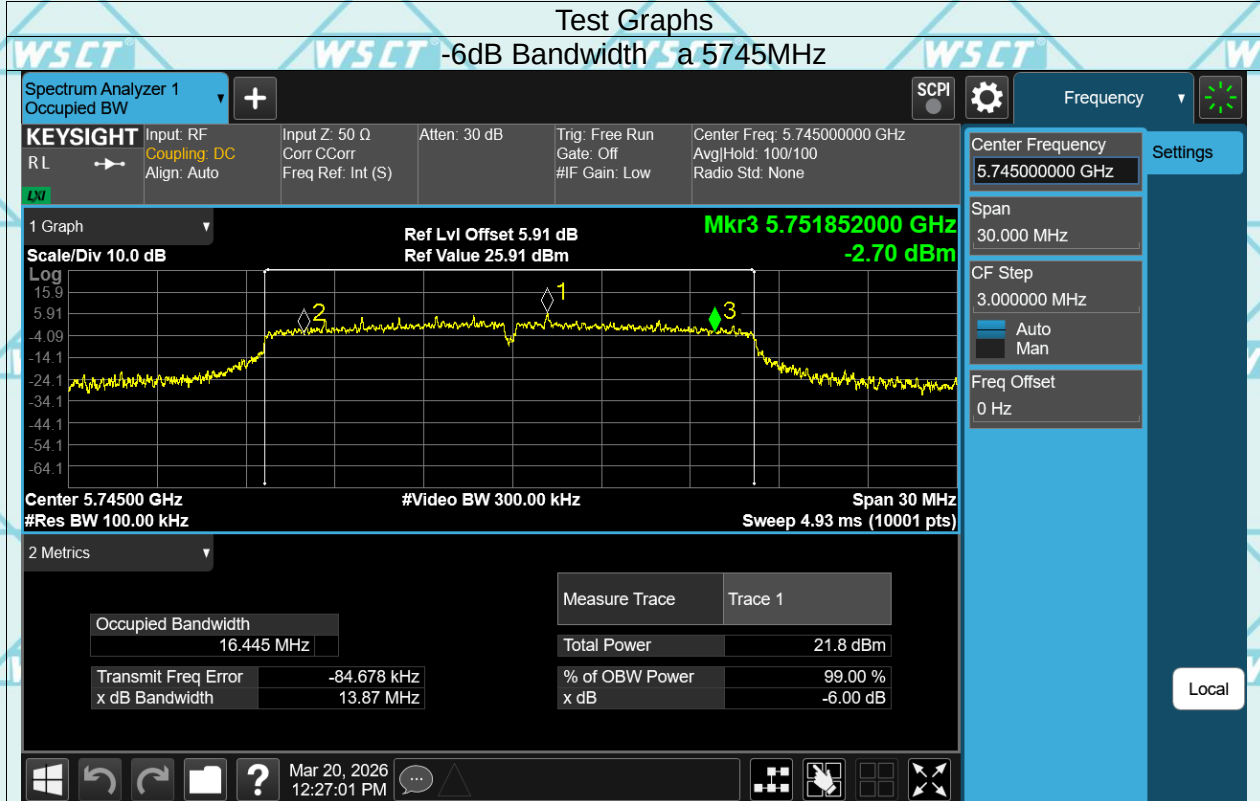


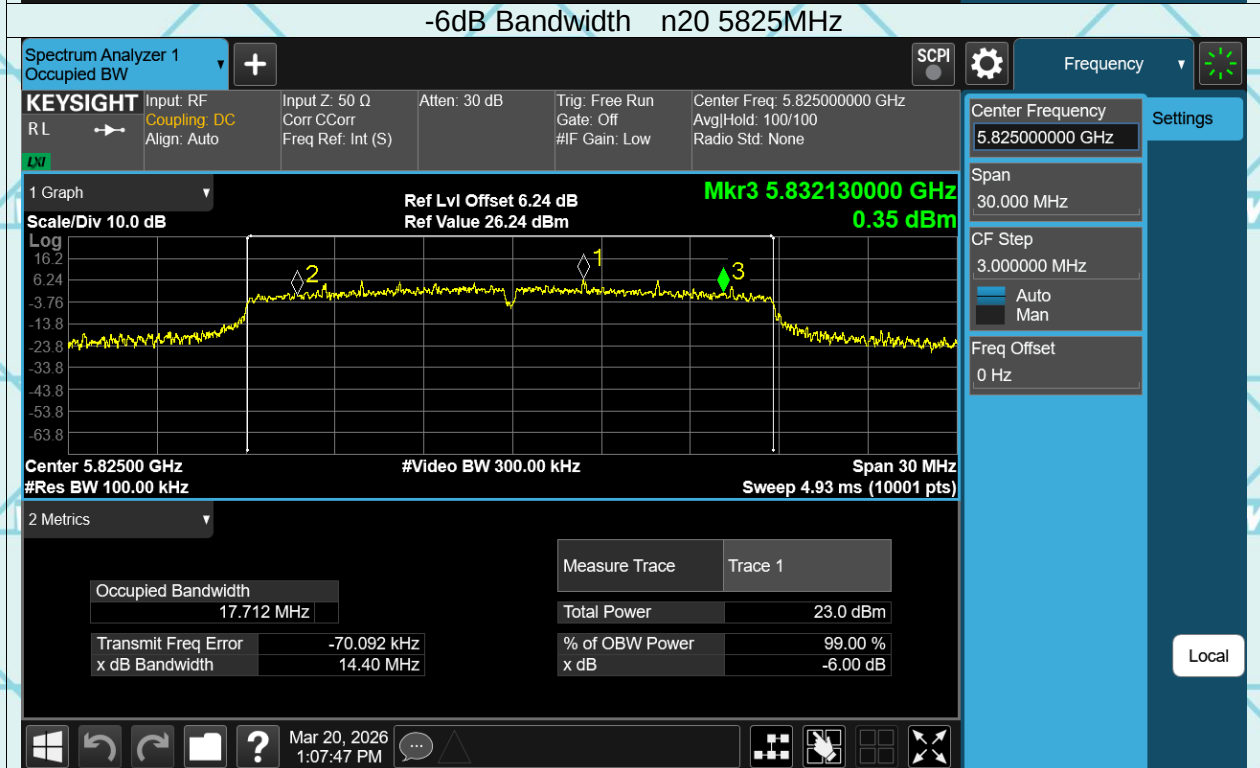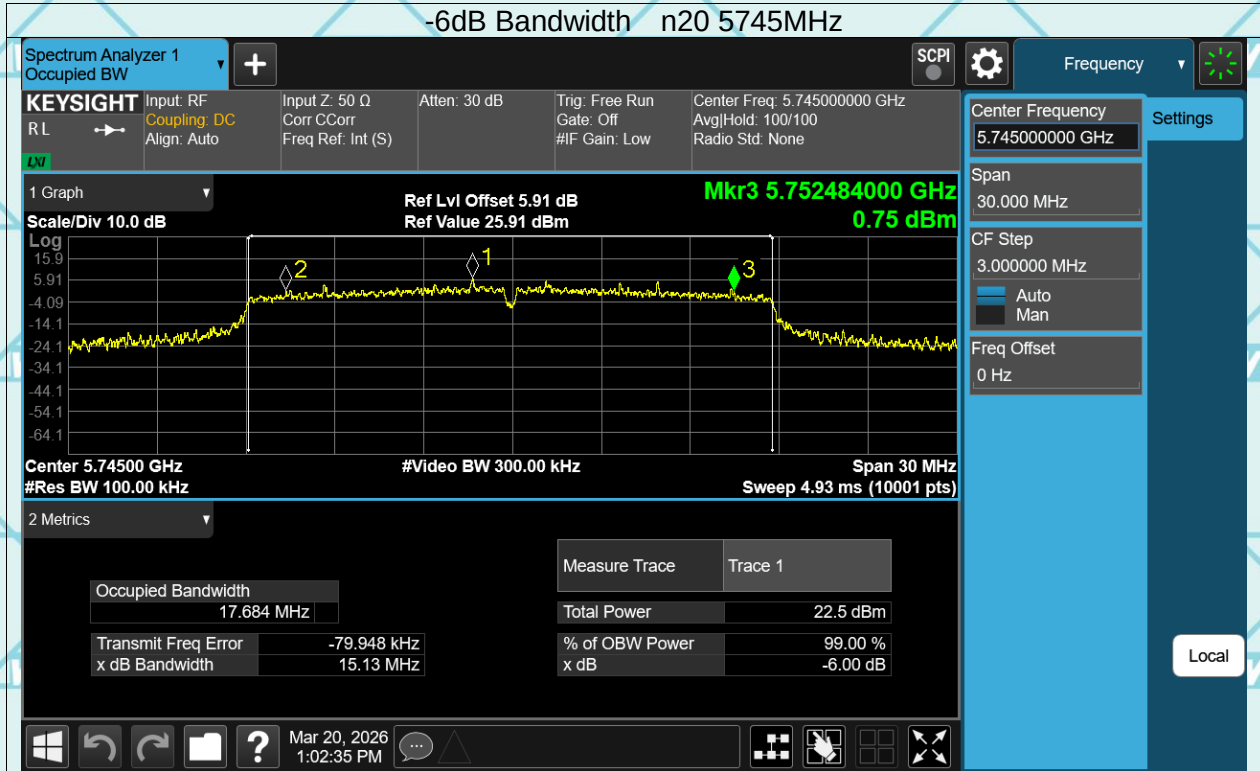

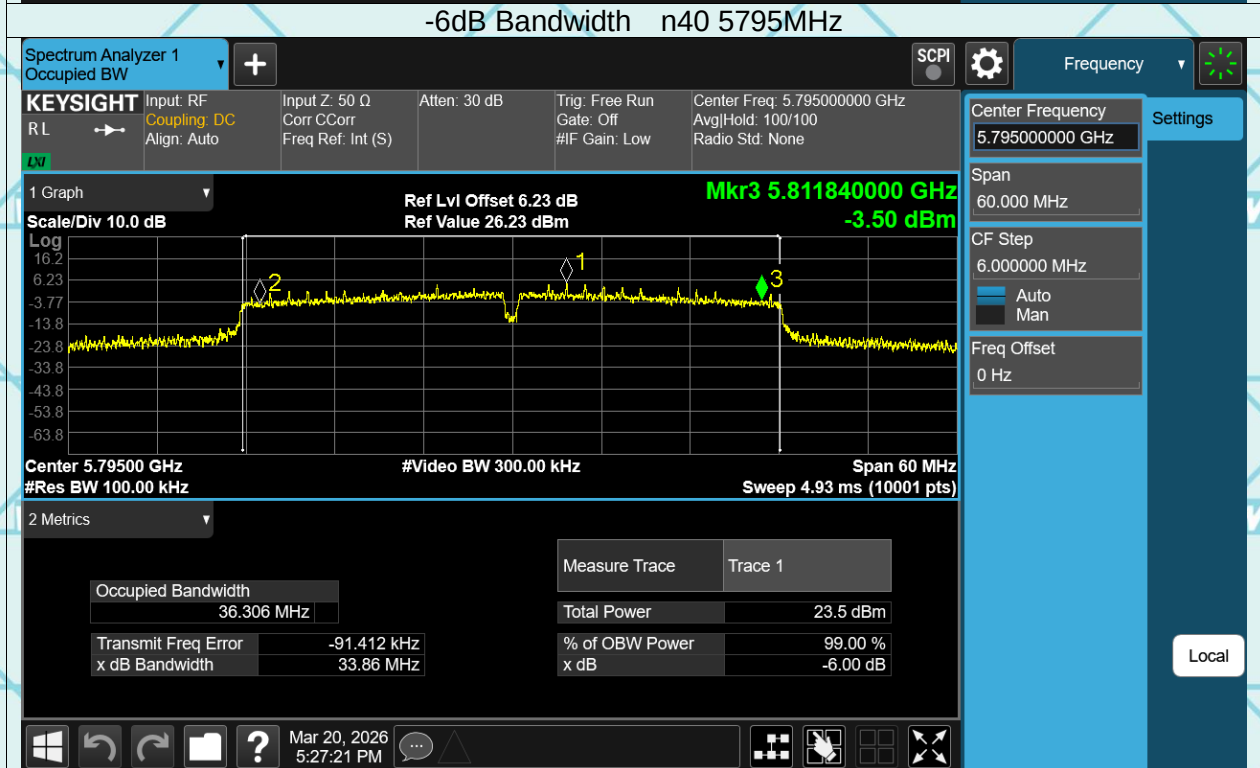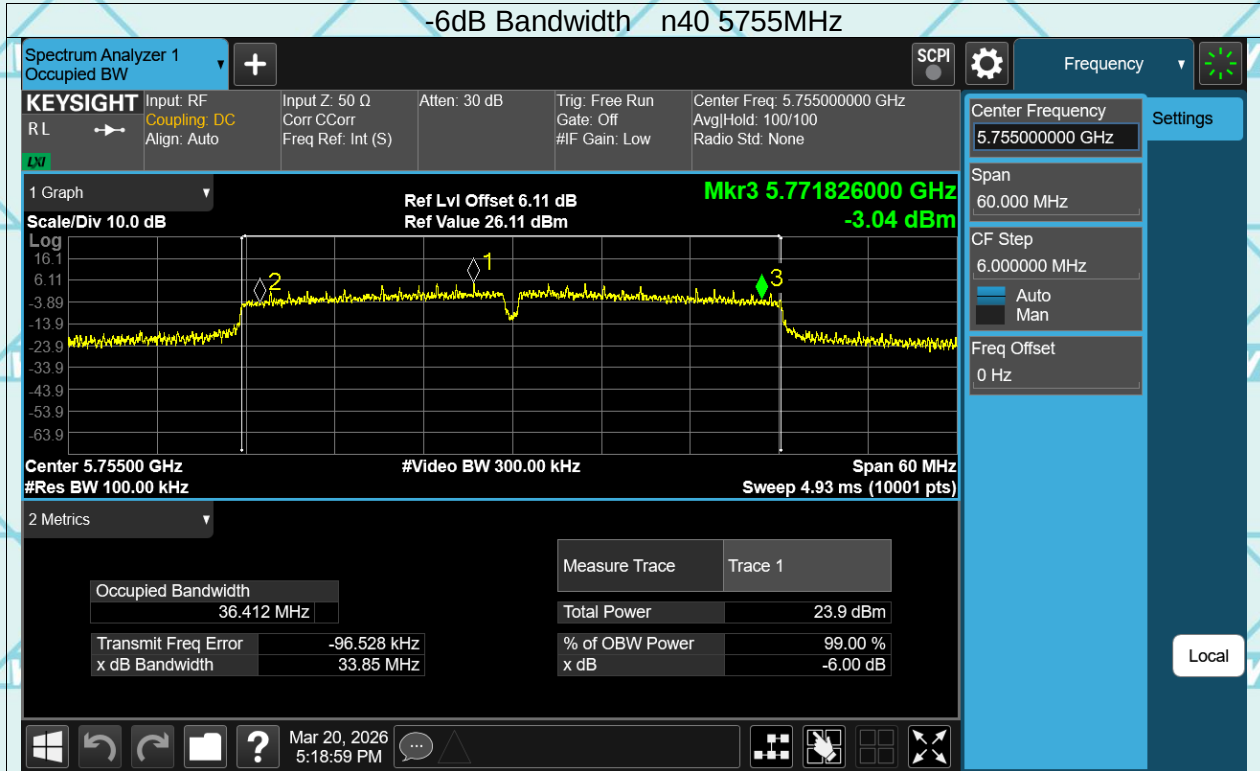

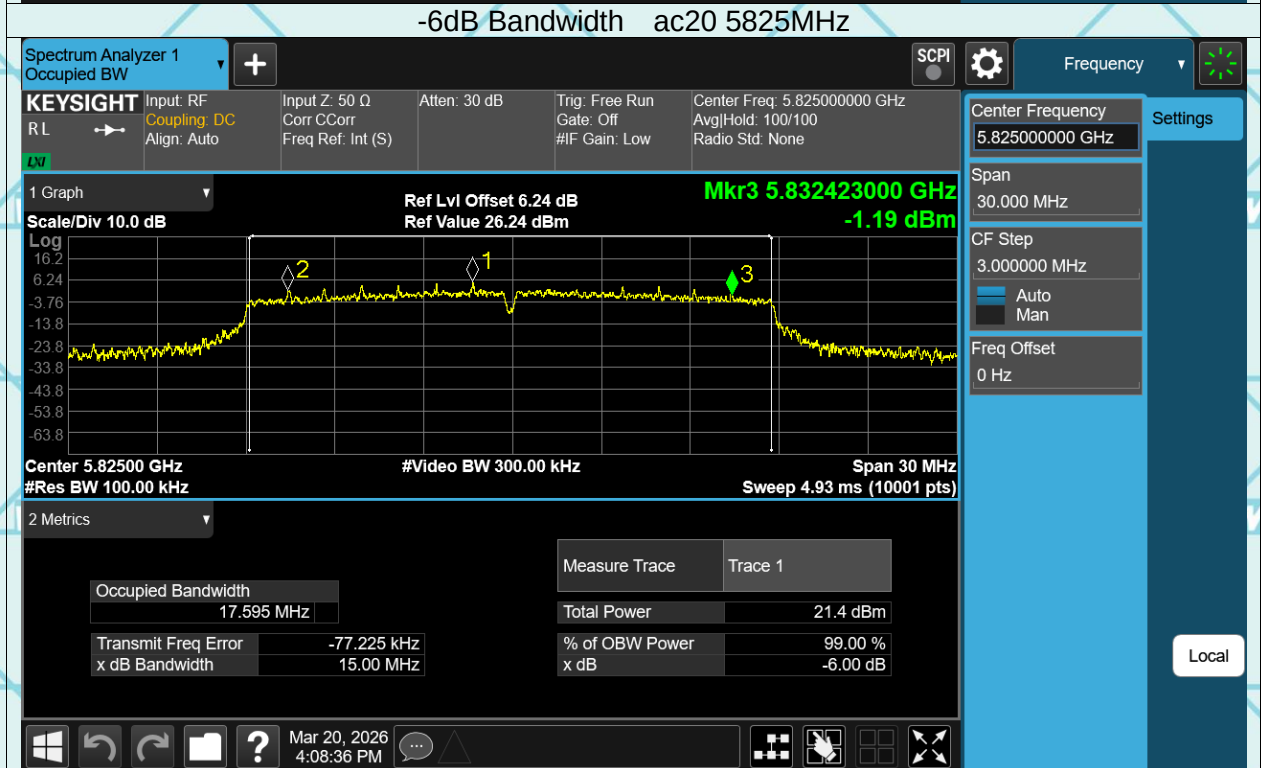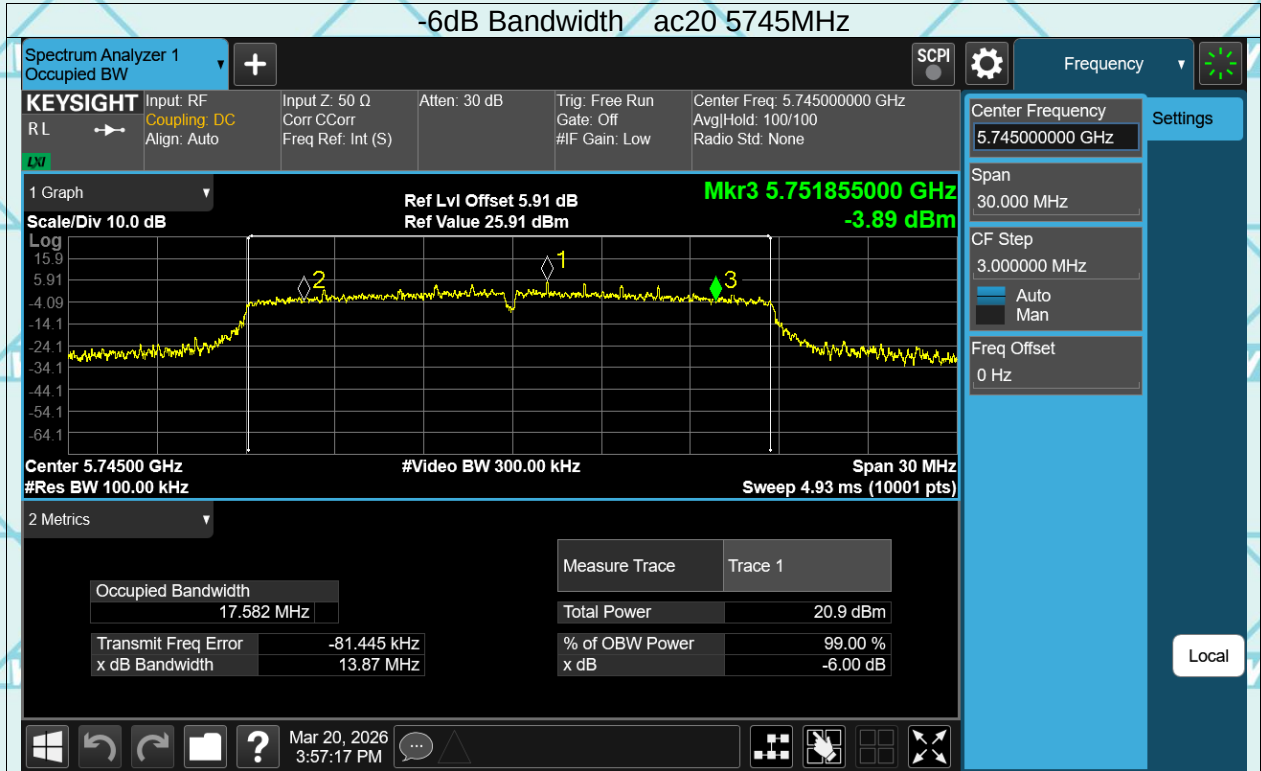

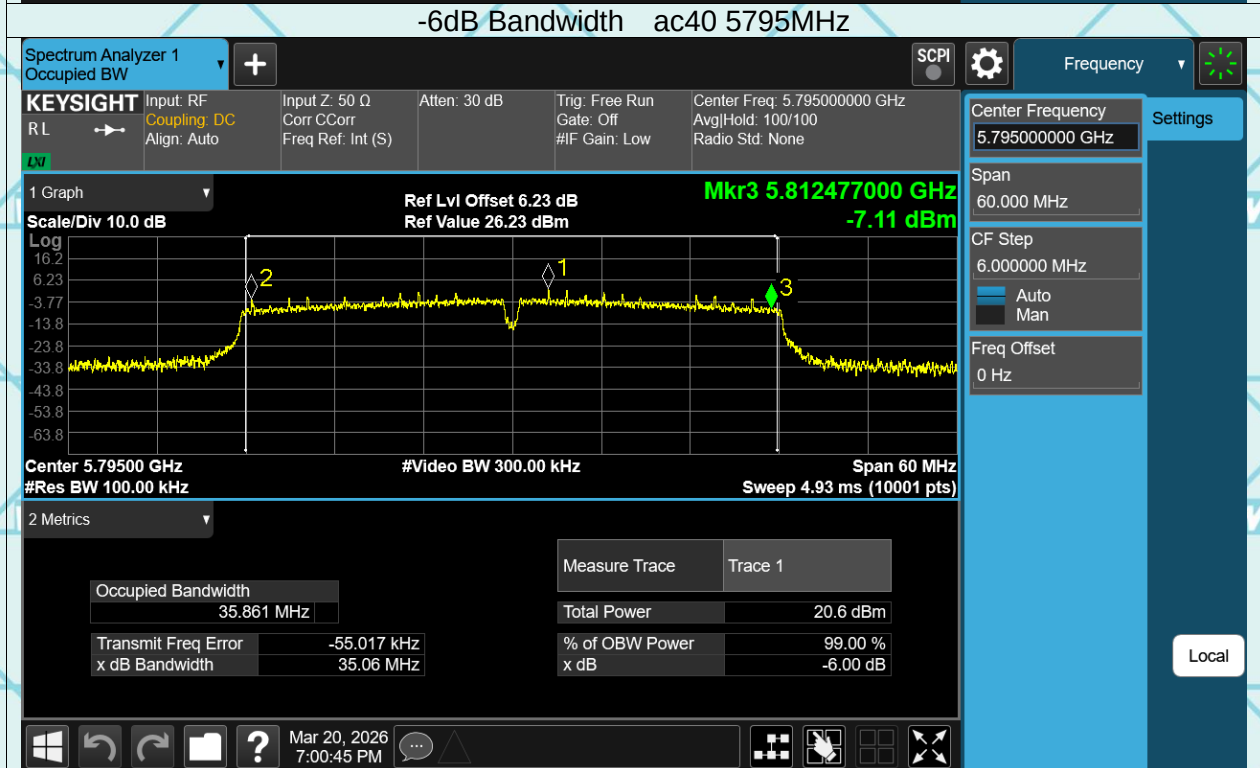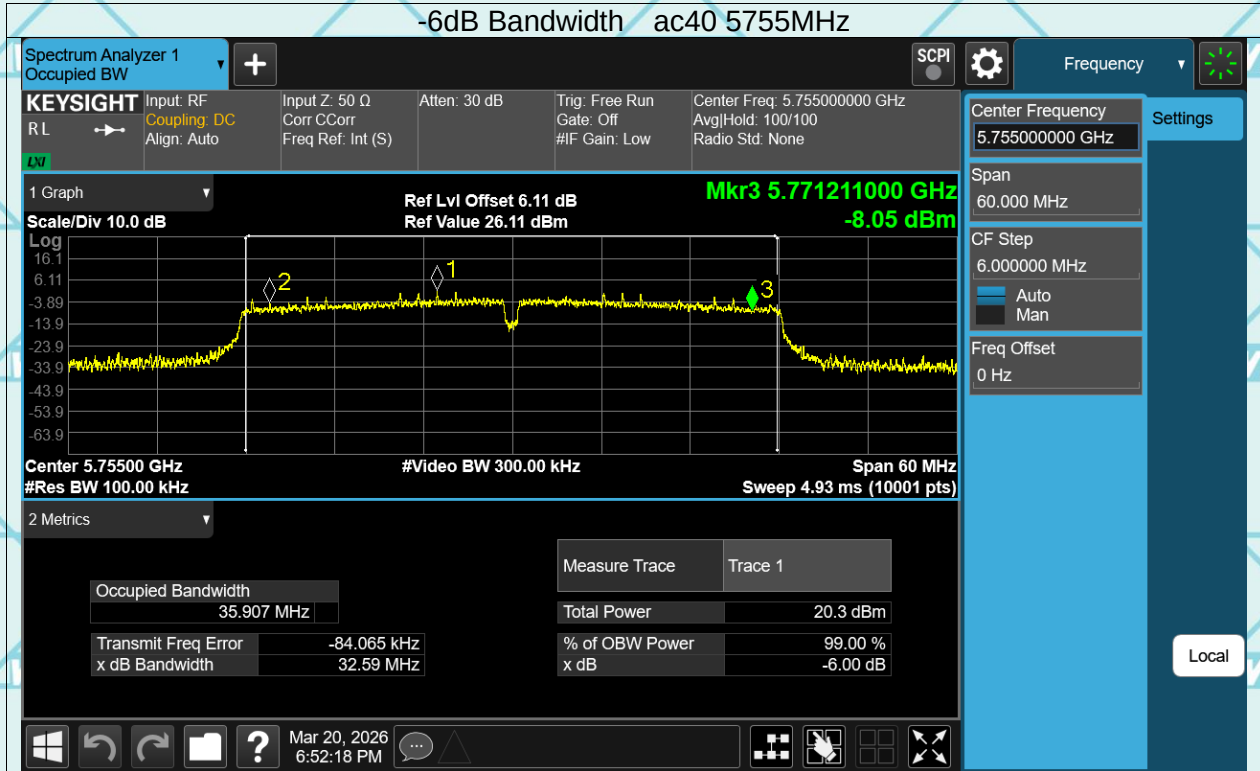

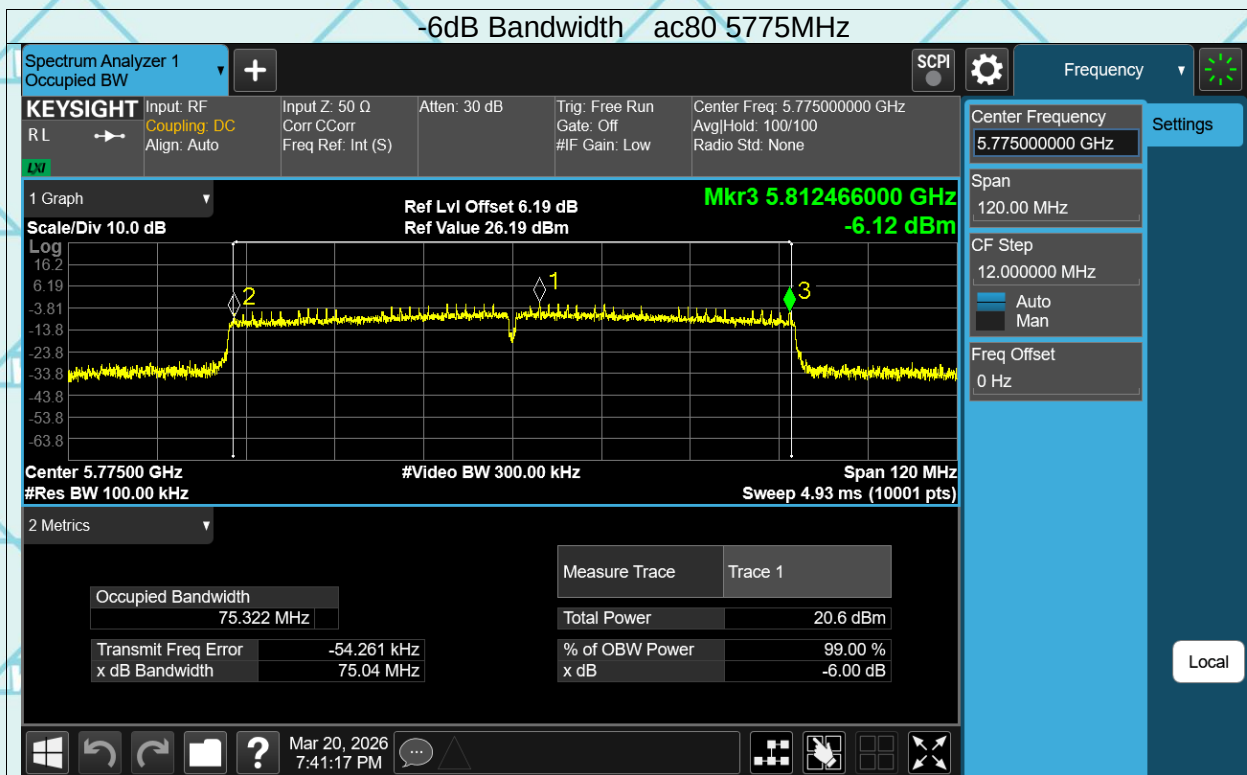

7.6 MAXIMUM CONDUCTED OUTPUT POWER

Product	: EUT-Sample	Test Mode	: See section 3.4
Test Item	: Maximum Conducted Output Power	Temperature	: 25 °C
Test Voltage	: DC 3.82V	Humidity	: 56%RH
Test Result	: PASS		

Ant1

Mode	Frequency (MHz)	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
a	5180	15.95	0.11	16.06	24	Pass
a	5240	15.48	0.11	15.59	24	Pass
a	5260	15.24	0.11	15.35	24	Pass
a	5320	14.84	0.11	14.95	24	Pass
a	5500	15.35	0.11	15.46	24	Pass
a	5700	15.93	0.11	16.04	24	Pass
a	5745	16.02	0.11	16.13	30	Pass
a	5825	16.44	0.11	16.55	30	Pass
n20	5180	16.87	0.12	16.99	24	Pass
n20	5240	16.35	0.12	16.47	24	Pass
n20	5260	16.04	0.12	16.16	24	Pass
n20	5320	15.6	0.12	15.72	24	Pass
n20	5500	16.06	0.12	16.18	24	Pass
n20	5700	16.58	0.12	16.7	24	Pass
n20	5745	16.59	0.12	16.71	30	Pass
n20	5825	16.93	0.11	17.04	30	Pass
n40	5190	14.16	0.22	14.38	24	Pass
n40	5230	14.17	0.22	14.39	24	Pass
n40	5270	13.24	0.22	13.46	24	Pass
n40	5310	12.96	0.22	13.18	24	Pass
n40	5510	13.23	0.21	13.44	24	Pass
n40	5670	14.13	0.22	14.35	24	Pass
n40	5755	17.6	0.21	17.81	30	Pass
n40	5795	17.27	0.21	17.48	30	Pass
ac20	5180	14.85	0.11	14.96	24	Pass
ac20	5240	14.63	0.11	14.74	24	Pass
ac20	5260	14.26	0.11	14.37	24	Pass
ac20	5320	13.85	0.11	13.96	24	Pass
ac20	5500	14.15	0.11	14.26	24	Pass
ac20	5700	15	0.11	15.11	24	Pass
ac20	5745	15.04	0.11	15.15	30	Pass
ac20	5825	15.56	0.11	15.67	30	Pass
ac40	5190	14.02	0.22	14.24	24	Pass
ac40	5230	13.77	0.21	13.98	24	Pass
ac40	5270	13.13	0.21	13.34	24	Pass
ac40	5310	12.87	0.22	13.09	24	Pass
ac40	5510	13.25	0.22	13.47	24	Pass
ac40	5670	14.07	0.21	14.28	24	Pass
ac40	5755	14.32	0.21	14.53	30	Pass
ac40	5795	14.43	0.21	14.64	30	Pass
ac80	5210	13.45	0.42	13.87	24	Pass
ac80	5290	12.7	0.43	13.13	24	Pass
ac80	5530	12.99	0.42	13.41	24	Pass
ac80	5610	13.52	0.42	13.94	24	Pass
ac80	5775	14.06	0.42	14.48	30	Pass

Report No.: WSCT-ANAB-R&E260200024A-Wi-Fi2 Issued Date: 09 April 2026

Ant2

Mode	Frequency (MHz)	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
a	5180	16.09	0.11	16.2	24	Pass
a	5240	15.65	0.11	15.76	24	Pass
a	5260	15.43	0.11	15.54	24	Pass
a	5320	15.03	0.11	15.14	24	Pass
a	5500	15.53	0.11	15.64	24	Pass
a	5700	16.03	0.11	16.14	24	Pass
a	5745	16.03	0.11	16.14	30	Pass
a	5825	16.41	0.11	16.52	30	Pass
n20	5180	16.79	0.12	16.91	24	Pass
n20	5240	16.23	0.11	16.34	24	Pass
n20	5260	16.01	0.12	16.13	24	Pass
n20	5320	15.53	0.12	15.65	24	Pass
n20	5500	15.95	0.12	16.07	24	Pass
n20	5700	16.62	0.12	16.74	24	Pass
n20	5745	16.6	0.12	16.72	30	Pass
n20	5825	16.94	0.11	17.05	30	Pass
n40	5190	16.64	0.22	16.86	24	Pass
n40	5230	16.29	0.22	16.51	24	Pass
n40	5270	15.8	0.21	16.01	24	Pass
n40	5310	15.43	0.22	15.65	24	Pass
n40	5510	15.88	0.21	16.09	24	Pass
n40	5670	16.89	0.22	17.11	24	Pass
n40	5755	17.24	0.21	17.45	30	Pass
n40	5795	17.36	0.21	17.57	30	Pass
ac20	5180	15.2	0.11	15.31	24	Pass
ac20	5240	14.76	0.11	14.87	24	Pass
ac20	5260	14.45	0.11	14.56	24	Pass
ac20	5320	14.07	0.11	14.18	24	Pass
ac20	5500	14.54	0.11	14.65	24	Pass
ac20	5700	15.23	0.11	15.34	24	Pass
ac20	5745	15.12	0.11	15.23	30	Pass
ac20	5825	15.57	0.11	15.68	30	Pass
ac40	5190	14.01	0.21	14.22	24	Pass
ac40	5230	13.68	0.21	13.89	24	Pass
ac40	5270	13.26	0.21	13.47	24	Pass
ac40	5310	12.9	0.21	13.11	24	Pass
ac40	5510	13.23	0.21	13.44	24	Pass
ac40	5670	14.1	0.21	14.31	24	Pass
ac40	5755	14.37	0.21	14.58	30	Pass
ac40	5795	14.47	0.21	14.68	30	Pass
ac80	5210	13.48	0.42	13.9	24	Pass
ac80	5290	12.65	0.42	13.07	24	Pass
ac80	5530	13.02	0.42	13.44	24	Pass
ac80	5610	13.5	0.42	13.92	24	Pass
ac80	5775	14.08	0.42	14.5	30	Pass

Report No.: WSCT-ANAB-R&E260200024A-Wi-Fi2 Issued Date: 09 April 2026

MIMO

Mode	Frequency (MHz)	Conducted Power (dBm)	Total Power (dBm)	Limit (dBm)	Verdict
n20	5180	19.84	19.96	24	Pass
n20	5240	19.3	19.42	24	Pass
n20	5260	19.04	19.16	24	Pass
n20	5320	18.58	18.7	24	Pass
n20	5500	19.02	19.14	24	Pass
n20	5700	19.61	19.73	24	Pass
n20	5745	19.61	19.73	30	Pass
n20	5825	19.95	20.06	30	Pass
n40	5190	18.58	18.8	24	Pass
n40	5230	18.37	18.59	24	Pass
n40	5270	17.72	17.93	24	Pass
n40	5310	17.38	17.6	24	Pass
n40	5510	17.76	17.97	24	Pass
n40	5670	18.74	18.96	24	Pass
n40	5755	20.43	20.64	30	Pass
n40	5795	20.33	20.54	30	Pass
ac20	5180	18.04	18.15	24	Pass
ac20	5240	17.71	17.82	24	Pass
ac20	5260	17.37	17.48	24	Pass
ac20	5320	16.97	17.08	24	Pass
ac20	5500	17.36	17.47	24	Pass
ac20	5700	18.13	18.24	24	Pass
ac20	5745	18.09	18.2	30	Pass
ac20	5825	18.58	18.69	30	Pass
ac40	5190	17.03	17.24	24	Pass
ac40	5230	16.74	16.95	24	Pass
ac40	5270	16.21	16.42	24	Pass
ac40	5310	15.9	16.11	24	Pass
ac40	5510	16.25	16.47	24	Pass
ac40	5670	17.1	17.31	24	Pass
ac40	5755	17.36	17.57	30	Pass
ac40	5795	17.46	17.67	30	Pass
ac80	5210	16.48	16.9	24	Pass
ac80	5290	15.69	16.11	24	Pass
ac80	5530	16.02	16.44	24	Pass
ac80	5610	16.52	16.94	24	Pass
ac80	5775	17.08	17.5	30	Pass

Report No.: WSCT-ANAB-R&E260200024A-Wi-Fi2 Issued Date: 09 April 2026

Ant1

