

Test Result

Project Number: P-CC26080210

Test Time: 2026-08-23_14.08.01

EUT Name: Mobile Phone

Temp.(°C): 23.9

Model Number: KO2

Humidity (%RH): 49

Sample Number: CC26080161-001-S13

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIFI 11a CH44 P=18


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A03+数据线: A06

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

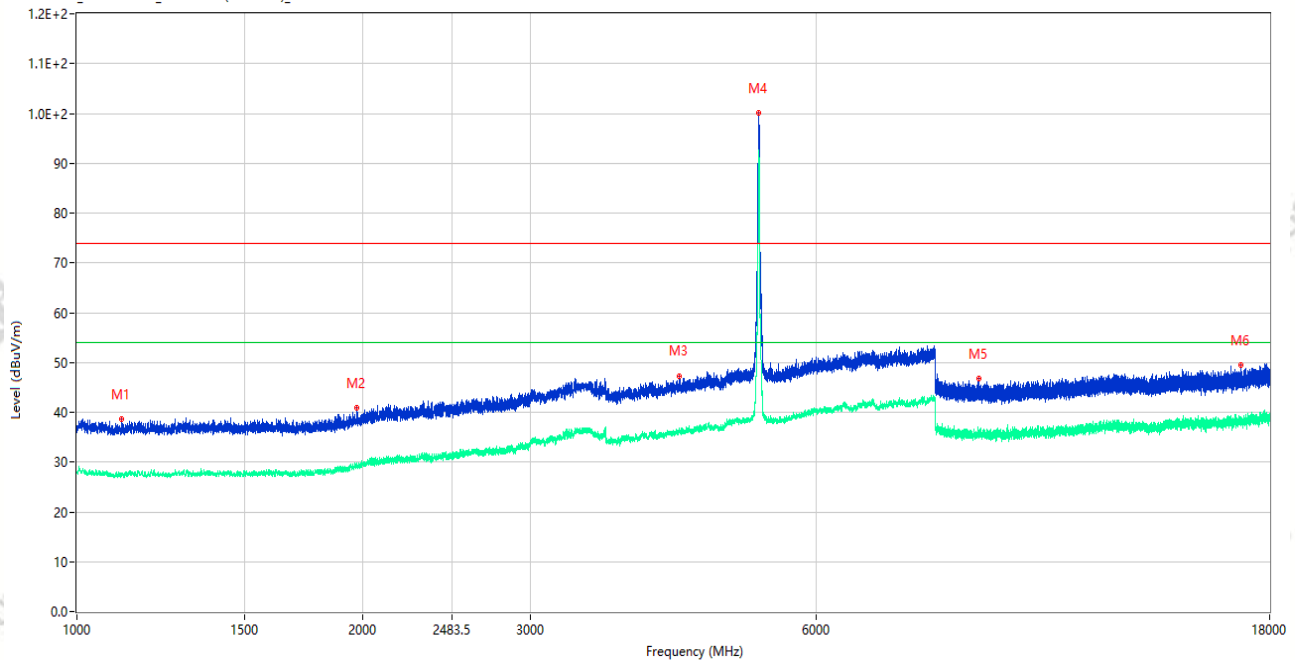

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1115.000	38.54	-15.78	74.0	35.46	Peak	226.00	150	Vertical	Pass
1**	1115.000	27.85	-15.78	54.0	26.15	AV	226.00	150	Vertical	Pass
2	1968.750	40.99	-14.84	74.0	33.01	Peak	352.00	150	Vertical	Pass
2**	1968.750	29.38	-14.84	54.0	24.62	AV	352.00	150	Vertical	Pass
3	4301.000	47.32	-3.61	74.0	26.68	Peak	322.00	150	Vertical	Pass
3**	4301.000	36.50	-3.61	54.0	17.50	AV	322.00	150	Vertical	Pass
4	5218.500	100.08	-2.37	74.0	-26.08	Peak	66.00	150	Vertical	N/A
4**	5218.500	92.34	-2.37	54.0	-38.34	AV	66.00	150	Vertical	N/A
5	8902.737	46.80	-4.77	74.0	27.20	Peak	129.00	150	Vertical	Pass
5**	8902.737	35.77	-4.77	54.0	18.23	AV	129.00	150	Vertical	Pass
6	16800.114	49.56	-1.17	74.0	24.44	Peak	141.00	150	Vertical	Pass
6**	16800.114	37.98	-1.17	54.0	16.02	AV	141.00	150	Vertical	Pass

Test Result

Project Number: P-CC26080210

Test Time: 2026-08-23_14.12.49

EUT Name: Mobile Phone

Temp.(°C): 23.9

Model Number: KO2

Humidity (%RH): 49

Sample Number: CC26080161-001-S13

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIFI 11a CH44 P=18


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A03+数据线: A06

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

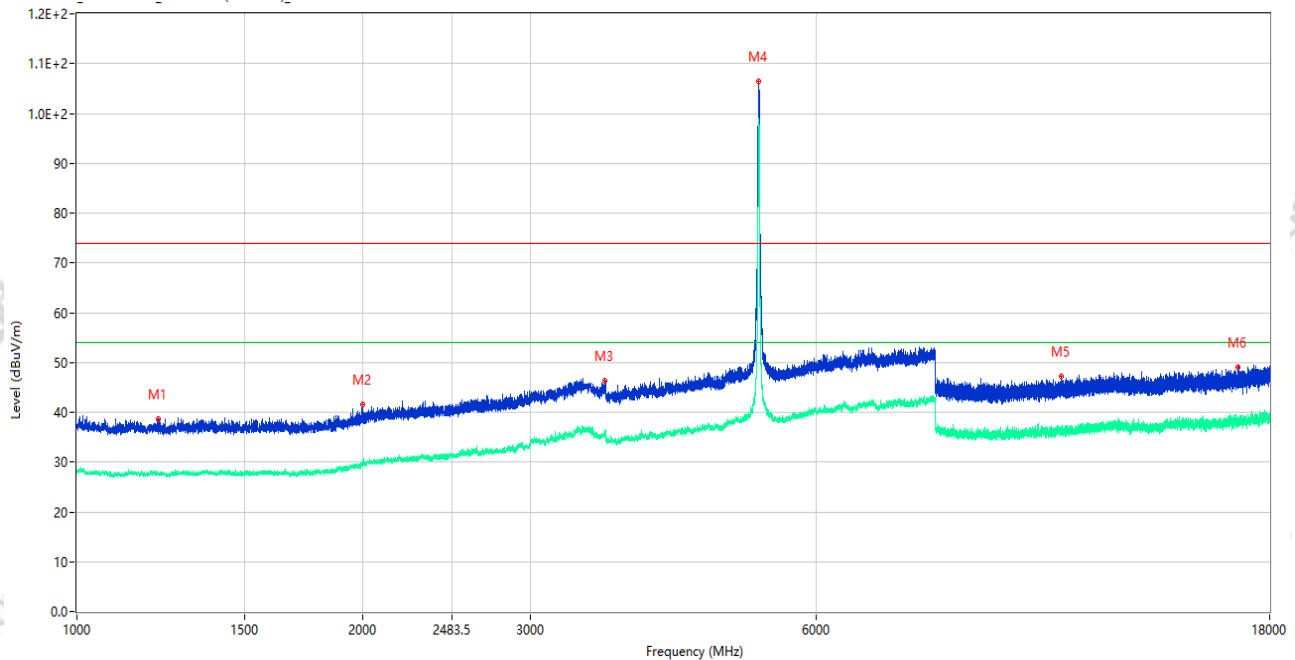

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1216.500	38.57	-15.97	74.0	35.43	Peak	22.00	150	Horizontal	Pass
1**	1216.500	27.51	-15.97	54.0	26.49	AV	22.00	150	Horizontal	Pass
2	1997.500	41.51	-14.41	74.0	32.49	Peak	350.00	150	Horizontal	Pass
2**	1997.500	29.35	-14.41	54.0	24.65	AV	350.00	150	Horizontal	Pass
3	3595.000	46.23	-5.63	74.0	27.77	Peak	231.00	150	Horizontal	Pass
3**	3595.000	35.57	-5.63	54.0	18.43	AV	231.00	150	Horizontal	Pass
4	5219.000	106.38	-2.36	74.0	-32.38	Peak	255.00	150	Horizontal	N/A
4**	5219.000	98.87	-2.36	54.0	-44.87	AV	255.00	150	Horizontal	N/A
5	10865.675	47.20	-3.22	74.0	26.80	Peak	5.00	150	Horizontal	Pass
5**	10865.675	36.01	-3.22	54.0	17.99	AV	5.00	150	Horizontal	Pass
6	16647.338	49.01	-1.27	74.0	24.99	Peak	170.00	150	Horizontal	Pass
6**	16647.338	37.86	-1.27	54.0	16.14	AV	170.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26080210

Test Time: 2026-08-23_14.31.15

EUT Name: Mobile Phone

Temp.(°C): 23.9

Model Number: KO2

Humidity (%RH): 49

Sample Number: CC26080161-001-S13

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIFI 11n20 CH44 P=19


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A03+数据线: A06

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

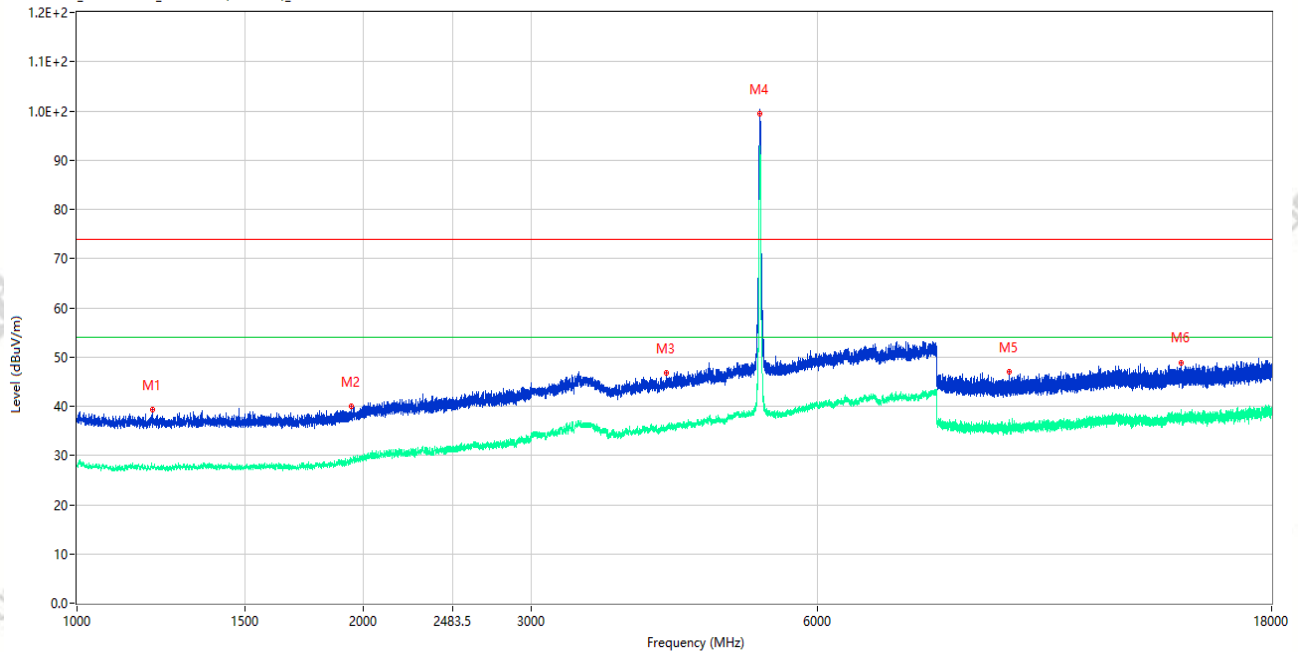

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1200.250	39.25	-15.74	74.0	34.75	Peak	0.00	150	Vertical	Pass
1**	1200.250	27.82	-15.74	54.0	26.18	AV	0.00	150	Vertical	Pass
2	1940.500	39.89	-14.98	74.0	34.11	Peak	276.00	150	Vertical	Pass
2**	1940.500	29.16	-14.98	54.0	24.84	AV	276.00	150	Vertical	Pass
3	4157.500	46.79	-4.65	74.0	27.21	Peak	247.00	150	Vertical	Pass
3**	4157.500	35.93	-4.65	54.0	18.07	AV	247.00	150	Vertical	Pass
4	5221.500	99.39	-2.37	74.0	-25.39	Peak	239.00	150	Vertical	N/A
4**	5221.500	91.57	-2.37	54.0	-37.57	AV	239.00	150	Vertical	N/A
5	9546.362	47.01	-2.52	74.0	26.99	Peak	287.00	150	Vertical	Pass
5**	9546.362	36.11	-2.52	54.0	17.89	AV	287.00	150	Vertical	Pass
6	14459.924	48.92	-2.61	74.0	25.08	Peak	360.00	150	Vertical	Pass
6**	14459.924	37.05	-2.61	54.0	16.95	AV	360.00	150	Vertical	Pass

Test Result

Project Number: P-CC26080210

Test Time: 2026-08-23_14.36.19

EUT Name: Mobile Phone

Temp.(°C): 23.9

Model Number: KO2

Humidity (%RH): 49

Sample Number: CC26080161-001-S13

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIFI 11n20 CH44 P=19


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A03+数据线: A06

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

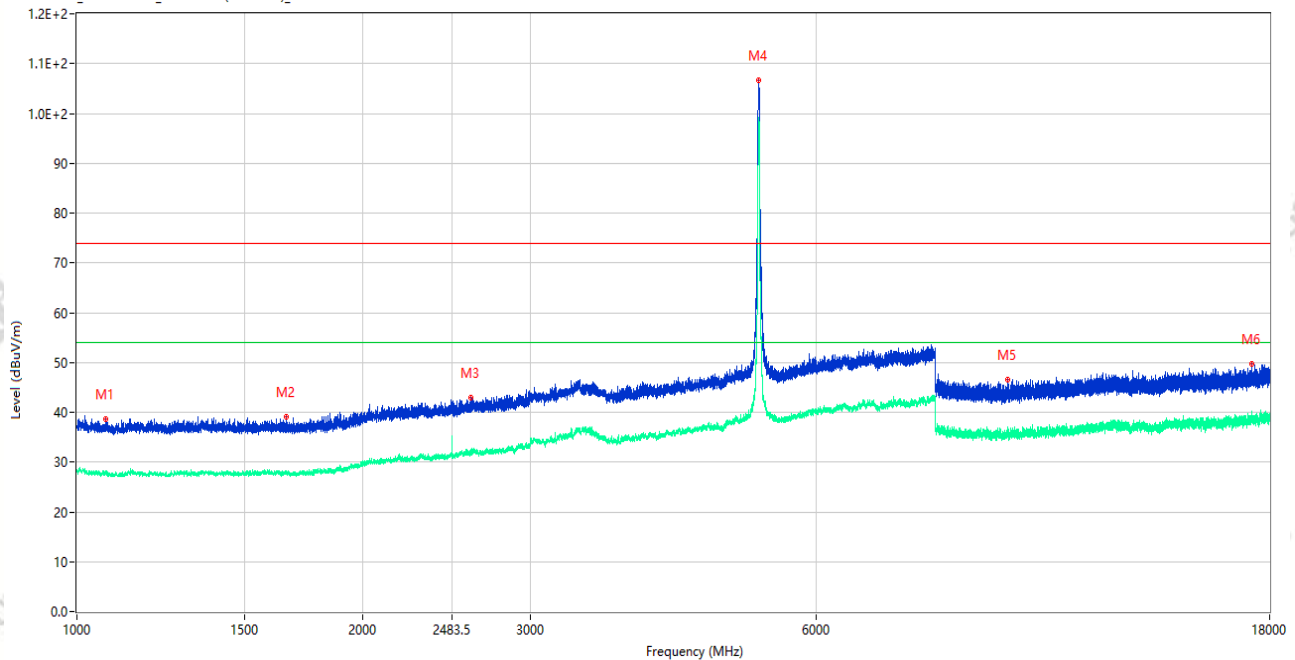

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1072.000	38.72	-15.24	74.0	35.28	Peak	203.00	150	Horizontal	Pass
1**	1072.000	27.99	-15.24	54.0	26.01	AV	203.00	150	Horizontal	Pass
2	1661.500	39.14	-16.24	74.0	34.86	Peak	233.00	150	Horizontal	Pass
2**	1661.500	27.60	-16.24	54.0	26.40	AV	233.00	150	Horizontal	Pass
3	2598.500	42.91	-11.31	74.0	31.09	Peak	11.00	150	Horizontal	Pass
3**	2598.500	31.75	-11.31	54.0	22.25	AV	11.00	150	Horizontal	Pass
4	5221.000	106.65	-2.36	74.0	-32.65	Peak	248.00	150	Horizontal	N/A
4**	5221.000	98.71	-2.36	54.0	-44.71	AV	248.00	150	Horizontal	N/A
5	9549.688	46.58	-2.51	74.0	27.42	Peak	0.00	150	Horizontal	Pass
5**	9549.688	35.99	-2.51	54.0	18.01	AV	0.00	150	Horizontal	Pass
6	17230.350	49.69	-0.38	74.0	24.31	Peak	296.00	150	Horizontal	Pass
6**	17230.350	38.39	-0.38	54.0	15.61	AV	296.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26080210

Test Time: 2026-08-23_15.10.39

EUT Name: Mobile Phone

Temp.(°C): 23.9

Model Number: KO2

Humidity (%RH): 49

Sample Number: CC26080161-001-S13

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIFI 11n40 CH38 P=19


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A03+数据线: A06

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

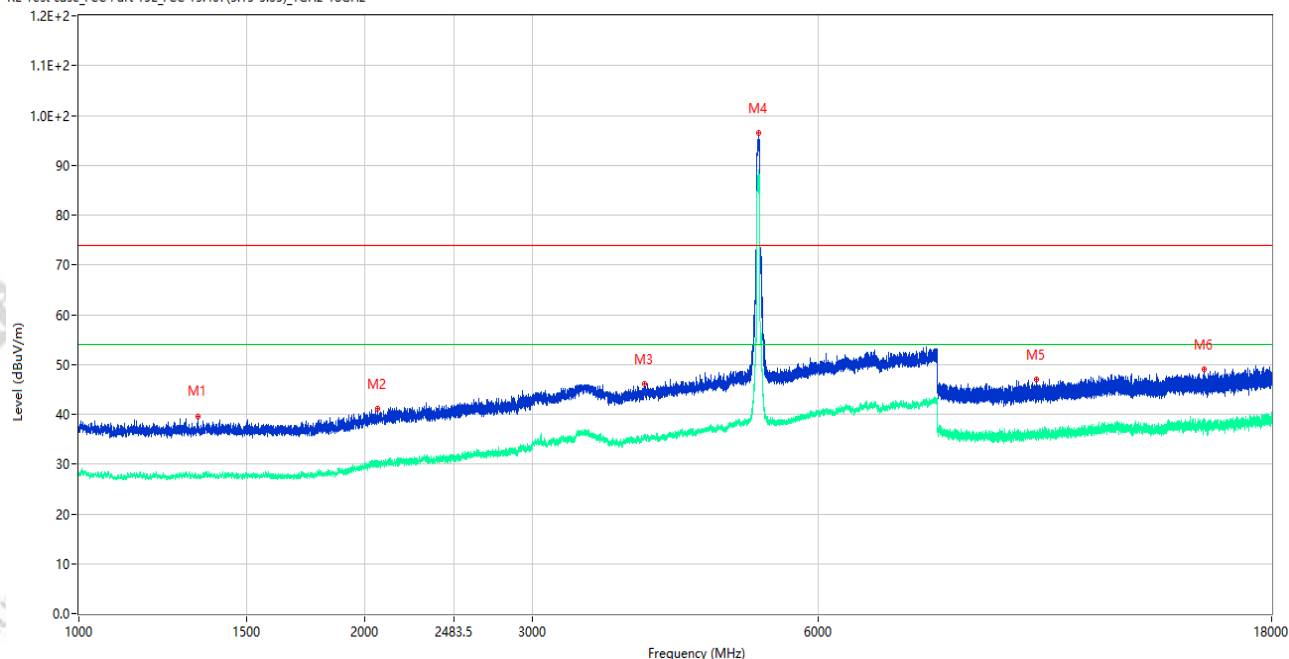

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1333.500	39.64	-16.02	74.0	34.36	Peak	199.00	150	Vertical	Pass
1**	1333.500	27.28	-16.02	54.0	26.72	AV	199.00	150	Vertical	Pass
2	2063.250	41.13	-13.84	74.0	32.87	Peak	340.00	150	Vertical	Pass
2**	2063.250	30.31	-13.84	54.0	23.69	AV	340.00	150	Vertical	Pass
3	3935.500	46.04	-3.68	74.0	27.96	Peak	7.00	150	Vertical	Pass
3**	3935.500	35.57	-3.68	54.0	18.43	AV	7.00	150	Vertical	Pass
4	5195.000	96.47	-2.33	74.0	-22.47	Peak	166.00	150	Vertical	N/A
4**	5195.000	88.46	-2.33	54.0	-34.46	AV	166.00	150	Vertical	N/A
5	10184.762	46.97	-3.59	74.0	27.03	Peak	94.00	150	Vertical	Pass
5**	10184.762	36.07	-3.59	54.0	17.93	AV	94.00	150	Vertical	Pass
6	15269.474	48.93	-1.23	74.0	25.07	Peak	119.00	150	Vertical	Pass
6**	15269.474	38.08	-1.23	54.0	15.92	AV	119.00	150	Vertical	Pass

Test Result

Project Number: P-CC26080210

Test Time: 2026-08-23_15.15.57

EUT Name: Mobile Phone

Temp.(°C): 23.9

Model Number: KO2

Humidity (%RH): 49

Sample Number: CC26080161-001-S13

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIFI 11n40 CH38 P=19


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A03+数据线: A06

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

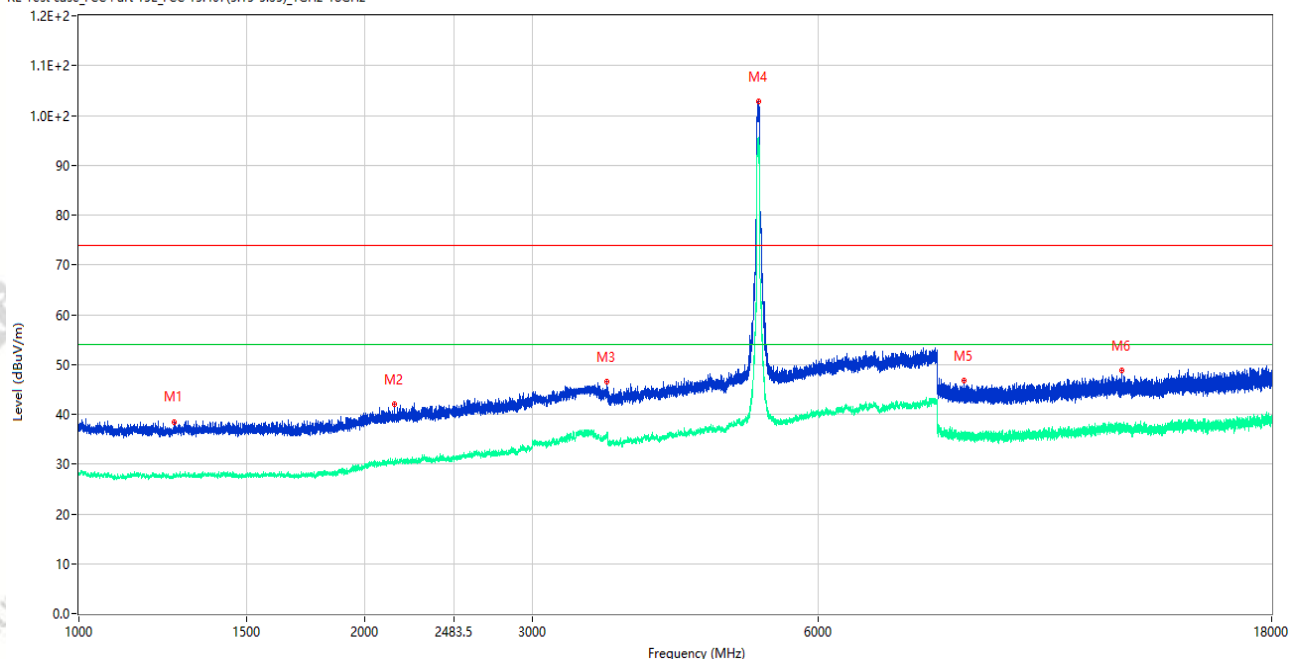

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1260.000	38.50	-16.02	74.0	35.50	Peak	42.00	150	Horizontal	Pass
1**	1260.000	27.51	-16.02	54.0	26.49	AV	42.00	150	Horizontal	Pass
2	2150.500	41.98	-13.65	74.0	32.02	Peak	155.00	150	Horizontal	Pass
2**	2150.500	30.14	-13.65	54.0	23.86	AV	155.00	150	Horizontal	Pass
3	3595.500	46.63	-5.38	74.0	27.37	Peak	313.00	150	Horizontal	Pass
3**	3595.500	35.87	-5.38	54.0	18.13	AV	313.00	150	Horizontal	Pass
4	5192.500	102.86	-2.32	74.0	-28.86	Peak	247.00	150	Horizontal	N/A
4**	5192.500	94.78	-2.32	54.0	-40.78	AV	247.00	150	Horizontal	N/A
5	8543.162	46.75	-5.24	74.0	27.25	Peak	321.00	150	Horizontal	Pass
5**	8543.162	35.63	-5.24	54.0	18.37	AV	321.00	150	Horizontal	Pass
6	12516.537	48.76	-3.12	74.0	25.24	Peak	129.00	150	Horizontal	Pass
6**	12516.537	36.86	-3.12	54.0	17.14	AV	129.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26080210

Test Time: 2026-08-23_15.46.23

EUT Name: Mobile Phone

Temp.(°C): 23.9

Model Number: KO2

Humidity (%RH): 49

Sample Number: CC26080161-001-S13

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIFI 11ac80 CH42 P=19


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A03+数据线: A06

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

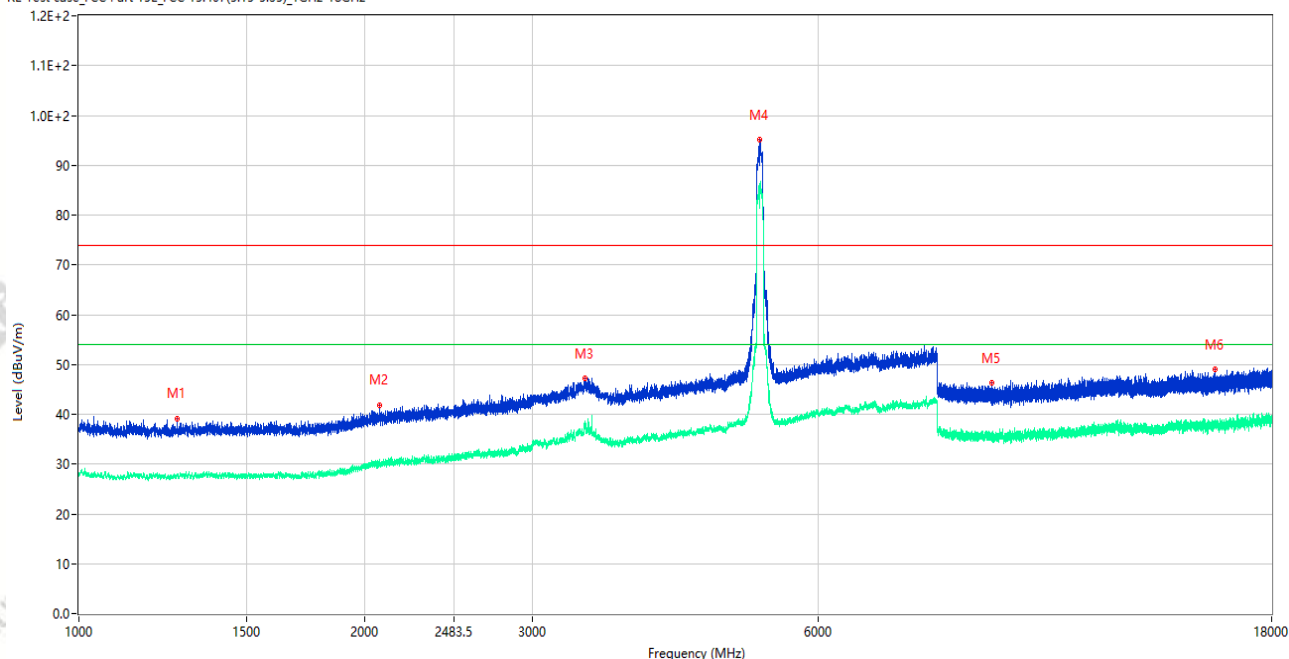

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1269.500	39.19	-15.91	74.0	34.81	Peak	226.00	150	Vertical	Pass
1**	1269.500	28.08	-15.91	54.0	25.92	AV	226.00	150	Vertical	Pass
2	2073.750	41.91	-13.75	74.0	32.09	Peak	330.00	150	Vertical	Pass
2**	2073.750	30.31	-13.75	54.0	23.69	AV	330.00	150	Vertical	Pass
3	3407.500	47.22	-5.33	74.0	26.78	Peak	6.00	150	Vertical	Pass
3**	3407.500	38.34	-5.33	54.0	15.66	AV	6.00	150	Vertical	Pass
4	5203.000	95.08	-2.37	74.0	-21.08	Peak	160.00	150	Vertical	N/A
4**	5203.000	85.45	-2.37	54.0	-31.45	AV	160.00	150	Vertical	N/A
5	9140.950	46.37	-5.57	74.0	27.63	Peak	58.00	150	Vertical	Pass
5**	9140.950	35.18	-5.57	54.0	18.82	AV	58.00	150	Vertical	Pass
6	15681.863	48.94	-1.74	74.0	25.06	Peak	296.00	150	Vertical	Pass
6**	15681.863	37.87	-1.74	54.0	16.13	AV	296.00	150	Vertical	Pass

Test Result

Project Number: P-CC26080210

Test Time: 2026-08-23_15.51.05

EUT Name: Mobile Phone

Temp.(°C): 23.9

Model Number: KO2

Humidity (%RH): 49

Sample Number: CC26080161-001-S13

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIFI 11ac80 CH42 P=19


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A03+数据线: A06

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

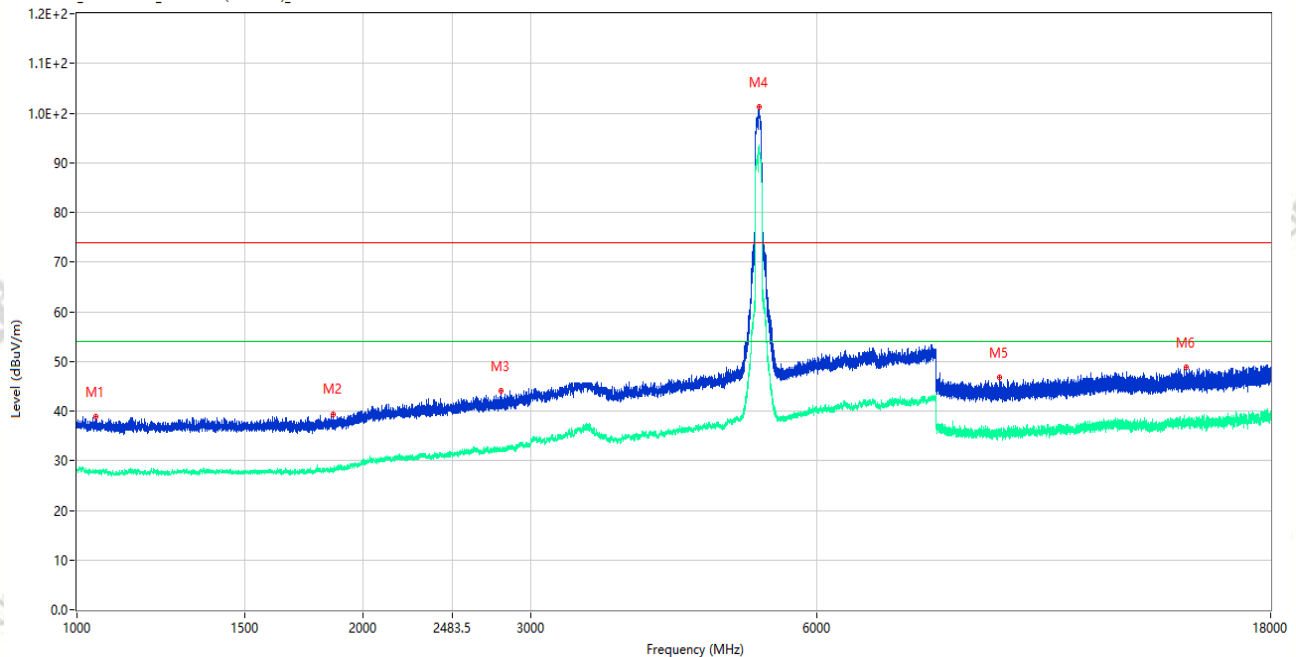

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1048.000	38.77	-15.39	74.0	35.23	Peak	0.00	150	Horizontal	Pass
1**	1048.000	28.06	-15.39	54.0	25.94	AV	0.00	150	Horizontal	Pass
2	1860.250	39.42	-15.88	74.0	34.58	Peak	0.00	150	Horizontal	Pass
2**	1860.250	27.74	-15.88	54.0	26.26	AV	0.00	150	Horizontal	Pass
3	2794.000	44.13	-9.80	74.0	29.87	Peak	357.00	150	Horizontal	Pass
3**	2794.000	32.38	-9.80	54.0	21.62	AV	357.00	150	Horizontal	Pass
4	5216.000	101.20	-2.32	74.0	-27.20	Peak	254.00	150	Horizontal	N/A
4**	5216.000	92.97	-2.32	54.0	-38.97	AV	254.00	150	Horizontal	N/A
5	9345.675	46.75	-5.25	74.0	27.25	Peak	232.00	150	Horizontal	Pass
5**	9345.675	35.52	-5.25	54.0	18.48	AV	232.00	150	Horizontal	Pass
6	14685.938	48.77	-2.03	74.0	25.23	Peak	297.00	150	Horizontal	Pass
6**	14685.938	37.64	-2.03	54.0	16.36	AV	297.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26080210

Test Time: 2026-08-23_16.10.47

EUT Name: Mobile Phone

Temp.(°C): 23.9

Model Number: KO2

Humidity (%RH): 49

Sample Number: CC26080161-001-S13

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E


Work Mode: Normal working Link(5G WIFI)

Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A03+数据线: A06

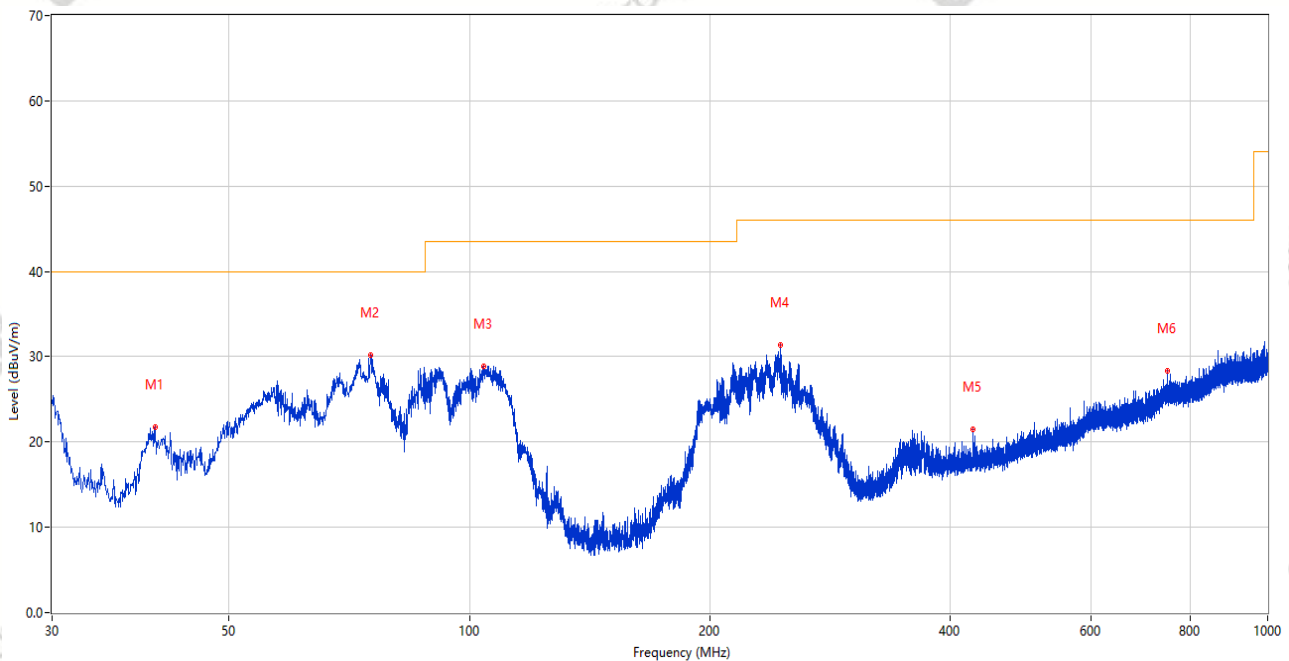

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	40.379	21.73	-25.80	40.0	18.27	Peak	299.00	100	Vertical	Pass
2	75.299	30.21	-30.50	40.0	9.79	Peak	342.00	100	Vertical	Pass
3	104.157	28.93	-26.16	43.5	14.57	Peak	231.00	100	Vertical	Pass
4	245.583	31.38	-24.24	46.0	14.62	Peak	209.00	100	Vertical	Pass
5	426.875	21.45	-19.81	46.0	24.55	Peak	48.00	100	Vertical	Pass
6	749.255	28.38	-11.95	46.0	17.62	Peak	61.00	100	Vertical	Pass

Test Result

Project Number: P-CC26080210

Test Time: 2026-08-23_16.18.02

EUT Name: Mobile Phone

Temp.(°C): 23.9

Model Number: KO2

Humidity (%RH): 49

Sample Number: CC26080161-001-S13

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E


Work Mode: Normal working Link(5G WIFI)

Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A03+数据线: A06

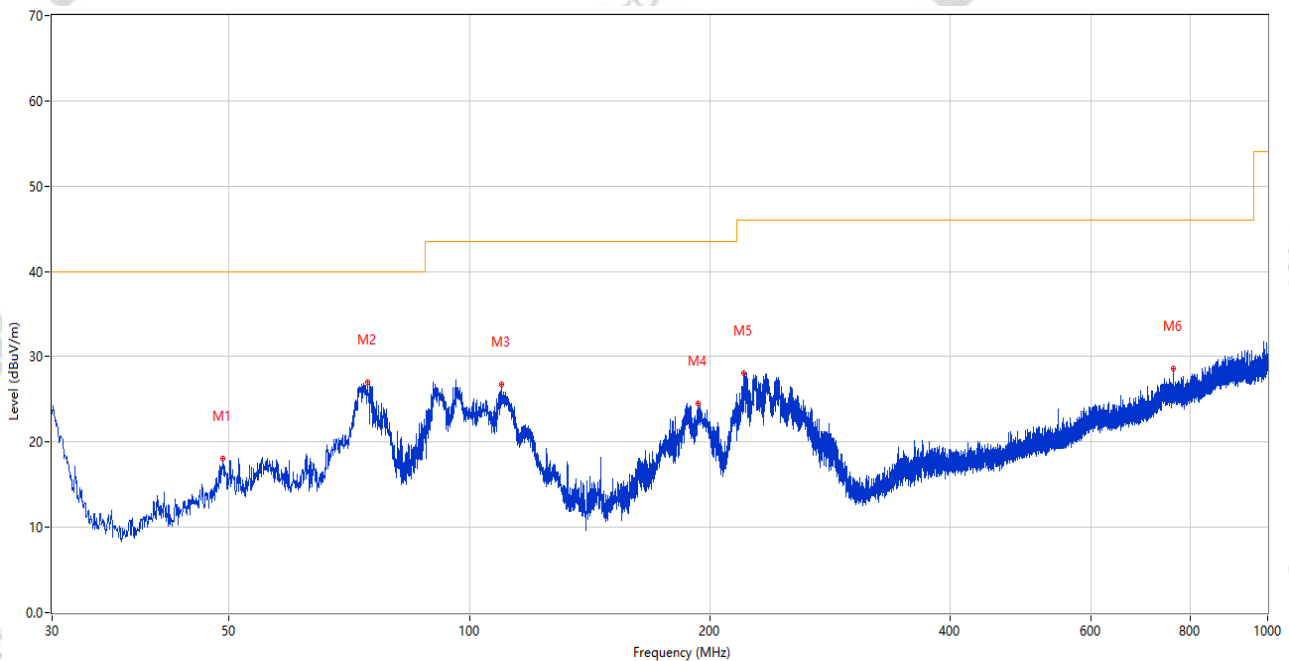

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	49.060	18.05	-24.50	40.0	21.95	Peak	0.00	100	Horizontal	Pass
2	74.523	26.99	-30.36	40.0	13.01	Peak	221.00	200	Horizontal	Pass
3	109.637	26.80	-26.54	43.5	16.70	Peak	177.00	100	Horizontal	Pass
4	193.542	24.53	-25.74	43.5	18.97	Peak	87.00	100	Horizontal	Pass
5	220.750	28.11	-25.76	46.0	17.89	Peak	283.00	100	Horizontal	Pass
6	761.477	28.67	-11.96	46.0	17.33	Peak	131.00	100	Horizontal	Pass

Test Result

Project Number: P-CC26080210

Test Time: 2026-08-23_16.27.29

EUT Name: Mobile Phone

Temp.(°C): 23.9

Model Number: KO2

Humidity (%RH): 49

Sample Number: CC26080161-001-S13

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIFI 11a CH60 P=18


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A03+数据线: A06

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

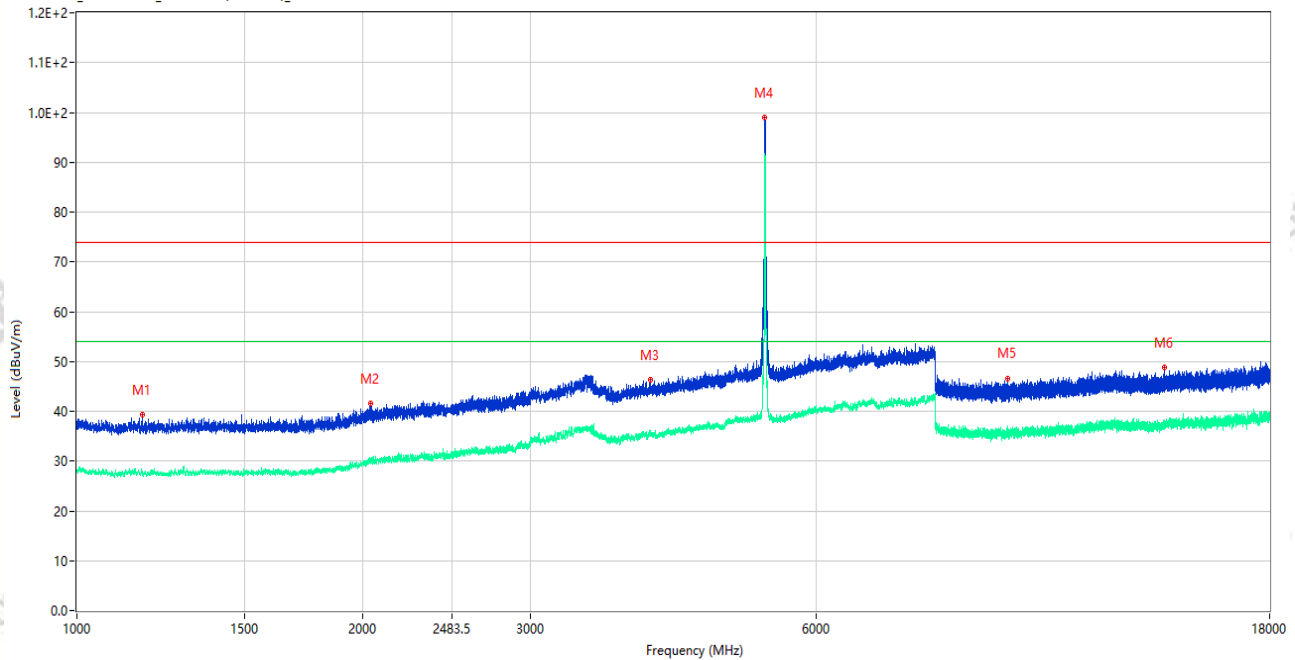

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1172.500	39.25	-15.57	74.0	34.75	Peak	108.00	150	Vertical	Pass
1**	1172.500	27.46	-15.57	54.0	26.54	AV	108.00	150	Vertical	Pass
2	2036.250	41.50	-13.33	74.0	32.50	Peak	128.00	150	Vertical	Pass
2**	2036.250	30.24	-13.33	54.0	23.76	AV	128.00	150	Vertical	Pass
3	4018.500	46.29	-4.03	74.0	27.71	Peak	211.00	150	Vertical	Pass
3**	4018.500	35.55	-4.03	54.0	18.45	AV	211.00	150	Vertical	Pass
4	5298.500	99.06	-2.03	74.0	-25.06	Peak	56.00	150	Vertical	N/A
4**	5298.500	91.65	-2.03	54.0	-37.65	AV	56.00	150	Vertical	N/A
5	9549.213	46.52	-2.52	74.0	27.48	Peak	200.00	150	Vertical	Pass
5**	9549.213	36.37	-2.52	54.0	17.63	AV	200.00	150	Vertical	Pass
6	13958.287	48.78	-1.95	74.0	25.22	Peak	220.00	150	Vertical	Pass
6**	13958.287	36.55	-1.95	54.0	17.45	AV	220.00	150	Vertical	Pass

Test Result

Project Number: P-CC26080210

Test Time: 2026-08-23_16.32.20

EUT Name: Mobile Phone

Temp.(°C): 23.9

Model Number: KO2

Humidity (%RH): 49

Sample Number: CC26080161-001-S13

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIFI 11a CH60 P=18


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A03+数据线: A06

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

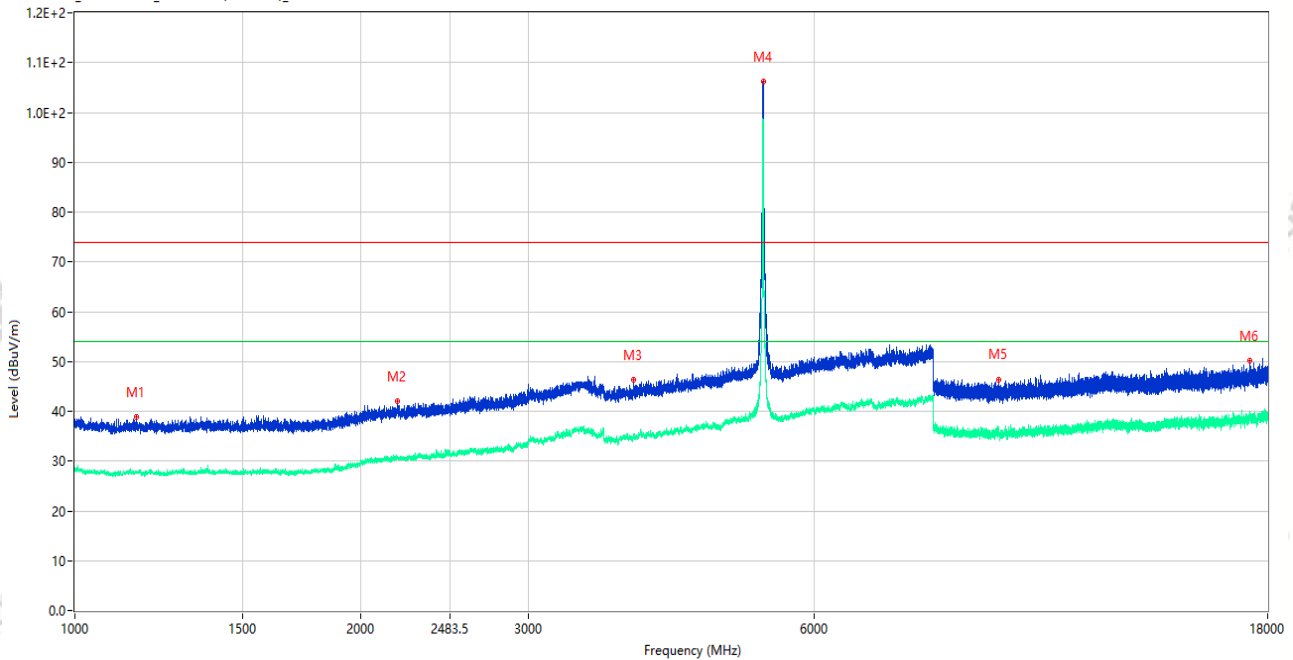

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1161.250	38.90	-15.47	74.0	35.10	Peak	359.00	150	Horizontal	Pass
1**	1161.250	27.77	-15.47	54.0	26.23	AV	359.00	150	Horizontal	Pass
2	2185.500	41.96	-13.18	74.0	32.04	Peak	350.00	150	Horizontal	Pass
2**	2185.500	30.98	-13.18	54.0	23.02	AV	350.00	150	Horizontal	Pass
3	3876.000	46.26	-4.80	74.0	27.74	Peak	360.00	150	Horizontal	Pass
3**	3876.000	35.16	-4.80	54.0	18.84	AV	360.00	150	Horizontal	Pass
4	5300.000	106.28	-2.04	74.0	-32.28	Peak	238.00	150	Horizontal	N/A
4**	5300.000	98.20	-2.04	54.0	-44.20	AV	238.00	150	Horizontal	N/A
5	9384.625	46.38	-4.52	74.0	27.62	Peak	352.00	150	Horizontal	Pass
5**	9384.625	36.14	-4.52	54.0	17.86	AV	352.00	150	Horizontal	Pass
6	17228.249	50.16	-0.40	74.0	23.84	Peak	271.00	150	Horizontal	Pass
6**	17228.249	38.67	-0.40	54.0	15.33	AV	271.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26080210

Test Time: 2026-08-23_17.37.00

EUT Name: Mobile Phone

Temp.(°C): 23.9

Model Number: KO2

Humidity (%RH): 49

Sample Number: CC26080161-001-S13

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIFI 11ac20 CH60 P=19


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A03+数据线: A06

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

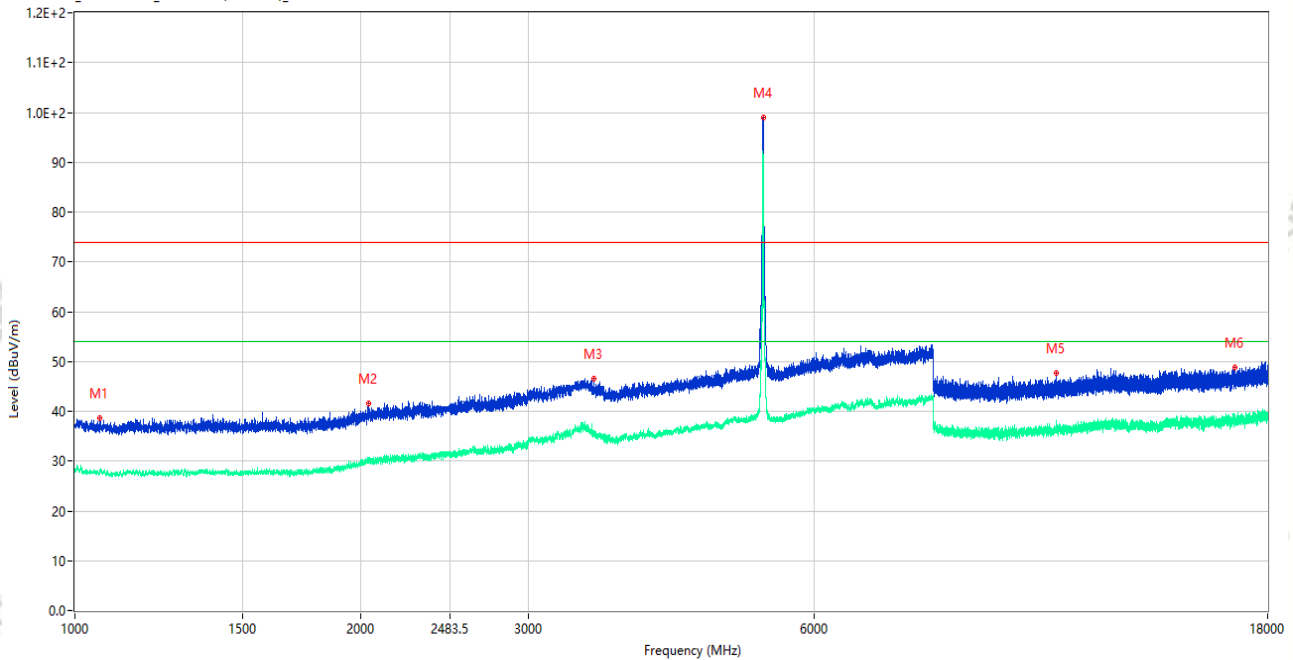

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1063.000	38.71	-15.24	74.0	35.29	Peak	70.00	150	Vertical	Pass
1**	1063.000	27.77	-15.24	54.0	26.23	AV	70.00	150	Vertical	Pass
2	2040.000	41.48	-13.29	74.0	32.52	Peak	30.00	150	Vertical	Pass
2**	2040.000	29.55	-13.29	54.0	24.45	AV	30.00	150	Vertical	Pass
3	3517.500	46.47	-5.88	74.0	27.53	Peak	334.00	150	Vertical	Pass
3**	3517.500	35.58	-5.88	54.0	18.42	AV	334.00	150	Vertical	Pass
4	5301.500	98.97	-2.07	74.0	-24.97	Peak	142.00	150	Vertical	N/A
4**	5301.500	91.60	-2.07	54.0	-37.60	AV	142.00	150	Vertical	N/A
5	10783.025	47.74	-3.03	74.0	26.26	Peak	41.00	150	Vertical	Pass
5**	10783.025	36.69	-3.03	54.0	17.31	AV	41.00	150	Vertical	Pass
6	16641.563	48.83	-1.02	74.0	25.17	Peak	169.00	150	Vertical	Pass
6**	16641.563	39.03	-1.02	54.0	14.97	AV	169.00	150	Vertical	Pass

Test Result

Project Number: P-CC26080210

Test Time: 2026-08-23_17.42.08

EUT Name: Mobile Phone

Temp.(°C): 23.9

Model Number: KO2

Humidity (%RH): 49

Sample Number: CC26080161-001-S13

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIFI 11ac20 CH60 P=19


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A03+数据线: A06

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

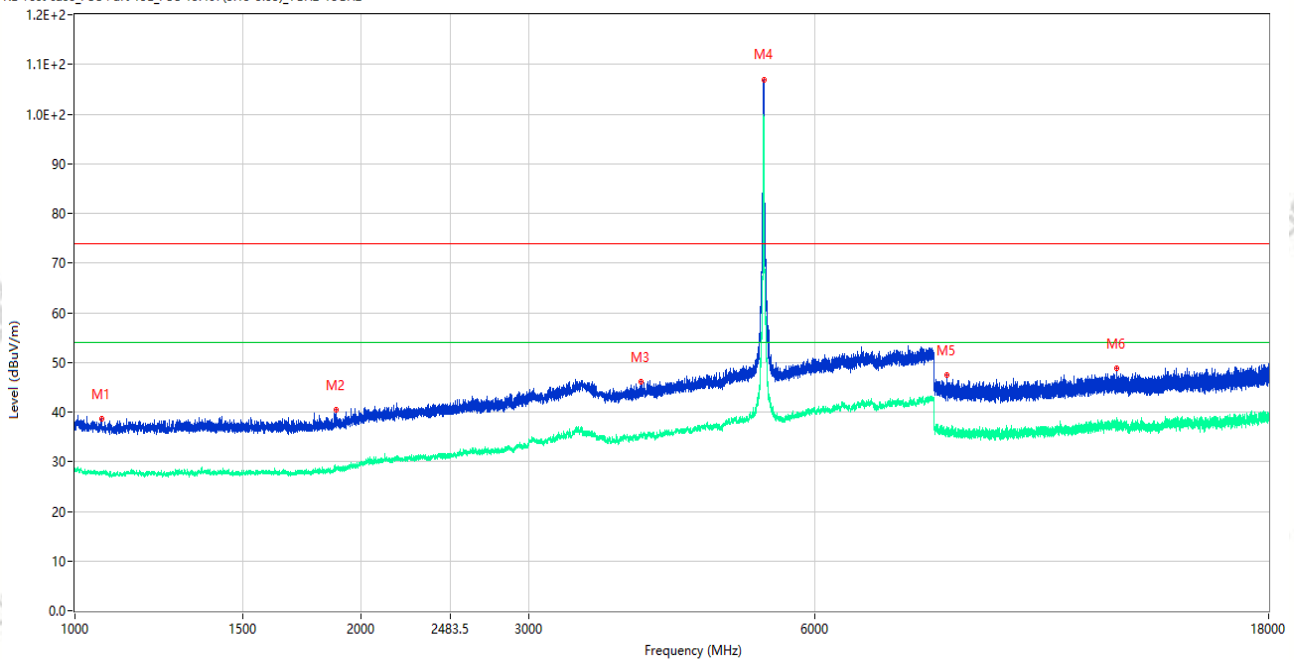

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1066.250	38.61	-15.14	74.0	35.39	Peak	168.00	150	Horizontal	Pass
1**	1066.250	27.97	-15.14	54.0	26.03	AV	168.00	150	Horizontal	Pass
2	1883.250	40.43	-15.32	74.0	33.57	Peak	130.00	150	Horizontal	Pass
2**	1883.250	28.81	-15.32	54.0	25.19	AV	130.00	150	Horizontal	Pass
3	3934.500	46.18	-3.61	74.0	27.82	Peak	360.00	150	Horizontal	Pass
3**	3934.500	35.55	-3.61	54.0	18.45	AV	360.00	150	Horizontal	Pass
4	5300.500	106.85	-2.06	74.0	-32.85	Peak	249.00	150	Horizontal	N/A
4**	5300.500	98.69	-2.06	54.0	-44.69	AV	249.00	150	Horizontal	N/A
5	8257.213	47.44	-4.49	74.0	26.56	Peak	78.00	150	Horizontal	Pass
5**	8257.213	36.11	-4.49	54.0	17.89	AV	78.00	150	Horizontal	Pass
6	12454.075	48.80	-2.32	74.0	25.20	Peak	360.00	150	Horizontal	Pass
6**	12454.075	37.30	-2.32	54.0	16.70	AV	360.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26080210

Test Time: 2026-08-23_18.03.10

EUT Name: Mobile Phone

Temp.(°C): 23.9

Model Number: KO2

Humidity (%RH): 49

Sample Number: CC26080161-001-S13

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIFI 11ac40 CH54 P=19


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A03+数据线: A06

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

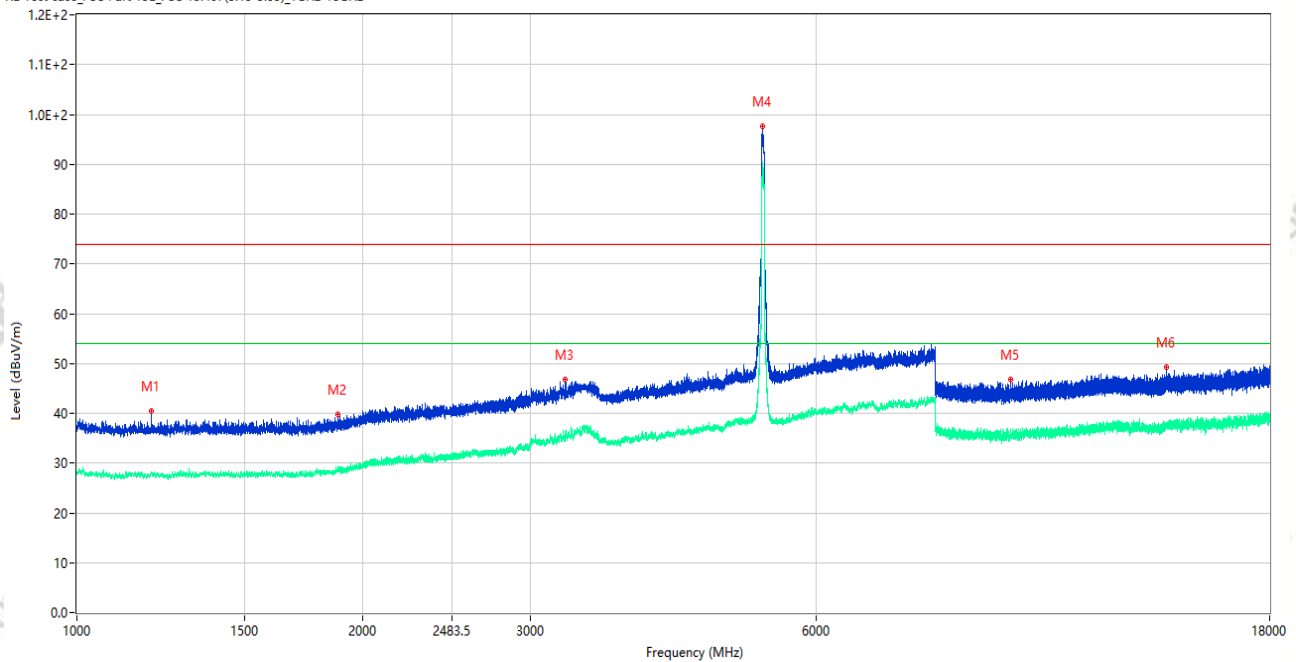

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1198.500	40.36	-15.75	74.0	33.64	Peak	234.00	150	Vertical	Pass
1**	1198.500	27.81	-15.75	54.0	26.19	AV	234.00	150	Vertical	Pass
2	1881.250	39.74	-15.32	74.0	34.26	Peak	91.00	150	Vertical	Pass
2**	1881.250	28.53	-15.32	54.0	25.47	AV	91.00	150	Vertical	Pass
3	3268.000	46.75	-6.87	74.0	27.25	Peak	238.00	150	Vertical	Pass
3**	3268.000	35.80	-6.87	54.0	18.20	AV	238.00	150	Vertical	Pass
4	5272.000	97.69	-2.42	74.0	-23.69	Peak	149.00	150	Vertical	N/A
4**	5272.000	90.04	-2.42	54.0	-36.04	AV	149.00	150	Vertical	N/A
5	9603.599	46.67	-3.38	74.0	27.33	Peak	146.00	150	Vertical	Pass
5**	9603.599	35.83	-3.38	54.0	18.17	AV	146.00	150	Vertical	Pass
6	14003.438	49.26	-1.64	74.0	24.74	Peak	43.00	150	Vertical	Pass
6**	14003.438	37.63	-1.64	54.0	16.37	AV	43.00	150	Vertical	Pass

Test Result

Project Number: P-CC26080210

Test Time: 2026-08-23_17.57.57

EUT Name: Mobile Phone

Temp.(°C): 23.9

Model Number: KO2

Humidity (%RH): 49

Sample Number: CC26080161-001-S13

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIFI 11ac40 CH54 P=19


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A03+数据线: A06

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

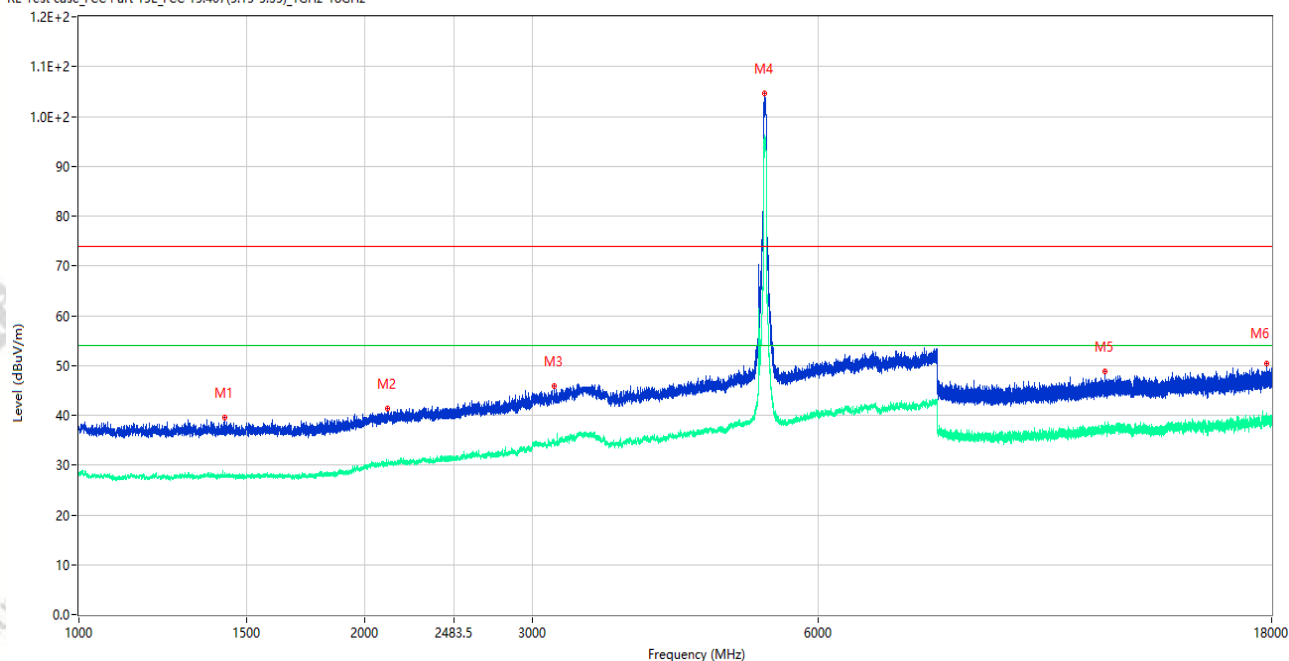

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1424.250	39.60	-15.97	74.0	34.40	Peak	243.00	150	Horizontal	Pass
1**	1424.250	27.81	-15.97	54.0	26.19	AV	243.00	150	Horizontal	Pass
2	2111.500	41.28	-13.60	74.0	32.72	Peak	87.00	150	Horizontal	Pass
2**	2111.500	30.18	-13.60	54.0	23.82	AV	87.00	150	Horizontal	Pass
3	3163.000	45.78	-7.11	74.0	28.22	Peak	355.00	150	Horizontal	Pass
3**	3163.000	34.92	-7.11	54.0	19.08	AV	355.00	150	Horizontal	Pass
4	5273.500	104.68	-2.43	74.0	-30.68	Peak	254.00	150	Horizontal	N/A
4**	5273.500	95.96	-2.43	54.0	-41.96	AV	254.00	150	Horizontal	N/A
5	12023.012	48.74	-2.89	74.0	25.26	Peak	0.00	150	Horizontal	Pass
5**	12023.012	37.47	-2.89	54.0	16.53	AV	0.00	150	Horizontal	Pass
6	17793.675	50.35	1.34	74.0	23.65	Peak	360.00	150	Horizontal	Pass
6**	17793.675	39.44	1.34	54.0	14.56	AV	360.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26080210

Test Time: 2026-08-23_18.43.48

EUT Name: Mobile Phone

Temp.(°C): 23.9

Model Number: KO2

Humidity (%RH): 49

Sample Number: CC26080161-001-S13

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIFI 11ac80 CH58 P=19


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A03+数据线: A06

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

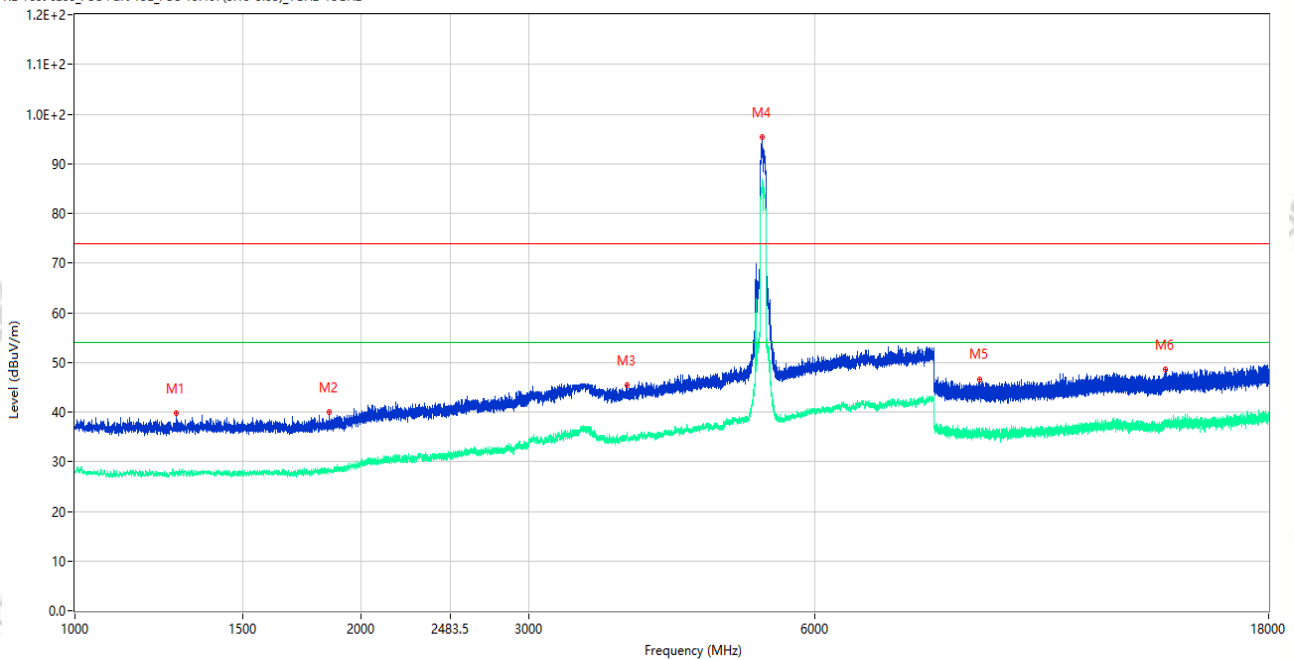

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1279.500	39.80	-15.87	74.0	34.20	Peak	285.00	150	Vertical	Pass
1**	1279.500	27.74	-15.87	54.0	26.26	AV	285.00	150	Vertical	Pass
2	1851.750	39.99	-15.82	74.0	34.01	Peak	179.00	150	Vertical	Pass
2**	1851.750	27.78	-15.82	54.0	26.22	AV	179.00	150	Vertical	Pass
3	3808.500	45.35	-4.36	74.0	28.65	Peak	360.00	150	Vertical	Pass
3**	3808.500	34.97	-4.36	54.0	19.03	AV	360.00	150	Vertical	Pass
4	5283.500	95.32	-2.19	74.0	-21.32	Peak	142.00	150	Vertical	N/A
4**	5283.500	85.36	-2.19	54.0	-31.36	AV	142.00	150	Vertical	N/A
5	8940.975	46.49	-4.46	74.0	27.51	Peak	305.00	150	Vertical	Pass
5**	8940.975	36.15	-4.46	54.0	17.85	AV	305.00	150	Vertical	Pass
6	14030.737	48.52	-1.84	74.0	25.48	Peak	271.00	150	Vertical	Pass
6**	14030.737	37.38	-1.84	54.0	16.62	AV	271.00	150	Vertical	Pass

Test Result

Project Number: P-CC26080210

Test Time: 2026-08-23_18.38.29

EUT Name: Mobile Phone

Temp.(°C): 23.9

Model Number: KO2

Humidity (%RH): 49

Sample Number: CC26080161-001-S13

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIFI 11ac80 CH58 P=19


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A03+数据线: A06

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

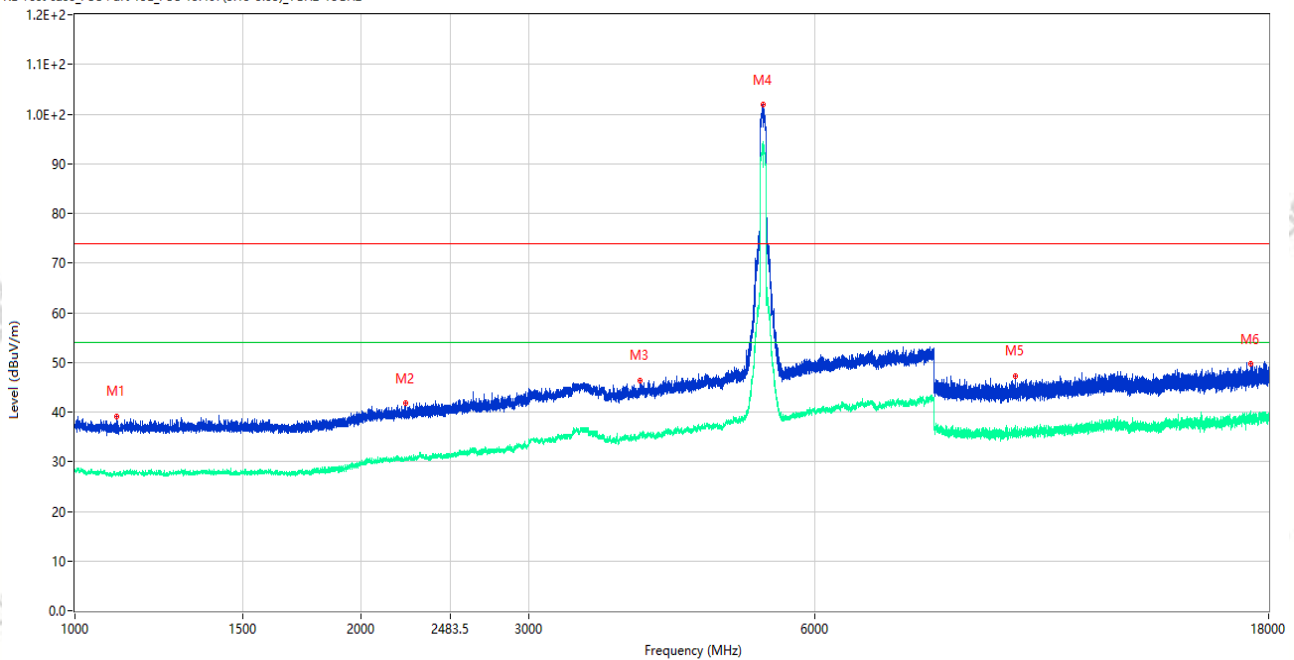

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1106.500	38.99	-15.76	74.0	35.01	Peak	302.00	150	Horizontal	Pass
1**	1106.500	27.41	-15.76	54.0	26.59	AV	302.00	150	Horizontal	Pass
2	2228.250	41.72	-13.11	74.0	32.28	Peak	139.00	150	Horizontal	Pass
2**	2228.250	30.72	-13.11	54.0	23.28	AV	139.00	150	Horizontal	Pass
3	3931.000	46.37	-3.53	74.0	27.63	Peak	319.00	150	Horizontal	Pass
3**	3931.000	35.49	-3.53	54.0	18.51	AV	319.00	150	Horizontal	Pass
4	5295.500	101.98	-2.00	74.0	-27.98	Peak	253.00	150	Horizontal	N/A
4**	5295.500	94.46	-2.00	54.0	-40.46	AV	253.00	150	Horizontal	N/A
5	9740.162	47.26	-3.95	74.0	26.74	Peak	352.00	150	Horizontal	Pass
5**	9740.162	36.10	-3.95	54.0	17.90	AV	352.00	150	Horizontal	Pass
6	17234.551	49.66	-0.50	74.0	24.34	Peak	194.00	150	Horizontal	Pass
6**	17234.551	38.79	-0.50	54.0	15.21	AV	194.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26080210

Test Time: 2026-08-23_19.18.45

EUT Name: Mobile Phone

Temp.(°C): 23.9

Model Number: KO2

Humidity (%RH): 49

Sample Number: CC26080161-001-S13

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11a CH116 P=18


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A03+数据线: A06

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

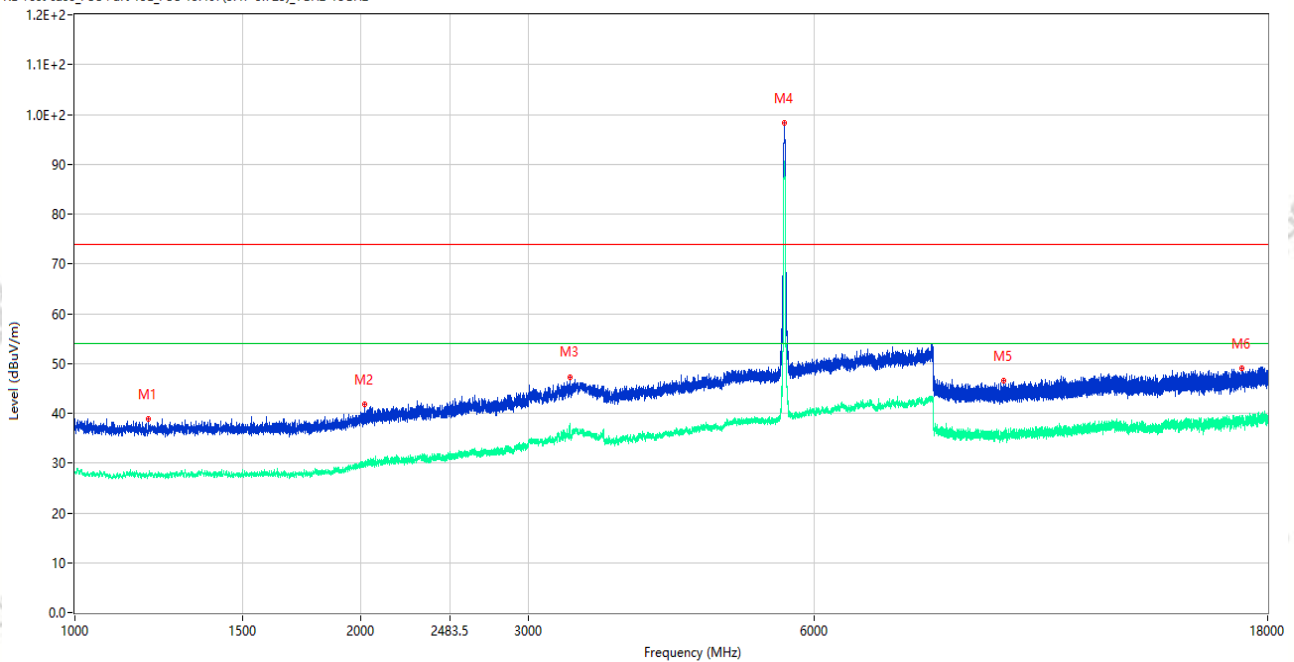

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1195.500	38.95	-15.75	74.0	35.05	Peak	234.00	150	Vertical	Pass
1**	1195.500	27.58	-15.75	54.0	26.42	AV	234.00	150	Vertical	Pass
2	2018.000	41.72	-14.19	74.0	32.28	Peak	263.00	150	Vertical	Pass
2**	2018.000	29.70	-14.19	54.0	24.30	AV	263.00	150	Vertical	Pass
3	3316.000	47.33	-6.39	74.0	26.67	Peak	83.00	150	Vertical	Pass
3**	3316.000	36.18	-6.39	54.0	17.82	AV	83.00	150	Vertical	Pass
4	5582.000	98.21	-2.85	74.0	-24.21	Peak	216.00	150	Vertical	N/A
4**	5582.000	89.91	-2.85	54.0	-35.91	AV	216.00	150	Vertical	N/A
5	9499.575	46.47	-3.59	74.0	27.53	Peak	251.00	150	Vertical	Pass
5**	9499.575	35.34	-3.59	54.0	18.66	AV	251.00	150	Vertical	Pass
6	16912.725	49.02	-0.64	74.0	24.98	Peak	322.00	150	Vertical	Pass
6**	16912.725	38.28	-0.64	54.0	15.72	AV	322.00	150	Vertical	Pass

Test Result

Project Number: P-CC26080210

Test Time: 2026-08-23_19.35.56

EUT Name: Mobile Phone

Temp.(°C): 23.9

Model Number: KO2

Humidity (%RH): 49

Sample Number: CC26080161-001-S13

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11a CH116 P=18


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A03+数据线: A06

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

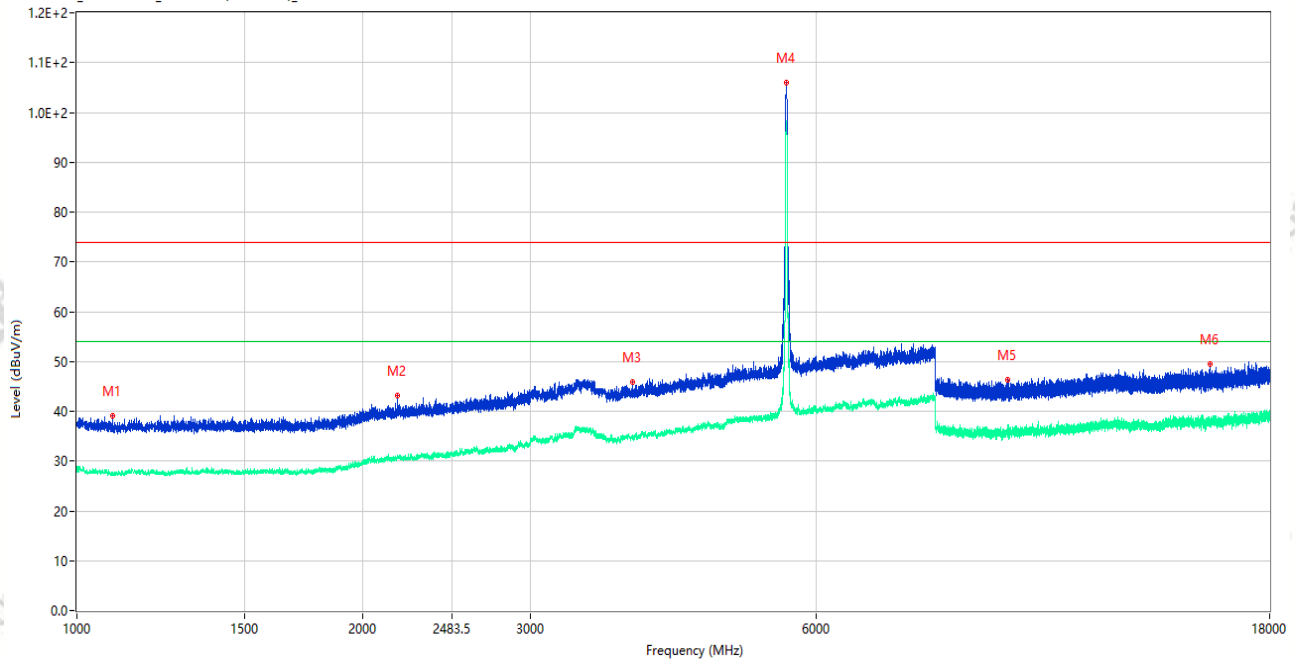

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1089.750	39.06	-15.82	74.0	34.94	Peak	43.00	150	Horizontal	Pass
1**	1089.750	27.41	-15.82	54.0	26.59	AV	43.00	150	Horizontal	Pass
2	2173.750	43.21	-12.94	74.0	30.79	Peak	285.00	150	Horizontal	Pass
2**	2173.750	30.73	-12.94	54.0	23.27	AV	285.00	150	Horizontal	Pass
3	3845.000	45.92	-5.35	74.0	28.08	Peak	17.00	150	Horizontal	Pass
3**	3845.000	35.01	-5.35	54.0	18.99	AV	17.00	150	Horizontal	Pass
4	5577.500	105.91	-2.89	74.0	-31.91	Peak	262.00	150	Horizontal	N/A
4**	5577.500	97.83	-2.89	54.0	-43.83	AV	262.00	150	Horizontal	N/A
5	9548.738	46.26	-2.53	74.0	27.74	Peak	22.00	150	Horizontal	Pass
5**	9548.738	36.34	-2.53	54.0	17.66	AV	22.00	150	Horizontal	Pass
6	15577.650	49.47	-2.39	74.0	24.53	Peak	271.00	150	Horizontal	Pass
6**	15577.650	37.99	-2.39	54.0	16.01	AV	271.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26080210

Test Time: 2026-08-23_20.56.04

EUT Name: Mobile Phone

Temp.(°C): 23.9

Model Number: KO2

Humidity (%RH): 49

Sample Number: CC26080161-001-S13

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11n20 CH116 P=19


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A03+数据线: A06

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

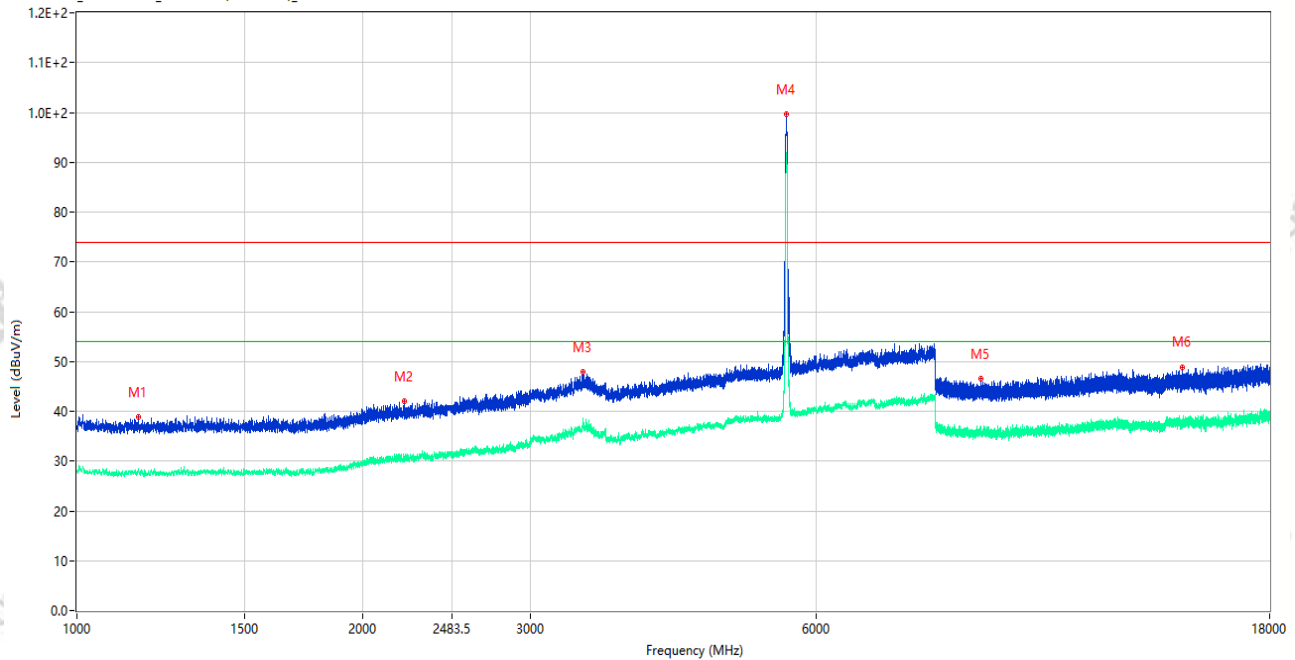

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1160.750	38.76	-15.48	74.0	35.24	Peak	307.00	150	Vertical	Pass
1**	1160.750	28.08	-15.48	54.0	25.92	AV	307.00	150	Vertical	Pass
2	2211.500	41.98	-13.25	74.0	32.02	Peak	141.00	150	Vertical	Pass
2**	2211.500	30.27	-13.25	54.0	23.73	AV	141.00	150	Vertical	Pass
3	3407.000	47.87	-5.36	74.0	26.13	Peak	128.00	150	Vertical	Pass
3**	3407.000	37.44	-5.36	54.0	16.56	AV	128.00	150	Vertical	Pass
4	5581.500	99.63	-2.85	74.0	-25.63	Peak	202.00	150	Vertical	N/A
4**	5581.500	90.94	-2.85	54.0	-36.94	AV	202.00	150	Vertical	N/A
5	8932.187	46.61	-4.26	74.0	27.39	Peak	23.00	150	Vertical	Pass
5**	8932.187	36.43	-4.26	54.0	17.57	AV	23.00	150	Vertical	Pass
6	14552.849	48.93	-2.71	74.0	25.07	Peak	360.00	150	Vertical	Pass
6**	14552.849	37.68	-2.71	54.0	16.32	AV	360.00	150	Vertical	Pass

Test Result

Project Number: P-CC26080210

Test Time: 2026-08-23_21.00.49

EUT Name: Mobile Phone

Temp.(°C): 23.9

Model Number: KO2

Humidity (%RH): 49

Sample Number: CC26080161-001-S13

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11n20 CH116 P=19


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A03+数据线: A06

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

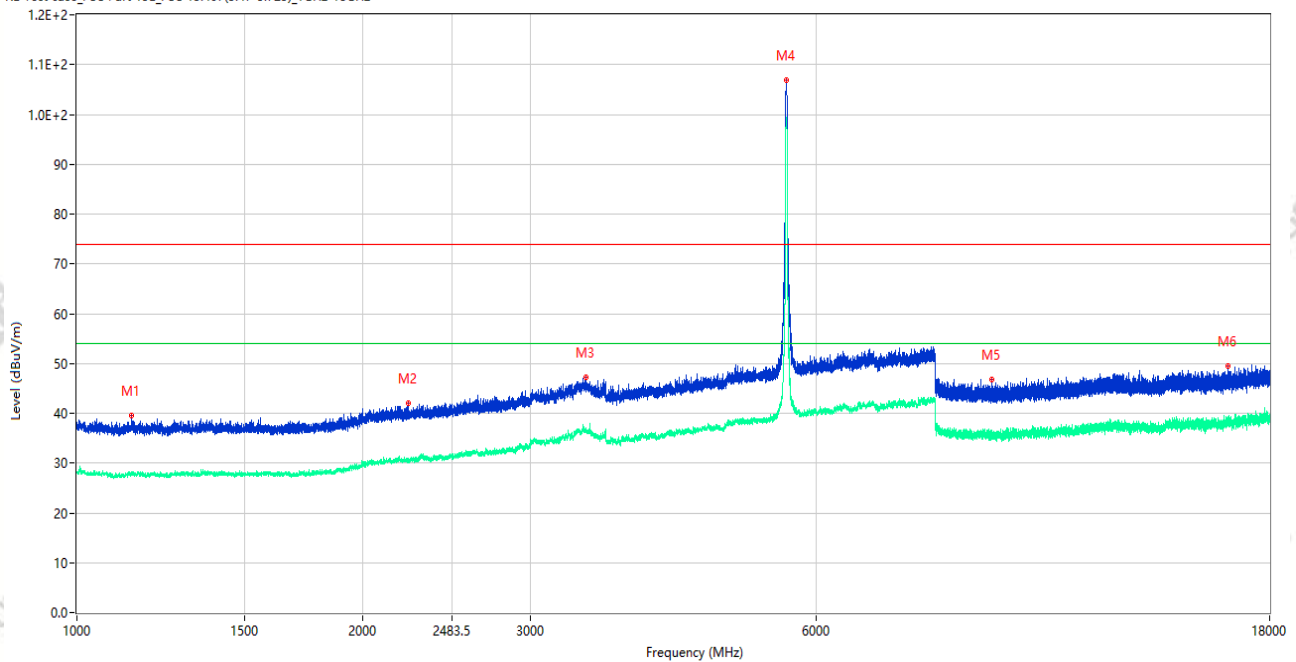

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1141.000	39.60	-15.58	74.0	34.40	Peak	5.00	150	Horizontal	Pass
1**	1141.000	27.72	-15.58	54.0	26.28	AV	5.00	150	Horizontal	Pass
2	2231.000	41.98	-13.09	74.0	32.02	Peak	355.00	150	Horizontal	Pass
2**	2231.000	30.37	-13.09	54.0	23.63	AV	355.00	150	Horizontal	Pass
3	3429.500	47.13	-5.02	74.0	26.87	Peak	360.00	150	Horizontal	Pass
3**	3429.500	36.42	-5.02	54.0	17.58	AV	360.00	150	Horizontal	Pass
4	5581.500	106.83	-2.85	74.0	-32.83	Peak	269.00	150	Horizontal	N/A
4**	5581.500	99.07	-2.85	54.0	-45.07	AV	269.00	150	Horizontal	N/A
5	9183.938	46.72	-5.35	74.0	27.28	Peak	112.00	150	Horizontal	Pass
5**	9183.938	35.31	-5.35	54.0	18.69	AV	112.00	150	Horizontal	Pass
6	16287.188	49.48	-1.38	74.0	24.52	Peak	143.00	150	Horizontal	Pass
6**	16287.188	38.62	-1.38	54.0	15.38	AV	143.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26080210

Test Time: 2026-08-23_21.32.27

EUT Name: Mobile Phone

Temp.(°C): 23.9

Model Number: KO2

Humidity (%RH): 49

Sample Number: CC26080161-001-S13

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11n40 CH118 P=19


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A03+数据线: A06

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

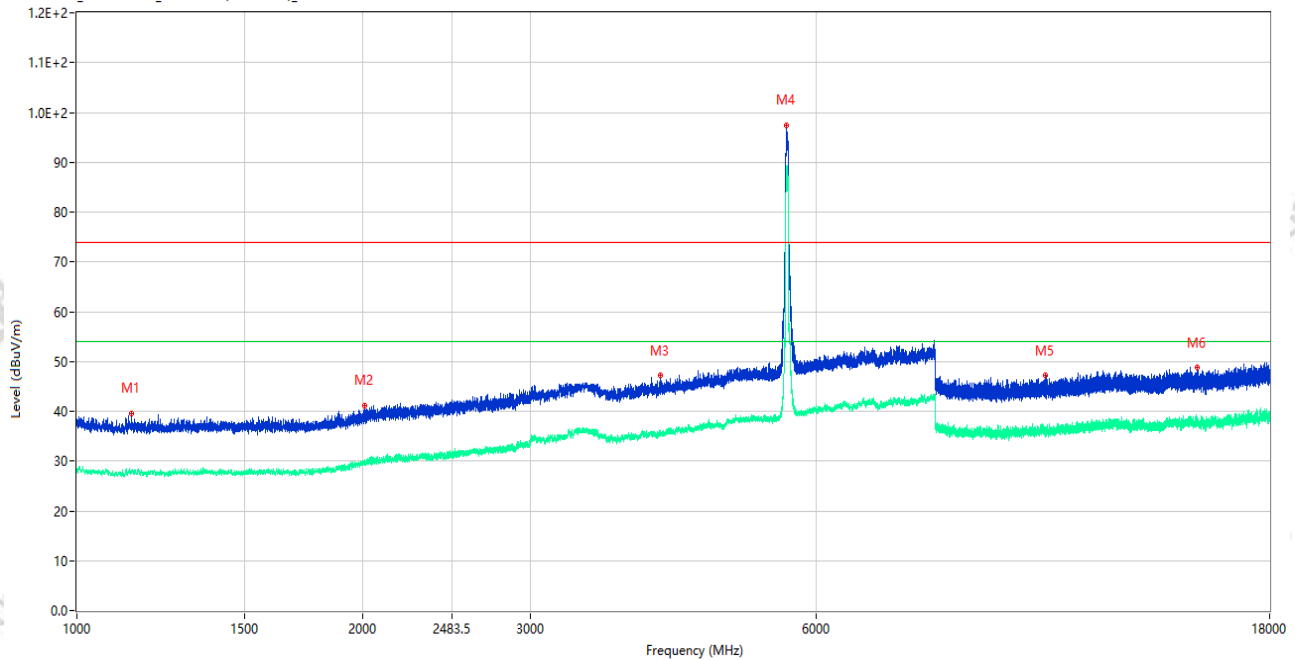

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1140.500	39.65	-15.59	74.0	34.35	Peak	241.00	150	Vertical	Pass
1**	1140.500	27.64	-15.59	54.0	26.36	AV	241.00	150	Vertical	Pass
2	2006.500	41.11	-14.22	74.0	32.89	Peak	66.00	150	Vertical	Pass
2**	2006.500	30.01	-14.22	54.0	23.99	AV	66.00	150	Vertical	Pass
3	4108.000	47.14	-4.34	74.0	26.86	Peak	225.00	150	Vertical	Pass
3**	4108.000	35.52	-4.34	54.0	18.48	AV	225.00	150	Vertical	Pass
4	5586.500	97.51	-2.81	74.0	-23.51	Peak	210.00	150	Vertical	N/A
4**	5586.500	89.01	-2.81	54.0	-35.01	AV	210.00	150	Vertical	N/A
5	10441.026	47.22	-3.33	74.0	26.78	Peak	38.00	150	Vertical	Pass
5**	10441.026	36.16	-3.33	54.0	17.84	AV	38.00	150	Vertical	Pass
6	15115.912	48.92	-2.35	74.0	25.08	Peak	64.00	150	Vertical	Pass
6**	15115.912	37.14	-2.35	54.0	16.86	AV	64.00	150	Vertical	Pass

Test Result

Project Number: P-CC26080210

Test Time: 2026-08-23_21.37.39

EUT Name: Mobile Phone

Temp.(°C): 23.9

Model Number: KO2

Humidity (%RH): 49

Sample Number: CC26080161-001-S13

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11n40 CH118 P=19


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A03+数据线: A06

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

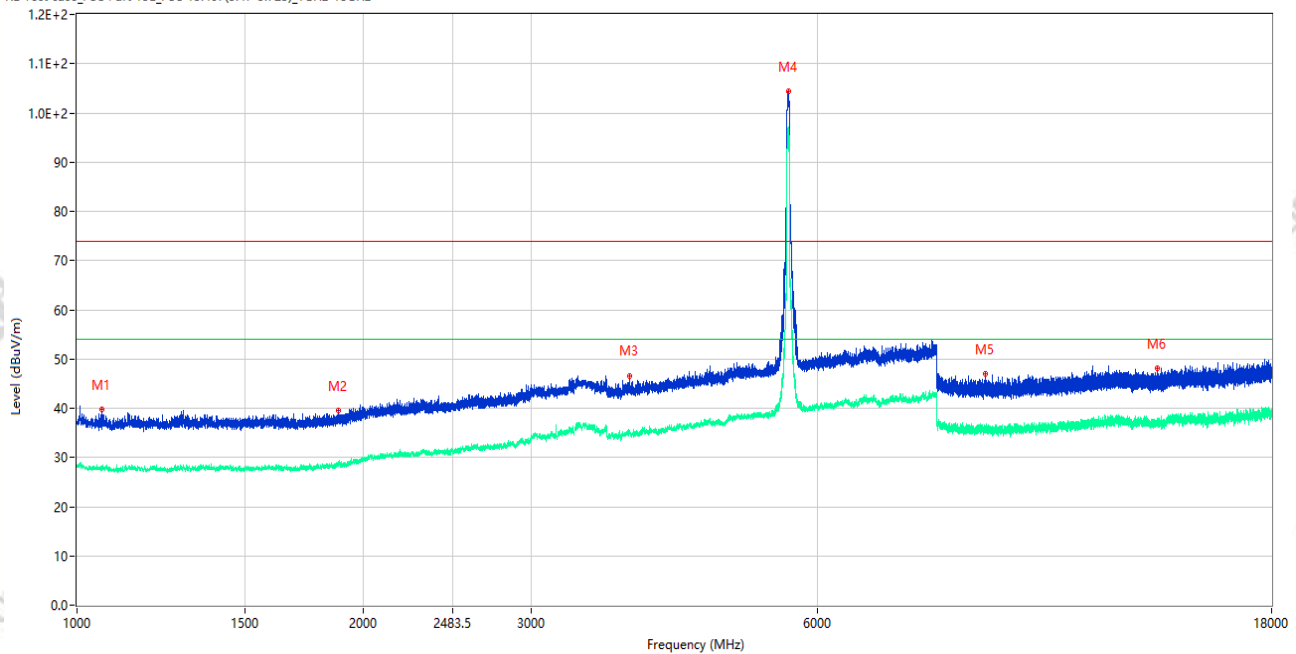

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1060.750	39.85	-15.27	74.0	34.15	Peak	160.00	150	Horizontal	Pass
1**	1060.750	27.62	-15.27	54.0	26.38	AV	160.00	150	Horizontal	Pass
2	1880.250	39.50	-15.35	74.0	34.50	Peak	300.00	150	Horizontal	Pass
2**	1880.250	28.51	-15.35	54.0	25.49	AV	300.00	150	Horizontal	Pass
3	3804.000	46.53	-4.38	74.0	27.47	Peak	120.00	150	Horizontal	Pass
3**	3804.000	34.92	-4.38	54.0	19.08	AV	120.00	150	Horizontal	Pass
4	5588.500	104.36	-2.79	74.0	-30.36	Peak	293.00	150	Horizontal	N/A
4**	5588.500	97.04	-2.79	54.0	-43.04	AV	293.00	150	Horizontal	N/A
5	9004.862	46.98	-4.57	74.0	27.02	Peak	232.00	150	Horizontal	Pass
5**	9004.862	35.68	-4.57	54.0	18.32	AV	232.00	150	Horizontal	Pass
6	13663.500	48.02	-2.48	74.0	25.98	Peak	114.00	150	Horizontal	Pass
6**	13663.500	36.76	-2.48	54.0	17.24	AV	114.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26080210

Test Time: 2026-08-23_22.06.22

EUT Name: Mobile Phone

Temp.(°C): 23.9

Model Number: KO2

Humidity (%RH): 49

Sample Number: CC26080161-001-S13

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11ac80 CH106 P=19


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A03+数据线: A06

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

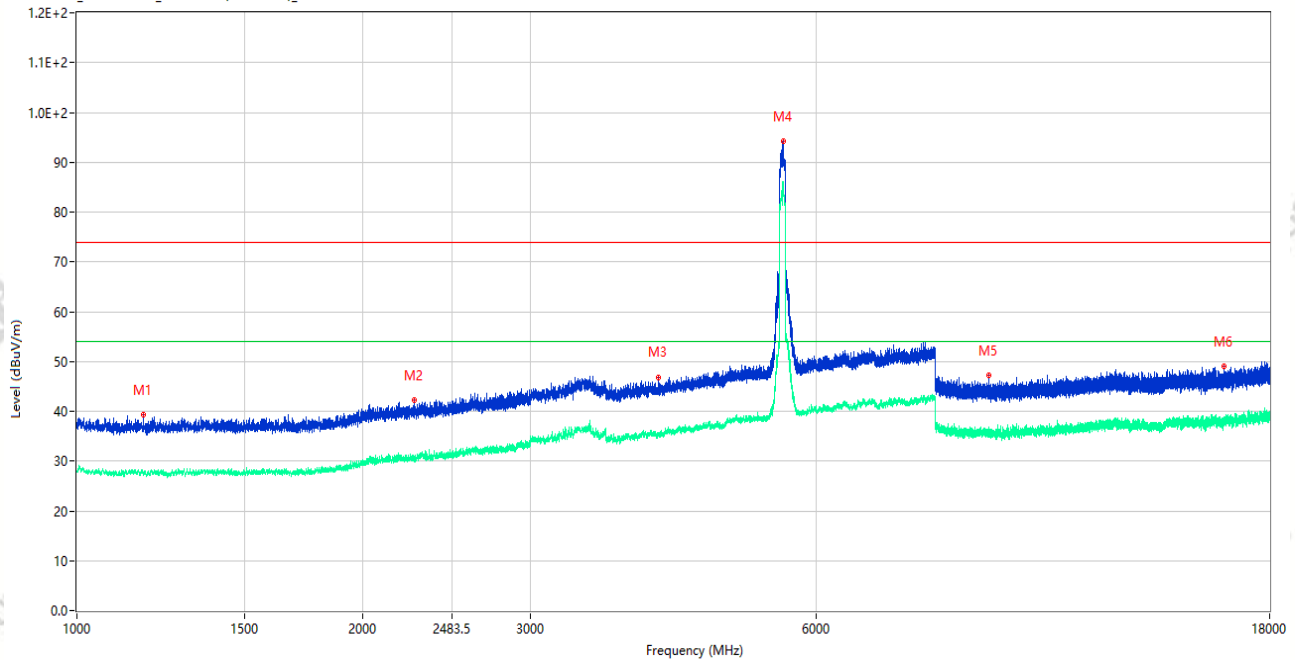

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1174.250	39.38	-15.62	74.0	34.62	Peak	0.00	150	Vertical	Pass
1**	1174.250	27.30	-15.62	54.0	26.70	AV	0.00	150	Vertical	Pass
2	2266.500	42.22	-13.21	74.0	31.78	Peak	88.00	150	Vertical	Pass
2**	2266.500	30.09	-13.21	54.0	23.91	AV	88.00	150	Vertical	Pass
3	4091.000	46.89	-4.93	74.0	27.11	Peak	305.00	150	Vertical	Pass
3**	4091.000	35.04	-4.93	54.0	18.96	AV	305.00	150	Vertical	Pass
4	5536.500	94.18	-2.64	74.0	-20.18	Peak	51.00	150	Vertical	N/A
4**	5536.500	84.12	-2.64	54.0	-30.12	AV	51.00	150	Vertical	N/A
5	9106.513	47.24	-4.97	74.0	26.76	Peak	0.00	150	Vertical	Pass
5**	9106.513	35.61	-4.97	54.0	18.39	AV	0.00	150	Vertical	Pass
6	16113.937	49.00	-1.47	74.0	25.00	Peak	144.00	150	Vertical	Pass
6**	16113.937	38.19	-1.47	54.0	15.81	AV	144.00	150	Vertical	Pass

Test Result

Project Number: P-CC26080210

Test Time: 2026-08-23_22.01.55

EUT Name: Mobile Phone

Temp.(°C): 23.9

Model Number: KO2

Humidity (%RH): 49

Sample Number: CC26080161-001-S13

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11ac80 CH106 P=19


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A03+数据线: A06

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

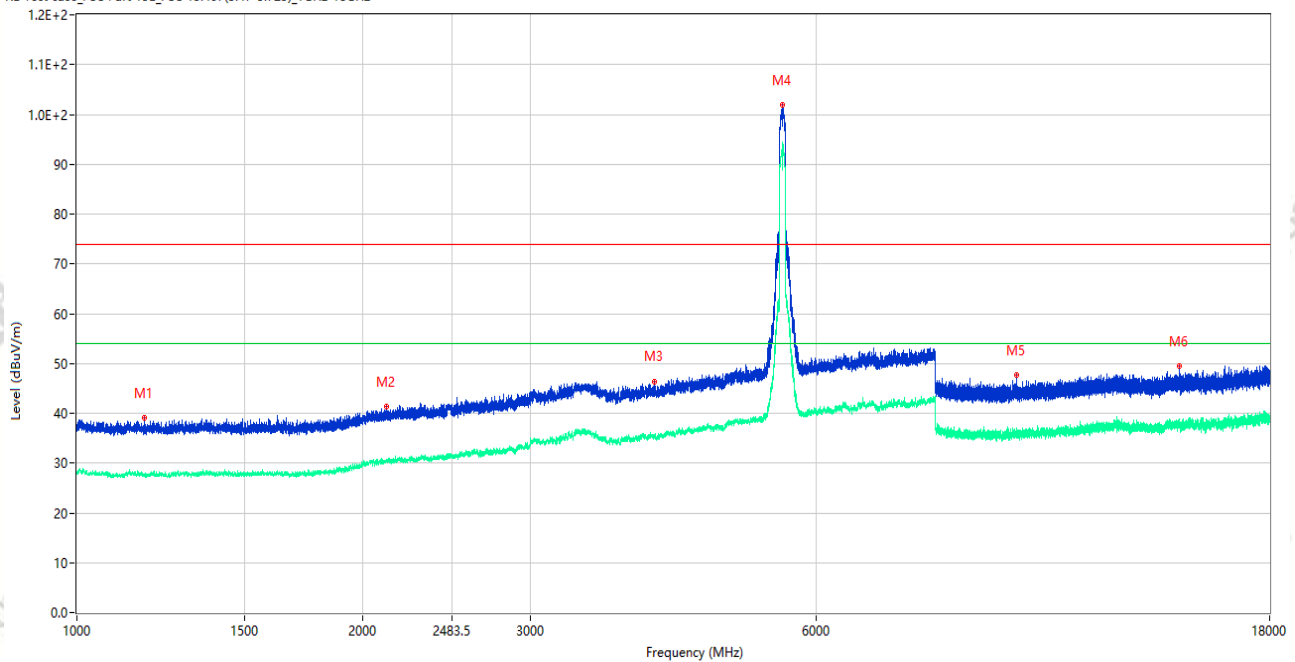

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1178.000	39.15	-15.72	74.0	34.85	Peak	27.00	150	Horizontal	Pass
1**	1178.000	27.59	-15.72	54.0	26.41	AV	27.00	150	Horizontal	Pass
2	2116.500	41.30	-13.46	74.0	32.70	Peak	178.00	150	Horizontal	Pass
2**	2116.500	30.75	-13.46	54.0	23.25	AV	178.00	150	Horizontal	Pass
3	4049.000	46.28	-4.17	74.0	27.72	Peak	360.00	150	Horizontal	Pass
3**	4049.000	35.36	-4.17	54.0	18.64	AV	360.00	150	Horizontal	Pass
4	5525.000	101.85	-2.44	74.0	-27.85	Peak	246.00	150	Horizontal	N/A
4**	5525.000	93.52	-2.44	54.0	-39.52	AV	246.00	150	Horizontal	N/A
5	9739.924	47.66	-3.95	74.0	26.34	Peak	0.00	150	Horizontal	Pass
5**	9739.924	35.71	-3.95	54.0	18.29	AV	0.00	150	Horizontal	Pass
6	14460.188	49.43	-2.64	74.0	24.57	Peak	297.00	150	Horizontal	Pass
6**	14460.188	38.37	-2.64	54.0	15.63	AV	297.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26080210

Test Time: 2026-08-24_15.41.49

EUT Name: Mobile Phone

Temp.(°C): 23.9

Model Number: KO2

Humidity (%RH): 49

Sample Number: CC26080161-001-S13

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11a CH157 P=18


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A03+数据线: A06

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

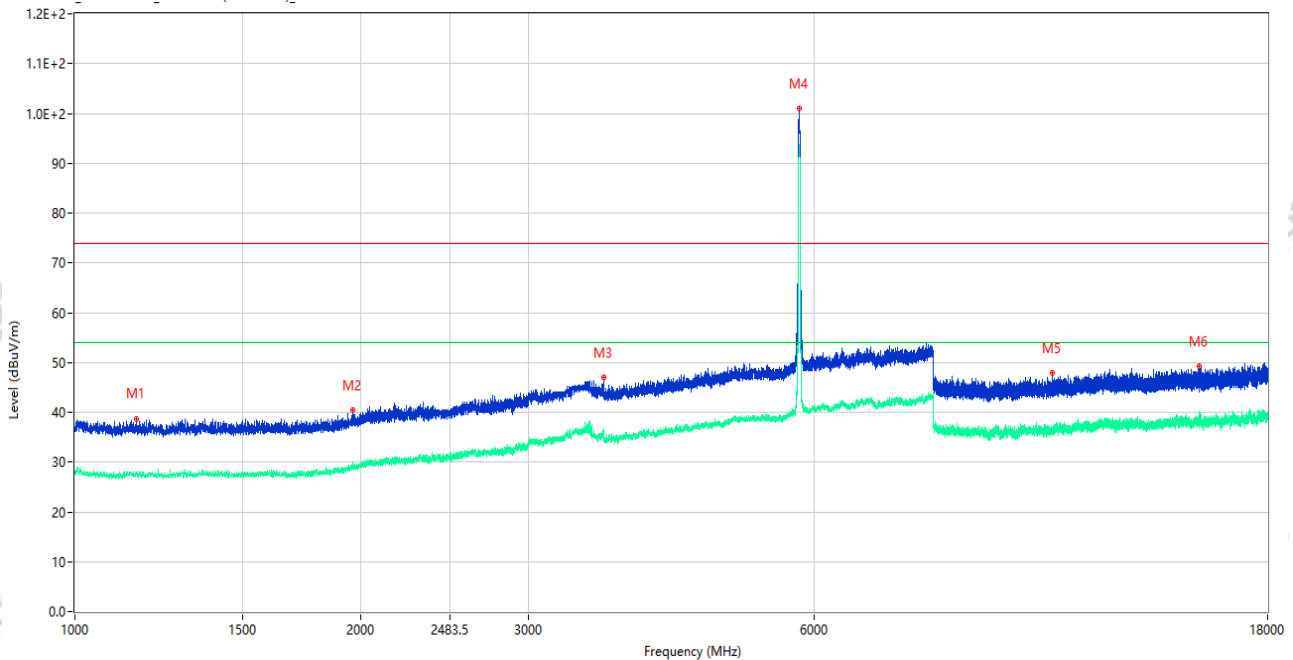

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1160.250	38.76	-15.49	74.0	35.24	Peak	360.00	150	Vertical	Pass
1**	1160.250	28.05	-15.49	54.0	25.95	AV	360.00	150	Vertical	Pass
2	1959.750	40.40	-14.97	74.0	33.60	Peak	113.00	150	Vertical	Pass
2**	1959.750	29.38	-14.97	54.0	24.62	AV	113.00	150	Vertical	Pass
3	3599.000	46.94	-5.03	74.0	27.06	Peak	358.00	150	Vertical	Pass
3**	3599.000	36.34	-5.03	54.0	17.66	AV	358.00	150	Vertical	Pass
4	5786.500	100.93	-1.53	74.0	-26.93	Peak	204.00	150	Vertical	N/A
4**	5786.500	93.72	-1.53	54.0	-39.72	AV	204.00	150	Vertical	N/A
5	10679.238	47.93	-4.17	74.0	26.07	Peak	354.00	150	Vertical	Pass
5**	10679.238	35.74	-4.17	54.0	18.26	AV	354.00	150	Vertical	Pass
6	15258.713	49.32	-1.00	74.0	24.68	Peak	0.00	150	Vertical	Pass
6**	15258.713	38.84	-1.00	54.0	15.16	AV	0.00	150	Vertical	Pass

Test Result

Project Number: P-CC26080210

Test Time: 2026-08-24_15.36.36

EUT Name: Mobile Phone

Temp.(°C): 23.9

Model Number: KO2

Humidity (%RH): 49

Sample Number: CC26080161-001-S13

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11a CH157 P=18


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A03+数据线: A06

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

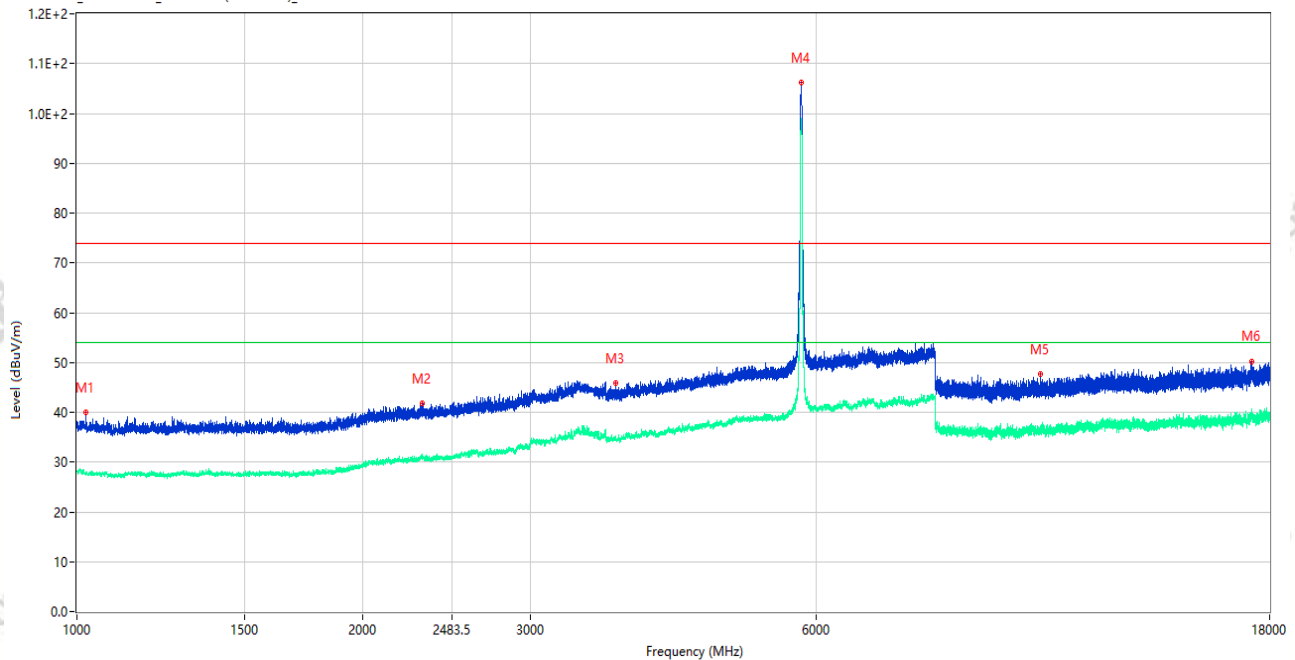

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1022.250	39.96	-15.28	74.0	34.04	Peak	8.00	150	Horizontal	Pass
1**	1022.250	27.64	-15.28	54.0	26.36	AV	8.00	150	Horizontal	Pass
2	2311.000	41.83	-12.46	74.0	32.17	Peak	76.00	150	Horizontal	Pass
2**	2311.000	30.97	-12.46	54.0	23.03	AV	76.00	150	Horizontal	Pass
3	3694.500	45.92	-5.82	74.0	28.08	Peak	47.00	150	Horizontal	Pass
3**	3694.500	34.44	-5.82	54.0	19.56	AV	47.00	150	Horizontal	Pass
4	5786.000	106.22	-1.53	74.0	-32.22	Peak	240.00	150	Horizontal	N/A
4**	5786.000	98.35	-1.53	54.0	-44.35	AV	240.00	150	Horizontal	N/A
5	10319.662	47.74	-3.21	74.0	26.26	Peak	197.00	150	Horizontal	Pass
5**	10319.662	36.36	-3.21	54.0	17.64	AV	197.00	150	Horizontal	Pass
6	17255.813	50.26	-0.97	74.0	23.74	Peak	360.00	150	Horizontal	Pass
6**	17255.813	39.52	-0.97	54.0	14.48	AV	360.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26080210

Test Time: 2026-08-24_15.59.40

EUT Name: Mobile Phone

Temp.(°C): 23.9

Model Number: KO2

Humidity (%RH): 49

Sample Number: CC26080161-001-S13

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11ac20 CH157 P=19


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A03+数据线: A06

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

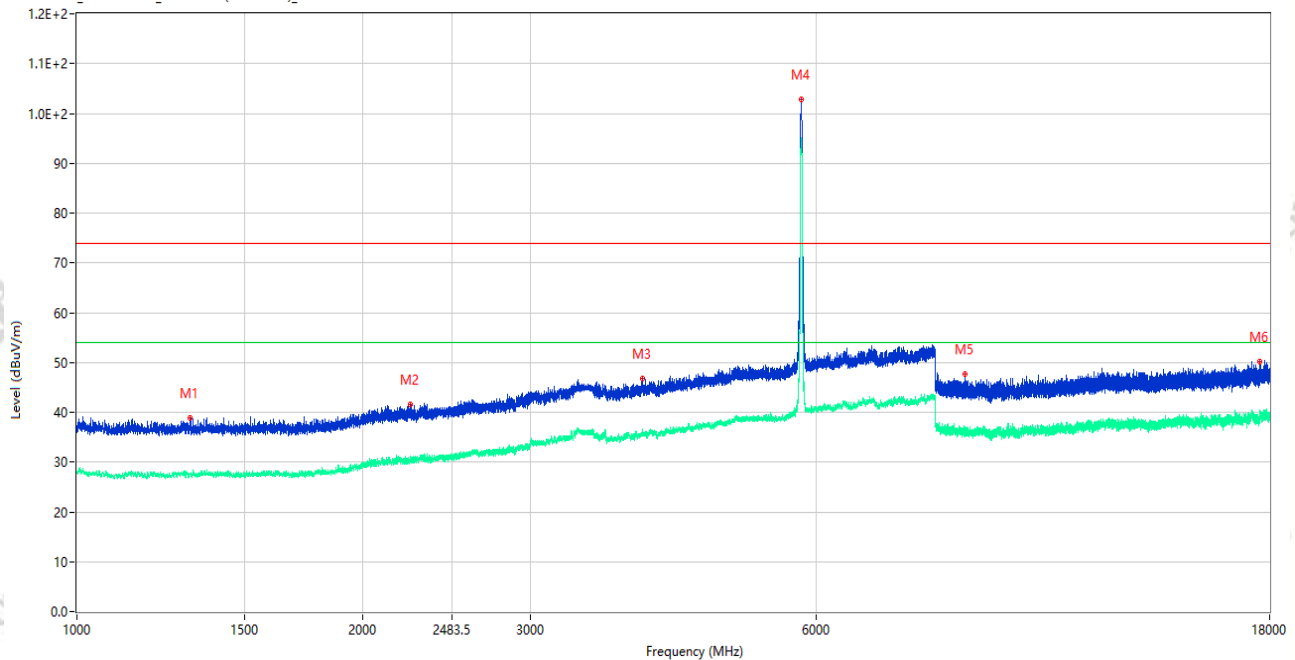

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1315.000	38.90	-15.88	74.0	35.10	Peak	292.00	150	Vertical	Pass
1**	1315.000	27.58	-15.88	54.0	26.42	AV	292.00	150	Vertical	Pass
2	2242.500	41.60	-12.92	74.0	32.40	Peak	198.00	150	Vertical	Pass
2**	2242.500	30.59	-12.92	54.0	23.41	AV	198.00	150	Vertical	Pass
3	3942.500	46.89	-4.22	74.0	27.11	Peak	122.00	150	Vertical	Pass
3**	3942.500	35.60	-4.22	54.0	18.40	AV	122.00	150	Vertical	Pass
4	5786.000	102.80	-1.53	74.0	-28.80	Peak	204.00	150	Vertical	N/A
4**	5786.000	94.87	-1.53	54.0	-40.87	AV	204.00	150	Vertical	N/A
5	8594.700	47.70	-4.83	74.0	26.30	Peak	213.00	150	Vertical	Pass
5**	8594.700	37.01	-4.83	54.0	16.99	AV	213.00	150	Vertical	Pass
6	17591.026	50.12	0.67	74.0	23.88	Peak	89.00	150	Vertical	Pass
6**	17591.026	39.47	0.67	54.0	14.53	AV	89.00	150	Vertical	Pass

Test Result

Project Number: P-CC26080210

Test Time: 2026-08-24_16.04.24

EUT Name: Mobile Phone

Temp.(°C): 23.9

Model Number: KO2

Humidity (%RH): 49

Sample Number: CC26080161-001-S13

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11ac20 CH157 P=19


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A03+数据线: A06

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

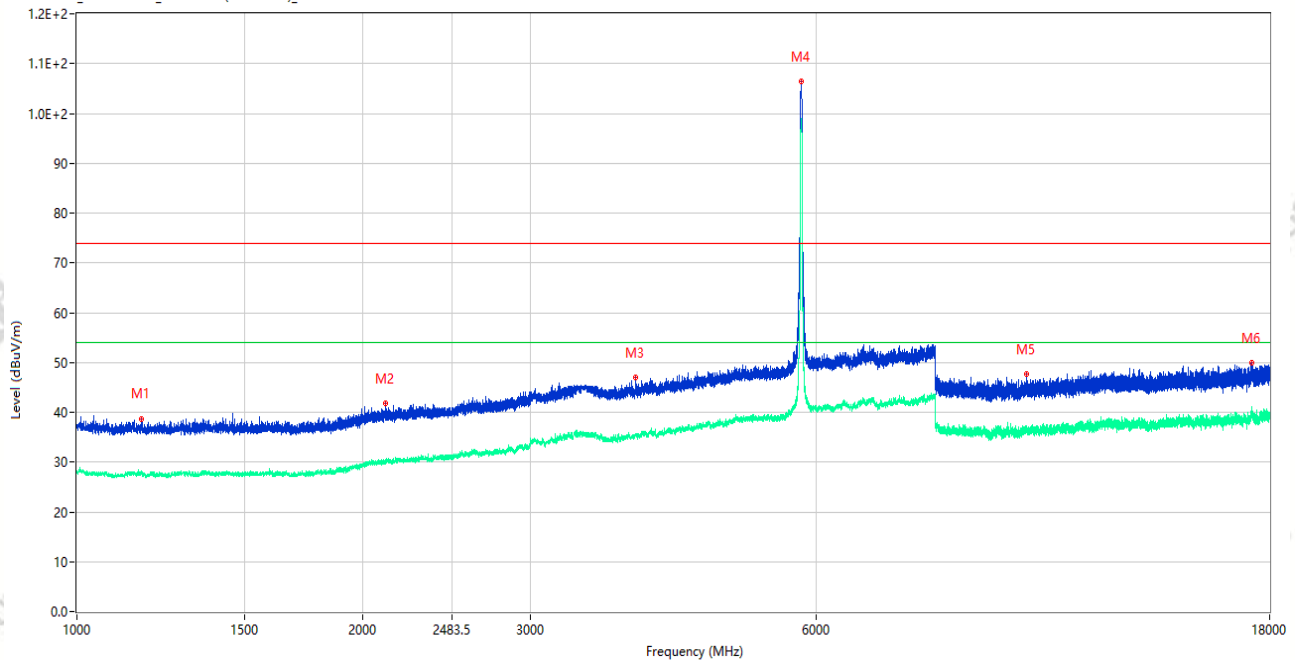

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1169.500	38.75	-15.51	74.0	35.25	Peak	59.00	150	Horizontal	Pass
1**	1169.500	27.66	-15.51	54.0	26.34	AV	59.00	150	Horizontal	Pass
2	2111.500	41.74	-13.60	74.0	32.26	Peak	320.00	150	Horizontal	Pass
2**	2111.500	29.60	-13.60	54.0	24.40	AV	320.00	150	Horizontal	Pass
3	3874.500	47.05	-4.92	74.0	26.95	Peak	138.00	150	Horizontal	Pass
3**	3874.500	35.80	-4.92	54.0	18.20	AV	138.00	150	Horizontal	Pass
4	5782.500	106.44	-1.53	74.0	-32.44	Peak	242.00	150	Horizontal	N/A
4**	5782.500	98.61	-1.53	54.0	-44.61	AV	242.00	150	Horizontal	N/A
5	9993.575	47.59	-3.82	74.0	26.41	Peak	360.00	150	Horizontal	Pass
5**	9993.575	36.14	-3.82	54.0	17.86	AV	360.00	150	Horizontal	Pass
6	17226.412	49.84	-0.58	74.0	24.16	Peak	216.00	150	Horizontal	Pass
6**	17226.412	39.46	-0.58	54.0	14.54	AV	216.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26080210

Test Time: 2026-08-24_16.26.45

EUT Name: Mobile Phone

Temp.(°C): 23.9

Model Number: KO2

Humidity (%RH): 49

Sample Number: CC26080161-001-S13

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11ac40 CH151 P=19


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A03+数据线: A06

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

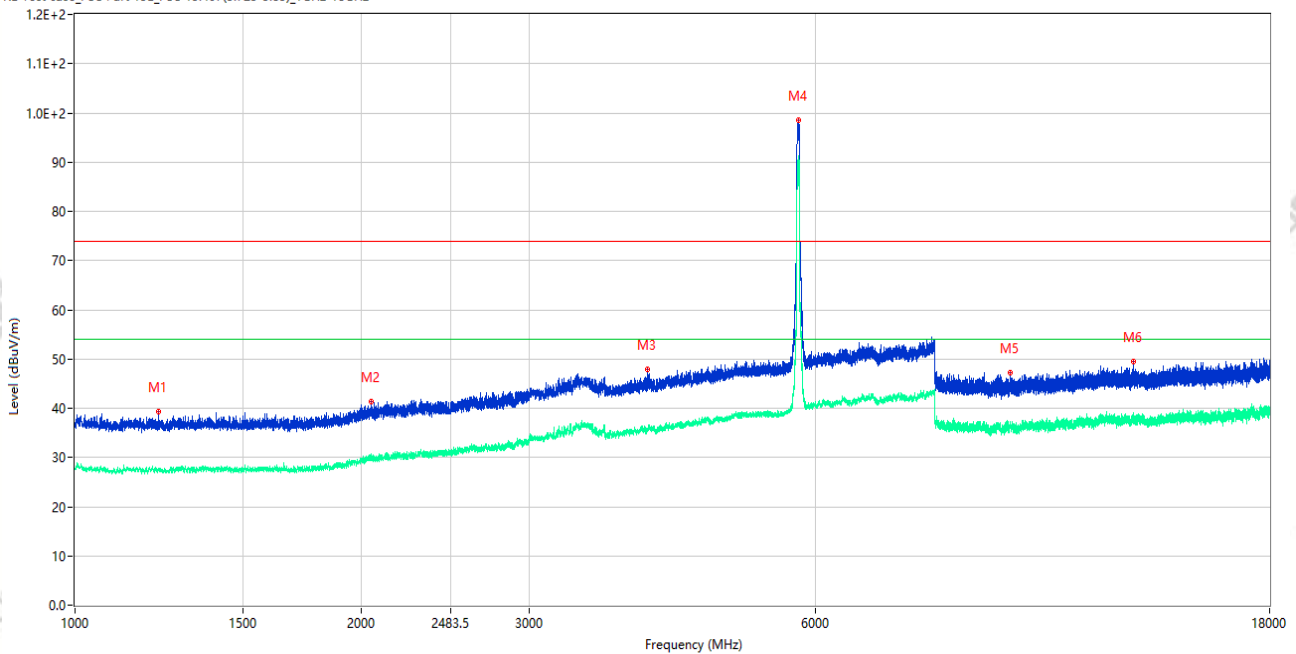

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1222.750	39.24	-15.97	74.0	34.76	Peak	360.00	150	Vertical	Pass
1**	1222.750	27.90	-15.97	54.0	26.10	AV	360.00	150	Vertical	Pass
2	2045.250	41.27	-13.43	74.0	32.73	Peak	360.00	150	Vertical	Pass
2**	2045.250	30.51	-13.43	54.0	23.49	AV	360.00	150	Vertical	Pass
3	3997.000	47.83	-4.80	74.0	26.17	Peak	298.00	150	Vertical	Pass
3**	3997.000	35.79	-4.80	54.0	18.21	AV	298.00	150	Vertical	Pass
4	5753.000	98.62	-2.09	74.0	-24.62	Peak	208.00	150	Vertical	N/A
4**	5753.000	90.45	-2.09	54.0	-36.45	AV	208.00	150	Vertical	N/A
5	9618.326	47.20	-3.63	74.0	26.80	Peak	179.00	150	Vertical	Pass
5**	9618.326	37.32	-3.63	54.0	16.68	AV	179.00	150	Vertical	Pass
6	12937.162	49.45	-1.94	74.0	24.55	Peak	115.00	150	Vertical	Pass
6**	12937.162	38.19	-1.94	54.0	15.81	AV	115.00	150	Vertical	Pass

Test Result

Project Number: P-CC26080210

Test Time: 2026-08-24_16.31.43

EUT Name: Mobile Phone

Temp.(°C): 23.9

Model Number: KO2

Humidity (%RH): 49

Sample Number: CC26080161-001-S13

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11ac40 CH151 P=19


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A03+数据线: A06

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

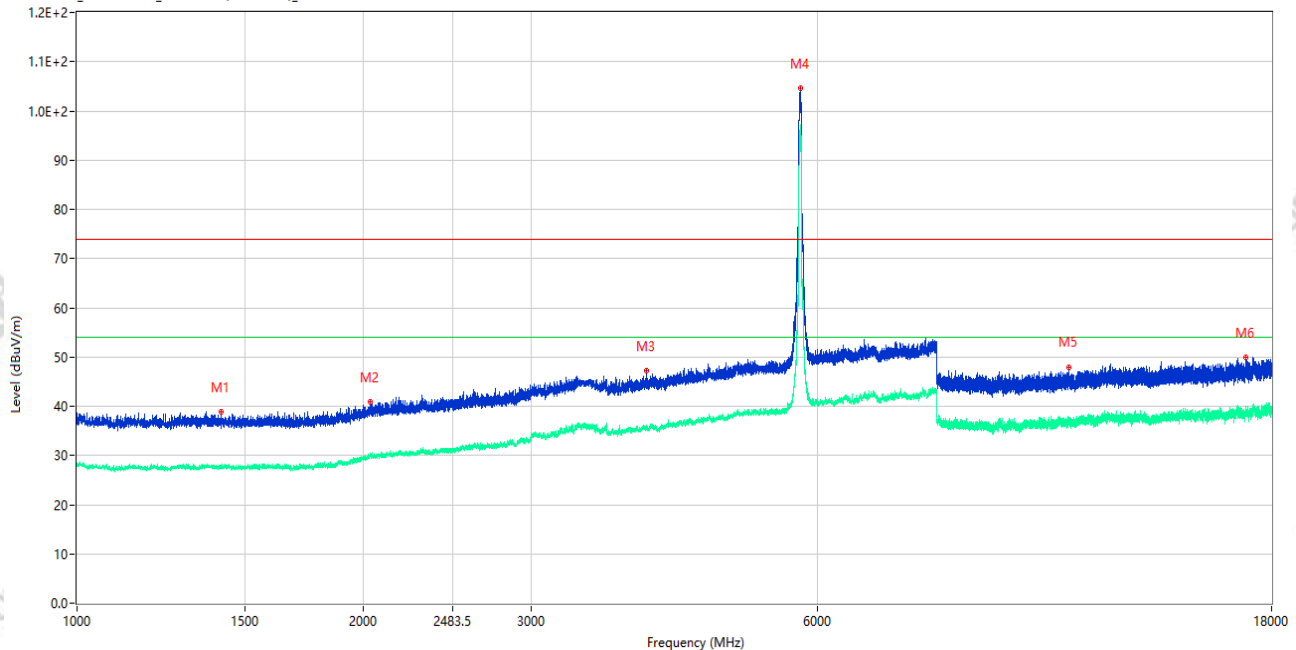

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1416.500	38.90	-15.95	74.0	35.10	Peak	57.00	150	Horizontal	Pass
1**	1416.500	27.32	-15.95	54.0	26.68	AV	57.00	150	Horizontal	Pass
2	2032.500	40.92	-13.47	74.0	33.08	Peak	195.00	150	Horizontal	Pass
2**	2032.500	30.19	-13.47	54.0	23.81	AV	195.00	150	Horizontal	Pass
3	3967.000	47.29	-3.86	74.0	26.71	Peak	349.00	150	Horizontal	Pass
3**	3967.000	36.08	-3.86	54.0	17.92	AV	349.00	150	Horizontal	Pass
4	5753.000	104.63	-2.09	74.0	-30.63	Peak	233.00	150	Horizontal	N/A
4**	5753.000	96.67	-2.09	54.0	-42.67	AV	233.00	150	Horizontal	N/A
5	11009.362	48.00	-3.21	74.0	26.00	Peak	267.00	150	Horizontal	Pass
5**	11009.362	37.17	-3.21	54.0	16.83	AV	267.00	150	Horizontal	Pass
6	16896.450	49.98	-0.56	74.0	24.02	Peak	39.00	150	Horizontal	Pass
6**	16896.450	38.83	-0.56	54.0	15.17	AV	39.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26080210

Test Time: 2026-08-24_17.02.55

EUT Name: Mobile Phone

Temp.(°C): 23.9

Model Number: KO2

Humidity (%RH): 49

Sample Number: CC26080161-001-S13

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11ac80 CH155 P=19


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A03+数据线: A06

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

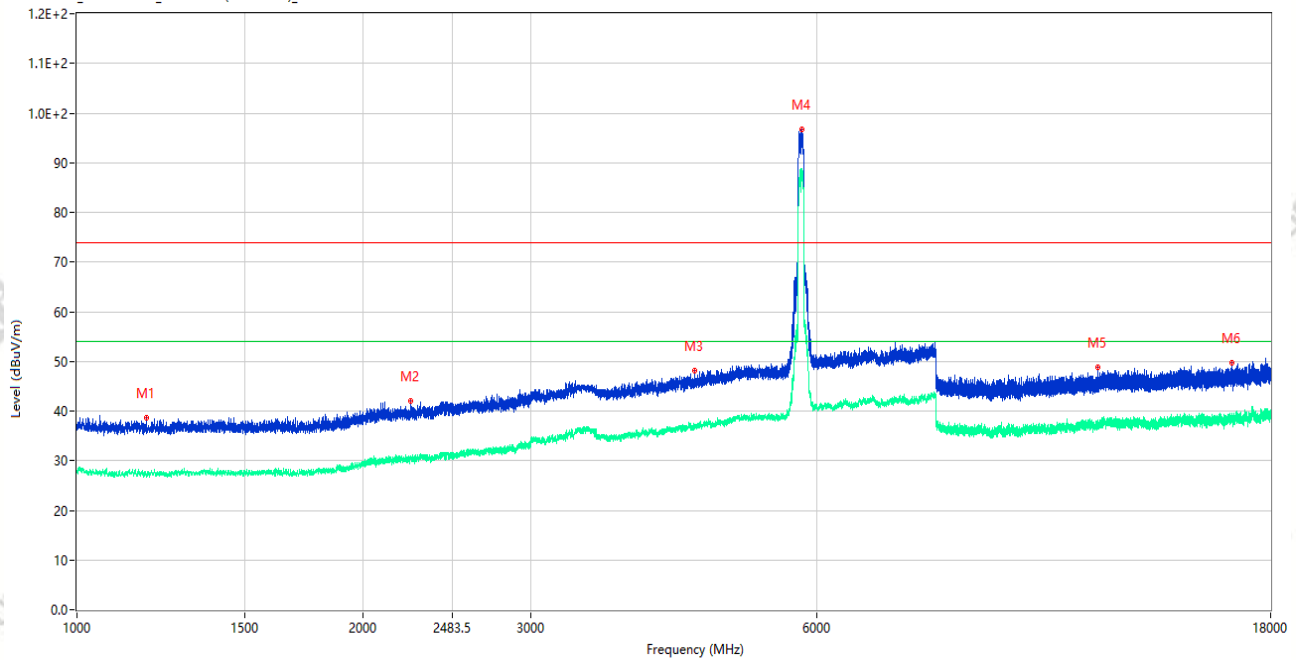

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1182.000	38.57	-15.83	74.0	35.43	Peak	342.00	150	Vertical	Pass
1**	1182.000	27.12	-15.83	54.0	26.88	AV	342.00	150	Vertical	Pass
2	2245.500	42.09	-12.83	74.0	31.91	Peak	55.00	150	Vertical	Pass
2**	2245.500	30.29	-12.83	54.0	23.71	AV	55.00	150	Vertical	Pass
3	4462.000	48.04	-3.58	74.0	25.96	Peak	340.00	150	Vertical	Pass
3**	4462.000	36.98	-3.58	54.0	17.02	AV	340.00	150	Vertical	Pass
4	5788.500	96.72	-1.55	74.0	-22.72	Peak	207.00	150	Vertical	N/A
4**	5788.500	86.93	-1.55	54.0	-32.93	AV	207.00	150	Vertical	N/A
5	11840.137	48.86	-3.40	74.0	25.14	Peak	301.00	150	Vertical	Pass
5**	11840.137	37.63	-3.40	54.0	16.37	AV	301.00	150	Vertical	Pass
6	16394.025	49.77	-1.11	74.0	24.23	Peak	0.00	150	Vertical	Pass
6**	16394.025	38.82	-1.11	54.0	15.18	AV	0.00	150	Vertical	Pass

Test Result

Project Number: P-CC26080210

Test Time: 2026-08-24_16.56.30

EUT Name: Mobile Phone

Temp.(°C): 23.9

Model Number: KO2

Humidity (%RH): 49

Sample Number: CC26080161-001-S13

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11ac80 CH155 P=19


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhou Xu

Remark: 适配器: A03+数据线: A06

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

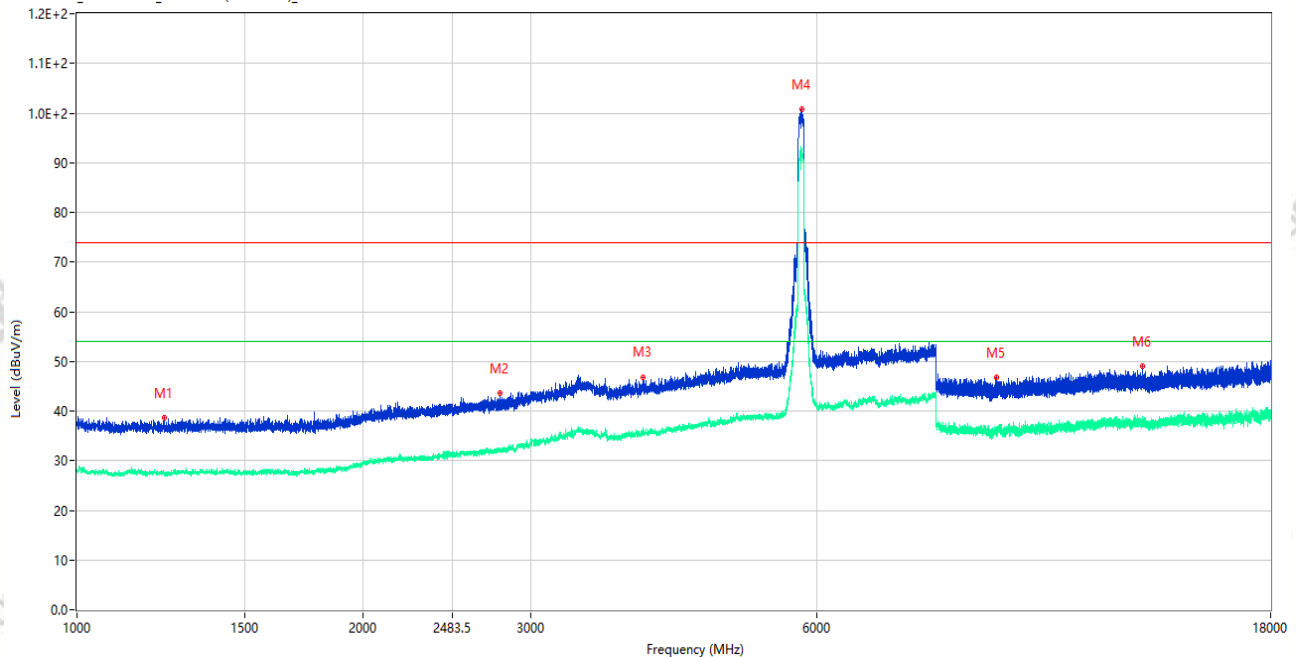

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1235.000	38.58	-16.00	74.0	35.42	Peak	312.00	150	Horizontal	Pass
1**	1235.000	27.56	-16.00	54.0	26.44	AV	312.00	150	Horizontal	Pass
2	2785.500	43.67	-9.69	74.0	30.33	Peak	70.00	150	Horizontal	Pass
2**	2785.500	32.02	-9.69	54.0	21.98	AV	70.00	150	Horizontal	Pass
3	3937.500	46.73	-3.85	74.0	27.27	Peak	160.00	150	Horizontal	Pass
3**	3937.500	36.51	-3.85	54.0	17.49	AV	160.00	150	Horizontal	Pass
4	5780.000	100.78	-1.51	74.0	-26.78	Peak	250.00	150	Horizontal	N/A
4**	5780.000	92.66	-1.51	54.0	-38.66	AV	250.00	150	Horizontal	N/A
5	9268.487	46.68	-5.18	74.0	27.32	Peak	230.00	150	Horizontal	Pass
5**	9268.487	36.79	-5.18	54.0	17.21	AV	230.00	150	Horizontal	Pass
6	13211.737	49.09	-2.36	74.0	24.91	Peak	342.00	150	Horizontal	Pass
6**	13211.737	38.04	-2.36	54.0	15.96	AV	342.00	150	Horizontal	Pass