
FCC Test Report

Report No.: AGC00653150401FE03

FCC ID : 2AEM6BT840
APPLICATION PURPOSE : Original Equipment
PRODUCT DESIGNATION : tablet pc
BRAND NAME : bleytec
MODEL NAME : BT-840
CLIENT : MOVEON TECHNOLOGY (HK) CO., LTD.
DATE OF ISSUE : May.05,2015
STANDARD(S) : FCC Part 15 Rules
TEST PROCEDURE(S) : DA 00-705
REPORT VERSION : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	May.05,2015	Valid	Original Report

TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	5
2. GENERAL INFORMATION	6
2.1. PRODUCT DESCRIPTION.....	6
2.2. TABLE OF CARRIER FREQUENCIES.....	6
2.3. RECEIVER INPUT BANDWIDTH	7
2.4. EXAMPLE OF A HOPPING SEQUENCY IN DATA MODE	7
2.5. EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR	7
2.6. RELATED SUBMITTAL(S) / GRANT (S).....	8
2.7. TEST METHODOLOGY.....	8
2.8. SPECIAL ACCESSORIES	8
2.9. EQUIPMENT MODIFICATIONS	8
3. MEASUREMENT UNCERTAINTY.....	9
4. DESCRIPTION OF TEST MODES.....	9
5. SYSTEM TEST CONFIGURATION	10
5.1. CONFIGURATION OF EUT SYSTEM	10
5.2. EQUIPMENT USED IN EUT SYSTEM	10
5.3. SUMMARY OF TEST RESULTS	10
6. TEST FACILITY	11
7. PEAK OUTPUT POWER	13
7.1. MEASUREMENT PROCEDURE	13
7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	13
7.3. LIMITS AND MEASUREMENT RESULT	14
8. 20DB BANDWIDTH.....	18
8.1. MEASUREMENT PROCEDURE	18
8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	18
8.3. LIMITS AND MEASUREMENT RESULTS.....	18
9. CONDUCTED SPURIOUS EMISSION	19
9.1. MEASUREMENT PROCEDURE	22
9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	22
9.3. MEASUREMENT EQUIPMENT USED.....	22
9.4. LIMITS AND MEASUREMENT RESULT	22
10. RADIATED EMISSION	41
10.1. MEASUREMENT PROCEDURE	41
10.2. TEST SETUP	43

10.3. TEST RESULT	44
11. BAND EDGE EMISSION	51
11.1. MEASUREMENT PROCEDURE	51
11.2. TEST SET-UP	51
11.3. Radiated TEST RESULT	52
11.4 Conducted TEST RESULT	53
12. NUMBER OF HOPPING FREQUENCY.....	57
12.1. MEASUREMENT PROCEDURE	57
12.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION).....	57
12.3. MEASUREMENT EQUIPMENT USED	57
12.4. LIMITS AND MEASUREMENT RESULT	57
13. TIME OF OCCUPANCY (DWELL TIME)	58
13.1. MEASUREMENT PROCEDURE	58
13.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION).....	58
13.3. MEASUREMENT EQUIPMENT USED	58
13.4. LIMITS AND MEASUREMENT RESULT	58
14. FREQUENCY SEPARATION	60
14.1. MEASUREMENT PROCEDURE	60
14.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION).....	60
14.3. MEASUREMENT EQUIPMENT USED	60
14.4. LIMITS AND MEASUREMENT RESULT	60
15. FCC LINE CONDUCTED EMISSION TEST	61
15.1. LIMITS OF LINE CONDUCTED EMISSION TEST	61
15.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	61
15.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	62
15.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	62
15.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	63
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	65
APPENDIX B: PHOTOGRAPHS OF EUT	66

1. VERIFICATION OF CONFORMITY

Applicant	MOVEON TECHNOLOGY (HK) CO., LTD.
Address	Room 3201, Building A, World Trading Plaza Block, Futian Rd., Futian Distric, Shenzhen, China
Manufacturer	MOVEON TECHNOLOGY (HK) CO., LTD.
Address	Room 3201, Building A, World Trading Plaza Block, Futian Rd., Futian Distric, Shenzhen, China
Product Designation	tablet pc
Brand Name	bleytec
Test Model	BT-840
Date of test	Apr.27,2015 to May.04,2015
Deviation	None
Condition of Test Sample	Normal
Report Template	AGCRT-US-BR/RF

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2003) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.247.

Prepared By

Matt Zhang

Matt Zhang

May.05,2015

Checked By

Kidd Yang

Kidd Yang

May.05,2015

Authorized By

Solger Zhang

Solger Zhang

May.05,2015

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

The EUT is “tablet pc” designed as a “Communication Device”. It is designed by way of utilizing the FHSS technology to achieve the system operation.

A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480GHz
RF Output Power	5.37dBm(Max)
Bluetooth Version	V 3.0
Modulation	GFSK, $\pi/4$ -DQPSK, 8DPSK
Number of channels	79
Hardware Version	M706P-MB-V2.0
Software Version	MT6571-M706P-KK-WVGA@2015-01-17-11-48
Antenna Designation	Integrated Antenna
Antenna Gain	1.0dBi
Power Supply	DC3.7V by Battery

2.2. TABLE OF CARRIER FREQUENCIES

Frequency Band	Channel Number	Frequency
2400~2483.5MHZ	0	2402MHZ
	1	2403MHZ
	:	:
	38	2440 MHZ
	39	2441 MHZ
	40	2442 MHZ
	:	:
	77	2479 MHZ
	78	2480 MHZ

2.3. RECEIVER INPUT BANDWIDTH

The input bandwidth of the receiver is 1.3MHz. In every connection one Bluetooth device is the master and the other one is slave. The master determines the hopping sequence. The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master. Additionally the type of connection (e.g. single or multislotted packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also the slave of the connection will use these settings.

Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be sent on the same frequency, it is sent on the next frequency of the hopping sequence.

2.4. EXAMPLE OF A HOPPING SEQUENCE IN DATA MODE

Example of a 79 hopping sequence in data mode:

40,21,44,23,42,53,46,55,48,33,52,35,50,65,54,67
56,37,60,39,58,69,62,71,64,25,68,27,66,57,70,59
72,29,76,31,74,61,78,63,01,41,05,43,03,73,07,75
09,45,13,47,11,77,15,00,64,49,66,53,68,02,70,06
01, 51, 03, 55, 05, 04

2.5. EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR

The generation of the hopping sequence in connection mode depends essentially on two input values:

1. LAP/UAP of the master of the connection.
2. Internal master clock

The LAP (lower address part) are the 24 LSB's of the 48 BD_ADDRESS. The BD_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP (upper address part) are the 24 MSB's of the 48 BD_ADDRESS.

The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and is never turned off. For synchronization with other units only offset are used. It has no relation to the time of the day. Its resolution is at least half the RX/TX slot length of 312.5µs. The clock has a cycle of about one day (23h30). In most cases it is implemented as 28 bit counter. For the deriving of the hopping sequence the entire LAP (24 bits), 4 LSB's (4 bits) (Input 1) and the 27 MSB's of the clock (Input 2) are used. With these input values different mathematical procedures (permutations, additions, XOR-operations) are performed to generate the Sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions the Bluetooth system has the following behavior:

The first connection between the two devices is established, a hopping sequence was generated. For transmitting the wanted data the complete hopping sequence was not used. The connection ended.

The second connection will be established. A new hopping sequence is generated. Due to the fact the Bluetooth clock has a different value, because the period between the two transmissions is longer (and it cannot be shorter) than the minimum resolution of the clock (312.5µs). The hopping sequence will always differ from the first one.

2.6. RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2AEM6BT840** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

2.7. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in FCC DA 00-705. Radiated testing was performed at an antenna to EUT distance 3 meters.

2.8. SPECIAL ACCESSORIES

Refer to section 5.2.

2.9. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

3. MEASUREMENT UNCERTAINTY

Conducted measurement: +/- 2.75dB

Radiated measurement: +/- 3.2dB


4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel GFSK
2	Middle channel GFSK
3	High channel GFSK
4	Low channel $\pi/4$ -DQPSK
5	Middle channel $\pi/4$ -DQPSK
6	High channel $\pi/4$ -DQPSK
7	Low channel 8DPSK
8	Middle channel 8DPSK
9	High channel 8DPSK
10	Normal Hopping
Note: 1. All the test modes can be supply by Built-in Li-ion battery, only the result of the worst case was recorded in the report, if no other cases. 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.	

5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF EUT SYSTEM

Configuration:

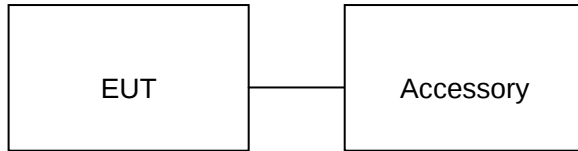

5.2. EQUIPMENT USED IN EUT SYSTEM

ITEM	EQUIPMENT	MODEL NO.	ID OR SPECIFICATION	NOTE
1	tablet pc	BT-840	FCC ID:2AEM6BT840	EUT
2	Adapter	BT-840	5V 2000mA	Accessory
3	Battery	357090	DC3.7V / 2000 mAh	Accessory
4	Earphone	BT-840	N/A	Accessory
5	USB Cable	BT-840	N/A	Accessory

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.247	Peak Output Power	Compliant
§15.247	20 dB Bandwidth	Compliant
§15.247	Spurious Emission	Compliant
§15.209	Radiated Emission	Compliant
§15.247	Band Edges	Compliant
§15.207	Conduction Emission	Compliant
§15.247	Number of Hopping Frequency	Compliant
§15.247	Time of Occupancy	Compliant
§15.247	Frequency Separation	Compliant

6. TEST FACILITY

Site	Compliance Certification Services (Shenzhen) Inc.
Location	No.10-1 Mingkeda Logistics park, No.18, Huanguan South Rd., Guan Lan Town, Baoan District, Shenzhen, China
Description	Test Firm Registration Number: 441872

TEST EQUIPMENT LIST

Description	Manufacturer	Model	S/N	Cal. Date	Cal. Due
Power Probe	R&S	NRP-Z23	100323	07/25/2014	07/24/2015
RF attenuator	N/A	RFA20db	68	07/25/2014	07/24/2015
Spectrum Analyzer	Agilent	E4440A	US41421290	02/17/2015	02/16/2016
Amplifier	EM	EM30180	0607030	02/17/2015	02/16/2016
Horn Antenna	EM	EM-AH-10180	67	02/17/2015	02/16/2016
Horn Antenna	A.H. Systems Inc.	SAS-574	N/A	07/25/2014	07/24/2015
EMI Test Receiver	Rohde & Schwarz	ESCI	100694	07/25/2014	07/24/2015
WIDEBAND FREQUENCY ANTENNA	SCHWARZBECK	VULB9168	26	08/16/2014	08/15/2015
LISN	R&S	ESH3-Z5	8389791009	07/25/2014	07/24/2015
Loop Antenna	A.H.	SAS-562B	SEL0097	05/10/2014	05/09/2015
Radiation Cable 1	Sat	RE1	R003	06/04/2014	06/03/2015
Radiation Cable 2	Sat	RE2	R002	06/04/2014	06/03/2015
Conduction Cable	Sat	CE1	C001	06/04/2014	06/03/2015

Radiated Emission Test Site 966(2)					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
PSA Series Spectrum Analyzer	Agilent	E4446A	US44300399	03/01/2015	03/01/2016
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	03/09/2015	03/08/2016
Amplifier	MITEQ	AM-1604-3000	1123808	03/18/2015	03/17/2016
High Noise Amplifier	Agilent	8449B	3008A01838	03/18/2015	03/17/2016
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	07/10/2014	07/09/2015
Bilog Antenna	SCHAFFNER	CBL6143	5082	03/01/2015	03/01/2016
Horn Antenna	SCHWARZBECK	BBHA9120	D286	03/01/2015	03/01/2016
Loop Antenna	COM-POWER	AL-130	121044	09/27/2014	09/26/2015
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
Temp. / Humidity Meter	Anymetre	JR913	N/A	02/28/2015	02/27/2016
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Test S/W	FARAD	LZ-RF / CCS-SZ-3A2			

Conducted Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	03/09/2015	03/08/2016
LISN(EUT)	ROHDE&SCHWARZ	ENV216	101543-WX	03/09/2015	03/08/2016
LISN	EMCO	3825/2	8901-1459	03/09/2015	03/08/2016
Temp. / Humidity Meter	VICTOR	HTC-1	N/A	03/04/2015	03/03/2016
Test S/W	FARAD	EZ-EMC/ CCS-3A1-CE			

7. PEAK OUTPUT POWER

7.1. MEASUREMENT PROCEDURE

For peak power test:

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, middle and the bottom operation frequency individually.
3. $RBW > \text{the 20 dB bandwidth of the emission being measured}$, $VBW \geq RBW$.
4. Record the maximum power from the Spectrum Analyzer.


For average power test:

1. Connect EUT RF output port to power probe through an RF attenuator.
2. Connect the power probe to the PC.
3. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
4. Record the maximum power from the software.
5. The maximum peak power shall be less 125mW (21dBm).


Note : The EUT was tested according to DA000705 for compliance to FCC 47CFR 15.247 requirements.

7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

PEAK POWER TEST SETUP

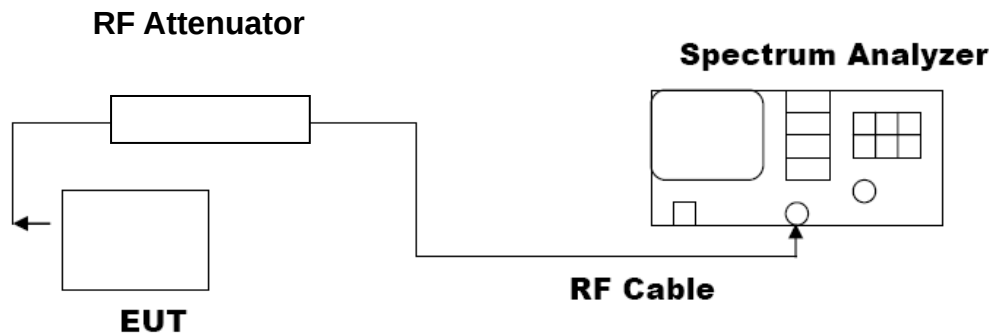

AVERAGE POWER SETUP

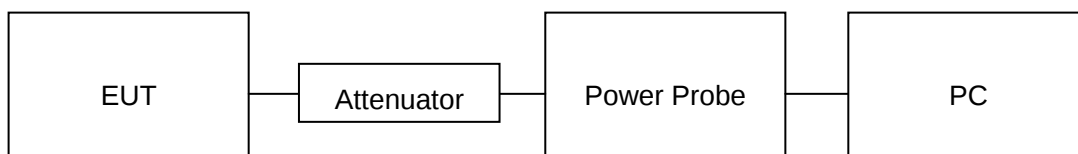


7.3. LIMITS AND MEASUREMENT RESULT

PEAK OUTPUT POWER MEASUREMENT RESULT FOR GFSK MODULATION				
Frequency (GHz)	Average Power (dBm)	Peak Power (dBm)	Applicable Limits (dBm)	Pass or Fail
2.402	3.12	5.13	21	Pass
2.441	3.36	5.37	21	Pass
2.480	3.26	5.27	21	Pass




PEAK OUTPUT POWER MEASUREMENT RESULT FOR II /4-DQPSK MODULATION				
Frequency (GHz)	Average Power (dBm)	Peak Power (dBm)	Applicable Limits (dBm)	Pass or Fail
2.402	2.51	4.52	21	Pass
2.441	2.58	4.59	21	Pass
2.480	2.3	4.31	21	Pass

PEAK OUTPUT POWER MEASUREMENT RESULT FOR 8-DPSK MODULATION				
Frequency (GHz)	Average Power (dBm)	Peak Power (dBm)	Applicable Limits (dBm)	Pass or Fail
2.402	2.5	4.51	21	Pass
2.441	2.61	4.62	21	Pass
2.480	2.32	4.33	21	Pass

Test Graph

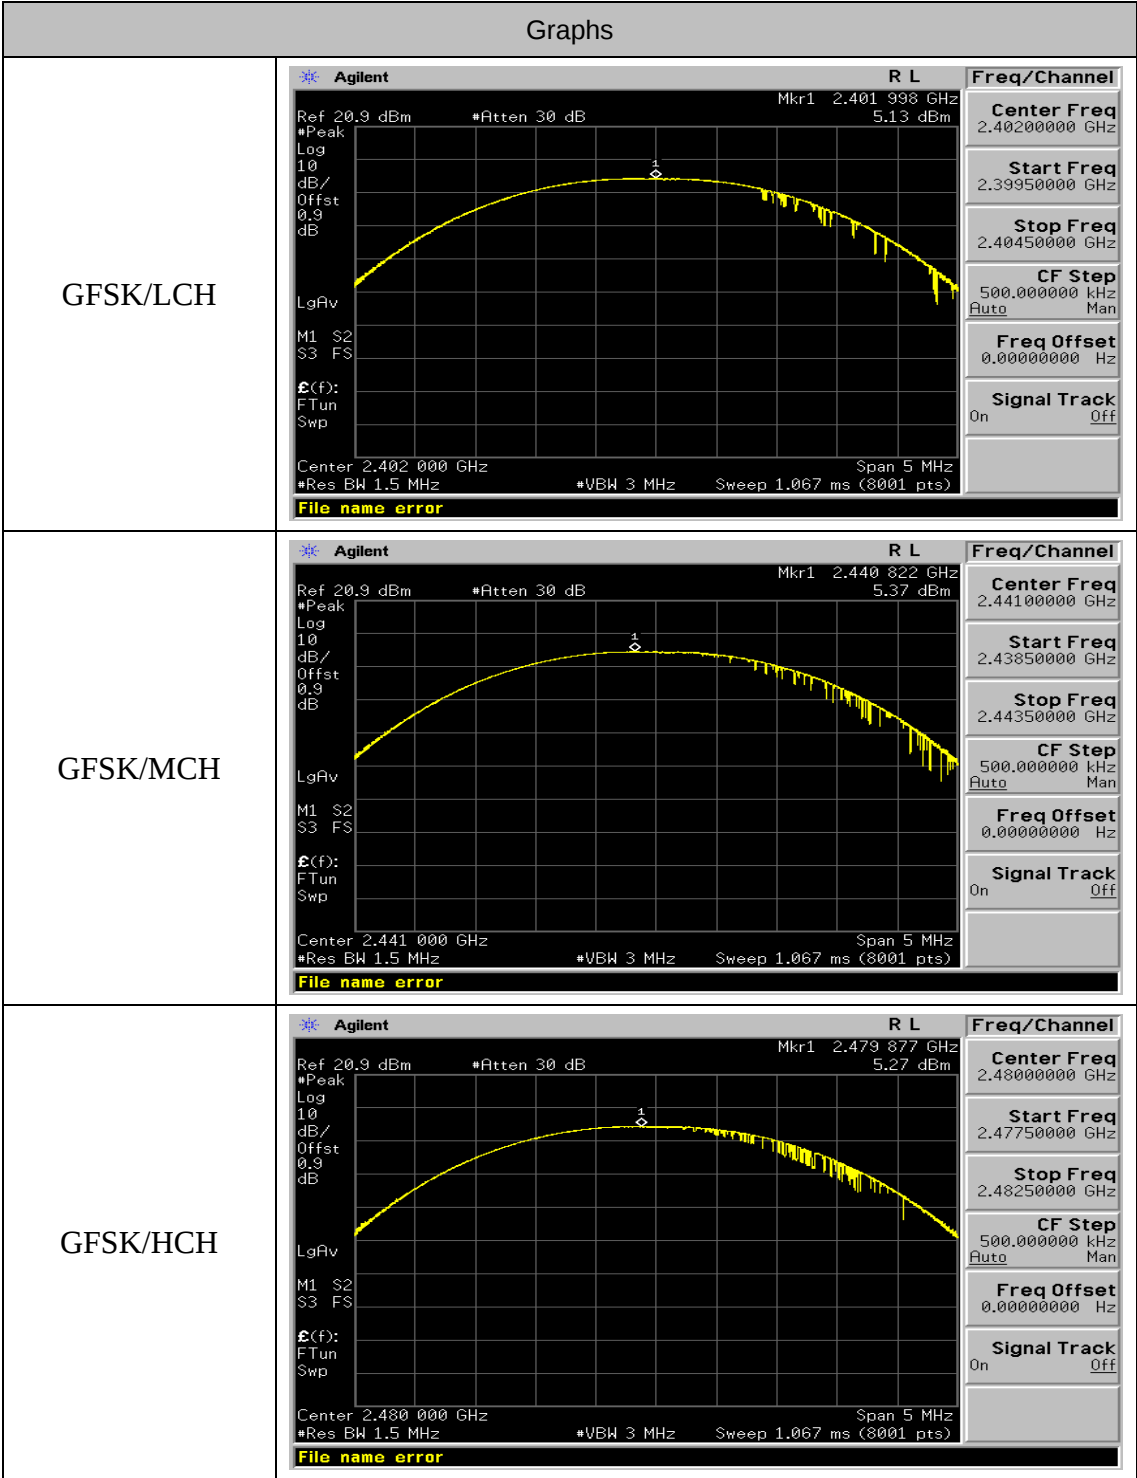

π /4DQPSK/LCH	Agilent R L Ref 20.9 dBm *Atten 30 dB Mkr1 2.401 933 GHz 4.52 dBm •Peak Log 10 dB/ Offst 0.9 dB LgAv M1 S2 S3 FS $\mathcal{E}(f)$: FTun Swp Center 2.402 000 GHz Span 5 MHz *Res BW 1.5 MHz *VBW 3 MHz Sweep 1.067 ms (8001 pts) File name error Freq/Channel Center Freq 2.40200000 GHz Start Freq 2.39950000 GHz Stop Freq 2.40450000 GHz CF Step 500.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off
π /4DQPSK/MCH	Agilent R L Ref 20.9 dBm *Atten 30 dB Mkr1 2.441 136 GHz 4.59 dBm •Peak Log 10 dB/ Offst 0.9 dB LgAv M1 S2 S3 FS $\mathcal{E}(f)$: FTun Swp Center 2.441 000 GHz Span 5 MHz *Res BW 1.5 MHz *VBW 3 MHz Sweep 1.067 ms (8001 pts) File name error Freq/Channel Center Freq 2.44100000 GHz Start Freq 2.43850000 GHz Stop Freq 2.44350000 GHz CF Step 500.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off
π /4DQPSK/HCH	Agilent R L Ref 20.9 dBm *Atten 30 dB Mkr1 2.480 031 GHz 4.31 dBm •Peak Log 10 dB/ Offst 0.9 dB LgAv M1 S2 S3 FS $\mathcal{E}(f)$: FTun Swp Center 2.480 000 GHz Span 5 MHz *Res BW 1.5 MHz *VBW 3 MHz Sweep 1.067 ms (8001 pts) File name error Freq/Channel Center Freq 2.48000000 GHz Start Freq 2.47750000 GHz Stop Freq 2.48250000 GHz CF Step 500.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off

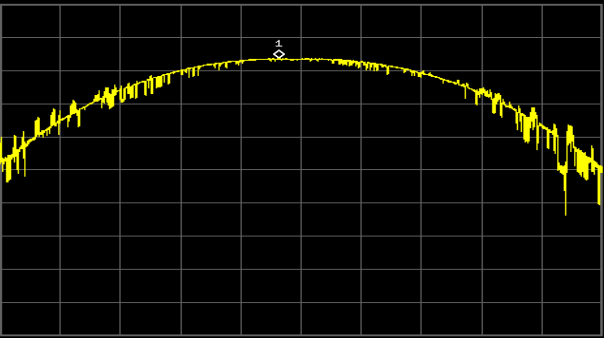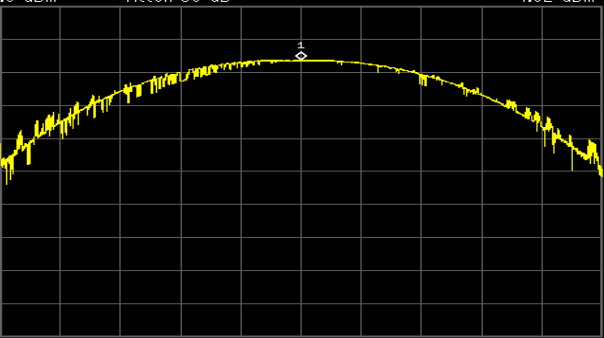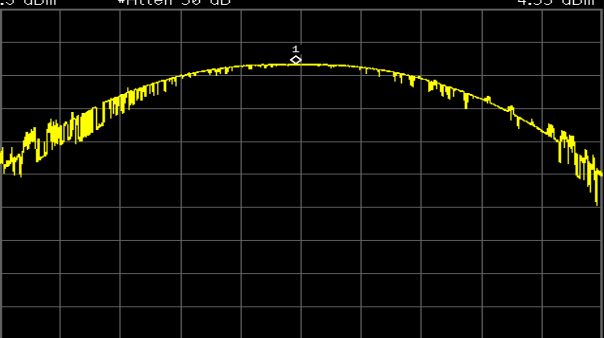
8DPSK/LCH	Agilent R L Ref 20.9 dBm *Atten 30 dB Mkr1 2.401 821 GHz 4.51 dBm •Peak Log 10 dB/ Offst 0.9 dB  LgAv M1 S2 S3 FS Ⓔ(f): FTun Swp Center 2.402 000 GHz Span 5 MHz #Res BW 1.5 MHz #VBW 3 MHz Sweep 1.067 ms (8001 pts) File name error Freq/Channel Center Freq 2.40200000 GHz Start Freq 2.39950000 GHz Stop Freq 2.40450000 GHz CF Step 500.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off
8DPSK/MCH	Agilent R L Ref 20.9 dBm *Atten 30 dB Mkr1 2.441 004 GHz 4.62 dBm •Peak Log 10 dB/ Offst 0.9 dB  LgAv M1 S2 S3 FS Ⓔ(f): FTun Swp Center 2.441 000 GHz Span 5 MHz #Res BW 1.5 MHz #VBW 3 MHz Sweep 1.067 ms (8001 pts) File name error Freq/Channel Center Freq 2.44100000 GHz Start Freq 2.43850000 GHz Stop Freq 2.44350000 GHz CF Step 500.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off
8DPSK/HCH	Agilent R L Ref 20.9 dBm *Atten 30 dB Mkr1 2.479 953 GHz 4.33 dBm •Peak Log 10 dB/ Offst 0.9 dB  LgAv M1 S2 S3 FS Ⓔ(f): FTun Swp Center 2.480 000 GHz Span 5 MHz #Res BW 1.5 MHz #VBW 3 MHz Sweep 1.067 ms (8001 pts) File name error Freq/Channel Center Freq 2.48000000 GHz Start Freq 2.47750000 GHz Stop Freq 2.48250000 GHz CF Step 500.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off

8. 20DB BANDWIDTH

8.1. MEASUREMENT PROCEDURE

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel
RBW $\geq$ 1% of the 20 dB bandwidth, VBW $\geq$ RBW; Sweep = auto; Detector function = peak
4. Set SPA Trace 1 Max hold, then View.


8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

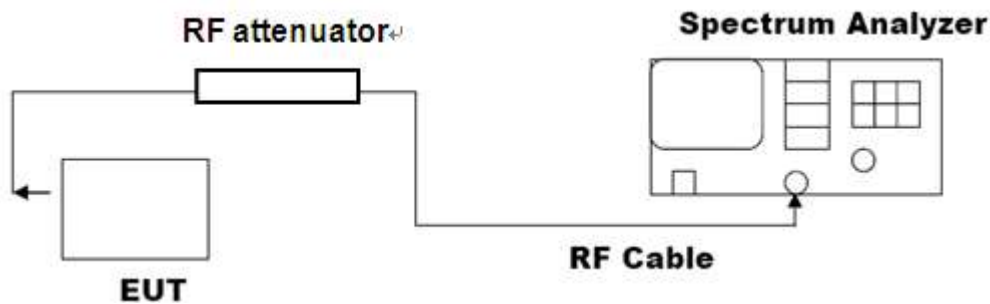




8.3. LIMITS AND MEASUREMENT RESULTS

Mode	Channel.	EBW [MHz]	OBW [MHz]	Verdict
GFSK	LCH	0.8073	0.8496	PASS
GFSK	MCH	0.6447	0.8589	PASS
GFSK	HCH	0.7471	0.8368	PASS
$\pi/4$ DQPSK	LCH	1.1166	1.0612	PASS
$\pi/4$ DQPSK	MCH	1.1200	1.0361	PASS
$\pi/4$ DQPSK	HCH	1.1229	0.9858	PASS
8DPSK	LCH	1.0792	1.0041	PASS
8DPSK	MCH	1.1415	1.0534	PASS
8DPSK	HCH	1.0585	1.0162	PASS

Test Graph

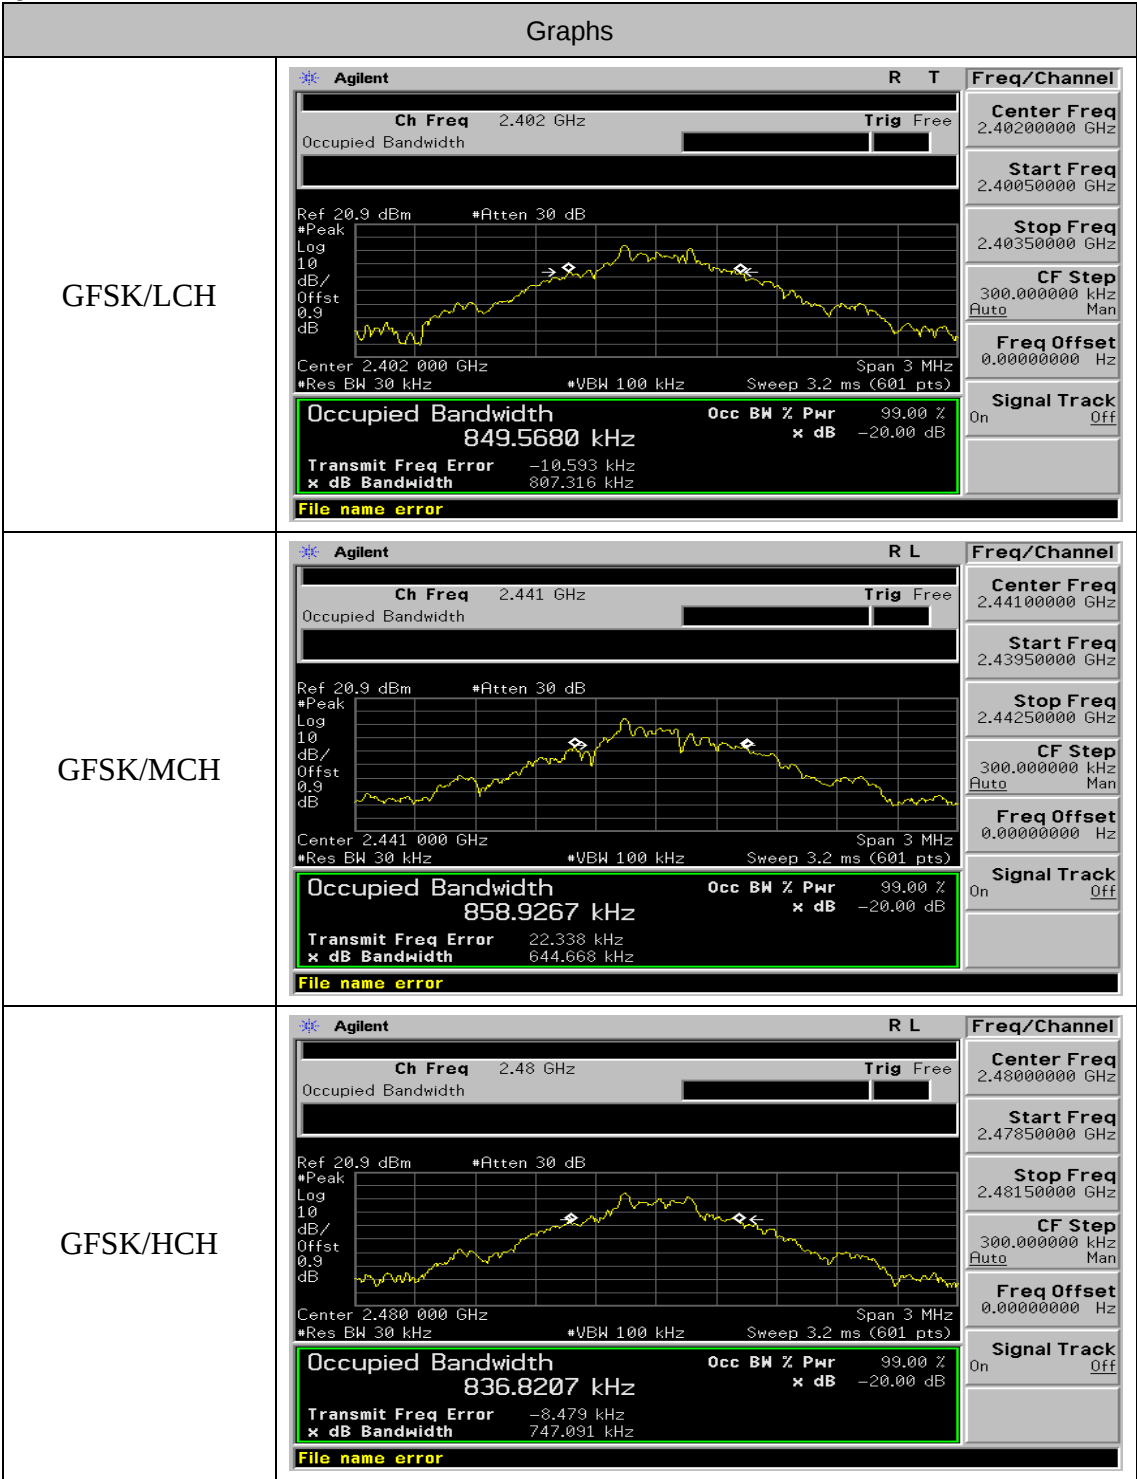

π /4DQPSK/LCH	Agilent R L Ch Freq 2.402 GHz Trig Free Occupied Bandwidth Ref 20.9 dBm *Atten 30 dB *Peak Log 10 dB/ Offst 0.9 dB Center 2.402 000 GHz *Res BW 30 kHz *VBW 100 kHz Sweep 3.2 ms (601 pts) Span 3 MHz Occupied Bandwidth 1.0612 MHz Occ BW % Pwr 99.00 % x dB -20.00 dB Transmit Freq Error -4.683 kHz x dB Bandwidth 1.117 MHz File name error Freq/Channel Center Freq 2.40200000 GHz Start Freq 2.40050000 GHz Stop Freq 2.40350000 GHz CF Step 300.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off
π /4DQPSK/MCH	Agilent R T Ch Freq 2.441 GHz Trig Free Occupied Bandwidth Ref 20.9 dBm *Atten 30 dB *Peak Log 10 dB/ Offst 0.9 dB Center 2.441 000 GHz *Res BW 30 kHz *VBW 100 kHz Sweep 3.2 ms (601 pts) Span 3 MHz Occupied Bandwidth 1.0361 MHz Occ BW % Pwr 99.00 % x dB -20.00 dB Transmit Freq Error 7.923 kHz x dB Bandwidth 1.120 MHz File name error Freq/Channel Center Freq 2.44100000 GHz Start Freq 2.43950000 GHz Stop Freq 2.44250000 GHz CF Step 300.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off
π /4DQPSK/HCH	Agilent R L Ch Freq 2.48 GHz Trig Free Occupied Bandwidth Ref 20.9 dBm *Atten 30 dB *Peak Log 10 dB/ Offst 0.9 dB Center 2.480 000 GHz *Res BW 30 kHz *VBW 100 kHz Sweep 3.2 ms (601 pts) Span 3 MHz Occupied Bandwidth 985.7649 kHz Occ BW % Pwr 99.00 % x dB -20.00 dB Transmit Freq Error -21.778 kHz x dB Bandwidth 1.123 MHz File name error Freq/Channel Center Freq 2.48000000 GHz Start Freq 2.47850000 GHz Stop Freq 2.48150000 GHz CF Step 300.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off

8DPSK/LCH	Agilent Ch Freq 2.402 GHz Trig Free Occupied Bandwidth Ref 20.9 dBm #Atten 30 dB #Peak Log 10 dB/ Offst 0.9 dB  Center 2.402 000 GHz #Res BW 30 kHz #VBW 100 kHz Sweep 3.2 ms (601 pts) Span 3 MHz Occupied Bandwidth 1.0041 MHz Occ BW % Pwr 99.00 % x dB -20.00 dB Transmit Freq Error -36.314 kHz x dB Bandwidth 1.079 MHz File name error Freq/Channel Center Freq 2.40200000 GHz Start Freq 2.40050000 GHz Stop Freq 2.40350000 GHz CF Step 300.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off
8DPSK/MCH	Agilent Ch Freq 2.441 GHz Trig Free Occupied Bandwidth Ref 20.9 dBm #Atten 30 dB #Peak Log 10 dB/ Offst 0.9 dB  Center 2.441 000 GHz #Res BW 30 kHz #VBW 100 kHz Sweep 3.2 ms (601 pts) Span 3 MHz Occupied Bandwidth 1.0534 MHz Occ BW % Pwr 99.00 % x dB -20.00 dB Transmit Freq Error -10.628 kHz x dB Bandwidth 1.141 MHz File name error Freq/Channel Center Freq 2.44100000 GHz Start Freq 2.43950000 GHz Stop Freq 2.44250000 GHz CF Step 300.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off
8DPSK/HCH	Agilent Ch Freq 2.48 GHz Trig Free Occupied Bandwidth Ref 20.9 dBm #Atten 30 dB #Peak Log 10 dB/ Offst 0.9 dB  Center 2.480 000 GHz #Res BW 30 kHz #VBW 100 kHz Sweep 3.2 ms (601 pts) Span 3 MHz Occupied Bandwidth 1.0162 MHz Occ BW % Pwr 99.00 % x dB -20.00 dB Transmit Freq Error 35.712 kHz x dB Bandwidth 1.058 MHz File name error Freq/Channel Center Freq 2.48000000 GHz Start Freq 2.47850000 GHz Stop Freq 2.48150000 GHz CF Step 300.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off

9. CONDUCTED SPURIOUS EMISSION

9.1. MEASUREMENT PROCEDURE

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, the Middle and the bottom operation frequency individually.
3. Set the Span = wide enough to capture the peak level of the in-band emission and all spurious emissions from the lowest frequency generated in the EUT up through the 10th harmonic.
RBW = 100 kHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak.
4. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to DA000705 for compliance to FCC 47CFR 15.247 requirements. Owing to satisfy the requirements of the number of measurement points, we set the RBW=1MHz, VBW > RBW, scan up through 10th harmonic, and consider the tested results as the worst case, if the tested results conform to the requirement, we can deem that the real tested results(set the RBW=100KHz, VBW > RBW) are conform to the requirement.

9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 8.2


9.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6


9.4. LIMITS AND MEASUREMENT RESULT


LIMITS AND MEASUREMENT RESULT		
Applicable Limits	Measurement Result	
	Test Data	Criteria
In any 100 KHz Bandwidth Outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power. In addition, radiation emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in§15.209(a))	At least -20dBc than the limit Specified on the BOTTOM Channel	PASS
	At least -20dBc than the limit Specified on the TOP Channel	PASS

Test Graph

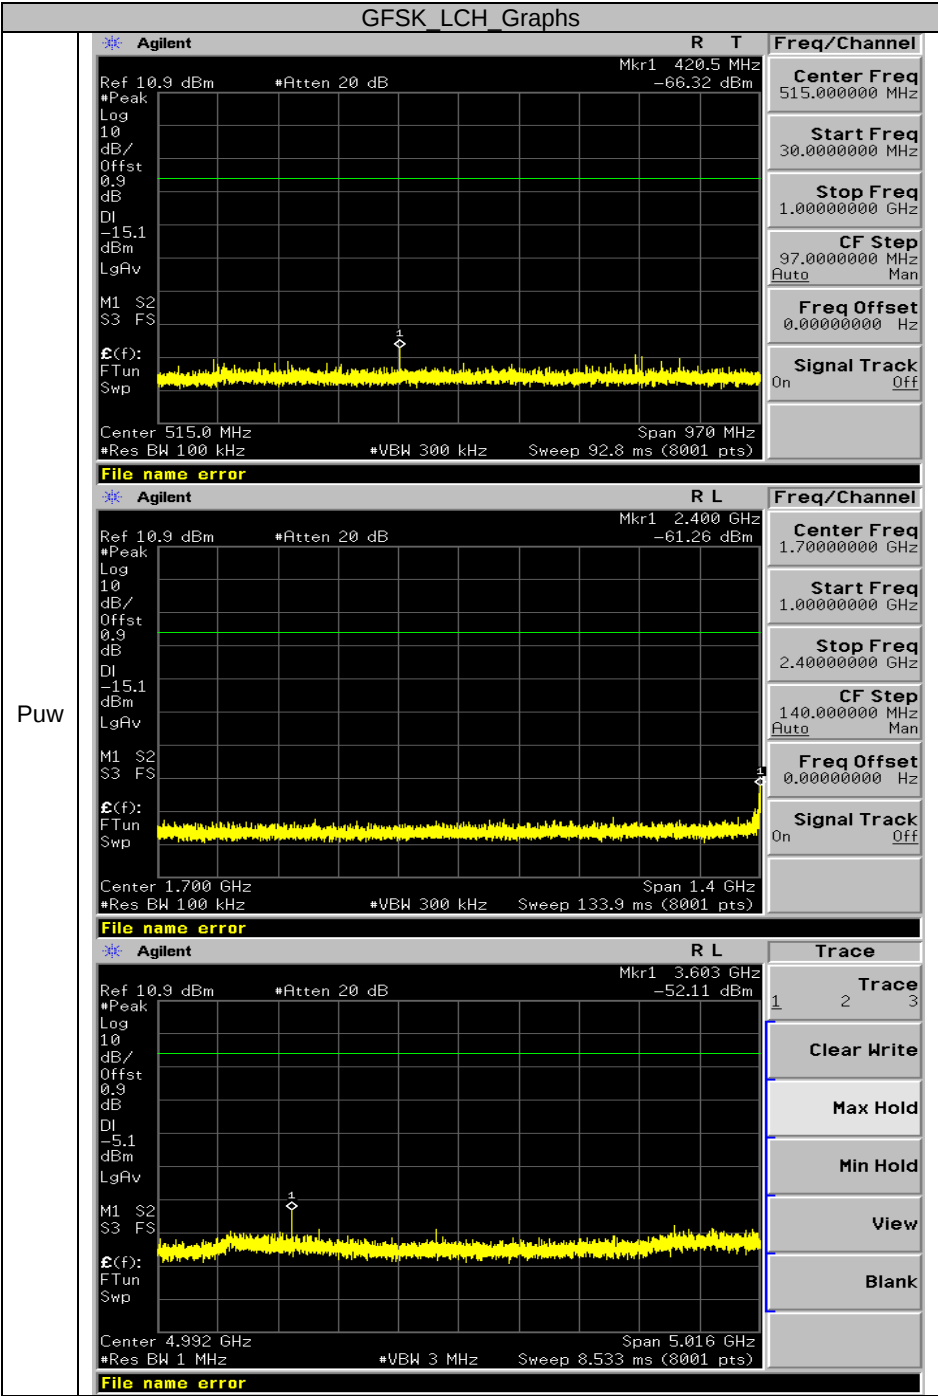



PUW

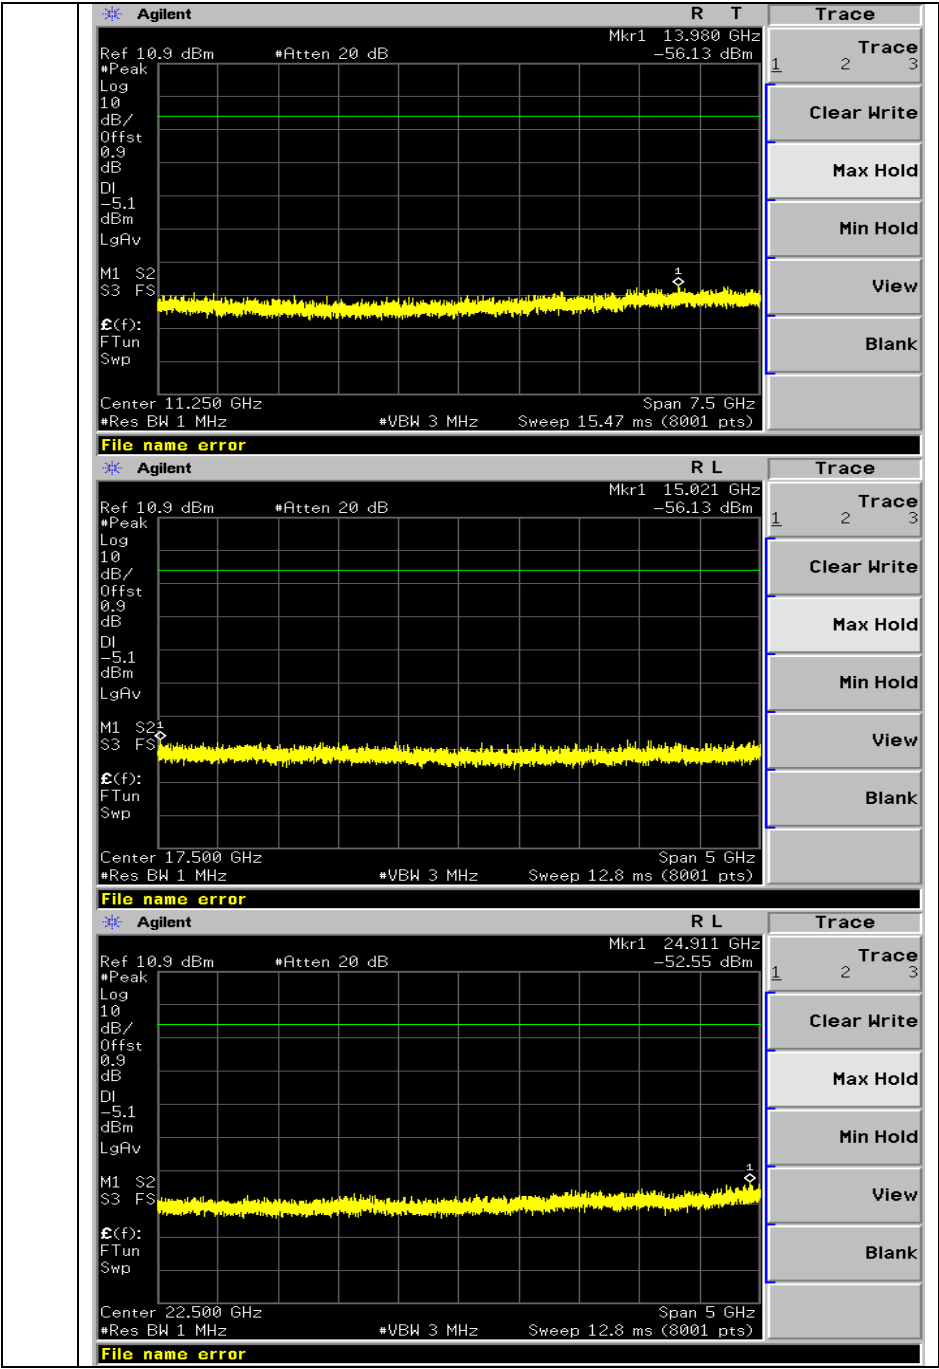

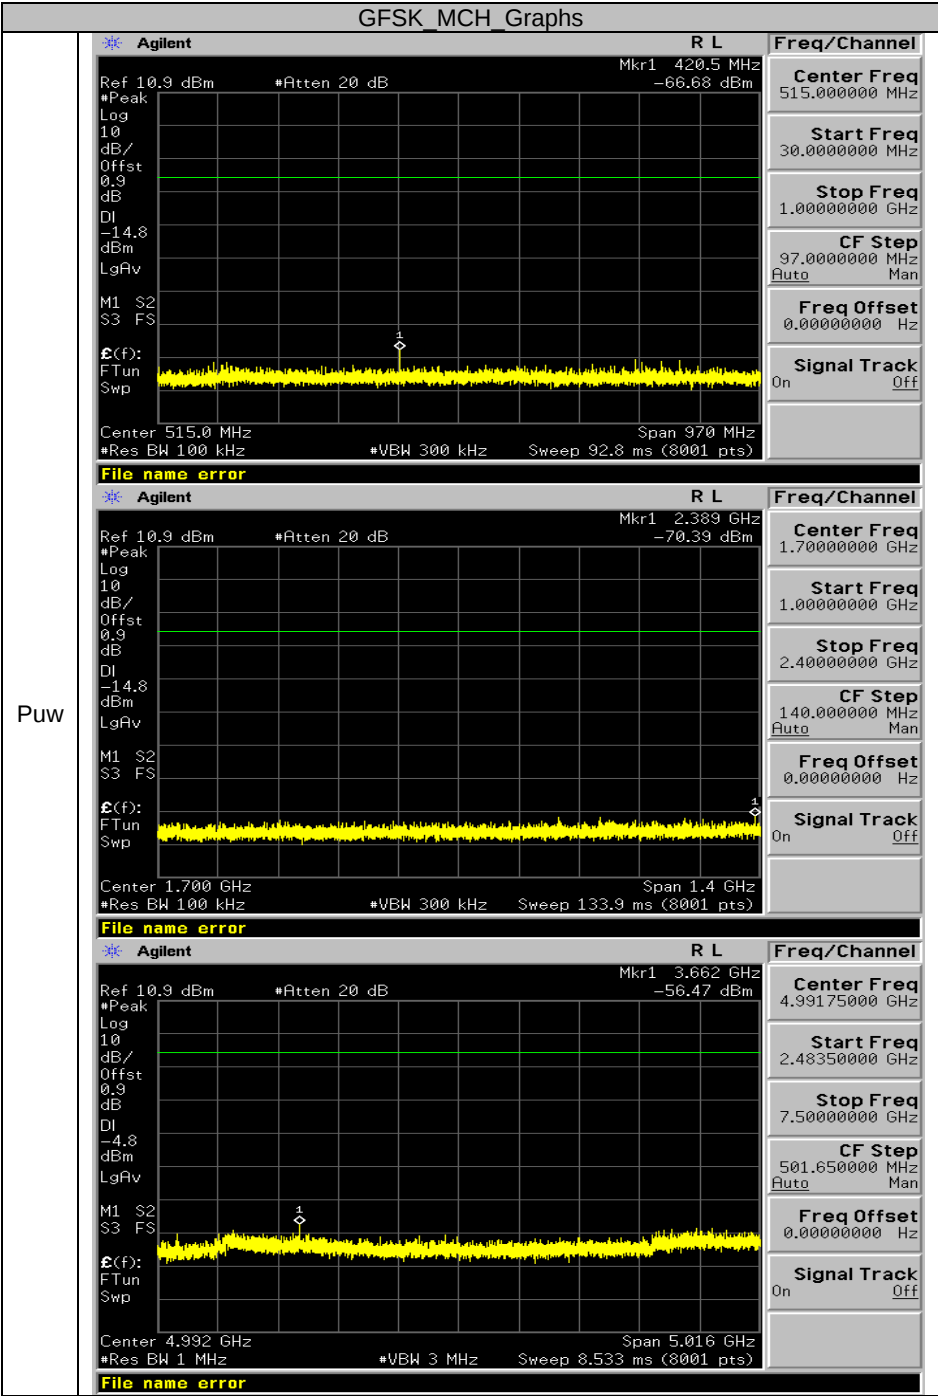



PUW

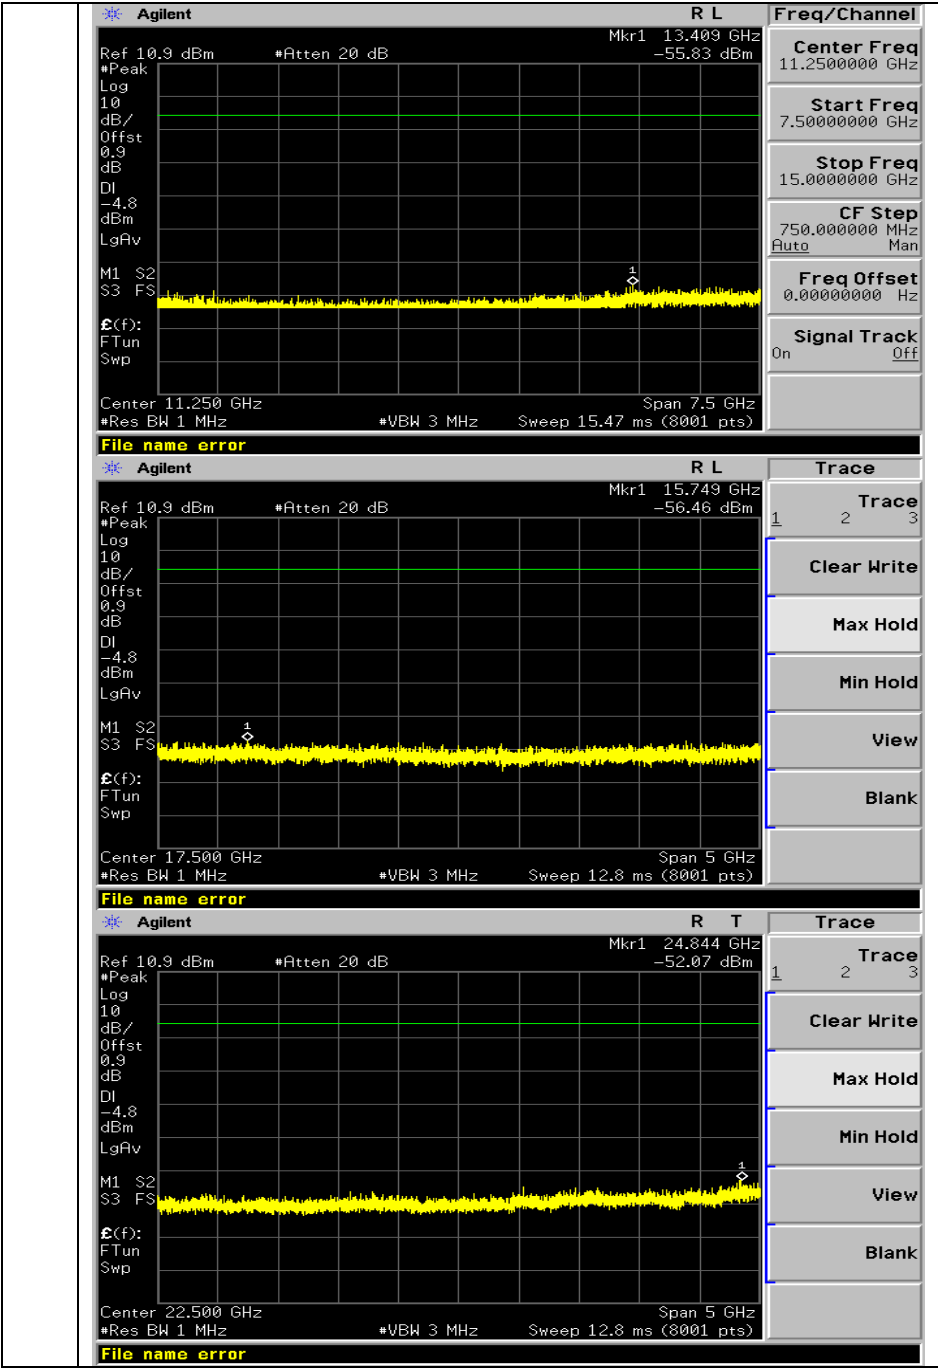


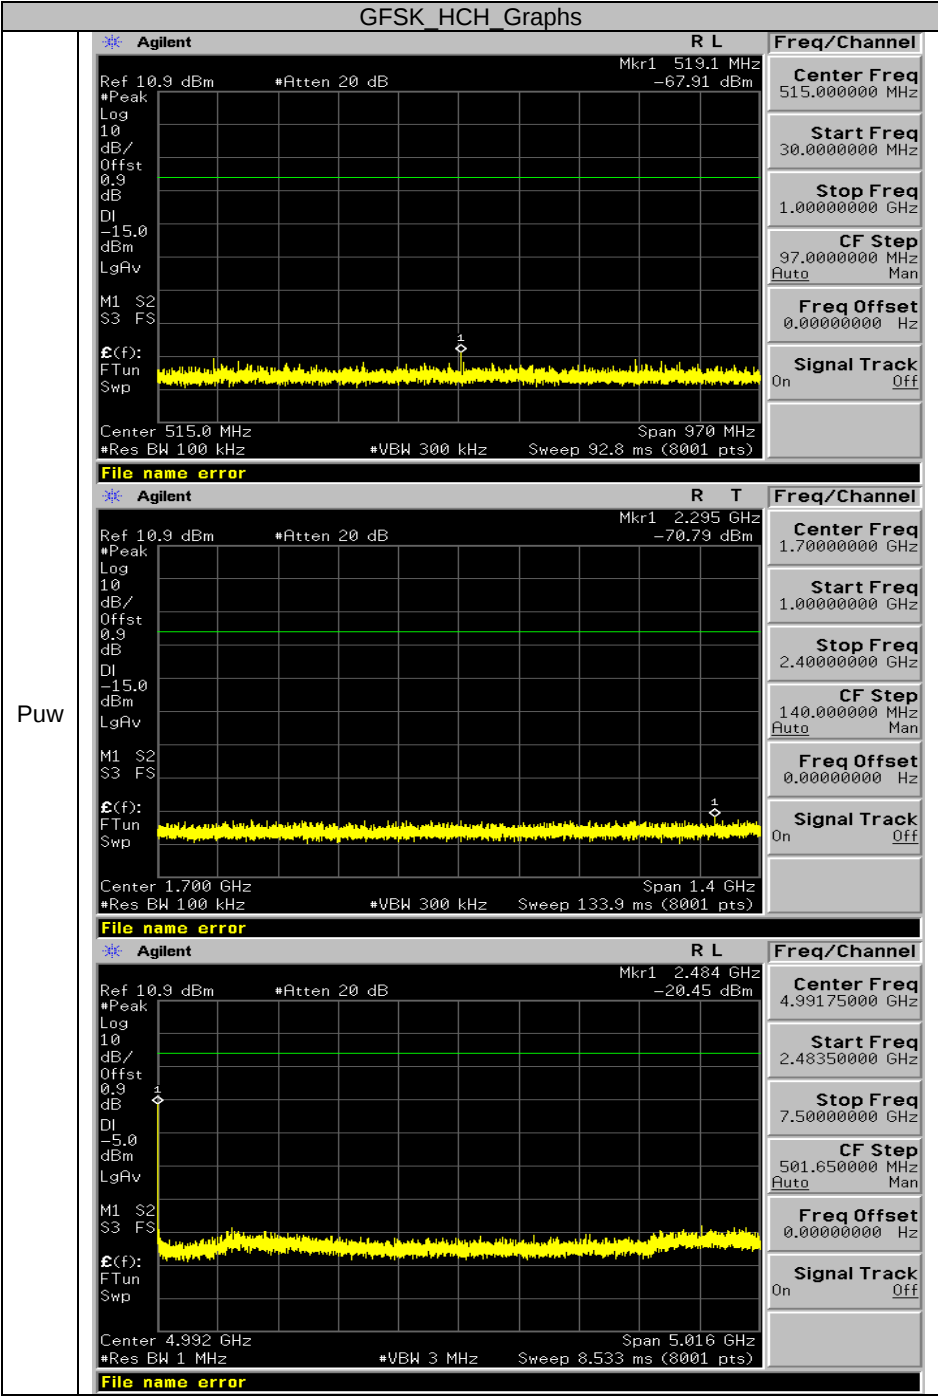


PUW

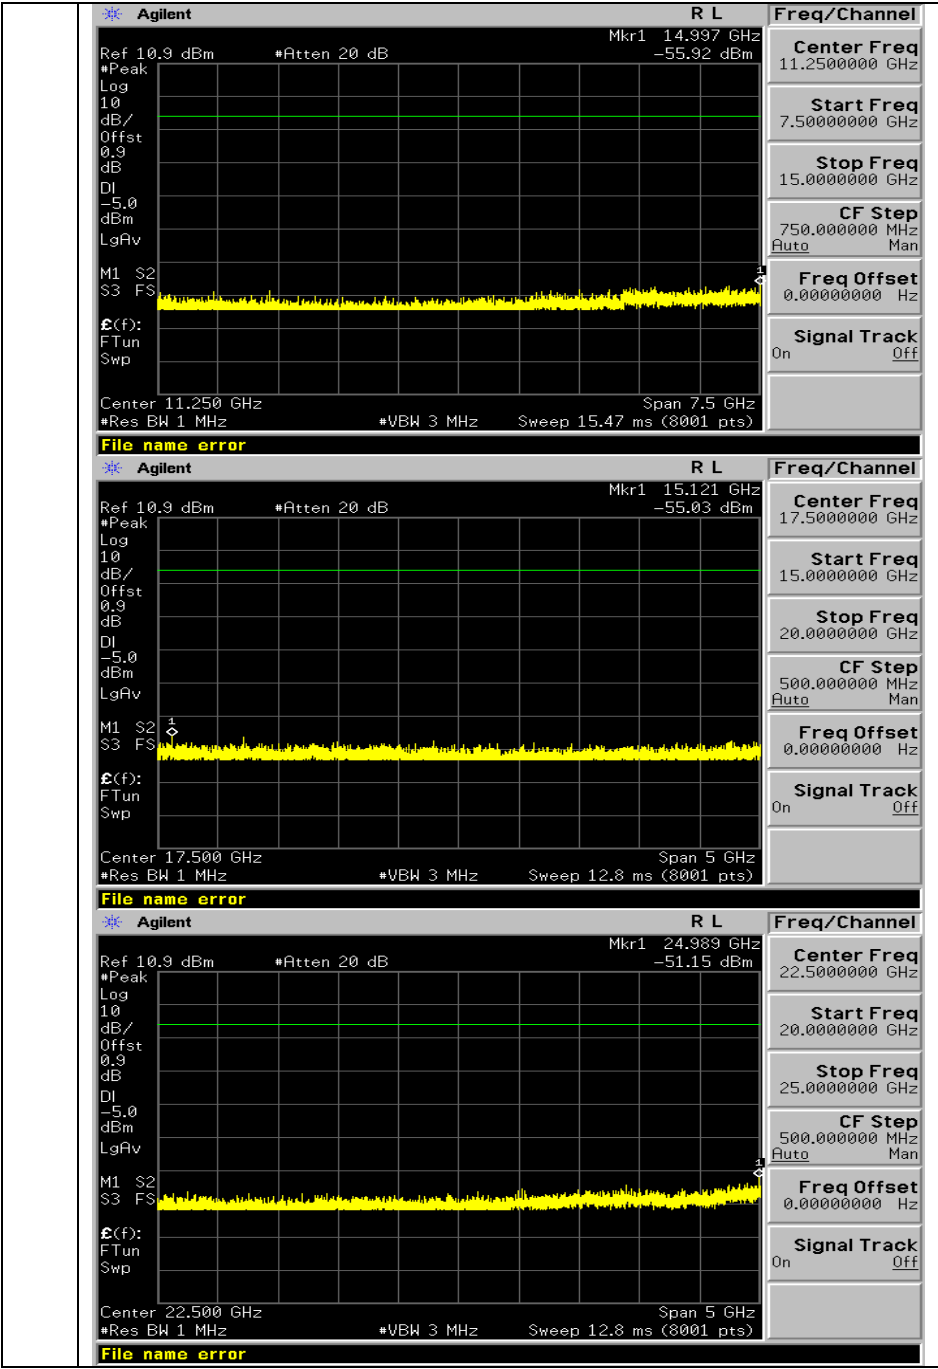

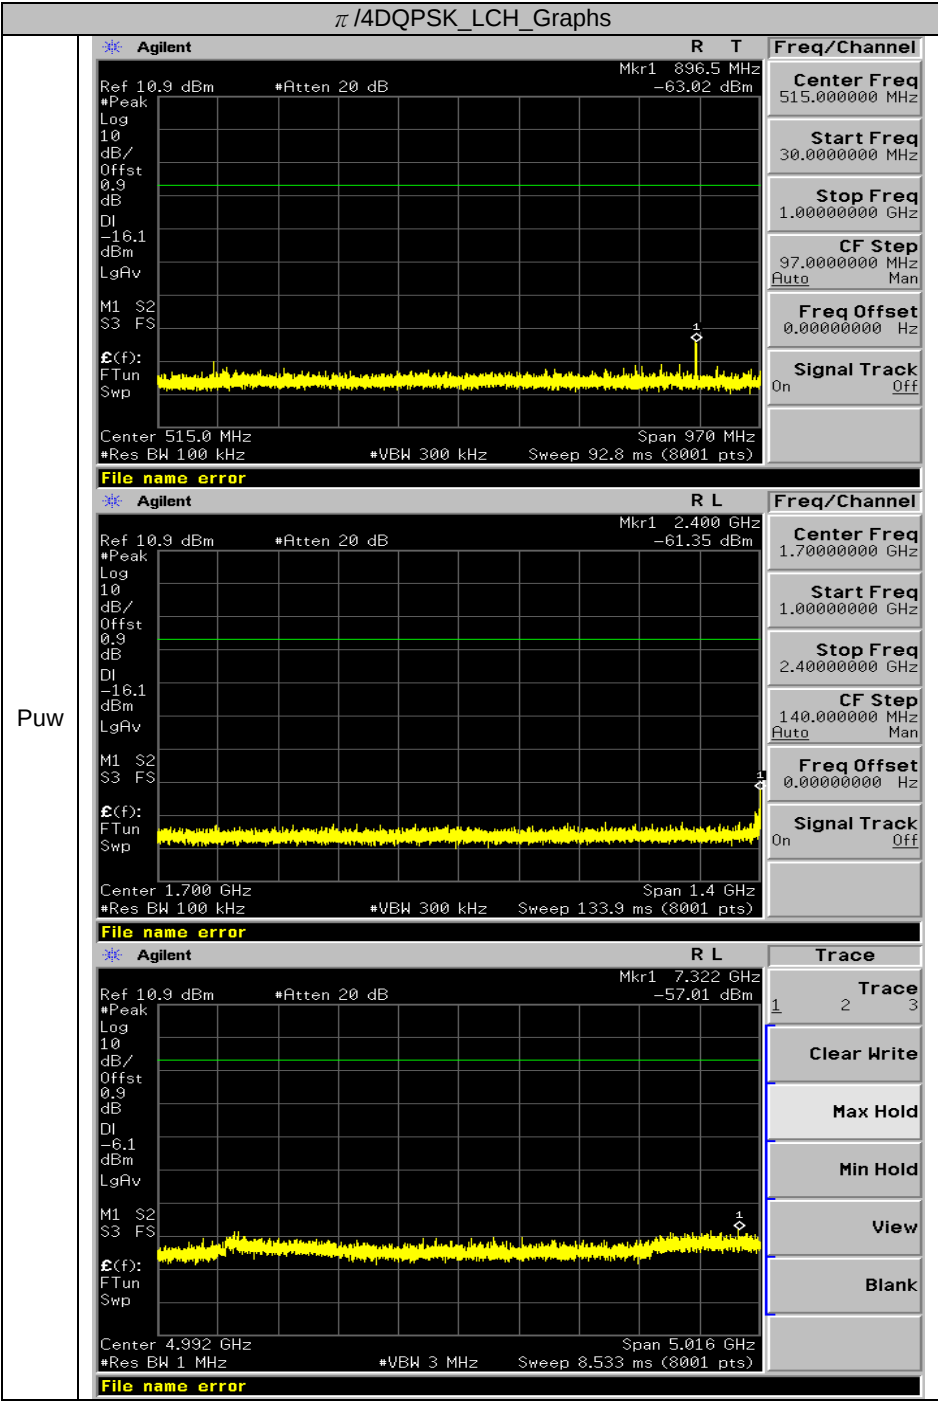


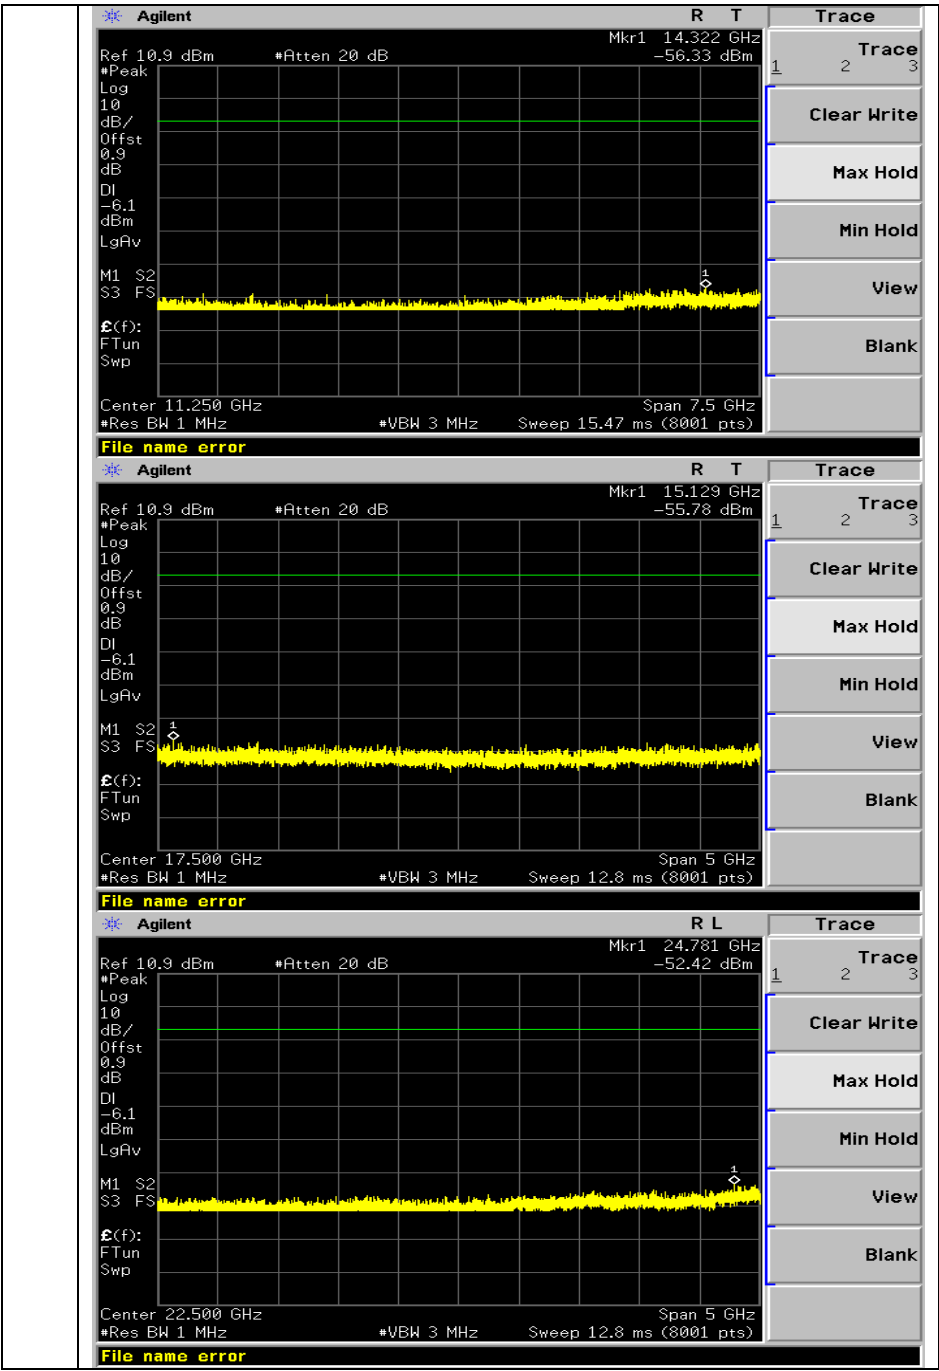


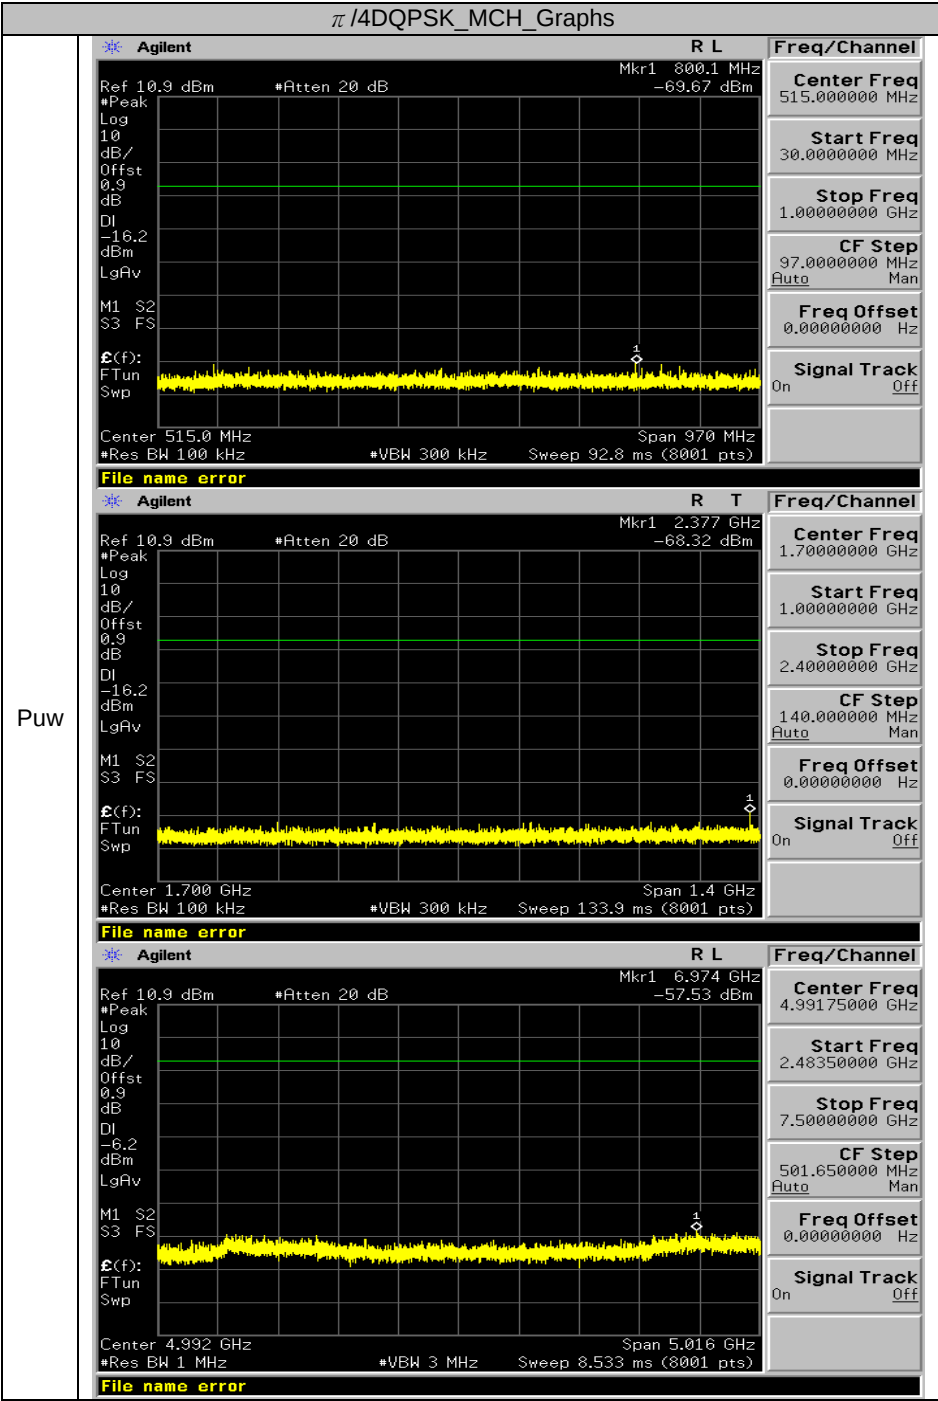


File name error


Puw

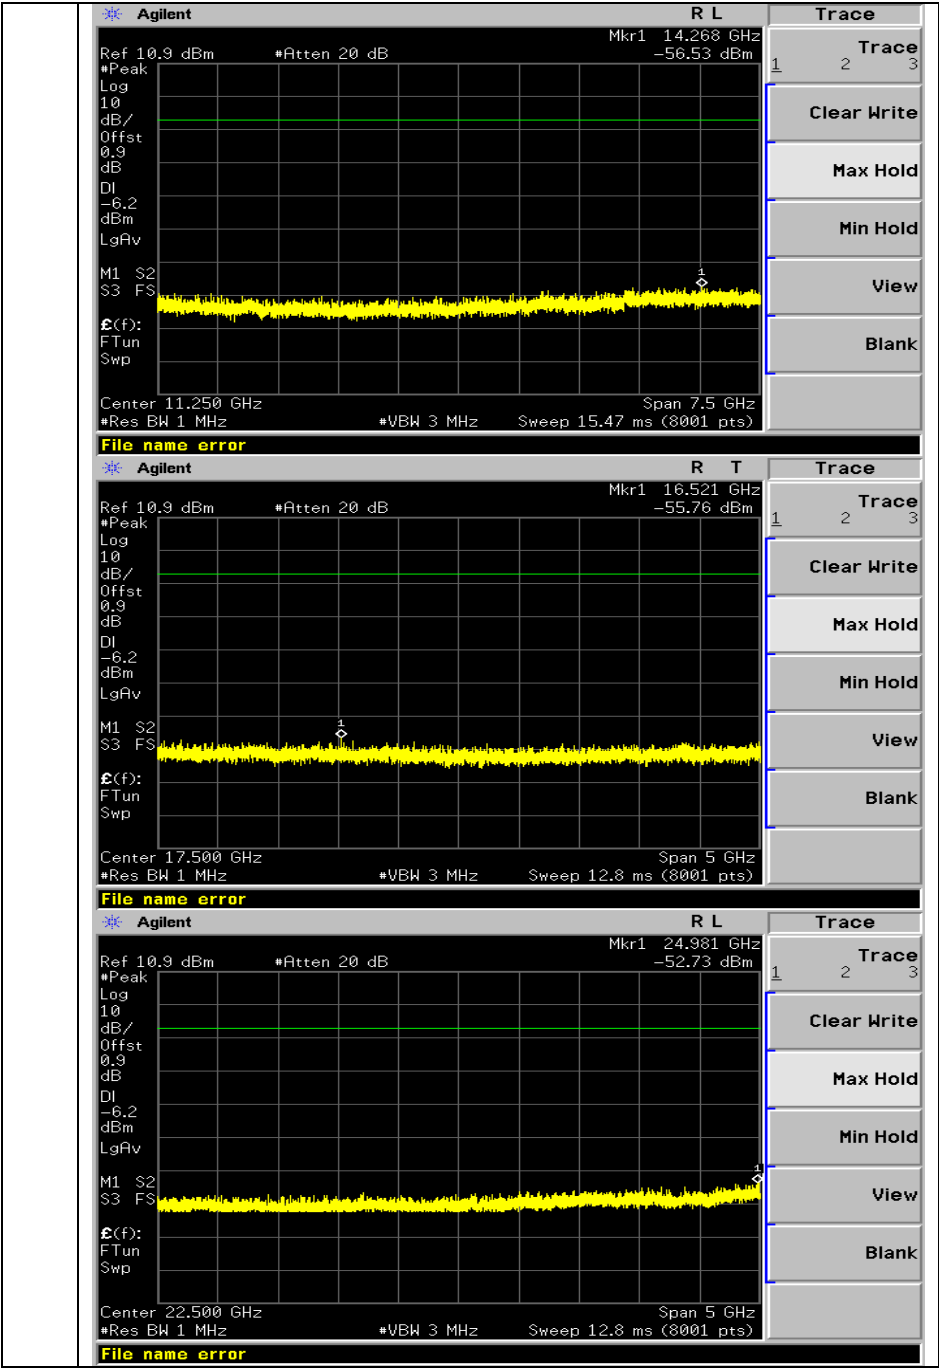


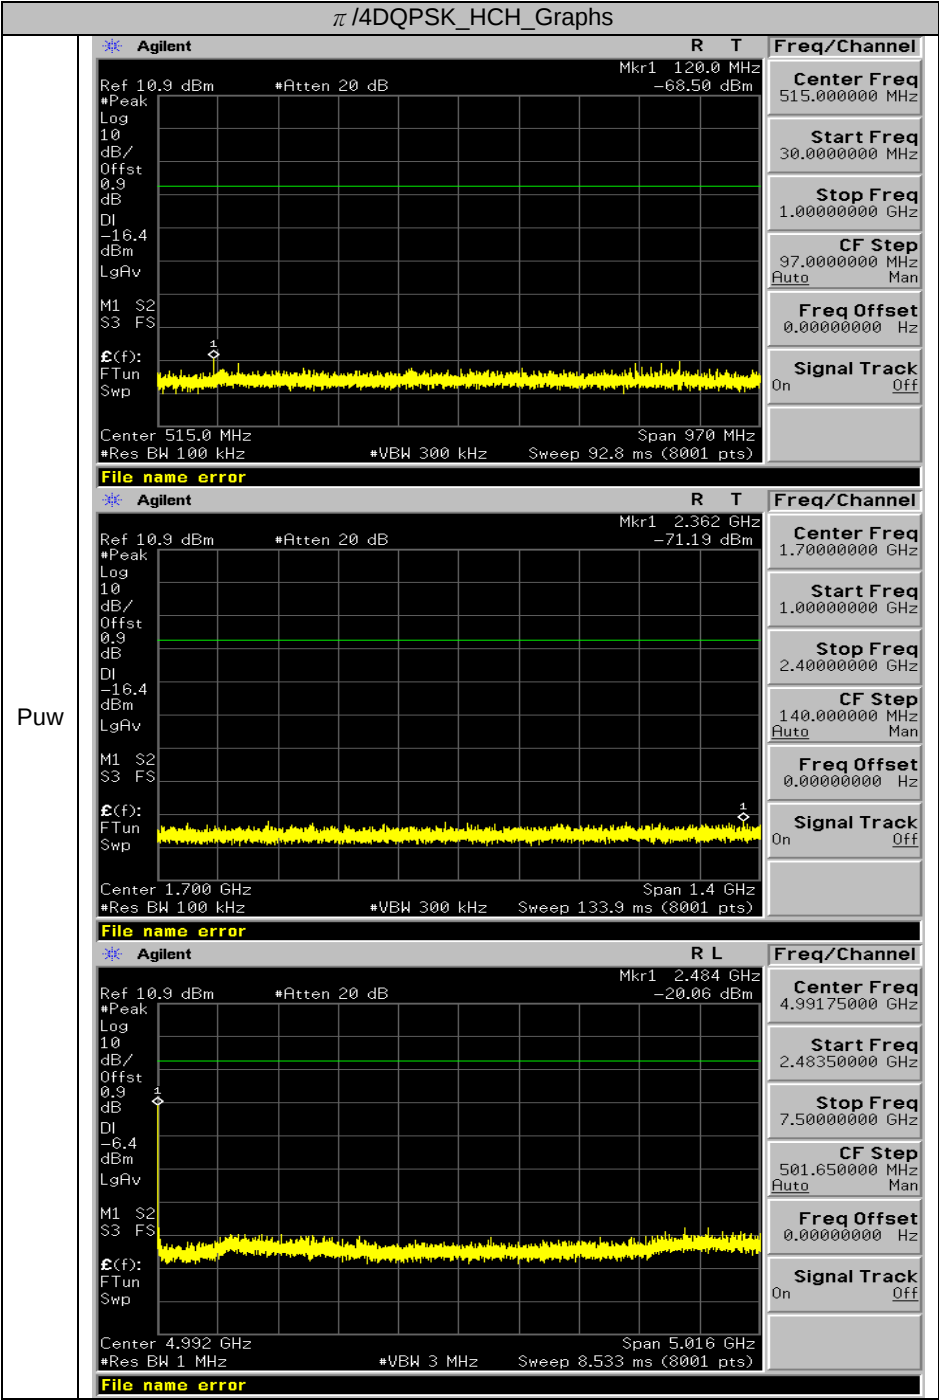



Puw

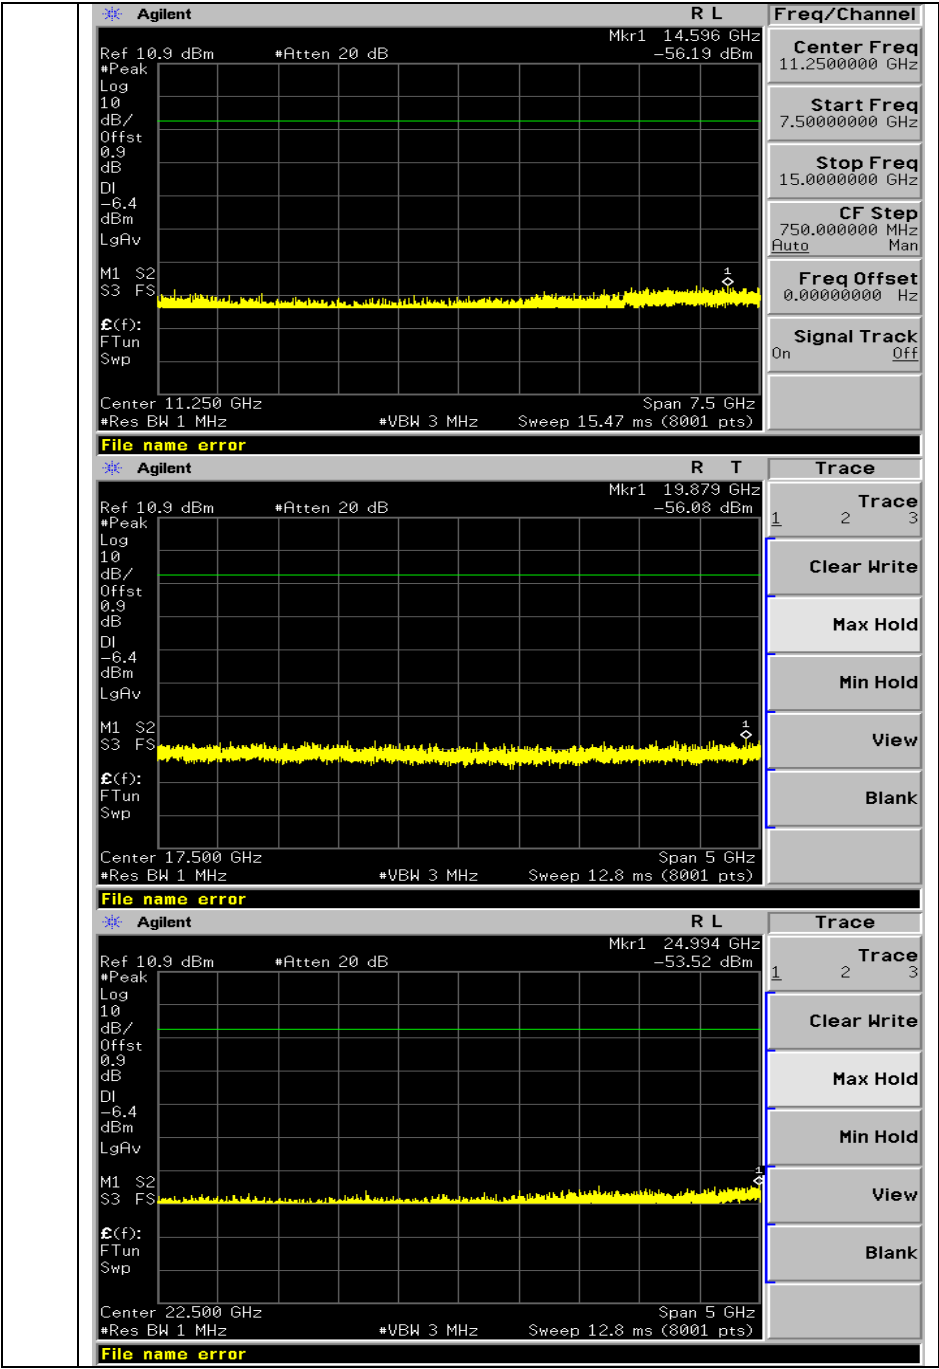


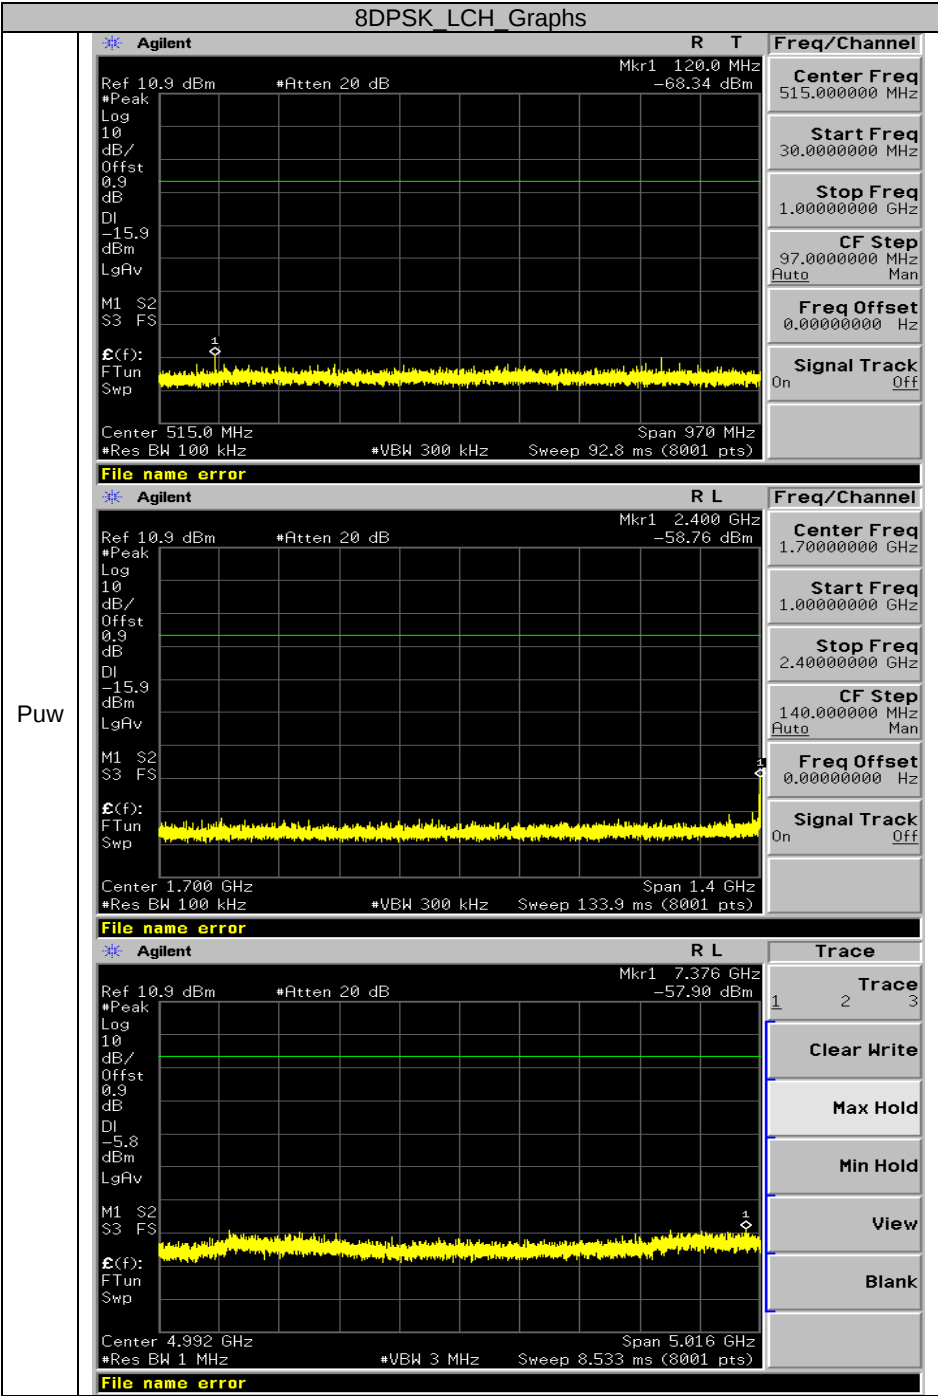

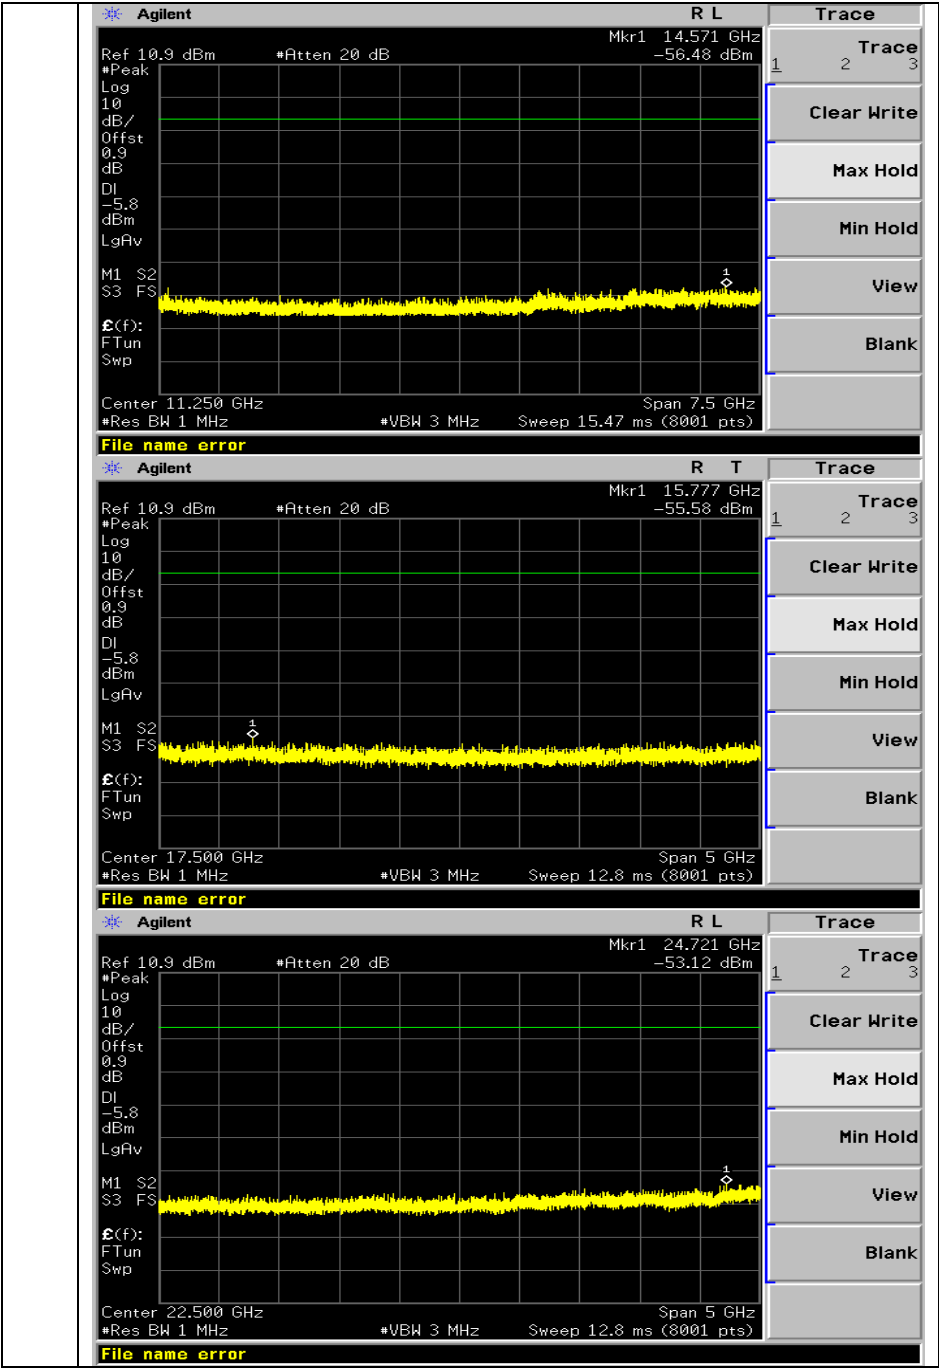


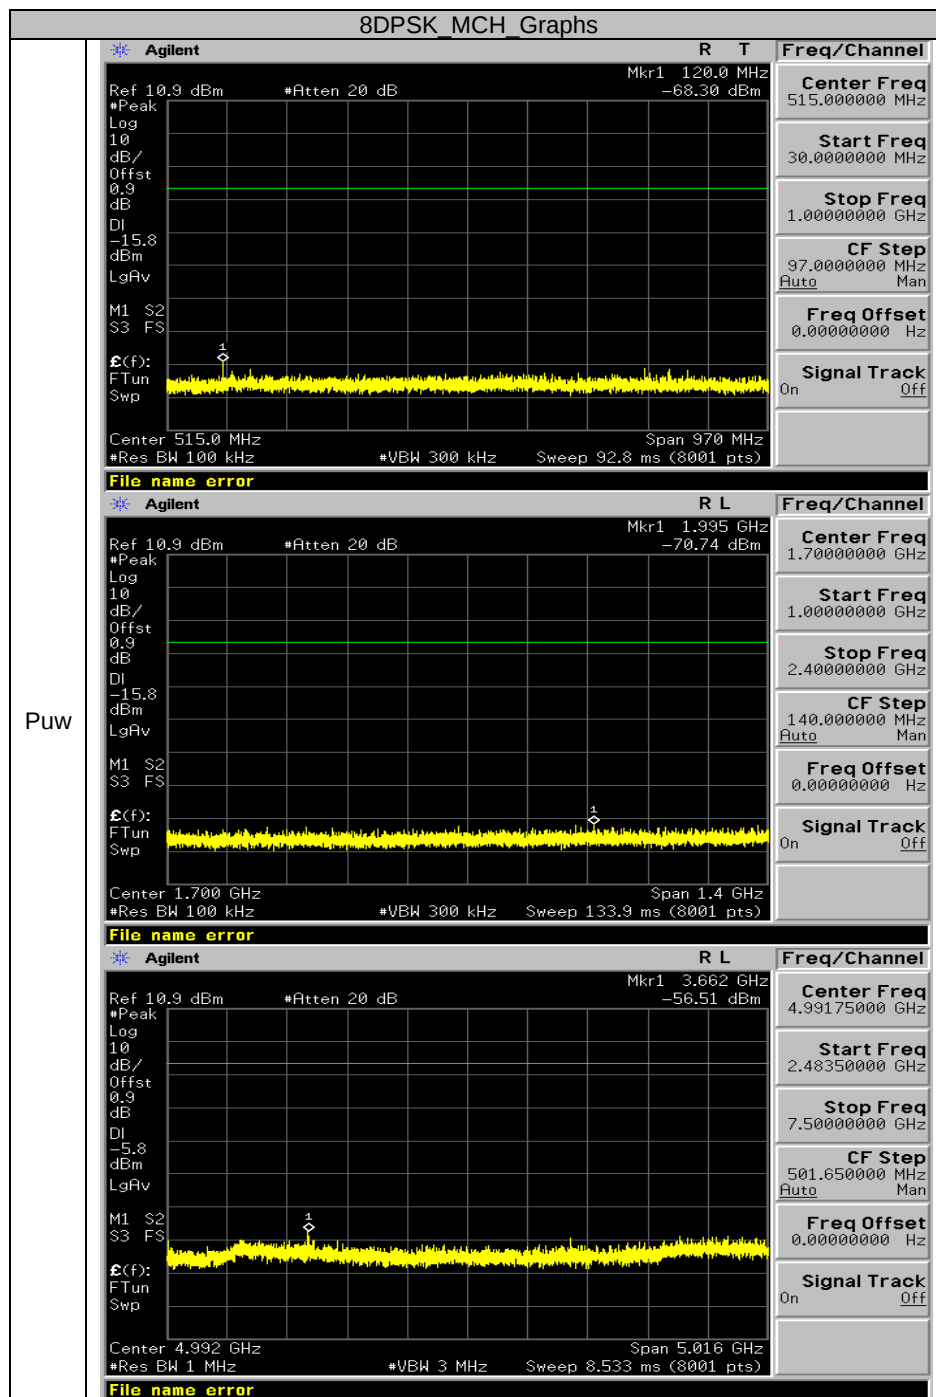

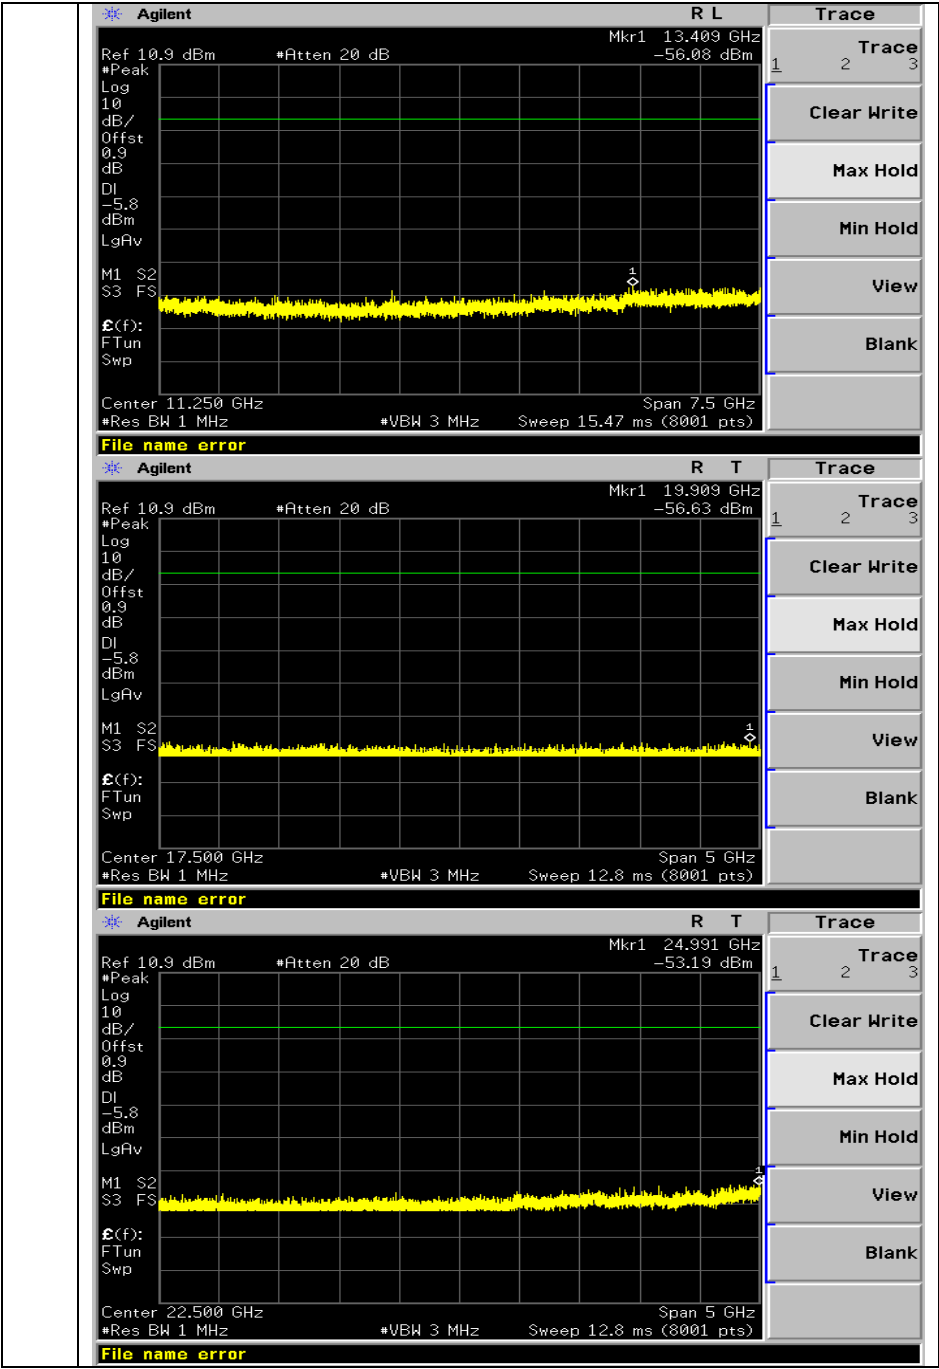

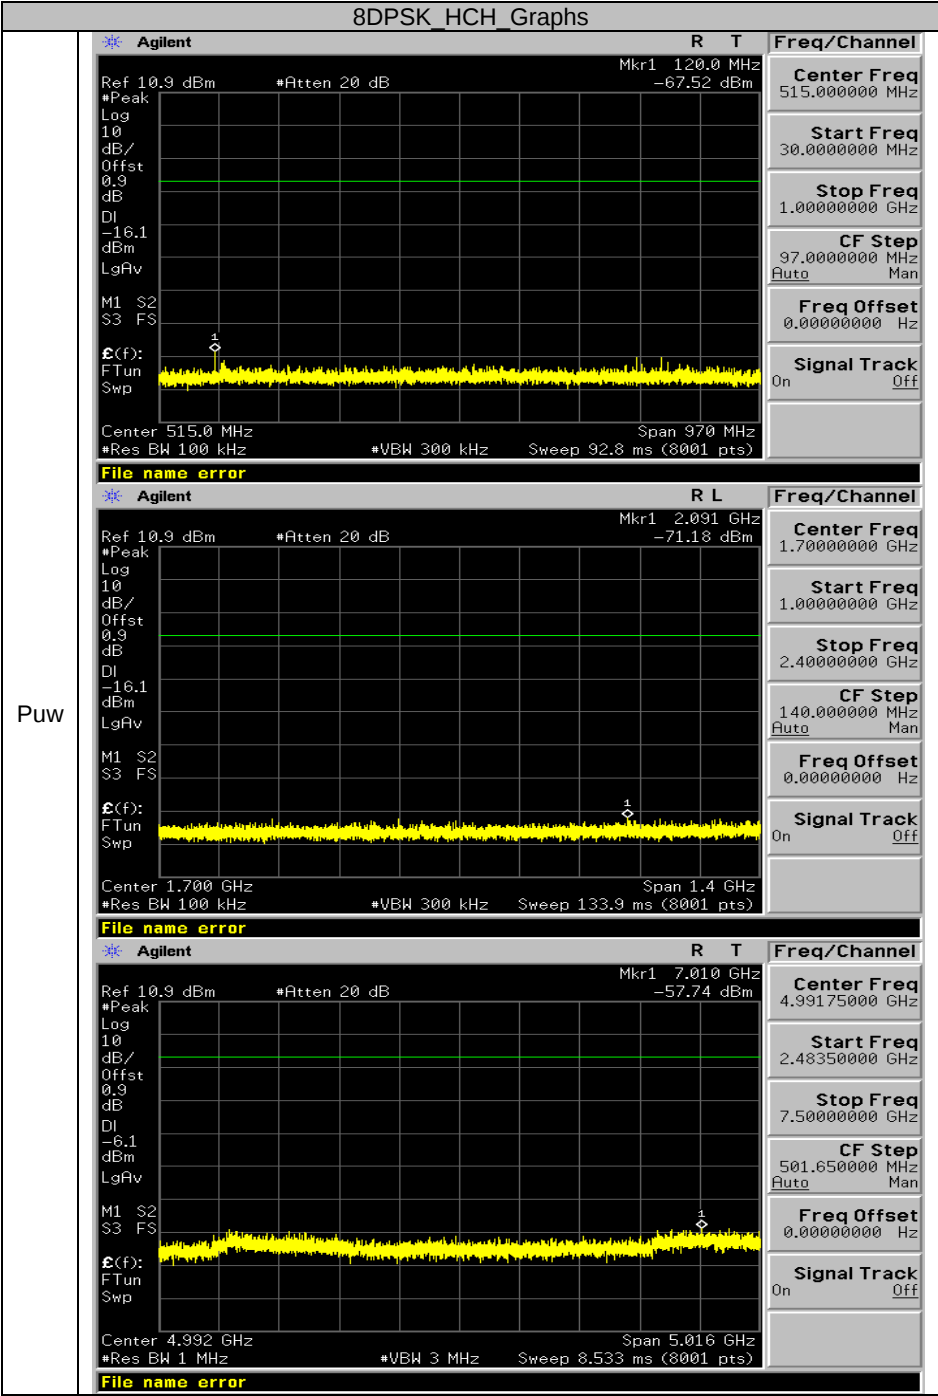

PUW

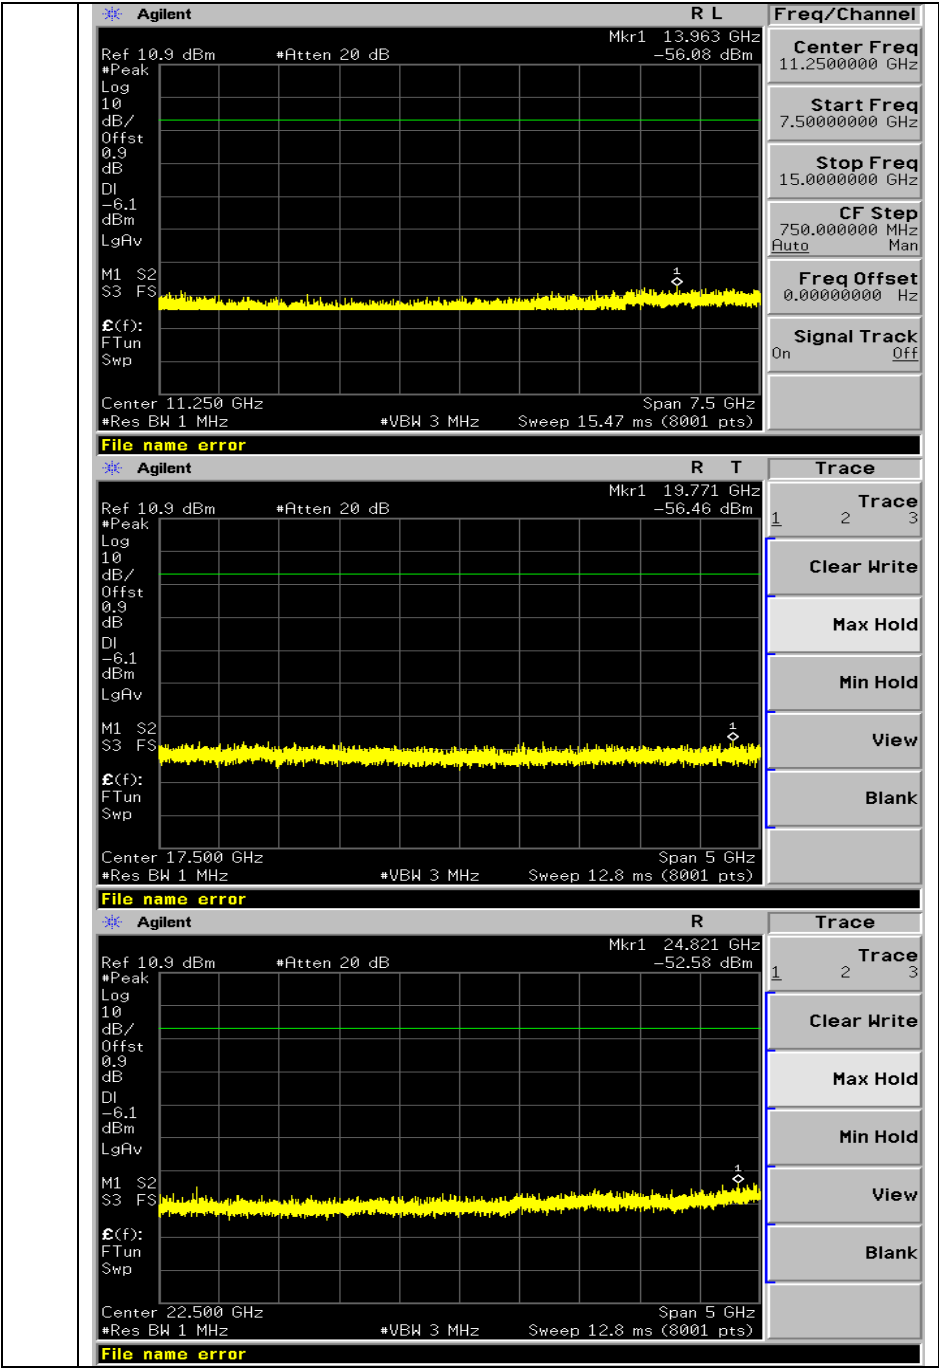

10. RADIATED EMISSION

10.1. MEASUREMENT PROCEDURE

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.


The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz 1MHz/1MHz for Peak, 1MHz/10Hz for Average


Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP

10.2. TEST SETUP

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

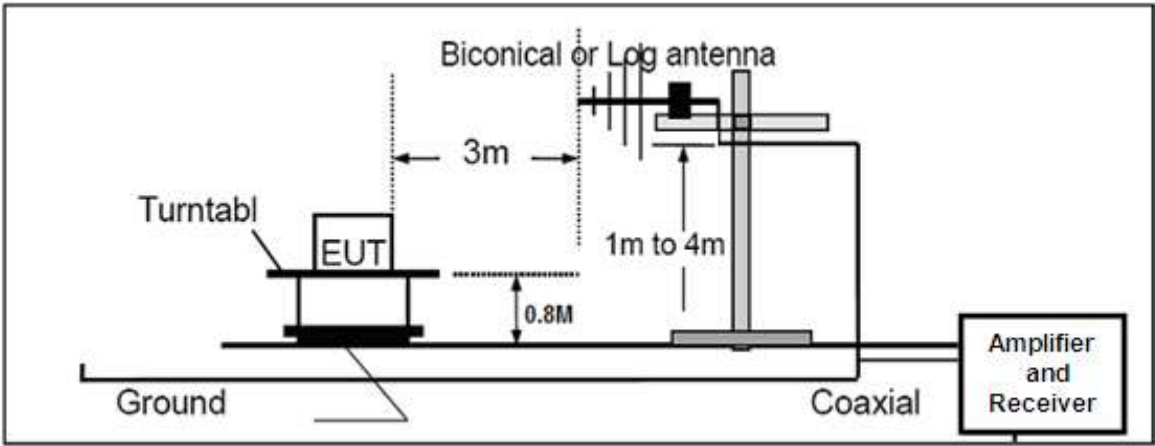

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

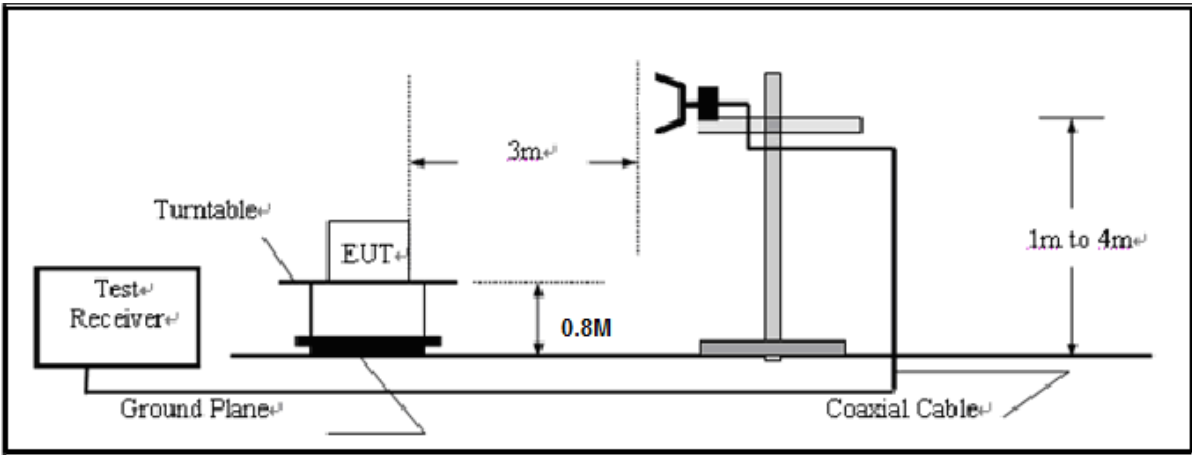


10.3. TEST RESULT

RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.


RADIATED EMISSION BELOW 1GHZ

Job No.:	20150428	Ant.Polar.:	Horizontal
Standard:	FCC Part15 Class B (30-1000MHz)	Test Distance:	3m
Test item:	Radiated Emission Measurement	Power:	AC 120V/60Hz
Temp.(C)/Hum.(%RH):	24(C)/52%RH	Date:2015-4-28	Time:17:20:46
Company:		EUT:	
Model:	BT-840	Test By:	Jimmy
Test Mode:	BT 1M 2402		

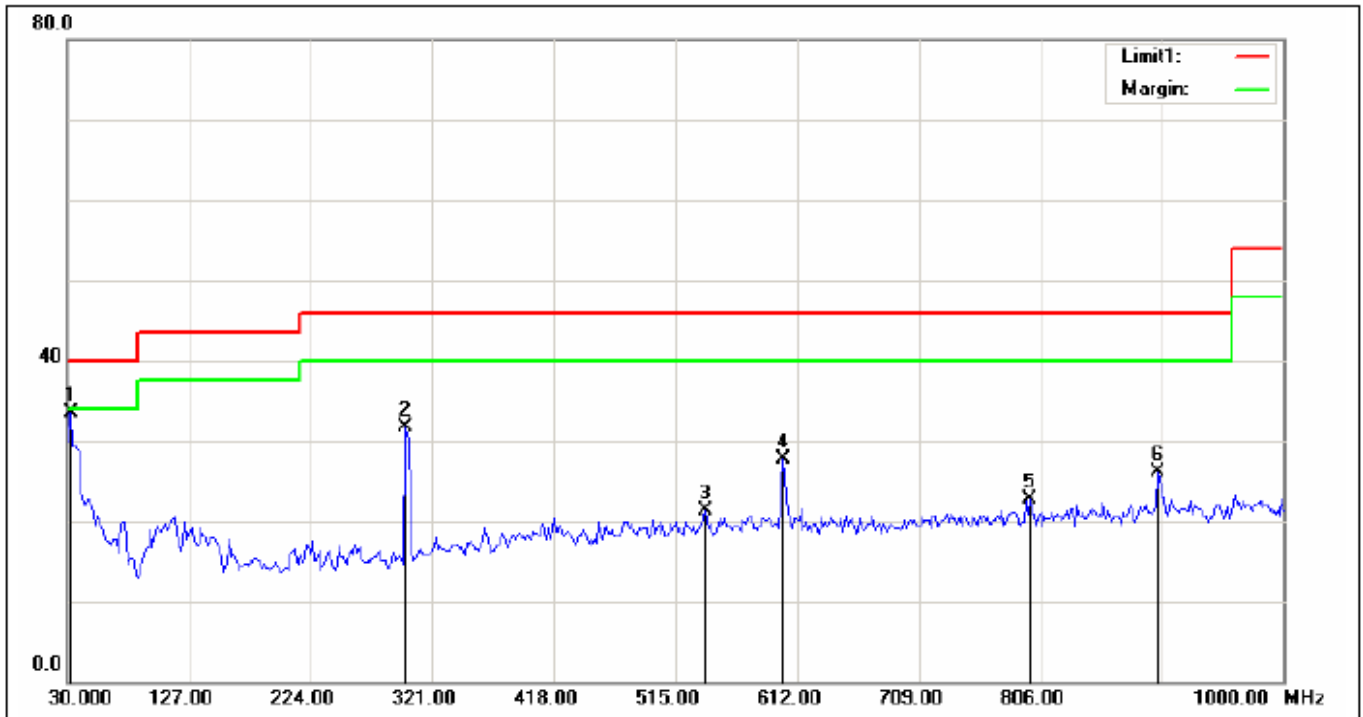


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1*	33.2333	47.24	-13.64	33.60	40.00	-6.40			peak
2	299.9833	51.29	-19.57	31.72	46.00	-14.28			peak
3	539.2500	34.56	-13.33	21.23	46.00	-24.77			peak
4	600.6833	40.62	-12.85	27.77	46.00	-18.23			peak
5	797.9167	33.92	-11.13	22.79	46.00	-23.21			peak
6	899.7667	35.97	-9.83	26.14	46.00	-19.86			peak

Job No.:	20150428	Ant.Polar.:	Vertical
Standard:	FCC Part15 Class B (30-1000MHz)	Test Distance:	3m
Test item:	Radiated Emission Measurement	Power:	AC 120V/60Hz
Temp.(C)/Hum.(%RH):	24(C)/52%RH	Date:2015-4-28	Time:17:20:07
Company:		EUT:	
Model:	BT-840	Test By:	Jimmy
Test Mode:	BT 1M 2402		

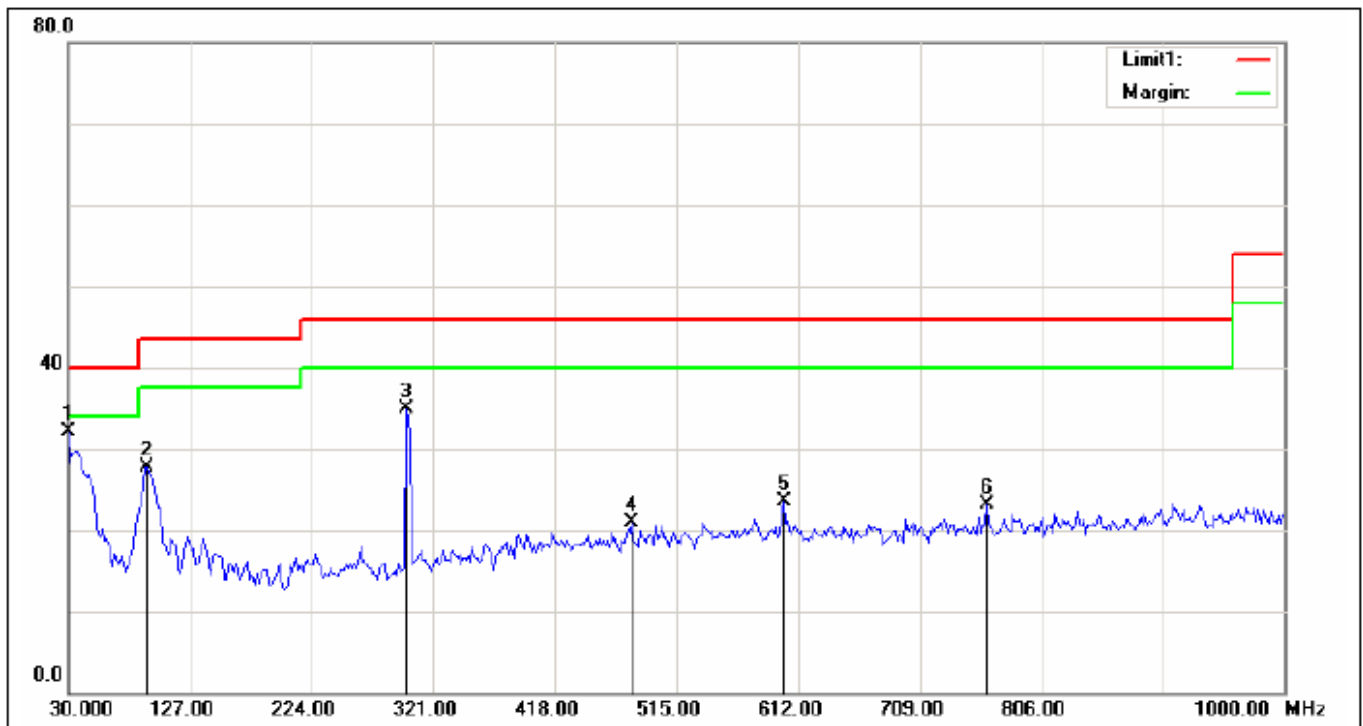


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1*	30.0000	43.68	-11.64	32.04	40.00	-7.96			peak
2	93.0500	52.18	-24.42	27.76	43.50	-15.74			peak
3	299.9833	54.55	-19.57	34.98	46.00	-11.02			peak
4	479.4333	35.24	-14.38	20.86	46.00	-25.14			peak
5	600.6833	36.38	-12.85	23.53	46.00	-22.47			peak
6	762.3500	34.10	-11.05	23.05	46.00	-22.95			peak

Job No.:	20150428	Ant.Polar.:	Horizontal
Standard:	FCC Part15 Class B (30-1000MHz)	Test Distance:	3m
Test item:	Radiated Emission Measurement	Power:	AC 120V/60Hz
Temp.(C)/Hum.(%RH):	24(C)/52%RH	Date:2015-4-28	Time:17:21:54
Company:		EUT:	
Model:	BT-840	Test By:	Jimmy
Test Mode:	BT 1M 2441		

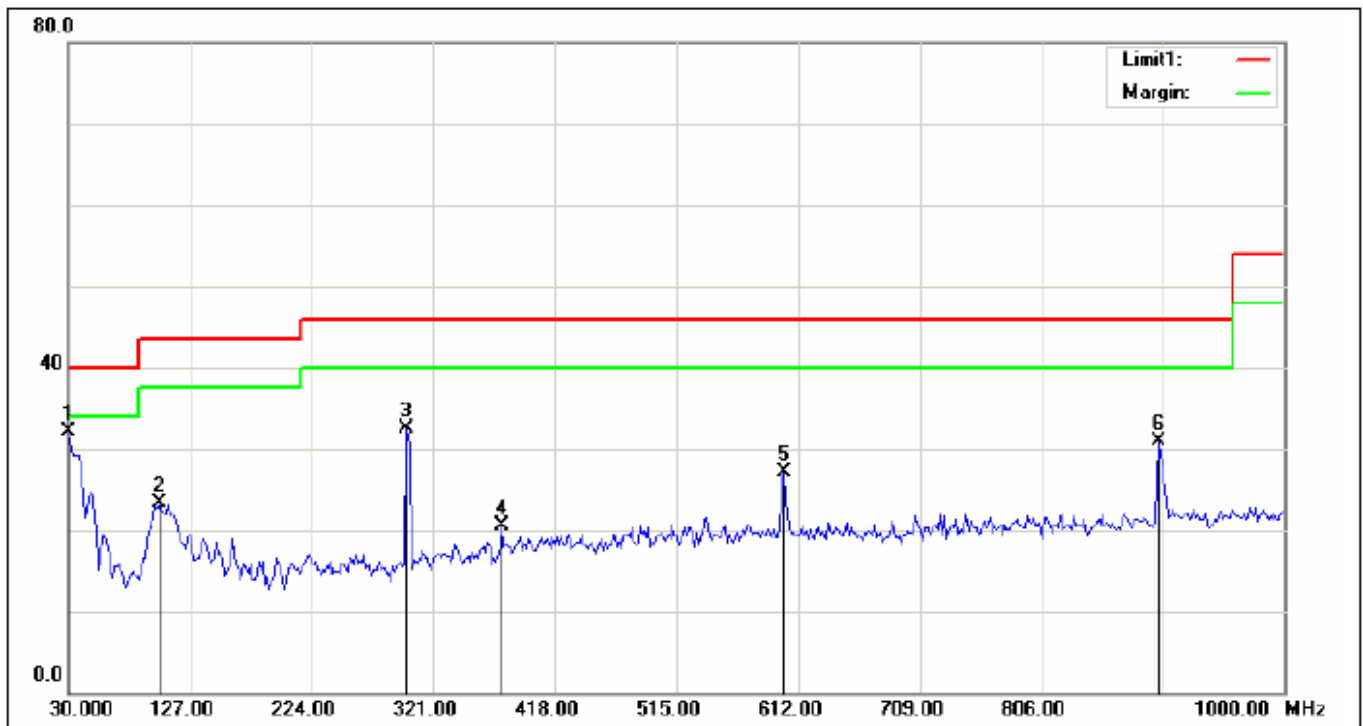


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1*	30.0000	43.81	-11.64	32.17	40.00	-7.83			peak
2	102.7500	46.41	-23.17	23.24	43.50	-20.26			peak
3	299.9833	52.03	-19.57	32.46	46.00	-13.54			peak
4	375.9667	37.19	-16.77	20.42	46.00	-25.58			peak
5	600.6833	39.90	-12.85	27.05	46.00	-18.95			peak
6	899.7667	40.65	-9.83	30.82	46.00	-15.18			peak

Job No.:	20150428	Ant.Polar.:	Vertical
Standard:	FCC Part15 Class B (30-1000MHz)	Test Distance:	3m
Test item:	Radiated Emission Measurement	Power:	AC 120V/60Hz
Temp.(C)/Hum.(%RH):	24(C)/52%RH	Date:2015-4-28	Time:17:22:53
Company:		EUT:	
Model:	BT-840	Test By:	Jimmy
Test Mode:	BT 1M 2441		

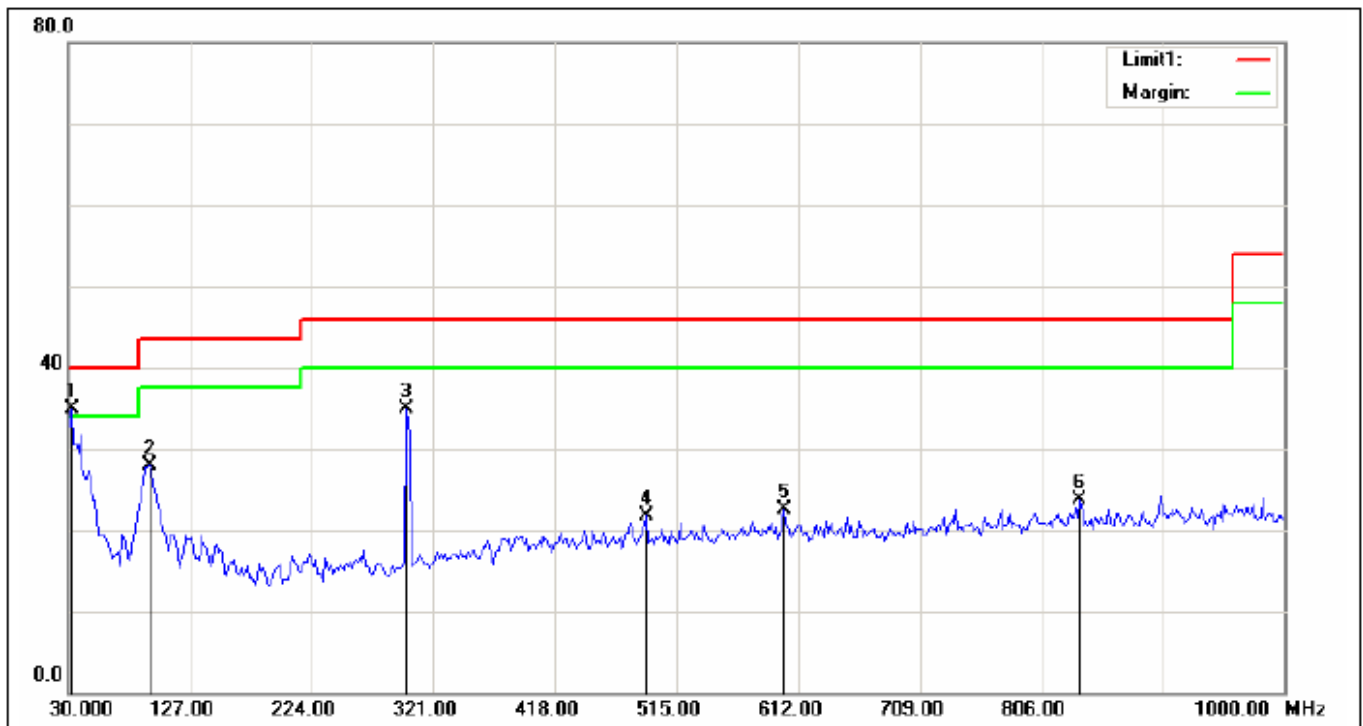


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1*	33.2333	48.49	-13.64	34.85	40.00	-5.15			peak
2	94.6667	52.20	-24.25	27.95	43.50	-15.55			peak
3	299.9833	54.52	-19.57	34.95	46.00	-11.05			peak
4	490.7500	36.11	-14.36	21.75	46.00	-24.25			peak
5	600.6833	35.26	-12.85	22.41	46.00	-23.59			peak
6	836.7167	34.43	-10.69	23.74	46.00	-22.26			peak

Job No.:	20150428	Ant.Polar.:	Horizontal
Standard:	FCC Part15 Class B (30-1000MHz)	Test Distance:	3m
Test item:	Radiated Emission Measurement	Power:	AC 120V/60Hz
Temp.(C)/Hum.(%RH):	24(C)/52%RH	Date:2015-4-28	Time:17:24:11
Company:		EUT:	
Model:	BT-840	Test By:	Jimmy
Test Mode:	BT 1M 2480		

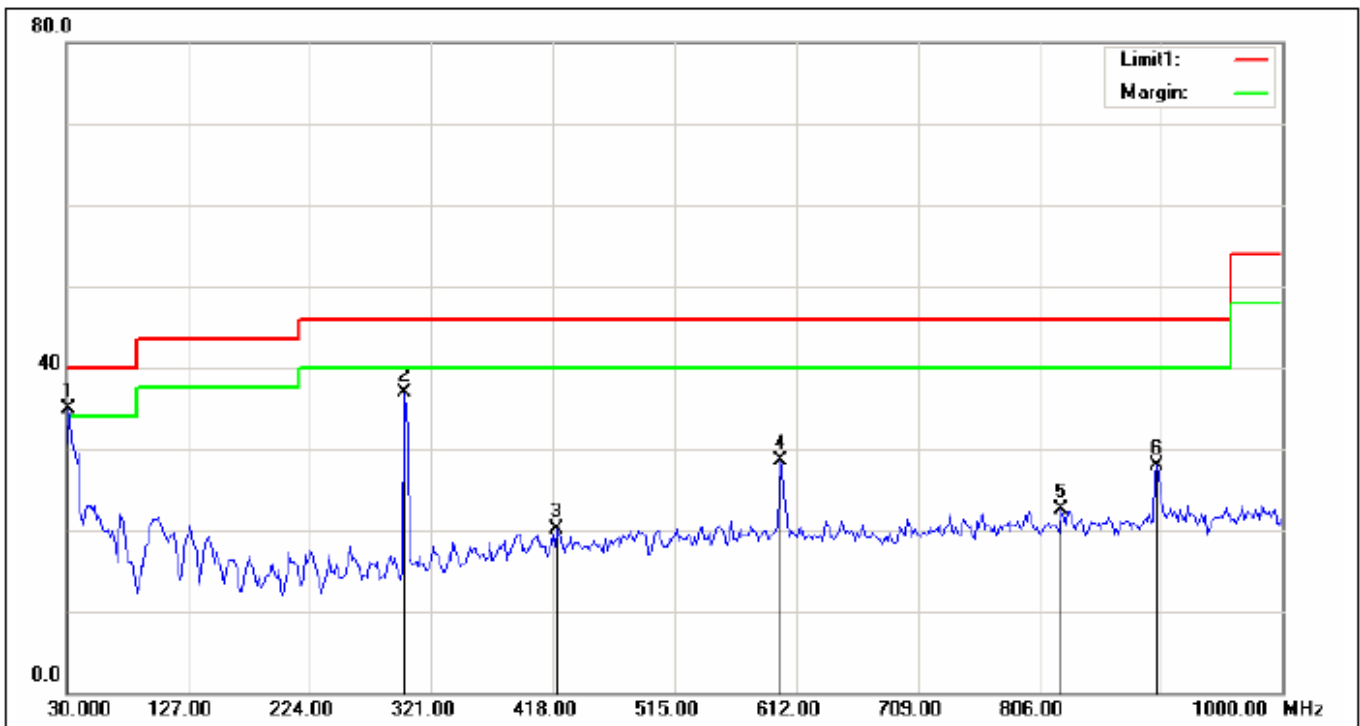

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1*	31.6167	47.59	-12.61	34.98	40.00	-5.02			peak
2	299.9833	56.47	-19.57	36.90	46.00	-9.10			peak
3	421.2333	35.48	-15.44	20.04	46.00	-25.96			peak
4	599.0667	41.34	-12.89	28.45	46.00	-17.55			peak
5	823.7833	32.92	-10.47	22.45	46.00	-23.55			peak
6	899.7667	37.75	-9.83	27.92	46.00	-18.08			peak

Job No.:	20150428	Ant.Polar.:	Vertical
Standard:	FCC Part15 Class B (30-1000MHz)	Test Distance:	3m
Test item:	Radiated Emission Measurement	Power:	AC 120V/60Hz
Temp.(C)/Hum.(%RH):	24(C)/52%RH	Date:2015-4-28	Time:17:23:36
Company:		EUT:	
Model:	BT-840	Test By:	Jimmy
Test Mode:	BT 1M 2480		

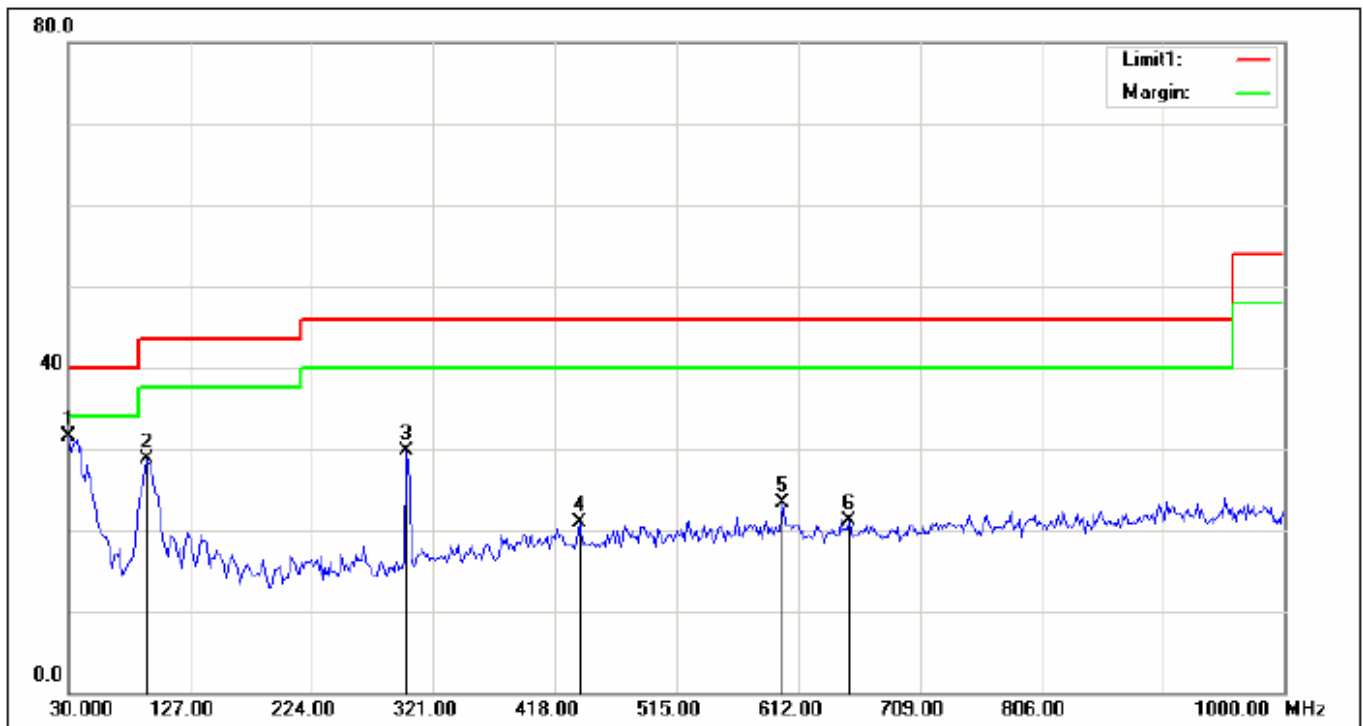

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1*	30.0000	43.07	-11.64	31.43	40.00	-8.57			peak
2	93.0500	53.03	-24.42	28.61	43.50	-14.89			peak
3	299.9833	49.26	-19.57	29.69	46.00	-16.31			peak
4	437.4000	36.61	-15.66	20.95	46.00	-25.05			peak
5	599.0667	36.16	-12.89	23.27	46.00	-22.73			peak
6	652.4167	33.50	-12.49	21.01	46.00	-24.99			peak

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
Low Channel (2402 MHz)							
4804.264	66.82	-3.62	63.2	74	-10.8	Pk	Vertical
4804.272	46.93	-3.62	43.31	54	-10.69	AV	Vertical
7206.138	64.27	-0.9	63.37	74	-10.63	pk	Vertical
7206.156	43.46	-0.9	42.56	54	-11.44	AV	Vertical
4803.959	65.26	-3.64	61.62	74	-12.38	Pk	Horizontal
4803.964	45.19	-3.64	41.55	54	-12.45	AV	Horizontal
Mid Channel (2441 MHz)							
4882.128	65.73	-3.65	62.08	74	-11.92	Pk	Vertical
4882.094	47.61	-3.65	43.96	54	-10.04	AV	Vertical
7323.228	63.57	-0.82	62.75	74	-11.25	Pk	Vertical
7323.220	46.83	-0.82	46.01	54	-7.99	AV	Vertical
4882.096	62.23	-3.68	58.55	74	-15.45	Pk	Horizontal
4882.171	47.82	-3.68	44.14	54	-9.86	AV	Horizontal
High Channel (2480 MHz)							
4960.260	63.24	-3.59	59.65	74	-14.35	pk	Vertical
4960.325	45.37	-3.59	41.78	54	-12.22	AV	Vertical
4960.190	64.48	-3.59	60.89	74	-13.11	pk	Horizontal
4960.157	46.51	-3.59	42.92	54	-11.08	AV	Horizontal

Note:

1) 30MHz~25GHz:(Scan with GFSK, π/4-DQPSK,8DPSK, the worst casw is GFSK Mode)

2) Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Emission Level = Meter Reading + Factor

Margin = Emission Leve - Limit

RESULT: PASS

11. BAND EDGE EMISSION


11.1. MEASUREMENT PROCEDURE

1. The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100kHz. The video bandwidth is set to 300kHz.
2. Transmitter set to the normal hopping mode at 2.4 and 2.4835 GHz.

11.2. TEST SET-UP

Radiated same as 10.2

Conducted set up



11.3. Radiated TEST RESULT

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
GFSK							
2399.9	69.44	-12.99	56.45	74	-17.55	peak	Vertical
2399.9	54.13	-12.99	41.14	54	-12.86	AVG	Vertical
2399.9	71.62	-12.99	58.63	74	-15.37	peak	Horizontal
2399.9	54.76	-12.99	41.77	54	-12.23	AVG	Horizontal
2483.6	71.35	-12.78	58.57	74	-15.43	peak	Vertical
2483.6	54.61	-12.78	41.83	54	-12.17	AVG	Vertical
2483.6	71.86	-12.78	59.08	74	-14.92	peak	Horizontal
2483.6	54.11	-12.78	41.33	54	-12.67	AVG	Horizontal
π/4-DQPSK							
2399.9	71.22	-12.99	58.23	74	-15.77	peak	Vertical
2399.9	54.34	-12.99	41.35	54	-12.65	AVG	Vertical
2399.9	70.67	-12.99	57.68	74	-16.32	peak	Horizontal
2399.9	55.59	-12.99	42.6	54	-11.4	AVG	Horizontal
2483.6	71.16	-12.78	58.38	74	-15.62	peak	Vertical
2483.6	58.34	-12.78	45.56	54	-8.44	AVG	Vertical
2483.6	71.86	-12.78	59.08	74	-14.92	peak	Horizontal
2483.6	54.27	-12.78	41.49	54	-12.51	AVG	Horizontal
8DPSK							
2399.9	71.18	-12.99	58.19	74	-15.81	peak	Vertical
2399.9	55.48	-12.99	42.49	54	-11.51	AVG	Vertical
2399.9	70.29	-12.99	57.3	74	-16.7	peak	Horizontal
2399.9	56.55	-12.99	43.56	54	-10.44	AVG	Horizontal
2483.6	71.38	-12.78	58.6	74	-15.4	peak	Vertical
2483.6	55.76	-12.78	42.98	54	-11.02	AVG	Vertical
2483.6	71.42	-12.78	58.64	74	-15.36	peak	Horizontal
2483.6	54.39	-12.78	41.61	54	-12.39	AVG	Horizontal

RESULT: PASS

Note: Factor=Antenna Factor + Cable loss - Amplifier gain,

Emission Level = Meter Reading + Factor

Margin= Emission Level -Limit.


The “Factor” value can be calculated automatically by software of measurement system.



11.4 Conducted TEST RESULT


Mode	Channel	Carrier Frequency [MHz]	Frequency Hopping	Max Spurious Level [dBm]	Verdict
GFSK	LCH	2402	Off	-59.136	PASS
			On	-54.659	PASS
GFSK	HCH	2480	Off	-60.661	PASS
			On	-58.587	PASS
$\pi/4$ DQPSK	LCH	2402	Off	-57.275	PASS
$\pi/4$ DQPSK	HCH	2480	Off	-61.148	PASS
8DPSK	LCH	2402	Off	-58.098	PASS
8DPSK	HCH	2480	Off	-60.078	PASS

Note: All modes were tested, only the worst case record in the report.

Test Graph

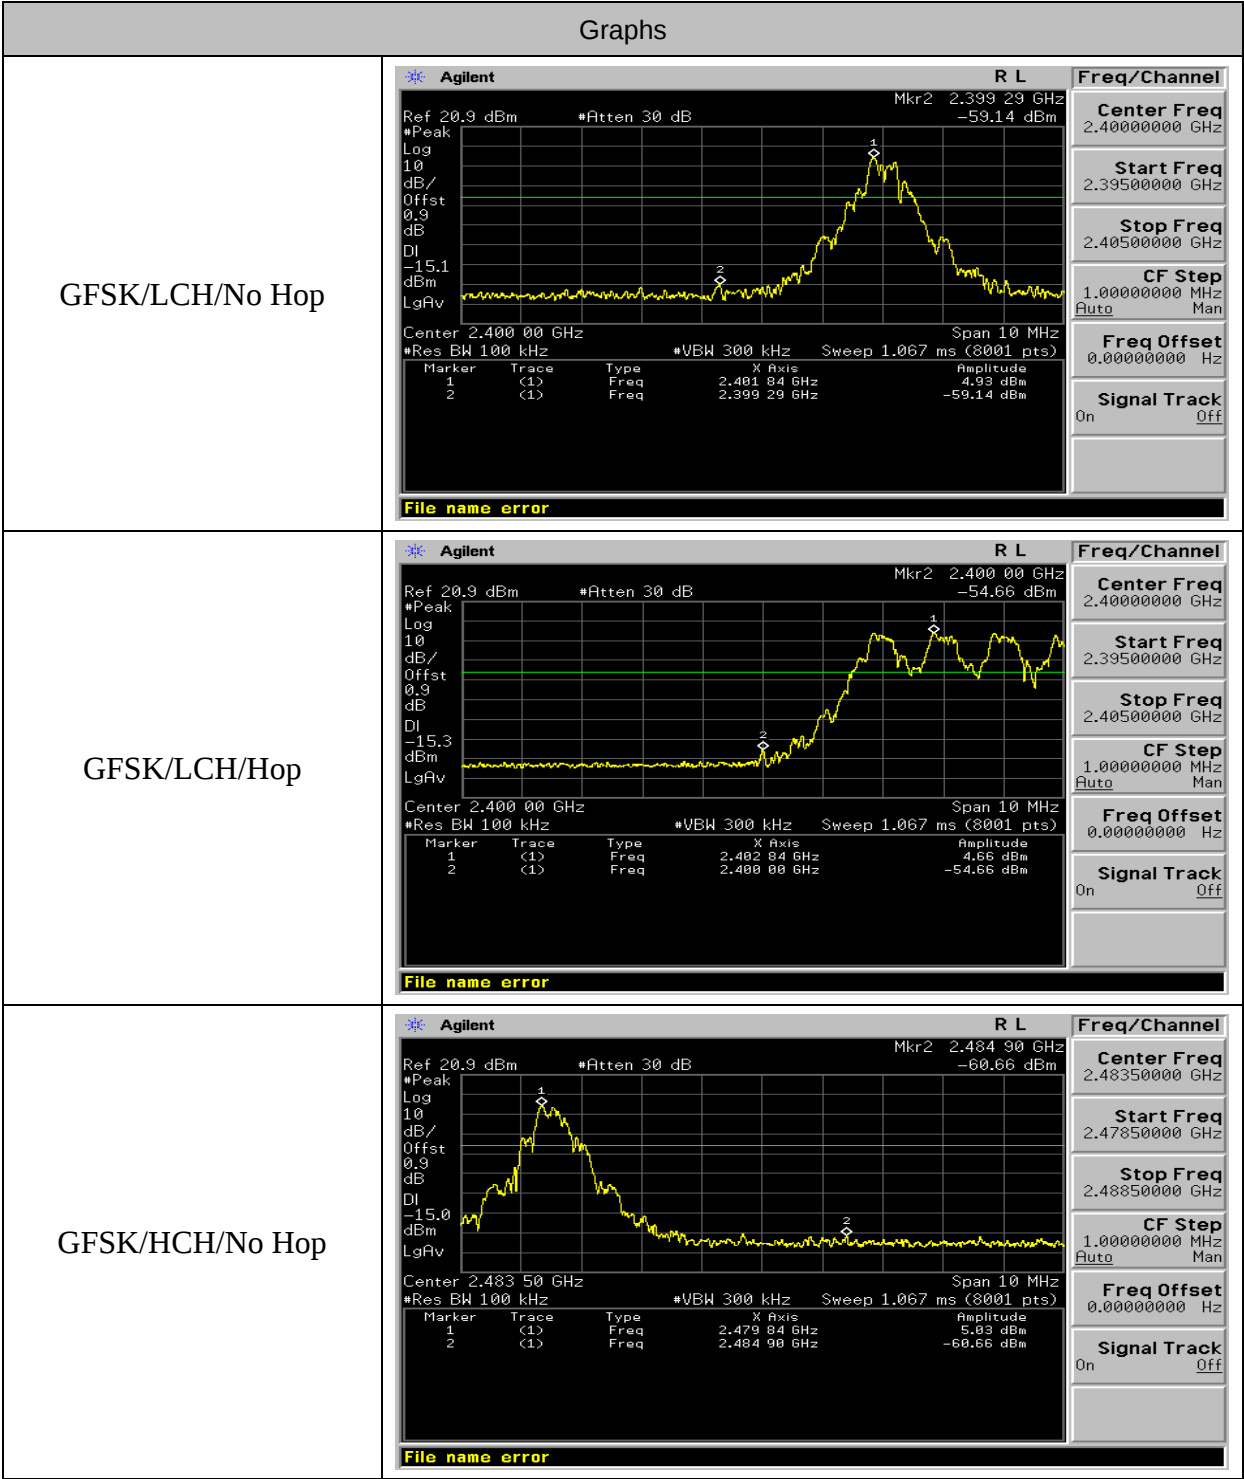

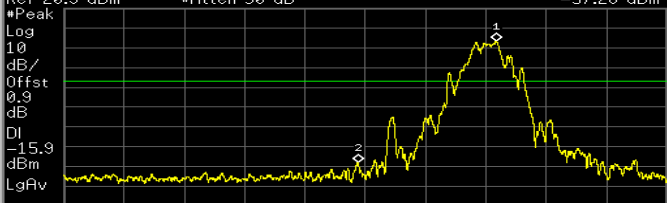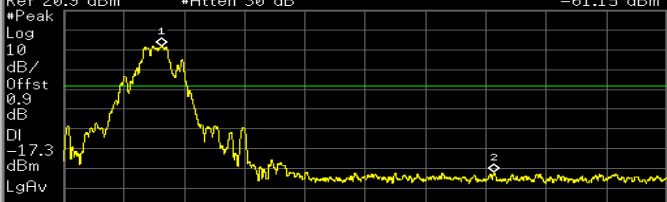GFSK/HCH/Hop	Agilent Ref 20.9 dBm •Atten 30 dB Mkr2 2.484 82 GHz -58.59 dBm #Peak Log 10 dB/ Offst 0.9 dB DI -15.4 dBm LgRv  Center 2.483 50 GHz Span 10 MHz •Res BW 100 kHz •VBW 300 kHz Sweep 1.067 ms (8001 pts) <table><tr><th>Marker</th><th>Trace</th><th>Type</th><th>X Axis</th><th>Amplitude</th></tr><tr><td>1</td><td>(1)</td><td>Freq</td><td>2.479 84 GHz</td><td>4.64 dBm</td></tr><tr><td>2</td><td>(1)</td><td>Freq</td><td>2.484 82 GHz</td><td>-58.59 dBm</td></tr></table> File name error Freq/Channel Center Freq 2.48350000 GHz Start Freq 2.47850000 GHz Stop Freq 2.48850000 GHz CF Step 1.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off	Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	2.479 84 GHz	4.64 dBm	2	(1)	Freq	2.484 82 GHz	-58.59 dBm
Marker	Trace	Type	X Axis	Amplitude												
1	(1)	Freq	2.479 84 GHz	4.64 dBm												
2	(1)	Freq	2.484 82 GHz	-58.59 dBm												
π /4DQPSK/LCH/No Hop	Agilent Ref 20.9 dBm •Atten 30 dB Mkr2 2.399 87 GHz -57.28 dBm #Peak Log 10 dB/ Offst 0.9 dB DI -15.9 dBm LgRv  Center 2.400 00 GHz Span 10 MHz •Res BW 100 kHz •VBW 300 kHz Sweep 1.067 ms (8001 pts) <table><tr><th>Marker</th><th>Trace</th><th>Type</th><th>X Axis</th><th>Amplitude</th></tr><tr><td>1</td><td>(1)</td><td>Freq</td><td>2.402 17 GHz</td><td>4.15 dBm</td></tr><tr><td>2</td><td>(1)</td><td>Freq</td><td>2.399 87 GHz</td><td>-57.28 dBm</td></tr></table> File name error Freq/Channel Center Freq 2.40000000 GHz Start Freq 2.39500000 GHz Stop Freq 2.40500000 GHz CF Step 1.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off	Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	2.402 17 GHz	4.15 dBm	2	(1)	Freq	2.399 87 GHz	-57.28 dBm
Marker	Trace	Type	X Axis	Amplitude												
1	(1)	Freq	2.402 17 GHz	4.15 dBm												
2	(1)	Freq	2.399 87 GHz	-57.28 dBm												
π /4DQPSK/HCH/No Hop	Agilent Ref 20.9 dBm •Atten 30 dB Mkr2 2.485 64 GHz -61.15 dBm #Peak Log 10 dB/ Offst 0.9 dB DI -17.3 dBm LgRv  Center 2.483 50 GHz Span 10 MHz •Res BW 100 kHz •VBW 300 kHz Sweep 1.067 ms (8001 pts) <table><tr><th>Marker</th><th>Trace</th><th>Type</th><th>X Axis</th><th>Amplitude</th></tr><tr><td>1</td><td>(1)</td><td>Freq</td><td>2.480 13 GHz</td><td>2.67 dBm</td></tr><tr><td>2</td><td>(1)</td><td>Freq</td><td>2.485 64 GHz</td><td>-61.15 dBm</td></tr></table> File name error Freq/Channel Center Freq 2.48350000 GHz Start Freq 2.47850000 GHz Stop Freq 2.48850000 GHz CF Step 1.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off	Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	2.480 13 GHz	2.67 dBm	2	(1)	Freq	2.485 64 GHz	-61.15 dBm
Marker	Trace	Type	X Axis	Amplitude												
1	(1)	Freq	2.480 13 GHz	2.67 dBm												
2	(1)	Freq	2.485 64 GHz	-61.15 dBm												

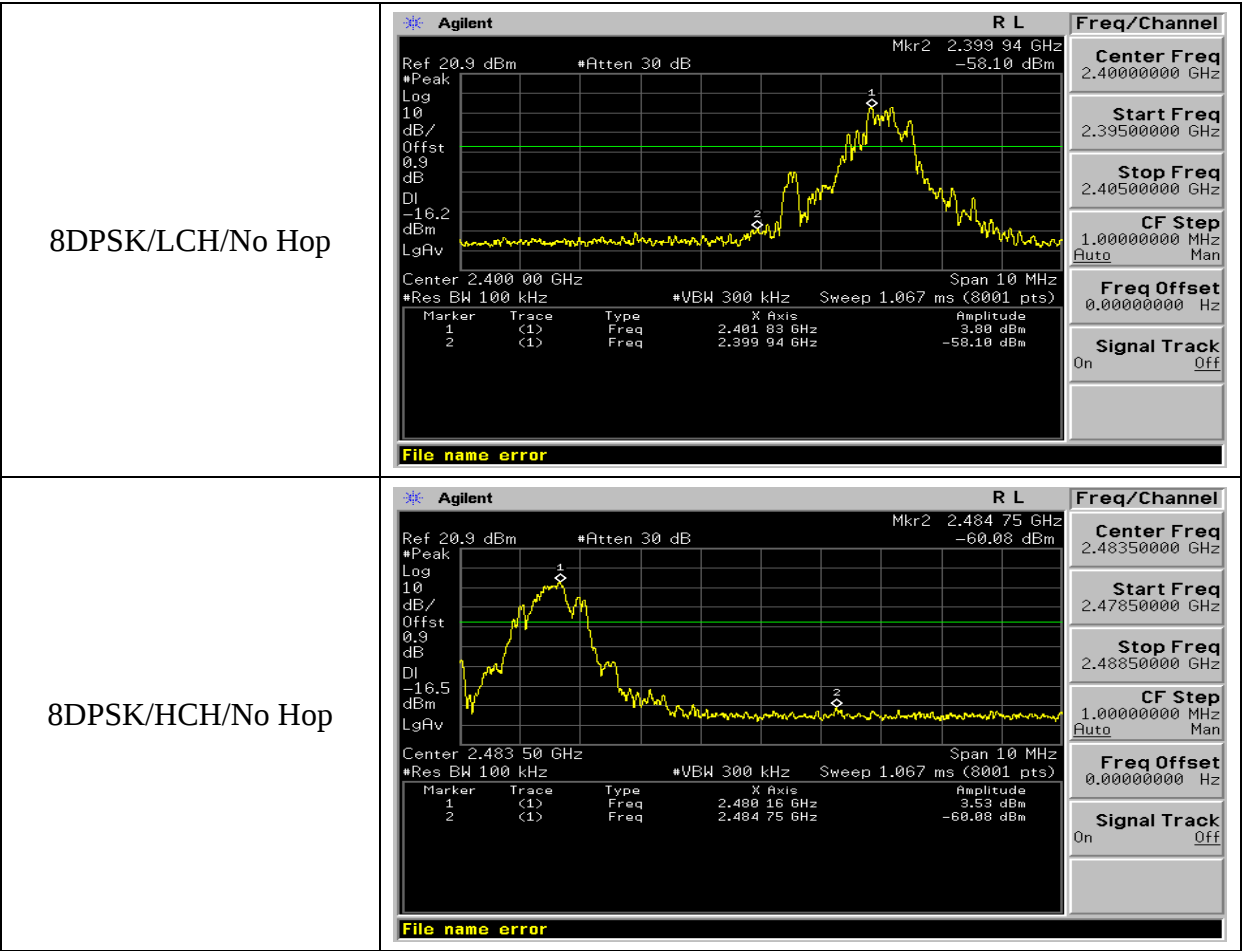

12. NUMBER OF HOPPING FREQUENCY

12.1. MEASUREMENT PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer Start = 2.4GHz Stop = 2.4835GHz
4. Set the Spectrum Analyzer as RBW>=1%span, VBW>=RBW.

12.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 8.2

12.3. MEASUREMENT EQUIPMENT USED


The same as described in section 6

12.4. LIMITS AND MEASUREMENT RESULT

Mode	Channel.	Number of Hopping Channel	Verdict
GFSK	Hop	79	PASS

Note: All modes were tested, only the worst case record in the report.

Test Graph

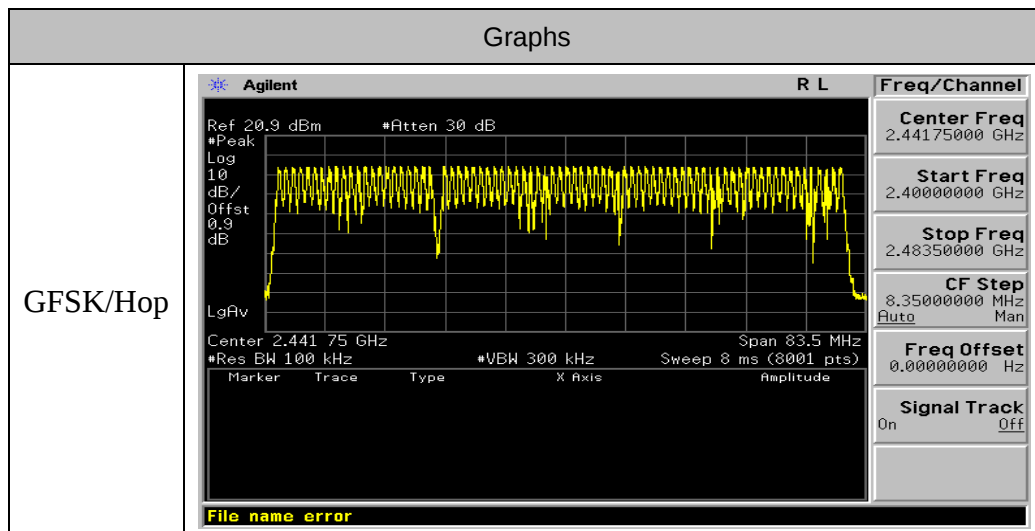

13. TIME OF OCCUPANCY (DWELL TIME)

13.1. MEASUREMENT PROCEDURE

1. Place the EUT on the table and set it in transmitting mode
2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer.
3. Set Span = zero span, centered on a hopping channel
4. Set the spectrum analyzer as RBW=1MHz, VBW>=RBW, Span = 0 Hz

13.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 8.2

13.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6


13.4. LIMITS AND MEASUREMENT RESULT

The Dwell Time=Burst Width*Total Hops. The detailed calculations are showed as follows:

- The duration for dwell time calculation: $0.4[s] * \text{hopping number} = 0.4[s] * 79[\text{ch}] = 31.6[s * \text{ch}]$;
- The burst width [ms/hop/ch], which is directly measured, refers to the duration on one channel hop.
- The hops per second for all channels: The selected EUT Conf uses a slot type of 5-Tx&1-Rx and a hopping rate of 1600 [ch*hop/s] for all channels. So the final hopping rate for all channels is $1600/6 = 266.67 [\text{ch} * \text{hop/s}]$
- The hops per second on one channel: $266.67 [\text{ch} * \text{hops/s}] / 79 [\text{ch}] = 3.38 [\text{hop/s}]$;
- The total hops for all channels within the dwell time calculation duration: $3.38 [\text{hop/s}] * 31.6[s * \text{ch}] = 106.67 [\text{hop} * \text{ch}]$;
- The dwell time for all channels hopping: $106.67 [\text{hop} * \text{ch}] * \text{Burst Width} [\text{ms/hop/ch}]$.

Mode	Channel.	Burst Width [ms/hop/ch]	Total Hops[hop*ch]	Dwell Time[ms]	Verdict	Limit (ms)
GFSK	LCH	2.896	106.67	309.872	PASS	400
GFSK	MCH	2.896	106.67	309.872	PASS	400
GFSK	HCH	2.896	106.67	309.872	PASS	400

Test Graph

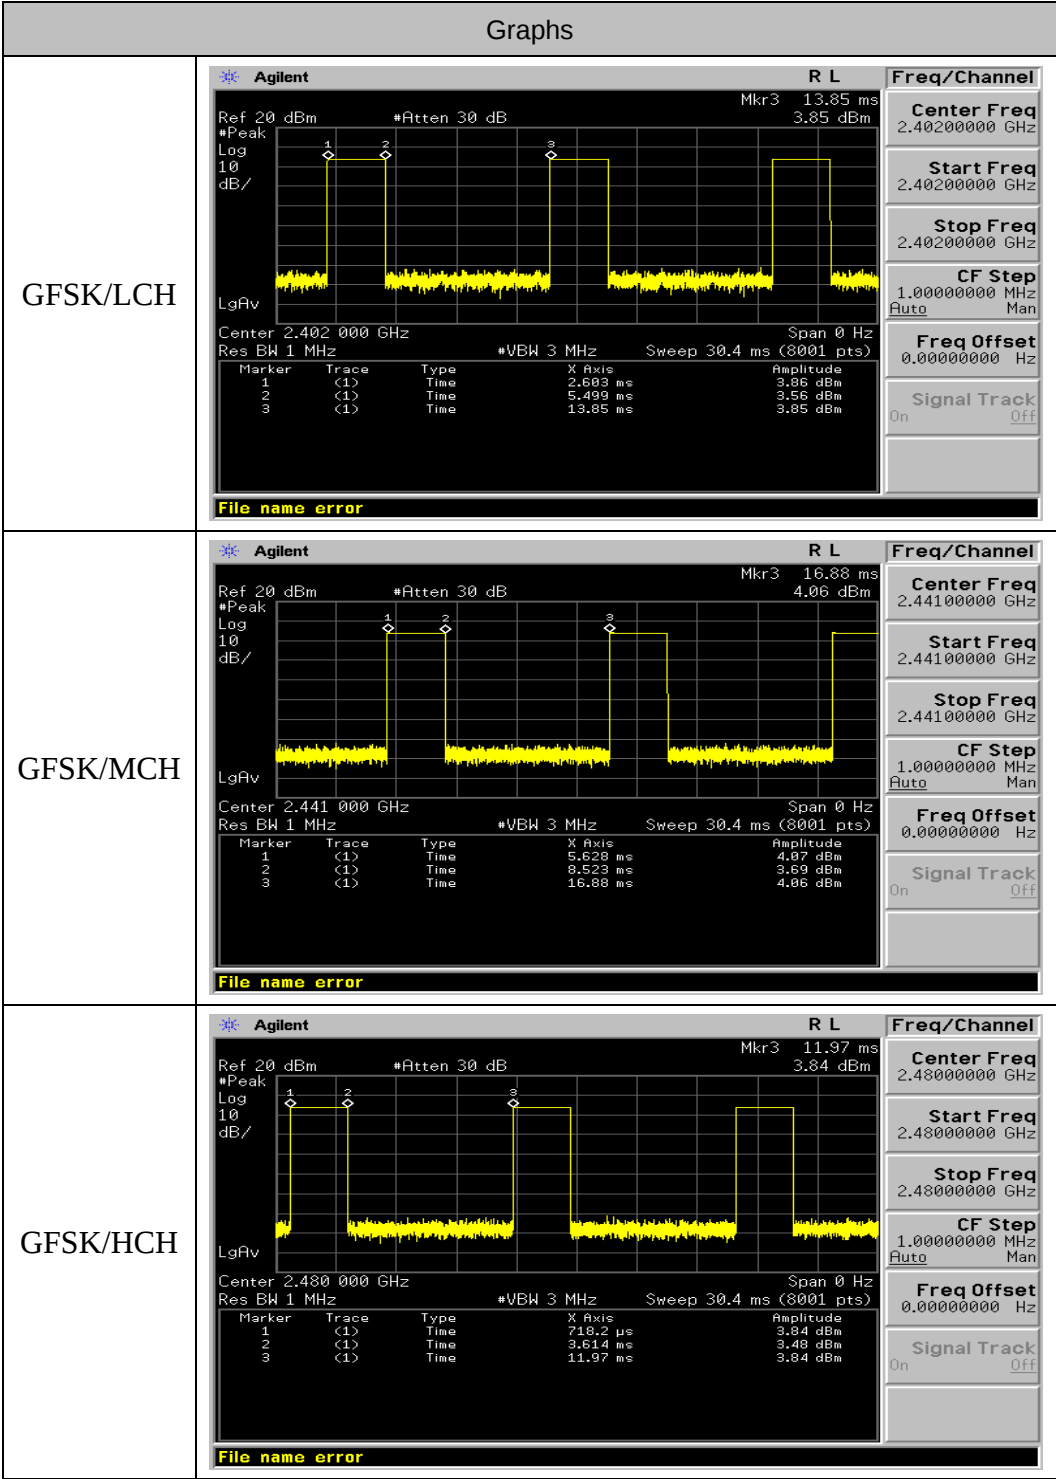

14. FREQUENCY SEPARATION

14.1. MEASUREMENT PROCEDURE

1. Place the EUT on the table and set it in transmitting mode
2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer
3. Set Span = wide enough to capture the peaks of two adjacent channels Resolution (or IF) Bandwidth (RBW) $\geq 1\%$ of the span Video (or Average) Bandwidth (VBW) $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold

14.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 6.2

14.3. MEASUREMENT EQUIPMENT USED


The same as described in section 6.3

14.4. LIMITS AND MEASUREMENT RESULT

Mode	Channel.	Carrier Frequency Separation [MHz]	Verdict
8DPSK	Hop	1.002	PASS

Note: All modes were tested, only the worst case record in the report.

Test Graph

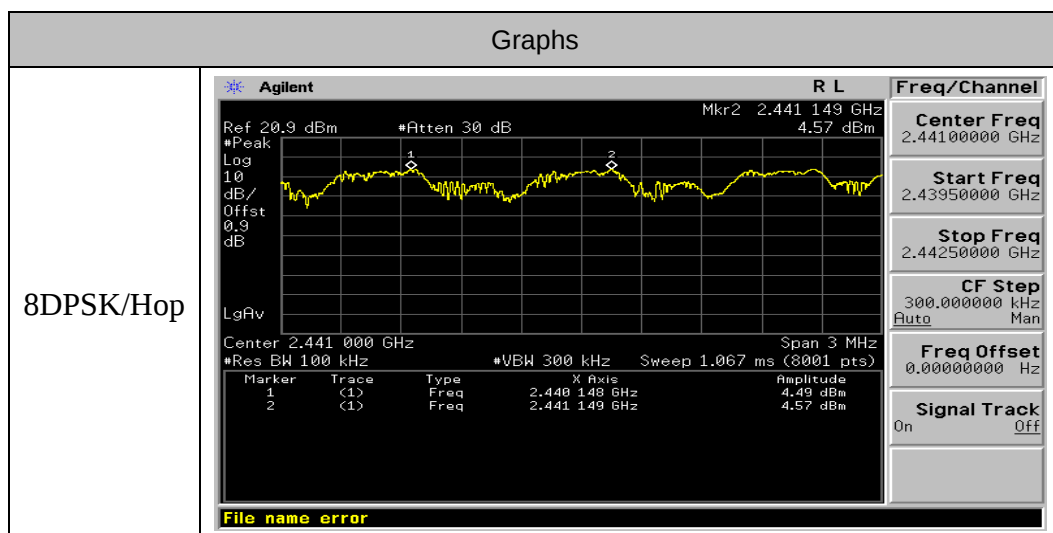

15. FCC LINE CONDUCTED EMISSION TEST


15.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage	
	Q.P.(dBuV)	Average(dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Note:

1. The lower limit shall apply at the transition frequency.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

15.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

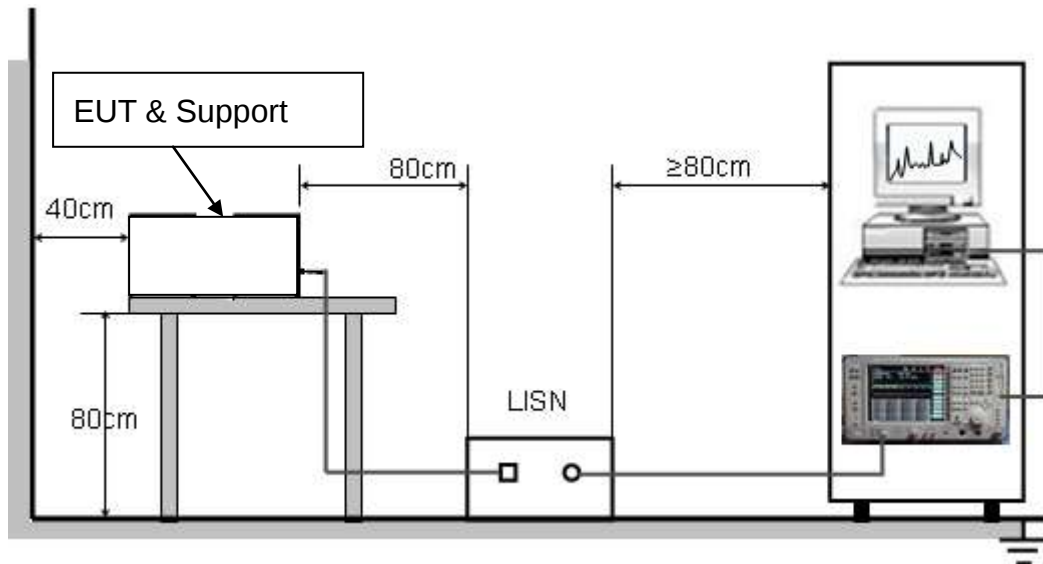

15.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
2. Support equipment, if needed, was placed as per ANSI C63.4.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
4. All support equipments received AC120V/60Hz power from a LISN, if any.
5. The EUT received DC charging voltage by adapter which received 120V/60Hz power by a LISN..
6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.
9. The test mode(s) were scanned during the preliminary test.


Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

15.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
3. The test data of the worst case condition(s) was reported on the Summary Data page.

15.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

Line Conducted Emission Test Line 1-L

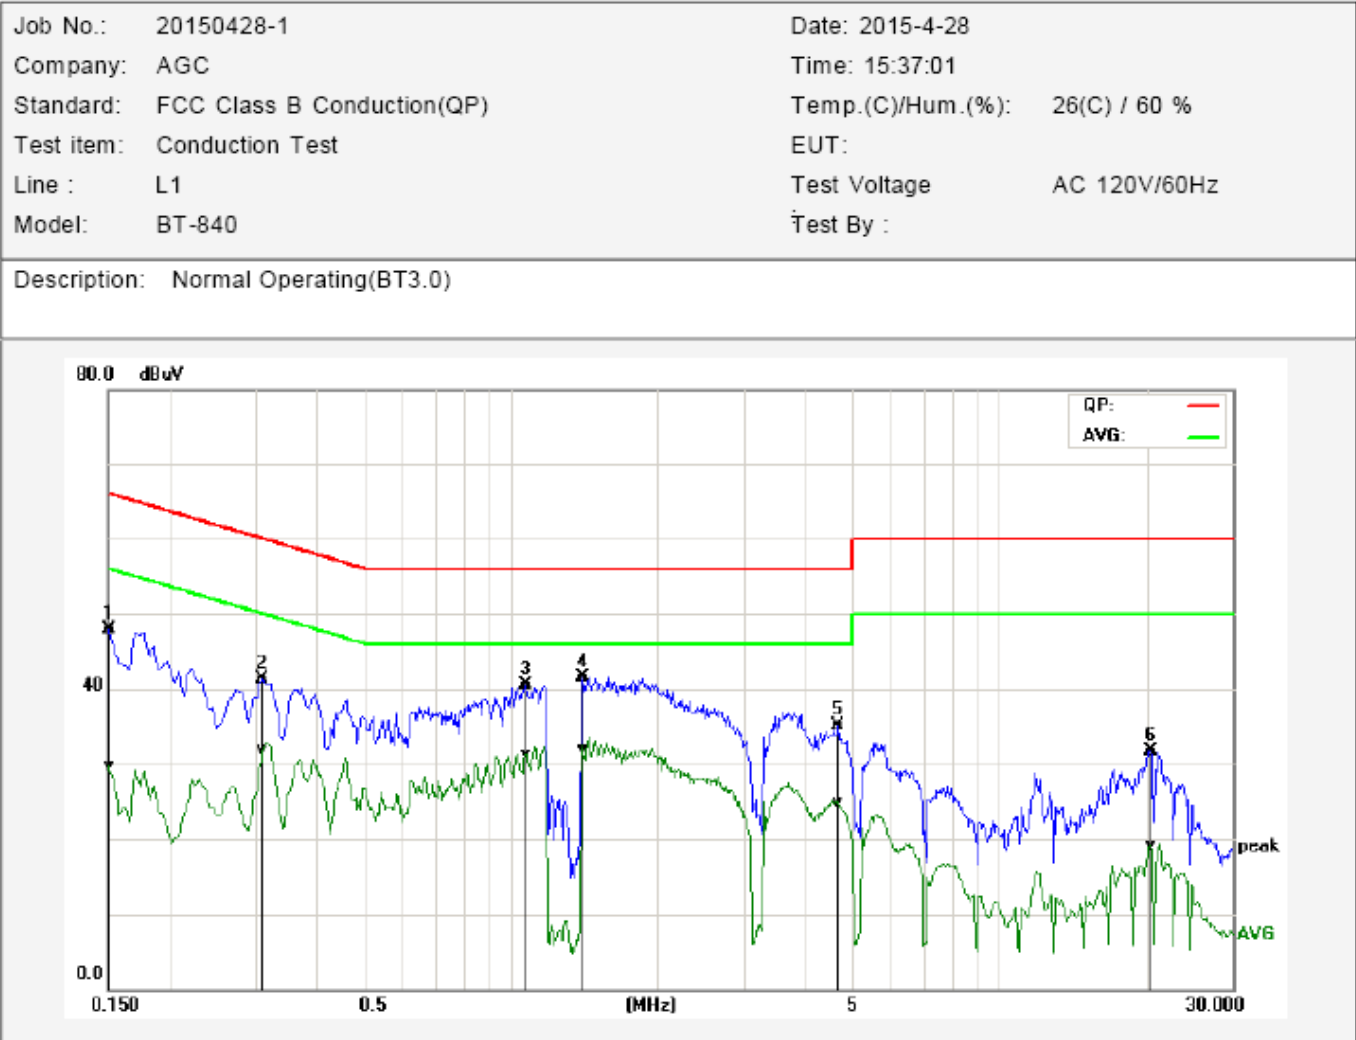


No.	Frequency	QuasiPeak reading	Average reading	Correction factor	QuasiPeak result	Average result	QuasiPeak limit	Average limit	QuasiPeak margin	Average margin	Remark
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1P	0.1500	38.42	20.10	9.58	48.00	29.68	65.99	56.00	-17.99	-26.32	Pass
2P	0.3100	31.70	22.18	9.69	41.39	31.87	59.97	49.97	-18.58	-18.10	Pass
3P	1.0740	30.73	21.66	9.71	40.44	31.37	56.00	46.00	-15.56	-14.63	Pass
4*	1.4060	31.81	22.26	9.72	41.53	31.98	56.00	46.00	-14.47	-14.02	Pass
5P	4.6860	25.40	15.25	9.68	35.08	24.93	56.00	46.00	-20.92	-21.07	Pass
6P	20.4060	21.84	9.36	9.83	31.67	19.19	60.00	50.00	-28.33	-30.81	Pass

Line Conducted Emission Test Line 2-N

Job No.:	20150428-1	Date:	2015-4-28
Company:	AGC	Time:	15:33:56
Standard:	FCC Class B Conduction(QP)	Temp.(C)/Hum.(%):	26(C) / 60 %
Test item:	Conduction Test	EUT:	
Line :	N	Test Voltage	AC 120V/60Hz
Model:	BT-840	Test By :	

Description: Normal Operating(BT3.0)

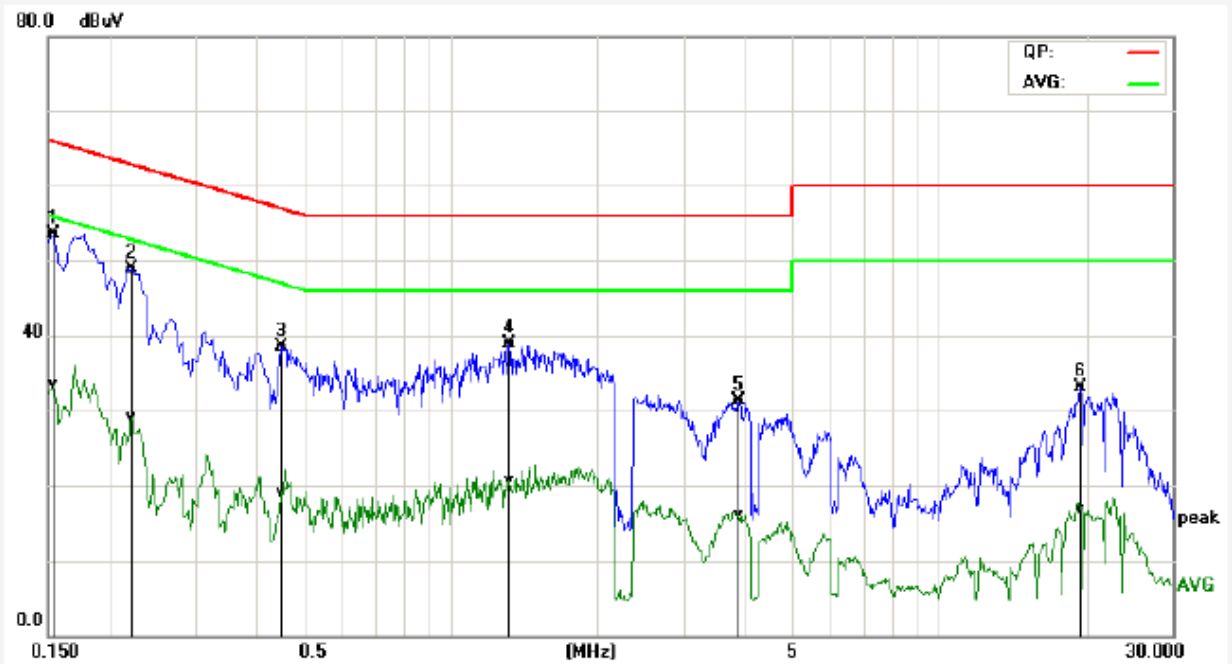

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1*	0.1539	43.78	23.65	9.78	53.56	33.43	65.78	55.79	-12.22	-22.36	Pass
2P	0.2220	39.04	19.34	9.78	48.82	29.12	62.74	52.74	-13.92	-23.62	Pass
3P	0.4500	28.74	9.43	9.70	38.44	19.13	56.87	46.88	-18.43	-27.75	Pass
4P	1.3180	29.03	10.91	9.79	38.82	20.70	56.00	46.00	-17.18	-25.30	Pass
5P	3.8900	21.50	6.32	9.76	31.26	16.08	56.00	46.00	-24.74	-29.92	Pass
6P	19.4660	23.44	7.08	9.73	33.17	16.81	60.00	50.00	-26.83	-33.19	Pass

APPENDIX A: PHOTOGRAPHS OF TEST SETUP

FCC LINE CONDUCTED EMISSION TEST SETUP



FCC RADIATED EMISSION TEST SETUP




APPENDIX B: PHOTOGRAPHS OF EUT


TOTAL VIEW OF EUT



TOP VIEW OF EUT

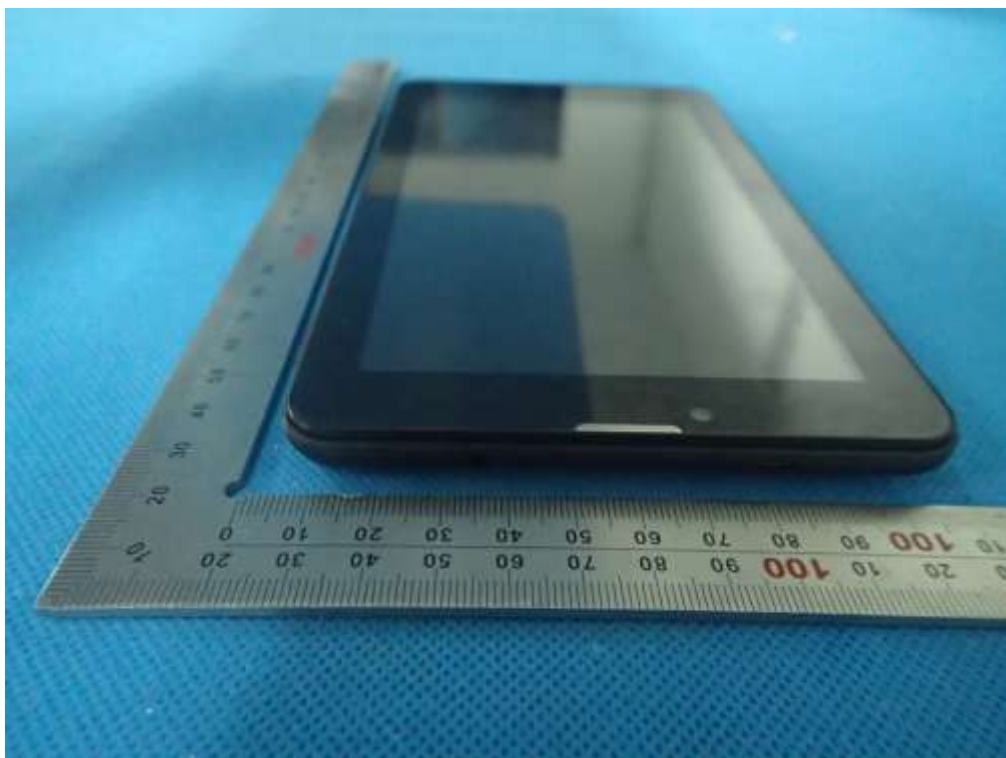

BOTTOM VIEW OF EUT

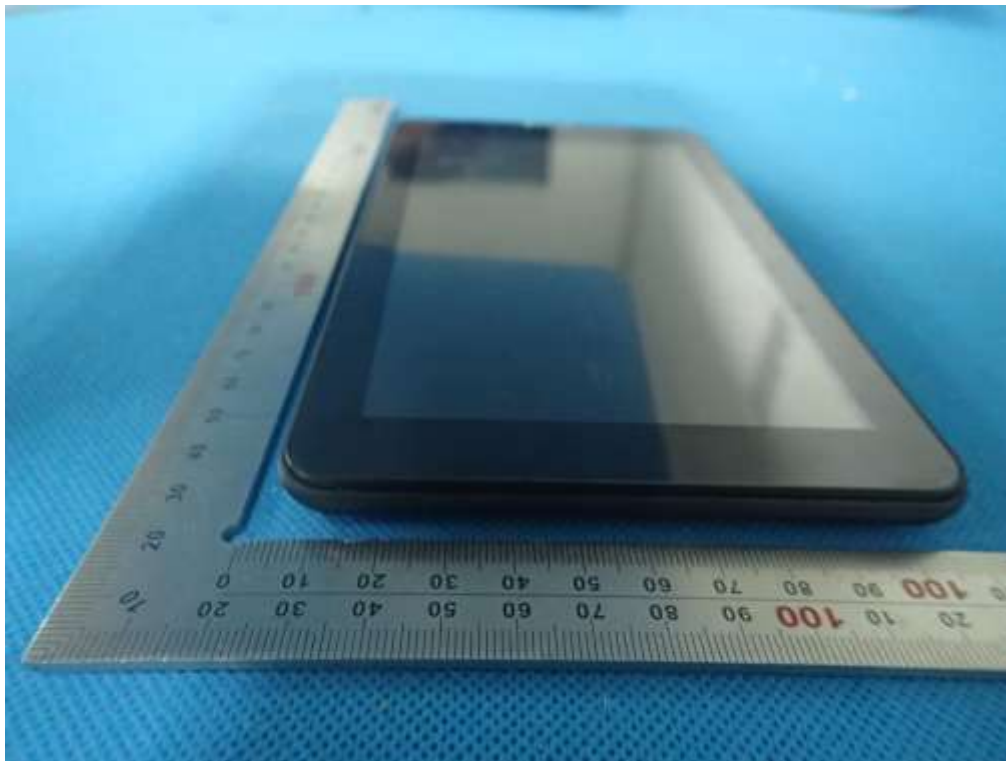

FRONT VIEW OF EUT



BACK VIEW OF EUT



LEFT VIEW OF EUT





RIGHT VIEW OF EUT



OPEN VIEW OF EUT-1



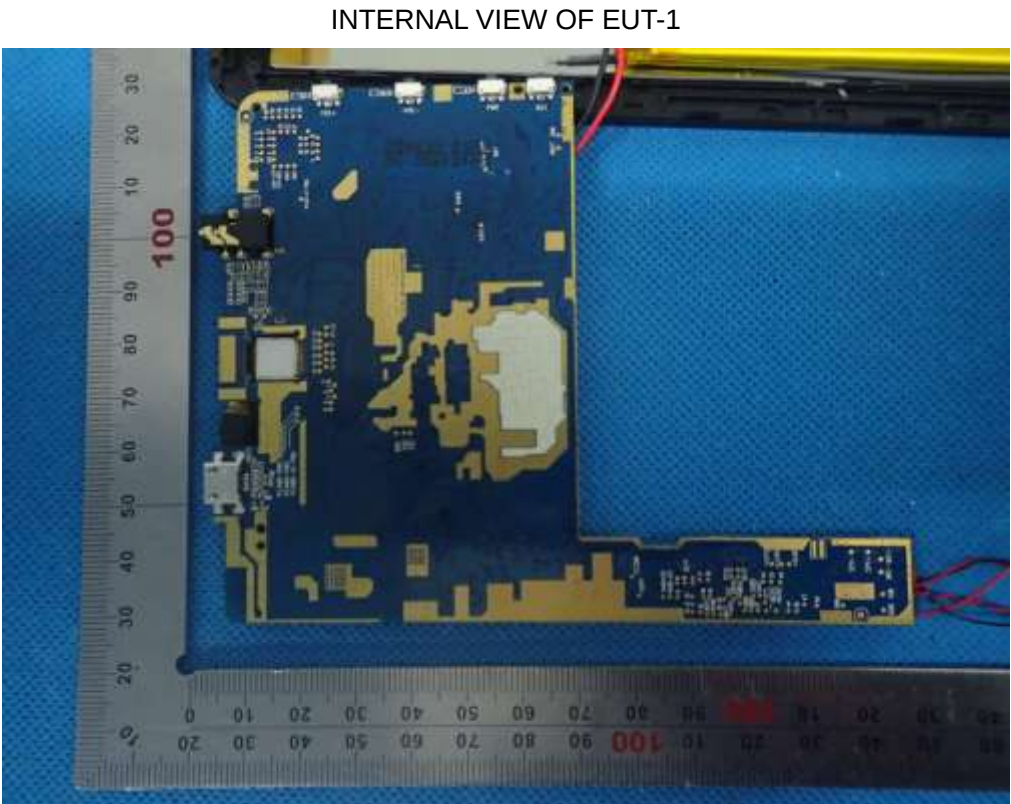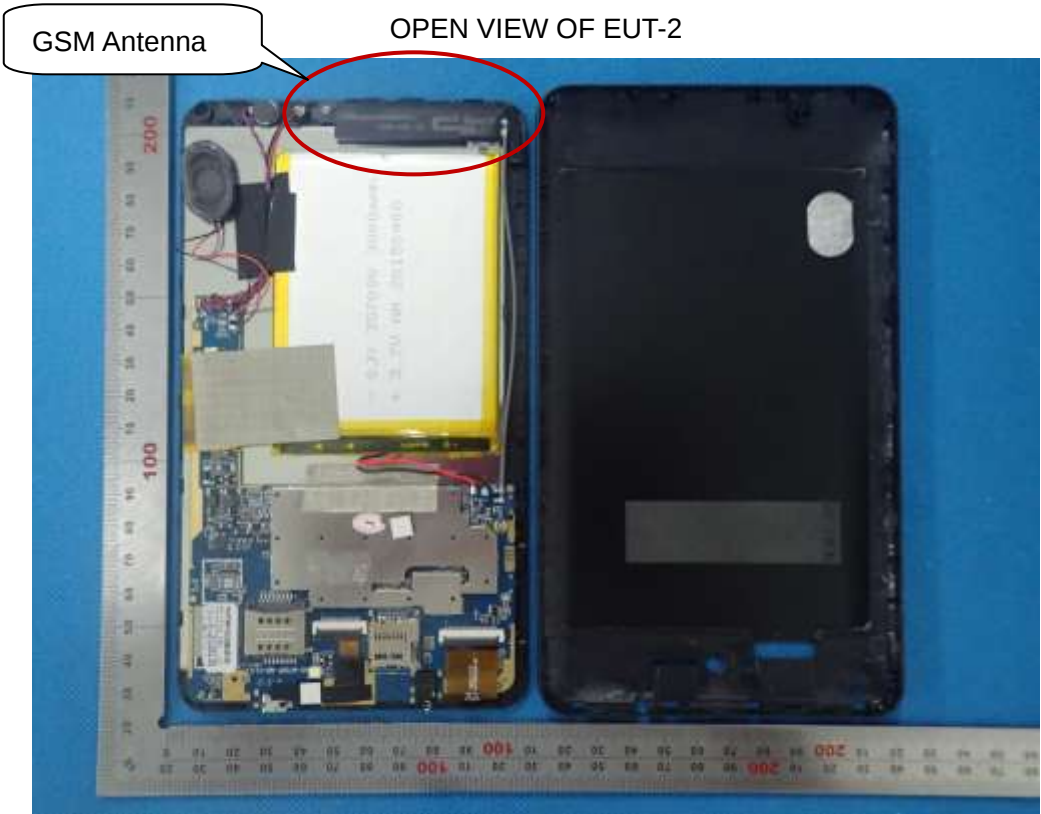

INTERNAL VIEW OF EUT-2



INTERNAL VIEW OF EUT-3



----END OF REPORT----