

FCC Test Report

Report No.: RFCJWN-WTW-P26010146-4

FCC ID: 2AEUP-5CFYA8

Test Model: 5CFYA8

Received Date: 2026/1/12

Test Date: 2026/2/09 ~ 2026/3/18

Issued Date: 2026/4/1

Applicant: Ring LLC

Address: 12515 Cerise Ave, Hawthorne, CA 90250, USA

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location (1): No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City
33383, Taiwan

Test Location (2): No. 70, Wenming Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)

**FCC Registration /
Designation Number(1):** 788550 / TW0003

**FCC Registration /
Designation Number(2):** 281270 / TW0032



This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Description of Test Modes	8
3.2.1 Test Mode Applicability and Tested Channel Detail	9
3.3 Duty Cycle of Test Signal	11
3.4 Description of Support Units	12
3.4.1 Configuration of System under Test	12
3.5 General Description of Applied Standards and references	12
4 Test Types and Results	13
4.1 Radiated Emission and Bandedge Measurement	13
4.1.1 Limits of Radiated Emission and Bandedge Measurement	13
4.1.2 Test Instruments	14
4.1.3 Test Procedures	15
4.1.4 Deviation from Test Standard	16
4.1.5 Test Setup	16
4.1.6 EUT Operating Conditions	17
4.1.7 Test Results	18
4.2 Conducted Emission Measurement	30
4.2.1 Limits of Conducted Emission Measurement	30
4.2.2 Test Instruments	30
4.2.3 Test Procedures	31
4.2.4 Deviation from Test Standard	31
4.2.5 Test Setup	31
4.2.6 EUT Operating Condition	31
4.2.7 Test Results	32
4.3 6dB Bandwidth Measurement	34
4.3.1 Limits of 6dB Bandwidth Measurement	34
4.3.2 Test Setup	34
4.3.3 Test Instruments	34
4.3.4 Test Procedure	34
4.3.5 Deviation from Test Standard	34
4.3.6 EUT Operating Conditions	34
4.3.7 Test Result	35
4.4 Conducted Output Power Measurement	36
4.4.1 Limits of Conducted Output Power Measurement	36
4.4.2 Test Setup	36
4.4.3 Test Instruments	36
4.4.4 Test Procedure	36
4.4.5 Deviation from Test Standard	36
4.4.6 EUT Operating Condition	36
4.4.7 Test Results	36
4.5 Power Spectral Density Measurement	37
4.5.1 Limits of Power Spectral Density Measurement	37
4.5.2 Test Setup	37
4.5.3 Test Instruments	37
4.5.4 Test Procedure	37
4.5.5 Deviation from Test Standard	37

4.5.6 EUT Operating Condition	37
4.5.7 Test Results	38
4.6 Conducted Out of Band Emission Measurement.....	39
4.6.1 Limits of Conducted Out Of Band Emission Measurement.....	39
4.6.2 Test Setup.....	39
4.6.3 Test Instruments	39
4.6.4 Test Procedure	39
4.6.5 Deviation from Test Standard	39
4.6.6 EUT Operating Condition	39
4.6.7 Test Results	40
5 Pictures of Test Arrangements.....	41
Appendix – Information of the Testing Laboratories	42

Release Control Record

Issue No.	Description	Date Issued
RFCJWN-WTW-P26010146-4	Original Release	2026/4/1

1 Certificate of Conformity

Product: Security Camera

Brand: ring

Test Model: 5CFYA8

Sample Status: Engineering sample

Applicant: Ring LLC

Test Date: 2026/2/09 ~ 2026/3/18

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10-2020

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by :

Vera Huang

Date: 2026/4/1

Vera Huang / Specialist

Approved by :

Jeremy Lin

Date: 2026/4/1

Jeremy Lin / Project Engineer

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	Pass	Meet the requirement of limit. Minimum passing margin is -12.65dB at 0.66811MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	Pass	Meet the requirement of limit. Minimum passing margin is -3.0dB at 946.65MHz.
15.247(d)	Antenna Port Emission	Pass	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	Pass	Meet the requirement of limit.
15.247(b)	Conducted power	Pass	Meet the requirement of limit.
15.247(e)	Power Spectral Density	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	Antenna connector is soldering not a standard connector.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	3.00 dB
	30 MHz ~ 1 GHz	2.93 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	1.76 dB
	18GHz ~ 40GHz	1.77 dB
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.88 dB
6 dB Bandwidth	-	206.5 Hz
RF Output Power	-	1.371 dB
Power Spectral Density	-	1.017 dB
Conducted Out of Band Emissions	9 kHz ~ 40 GHz	2.79 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Security Camera
Brand	ring
Test Model	5CFYA8
Sample Status	Engineering sample
Power Supply Rating	USB TypeC input: 20Vdc, 65W POE IN: 48Vdc, 56W (802.3bt)
Modulation Type	LoRa
Modulation Technology	DTS
Operating Frequency	902.5 MHz – 926.5 MHz
Number of Channel	31
Output Power	433.511 mW (26.37 dBm)
Antenna Type	Refer to note
Antenna Connector	Refer to note
Accessory Device	Refer to note
Cable Supplied	NA

Note:

1. The EUT contains following accessories.

AC Adapter	Brand	ring
	Model	6PFYA3
	AC Input	100-240Vac, 1.8A, 50/60Hz
	DC Output	5.0Vdc, 3.0A, 15.0W / 9.0Vdc, 3.0A, 27.0W / 15.0Vdc, 3.0A, 45.0W / 20.0Vdc, 3.25A, 65.0W
	AC input Cable	Non-shielded 3-pin cable (2.2m)
	DC Output Cable	Shielded USB-C cable (1.65m)

2. The Antenna information is listed as below.

Antenna Gain (dBi)	Frequency Range	Antenna Type	Connecter Type
1	LoRa 902~928MHz	PIFA - Flex	soldering

*Detail antenna specification please refer to antenna datasheet and/or antenna measurement report.

3. There are Bluetooth LE and WLAN (2.4 GHz & 5 GHz) and LoRa technology used for the EUT.

4. Simultaneously transmission combination.

Combination	Technology		
1	WLAN (5 GHz) MIMO	Bluetooth LE	LoRa
2	WLAN (2.4 GHz) MIMO	LoRa	-

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

5. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 Description of Test Modes

31 channels are provided to this EUT:

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	902.5	10	910.5	20	918.5	30	926.5
1	903.3	11	911.3	21	919.3		
2	904.1	12	912.1	22	920.1		
3	904.9	13	912.9	23	920.9		
4	905.7	14	913.7	24	921.7		
5	906.5	15	914.5	25	922.5		
6	907.3	16	915.3	26	923.3		
7	908.1	17	916.1	27	924.1		
8	908.9	18	916.9	28	924.9		
9	909.7	19	917.7	29	925.7		

3.2.1 Test Mode Applicability and Tested Channel Detail

Pre-Scan:	1. EUT can be used in the following ways: X-axis / Y-axis / Z-axis. Pre-scan these ways and find the worst case as a representative test condition. 2. The EUT can be powered by following ways: Type-C with Adapter / POE Adapter. Pre-scan these ways and find the worst case as a representative test condition. 3. Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
Worst Case:	1. X-axis / Y-axis / Z-axis Worst Condition: Z-axis 2. Worst Condition: EUT with Type-C with Adapter.

EUT Configure Mode	Applicable to				Description
	RE $\geq$ 1G	RE<1G	PLC	APCM	
-	√	√	√	√	-
Where	RE $\geq$ 1G: Radiated Emission above 1GHz & Bandedge Measurement			RE<1G: Radiated Emission below 1GHz	
	PLC: Power Line Conducted Emission			APCM: Antenna Port Conducted Measurement	

Radiated Emission Test (Above 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type
-	0 to 30	0, 15, 30	LoRa

Radiated Emission Test (Below 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type
-	0 to 30	15	LoRa

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type
-	0 to 30	15	LoRa

Antenna Port Conducted Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.


EUT Configure Mode	Available Channel	Tested Channel	Modulation Type
-	0 to 30	0, 15, 30	LoRa

Test Condition:

Applicable to	Environmental Conditions	Input Power	Tested by
RE $\geq$ 1G	23 deg. C, 68% RH	120Vac, 60Hz	Edison Lee
RE<1G	22 deg. C, 68% RH	120Vac, 60Hz	Greg Lin
PLC	23 deg. C, 68% RH	120Vac, 60Hz	Edison Lee
APCM	25 deg. C, 60% RH	120Vac, 60Hz	Gary Lin

3.3 Duty Cycle of Test Signal

Duty cycle = $71.3 \text{ ms} / 72.4 \text{ ms} \times 100\% = 98.5\%$

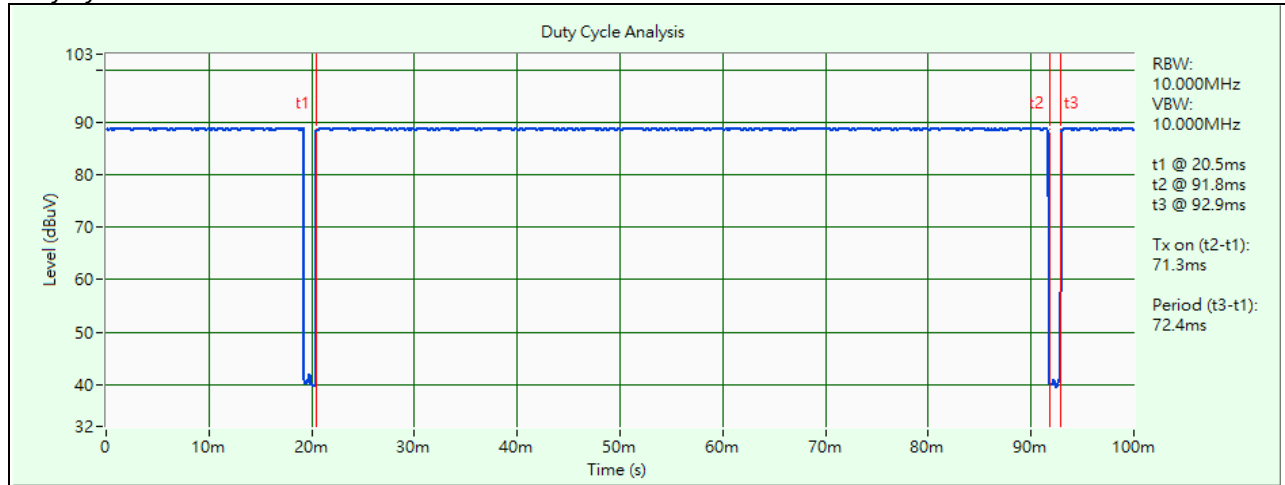


3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Notebook	Lenovo	L470	N/A	N/A	Provided by Lab

No.	Cable Descriptions	Qty.	Length (m)	Shielded (Yes/ No)	Cores (Qty.)	Remark
1.	RJ-45 Cable	1	10	No	0	Provided by Lab
2.	USB Type C Cable	1	1.65	Yes	0	Accessory of EUT

3.4.1 Configuration of System under Test

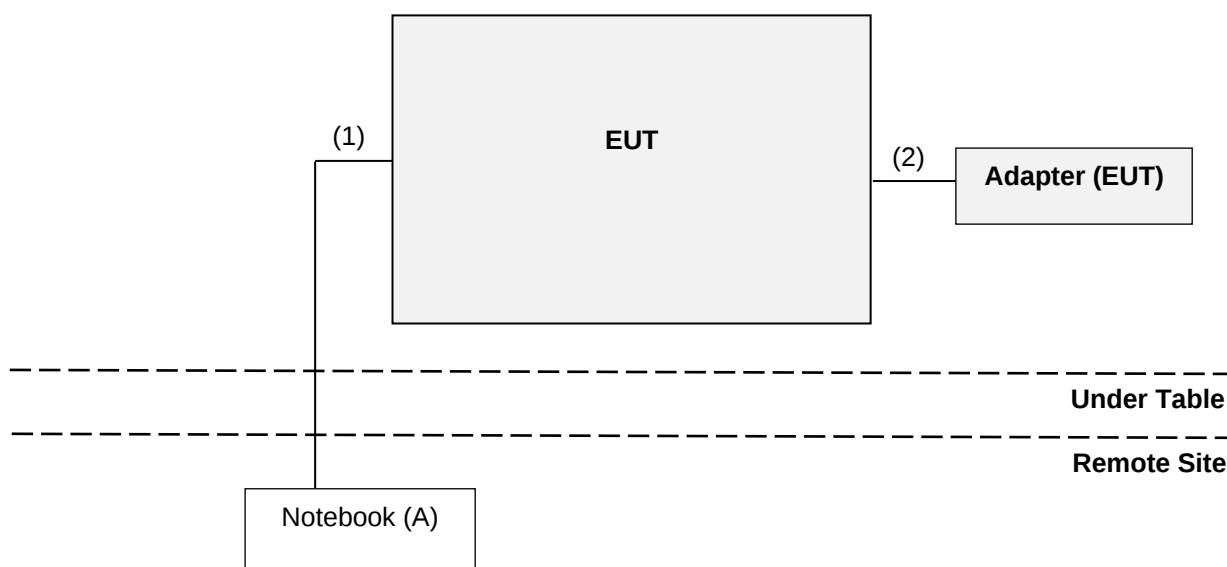

3.5 General Description of Applied Standards and references

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

FCC Part 15, Subpart C (15.247)

ANSI C63.10-2020

All test items have been performed and recorded as per the above standards.

References Test Guidance:

KDB 558074 D01 15.247 Meas Guidance v05r02

All test items have been performed as a reference to the above KDB test guidance.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 30dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Antenna Tower Max-Full	MFA-515BSN	N/A	N/A	N/A
Spectrum Analyzer KEYSIGHT	N9038B	MY60180019	2026/1/14	2027/1/13
BILOG Antenna SCHWARZBECK	VULB9168	9168-1214	2025/9/18	2026/9/17
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-1170	2025/11/9	2026/11/8
Loop Antenna EMCI	HLA 6121	45745	2025/9/1	2026/8/31
Preamplifier EMCI	EMC330N	980798	2026/1/13	2027/1/12
Preamplifier EMCI	EMC118A45SE	980809	2025/4/24	2026/4/23
Preamplifier EMCI	EMC184045SE	980786	2026/1/13	2027/1/12
RF signal cable EMCI	EMCCFD400-NM-N M-(9000+300+500)	201251+ 201249+ 201248	2026/1/13	2027/1/12
RF signal cable EMCI	EMC101G-KM-KM-(5000+3000+2000)	201261+201258+20 1249	2026/1/13	2027/1/12
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	NA	NA	NA
Antenna Tower Max-Full	MFA-515BSN	NA	NA	NA
Turn Table Max-Full	MFT-201SS	NA	NA	NA
Turn Table Controller Max-Full	MF-7802BS	MF780208676	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in WM Chamber 9.

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode when the test frequencies less than or equal to 1 GHz.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequencies less than or equal to 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) and Average detection (AV) at frequency above 1 GHz, unless otherwise specified the following procedure (restricted-bands adjacent to the allocated band).
3. For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10 Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1 GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

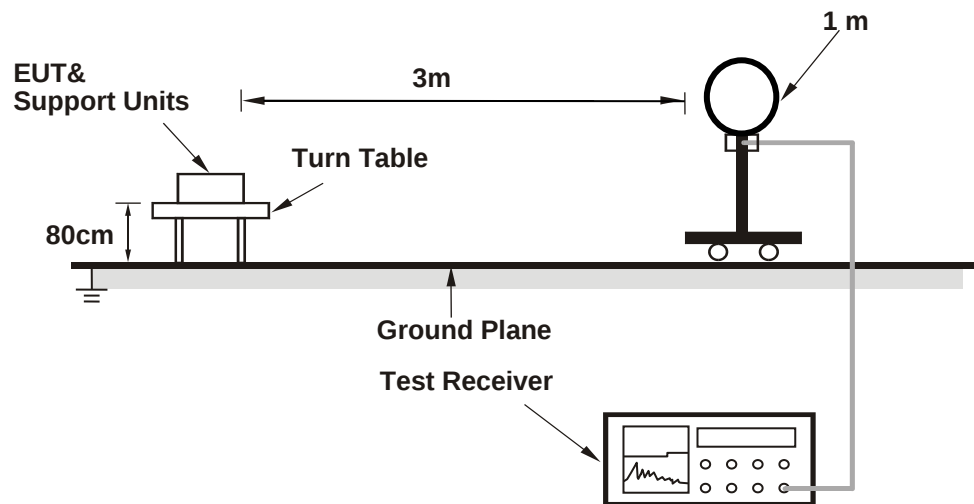

For Radiated emission 30MHz to 1GHz

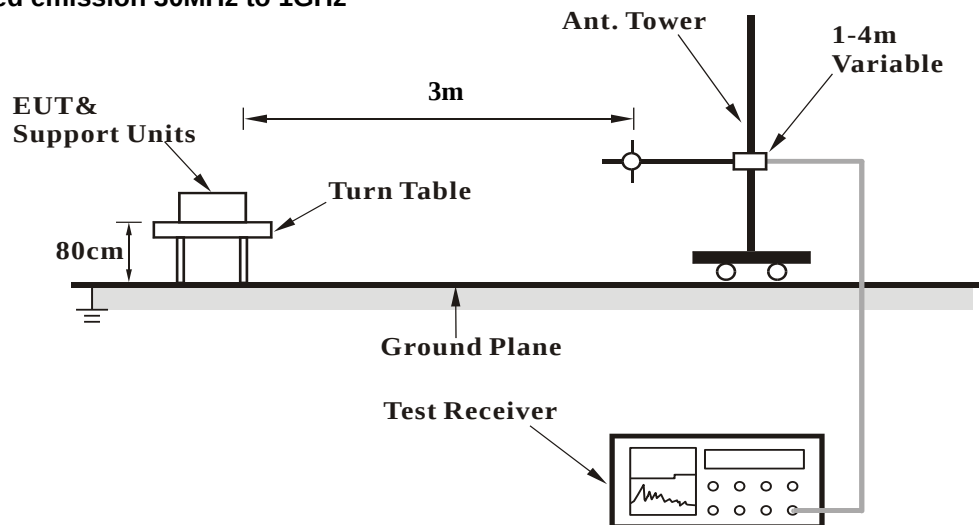

For Radiated emission above 1GHz

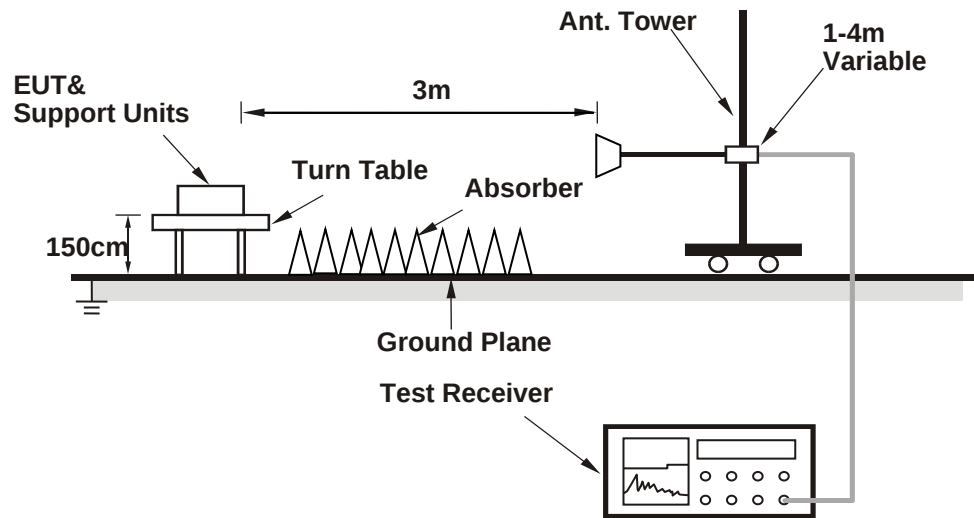

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- a. Set the EUT under transmission condition continuously at specific channel frequency.


4.1.7 Test Results

Channel	TX Channel 0	Detector Function	Quasi-Peak (QP)
Frequency Range	902MHz ~ 928MHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	902.00	71.5 QP	85.8	-14.3	1.39 H	318	40.9	30.6
2	*902.50	115.8 QP			1.39 H	318	85.2	30.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value.
5. " * " : Fundamental frequency.

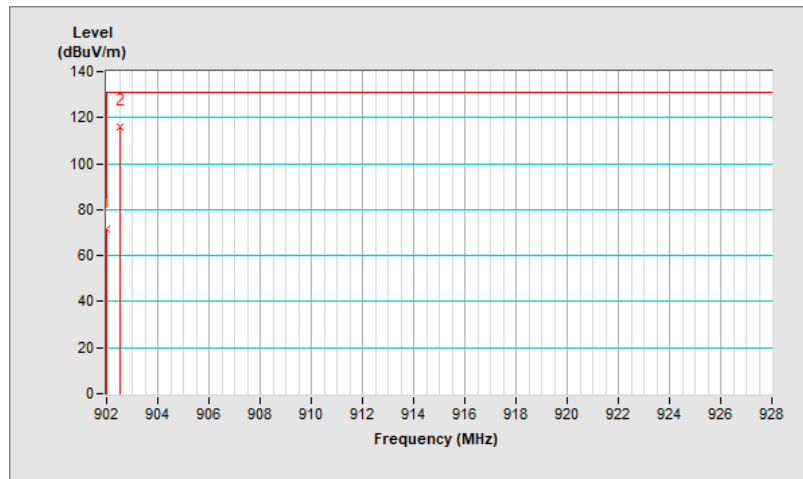


Channel	TX Channel 0	Detector Function	Quasi-Peak (QP)
Frequency Range	902MHz ~ 928MHz		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	902.00	78.7 QP	93.9	-15.2	1.24 V	163	48.1	30.6
2	*902.50	123.9 QP			1.24 V	163	93.3	30.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value.
5. " * ": Fundamental frequency.

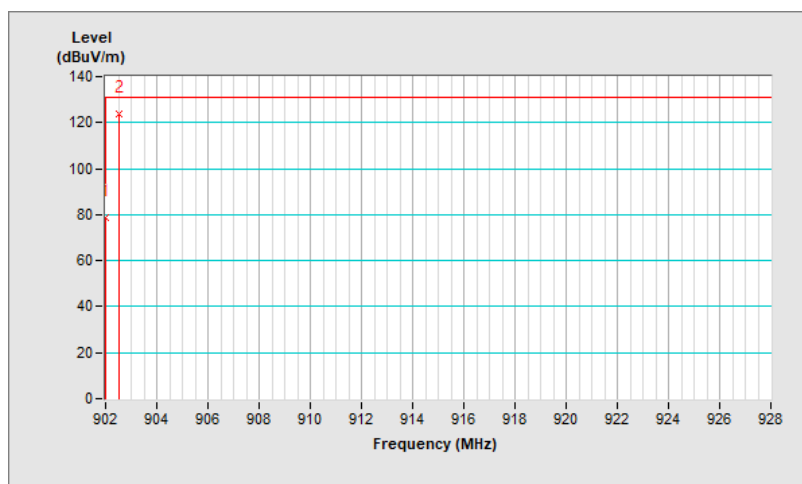


Channel	TX Channel 15	Detector Function	Quasi-Peak (QP)
Frequency Range	902MHz ~ 928MHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*914.50	116.9 QP			1.31 H	312	86.1	30.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value.
5. " * ": Fundamental frequency.

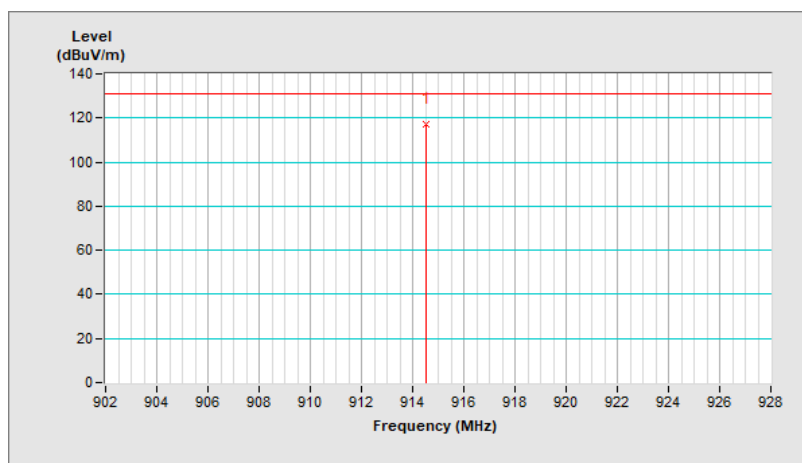


Channel	TX Channel 15	Detector Function	Quasi-Peak (QP)
Frequency Range	902MHz ~ 928MHz		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*914.50	125.0 QP			1.18 V	159	94.2	30.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value.
5. " * ": Fundamental frequency.

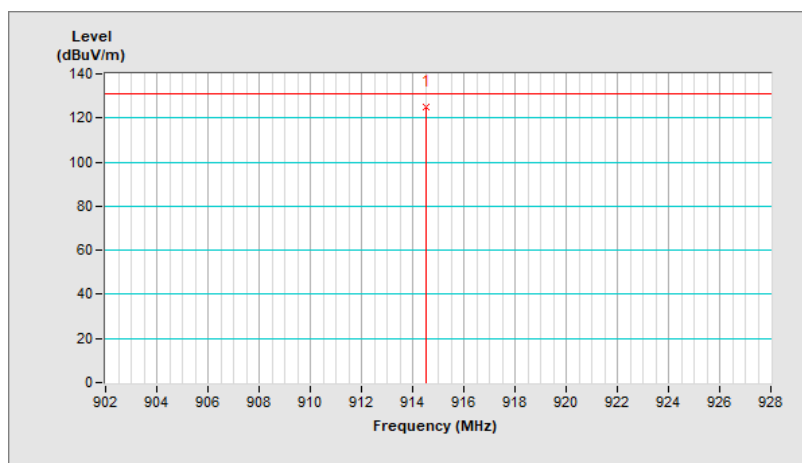


Channel	TX Channel 30	Detector Function	Quasi-Peak (QP)
Frequency Range	902MHz ~ 928MHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*926.50	114.6 QP			1.37 H	307	83.6	31.0
2	928.00	61.4 QP	84.6	-23.2	1.37 H	307	30.4	31.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value.
5. " * ": Fundamental frequency.

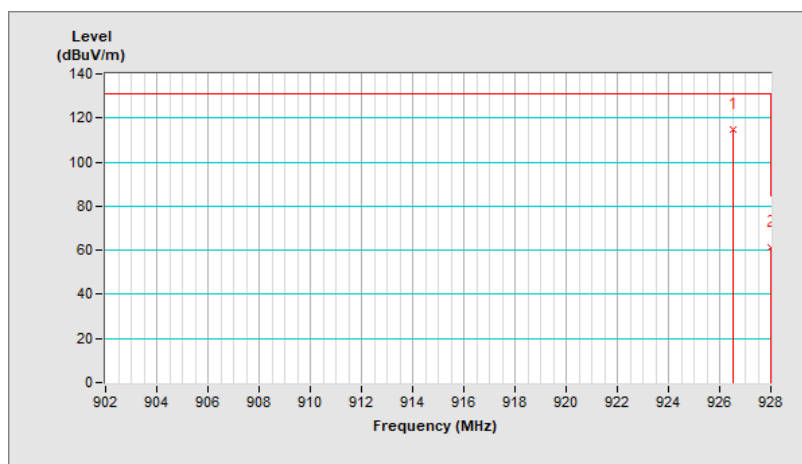


Channel	TX Channel 30	Detector Function	Quasi-Peak (QP)
Frequency Range	902MHz ~ 928MHz		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*926.50	122.6 QP			1.26 V	161	91.6	31.0
2	928.00	70.4 QP	92.6	-22.2	1.26 V	161	39.4	31.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value.
5. " * " : Fundamental frequency.

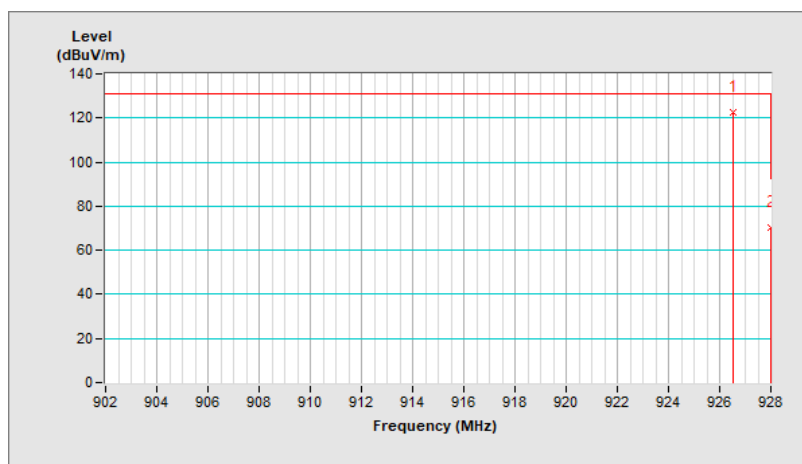

Above 1GHz Data:

Channel	TX Channel 0	Detector Function	Peak (PK)
Frequency Range	1GHz ~10GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2707.50	48.5 PK	74.0	-25.5	1.68 H	184	51.0	-2.5
2	2707.50	40.5 AV	54.0	-13.5	1.68 H	184	43.0	-2.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2707.50	47.0 PK	74.0	-27.0	1.60 V	349	49.5	-2.5
2	2707.50	38.5 AV	54.0	-15.5	1.60 V	349	41.0	-2.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value.
5. The EUT was tested by a test tool (provided by manufacturer), please refer to section 3.3 for duty cycle spectrum plot.

Channel	TX Channel 15	Detector Function	Peak (PK)
Frequency Range	1GHz ~10GHz		Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2743.50	50.7 PK	74.0	-23.3	1.75 H	189	53.0	-2.3
2	2743.50	45.0 AV	54.0	-9.0	1.75 H	189	47.3	-2.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2743.50	47.9 PK	74.0	-26.1	1.93 V	222	50.2	-2.3
2	2743.50	43.4 AV	54.0	-10.6	1.93 V	222	45.7	-2.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value.
5. The EUT was tested by a test tool (provided by manufacturer), please refer to section 3.3 for duty cycle spectrum plot.

Channel	TX Channel 30	Detector Function	Peak (PK)
Frequency Range	1GHz ~10GHz		Average (AV)


Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2779.50	52.4 PK	74.0	-21.6	1.63 H	180	54.5	-2.1
2	2779.50	48.2 AV	54.0	-5.8	1.63 H	180	50.3	-2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2779.50	49.2 PK	74.0	-24.8	1.72 V	35	51.3	-2.1
2	2779.50	46.7 AV	54.0	-7.3	1.72 V	35	48.8	-2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value.
5. The EUT was tested by a test tool (provided by manufacturer), please refer to section 3.3 for duty cycle spectrum plot.

Plot of other emissions:

Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	----------------	-------------------------------	---

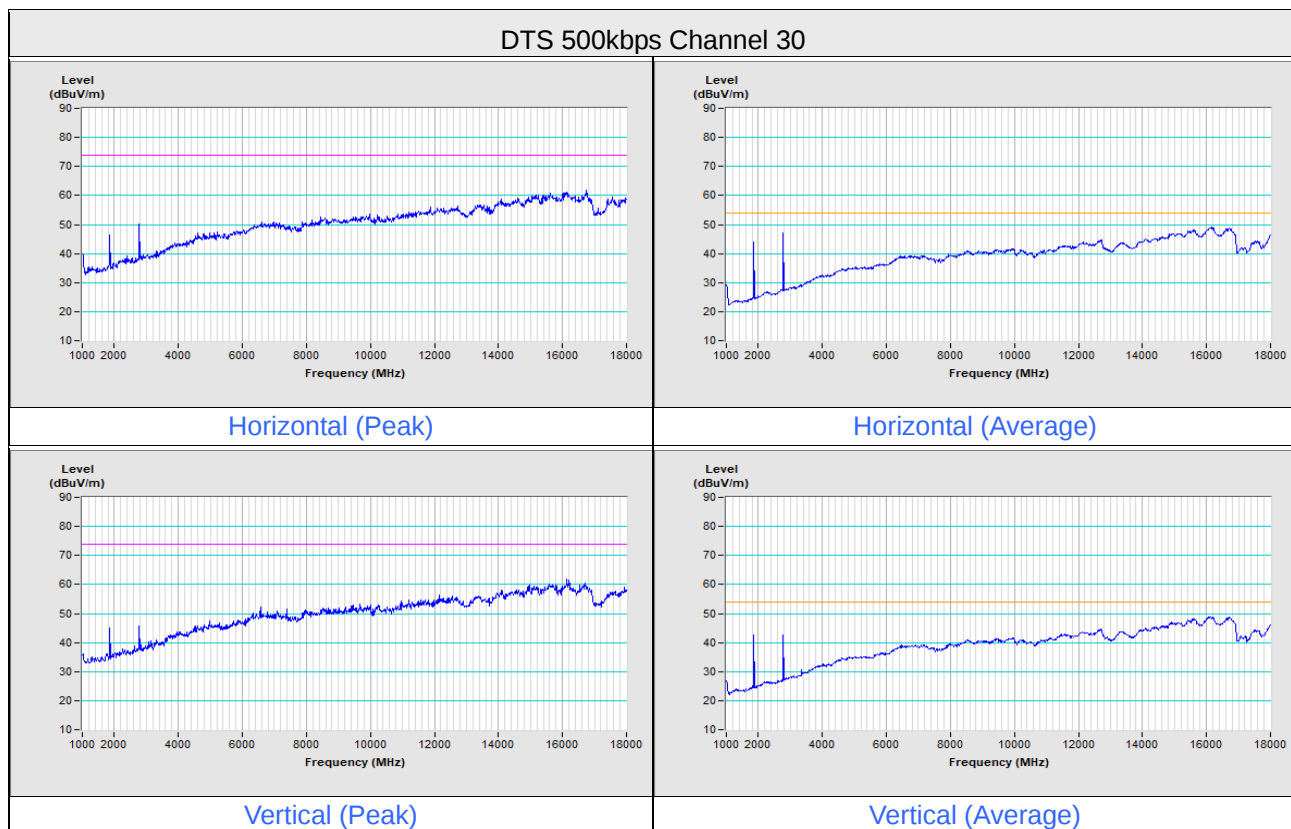

Notes: For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.


Below 1GHz Data:

Channel	TX Channel 15	Detector Function	Quasi-Peak (QP)
Frequency Range	9kHz ~ 1GHz		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	48.43	19.1 QP	40.0	-20.9	1.50 H	35	32.0	-12.9
2	158.04	24.9 QP	43.5	-18.6	1.00 H	95	37.8	-12.9
3	234.67	27.9 QP	46.0	-18.1	1.00 H	333	42.6	-14.7
4	655.65	37.4 QP	46.0	-8.6	1.00 H	161	41.7	-4.3
5	882.63	41.5 QP	46.0	-4.5	2.00 H	110	42.8	-1.3
6	946.65	40.4 QP	46.0	-5.6	1.00 H	109	40.3	0.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

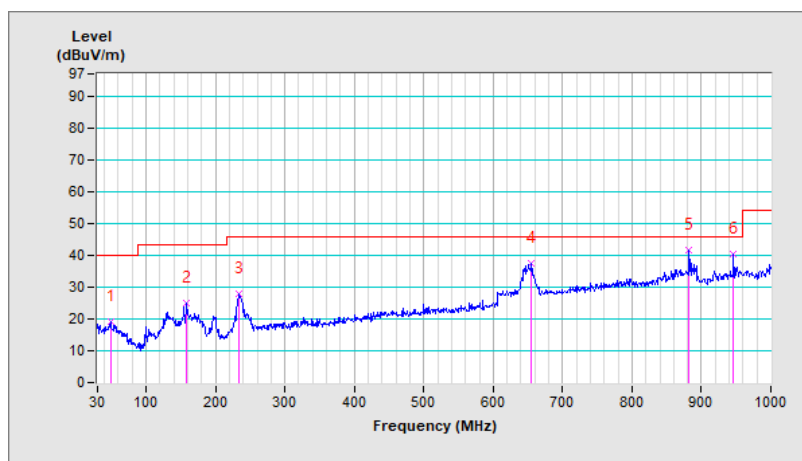


Channel	TX Channel 15	Detector Function	Quasi-Peak (QP)
Frequency Range	9kHz ~ 1GHz		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	32.91	27.6 QP	40.0	-12.4	2.00 V	252	41.8	-14.2
2	48.43	26.2 QP	40.0	-13.8	1.00 V	108	39.1	-12.9
3	231.76	19.8 QP	46.0	-26.2	1.00 V	6	34.9	-15.1
4	384.05	21.4 QP	46.0	-24.6	1.00 V	337	31.7	-10.3
5	882.63	38.0 QP	46.0	-8.0	2.00 V	199	39.3	-1.3
6	946.65	43.0 QP	46.0	-3.0	1.50 V	159	42.9	0.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

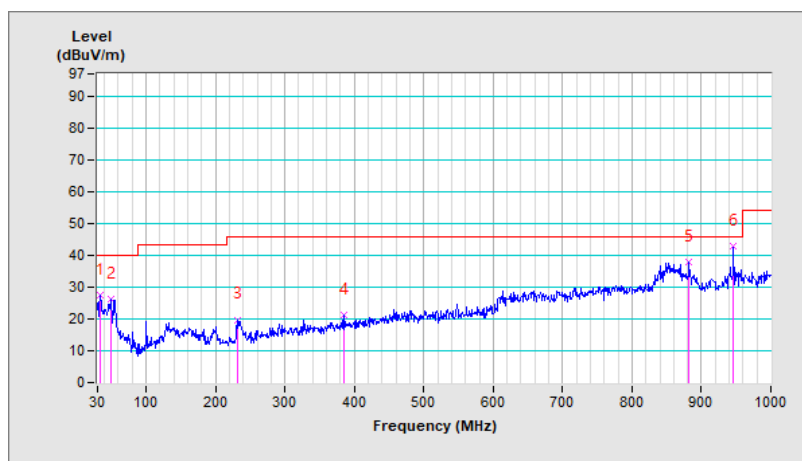

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESCI	100613	2025/11/27	2026/11/26
RF signal cable Woken	5D-FB	Cable-cond1-01	2026/1/3	2027/1/2
LISN ROHDE & SCHWARZ (EUT)	ENV216	101826	2025/3/24	2026/3/23
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100311	2025/8/28	2026/8/27
Software ADT	BVADT_Conc_ V7.4.1.0	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Shielded Room 1 (Conduction 1).

4.2.3 Test Procedures


- Exploratory ac power-line conducted emission measurements: The EUT shall be operated on the mid channel and in the mode with highest output power unless the fundamental operates in the AC power-line emission test range then the EUT shall be operated in the range of typical modes of operation.
- The EUT was placed on a 0.8 meter to the top of table and placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50 uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

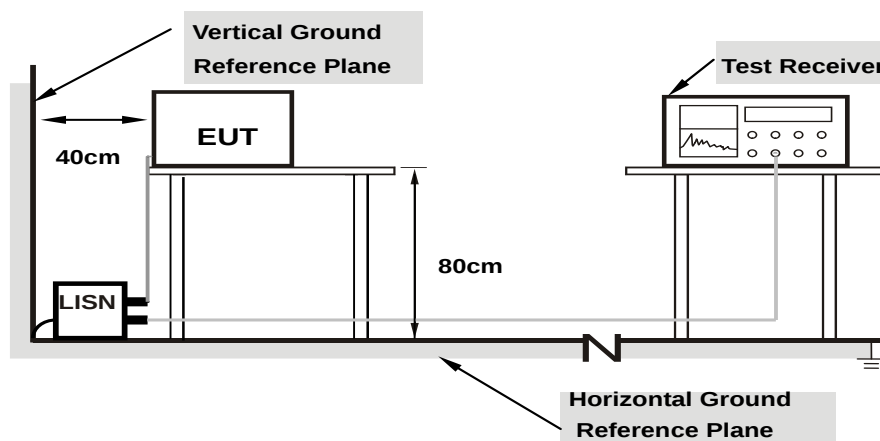

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Condition

Same as 4.1.6.


4.2.7 Test Results

Channel	TX Channel 15	Phase	Line (L)
Detector Function	Quasi-Peak (QP) / Average (AV)		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16200	9.78	28.46	18.82	38.24	28.60	65.36	55.36	-27.12	-26.76
2	0.18519	9.77	26.03	18.04	35.80	27.81	64.25	54.25	-28.45	-26.44
3	0.67400	9.79	24.90	22.59	34.69	32.38	56.00	46.00	-21.31	-13.62
4	1.58962	9.85	22.45	20.89	32.30	30.74	56.00	46.00	-23.70	-15.26
5	7.34200	9.94	11.25	8.28	21.19	18.22	60.00	50.00	-38.81	-31.78
6	15.01400	10.04	12.64	5.93	22.68	15.97	60.00	50.00	-37.32	-34.03

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

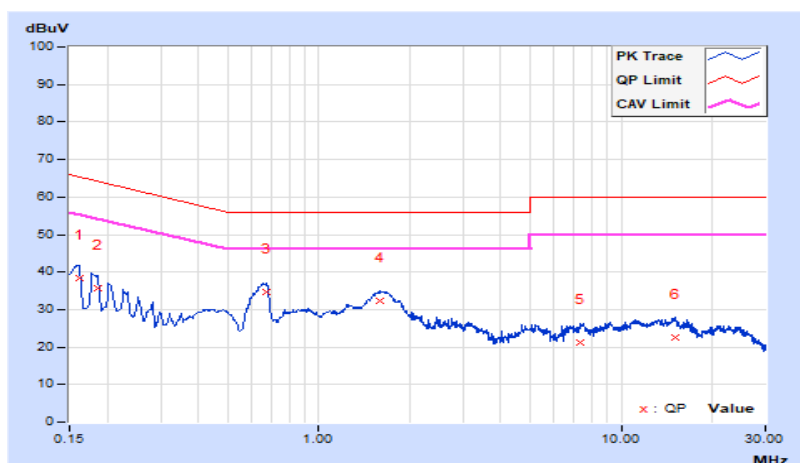


Channel	TX Channel 15	Phase	Neutral (N)
Detector Function	Quasi-Peak (QP) / Average (AV)		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.79	30.28	17.11	40.07	26.90	66.00	56.00	-25.93	-29.10
2	0.21800	9.76	21.62	12.15	31.38	21.91	62.89	52.89	-31.51	-30.98
3	0.27400	9.77	16.68	11.01	26.45	20.78	61.00	51.00	-34.55	-30.22
4	0.66811	9.79	25.36	23.56	35.15	33.35	56.00	46.00	-20.85	-12.65
5	1.68600	9.85	22.99	21.32	32.84	31.17	56.00	46.00	-23.16	-14.83
6	16.70600	10.20	16.46	12.95	26.66	23.15	60.00	50.00	-33.34	-26.85

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

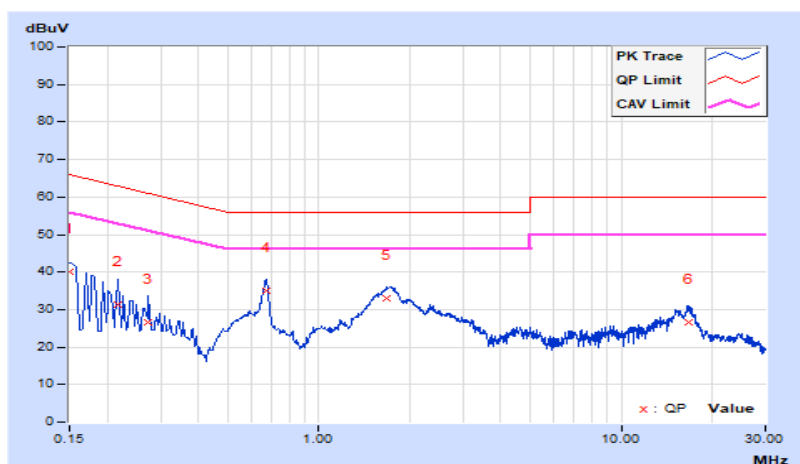


4.3 6dB Bandwidth Measurement

4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 Test Setup



4.3.3 Test Instruments

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Fixed Attenuator Woken	00800A1K01A-10	00800A1K01A-10-01	2025/5/23	2026/5/22
Signal & Spectrum Analyzer R&S	FSV3044	101504	2025/6/18	2026/6/17
Software BV	ADT_RF Test Software V7.6.5.4	N/A	N/A	N/A

Notes:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Oven room.

4.3.4 Test Procedure

- a. Set RBW = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz.
- b. Set the VBW $\geq [3 \times \text{RBW}]$.
- c. Detector = peak.
- d. Trace mode = max-hold.
- e. Sweep = No faster than coupled (auto) time.
- f. Allow the trace to stabilize.
- g. Measure the maximum width of the emission by placing two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-6 dB down amplitude”. If a marker is below this “-6 dB down amplitude” value, then it shall be as close as possible to this value

4.3.5 Deviation from Test Standard


No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
0	902.5	0.57	0.5	Pass
15	914.5	0.63	0.5	Pass
30	926.5	0.63	0.5	Pass

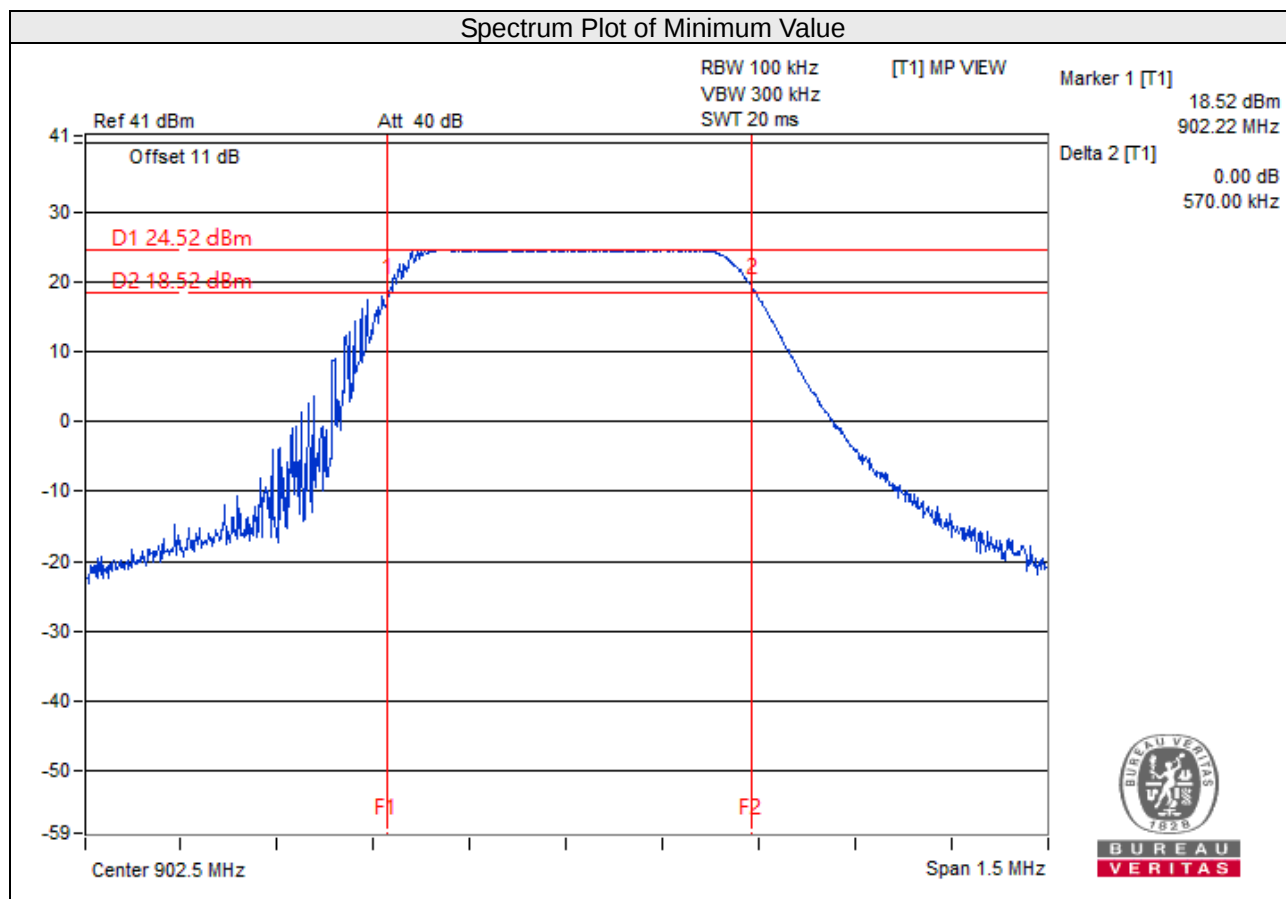


4.4 Conducted Output Power Measurement

4.4.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 902-928 MHz bands: 1 Watt (30dBm)

4.4.2 Test Setup



4.4.3 Test Instruments

Refer to section 4.3.3 to get information of above instrument.

4.4.4 Test Procedure

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value

4.4.5 Deviation from Test Standard

No deviation.

4.4.6 EUT Operating Condition

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.4.7 Test Results


Channel	Frequency (MHz)	Average Power (mW)	Average Power (dBm)	Power Limit (dBm)	Pass / Fail
0	902.5	324.34	25.11	30	Pass
15	914.5	433.511	26.37	30	Pass
30	926.5	410.204	26.13	30	Pass

4.5 Power Spectral Density Measurement

4.5.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm in any 3 kHz band during any time interval of continuous transmission.

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.3.3 to get information of above instrument.

4.5.4 Test Procedure

- a. Measure the duty cycle (x).
- b. Set instrument center frequency to DTS channel center frequency.
- c. Set span to > 1.5 times the OBW.
- d. Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- e. Set VBW $\geq 3 \times \text{RBW}$.
- f. Detector = power averaging (RMS) or sample detector (when RMS not available).
- g. Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$.
- h. Sweep time = auto couple.
- i. Do not use sweep triggering. Allow sweep to "free run".
- j. Employ trace averaging (RMS) mode over a minimum of 100 traces.
- k. Use the peak marker function to determine the maximum amplitude level.

Note: If Duty cycle < 98%, Add $10 \log (1/x)$, where x is the duty cycle measured in step (a, to the measured PSD to compute the average PSD during the actual transmission time.

4.5.5 Deviation from Test Standard


No deviation.

4.5.6 EUT Operating Condition

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.5.7 Test Results

Channel	Freq. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass / Fail
0	902.5	7.73	8	Pass
15	914.5	7.25	8	Pass
30	926.5	6.69	8	Pass

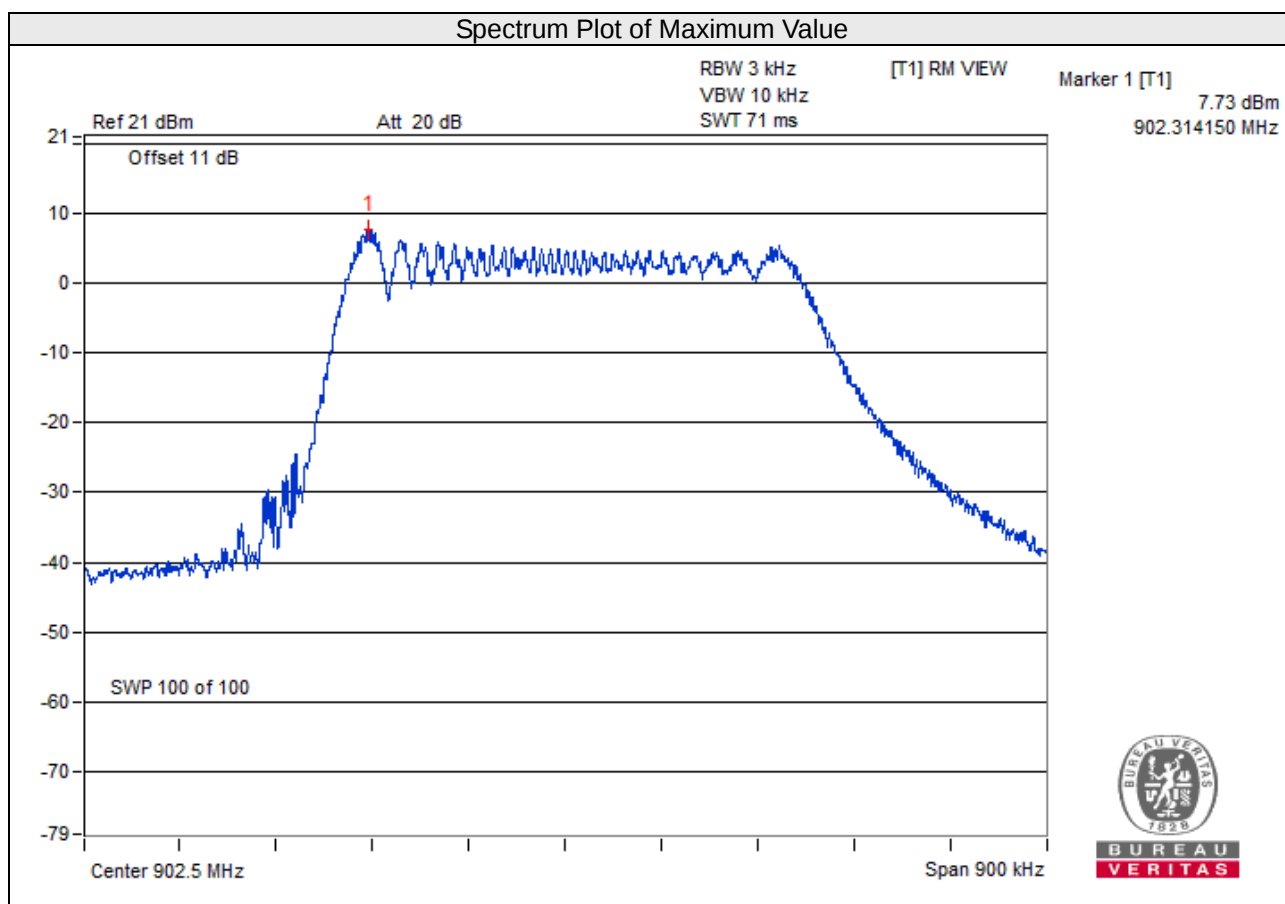


4.6 Conducted Out of Band Emission Measurement

4.6.1 Limits of Conducted Out Of Band Emission Measurement

Below 30dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 Test Setup



4.6.3 Test Instruments

Refer to section 4.3.3 to get information of above instrument.

4.6.4 Test Procedure

MEASUREMENT PROCEDURE REF

- Set instrument center frequency to DTS channel center frequency.
- Set the span to ≥ 1.5 times the DTS bandwidth.
- Set the RBW = 100 kHz.
- Set the VBW ≥ 300 kHz.
- Detector = peak.
- Sweep time = No faster than coupled (auto) time.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum PSD level.

MEASUREMENT PROCEDURE OOB

- Set the center frequency and span to encompass frequency range to be measured. Note that the frequency range might need to be divided into multiple frequency ranges to retain frequency resolution.
- Set RBW = 100 kHz.
- Set VBW ≥ 300 kHz.
- Detector = peak.
- Sweep = No faster than coupled (auto) time.
- Trace Mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.

4.6.5 Deviation from Test Standard


No deviation.

4.6.6 EUT Operating Condition

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.6.7 Test Results

The spectrum plots are attached on the following images. D1 line indicates the highest level, D2 line indicates the 30dB offset below D1. It shows compliance with the requirement.

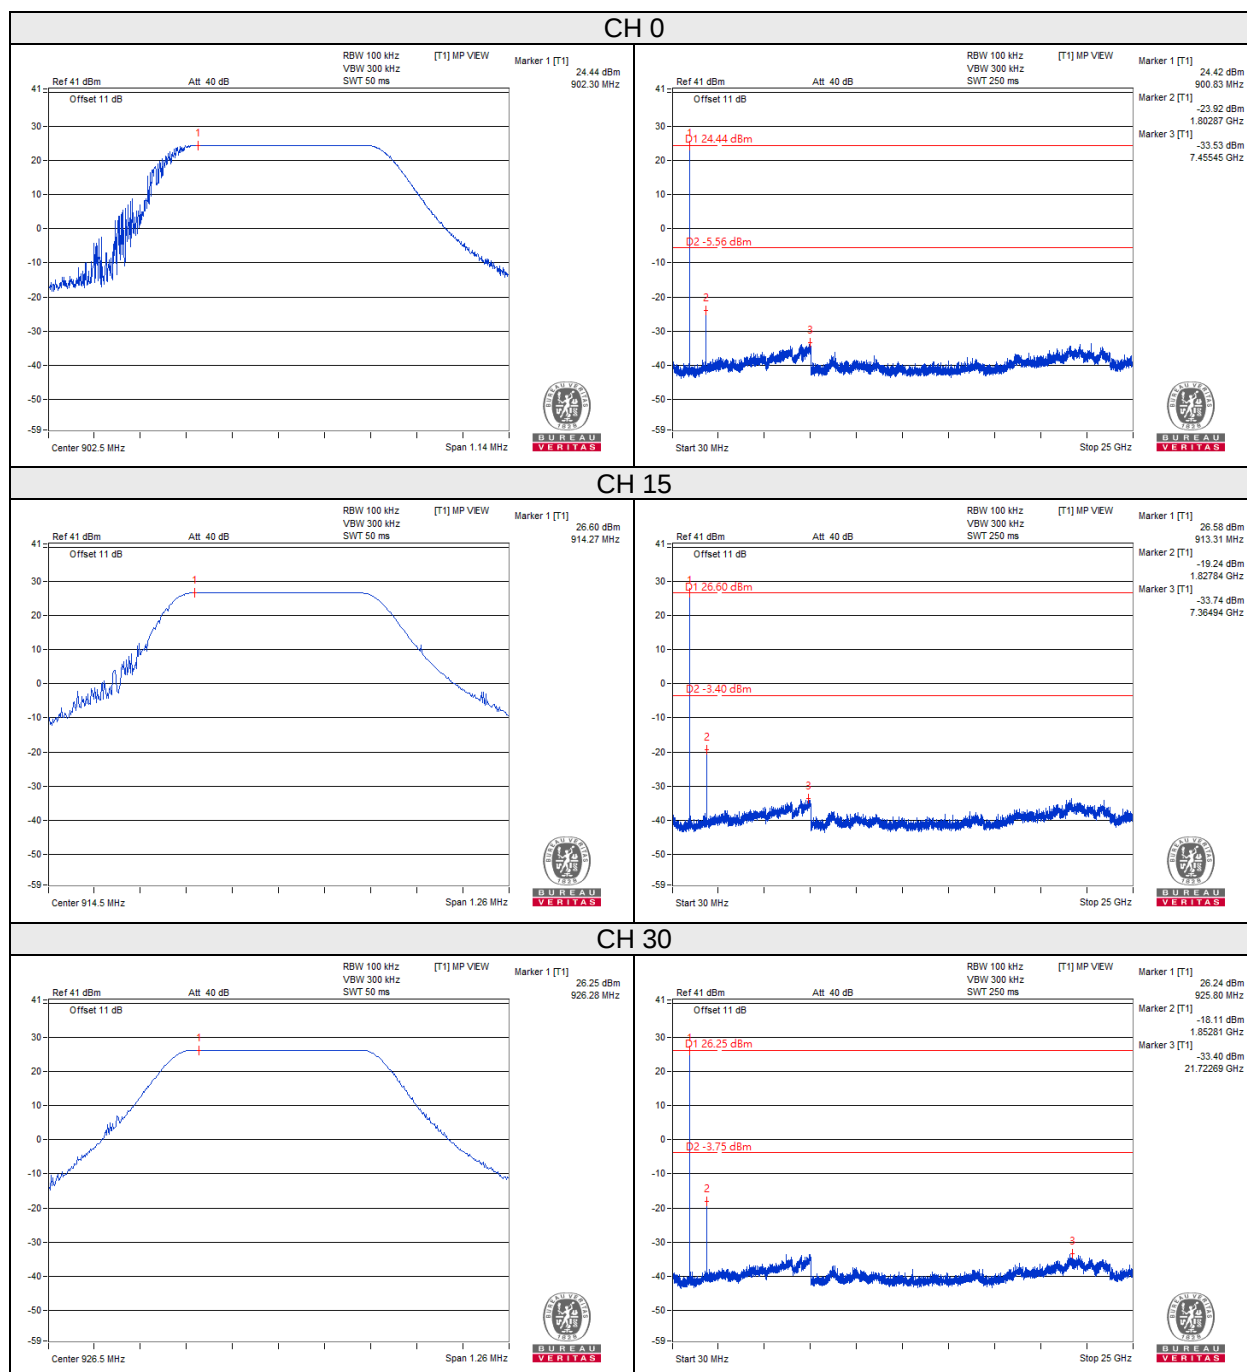

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---