



CONDUCTED SPURIOUS EMISSION

TEST RESULT

TestMode	Antenna	Frequency[MHz]	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	Reference	7.74	7.74	---	PASS
			30~1000	7.74	-43.53	≤-12.26	PASS
			1000~26500	7.74	-49.6	≤-12.26	PASS
		2440	Reference	7.44	7.44	---	PASS
			30~1000	7.44	-44.69	≤-12.56	PASS
			1000~26500	7.44	-50.01	≤-12.56	PASS
		2480	Reference	8.51	8.51	---	PASS
			30~1000	8.51	-43.99	≤-11.49	PASS
			1000~26500	8.51	-49.56	≤-11.49	PASS




TEST GRAPHS

BLE_1M_Ant1_2402_0~Reference



BLE_1M_Ant1_2402_30~1000

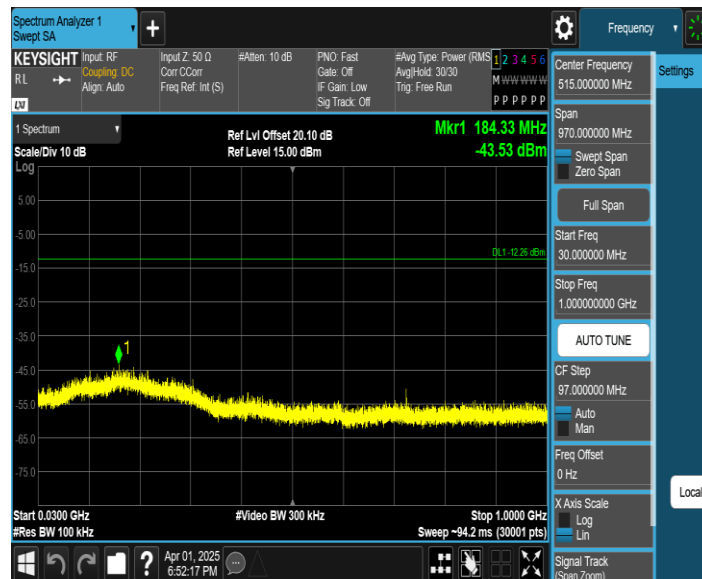


BLE_1M_Ant1_2402_1000~26500



BLE_1M_Ant1_2440_0~Reference



BLE_1M_Ant1_2440_30~1000

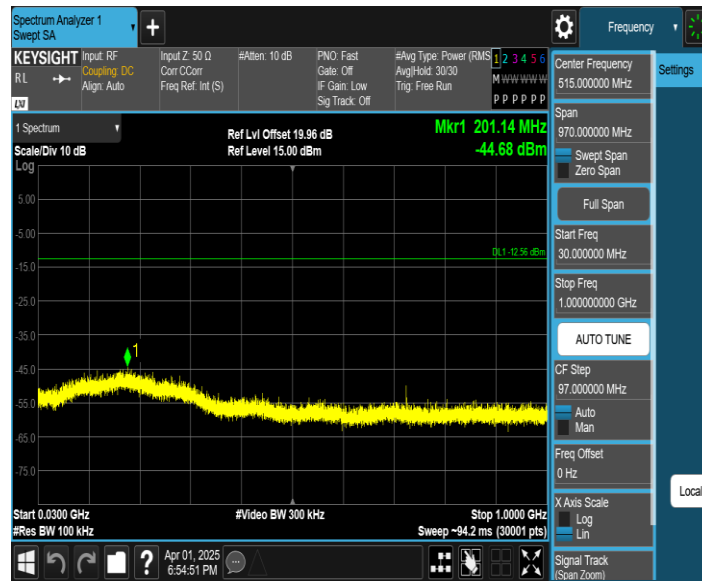


BLE_1M_Ant1_2440_1000~26500




BLE_1M_Ant1_2480_0~Reference



BLE_1M_Ant1_2480_30~1000

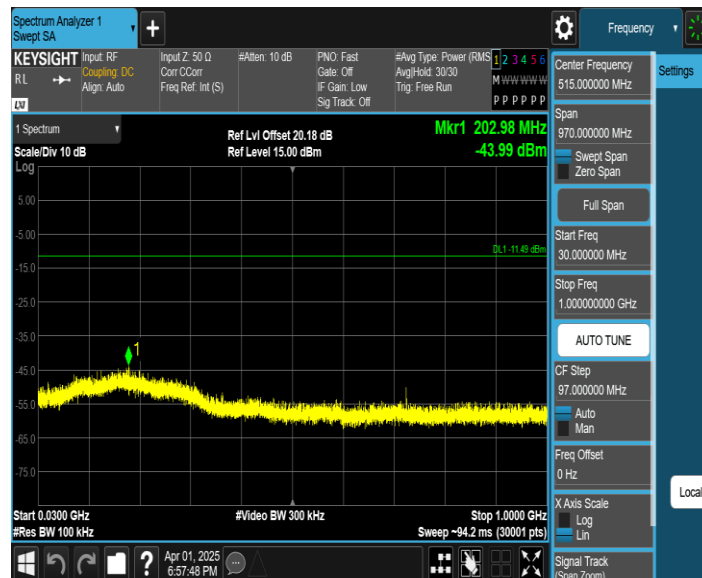

BLE_1M_Ant1_2480_1000~26500

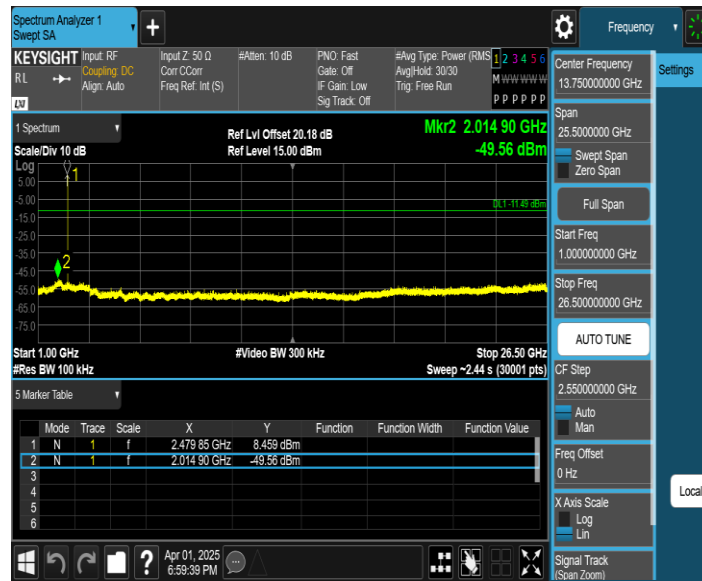



DUTY CYCLE

TEST RESULT

TestMode	Antenna	Frequency[MHz]	ON Time [ms]	Period [ms]	Duty Cycle [%]	Duty Cycle Factor[dB]
BLE_1M	Ant1	2402	0.39	0.63	61.90	2.08
		2440	0.39	0.63	61.90	2.08
		2480	0.38	0.62	61.29	2.13



TEST GRAPHS

BLE_1M_Ant1_2402



BLE_1M_Ant1_2440



BLE_1M_Ant1_2480



--END--