





In the Box

			
Sensor w/ Wall Plate and Battery (1x CR2, 3V Lithium)	Stand	Mounting Kit	Installation/ Quick-start Guide

Tools Needed



#1 Phillips Screwdriver

Note:

Additional equipment may be required due to building construction or materials, or other radio interference that may reduce the radio range.


PAIRING INSTRUCTIONS

- Follow your system's instructions to prepare to add devices to the system.
- Remove the face plate from the Sensor and pull the battery tab to start the pairing process.
- When the Sensor is detected and added to the system, proceed to the Sensor installation.




WALL INSTALLATION INSTRUCTION

- Identify the location for the Wall Plate, orienting the **metal plate** of the Sensor Wall Plate at the bottom if installing vertically. Horizontal installation is also supported. *For best readings, the Sensor should be in an open area, away from the direct air flow of HVAC vents.*
- Position the Wall Plate at the desired location and screw into position using the screws provided.
- Place the Sensor over the latch and slide into position on the wall plate.



DESK/COUNTERTOP PLACEMENT


- For desk or countertop placement, simply place the Sensor over the latch in the Stand and slide down into position.



REPLACING THE BATTERY


(Use only Duracell DL-CR2, Rayovac RL-CR2, Energizer EL1CR2, or GP Batteries GPCR2 batteries)

- Grasp the top of the Sensor face plate and lift it from the Sensor body.
- Press a finger on the positive end of the battery and lift to remove the battery from the Sensor.
- Insert a new battery into the Sensor, observing the proper polarity.
- Position the Sensor face plate over the Sensor body and snap the face plate onto the body.

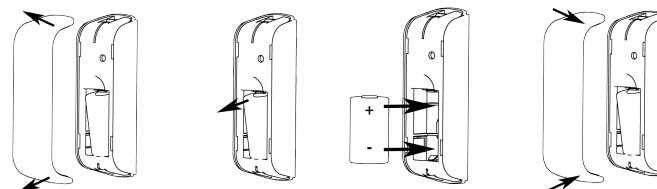

FACTORY RESETTING THE SENSOR

- Remove the Sensor face plate from the Sensor body.
- Remove the battery.
- Press and hold the side button while re-inserting the battery.
- Release the side button when the LED lights on the front of the Sensor. The Sensor is reset to factory defaults and will respond to pairing requests.
- After pairing, position the Sensor over the Mounting Plate and snap the Sensor onto the Mounting Plate.

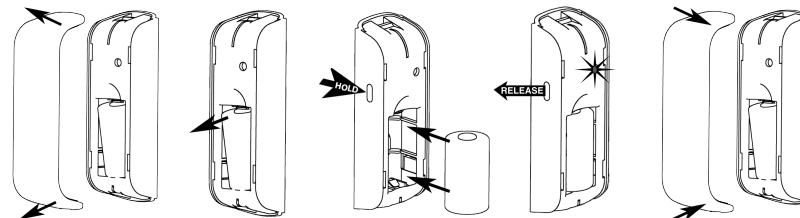

LED INDICATIONS

Solid at power up:	Initializing, checking for Factory Reset
3 flashes then pause:	Searching for network to join

SPECIFICATIONS

Operating Conditions	32–104°F / 0–40°C 10–90% humidity (non-condensing)
Storage	-4–185 °F / -20–85°C 20–95% humidity (non-condensing)
Protocols Supported	ZigBee 3.0
RF Freq.	2.4 GHz
Battery	3V Lithium CR2
Size	Sensor w/ Wall Plate: 2.91" x 0.98" x 0.79" / 74mm x 25mm x 20mm Sensor w/ Stand: 3.03" x 1.65" x 1.10" / 77mm x 42mm x 28mm

FCC STATEMENTS

WARNING: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy, and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC AND INDUSTRY CANADA

RF Radiation Exposure statement: This equipment complies with FCC and Industry Canada RF radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20 centimeters between the antenna and all persons.

INDUSTRY CANADA

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

The distance between user and products should be no less than 20cm
la distance entre l'utilisateur et les produits devraient être au moins 20 cm

SALUS WARRANTY

SALUS North America, Inc. ("Salus") warrants that for a period of five (5) years ("Warranty Period") from the date of purchase by the consumer ("Customer"), this device, excluding batteries ("Product"), shall be free of defects in materials and workmanship under normal use and service in accordance with all supplied instructions. During the warranty period, Salus shall, at its option, repair or replace any defective Products, at no charge for the device. Any replacement and/or repaired devices are warranted for the remainder of the original Warranty Period or ninety (90) days, whichever is longer.

This warranty does not cover removal or reinstallation costs. This warranty does not apply to any Product (i) which has been modified, repaired, or altered, except by Salus or an authorized Salus representative, (ii) which has not been maintained in accordance with any handling or operating instructions supplied by Salus, or (iii) which has been subjected to unusual physical or electrical stress, misuses, abuse, negligence or accidents.

This warranty is the only express warranty Salus makes for the Product. Any implied warranties, including warranties of merchantability or fitness for a particular purpose, are limited to the Warranty Period or the shortest period allowed by law.

SALUS SHALL NOT BE LIABLE FOR ANY LOSS OR DAMAGE OF ANY KIND, INCLUDING ANY SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES RESULTING, DIRECTLY OR INDIRECTLY, FROM ANY BREACH OF ANY WARRANTY, EXPRESS OR IMPLIED, OR ANY OTHER FAILURE OF THIS PRODUCT. Some states and provinces do not allow the exclusion or limitation of incidental or consequential damages, or limitation on the duration of implied warranties of merchantability or fitness, so these exclusions or limitations may not apply to you.

No oral or written information or advice given by Salus or a Salus-authorized representative shall modify or extend this warranty. If any term is held to be illegal or unenforceable, the legality or enforceability of the remaining terms shall not be affected or impaired.

Customer's sole and exclusive remedy under this limited warranty is product repair or replacement as provided herein. If a Product under warranty is defective, the Customer may:

- contact the party ("Seller") from which the Customer purchased the Product to obtain an equivalent replacement product after the Seller has determined that the Product is defective and the Customer is eligible for a replacement, or
- contact Salus Service at support@salusinc.com, to determine whether the device qualifies for a replacement. If a replacement is warranted and is shipped prior to the return of the device under warranty, a credit card is required and a hold may be placed on the Customer's credit card for the value of the replacement until the returned device is verified as eligible for replacement, in which case, the Customer's credit card will not be charged.

This warranty gives you specific legal rights, and you may also have other rights that vary from jurisdiction to jurisdiction. If you have any questions regarding this warranty, please write Salus at:

SALUS North America, Inc.
850 Main Street
Redwood City, CA 94063