
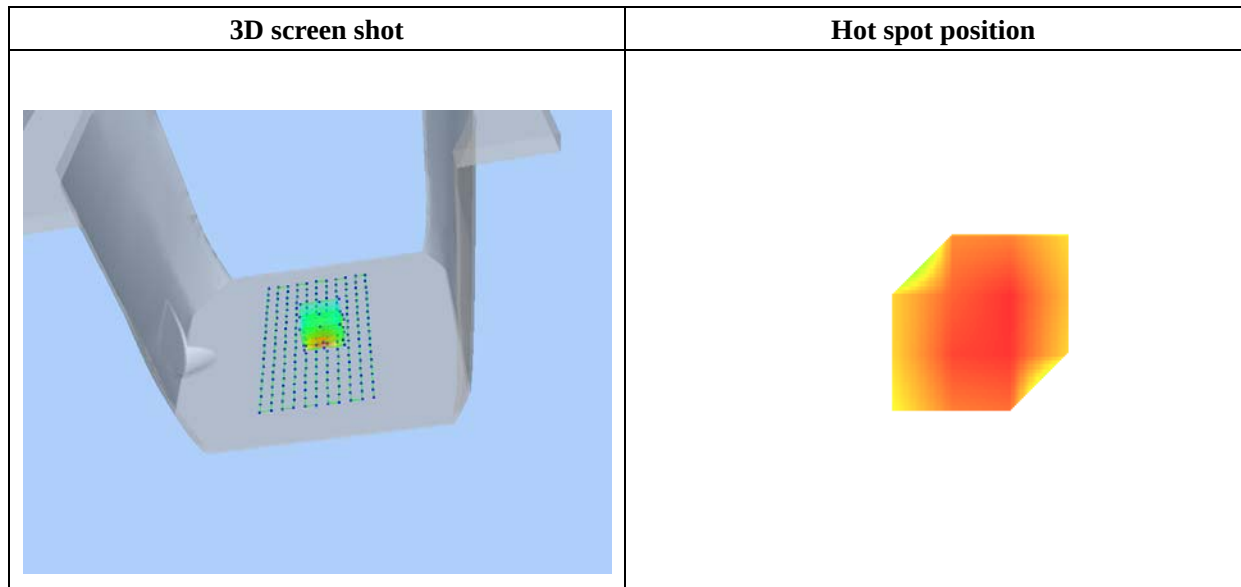


Maximum location: X=6.00, Y=3.00

SAR 10g (W/Kg)	0.075112
SAR 1g (W/Kg)	0.164112

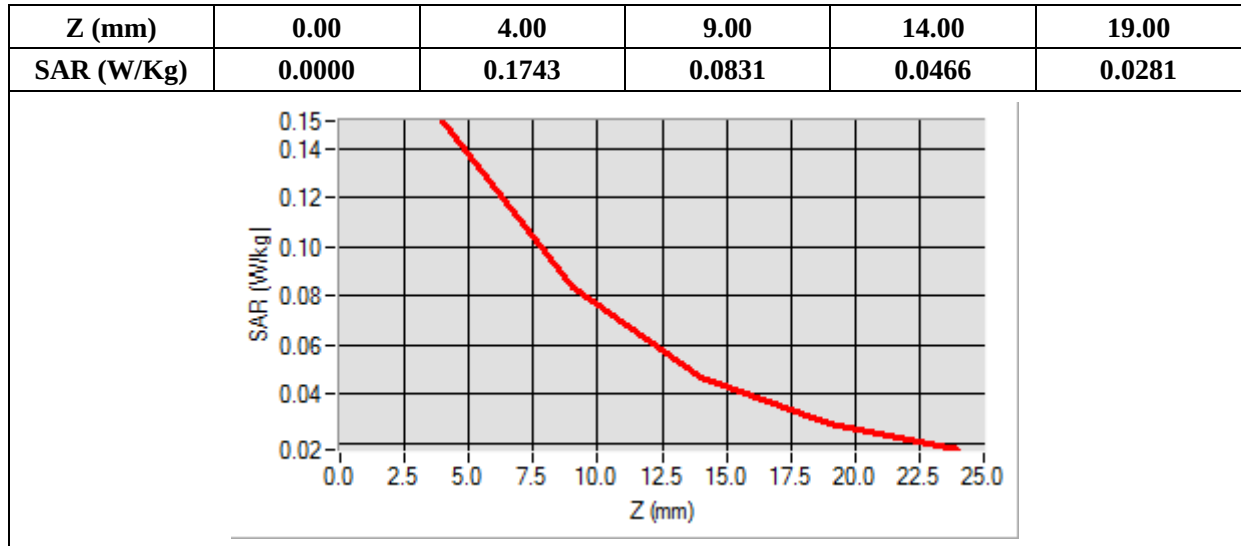

MEASUREMENT 24

Type: Phone measurement (Complete)

Date of measurement: 11/23/2015

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.55; Calibrated: 06/03/2015

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat plane
Device Position	Left side
Band	GPRS1900_4TX
Channels	High
Signal	Duty Cycle: 1:2



B. SAR Measurement Results

Frequency (MHz)	1909.800049
Relative Permittivity (real part)	52.420415
Conductivity (S/m)	1.501966
Power Variation (%)	0.568323
Ambient Temperature	21.1
Liquid Temperature	21.3

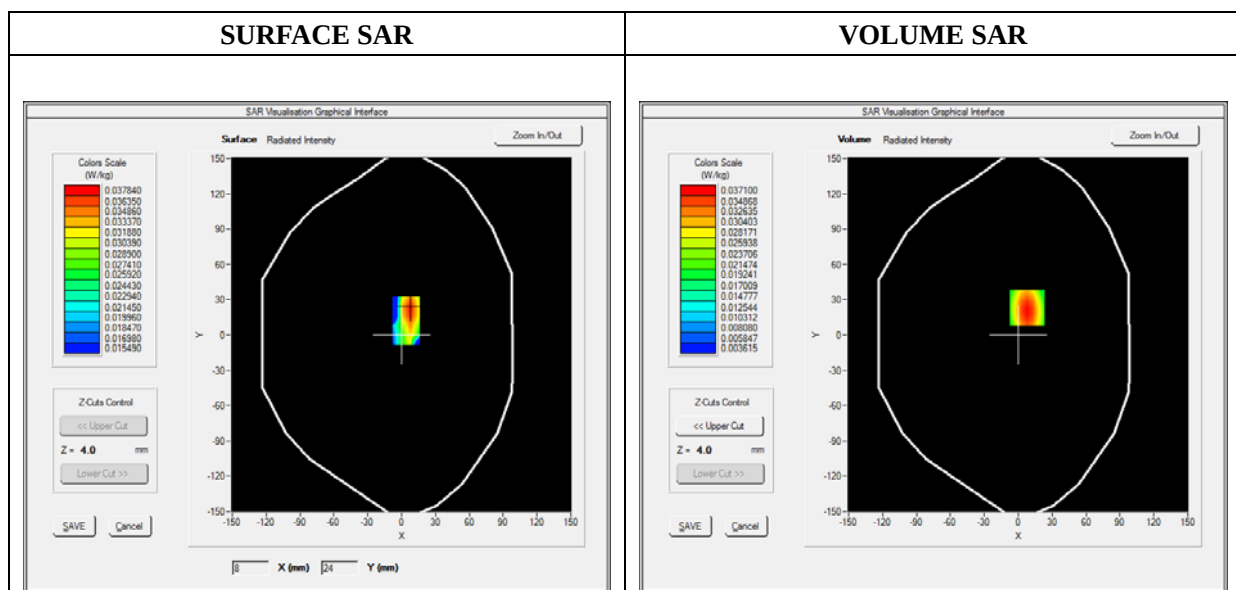

Maximum location: X=8.00, Y=23.00

SAR 10g (W/Kg)	0.025346
SAR 1g (W/Kg)	0.068279

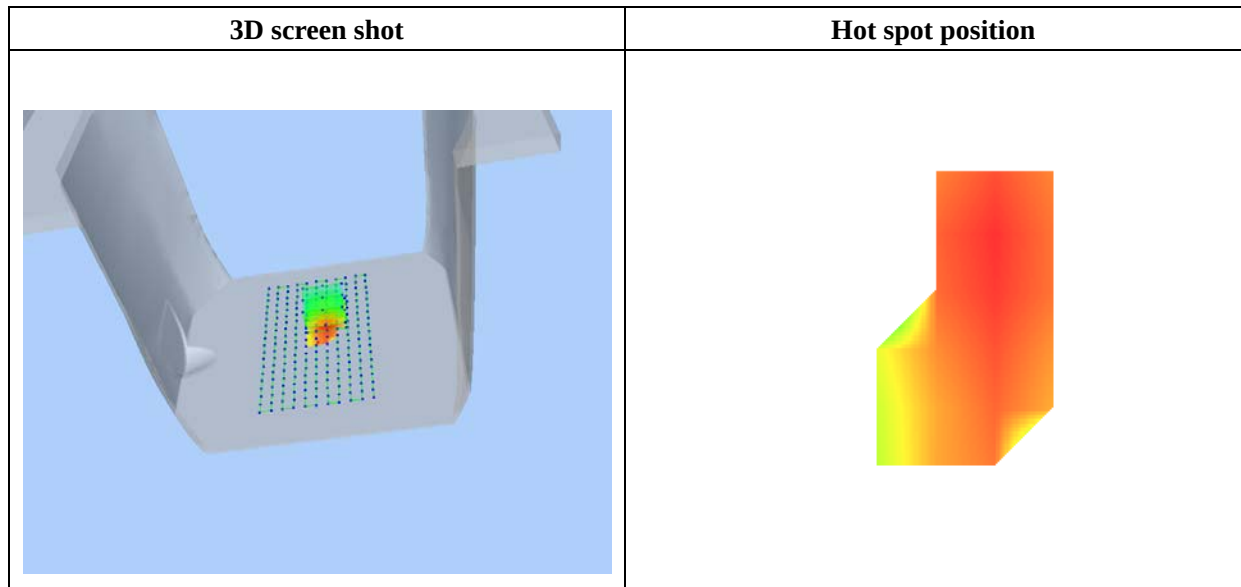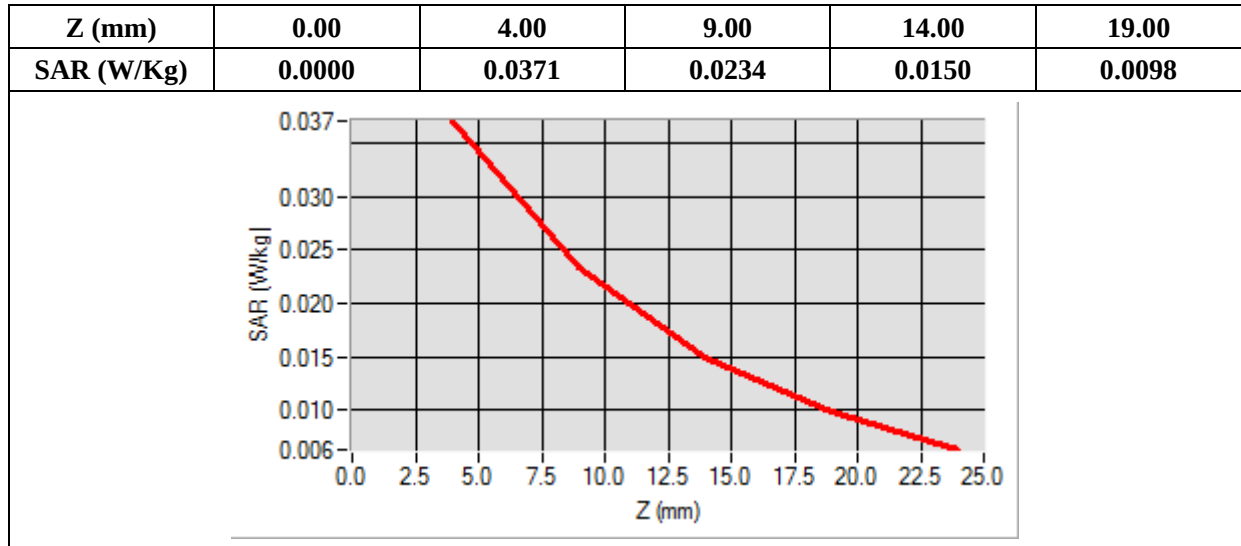

MEASUREMENT 25

Type: Phone measurement (Complete)

Date of measurement: 11/23/2015

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.93; Calibrated: 06/03/2015

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	WCDMA850_RMC
Channels	High
Signal	Duty Cycle 1:1



B. SAR Measurement Results

Frequency (MHz)	846.600000
Relative Permittivity (real part)	41.110245
Conductivity (S/m)	0.871245
Power Variation (%)	1.753989
Ambient Temperature	21.1
Liquid Temperature	21.3

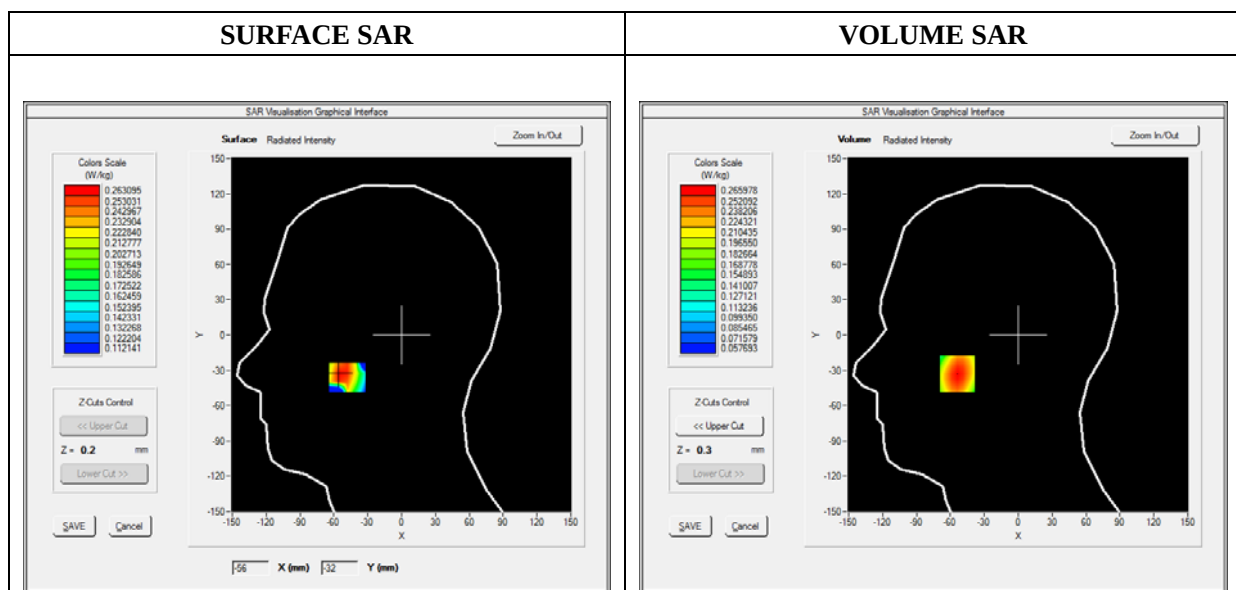

Maximum location: X=-54.00, Y=-33.00

SAR 10g (W/Kg)	0.193228
SAR 1g (W/Kg)	0.267628

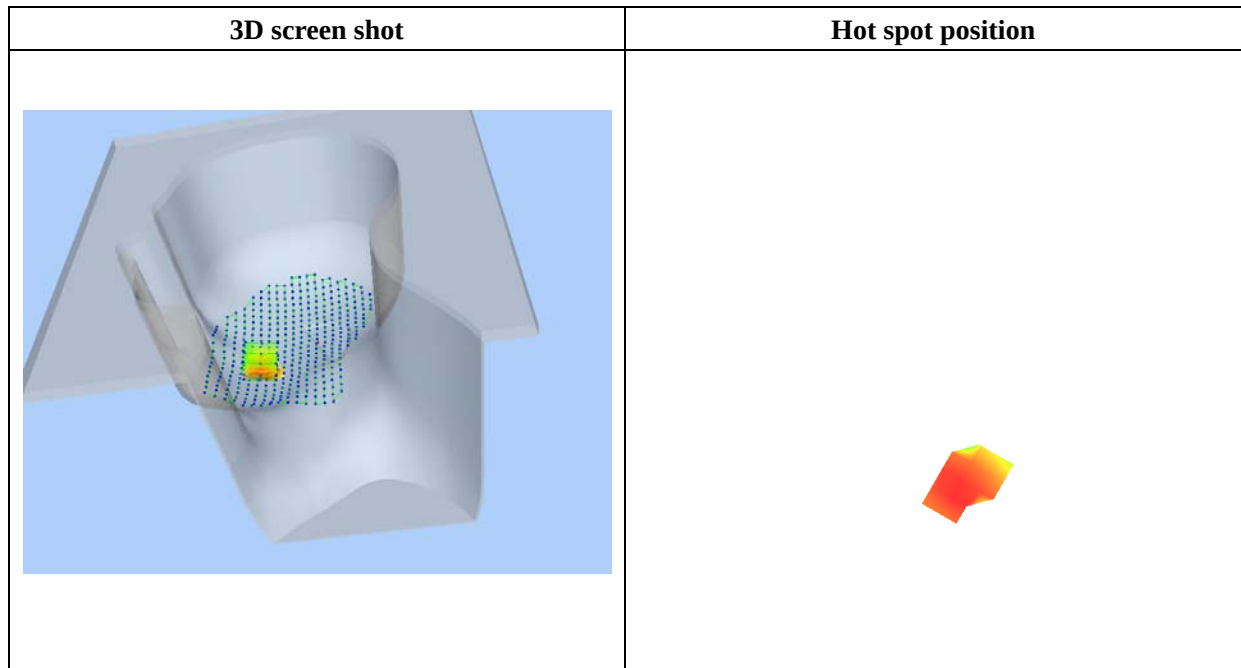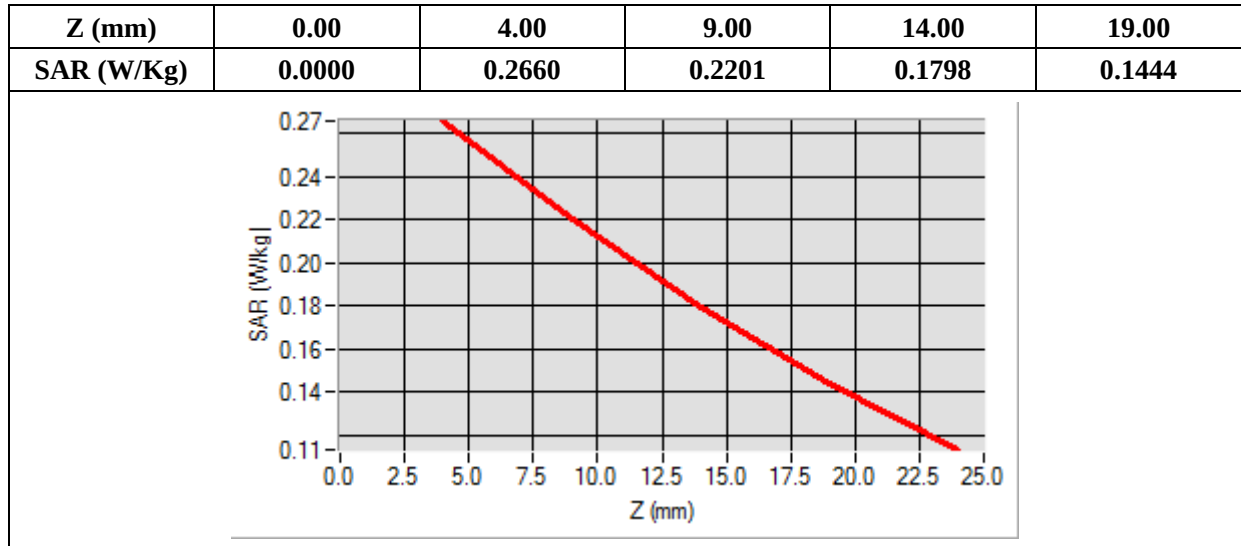

MEASUREMENT 26

Type: Phone measurement (Complete)

Date of measurement: 11/23/2015

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.93; Calibrated: 06/03/2015

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Tilt
Band	WCDMA850_ RMC
Channels	High
Signal	Duty Cycle 1:1



B. SAR Measurement Results

Frequency (MHz)	846.600000
Relative Permittivity (real part)	41.110245
Conductivity (S/m)	0.871245
Power Variation (%)	1.985030
Ambient Temperature	21.1
Liquid Temperature	21.3

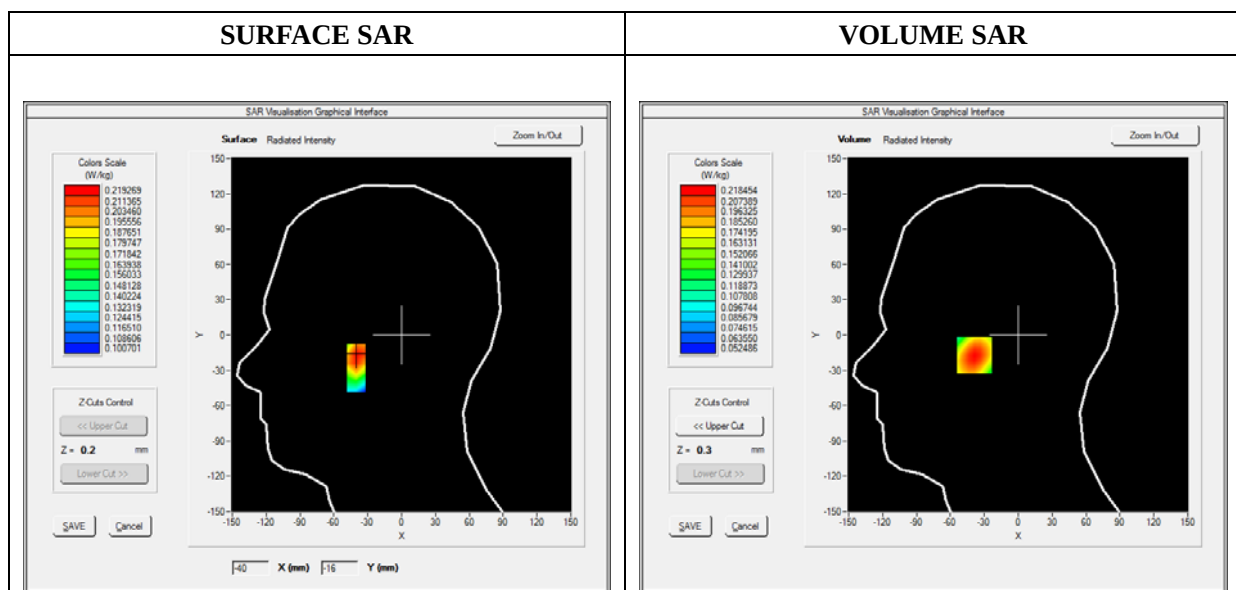

Maximum location: X=-39.00, Y=-17.00

SAR 10g (W/Kg)	0.158729
SAR 1g (W/Kg)	0.212566

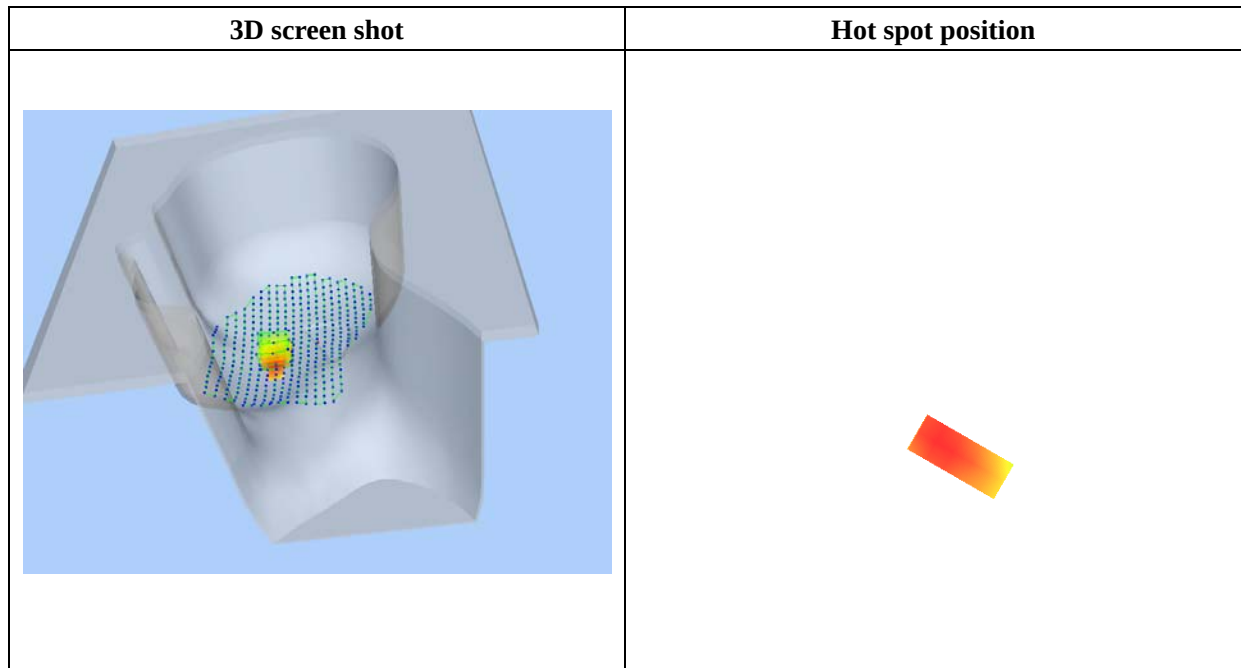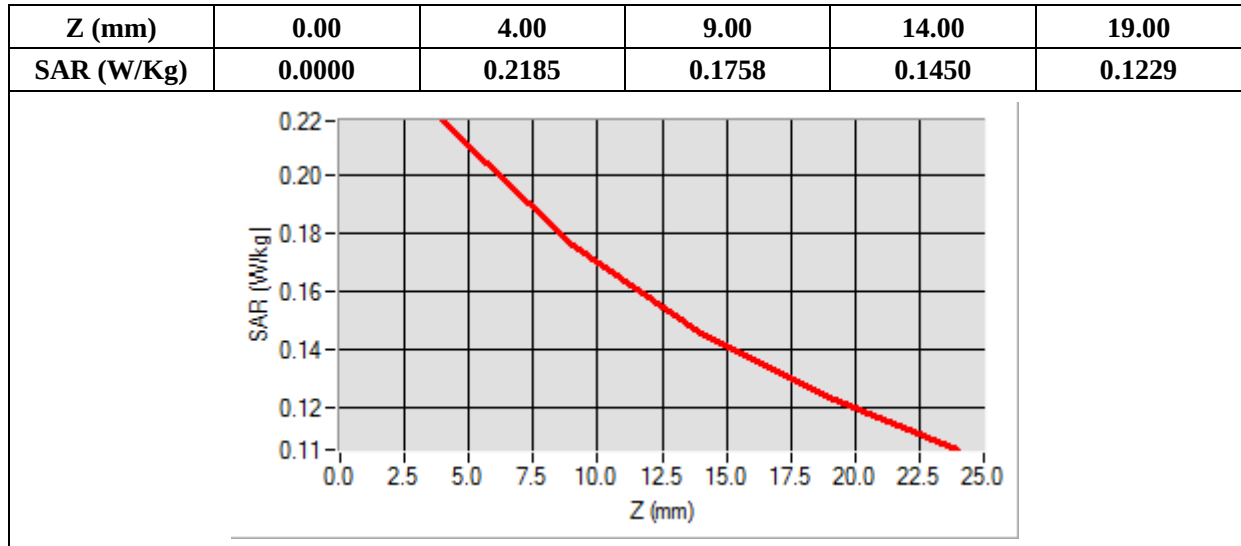

MEASUREMENT 27

Type: Phone measurement (Complete)

Date of measurement: 11/23/2015

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.93; Calibrated: 06/03/2015

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Cheek
Band	WCDMA850_RMC
Channels	High
Signal	Duty Cycle 1:1



B. SAR Measurement Results

Frequency (MHz)	846.600000
Relative Permittivity (real part)	41.110245
Conductivity (S/m)	0.871245
Power Variation (%)	1.694380
Ambient Temperature	21.1
Liquid Temperature	21.3

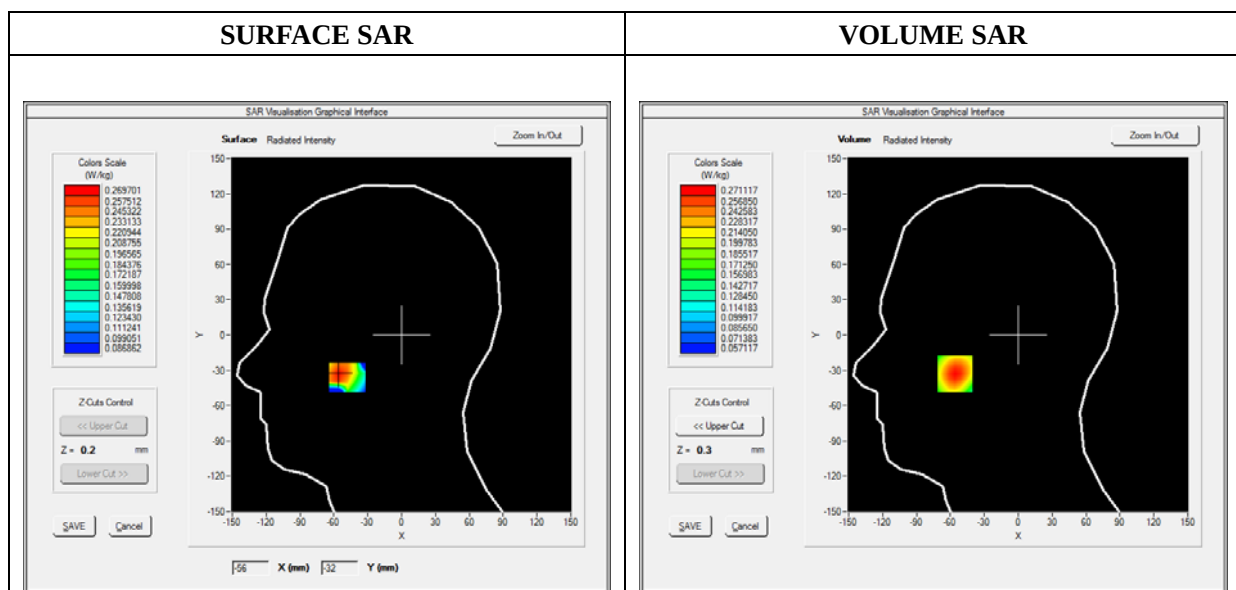

Maximum location: X=-56.00, Y=-33.00

SAR 10g (W/Kg)	0.195993
SAR 1g (W/Kg)	0.266891

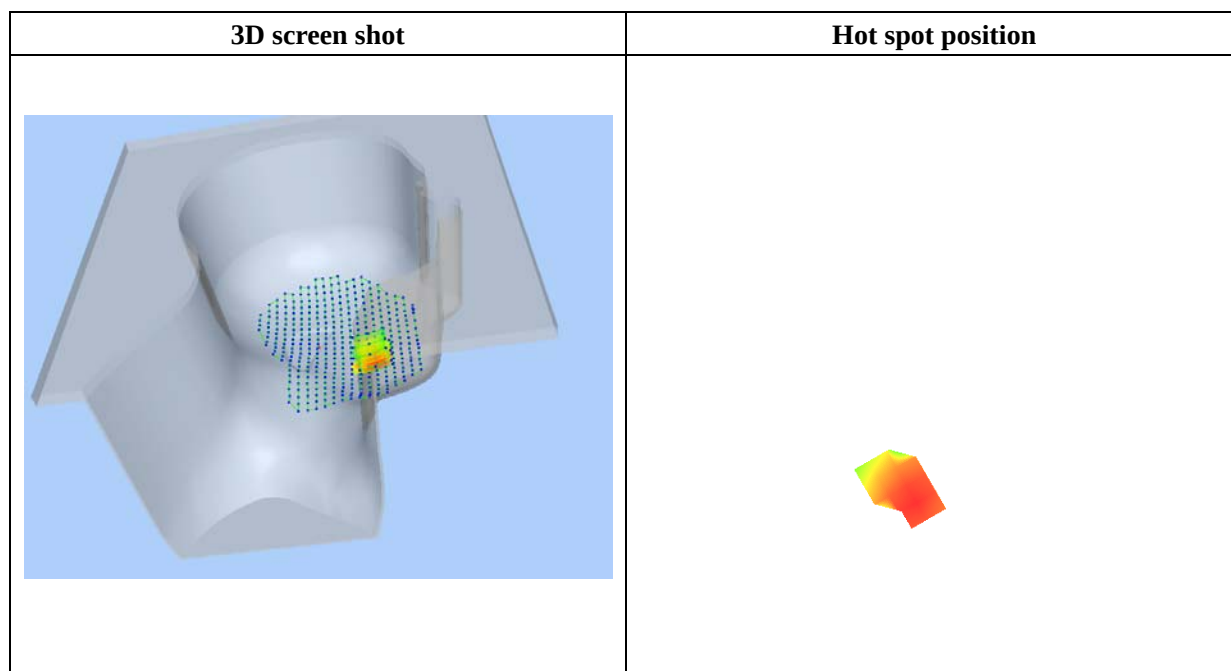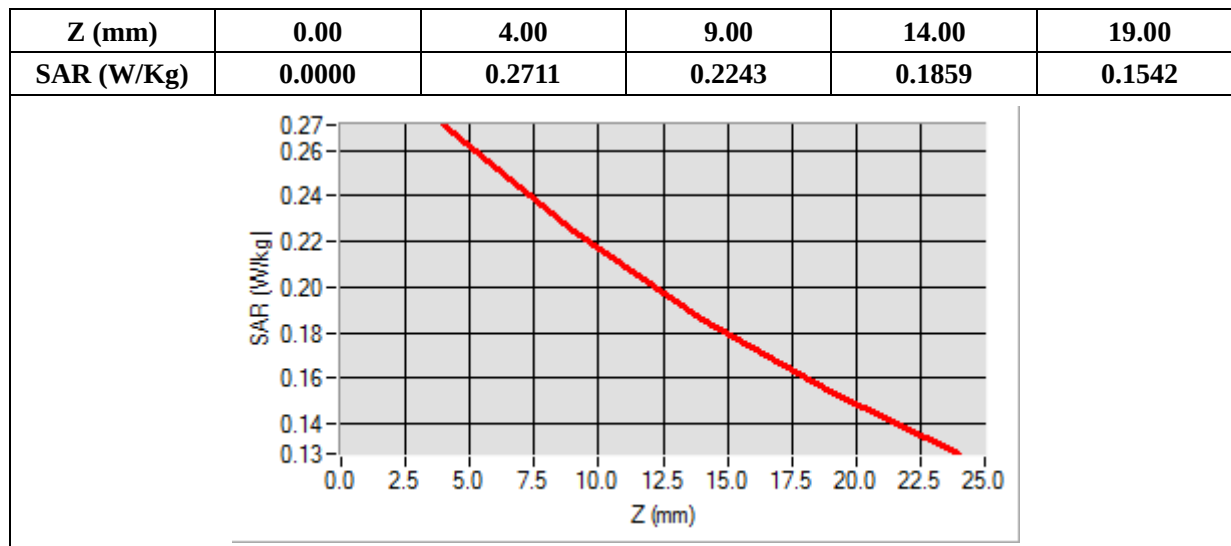

MEASUREMENT 28

Type: Phone measurement (Complete)

Date of measurement: 11/23/2015

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.93; Calibrated: 06/03/2015

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Tilt
Band	WCDMA850_RMC
Channels	High
Signal	Duty Cycle 1:1


B. SAR Measurement Results


Frequency (MHz)	846.600000
Relative Permittivity (real part)	41.110245
Conductivity (S/m)	0.871245
Power Variation (%)	1.869586
Ambient Temperature	21.1
Liquid Temperature	21.3

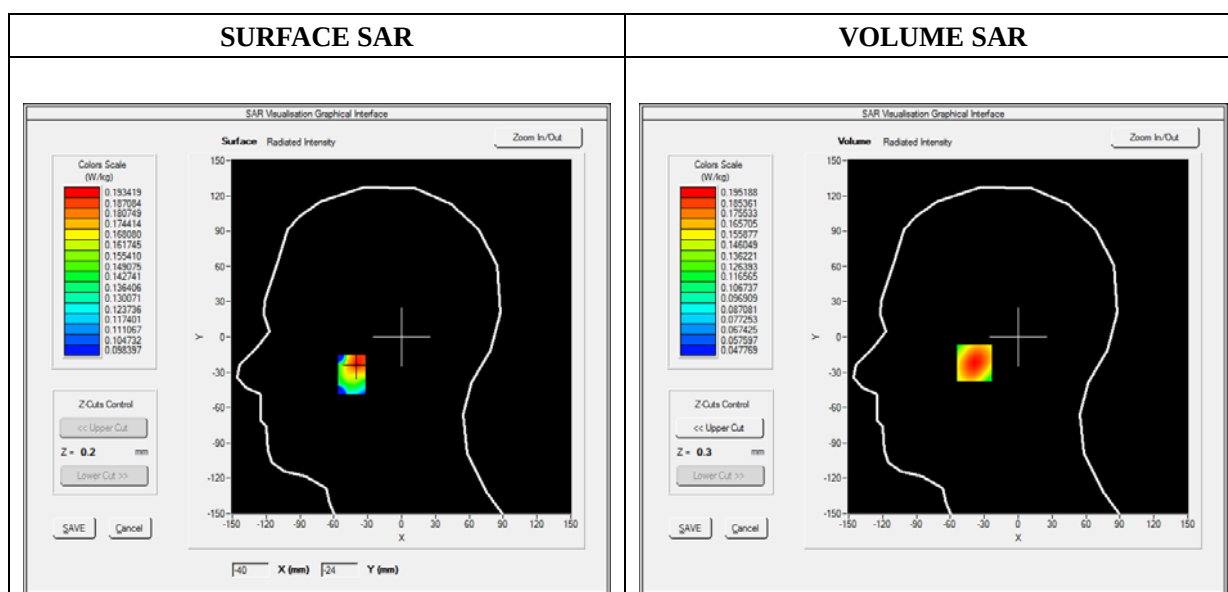

Maximum location: X=-39.00, Y=-22.00

SAR 10g (W/Kg)	0.142546
SAR 1g (W/Kg)	0.195781

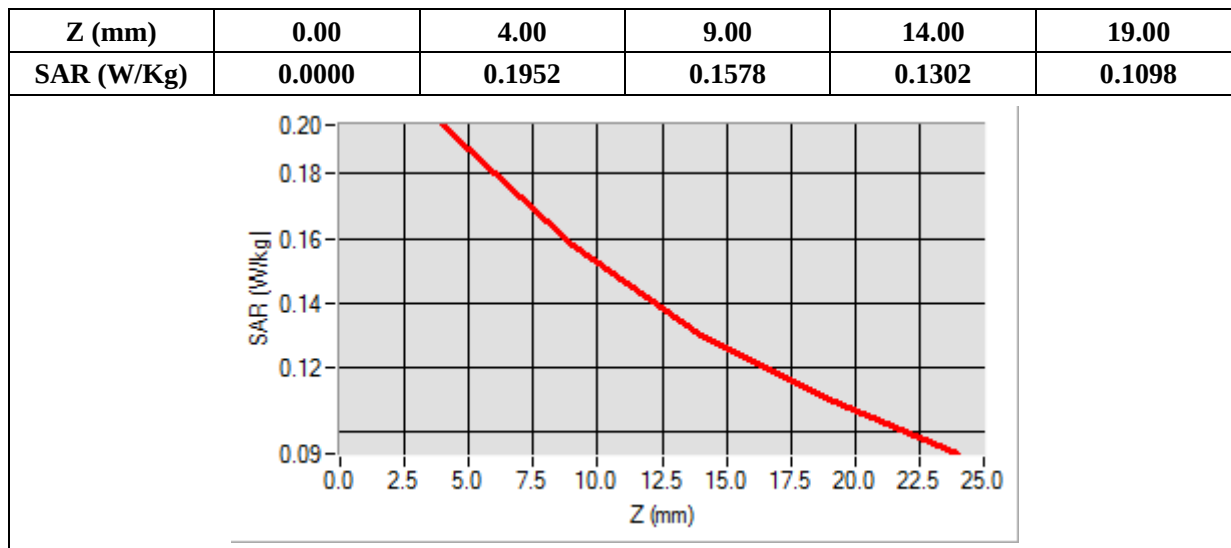

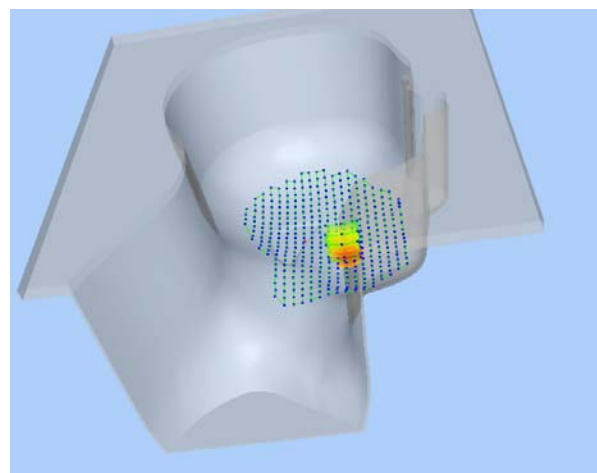3D screen shot	Hot spot position
	

MEASUREMENT 29

Type: Phone measurement (Complete)

Date of measurement: 11/23/2015

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 7.13; Calibrated: 06/03/2015

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	WCDMA850_RMC
Channels	High
Signal	Duty Cycle 1:1

B. SAR Measurement Results


Frequency (MHz)	846.600000
Relative Permittivity (real part)	54.851214
Conductivity (S/m)	0.951454
Power Variation (%)	0.986458
Ambient Temperature	21.1
Liquid Temperature	21.3

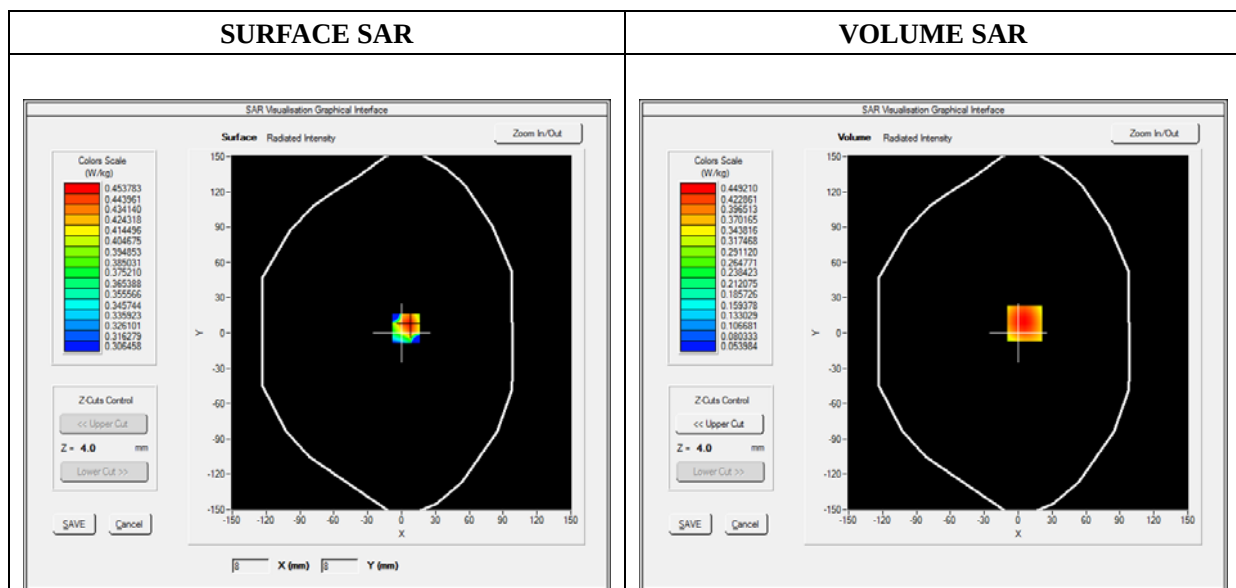


Maximum location: X=6.00, Y=8.00

SAR 10g (W/Kg)	0.313051
SAR 1g (W/Kg)	0.434357

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.4492	0.3415	0.2580	0.1931

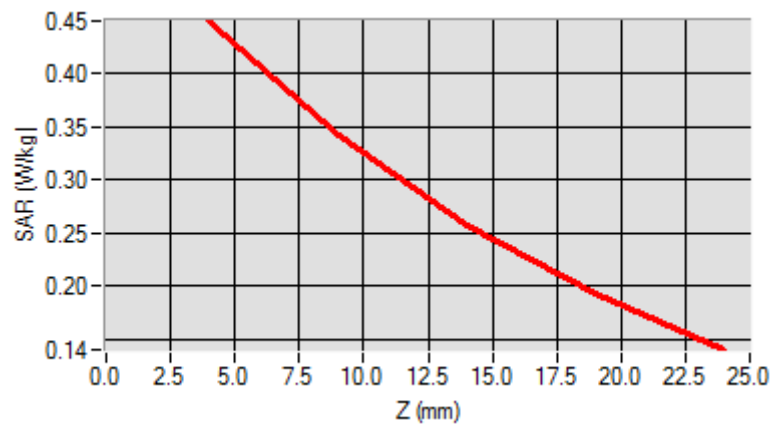

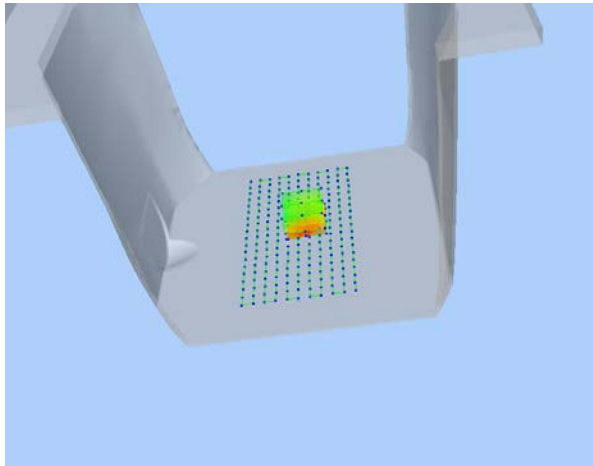3D screen shot	Hot spot position
	

MEASUREMENT 30

Type: Phone measurement (Complete)

Date of measurement: 11/23/2015

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 7.13; Calibrated: 06/03/2015

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Front
Band	WCDMA850_RMC
Channels	High
Signal	Duty Cycle 1:1



B. SAR Measurement Results

Frequency (MHz)	846.600000
Relative Permittivity (real part)	54.851214
Conductivity (S/m)	0.951454
Power Variation (%)	0.964537
Ambient Temperature	21.1
Liquid Temperature	21.3

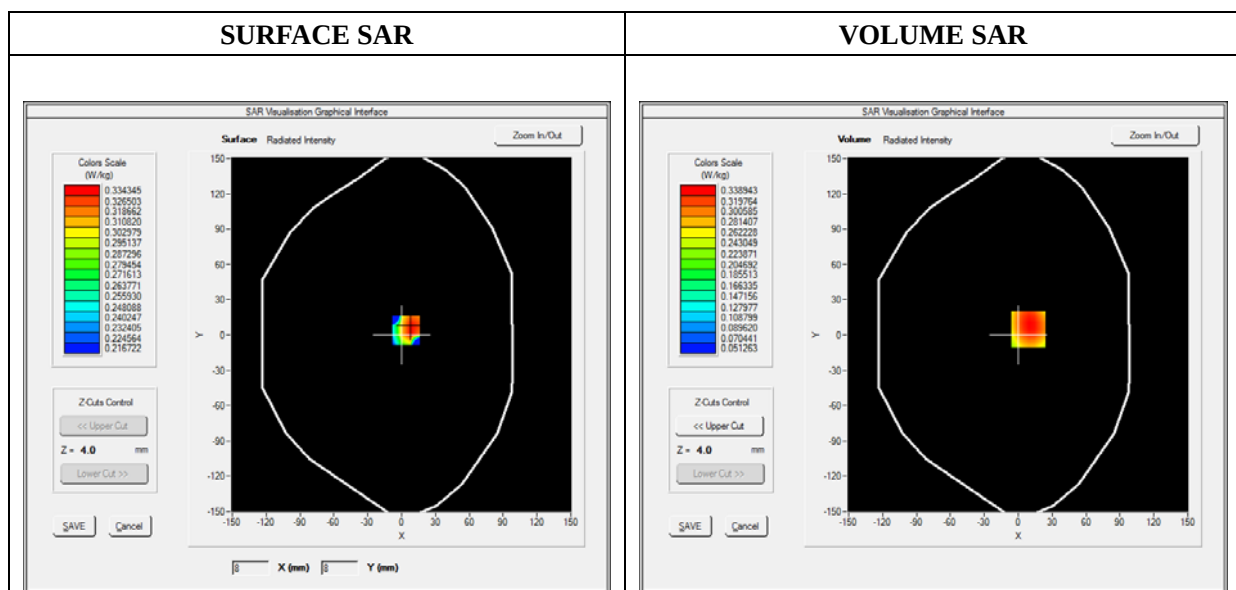

Maximum location: X=9.00, Y=5.00

SAR 10g (W/Kg)	0.241206
SAR 1g (W/Kg)	0.346527

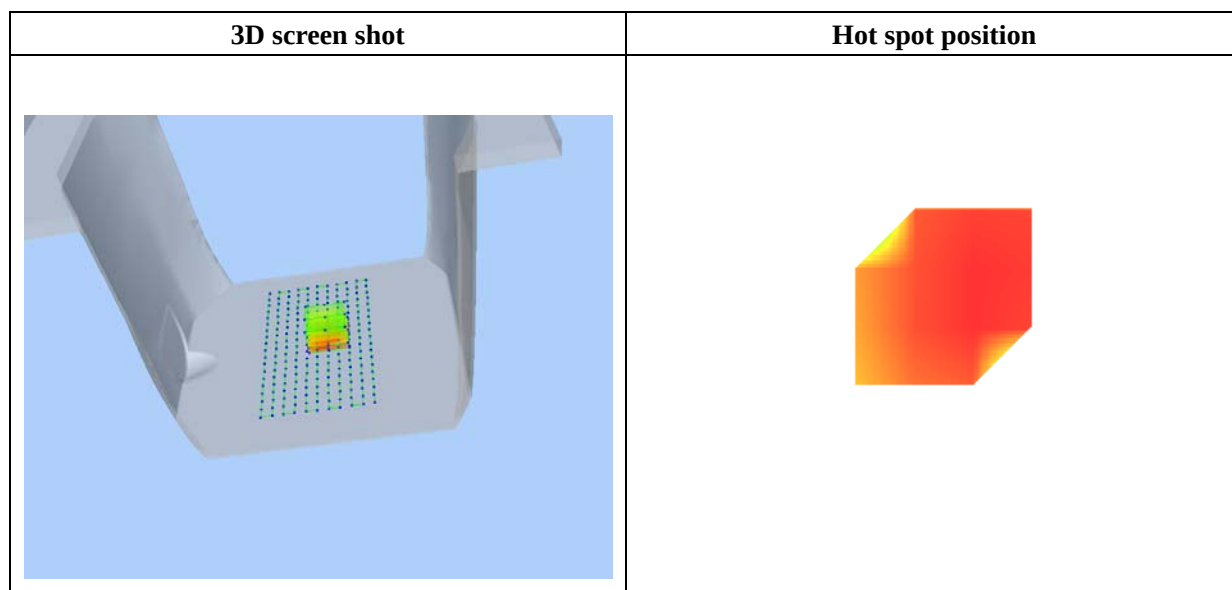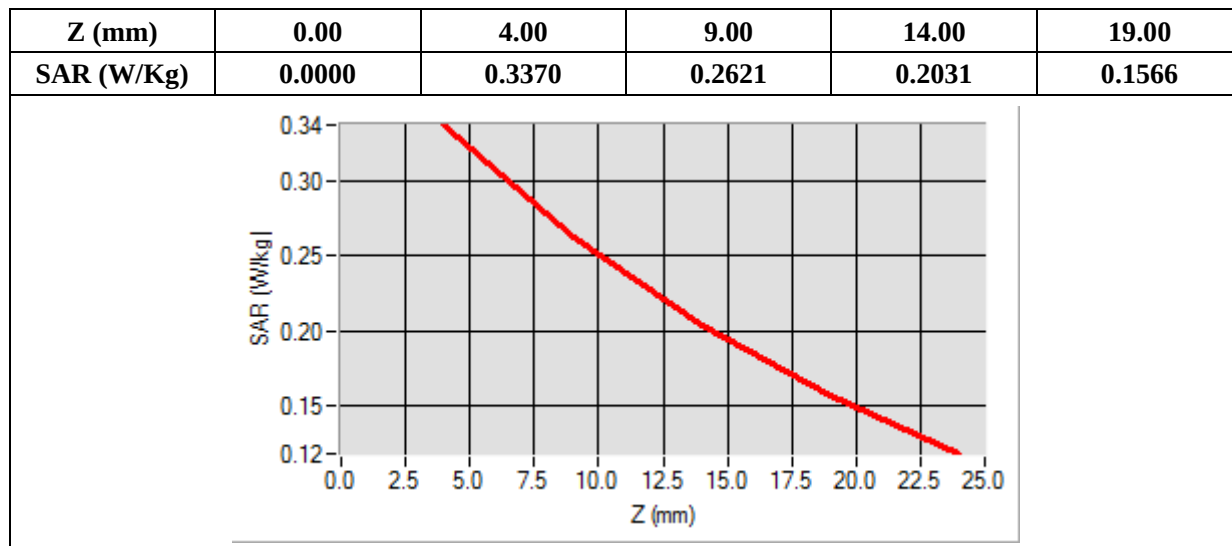

MEASUREMENT 31

Type: Phone measurement (Complete)

Date of measurement: 11/23/2015

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 7.13; Calibrated: 06/03/2015

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Bottom
Band	WCDMA850_RMC
Channels	High
Signal	Duty Cycle 1:1



B. SAR Measurement Results

Frequency (MHz)	846.600000
Relative Permittivity (real part)	54.851214
Conductivity (S/m)	0.951454
Power Variation (%)	0.579359
Ambient Temperature	21.1
Liquid Temperature	21.3

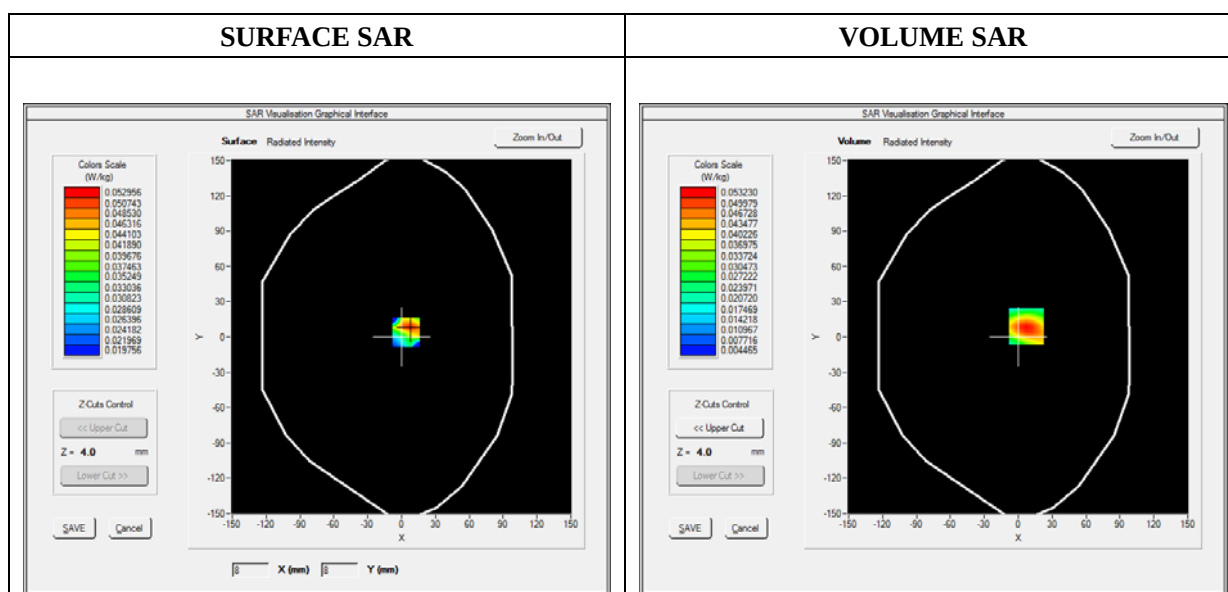

Maximum location: X=7.00, Y=9.00

SAR 10g (W/Kg)	0.031061
SAR 1g (W/Kg)	0.053452

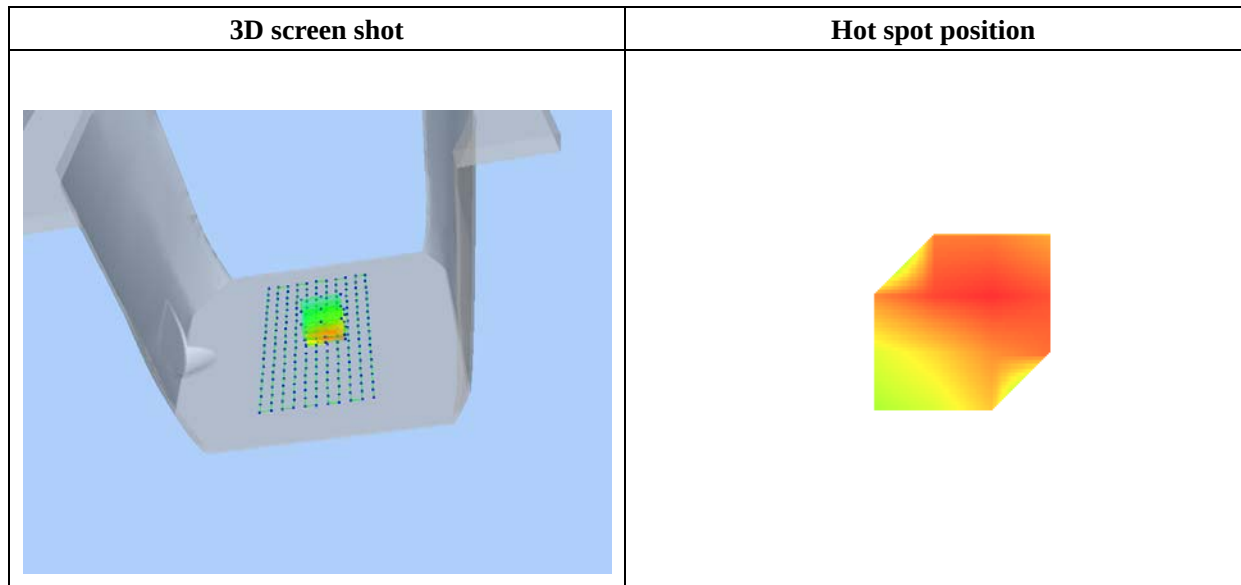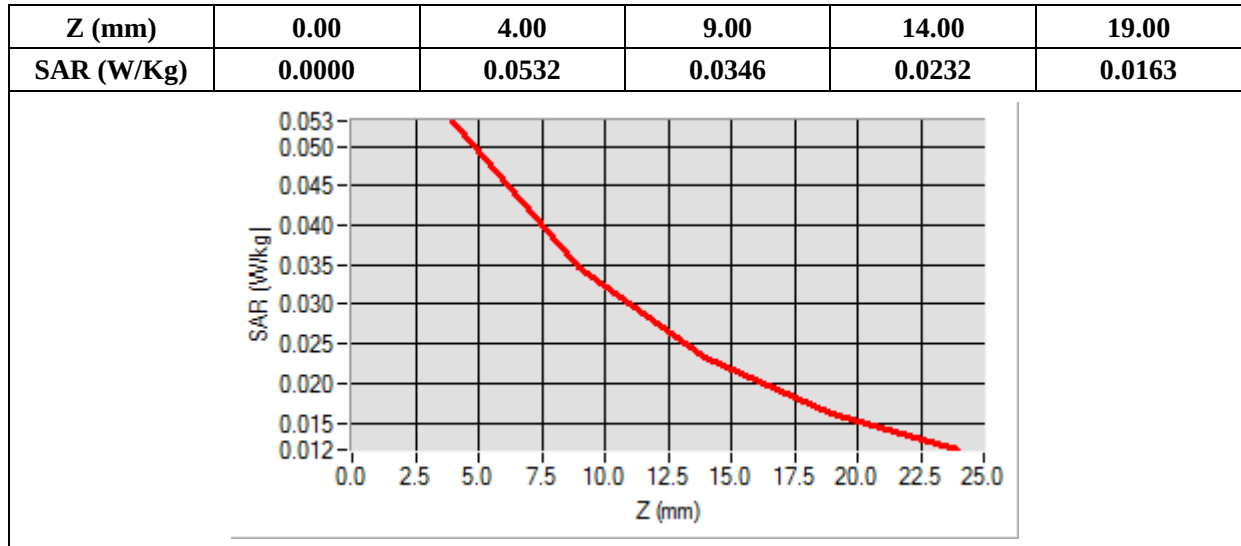

MEASUREMENT 32

Type: Phone measurement (Complete)

Date of measurement: 11/23/2015

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 7.13; Calibrated: 06/03/2015

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Right side
Band	WCDMA850_RMC
Channels	High
Signal	Duty Cycle 1:1



B. SAR Measurement Results

Frequency (MHz)	846.600000
Relative Permittivity (real part)	54.851214
Conductivity (S/m)	0.951454
Power Variation (%)	0.547234
Ambient Temperature	21.1
Liquid Temperature	21.3

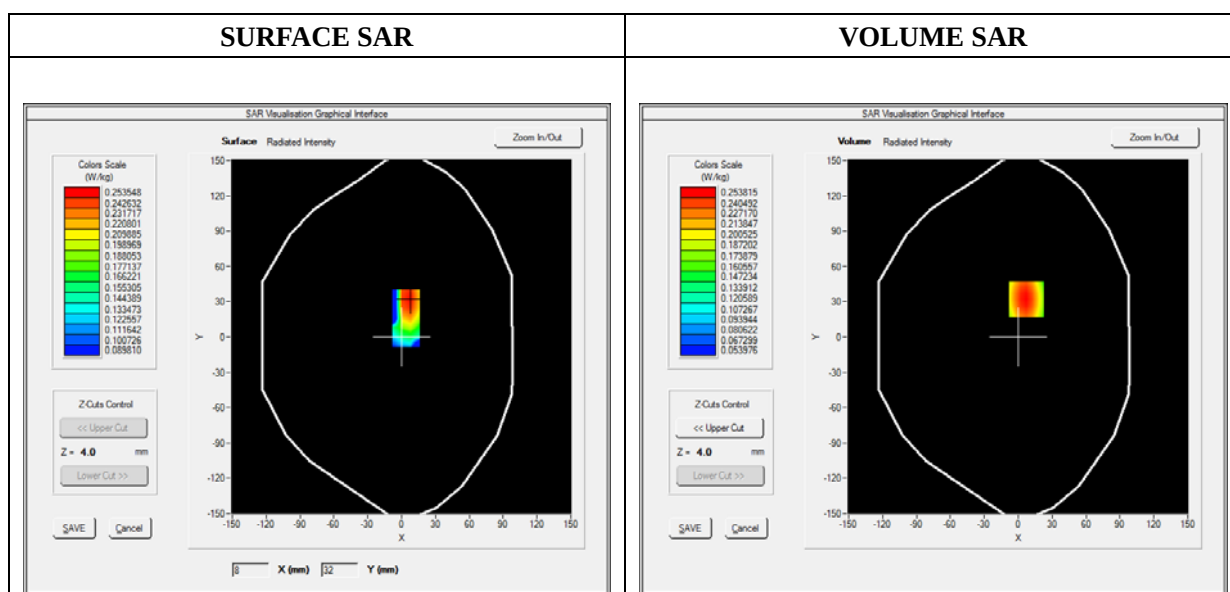

Maximum location: X=7.00, Y=32.00

SAR 10g (W/Kg)	0.168898
SAR 1g (W/Kg)	0.252671

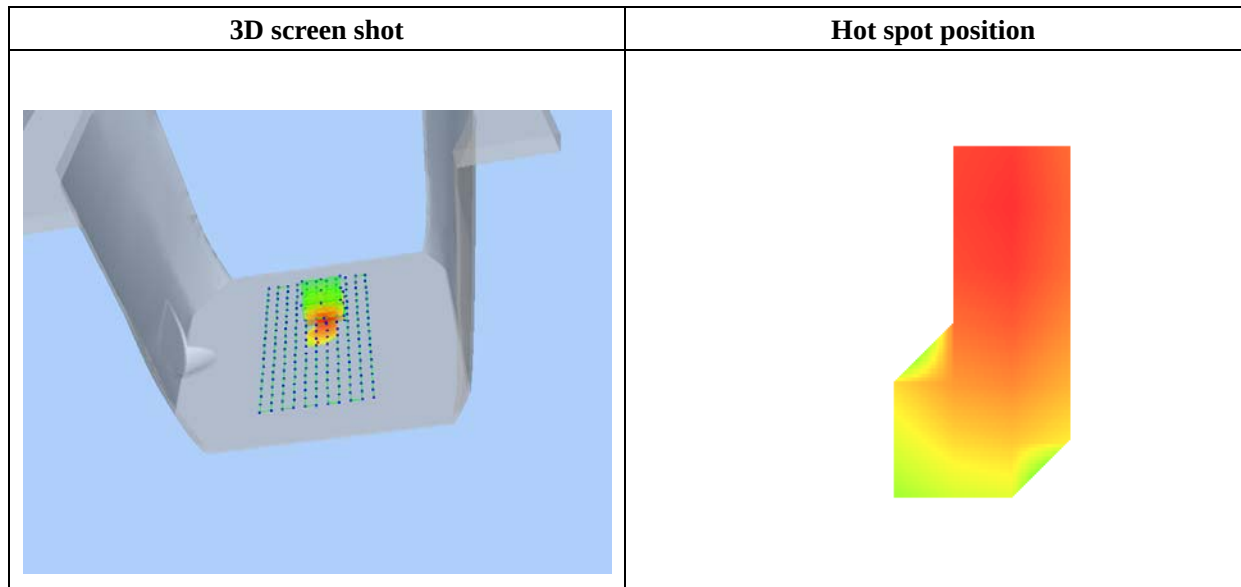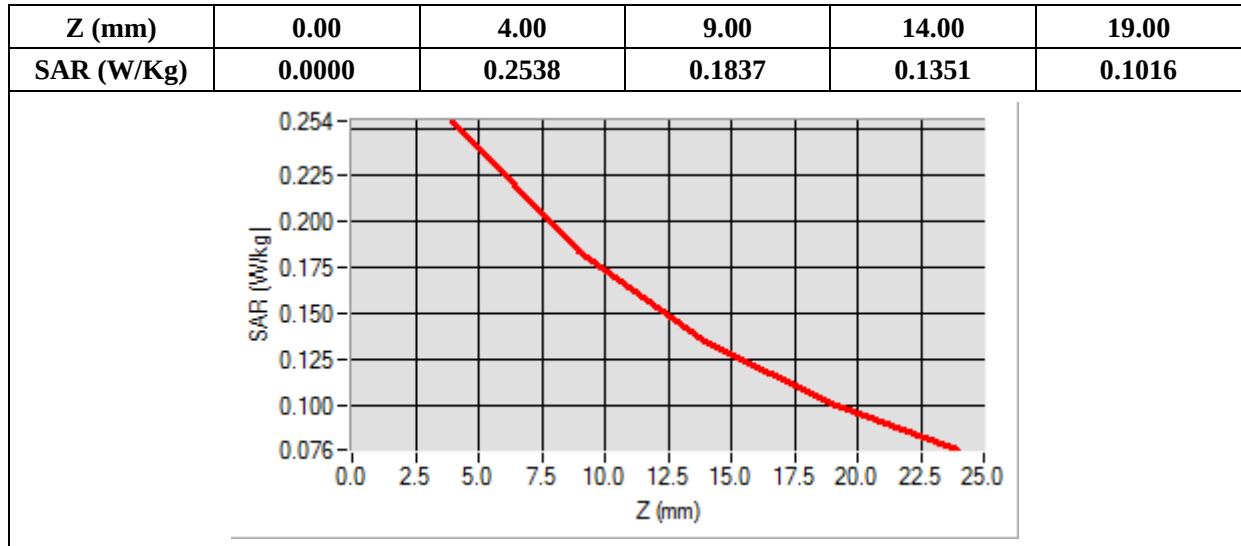

MEASUREMENT 33

Type: Phone measurement (Complete)

Date of measurement: 11/23/2015

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 7.13; Calibrated: 06/03/2015

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Left side
Band	WCDMA850_RMC
Channels	High
Signal	Duty Cycle 1:1



B. SAR Measurement Results

Frequency (MHz)	846.600000
Relative Permittivity (real part)	54.851214
Conductivity (S/m)	0.951454
Power Variation (%)	0.547234
Ambient Temperature	21.1
Liquid Temperature	21.3

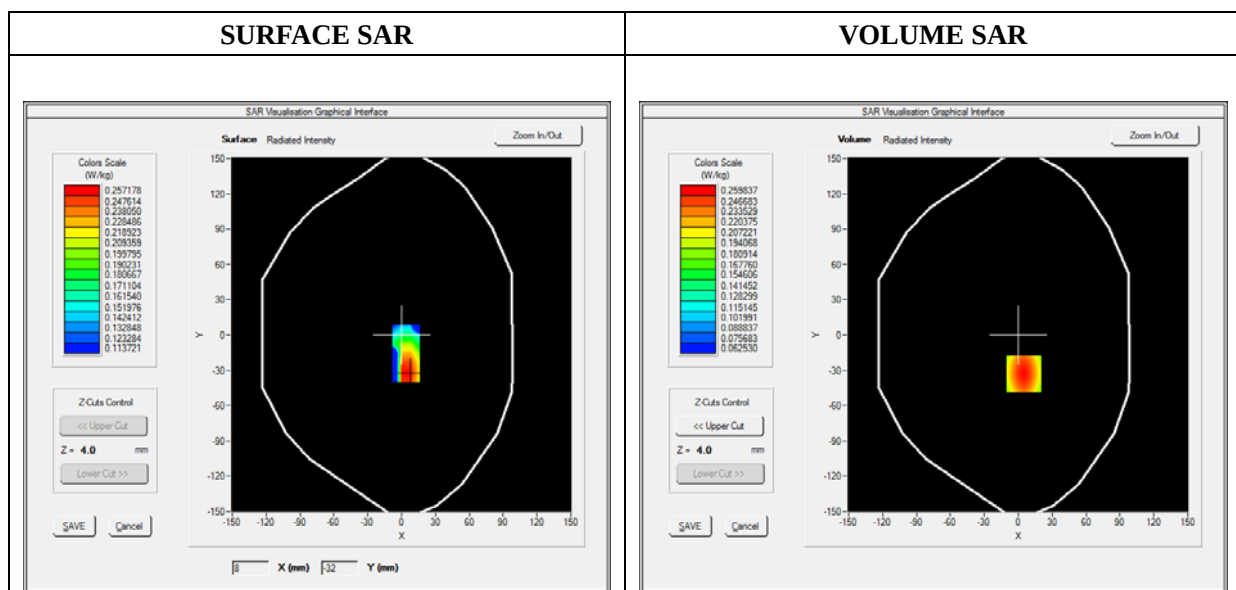

Maximum location: X=5.00, Y=-33.00

SAR 10g (W/Kg)	0.174505
SAR 1g (W/Kg)	0.236156

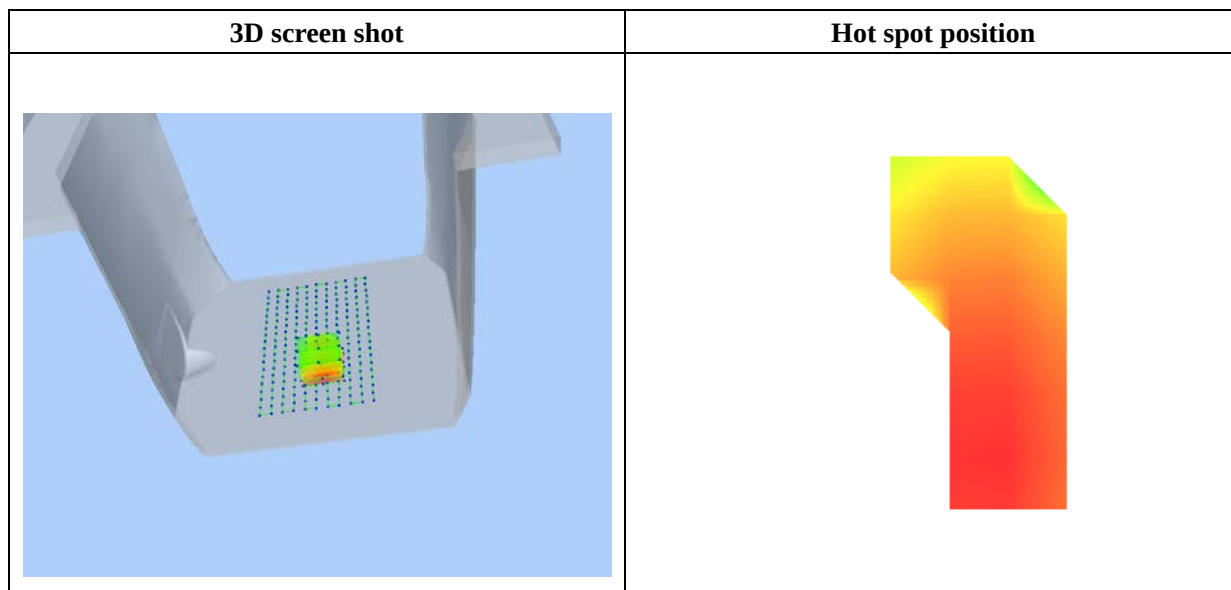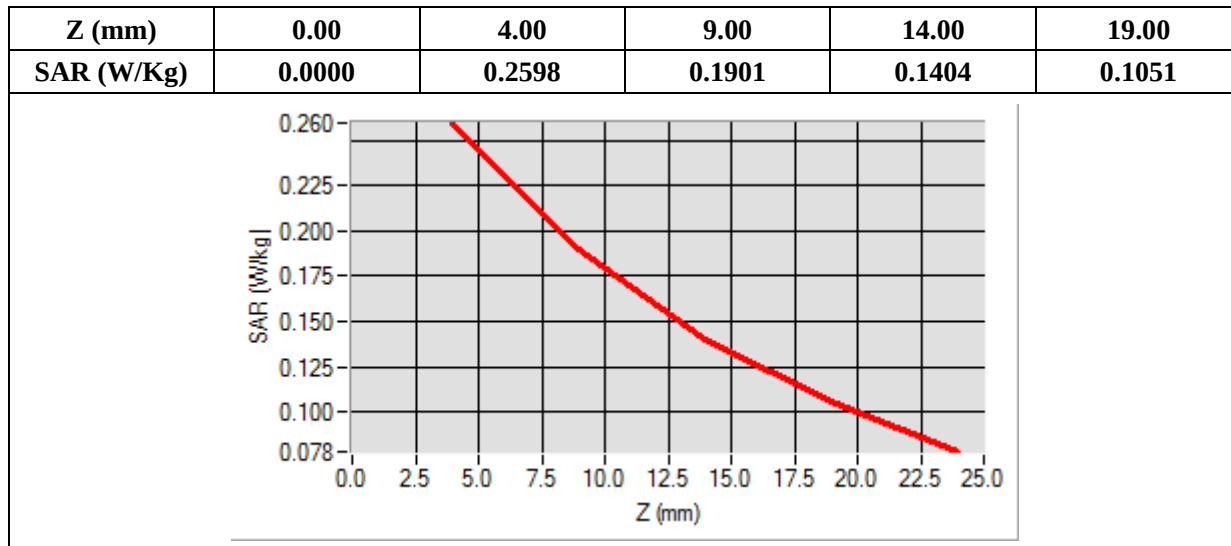

MEASUREMENT 34

Type: Phone measurement (Complete)

Date of measurement: 11/23/2015

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.35; Calibrated: 06/03/2015

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	WCDMA1900_RMC
Channels	Low
Signal	Duty Cycle 1:1



B. SAR Measurement Results

Frequency (MHz)	1852.400000
Relative Permittivity (real part)	38.560124
Conductivity (S/m)	1.380369
Power Variation (%)	1.546537
Ambient Temperature	21.1
Liquid Temperature	21.3

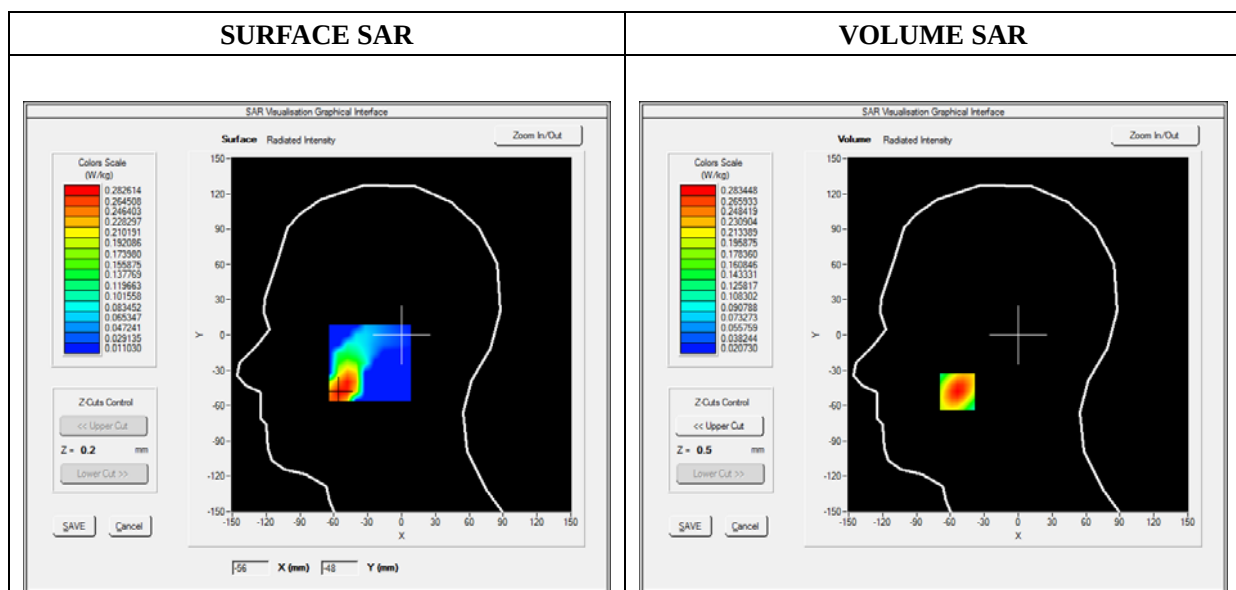

Maximum location: X=-54.00, Y=-48.00

SAR 10g (W/Kg)	0.164384
SAR 1g (W/Kg)	0.225468

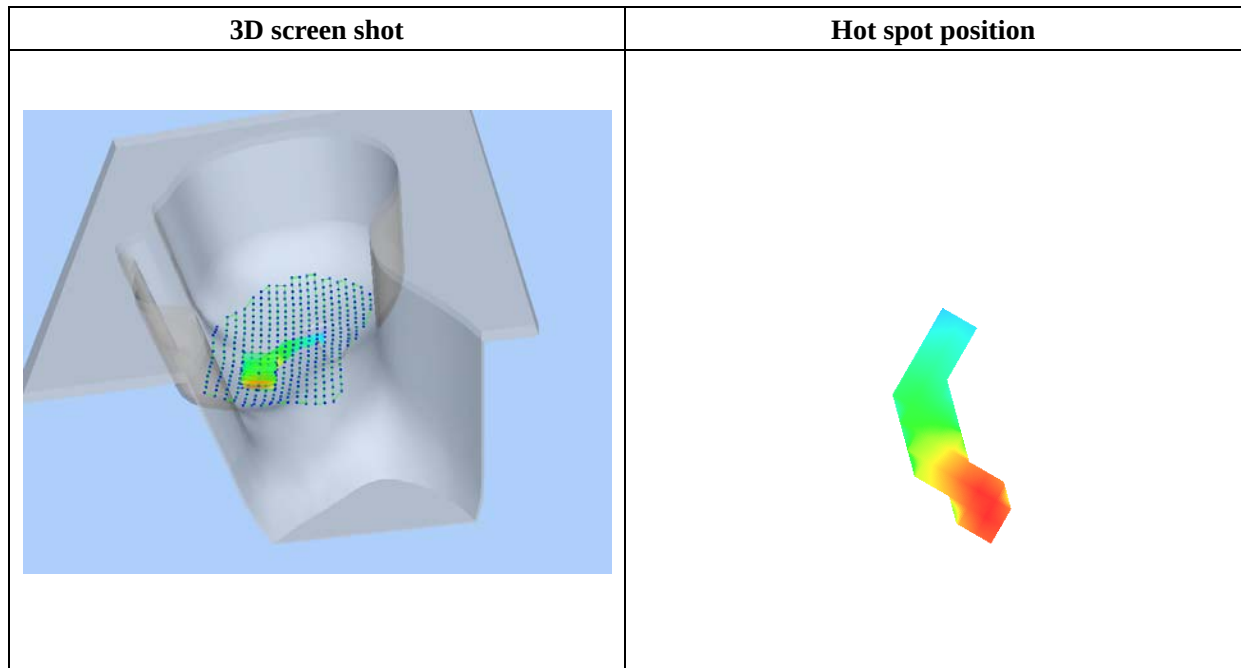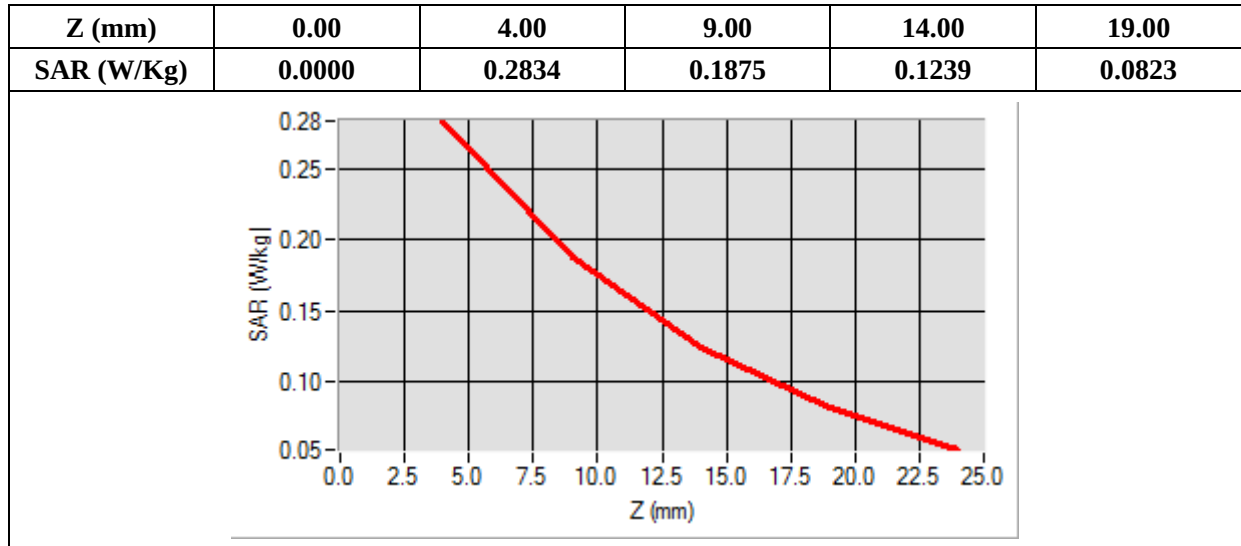

MEASUREMENT 35

Type: Phone measurement (Complete)

Date of measurement: 11/23/2015

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.35; Calibrated: 06/03/2015

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Tilt
Band	WCDMA1900_RMC
Channels	Low
Signal	Duty Cycle 1:1



B. SAR Measurement Results

Frequency (MHz)	1852.400000
Relative Permittivity (real part)	38.560124
Conductivity (S/m)	1.380369
Power Variation (%)	1.568358
Ambient Temperature	21.1
Liquid Temperature	21.3

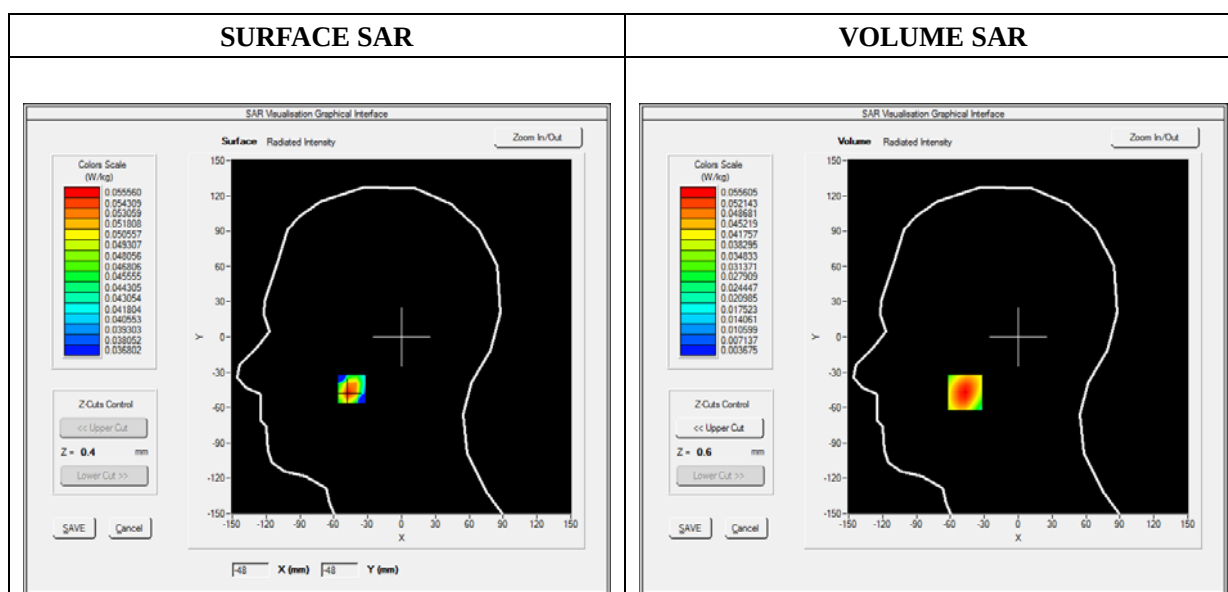

Maximum location: X=-47.00, Y=-47.00

SAR 10g (W/Kg)	0.032985
SAR 1g (W/Kg)	0.064535

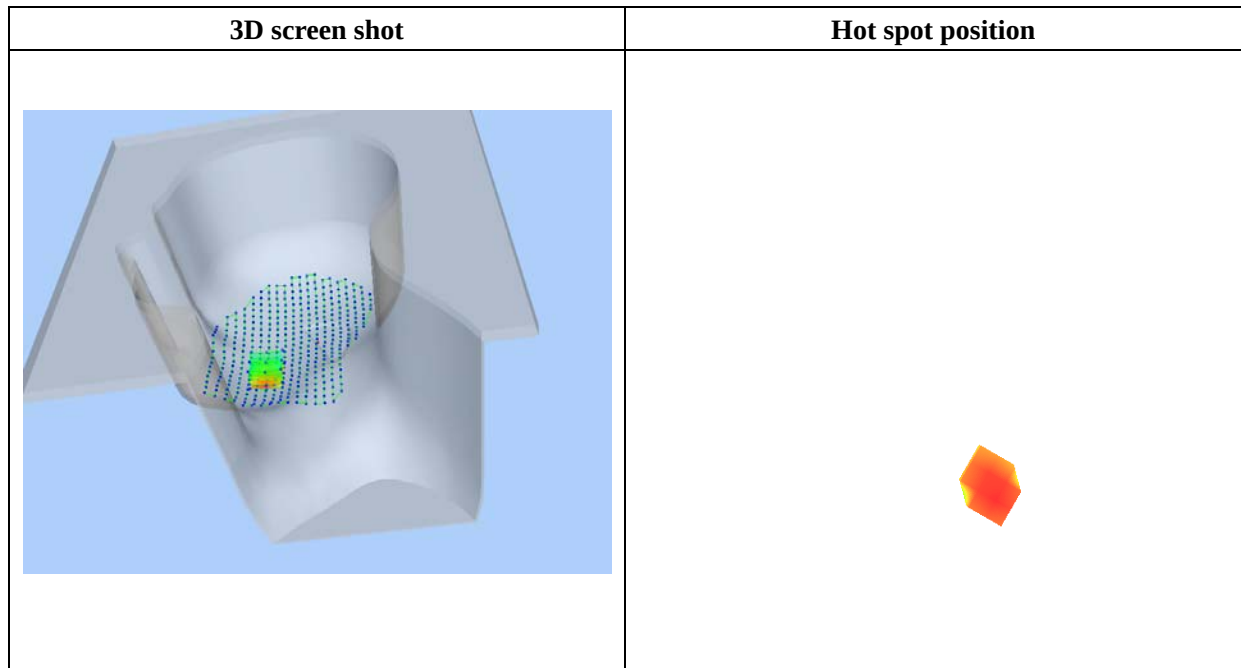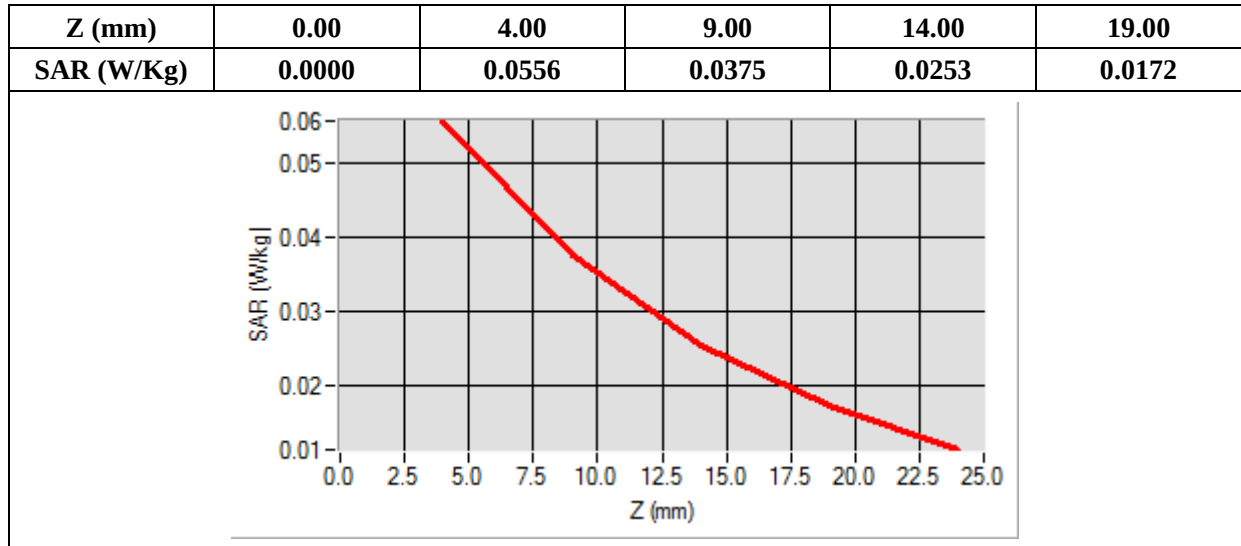

MEASUREMENT 36

Type: Phone measurement (Complete)

Date of measurement: 11/23/2015

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.35; Calibrated: 06/03/2015

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Cheek
Band	WCDMA1900_RMC
Channels	Low
Signal	Duty Cycle 1:1



B. SAR Measurement Results

Frequency (MHz)	1852.400000
Relative Permittivity (real part)	38.560124
Conductivity (S/m)	1.380369
Power Variation (%)	1.969586
Ambient Temperature	21.1
Liquid Temperature	21.3

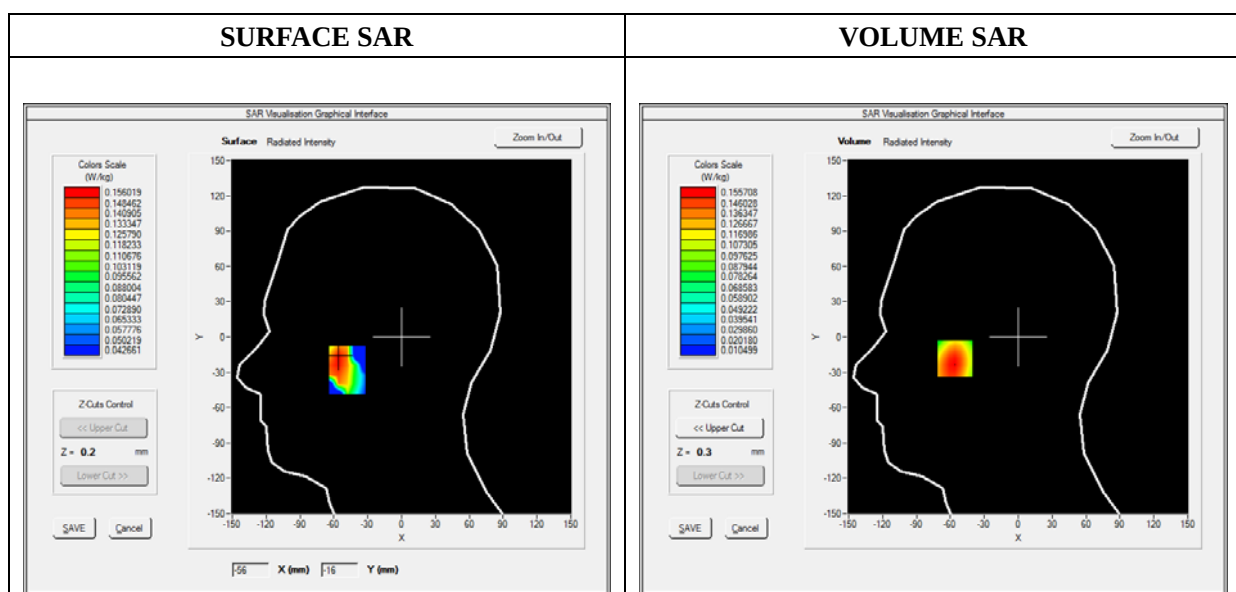

Maximum location: X=-56.00, Y=-18.00

SAR 10g (W/Kg)	0.095179
SAR 1g (W/Kg)	0.156357

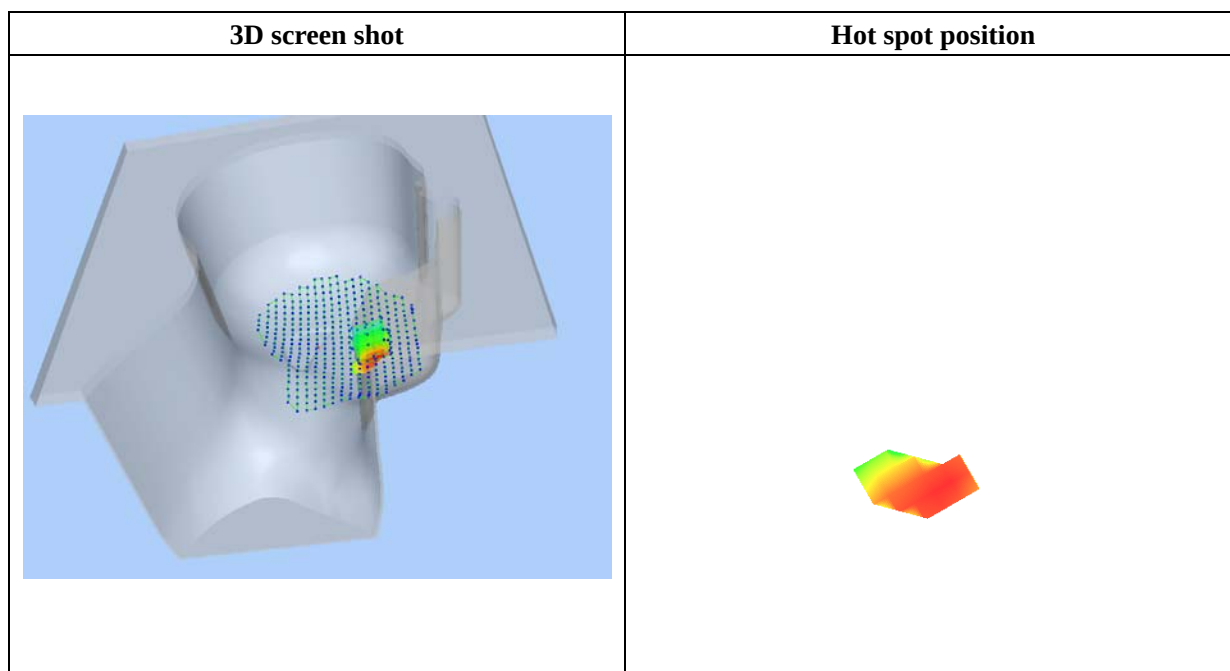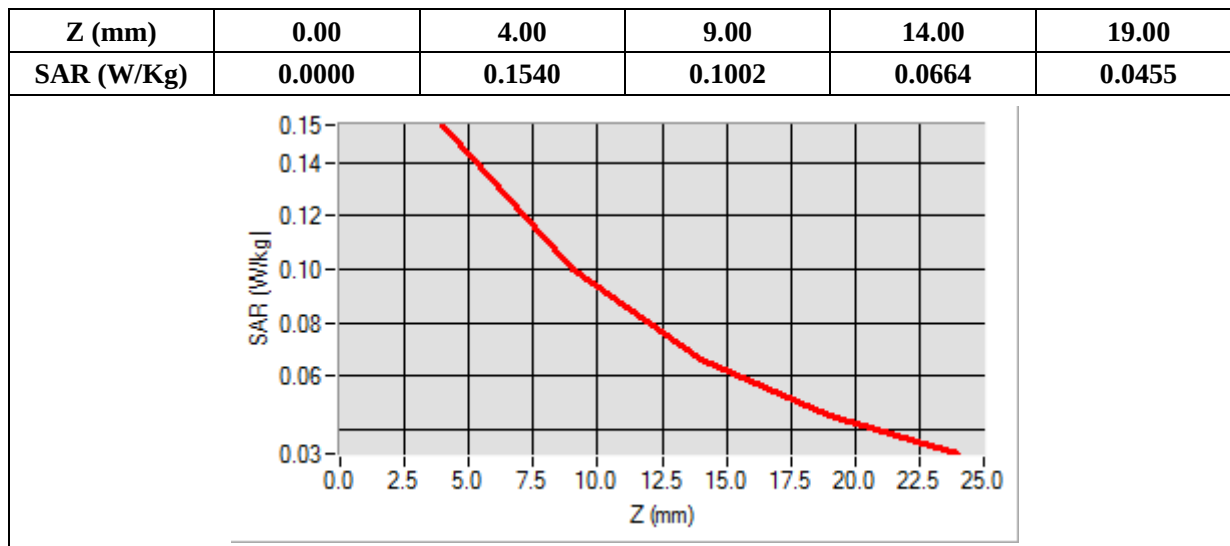

MEASUREMENT 37

Type: Phone measurement (Complete)

Date of measurement: 11/23/2015

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.35; Calibrated: 06/03/2015

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Tilt
Band	WCDMA1900_RMC
Channels	Low
Signal	Duty Cycle 1:1



B. SAR Measurement Results

Frequency (MHz)	1852.400000
Relative Permittivity (real part)	38.560124
Conductivity (S/m)	1.380369
Power Variation (%)	1.645274
Ambient Temperature	21.1
Liquid Temperature	21.3

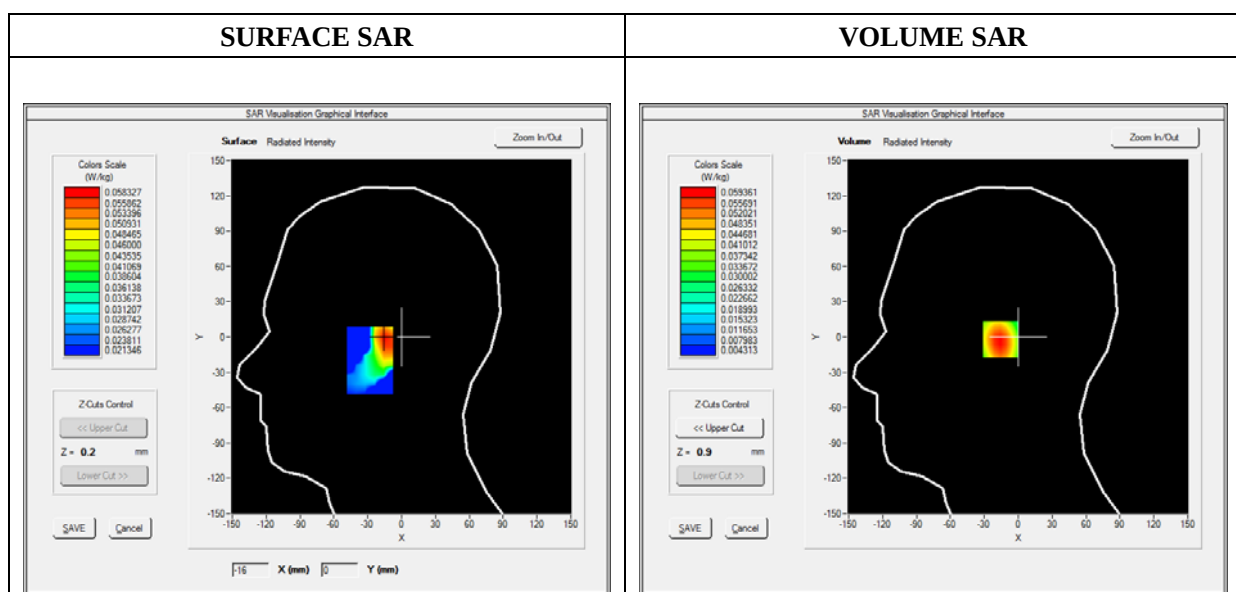

Maximum location: X=-14.00, Y=-2.00

SAR 10g (W/Kg)	0.034718
SAR 1g (W/Kg)	0.074435

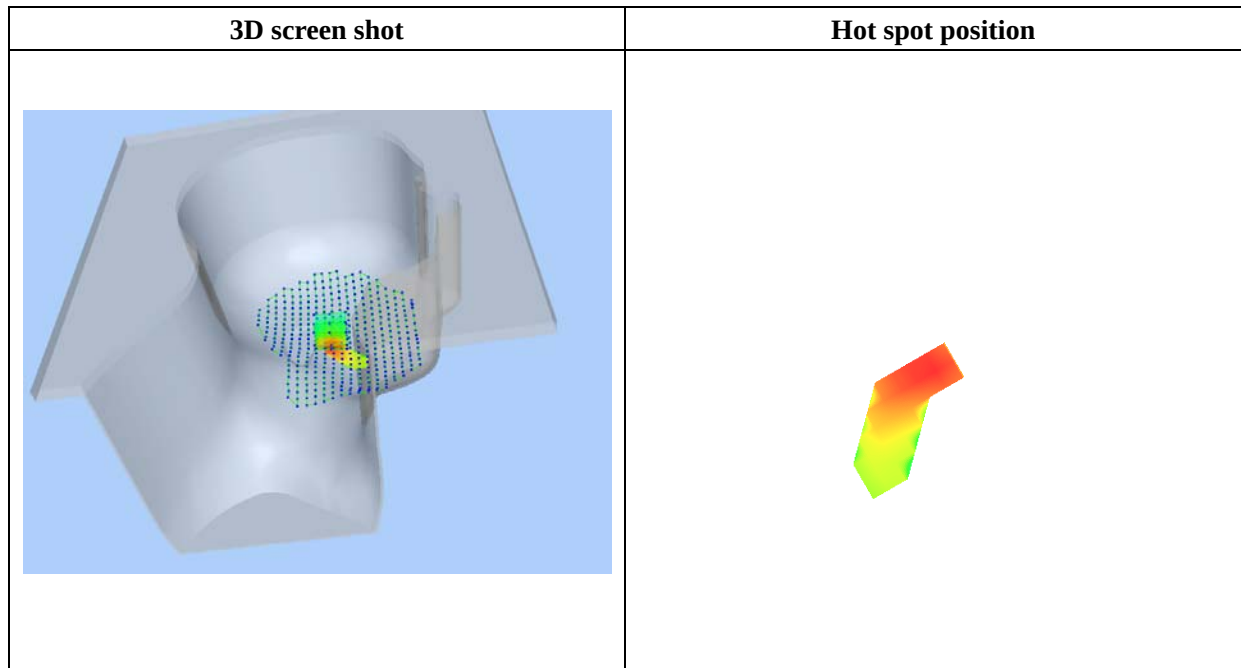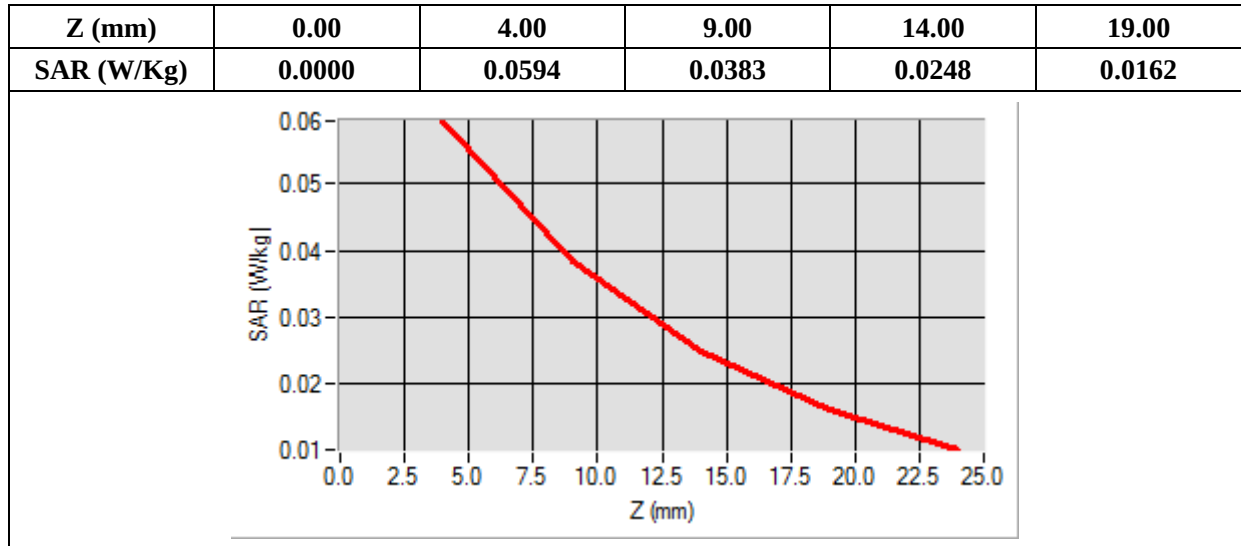

MEASUREMENT 38

Type: Phone measurement (Complete)

Date of measurement: 11/23/2015

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.55; Calibrated: 06/03/2015

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	WCDMA1900_RMC
Channels	Low
Signal	Duty Cycle 1:1



B. SAR Measurement Results

Frequency (MHz)	1852.400000
Relative Permittivity (real part)	52.420415
Conductivity (S/m)	1.501966
Power Variation (%)	0.687492
Ambient Temperature	21.1
Liquid Temperature	21.3

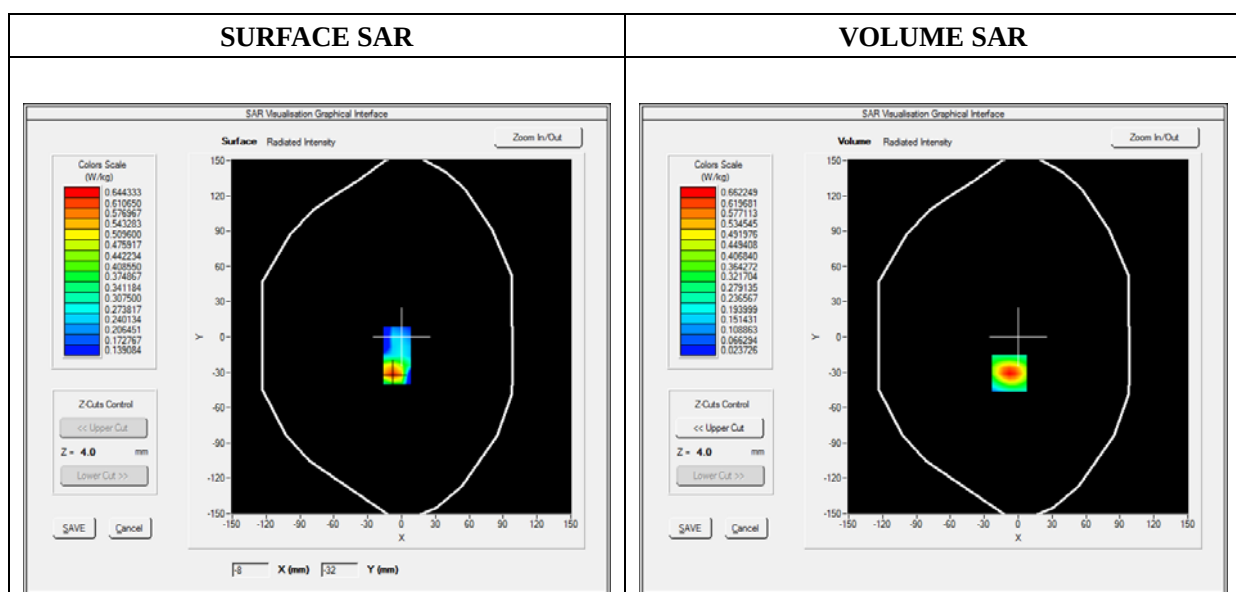

Maximum location: X=-8.00, Y=-31.00

SAR 10g (W/Kg)	0.308108
SAR 1g (W/Kg)	0.552731

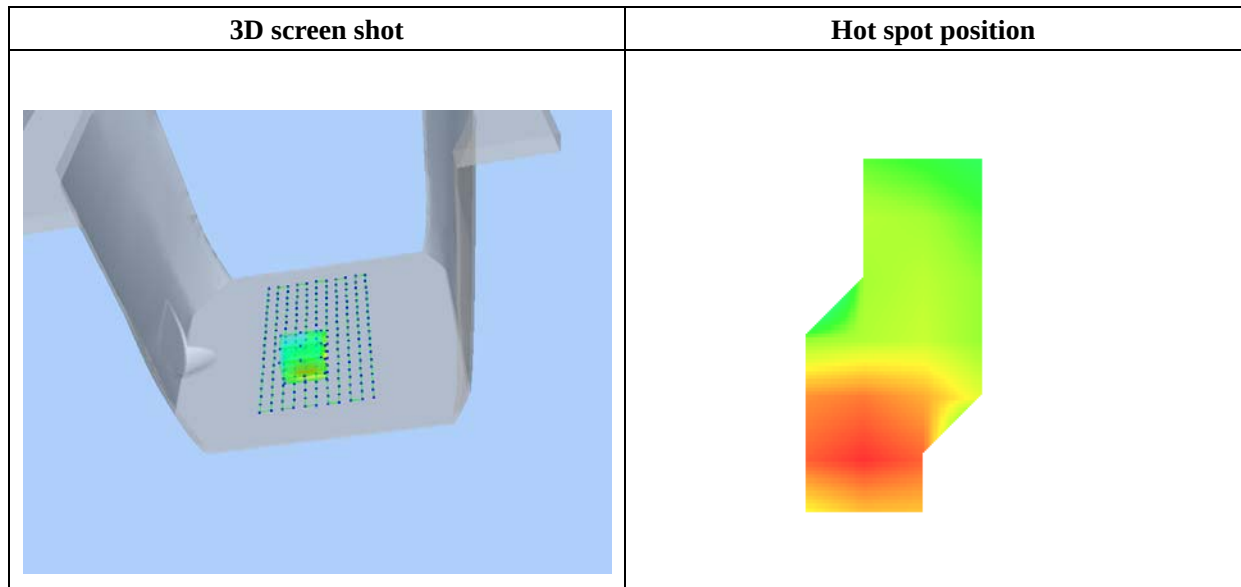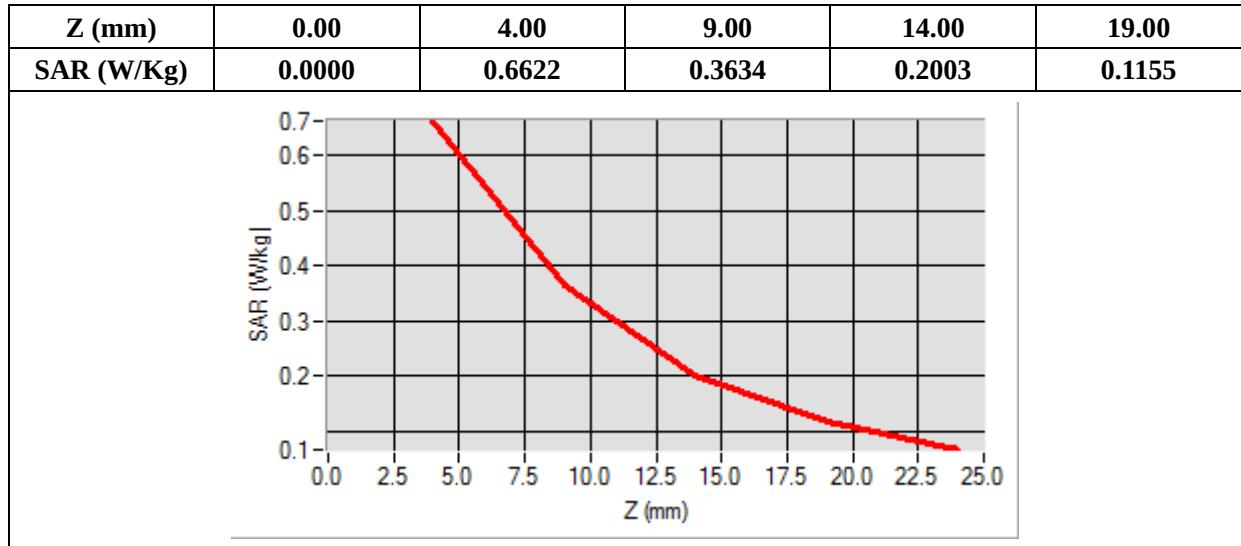

MEASUREMENT 39

Type: Phone measurement (Complete)

Date of measurement: 11/23/2015

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.55; Calibrated: 06/03/2015

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Front
Band	WCDMA1900_RMC
Channels	Low
Signal	Duty Cycle 1:1



B. SAR Measurement Results

Frequency (MHz)	1852.400000
Relative Permittivity (real part)	52.420415
Conductivity (S/m)	1.501966
Power Variation (%)	0.975670
Ambient Temperature	21.1
Liquid Temperature	21.3

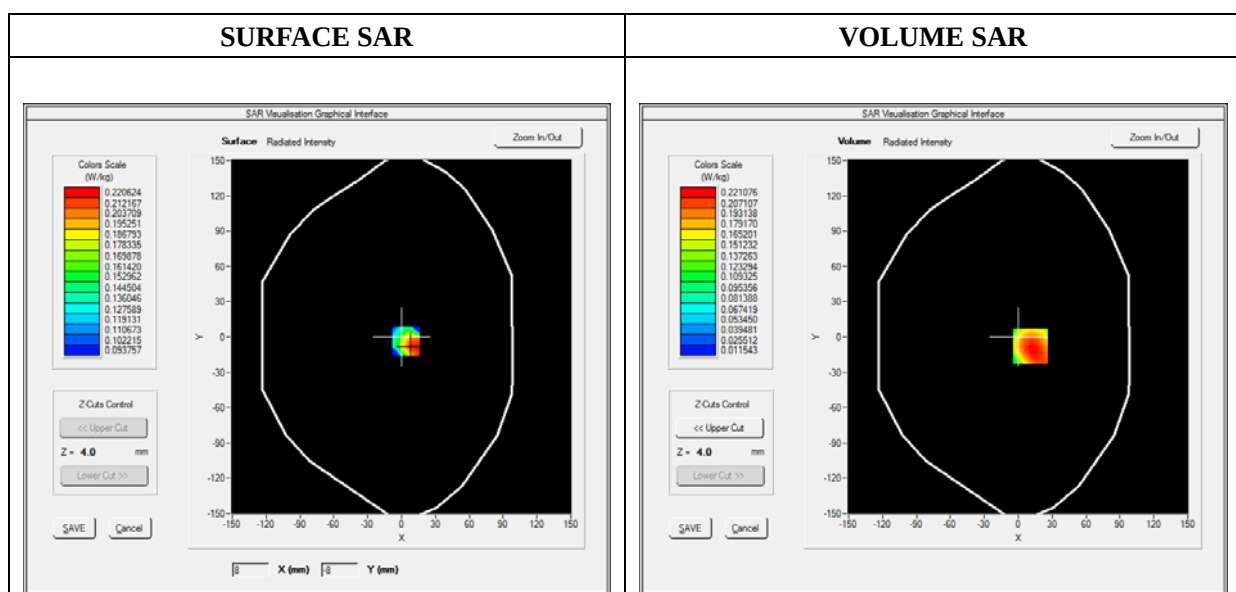

Maximum location: X=11.00, Y=-8.00

SAR 10g (W/Kg)	0.128301
SAR 1g (W/Kg)	0.225451

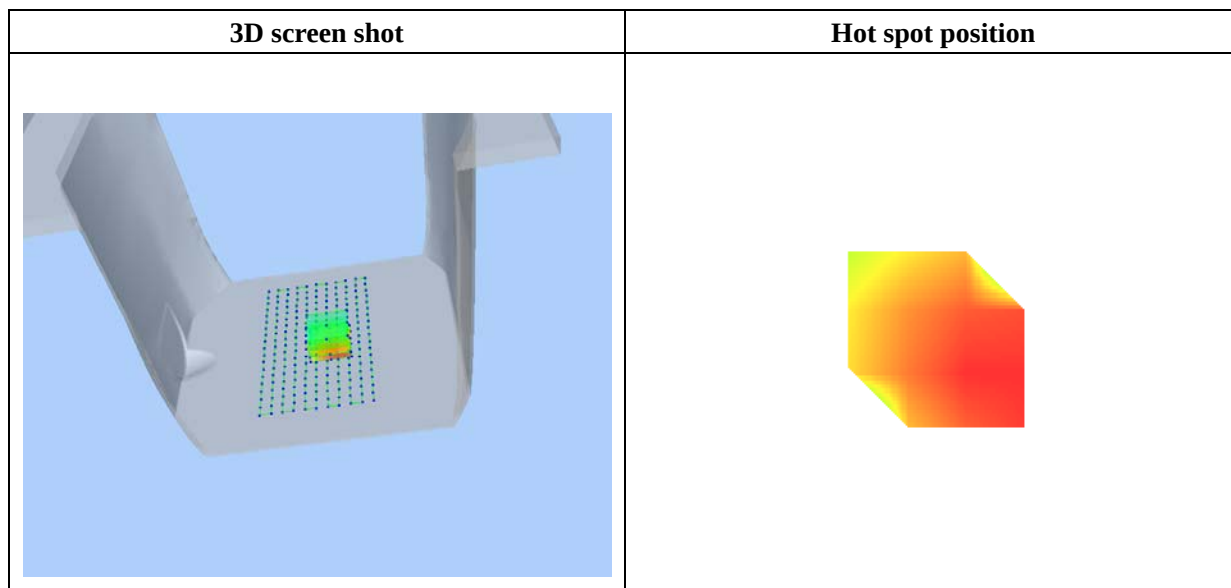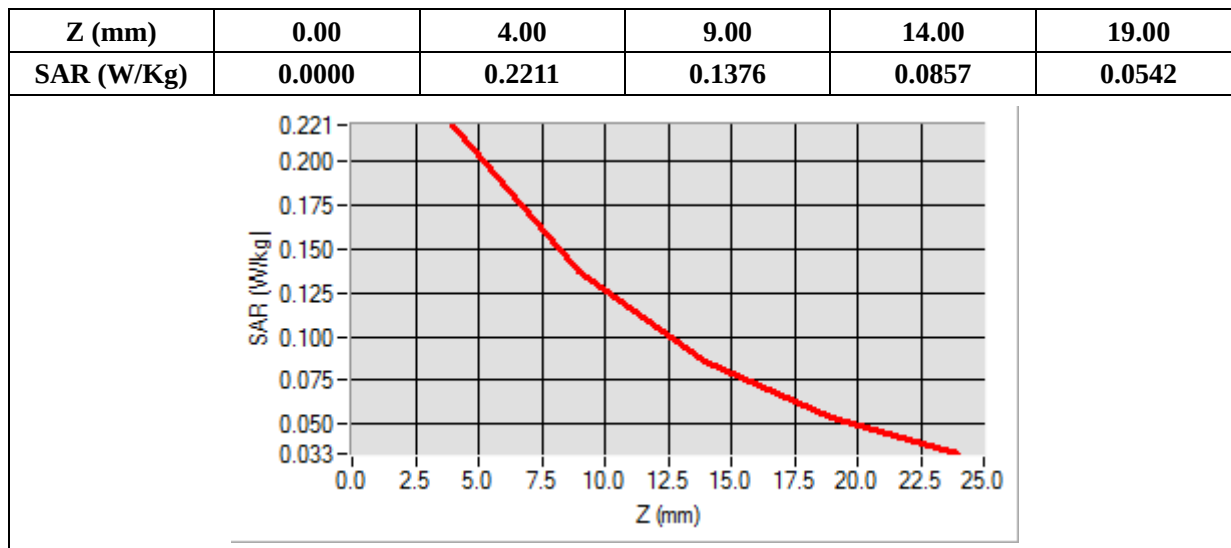

MEASUREMENT 40

Type: Phone measurement (Complete)

Date of measurement: 11/23/2015

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.55; Calibrated: 06/03/2015

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Bottom
Band	WCDMA1900_RMC
Channels	Low
Signal	Duty Cycle 1:1


B. SAR Measurement Results


Frequency (MHz)	1852.400000
Relative Permittivity (real part)	52.420415
Conductivity (S/m)	1.501966
Power Variation (%)	0.986500
Ambient Temperature	21.1
Liquid Temperature	21.3

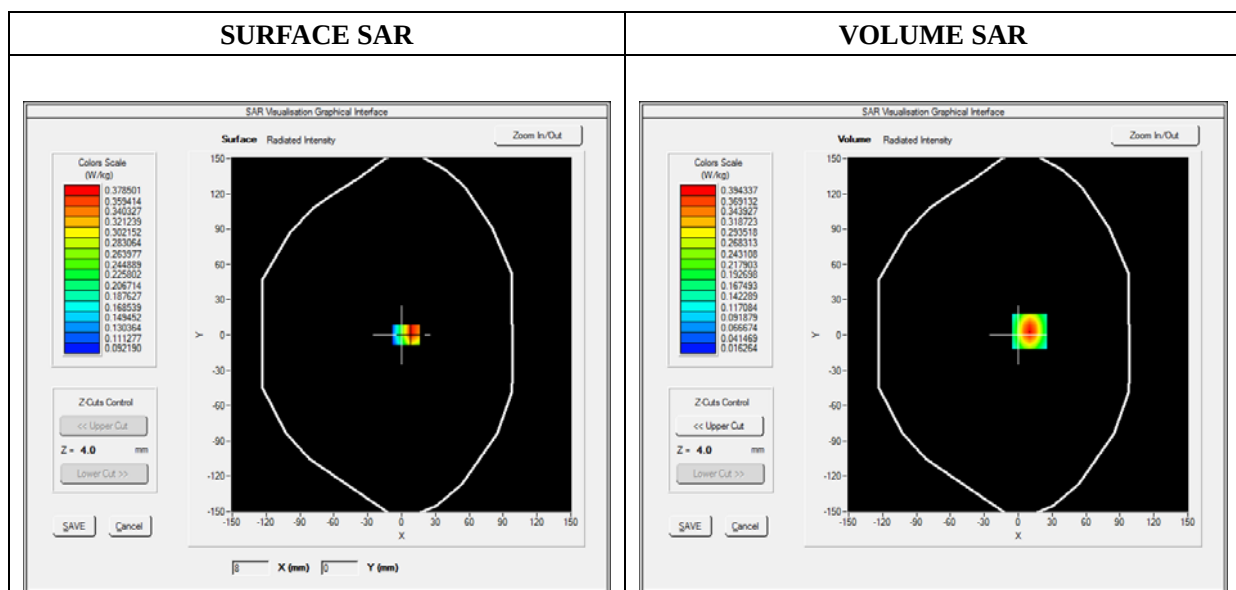

Maximum location: X=10.00, Y=3.00

SAR 10g (W/Kg)	0.191416
SAR 1g (W/Kg)	0.357689

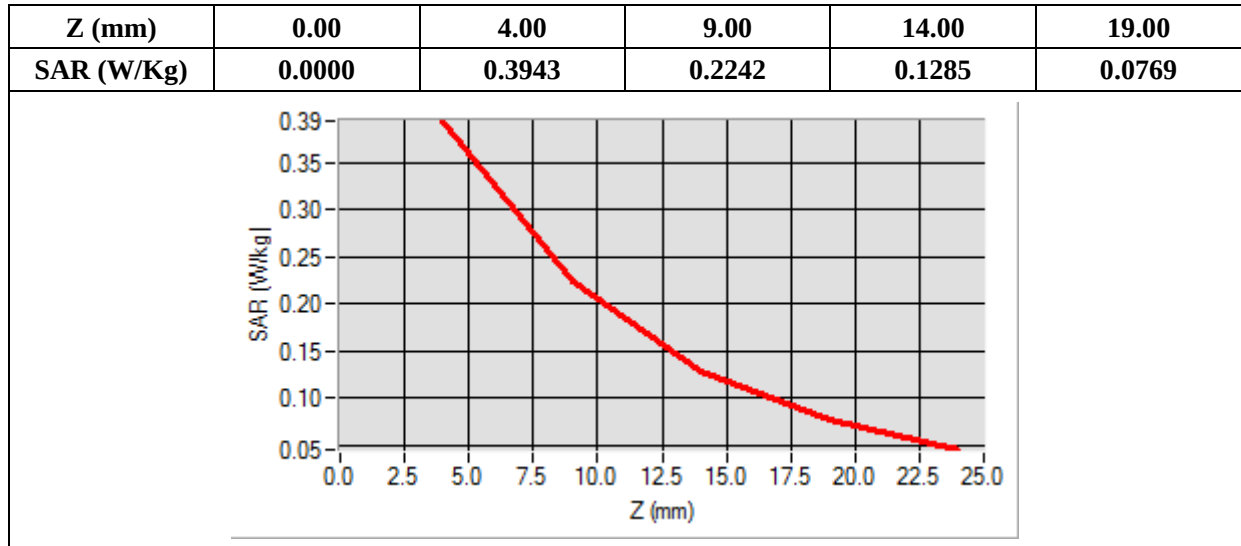

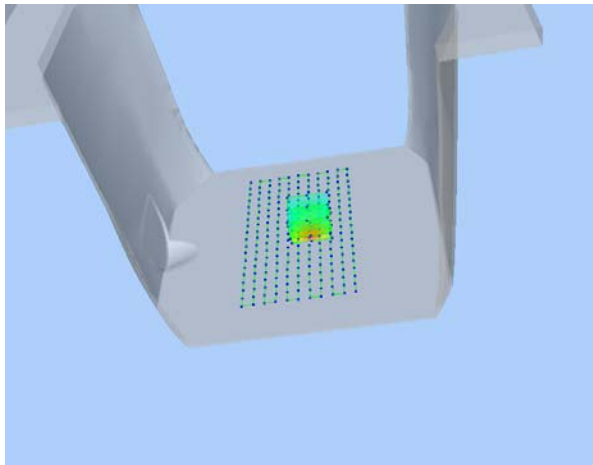3D screen shot	Hot spot position
	

MEASUREMENT 41

Type: Phone measurement (Complete)

Date of measurement: 11/23/2015

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.55; Calibrated: 06/03/2015

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Right side
Band	WCDMA1900_RMC
Channels	Low
Signal	Duty Cycle 1:1



B. SAR Measurement Results

Frequency (MHz)	1852.400000
Relative Permittivity (real part)	52.420415
Conductivity (S/m)	1.501966
Power Variation (%)	0.247476
Ambient Temperature	21.1
Liquid Temperature	21.3

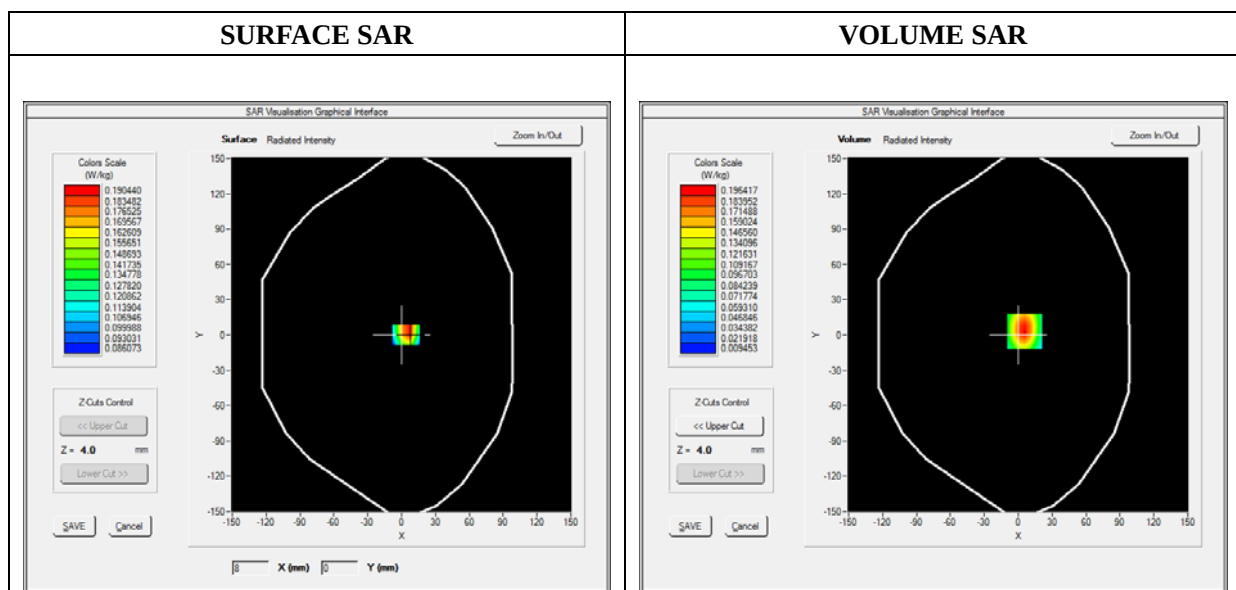

Maximum location: X=6.00, Y=3.00

SAR 10g (W/Kg)	0.099135
SAR 1g (W/Kg)	0.195341

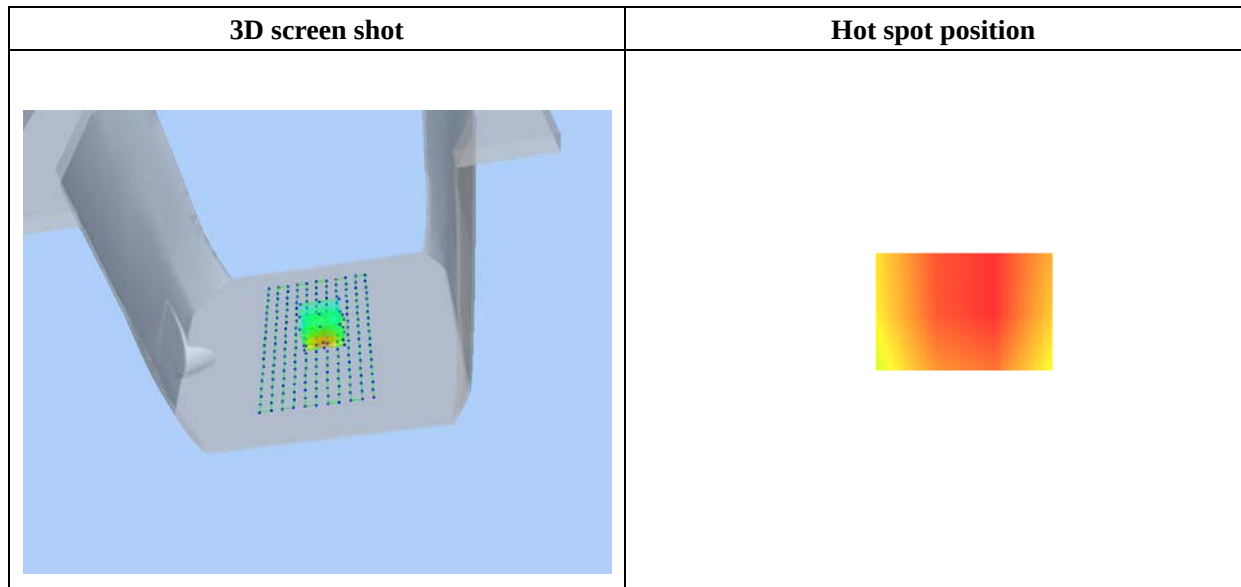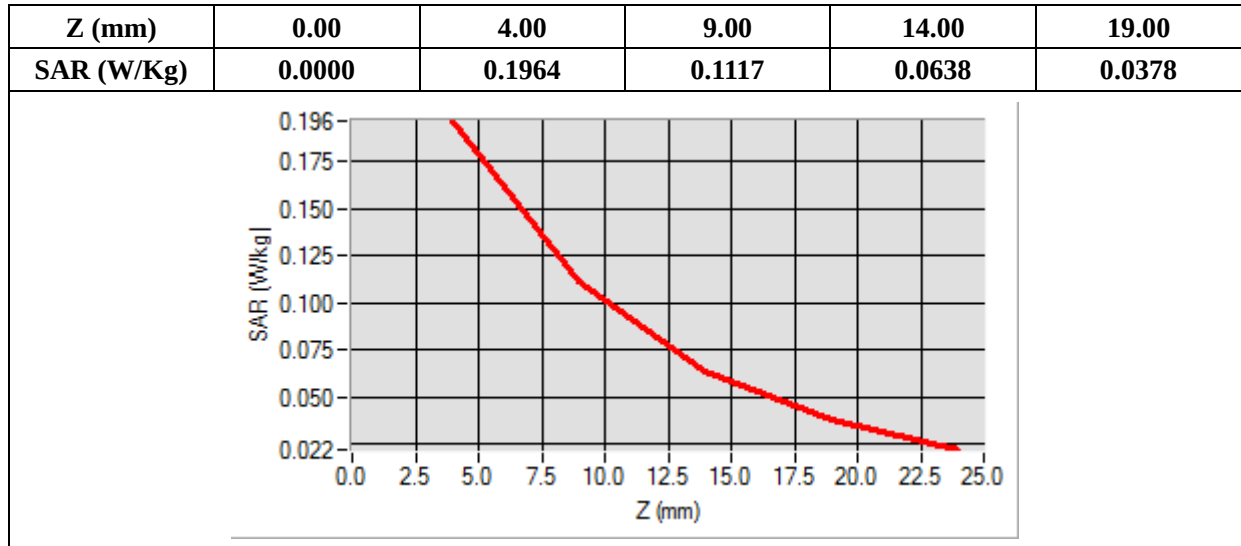

MEASUREMENT 42

Type: Phone measurement (Complete)

Date of measurement: 11/23/2015

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.55; Calibrated: 06/03/2015

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Left side
Band	WCDMA1900_RMC
Channels	Low
Signal	Duty Cycle 1:1



B. SAR Measurement Results

Frequency (MHz)	1852.400000
Relative Permittivity (real part)	52.420415
Conductivity (S/m)	1.501966
Power Variation (%)	0.247476
Ambient Temperature	21.1
Liquid Temperature	21.3

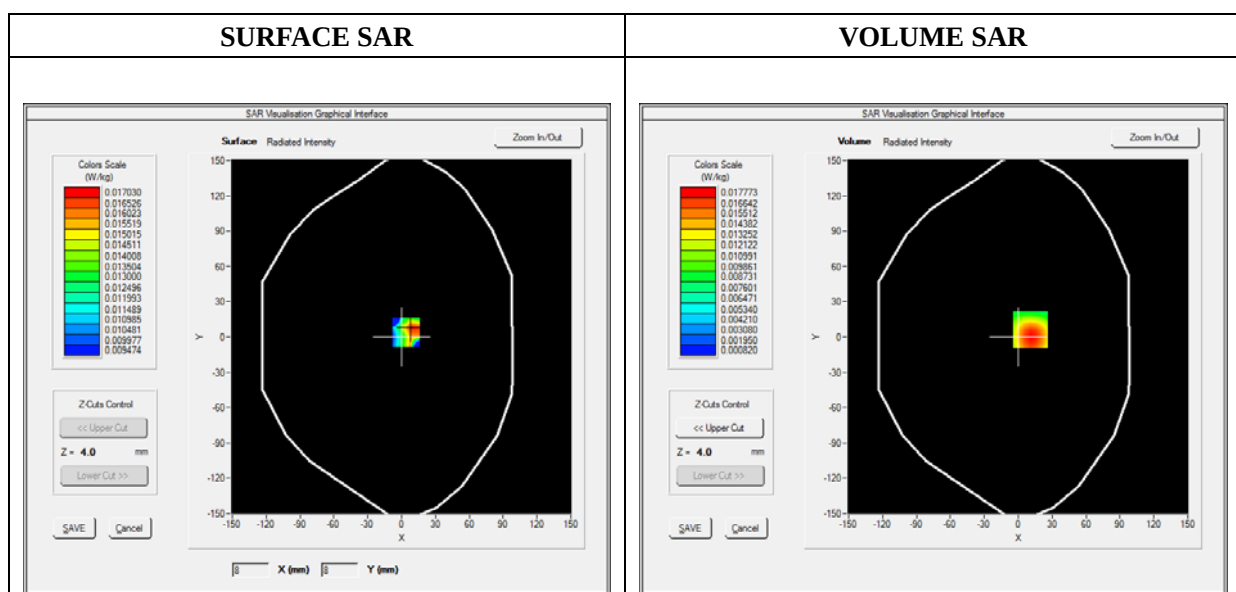

Maximum location: X=11.00, Y=6.00

SAR 10g (W/Kg)	0.009473
SAR 1g (W/Kg)	0.018533

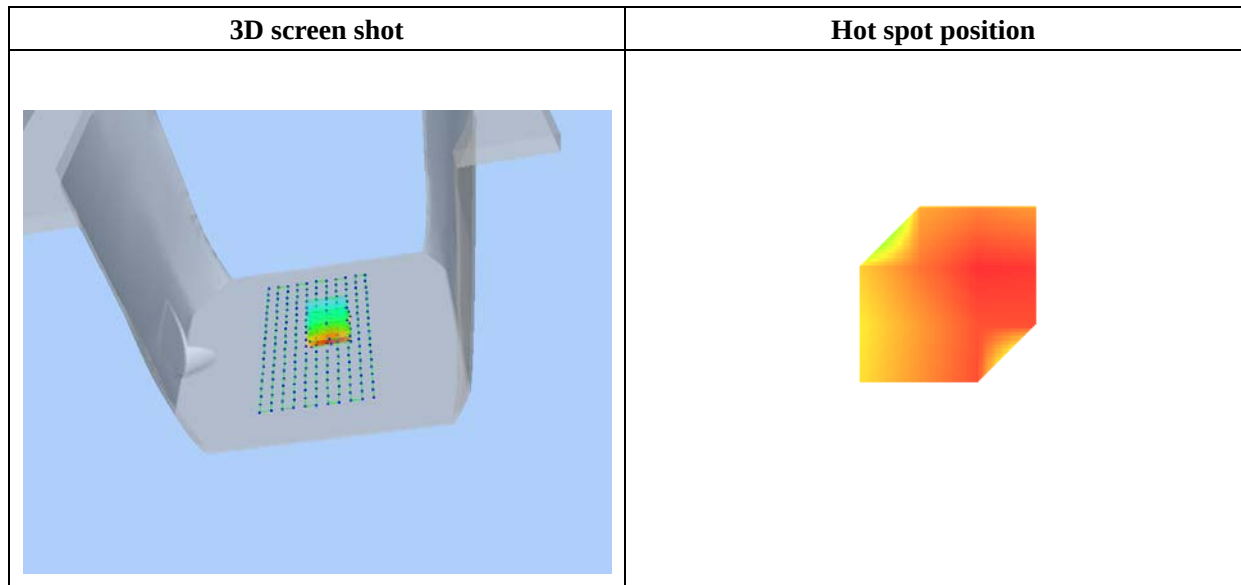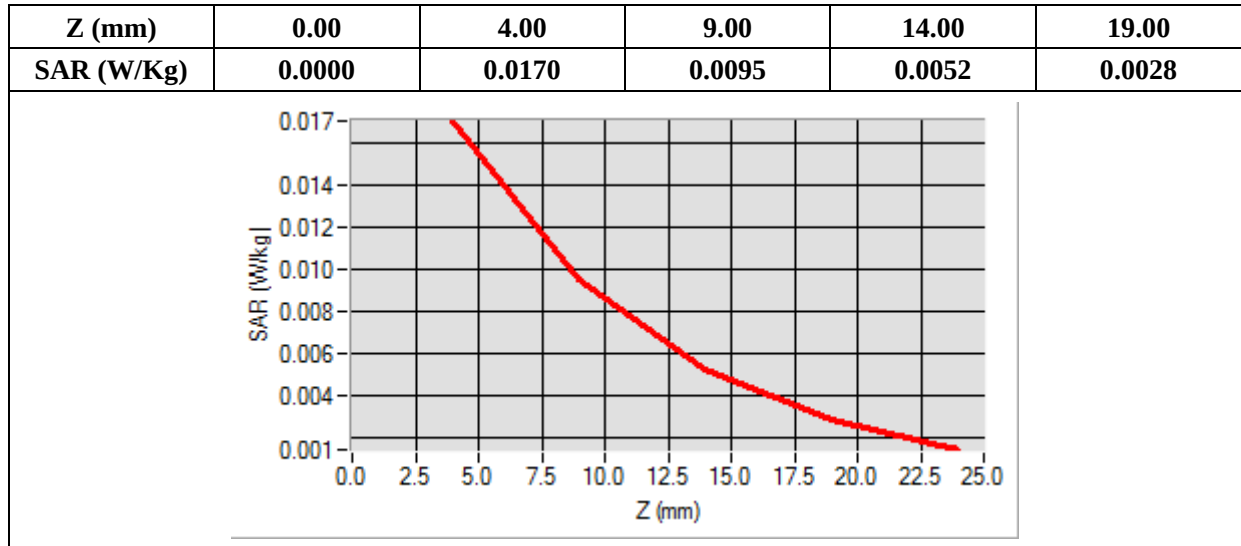

MEASUREMENT 43

Type: Phone measurement (Complete)

Date of measurement: 11/23/2015

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.64; Calibrated: 06/03/2015

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	WiFi_802.11b
Channels	Low
Signal	Duty Cycle: 1:1

B. SAR Measurement Results


Frequency (MHz)	2412.000000
Relative Permittivity (real part)	38.611212
Conductivity (S/m)	1.761202
Power Variation (%)	1.867589
Ambient Temperature	21.1
Liquid Temperature	21.2


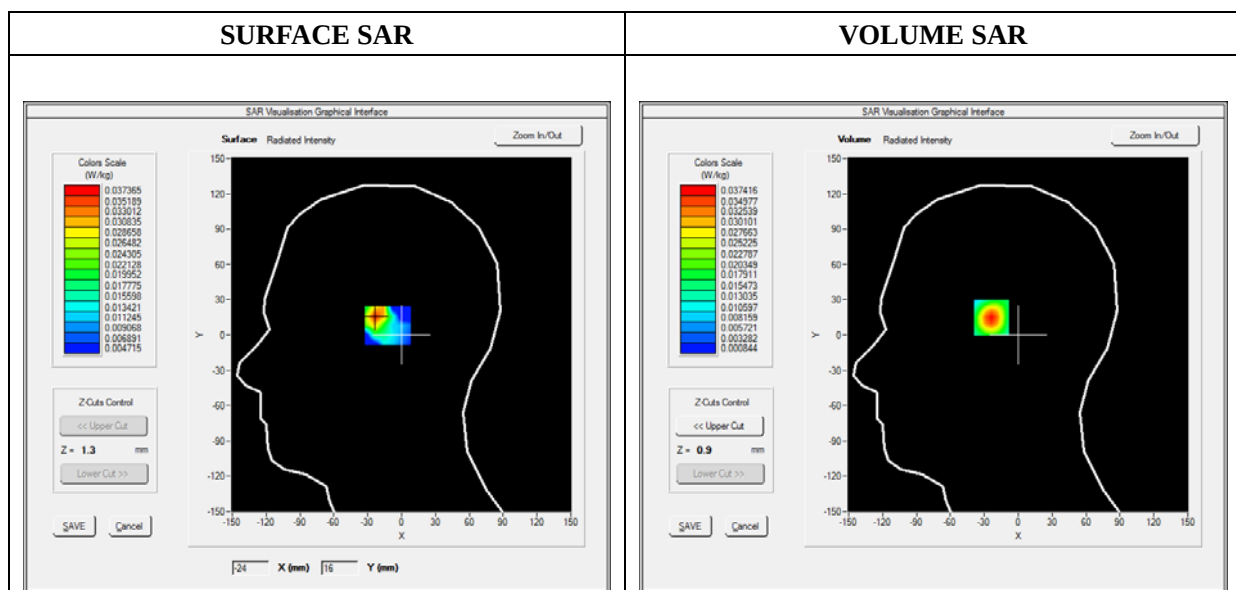


Maximum location: X=-23.00, Y=16.00

SAR 10g (W/Kg)	0.014806
SAR 1g (W/Kg)	0.035142

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.0374	0.0107	0.0028	0.0013

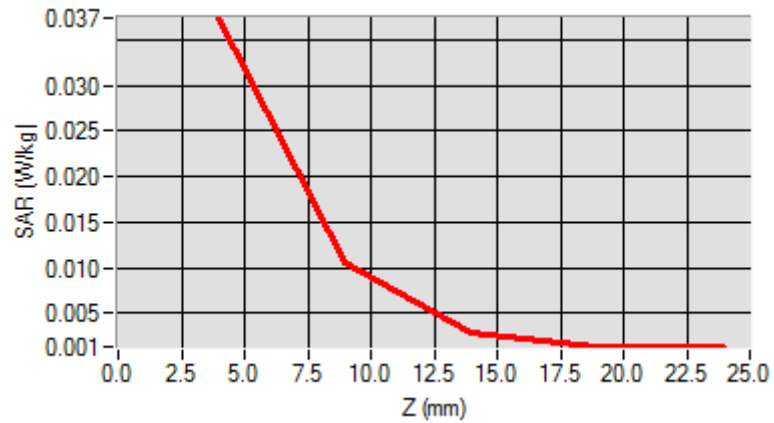

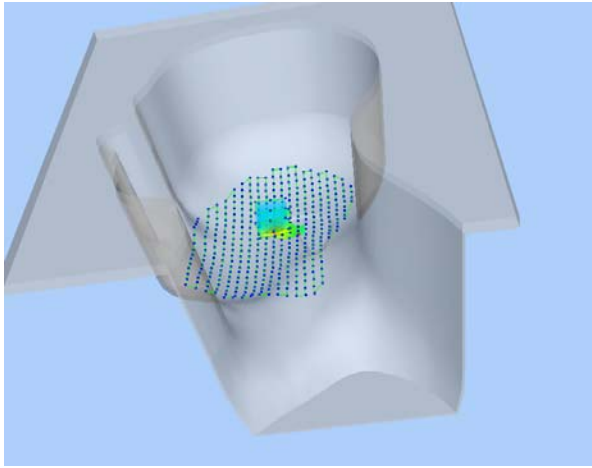3D screen shot	Hot spot position
	

MEASUREMENT 44

Type: Phone measurement (Complete)

Date of measurement: 11/23/2015

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.64; Calibrated: 06/03/2015

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Tilt
Band	WiFi_802.11b
Channels	Low
Signal	Duty Cycle: 1:1


B. SAR Measurement Results


Frequency (MHz)	2412.000000
Relative Permittivity (real part)	38.611212
Conductivity (S/m)	1.761202
Power Variation (%)	1.986596
Ambient Temperature	21.1
Liquid Temperature	21.2

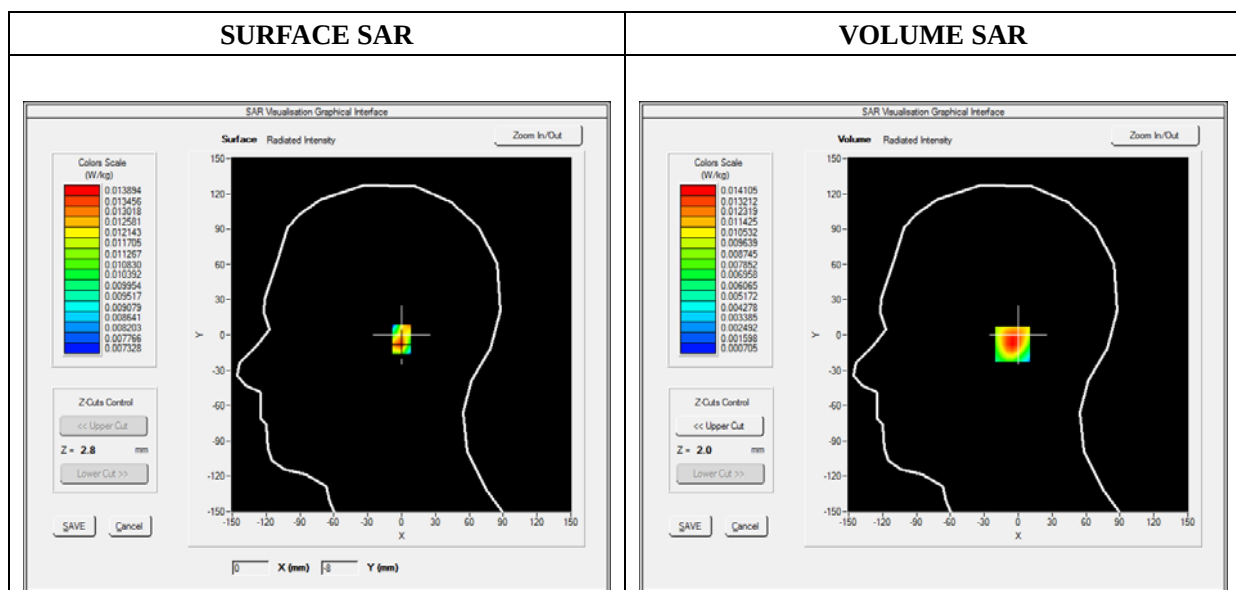

Maximum location: X=-2.00, Y=-8.00

SAR 10g (W/Kg)	0.006374
SAR 1g (W/Kg)	0.013546

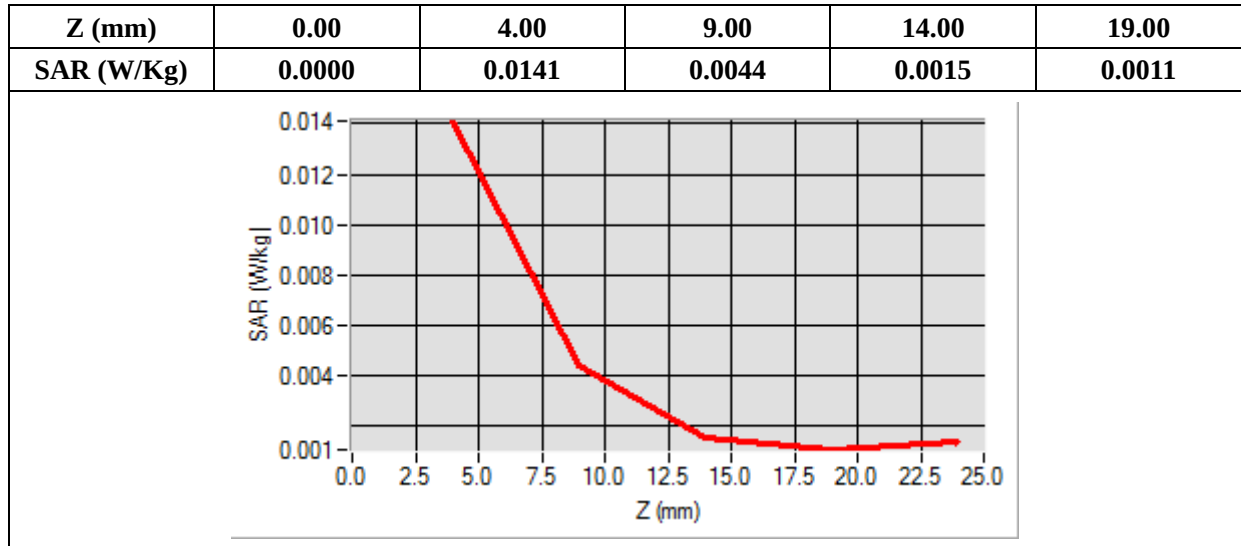

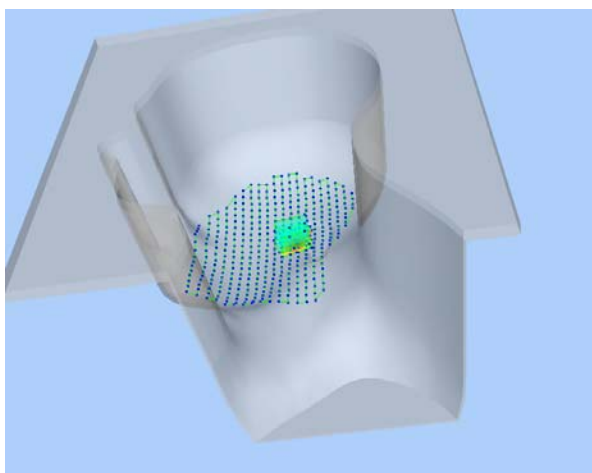3D screen shot	Hot spot position
	

MEASUREMENT 45

Type: Phone measurement (Complete)

Date of measurement: 11/23/2015

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.64; Calibrated: 06/03/2015

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Cheek
Band	WiFi_802.11b
Channels	Low
Signal	Duty Cycle: 1:1


B. SAR Measurement Results


Frequency (MHz)	2412.000000
Relative Permittivity (real part)	38.611212
Conductivity (S/m)	1.761202
Power Variation (%)	1.685604
Ambient Temperature	21.1
Liquid Temperature	21.2

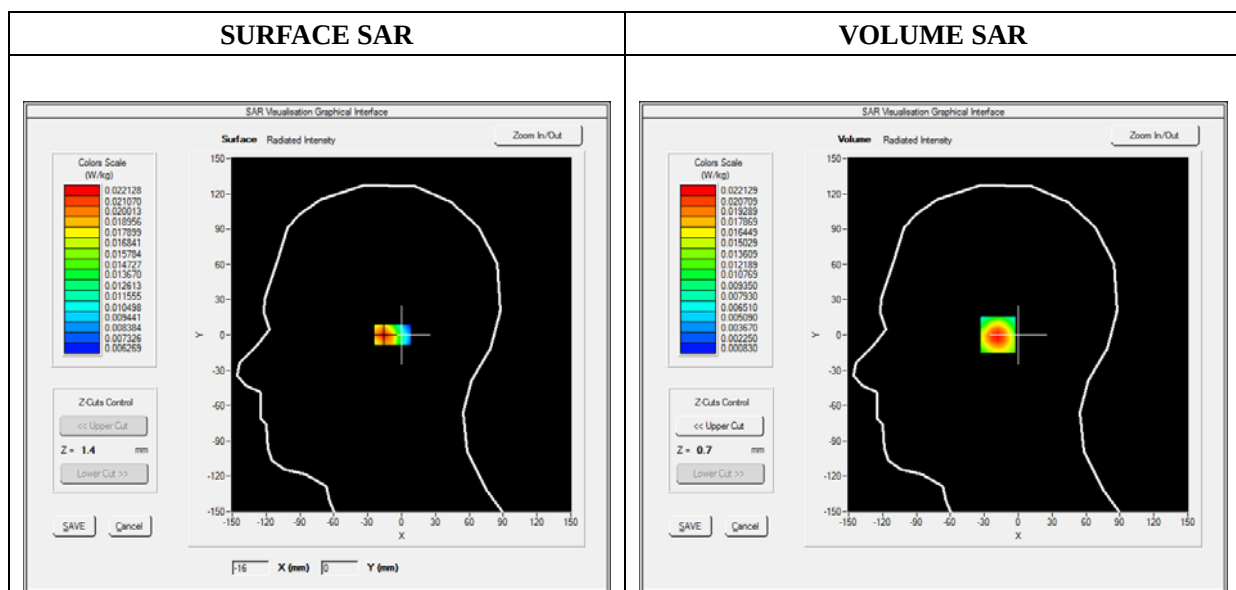

Maximum location: X=-16.00, Y=0.00

SAR 10g (W/Kg)	0.009788
SAR 1g (W/Kg)	0.023545

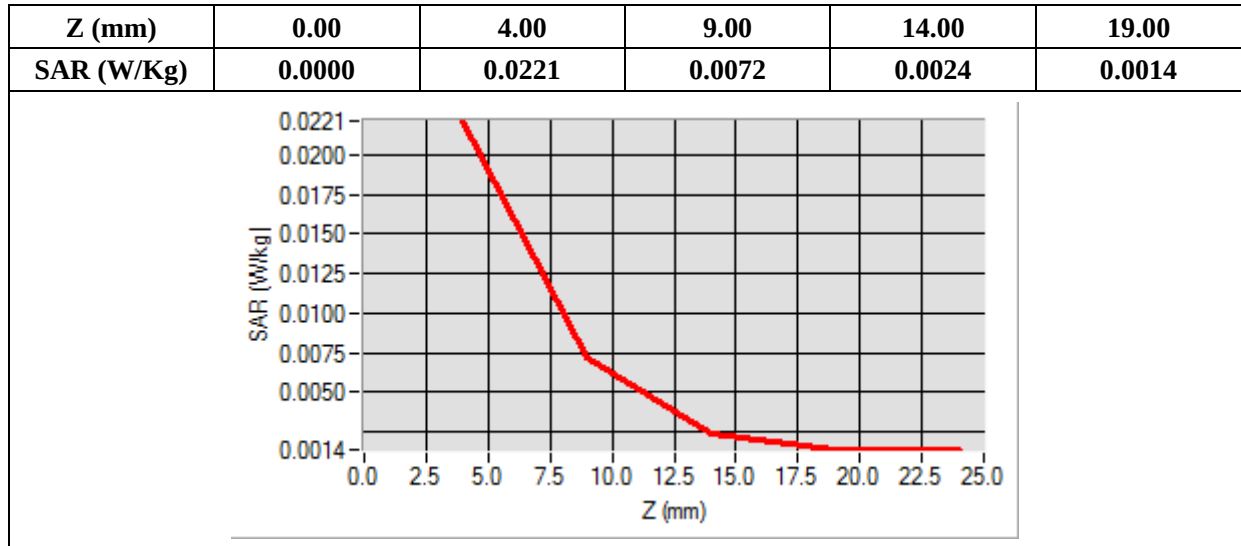

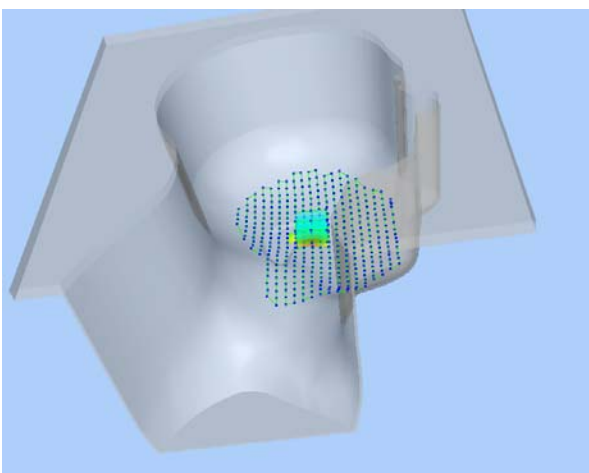3D screen shot	Hot spot position
	

MEASUREMENT 46

Type: Phone measurement (Complete)

Date of measurement: 11/23/2015

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.64; Calibrated: 06/03/2015

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Tilt
Band	WiFi_802.11b
Channels	Low
Signal	Duty Cycle: 1:1



B. SAR Measurement Results

Frequency (MHz)	2412.000000
Relative Permittivity (real part)	38.611212
Conductivity (S/m)	1.761202
Power Variation (%)	1.856703
Ambient Temperature	21.1
Liquid Temperature	21.2

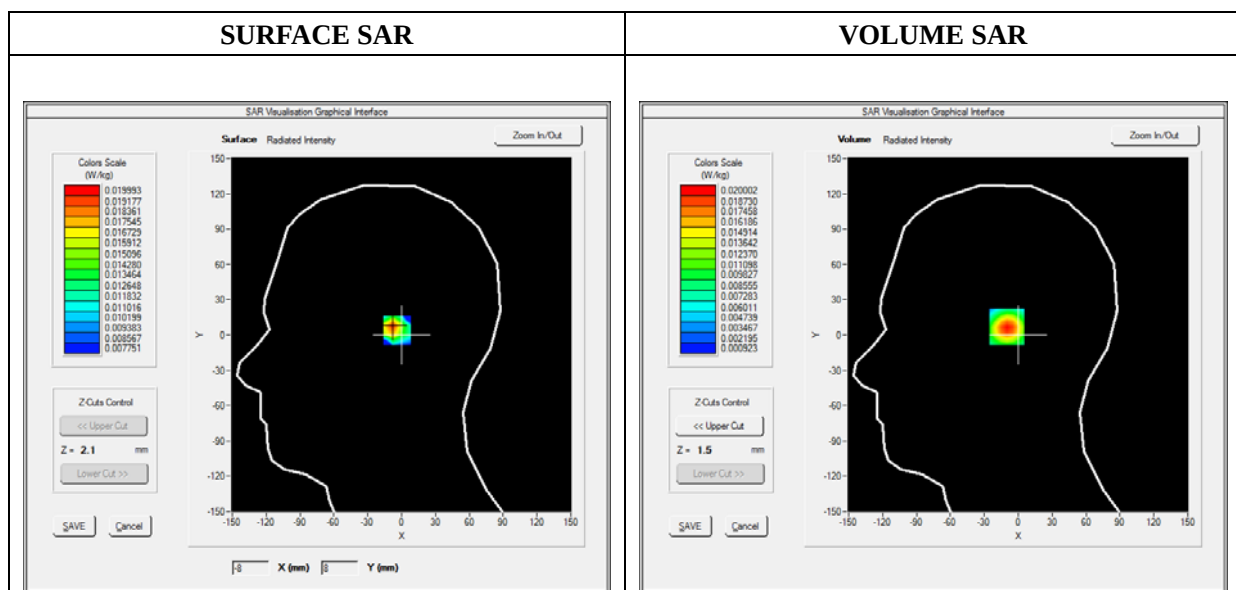

Maximum location: X=-8.00, Y=7.00

SAR 10g (W/Kg)	0.008430
SAR 1g (W/Kg)	0.018971

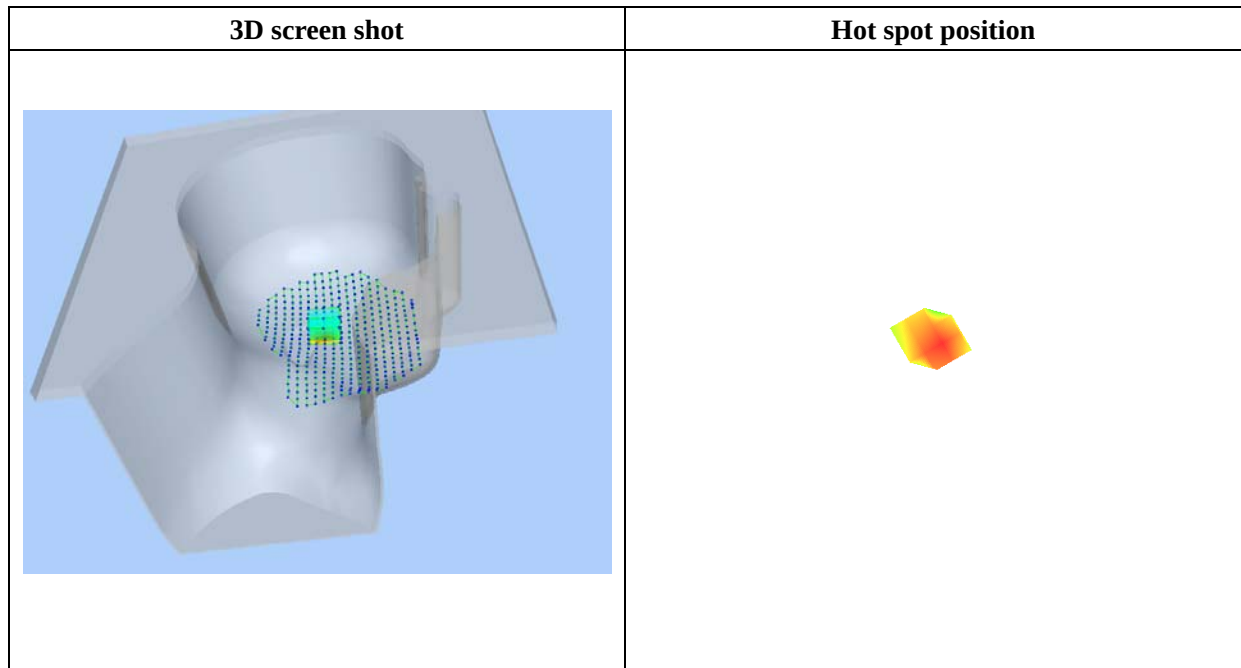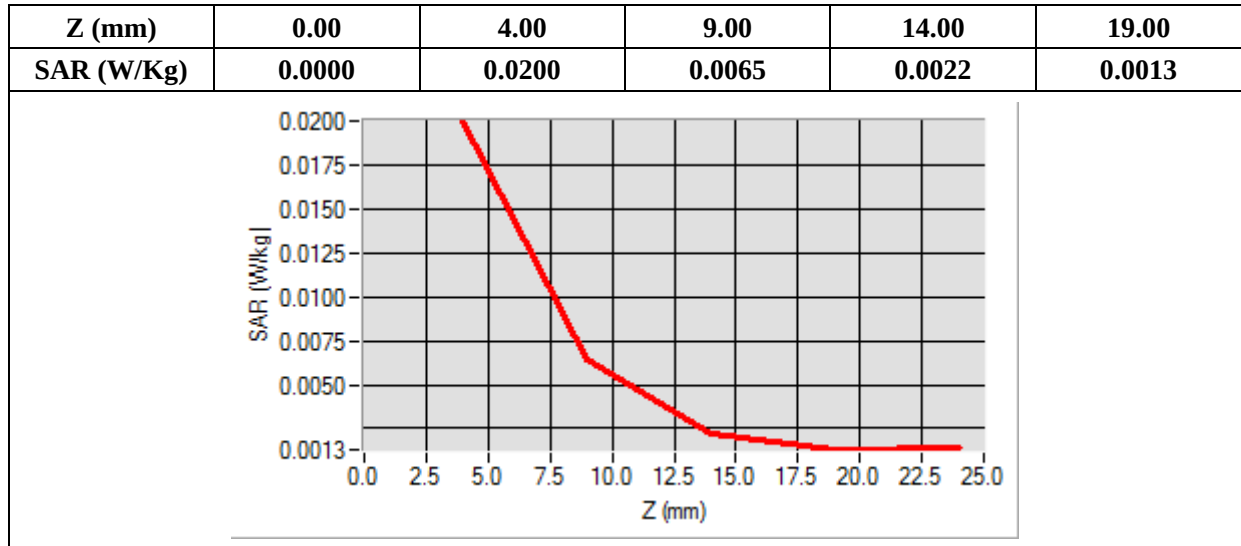

MEASUREMENT 47

Type: Phone measurement (Complete)

Date of measurement: 11/23/2015

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.80; Calibrated: 06/03/2015

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	WiFi_802.11b
Channels	Low
Signal	Duty Cycle: 1:1



B. SAR Measurement Results

Frequency (MHz)	2412.000000
Relative Permittivity (real part)	52.315622
Conductivity (S/m)	2.001255
Power Variation (%)	0.968546
Ambient Temperature	21.1
Liquid Temperature	21.2

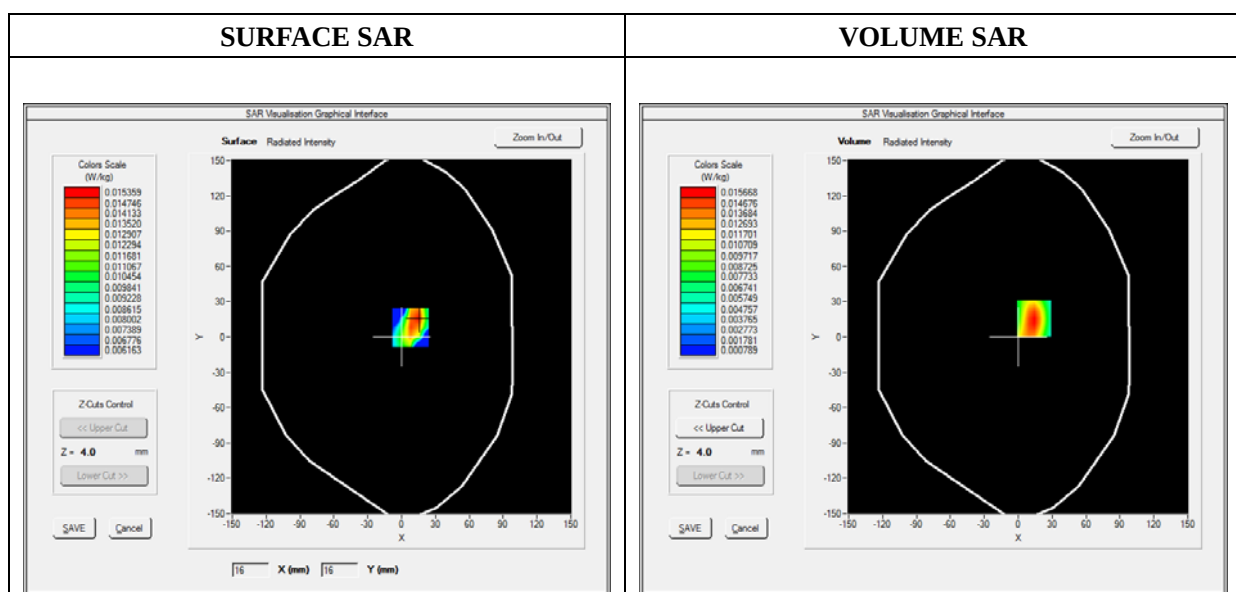

Maximum location: X=14.00, Y=16.00

SAR 10g (W/Kg)	0.006891
SAR 1g (W/Kg)	0.011153

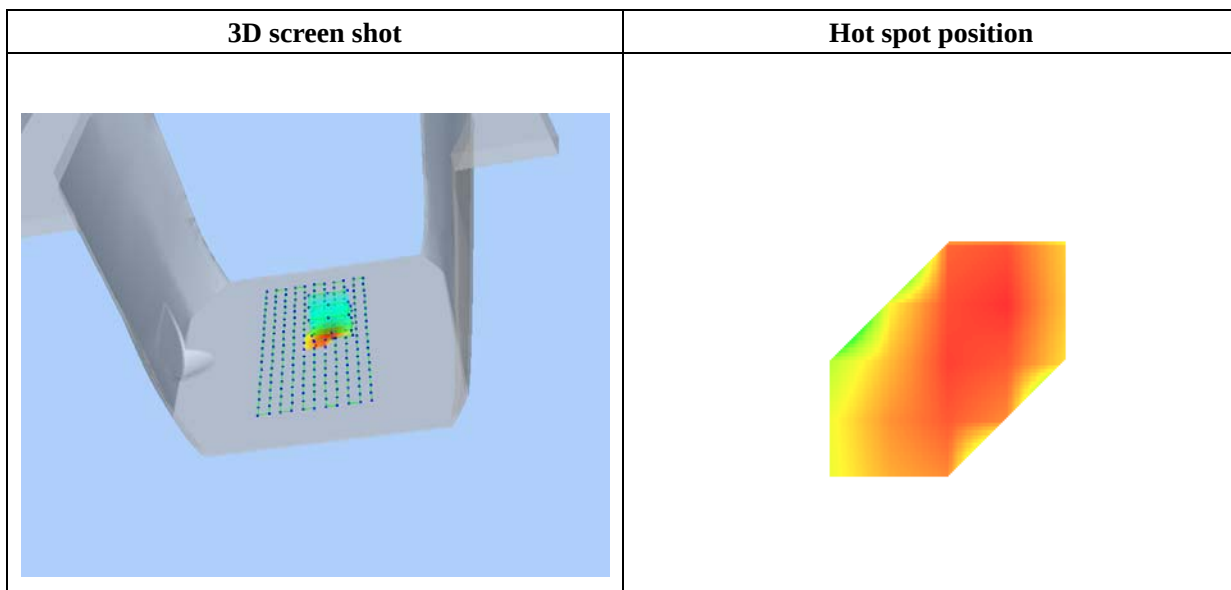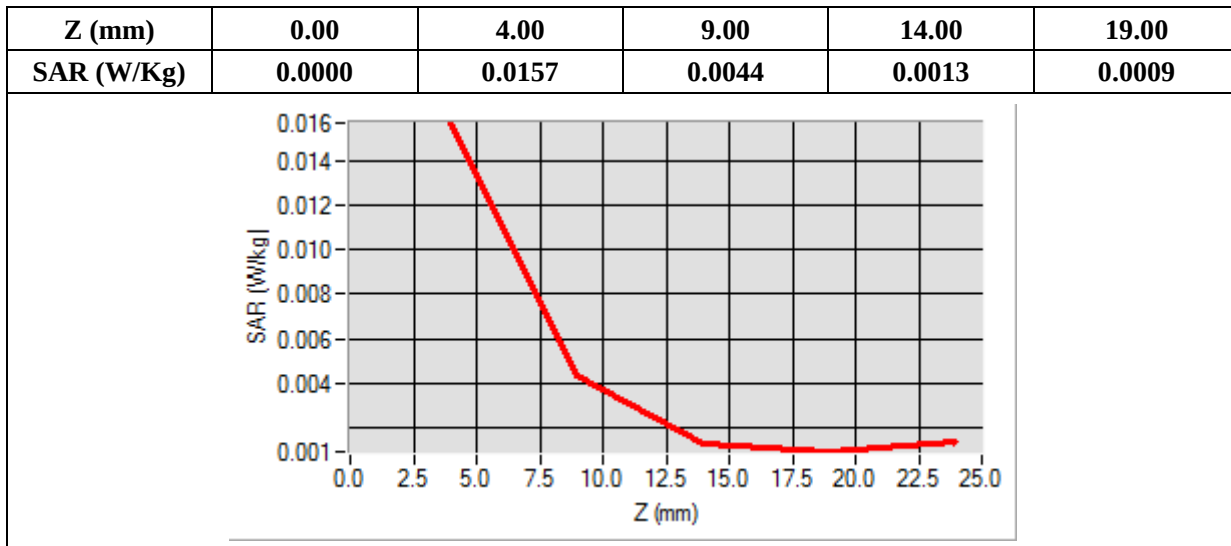

MEASUREMENT 48

Type: Phone measurement (Complete)

Date of measurement: 11/23/2015

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.80; Calibrated: 06/03/2015

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Front
Band	WiFi_802.11b
Channels	Low
Signal	Duty Cycle: 1:1



B. SAR Measurement Results

Frequency (MHz)	2412.000000
Relative Permittivity (real part)	52.315622
Conductivity (S/m)	2.001255
Power Variation (%)	0.876509
Ambient Temperature	21.1
Liquid Temperature	21.2

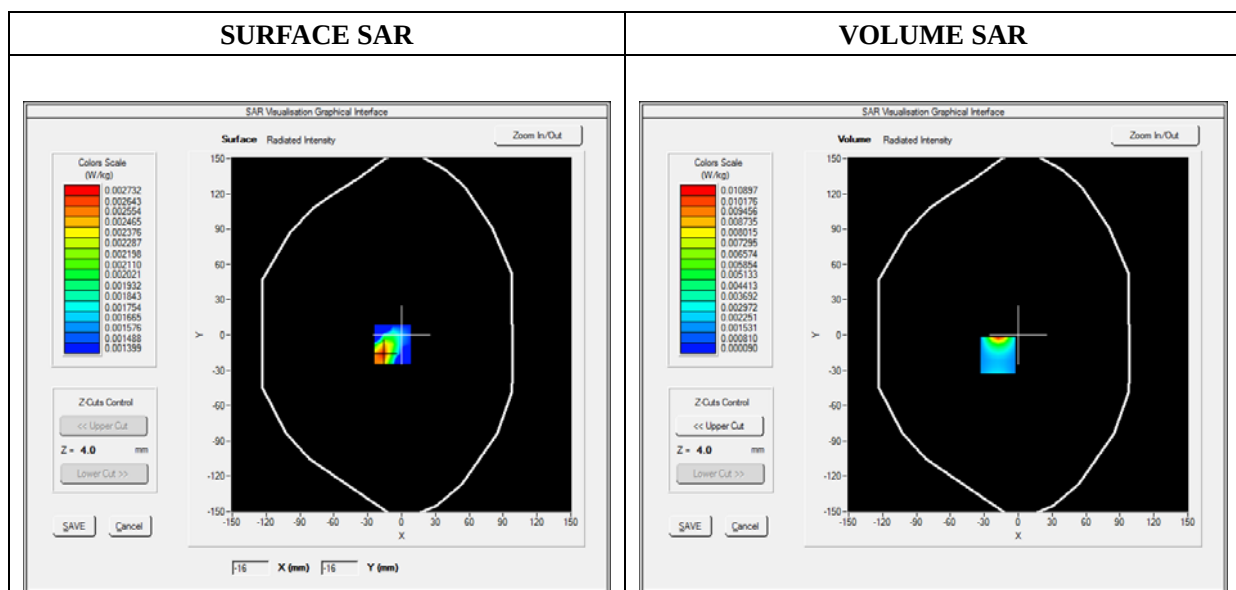

Maximum location: X=-18.00, Y=-17.00

SAR 10g (W/Kg)	0.002506
SAR 1g (W/Kg)	0.002798

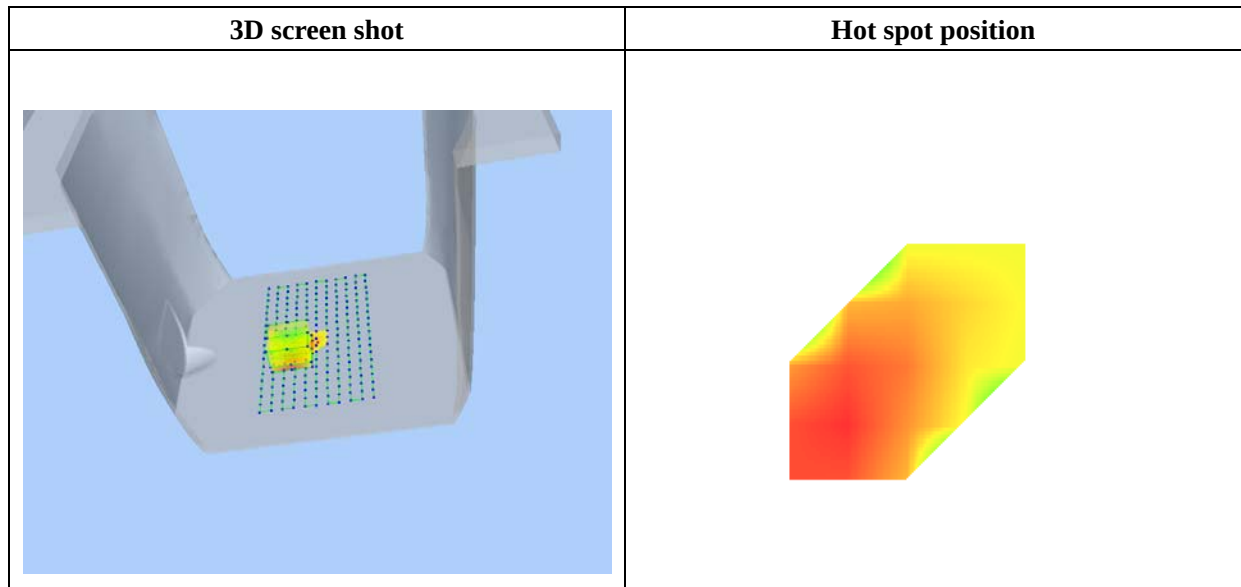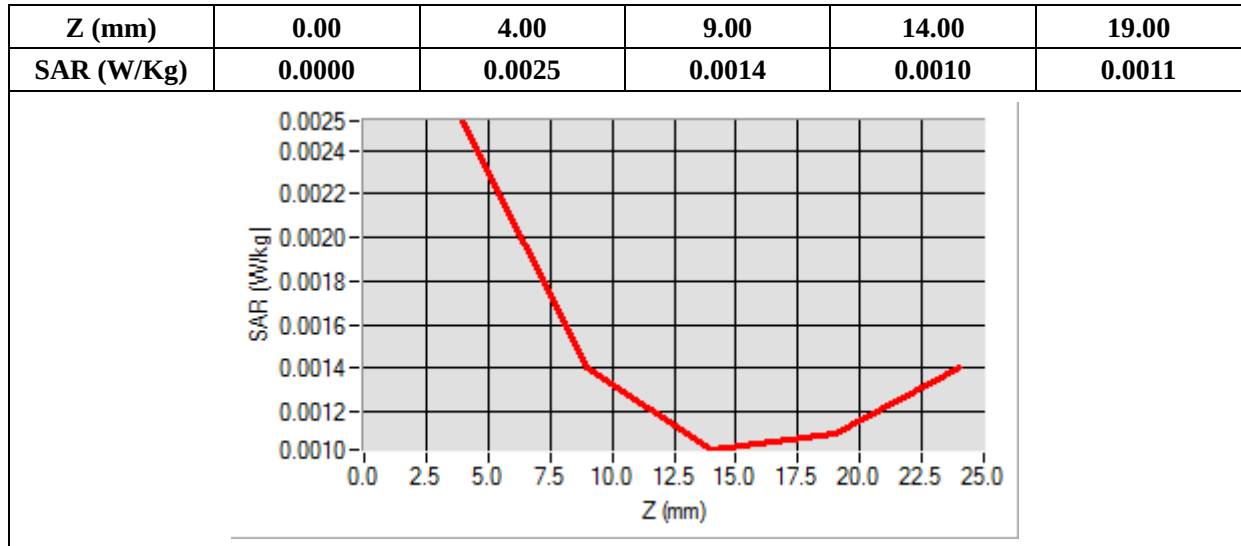

MEASUREMENT 49

Type: Phone measurement (Complete)

Date of measurement: 11/23/2015

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.80; Calibrated: 06/03/2015

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Left Side
Band	WiFi_802.11b
Channels	Low
Signal	Duty Cycle: 1:1



B. SAR Measurement Results

Frequency (MHz)	2412.000000
Relative Permittivity (real part)	52.315622
Conductivity (S/m)	2.001255
Power Variation (%)	0.557835
Ambient Temperature	21.1
Liquid Temperature	21.2

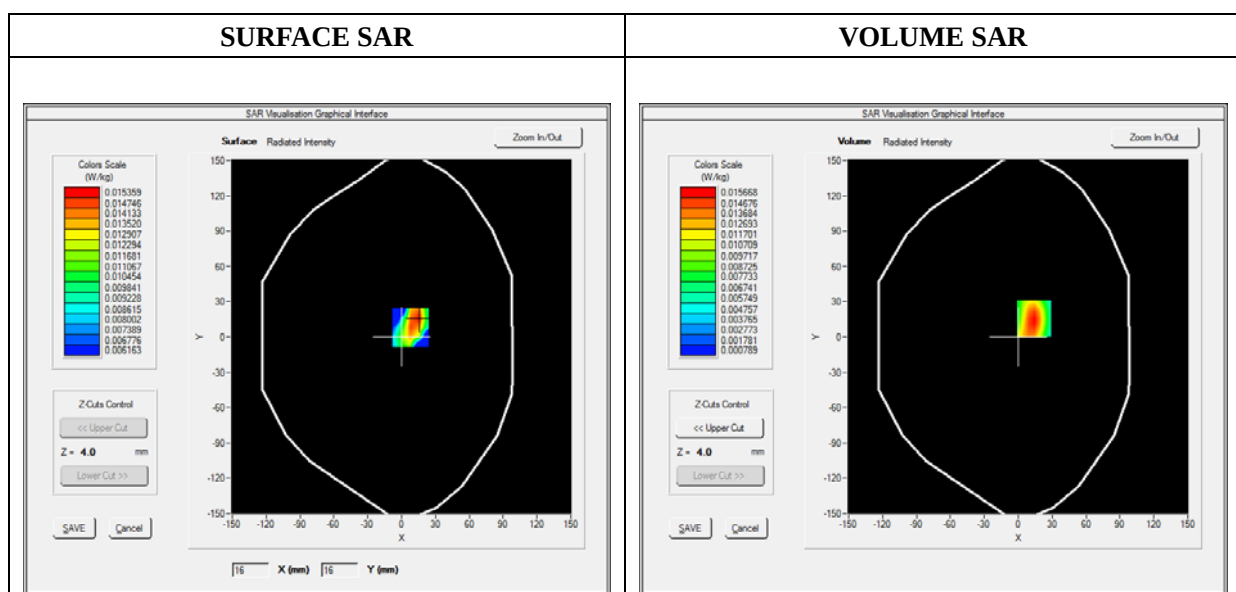

Maximum location: X=14.00, Y=16.00

SAR 10g (W/Kg)	0.004291
SAR 1g (W/Kg)	0.007561

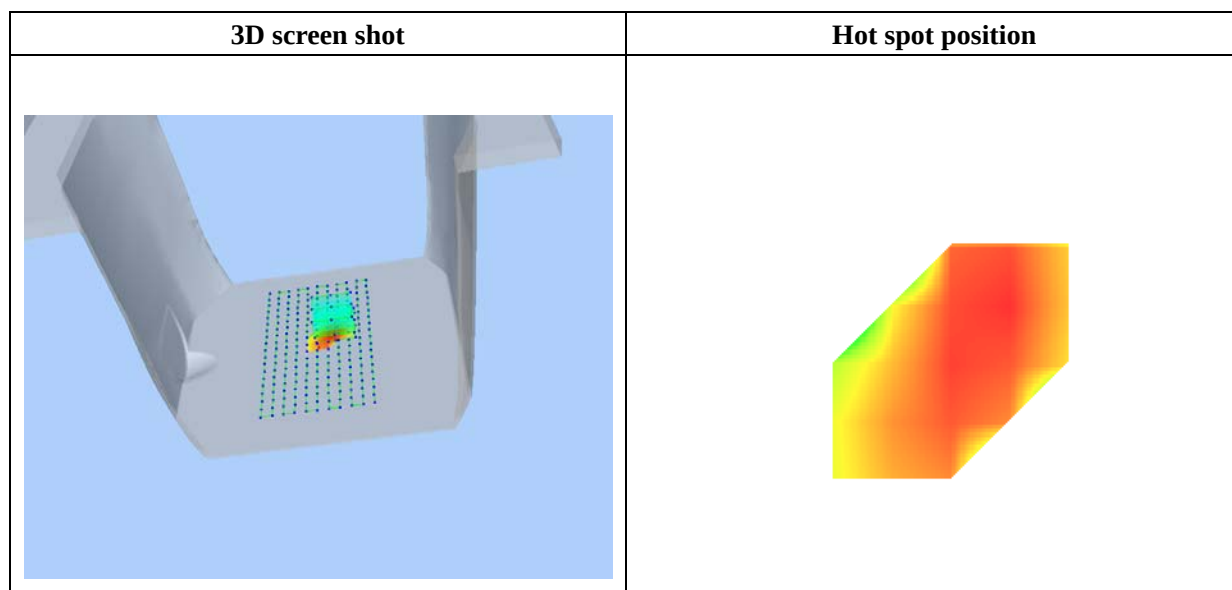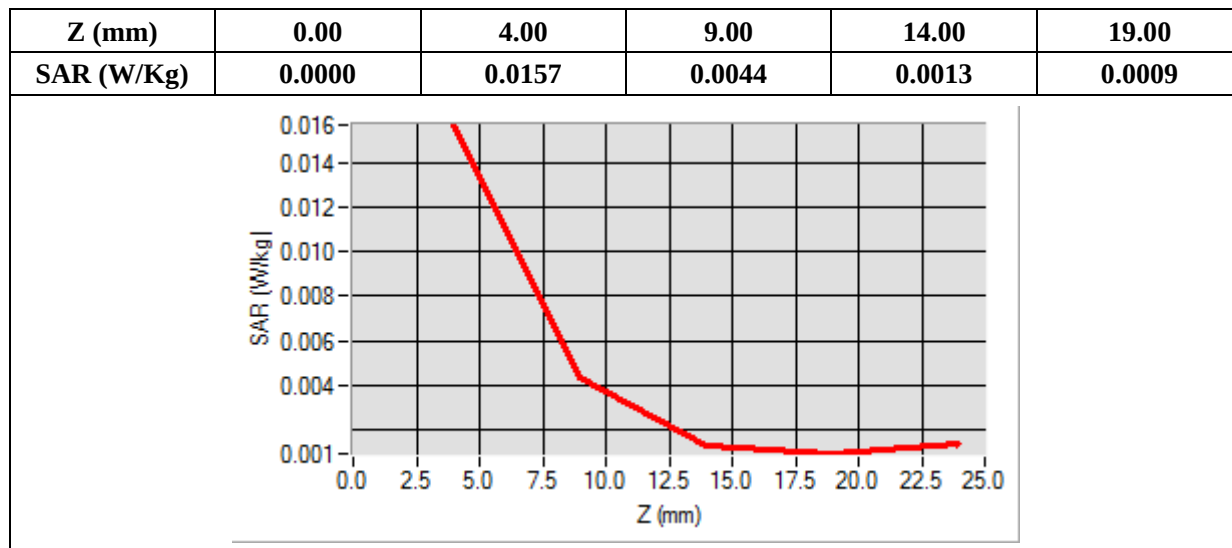

MEASUREMENT 50

Type: Phone measurement (Complete)

Date of measurement: 11/23/2015

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.80; Calibrated: 06/03/2015

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Top Side
Band	WiFi_802.11b
Channels	Low
Signal	Duty Cycle: 1:1



B. SAR Measurement Results

Frequency (MHz)	2412.000000
Relative Permittivity (real part)	52.315622
Conductivity (S/m)	2.001255
Power Variation (%)	0.749570
Ambient Temperature	21.1
Liquid Temperature	21.2

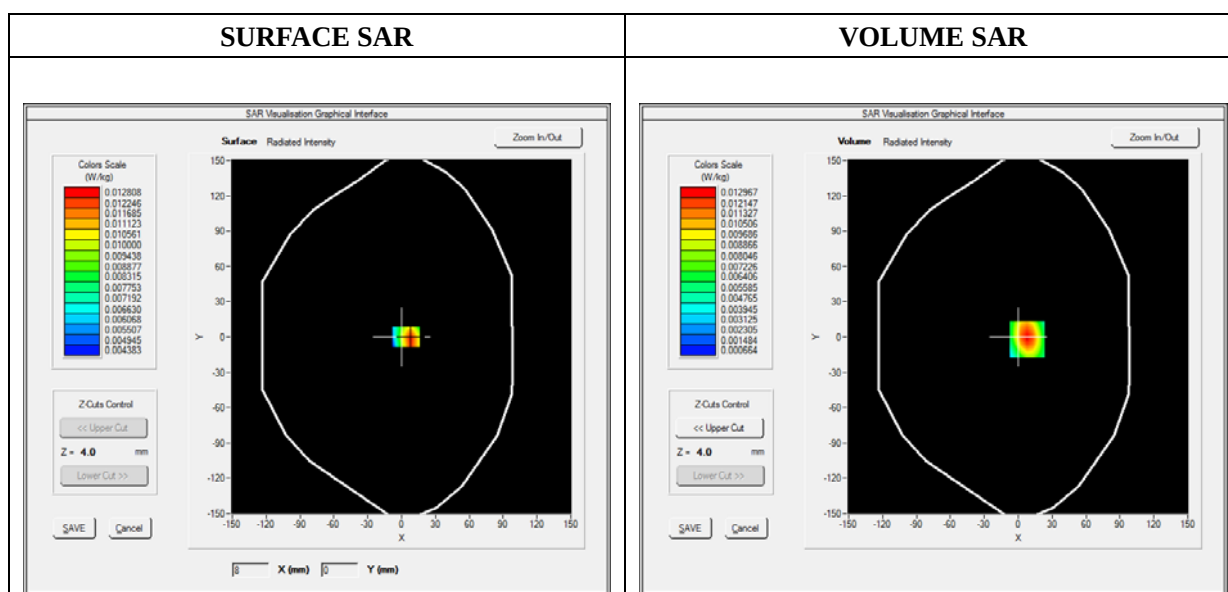

Maximum location: X=8.00, Y=-2.00

SAR 10g (W/Kg)	0.004896
SAR 1g (W/Kg)	0.009845

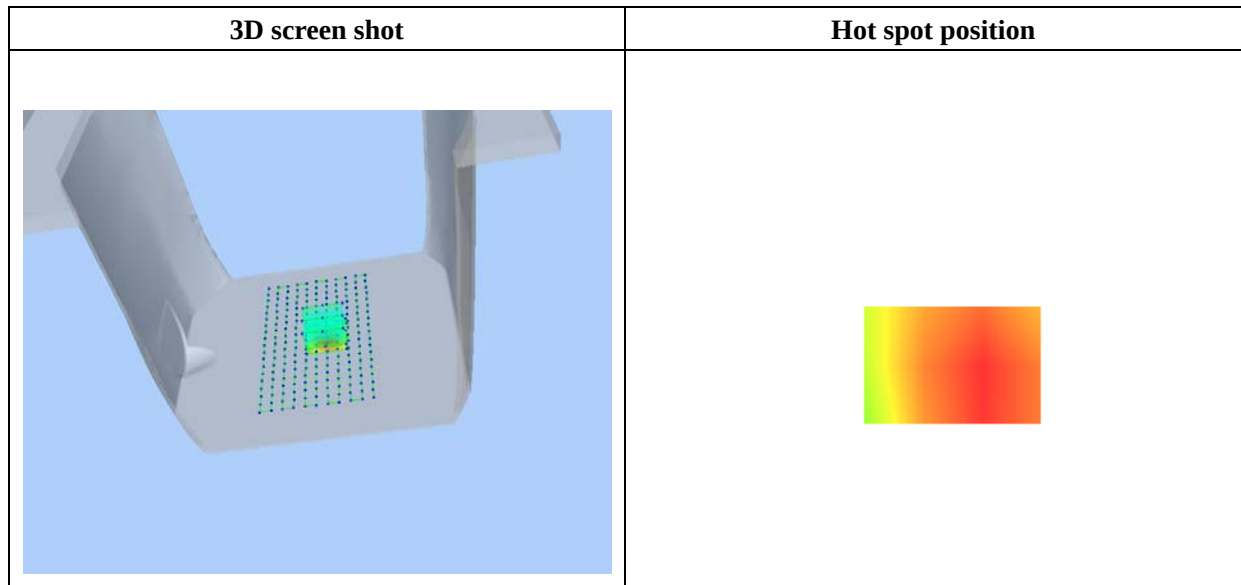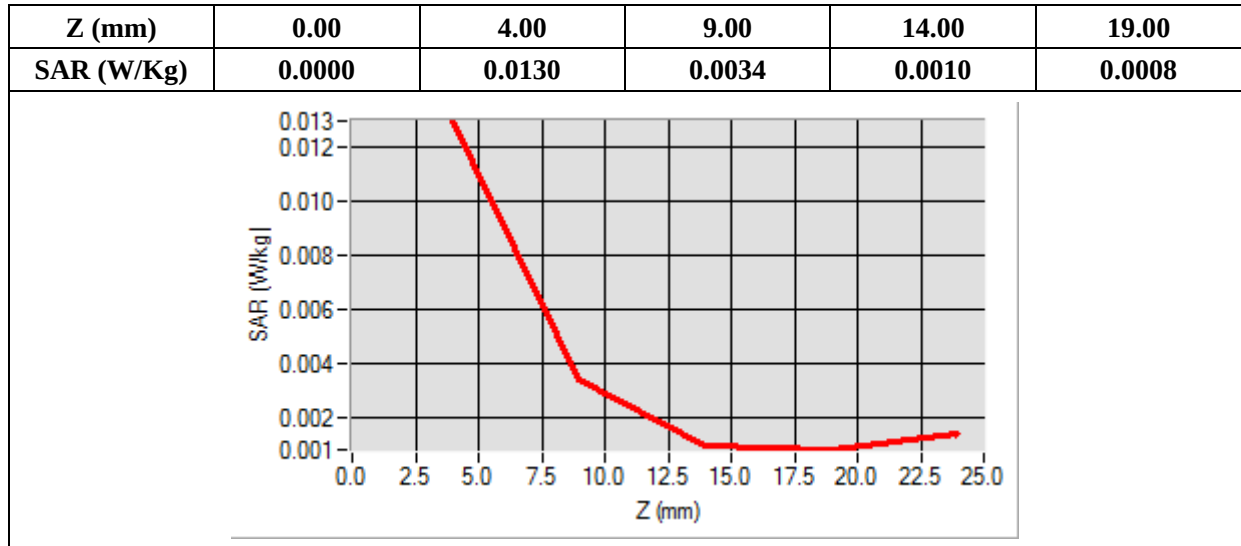

Annex C. EUT Photos

EUT View Front



EUT View Back




Antenna View



Annex D. Test Setup Photos

Head Exposure Conditions

Cheek

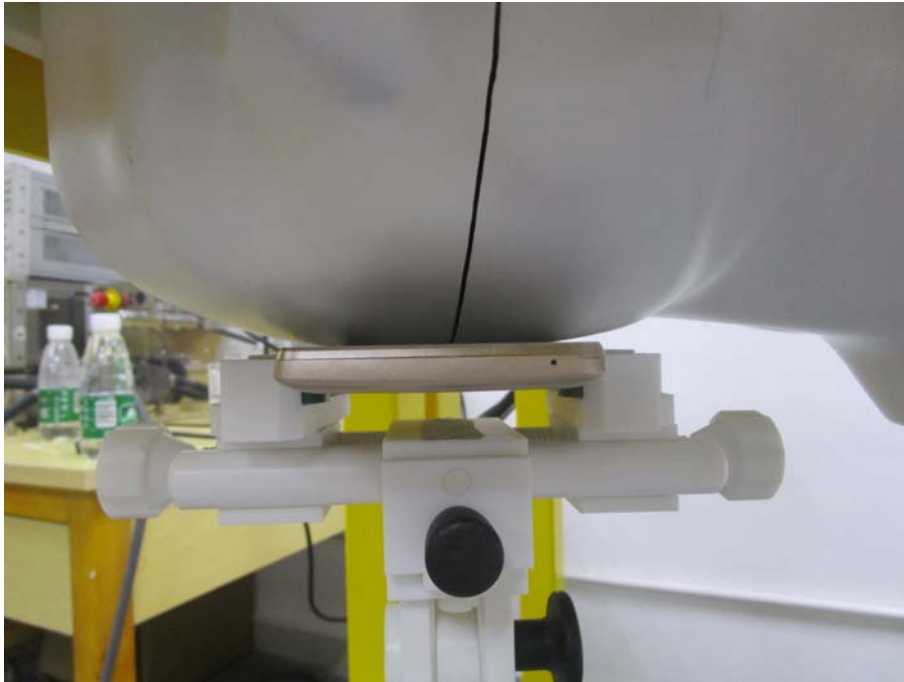

Tilt




Cheek**Tilt**

Body-worn & Hotspot mode Exposure Conditions

Front Side



Back Side

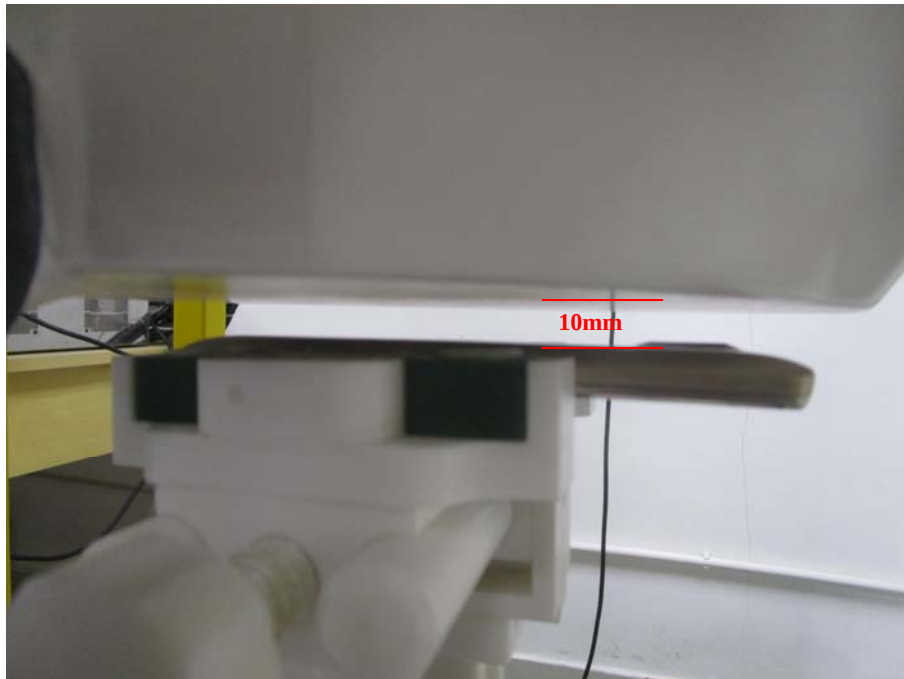


Hotspot Exposure Conditions

Right side



Left side

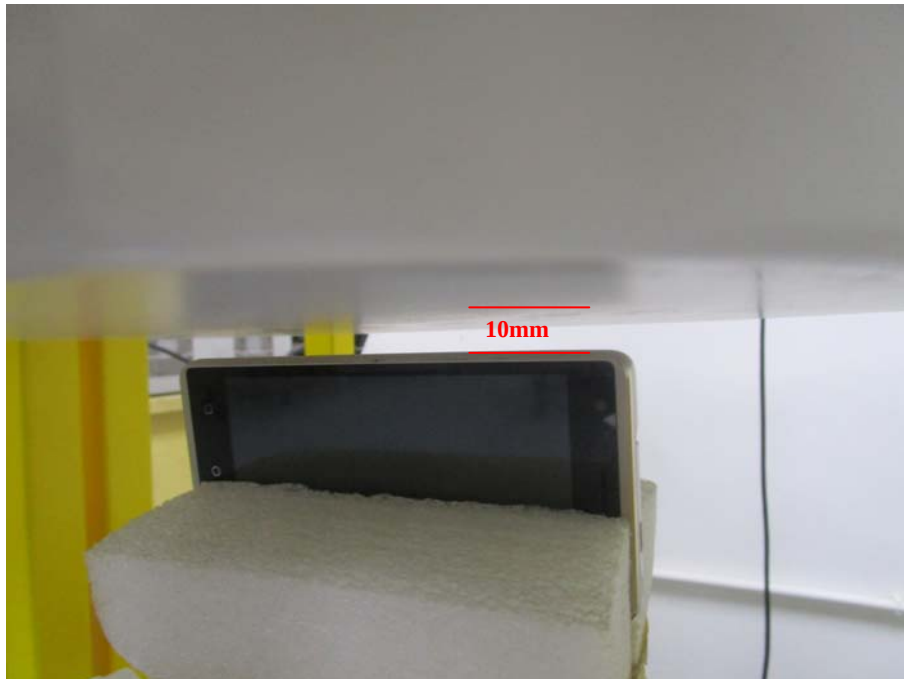

Top Side**Bottom Side**

Annex E. Calibration Certificate

Please refer to the Exhibit for the Calibration Certificate

******* END OF REPORT *******