

Measurement Report for Device
Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	Software Version	DUT Type
Device,	145.0 x 45.0 x 10.0	3.2.0.1840	Phone

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz]	Conversion Factor
5G	FRONT, 12.00	6825.0	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave – 1109	Air –	EUmmWV3 – SN9424_F1–55GHz, 2025–03–14	DAE4 Sn1399, 2025–03–14

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	40.0 x 40.0
Grid Steps [lambda]	0.06 x 0.06
Sensor Surface [mm]	12.0

Measurement Results

Date	2026–01–28
Avg. Area [cm ²]	1.00
psPDn+ [W/m ²]	0.219
psPDtot+ [W/m ²]	0.227
H _{max} [A/m]	0.026
E _{max} [V/m]	10.0
max _(Stot) [W/m ²]	0.235
Power Drift [dB]	0.03
IPDn	0.161

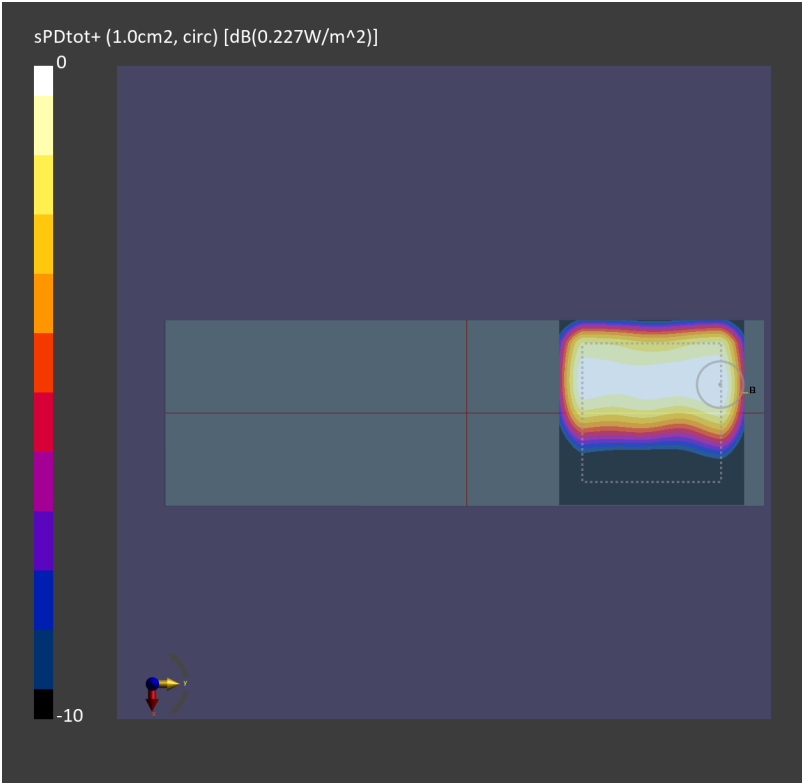

Measurement Report for 472626

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	Software Version	DUT Type
472626,	155.0 x 50.0 x 50.0	3.2.0.1840	Laptop

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz]	Conversion Factor
5G	FRONT, 5.00	6025.0	1.0

Hardware Setup

Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave – 1207	Air –	EUmmWV3 – SN9424_F1–55GHz, 2025–03–14	DAE4 Sn853, 2024–08–07

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	120.0 x 120.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	5.0

Measurement Results

Date	2025–04–13
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	0.418
psPDtot+ [W/m ²]	0.564
H _{max} [A/m]	0.064
E _{max} [V/m]	23.6
max _(Stot) [W/m ²]	0.738
Power Drift [dB]	0.07
IPDn	0.560

