


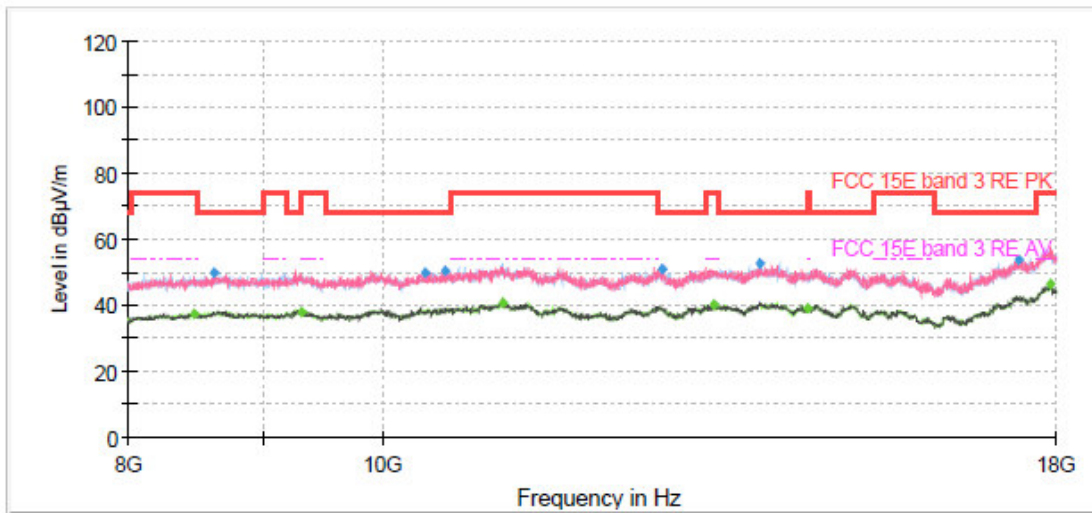


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
8467.50	---	37.41	54.00	16.59	500.00	200.0	H	129.00	3
8625.00	49.77	---	68.20	18.43	500.00	200.0	V	338.00	4
9305.00	---	38.08	54.00	15.92	500.00	200.0	V	229.00	6
10362.50	50.08	---	68.20	18.12	500.00	200.0	V	301.00	5
10548.75	50.14	---	68.20	18.06	500.00	200.0	H	84.00	6
11096.25	---	40.95	54.00	13.05	500.00	200.0	H	206.00	7
12748.75	50.99	---	68.20	17.21	500.00	200.0	V	0.00	7
13333.75	---	39.98	54.00	14.02	500.00	200.0	V	338.00	8
13881.25	52.68	---	68.20	15.52	500.00	200.0	V	345.00	9
14490.00	---	39.26	54.00	14.74	500.00	200.0	V	357.00	8
17412.50	53.95	---	68.20	14.25	500.00	200.0	H	2.00	13
17911.25	---	46.16	54.00	7.84	500.00	200.0	V	301.00	15

2. Conducted Emission

2.1. Wi-Fi 5GHz


During the test, the Conducted Emission was performed in all modes with all channels. The test data of the worst-case condition was recorded in this report.

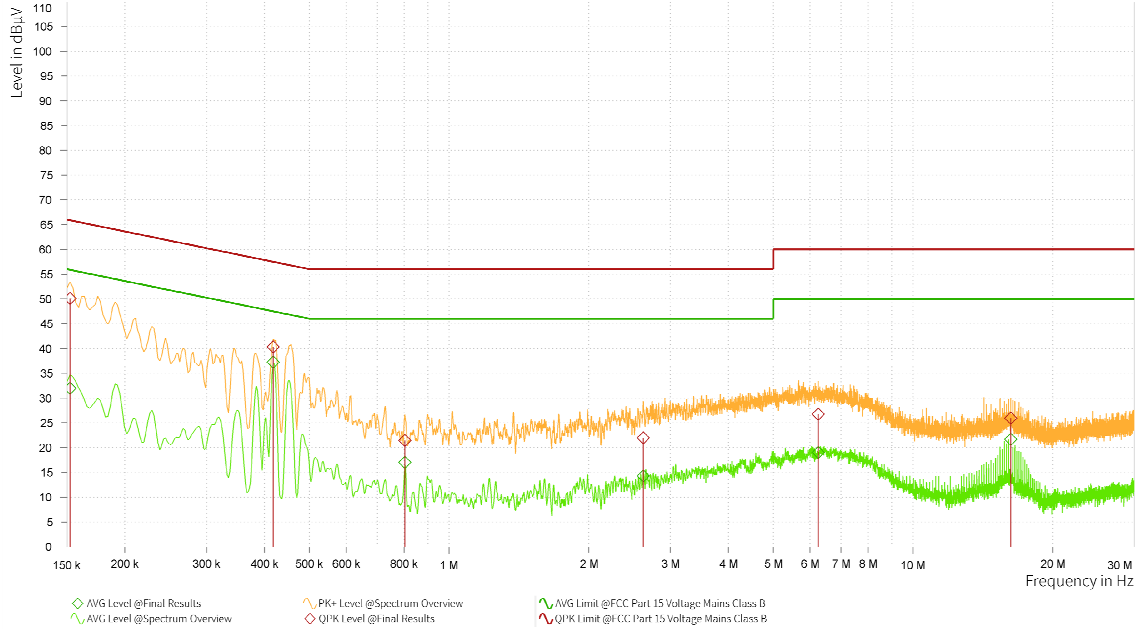

Frequency [MHz]	QPK Level [dBμV]	QPK Limit [dBμV]	QPK Margin [dB]	AVG Level [dBμV]	AVG Limit [dBμV]	AVG Margin [dB]	Correction [dB]	Line	Meas. BW [kHz]	Meas. Time [s]
0.152	50.07	65.88	15.81	31.98	55.88	23.89	20.90	L1	9.000	1.000
0.418	40.34	57.49	17.16	37.21	47.49	10.28	20.86	L1	9.000	1.000
0.803	21.42	56.00	34.58	17.04	46.00	28.96	20.33	L1	9.000	1.000
2.623	21.94	56.00	34.06	14.30	46.00	31.70	19.53	L1	9.000	1.000
6.250	26.77	60.00	33.23	19.03	50.00	30.97	19.40	L1	9.000	1.000
16.256	25.95	60.00	34.05	21.66	50.00	28.34	19.54	L1	9.000	1.000

Remark: Correct factor=cable loss + LISN factor

L line Conducted Emission from 150 kHz to 30 MHz

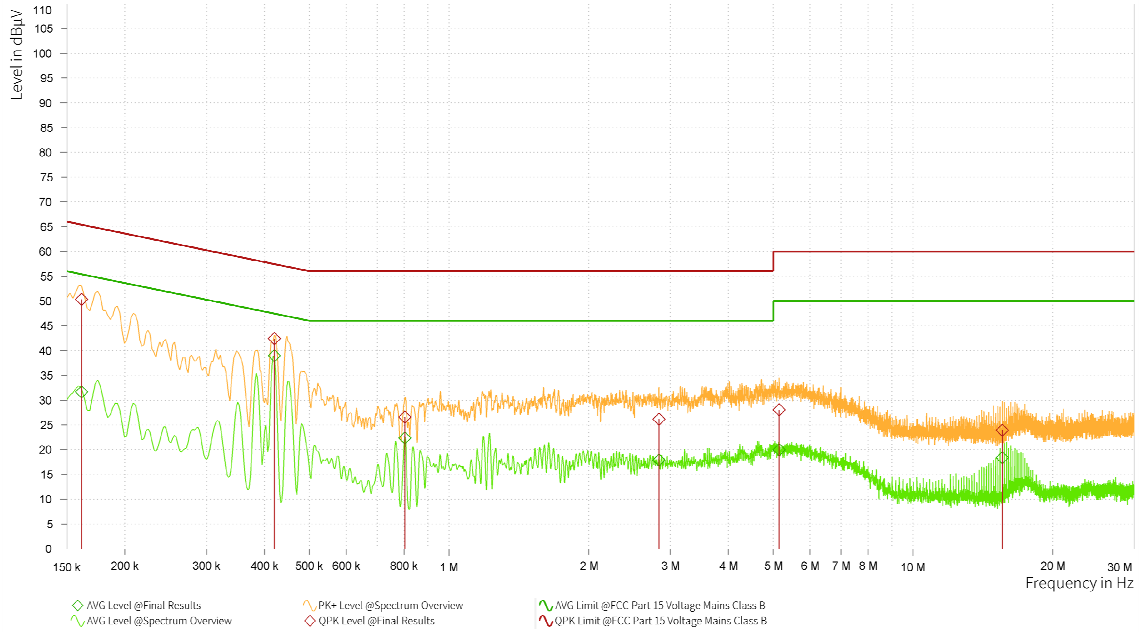

Frequency [MHz]	QPK Level [dBµV]	QPK Limit [dBµV]	QPK Margin [dB]	AVG Level [dBµV]	AVG Limit [dBµV]	AVG Margin [dB]	Correction [dB]	Line	Meas. BW [kHz]	Meas. Time [s]
0.161	50.34	65.40	15.06	31.65	55.40	23.75	20.90	N	9.000	1.000
0.420	42.43	57.45	15.02	38.96	47.45	8.49	20.87	N	9.000	1.000
0.803	26.55	56.00	29.45	22.36	46.00	23.64	20.34	N	9.000	1.000
2.834	26.15	56.00	29.85	17.90	46.00	28.10	19.51	N	9.000	1.000
5.150	28.06	60.00	31.94	19.95	50.00	30.05	19.41	N	9.000	1.000
15.585	23.92	60.00	36.08	18.35	50.00	31.65	19.55	N	9.000	1.000

Remark: Correct factor=cable loss + LISN factor

N line Conducted Emission from 150 kHz to 30 MHz