

FCC REPORT

Applicant: Shanghai Sunmi Technology Co.,Ltd.

Address of Applicant: Room 605, Block 7, KIC Plaza, No.388 Song Hu Road Yang Pu District, Shanghai 200433, China

Equipment Under Test (EUT)

Product Name: POS System

Model No.: W1402

FCC ID: 2AH25W1403

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.407:2015

Date of sample receipt: December 28, 2016


Date of Test: December 28, 2016-January 03, 2017

Date of report issued: January 06, 2017

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

A circular logo for GTS (Global United Technology Services Co., Ltd.) is visible. The logo contains the text "GTS" in the center, "GLOBAL TESTING" below it, and "UNITED TECHNOLOGY SERVICES CO., LTD." around the perimeter. A handwritten signature in black ink is written over the logo.

Robinson Lo

Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the GTS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of GTS or testing done by GTS in connection with, distribution or use of the product described in this report must be approved by GTS in writing.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Version No.	Date	Description
00	January 06, 2017	Original

Prepared By:

Edward Pan

Date:

January 06, 2017

Project Engineer

Check By:

Andy Wu

Date:

January 06, 2017

Reviewer

3 Contents

Page

1	COVER PAGE	1
2	VERSION	2
3	CONTENTS	3
4	TEST SUMMARY	4
4.1	MEASUREMENT UNCERTAINTY	4
5	GENERAL INFORMATION	5
5.1	CLIENT INFORMATION	5
5.2	GENERAL DESCRIPTION OF EUT	5
5.3	TEST MODE	7
5.4	DESCRIPTION OF SUPPORT UNITS	7
5.5	TEST FACILITY	7
5.6	TEST LOCATION	7
6	TEST INSTRUMENTS LIST	8
7	TEST RESULTS AND MEASUREMENT DATA	9
7.1	ANTENNA REQUIREMENT	9
7.2	CONDUCTED EMISSIONS	10
7.3	SPURIOUS EMISSION	13
7.3.1	<i>Radiated Emission Method</i>	13
8	TEST SETUP PHOTO	16
9	EUT CONSTRUCTIONAL DETAILS	16

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.407(a)(3)	N/A
Channel Bandwidth	15.407(e)	N/A
Power Spectral Density	15.407(a)(3)	N/A
Band Edge	15.407(b)(4)	N/A
Spurious Emission	15.205/15.209/15.407(b)(4)	Pass

Pass: The EUT complies with the essential requirements in the standard.

N/A: Not applicable

Remark: Test according to ANSI C63.10:2013 and ANSI C63.4:2014.

4.1 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz ~ 30MHz	$\pm 4.34\text{dB}$	(1)
Radiated Emission	30MHz ~ 1000MHz	$\pm 4.24\text{dB}$	(1)
Radiated Emission	1GHz ~ 40GHz	$\pm 4.68\text{dB}$	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	$\pm 3.45\text{dB}$	(1)
Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.			

5 General Information

5.1 Client Information

Applicant:	Shanghai Sunmi Technology Co.,Ltd.
Address of Applicant:	Room 605, Block 7, KIC Plaza, No.388 Song Hu Road Yang Pu District, Shanghai 200433, China
Manufacturer:	Shanghai Sunmi Technology Co.,Ltd.
Address of Manufacturer:	Room 605, Block 7, KIC Plaza, No.388 Song Hu Road Yang Pu District, Shanghai 200433, China
Factory:	Huizhou BYD Electronics Co.,Ltd.
Address of Factory:	Xiangshui River,Economic Development Zone,Daya Bay, Huizhou,Guangdong,P.R.China

5.2 General Description of EUT

Product Name:	POS System
Model No.:	W1402
Operation Frequency:	802.11a/802.11n(HT20)@5.8G Band: 5745MHz ~ 5825MHz 802.11n(HT40)@ 5.8G Band: 5755MHz ~ 5795MHz
Channel numbers:	802.11a/802.11n(HT20)@5.8G Band: 5 802.11n(HT40)@ 5.8G Band: 2
Channel bandwidth:	802.11a/802.11n(HT20):20MHz 802.11n(HT40):40MHz
Modulation technology:	Orthogonal Frequency Division Multiplexing (OFDM)
Antenna Type:	Integral antenna
Antenna gain:	-5.1dBi
Power supply:	AC Adaptor Model No.:EA10681P-240 Input: AC 100-240V, 50/60Hz, 2.0A Output: DC 24V, 2.5A

Operation Frequency each of channel @ 5.8G Band							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
149	5745MHz	153	5765MHz	155	5775MHz	157	5785MHz
161	5805MHz	165	5825MHz				

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency (MHz)		
	5.8G Band		
	802.11a 802.11n(HT20)	802.11n(HT40)	
Lowest channel	5745	5755	
Middle channel	5785		
Highest channel	5825	5795	

5.3 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode
<i>Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i>	

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:	
Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.	
Mode	Data rate
802.11a	6Mbps
802.11n(HT20)	6.5Mbps
802.11n(HT40)	13Mbps

5.4 Description of Support Units

None.

5.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations: • FCC —Registration No.: 600491 Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 600491, June 22, 2016. • Industry Canada (IC) —Registration No.: 9079A-2 The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. Has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, August 15, 2016.

5.6 Test Location

All tests were performed at:
Global United Technology Services Co., Ltd. No. 301-309, 3/F., Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China Tel: 0755-27798480 Fax: 0755-27798960

6 Test Instruments list

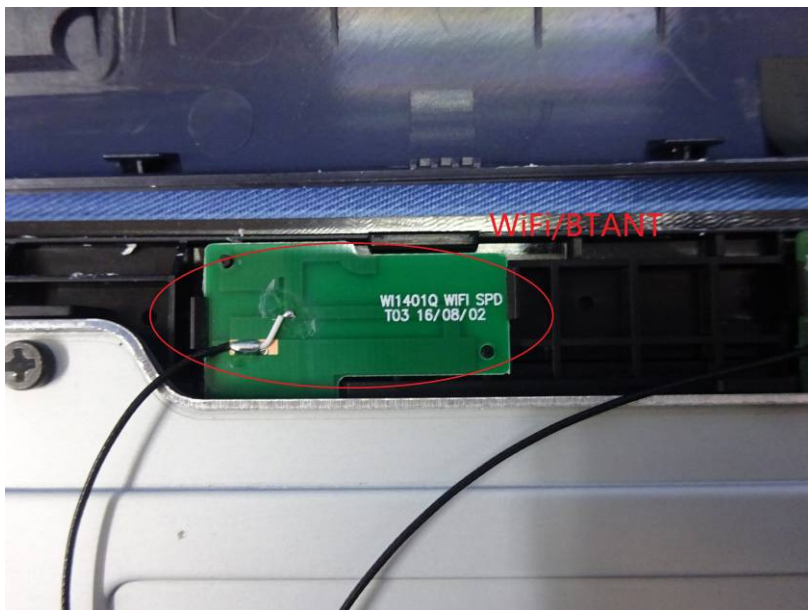
Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July 03 2015	July 02 2020
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June 29 2016	June 28 2017
4	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June 29 2016	June 28 2017
5	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June 29 2016	June 28 2017
6	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	9120D-829	GTS208	June 29 2016	June 28 2017
7	Horn Antenna	ETS-LINDGREN	3160	GTS217	June 29 2016	June 28 2017
8	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
9	Coaxial Cable	GTS	N/A	GTS213	June 29 2016	June 28 2017
10	Coaxial Cable	GTS	N/A	GTS211	June 29 2016	June 28 2017
11	Coaxial cable	GTS	N/A	GTS210	June 29 2016	June 28 2017
12	Coaxial Cable	GTS	N/A	GTS212	June 29 2016	June 28 2017
13	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June 29 2016	June 28 2017
14	Amplifier(2GHz-20GHz)	HP	8349B	GTS206	June 29 2016	June 28 2017
15	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June 29 2016	June 28 2017
16	Band filter	Amindeon	82346	GTS219	June 29 2016	June 28 2017
17	Power Meter	Anritsu	ML2495A	GTS540	June 29 2016	June 28 2017
18	Power Sensor	Anritsu	MA2411B	GTS541	June 29 2016	June 28 2017

Conducted Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.0(L)x3.0(W)x3.0(H)	GTS264	May.16 2014	May.15 2019
2	EMI Test Receiver	Rohde & Schwarz	ESCS30	GTS223	June 29 2016	June 28 2017
3	10dB Pulse Limita	Rohde & Schwarz	N/A	GTS224	June 29 2016	June 28 2017
4	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June 29 2016	June 28 2017
5	LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	GTS226	June 29 2016	June 28 2017
6	Coaxial Cable	GTS	N/A	GTS227	June 29 2016	June 28 2017
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Barometer	ChangChun	DYM3	GTS257	June 29 2016	June 28 2017

7 Test results and Measurement Data

7.1 Antenna requirement

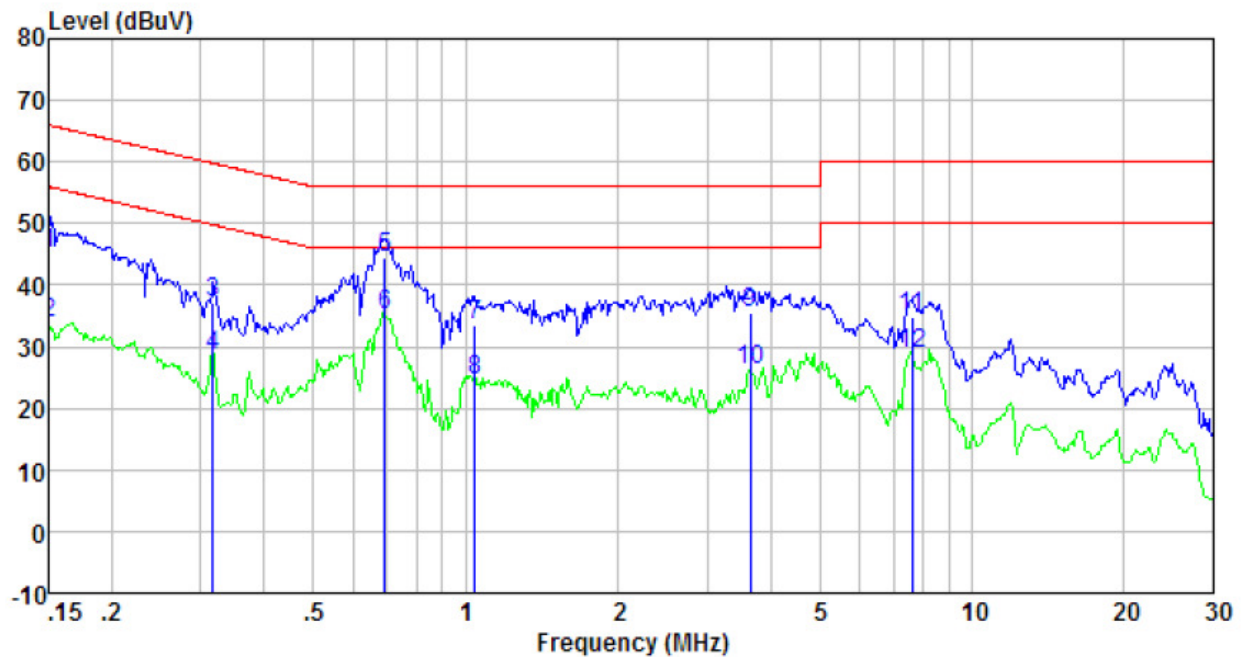
Standard requirement:	FCC Part15 C Section 15.203
<i>15.203 requirement:</i> <i>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</i>	
E.U.T Antenna:	
<i>The antenna is integral antenna. The best case gain of the antenna is -5.1dBi.</i>	
	

7.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207		
Test Method:	ANSI C63.10:2013		
Test Frequency Range:	150KHz to 30MHz		
Class / Severity:	Class B		
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test setup:	Reference Plane 40cm 80cm LISN AUX Equipment E.U.T Filter AC power EMI Receiver Test table/Insulation plane Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m		
Test procedure:	1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.		
Test Instruments:	Refer to section 6.0 for details		
Test mode:	Refer to section 5.3 for details		
Test results:	Pass		

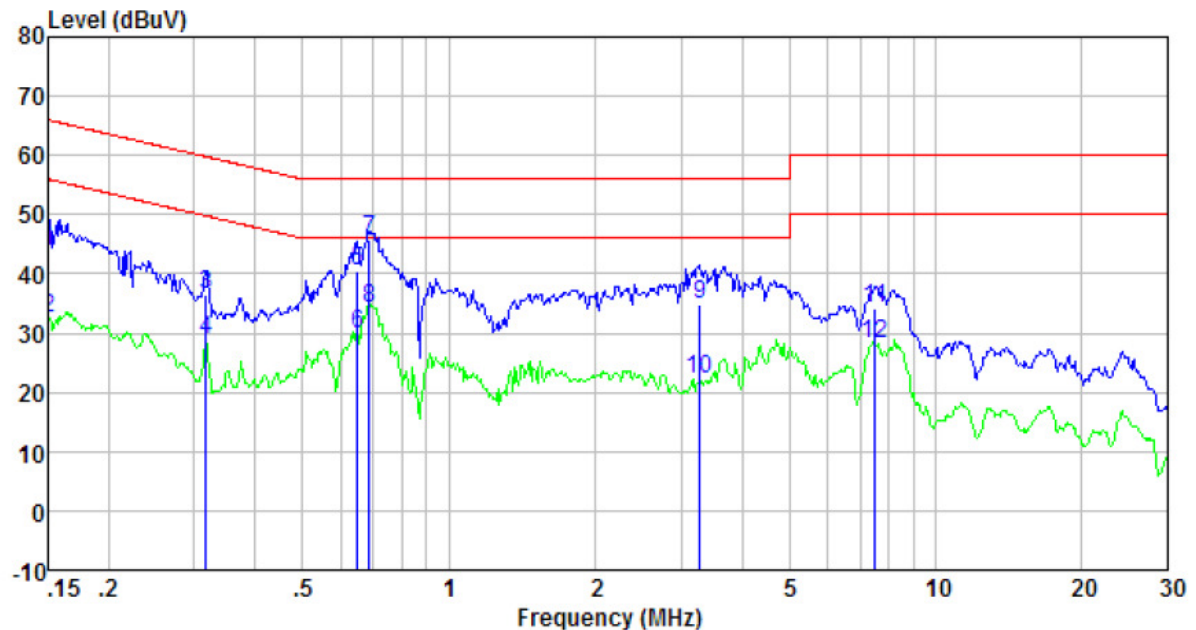
Measurement data

Line:



Freq MHz	Reading level dBuV	LIISN/ISN factor dB	Cable loss dB	level dBuV	Limit level dBuV	Over limit dB	Remark
0.150	44.54	0.42	0.12	45.08	66.00	-20.92	QP
0.150	33.32	0.42	0.12	33.86	56.00	-22.14	Average
0.317	36.64	0.44	0.10	37.18	59.80	-22.62	QP
0.317	28.02	0.44	0.10	28.56	49.80	-21.24	Average
0.694	44.07	0.28	0.13	44.48	56.00	-11.52	QP
0.694	34.70	0.28	0.13	35.11	46.00	-10.89	Average
1.043	33.07	0.25	0.13	33.45	56.00	-22.55	QP
1.043	24.20	0.25	0.13	24.58	46.00	-21.42	Average
3.642	35.10	0.21	0.15	35.46	56.00	-20.54	QP
3.642	25.86	0.21	0.15	26.22	46.00	-19.78	Average
7.606	34.43	0.22	0.18	34.83	60.00	-25.17	QP
7.606	28.46	0.22	0.18	28.86	50.00	-21.14	Average

Neutral:



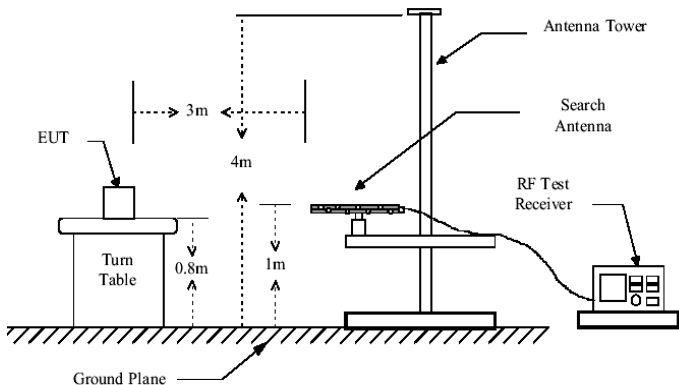
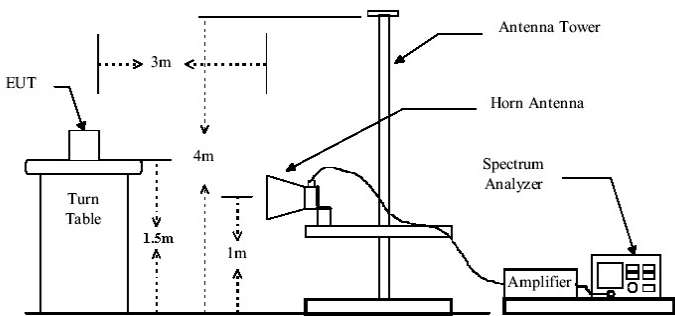
Freq MHz	Reading level dBuV	LISN/ISN factor dB	Cable loss dB	level dBuV	Limit level dBuV	Over limit dB	Remark
0.150	43.38	0.41	0.12	43.91	66.00	-22.09	QP
0.150	32.01	0.41	0.12	32.54	56.00	-23.46	Average
0.317	36.13	0.42	0.10	36.65	59.80	-23.15	QP
0.317	28.34	0.42	0.10	28.86	49.80	-20.94	Average
0.647	39.97	0.26	0.13	40.36	56.00	-15.64	QP
0.647	29.52	0.26	0.13	29.91	46.00	-16.09	Average
0.686	45.34	0.25	0.13	45.72	56.00	-10.28	QP
0.686	33.95	0.25	0.13	34.33	46.00	-11.67	Average
3.276	34.50	0.21	0.15	34.86	56.00	-21.14	QP
3.276	21.71	0.21	0.15	22.07	46.00	-23.93	Average
7.526	33.92	0.22	0.18	34.32	60.00	-25.68	QP
7.526	27.87	0.22	0.18	28.27	50.00	-21.73	Average

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss
4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both *limits and measurement with the average detector receiver is unnecessary*.

7.3 Spurious Emission

7.3.1 Radiated Emission Method

Test Requirement:	FCC Part15 C Section 15.209, Part 15E Section 15.407(b)(4)				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	30MHz to 40GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		Peak	1MHz	3MHz	Average Value
Limit:	Frequency		Limit (dBuV/m @3m)		Remark
	30MHz-88MHz		40.0		Quasi-peak Value
	88MHz-216MHz		43.5		Quasi-peak Value
	216MHz-960MHz		46.0		Quasi-peak Value
	960MHz-1GHz		54.0		Quasi-peak Value
	Frequency		Limit (dBm/MHz)		Remark
	Above 1GHz		-27.0		Peak Value
Test setup:	Below 1GHz				
					
Test setup:	Above 1GHz				
					
Test Procedure:	1. The EUT was placed on the top of a rotating table (0.8m for below				

	1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 7. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Remark:

According to KDB 789033 D02V01 section G) 1) (d), for For measurements above 1000 MHz @ 3m distance, the limit of field strength is computed as follows:

$$E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2;$$

For example, if EIRP = -27dBm

$$E[\text{dBuV/m}] = -27 + 95.2 = 68.2\text{dBuV/m}.$$

Measurement Data

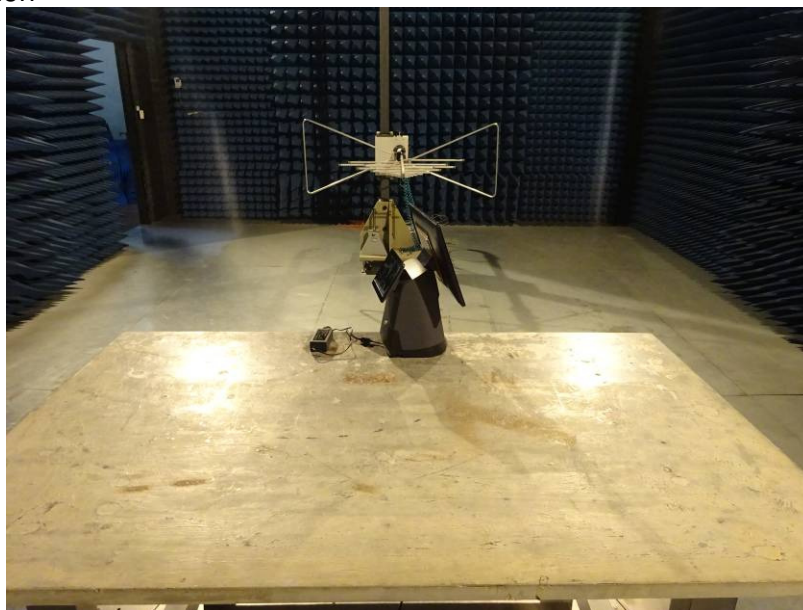
■ Below 1GHz

Only the data of worst case at each channel plan (nominal bandwidth =20MHz, 40MHz, 80MHz) is reported.

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
37.03	43.42	14.82	0.63	30.06	28.81	40.00	-11.19	Vertical
52.03	45.47	15.16	0.79	29.98	31.44	40.00	-8.56	Vertical
86.81	47.99	12.89	1.08	29.76	32.20	40.00	-7.80	Vertical
160.91	45.28	10.69	1.63	29.36	28.24	43.50	-15.26	Vertical
201.39	48.59	12.60	1.85	29.21	33.83	43.50	-9.67	Vertical
382.59	37.69	16.68	2.77	29.58	27.56	46.00	-18.44	Vertical
54.64	34.83	15.03	0.81	29.96	20.71	40.00	-19.29	Horizontal
75.98	39.59	9.97	0.99	29.82	20.73	40.00	-19.27	Horizontal
185.79	43.84	12.16	1.77	29.25	28.52	43.50	-14.98	Horizontal
293.08	43.43	14.92	2.32	29.95	30.72	46.00	-15.28	Horizontal
365.54	41.31	16.48	2.69	29.66	30.82	46.00	-15.18	Horizontal
480.53	41.82	18.07	3.22	29.34	33.77	46.00	-12.23	Horizontal

8 Test Setup Photo

Radiated Emission



Conducted Emission



9 EUT Constructional Details

Reference to the test report No. GTS201609000126E01

-----END-----