






Rg	Fre- quency [MHz]	PK+ Le- vel [dBµV/m]	PK+ Li- mit [dBµV/m]	PK+ Margin [dB]	CAV Le- vel [dBµV/m]	CAV: AVG Limit [dBµV/m]	CAV Margin [dB]	Correc- tion [dB]	Polariza- tion	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]	Meas. Time [s]
1	6319.250	---	74.00	---	48.67	54.00	5.33	34.48	V	5	1.90	1.000	15.000
1	9027.500	---	74.00	---	52.95	54.00	1.05	38.47	V	-29	2.83	1.000	15.000

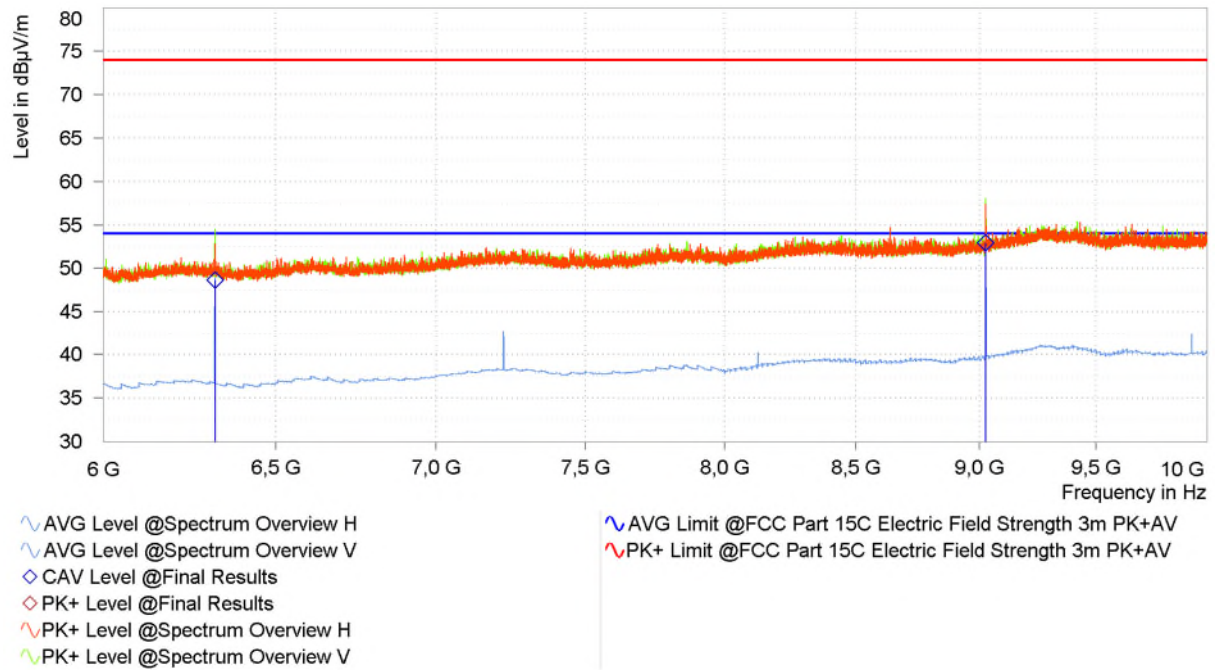

RFID Frequency: 915.25 MHz

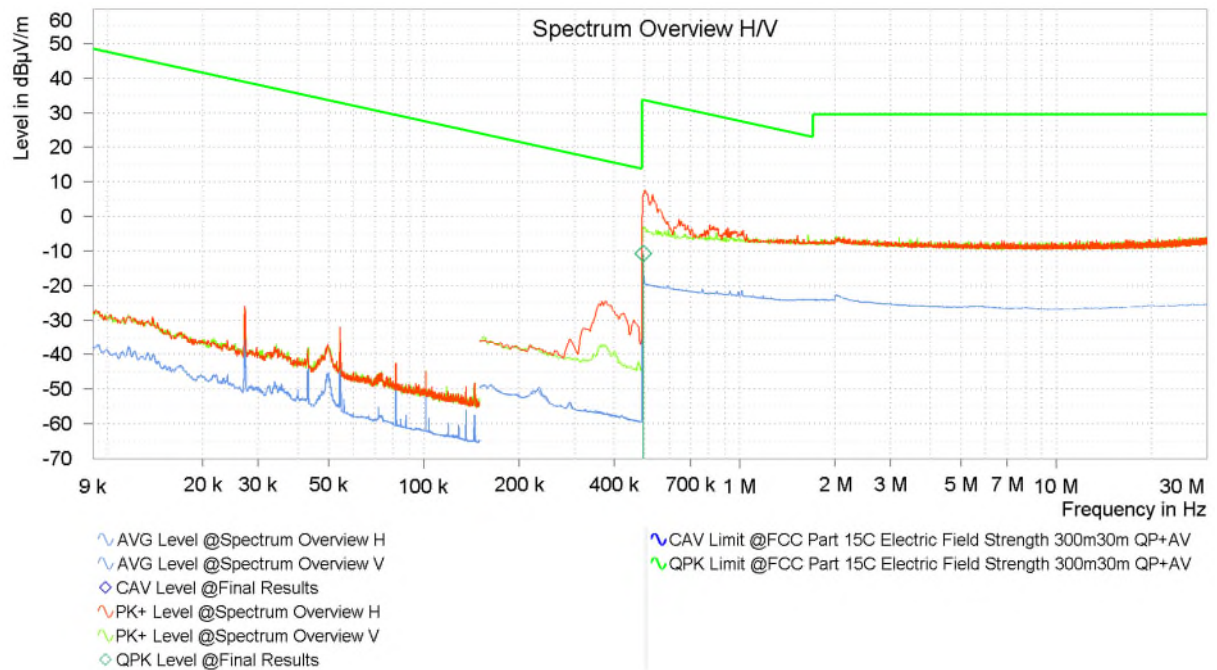


Rg	Frequency [MHz]	QPK Level [dBµV/m]	QPK Limit [dBµV/m]	QPK Margin [dB]	CAV Level [dBµV/m]	CAV Limit [dBµV/m]	CAV Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]	Meas. Time [s]
2	0.494	-10.72	33.73	44.45	---	---	---	-20.71	H	-135	1.00	9.000	1.000

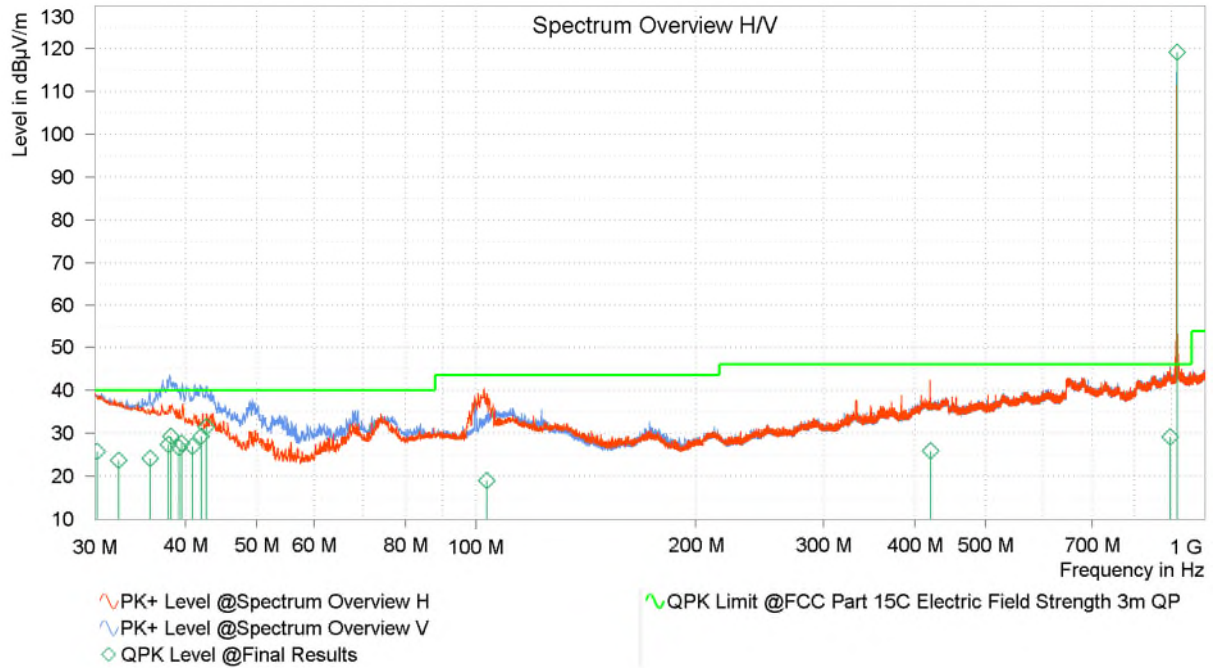


Rg	Frequency [MHz]	QPK Level [dBµV/m]	QPK Limit [dBµV/m]	QPK Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]	Meas. Time [s]
1	30.240	25.80	40.00	14.20	25.08	H	-1	1.00	120.000	15.000
1	32.340	23.69	40.00	16.31	23.86	V	105	3.81	120.000	15.000
1	35.730	24.10	40.00	15.90	21.97	V	27	1.39	120.000	15.000
1	37.890	27.38	40.00	12.62	20.72	V	68	1.39	120.000	15.000
1	38.190	29.27	40.00	10.73	20.54	V	22	1.06	120.000	15.000
1	39.210	26.69	40.00	13.31	19.93	V	22	1.09	120.000	15.000
1	39.450	27.62	40.00	12.38	19.79	V	-168	1.15	120.000	15.000
1	40.830	26.94	40.00	13.06	18.95	V	73	1.00	120.000	15.000
1	41.970	29.25	40.00	10.75	18.26	V	24	1.45	120.000	15.000
1	42.660	31.43	40.00	8.57	17.80	V	43	1.00	120.000	15.000
1	103.470	19.03	43.50	24.47	17.07	H	-118	3.83	120.000	15.000
1	420.810	25.88	46.00	20.12	22.79	H	139	1.06	120.000	15.000
1	895.710	29.12	46.00	16.88	30.31	V	-91	4.00	120.000	15.000
1	915.240	119.10	*	*	30.56	V	-42	1.06	120.000	15.000

* Intentional radiator not evaluated.

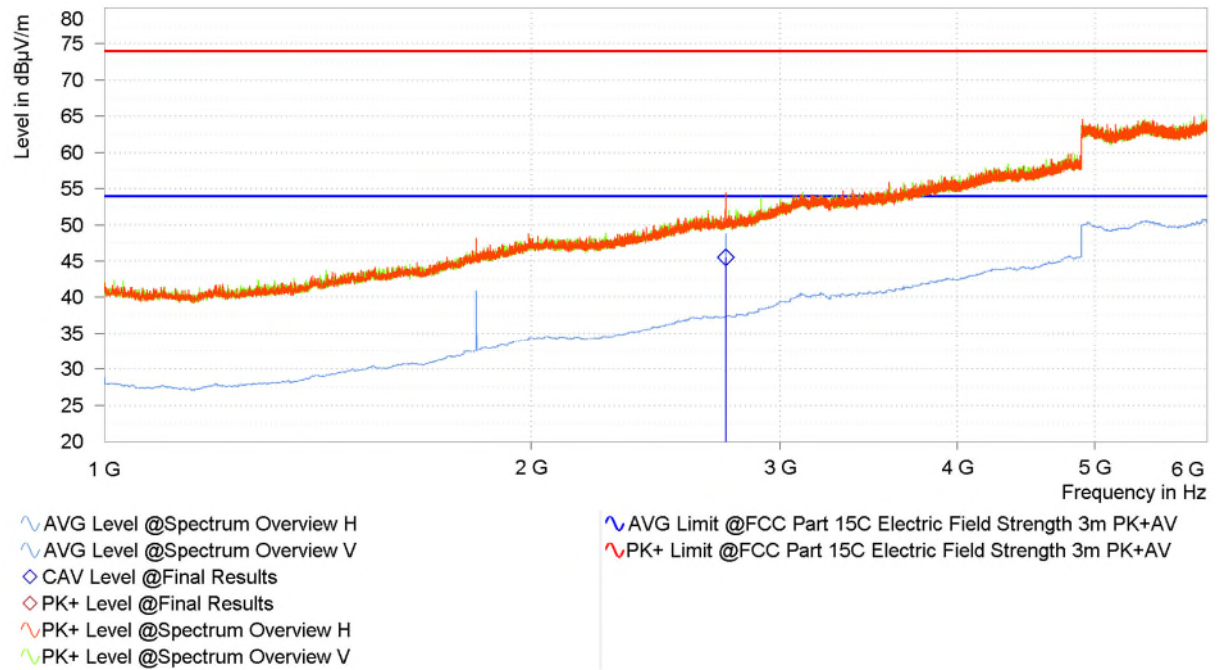

Rg	Fre- quency [MHz]	PK+ Le- vel [dBµV/m]	PK+ Li- mit [dBµV/m]	PK+ Margin [dB]	CAV Le- vel [dBµV/m]	CAV: AVG Limit [dBµV/m]	CAV Margin [dB]	Correc- tion [dB]	Polariza- tion	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]	Meas. Time [s]
1	2745.750	---	74.00	---	45.48	54.00	8.52	35.90	H	-49	3.95	1.000	15.000

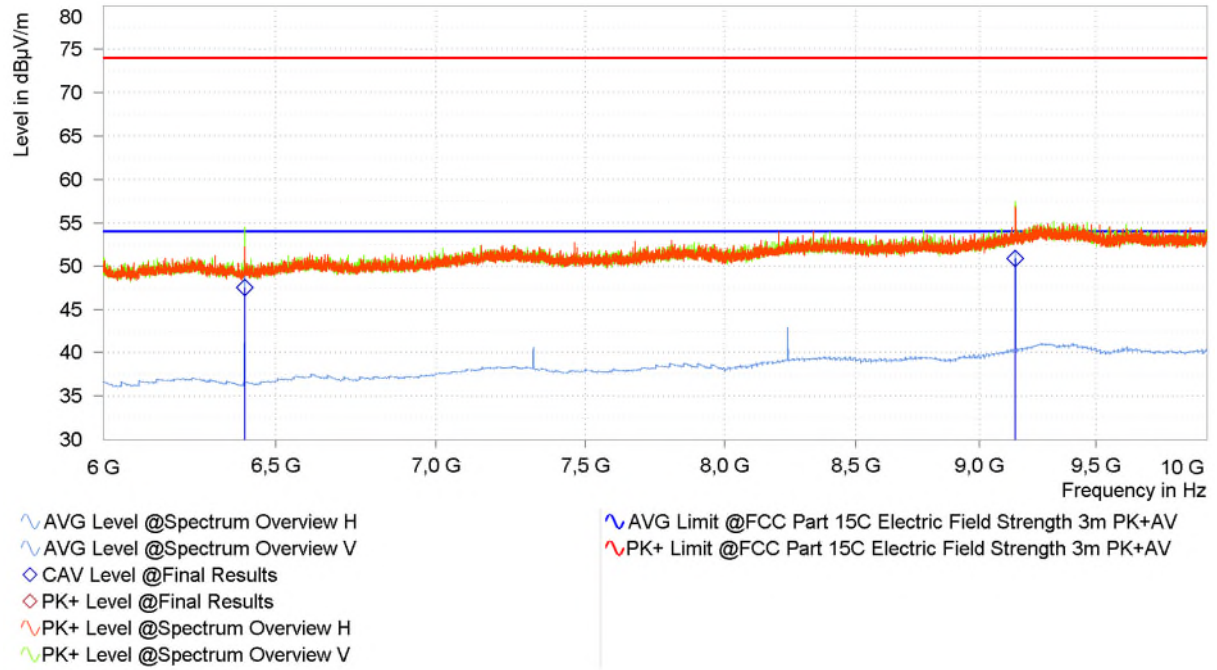


Rg	Fre- quency [MHz]	PK+ Le- vel [dBµV/m]	PK+ Li- mit [dBµV/m]	PK+ Margin [dB]	CAV Le- vel [dBµV/m]	CAV: AVG Limit [dBµV/m]	CAV Margin [dB]	Correc- tion [dB]	Polariza- tion	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]	Meas. Time [s]
1	6406.750	---	74.00	---	47.53	54.00	6.47	34.64	V	5	1.89	1.000	15.000
1	9152.500	---	74.00	---	50.93	54.00	3.07	38.71	V	-17	2.77	1.000	15.000



RFID Frequency: 927.25 MHz




Rg	Frequency [MHz]	QPK Level [dBµV/m]	QPK Limit [dBµV/m]	QPK Margin [dB]	CAV Level [dBµV/m]	CAV Limit [dBµV/m]	CAV Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]	Meas. Time [s]
2	0.539	-13.66	32.97	46.63	---	---	---	-20.72	H	87	1.00	9.000	1.000

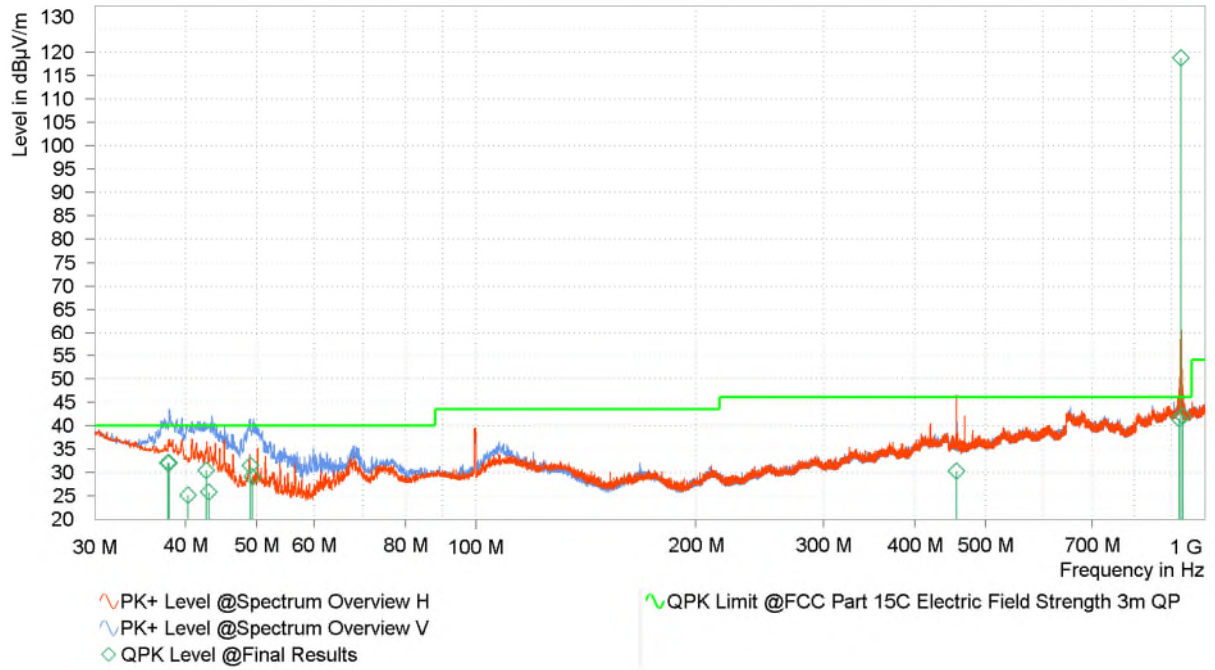

Rg	Frequency [MHz]	QPK Level [dBµV/m]	QPK Limit [dBµV/m]	QPK Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]	Meas. Time [s]
1	37.830	32.05	40.00	7.95	20.75	V	90	1.00	120.000	15.000
1	37.980	31.98	40.00	8.02	20.67	V	106	1.21	120.000	15.000
1	40.290	25.09	40.00	14.91	19.29	V	-10	1.46	120.000	15.000
1	42.660	30.35	40.00	9.65	17.80	V	-91	1.00	120.000	15.000
1	43.050	25.78	40.00	14.22	17.54	V	-102	1.51	120.000	15.000
1	49.020	31.45	40.00	8.55	13.54	V	-198	1.00	120.000	15.000
1	49.350	28.99	40.00	11.01	13.33	V	-115	1.28	120.000	15.000
1	456.120	30.25	46.00	15.75	23.71	H	-6	2.13	120.000	15.000
1	922.470	41.48	46.00	4.52	30.55	H	-9	1.00	120.000	15.000
1	927.240	118.76	*	*	30.54	V	-36	1.06	120.000	15.000
1	932.040	42.00	46.00	4.00	30.55	H	-148	1.33	120.000	15.000


* Intentional radiator not evaluated.

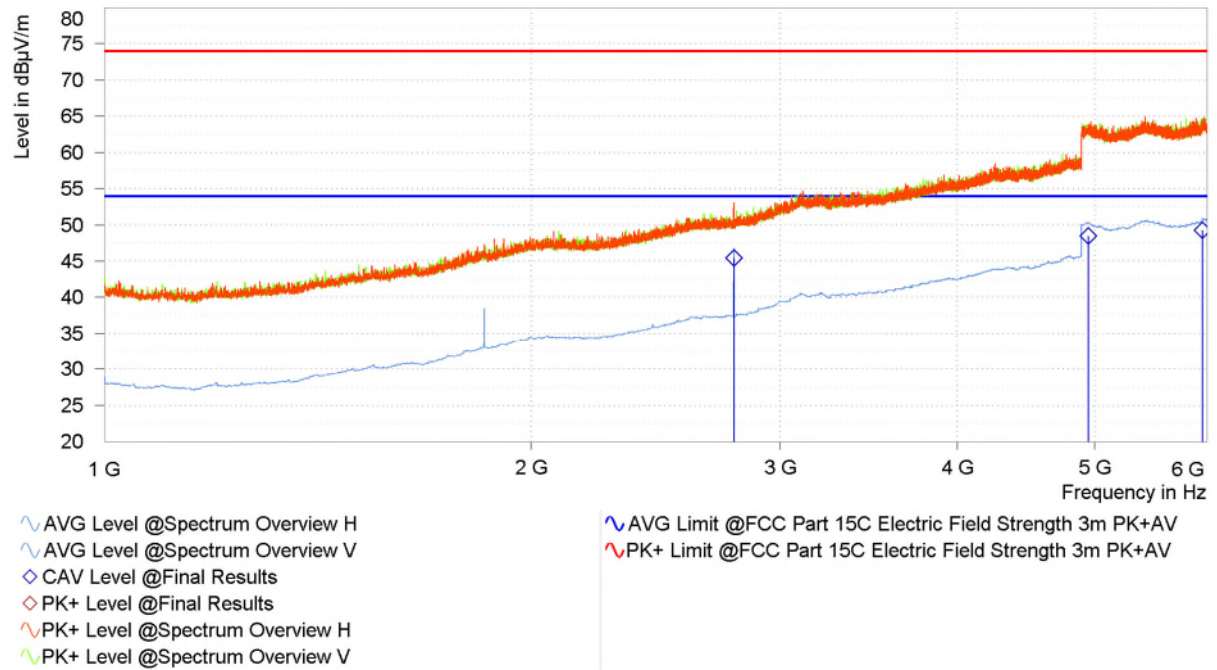


Rg	Fre- quency [MHz]	PK+ Le- vel [dBµV/m]	PK+ Li- mit [dBµV/m]	PK+ Margin [dB]	CAV Le- vel [dBµV/m]	CAV: AVG Limit [dBµV/m]	CAV Margin [dB]	Correc- tion [dB]	Polariza- tion	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]	Meas. Time [s]
1	2781.750	---	74.00	---	45.43	54.00	8.57	35.94	H	-56	3.89	1.000	15.000
1	4950.000	---	74.00	---	48.48	54.00	5.52	42.71	H	-113	2.95	1.000	15.000
1	5956.750	---	74.00	---	49.25	54.00	4.75	43.62	V	174	3.71	1.000	15.000



Antenna 2:
RFID Frequency: 902.75 MHz

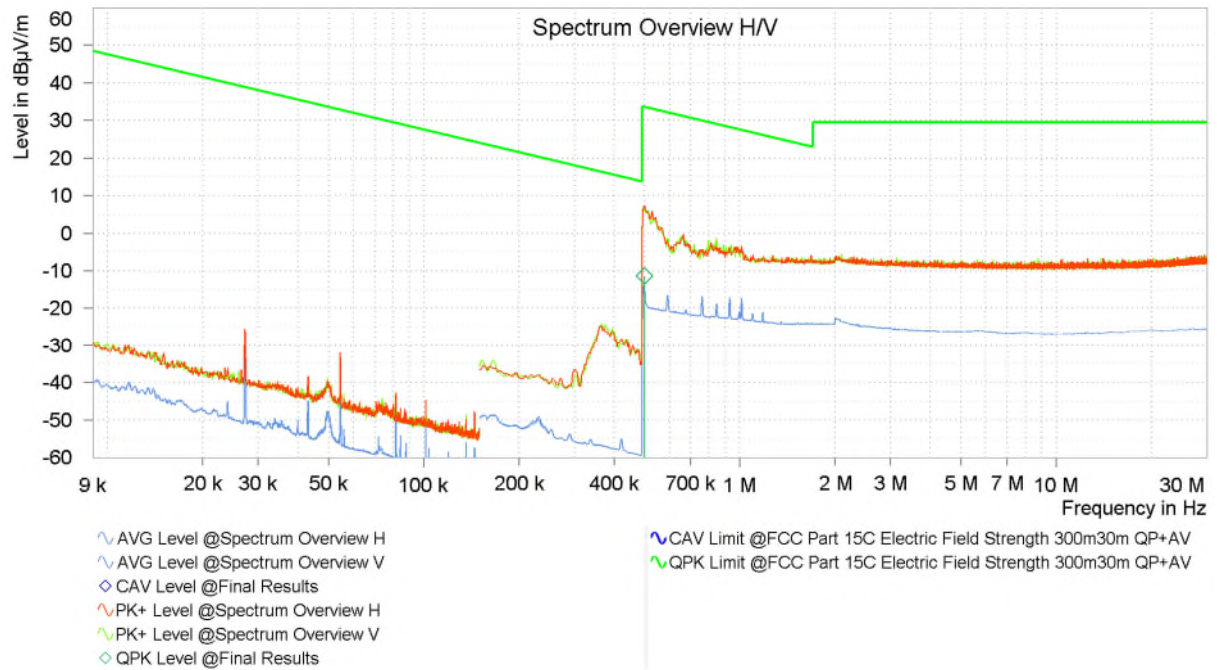


Rg	Frequency [MHz]	QPK Level [dBμV/m]	QPK Limit [dBμV/m]	QPK Margin [dB]	CAV Level [dBμV/m]	CAV Limit [dBμV/m]	CAV Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]	Meas. Time [s]
2	0.499	-11.41	33.65	45.05	---	---	---	-20.71	H	-82	1.00	9.000	1.000

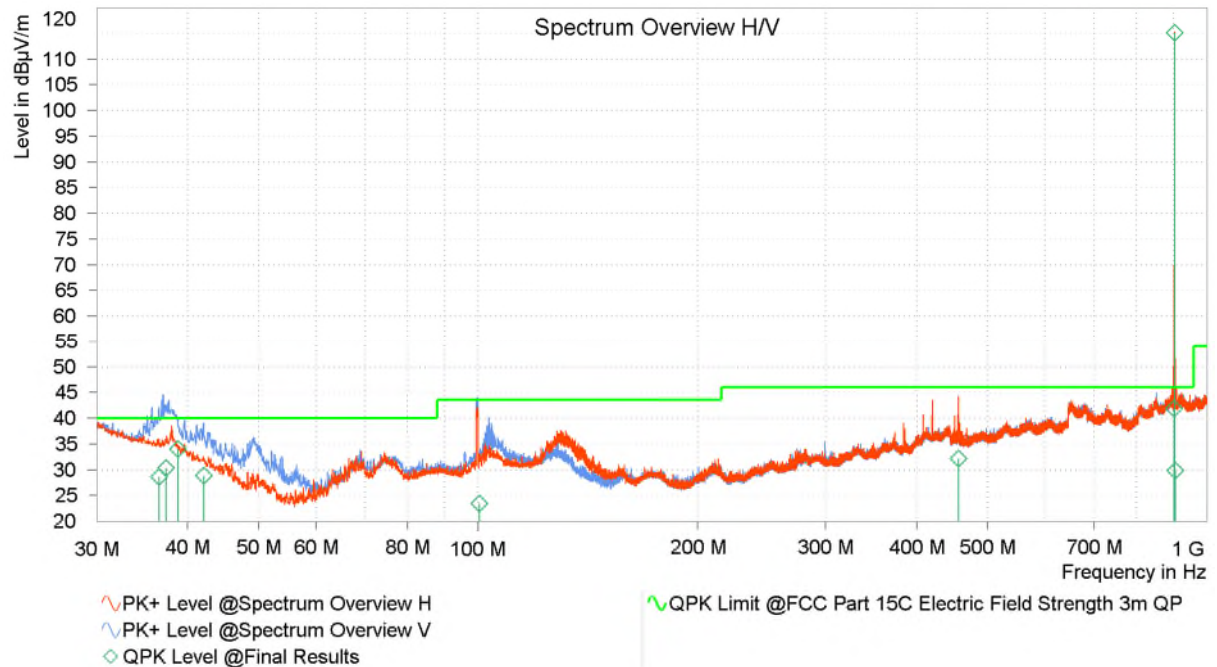


Rg	Frequency [MHz]	QPK Level [dBµV/m]	QPK Limit [dBµV/m]	QPK Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]	Meas. Time [s]
1	36.570	28.55	40.00	11.45	21.48	V	-155	1.33	120.000	15.000
1	37.380	30.28	40.00	9.72	21.01	V	-137	1.39	120.000	15.000
1	38.820	34.02	40.00	5.98	20.16	V	-135	1.00	120.000	15.000
1	42.060	28.89	40.00	11.11	18.20	V	-106	1.06	120.000	15.000
1	100.500	23.39	43.50	20.11	16.85	V	195	1.50	120.000	15.000
1	455.970	32.20	46.00	13.80	23.71	H	-24	1.65	120.000	15.000
1	900.990	41.80	46.00	4.20	30.38	H	101	1.45	120.000	15.000
1	902.760	115.13	*	*	30.41	H	-135	1.39	120.000	15.000
1	905.340	29.83	46.00	16.17	30.45	H	72	1.27	120.000	15.000

* Intentional radiator not evaluated.

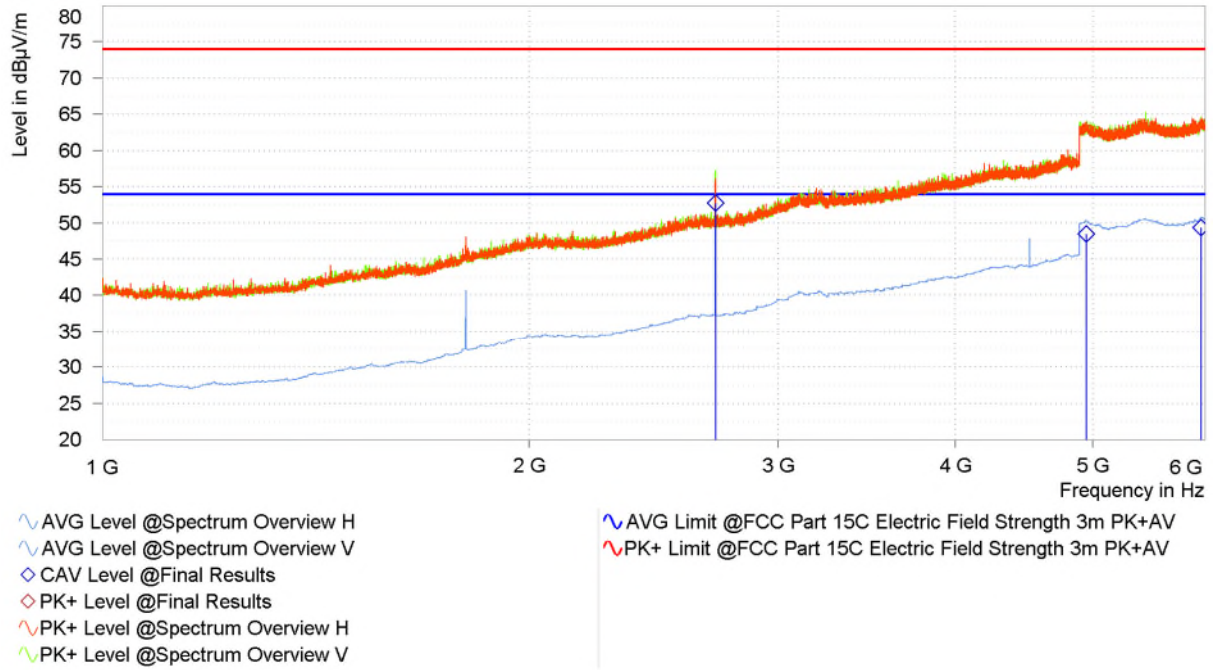


Rg	Fre- quency [MHz]	PK+ Le- vel [dBµV/m]	PK+ Li- mit [dBµV/m]	PK+ Margin [dB]	CAV Le- vel [dBµV/m]	CAV: AVG Limit [dBµV/m]	CAV Margin [dB]	Correc- tion [dB]	Polariza- tion	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]	Meas. Time [s]
1	2708.250	---	74.00	---	52.72	54.00	1.28	35.91	V	-76	3.26	1.000	15.000
1	4947.250	---	74.00	---	48.46	54.00	5.54	42.69	H	45	2.50	1.000	15.000
1	5965.500	---	74.00	---	49.31	54.00	4.69	43.66	V	56	1.59	1.000	15.000

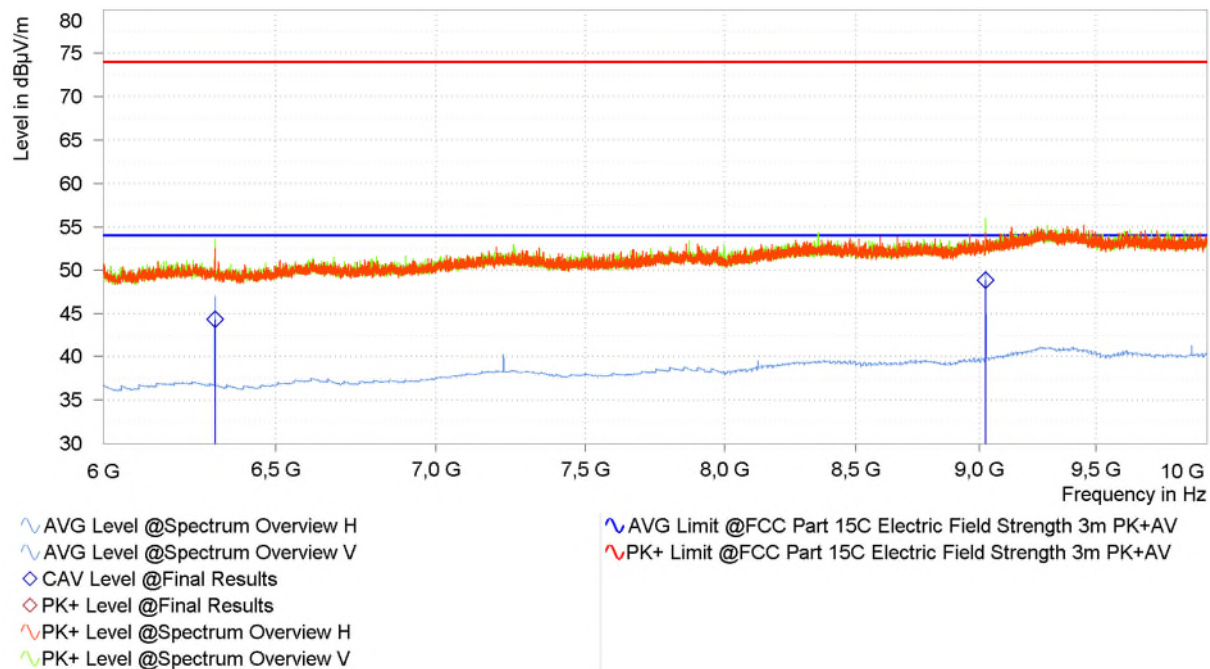


Rg	Fre- quency [MHz]	PK+ Le- vel [dBµV/m]	PK+ Li- mit [dBµV/m]	PK+ Margin [dB]	CAV Le- vel [dBµV/m]	CAV: AVG Limit [dBµV/m]	CAV Margin [dB]	Correc- tion [dB]	Polariza- tion	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]	Meas. Time [s]
1	6319.250	---	74.00	---	44.35	54.00	9.65	34.48	V	23	2.71	1.000	15.000
1	9027.500	---	74.00	---	48.90	54.00	5.10	38.47	V	-37	2.95	1.000	15.000



RFID Frequency: 915.25 MHz

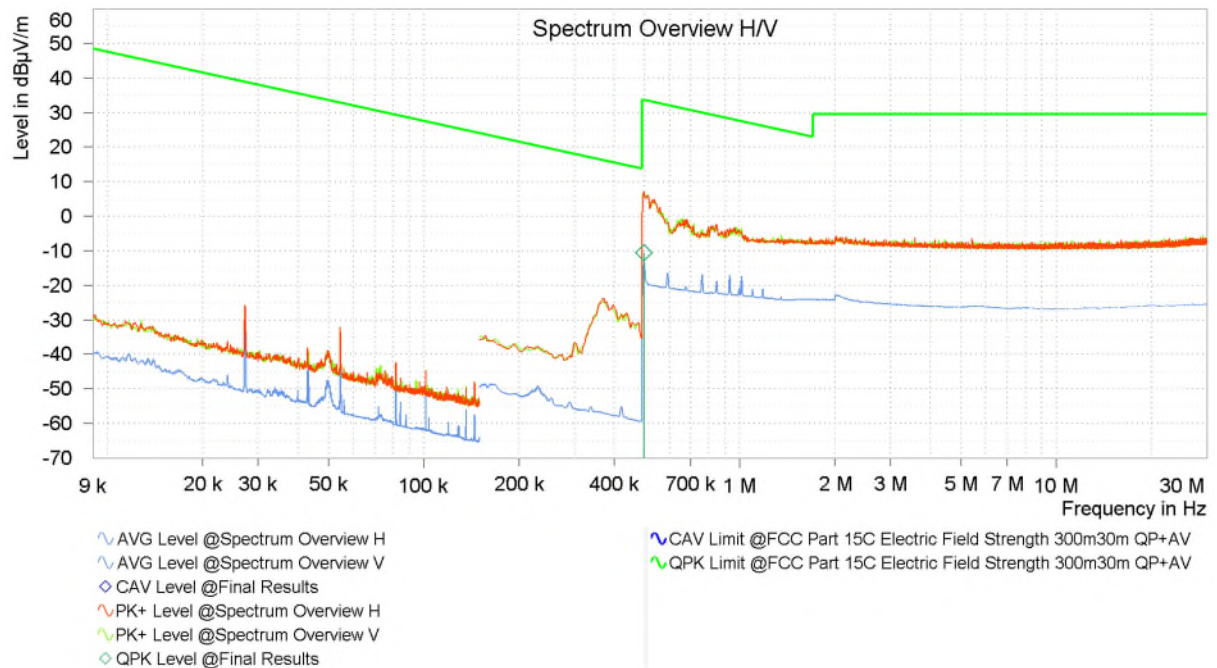


Rg	Frequency [MHz]	QPK Level [dBµV/m]	QPK Limit [dBµV/m]	QPK Margin [dB]	CAV Level [dBµV/m]	CAV Limit [dBµV/m]	CAV Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]	Meas. Time [s]
2	0.497	-10.54	33.69	44.23	---	---	---	-20.71	H	-41	1.00	9.000	1.000

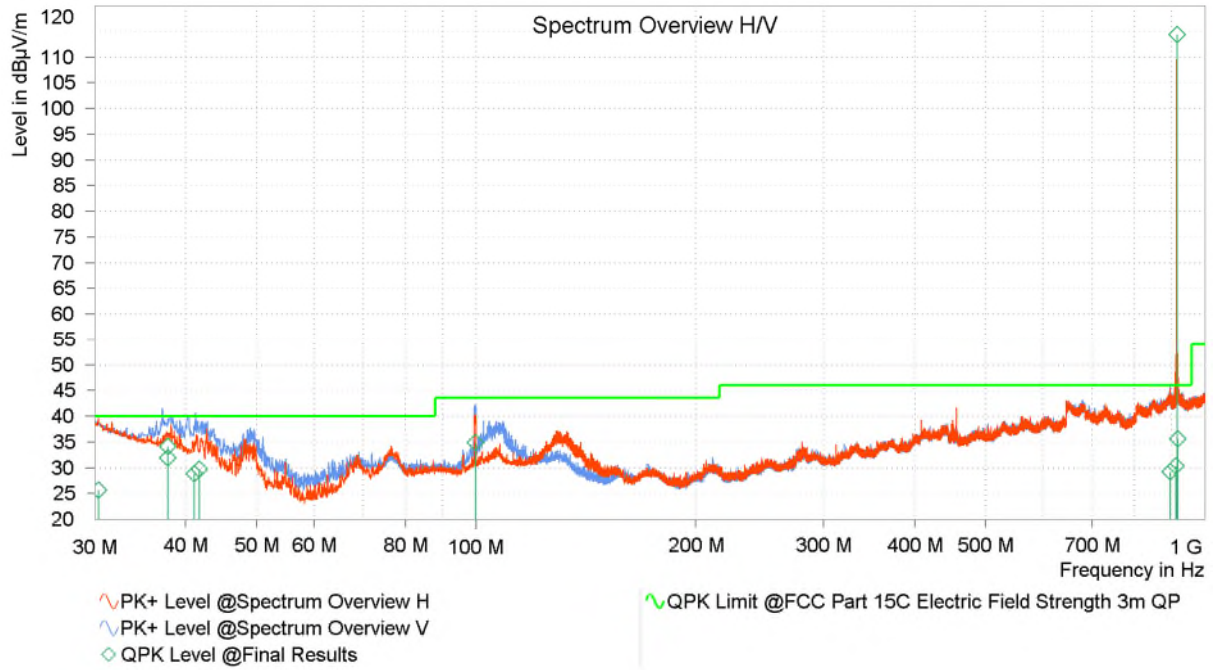

Rg	Frequency [MHz]	QPK Level [dBµV/m]	QPK Limit [dBµV/m]	QPK Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]	Meas. Time [s]
1	30.390	25.69	40.00	14.31	24.99	H	148	2.89	120.000	15.000
1	37.770	31.95	40.00	8.05	20.78	V	-113	1.00	120.000	15.000
1	37.830	34.12	40.00	5.88	20.75	V	200	1.06	120.000	15.000
1	41.100	28.80	40.00	11.20	18.78	V	-23	1.21	120.000	15.000
1	41.760	29.71	40.00	10.29	18.39	V	42	1.00	120.000	15.000
1	99.930	34.80	43.50	8.70	16.81	V	-18	1.15	120.000	15.000
1	896.790	29.26	46.00	16.74	30.32	V	-85	2.37	120.000	15.000
1	911.640	30.35	46.00	15.65	30.54	H	20	1.81	120.000	15.000
1	915.240	114.38	*	*	30.56	H	-136	1.33	120.000	15.000
1	917.280	35.61	46.00	10.39	30.56	H	28	1.63	120.000	15.000

* Intentional radiator not evaluated.

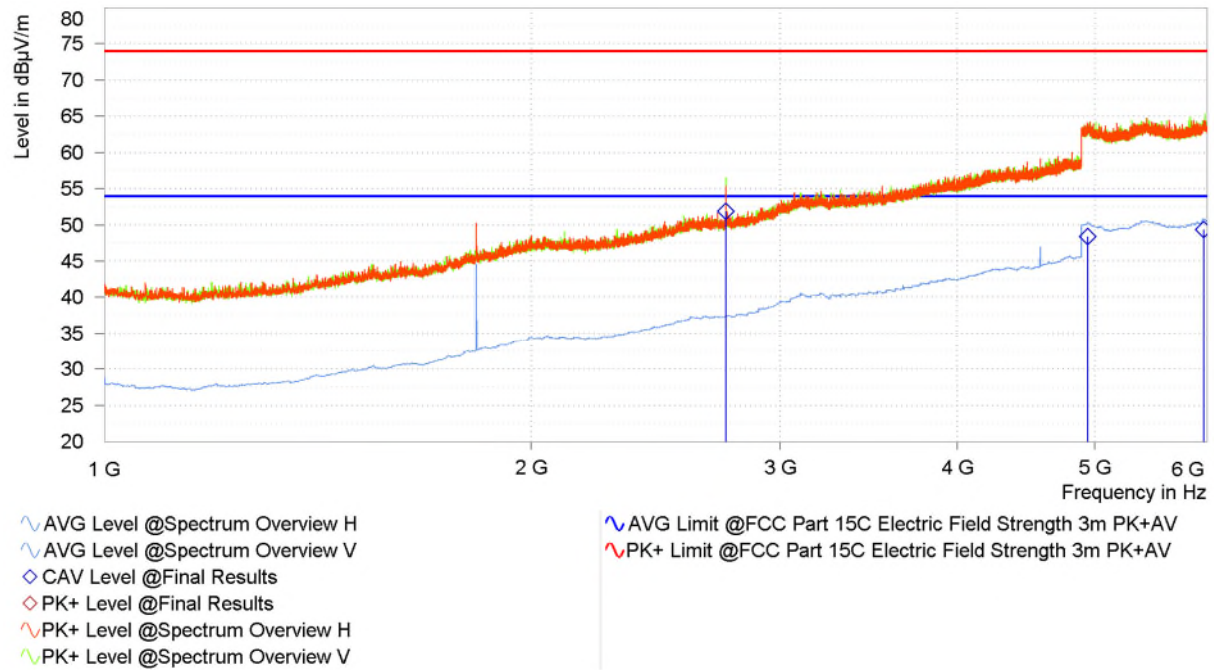

Rg	Fre- quency [MHz]	PK+ Le- vel [dBµV/m]	PK+ Li- mit [dBµV/m]	PK+ Margin [dB]	CAV Le- vel [dBµV/m]	CAV: AVG Limit [dBµV/m]	CAV Margin [dB]	Correc- tion [dB]	Polariza- tion	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]	Meas. Time [s]
1	2745.750	---	74.00	---	51.89	54.00	2.11	35.90	V	-91	1.00	1.000	15.000
1	4945.500	---	74.00	---	48.43	54.00	5.57	42.68	V	54	1.27	1.000	15.000
1	5967.250	---	74.00	---	49.36	54.00	4.64	43.66	V	8	3.50	1.000	15.000

