



SHENZHEN HUAXIA TESTING TECHNOLOGY CO., LTD

102A, 102B, Building 2, Shanghenglang New Industrial Zone, Shanghenglang Community, Dalang Street, Longhua District, Shenzhen, Guangdong, People's Republic of China, 518000

Telephone: +86-755-26648640
Fax: +86-755-26648637
Website: www.cqa-cert.com

Report Template Version: V06
Report Template Revision Date: 2026-01-30

Test Report

Report No. : CQASZ20260500939E -02
Applicant: Shenzhen DO Intelligent Technology Co., Ltd
Address of Applicant: 11th Floor, 3# Building, Guole Tech Park, Lirong Road, Dalang, Longhua District, Shenzhen, China
Equipment Under Test (EUT):
Product: Smart Watch
Model No.: TGW02
Test Model No.: TGW02
Brand Name: IDO
FCC ID: 2AHFT8202
Standards: 47 CFR Part 15, Subpart C
KDB558074 D01 15.247 Meas Guidance v05r02
ANSI C63.10:2020
Date of Receipt: 2026-05-11
Date of Test: 2026-05-11 to 2026-05-19
Date of Issue: 2026-7-24
Test Result : PASS*

*In the configuration tested, the EUT complied with the standards specified above.

Tested By: Lewis Zhou

(Lewis Zhou)

Reviewed By: Timo Lei

(Timo Lei)

Approved By: Jack Ai

(Jack Ai)



1 Version

Revision History Of Report

Report No.	Version	Description	Issue Date
CQASZ20260500939E -02	Rev.01	Initial report	2026-7-24

2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15.203	/	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024	PASS
Conducted Peak Output Power	47 CFR Part 15.247	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024	PASS
20dB Occupied Bandwidth	47 CFR Part 15.247	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024	PASS
Carrier Frequencies Separation	47 CFR Part 15.247	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024	PASS
Hopping Channel Number	47 CFR Part 15.247	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024	PASS
Dwell Time	47 CFR Part 15.247	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15.247	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15.247	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024	PASS
RF Conducted Spurious Emissions	47 CFR Part 15.247	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024	PASS
Radiated Spurious emissions	47 CFR Part 15.209	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15.205/15.209	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024	PASS

Remark:

The tested sample(s) and the sample information are provided by the client.

Tx: In this whole report Tx (or tx) means Transmitter.

Rx: In this whole report Rx (or rx) means Receiver.

RF: In this whole report RF means Radiated Frequency.

CH: In this whole report CH means channel.

Volt: In this whole report Volt means Voltage.

Temp: In this whole report Temp means Temperature.

Humid: In this whole report Humid means humidity.

Press: In this whole report Press means Pressure.

N/A: In this whole report not application

3 Contents

	Page
1 VERSION	2
2 TEST SUMMARY	3
3 CONTENTS	5
4 GENERAL INFORMATION	6
4.1 CLIENT INFORMATION	6
4.2 GENERAL DESCRIPTION OF EUT	6
4.3 ADDITIONAL INSTRUCTIONS	8
4.4 TEST ENVIRONMENT	9
4.5 DESCRIPTION OF SUPPORT UNITS	9
4.6 TEST CONFIGURATION	9
4.7 STATEMENT OF THE MEASUREMENT UNCERTAINTY	10
4.8 TEST LOCATION	11
4.9 TEST FACILITY	11
4.10 ABNORMALITIES FROM STANDARD CONDITIONS	11
4.11 OTHER INFORMATION REQUESTED BY THE CUSTOMER	11
4.12 EQUIPMENT LIST	12
5 TEST RESULTS AND MEASUREMENT DATA	13
5.1 ANTENNA REQUIREMENT	13
5.2 CONDUCTED EMISSIONS	14
5.3 CONDUCTED PEAK OUTPUT POWER	20
5.4 20dB OCCUPIED BANDWIDTH	29
5.5 CARRIER FREQUENCIES SEPARATION	34
5.6 HOPPING CHANNEL NUMBER	38
5.7 DWELL TIME	41
5.8 BAND-EDGE FOR RF CONDUCTED EMISSIONS	50
5.9 SPURIOUS RF CONDUCTED EMISSIONS	56
5.10 OTHER REQUIREMENTS FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM	67
5.11 RADIATED SPURIOUS EMISSION & RESTRICTED BANDS	69
5.11.1 Radiated Emission below 1GHz	72
5.11.2 Transmitter Emission above 1GHz	76
6 PHOTOGRAPHS - EUT TEST SETUP	79
6.1 RADIATED EMISSION	79
6.2 CONDUCTED EMISSION	80
6.3 RF CONDUCTED MEASUREMENT	81
7 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS	82

4 General Information

4.1 Client Information

Applicant:	Shenzhen DO Intelligent Technology Co., Ltd
Address of Applicant:	11th Floor, 3# Building, Guole Tech Park, Lirong Road, Dalang, Longhua District, Shenzhen, China
Manufacturer:	Shenzhen DO Intelligent Technology Co., Ltd
Address of Manufacturer:	11th Floor, 3# Building, Guole Tech Park, Lirong Road, Dalang, Longhua District, Shenzhen, China
Factory:	Shenzhen DO Intelligent Technology Co., Ltd
Address of Factory:	11th Floor, 3# Building, Guole Tech Park, Lirong Road, Dalang, Longhua District, Shenzhen, China

4.2 General Description of EUT

Product Name:	Smart Watch
Model No.:	TGW02
Test Model No.:	TGW02
Trade Mark:	IDO
Software Version:	V1.01.06
Hardware Version:	V1.2
Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	V5.3
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Modulation Type:	GFSK, $\pi/4$ DQPSK, 8DPSK
Transfer Rate:	1Mbps/2Mbps/3Mbps
Number of Channel:	79
Hopping Channel Type:	Adaptive Frequency Hopping systems
Product Type:	☐ Mobile ☒ Portable ☐ Fix Location
Test Software of EUT:	SiFli_RF_Tool_v1.1.6
Antenna Type:	FPC antenna
Antenna Gain:	-4.28dBi
Power Supply:	Battery supplier (ZHONGSHAN ZHONGWANGDE NEW ENERGY TECHNOLOGY CO.,LTD.) Li-ion battery: DC 3.85V 350mAh, Charge by DC 5V for adapter Battery supplier (SHENZHEN SUNHE ENERGY CO., LTD) Li-ion battery: DC 3.85V 350mAh, Charge by DC 5V for adapter
Simultaneous Transmission	☐ Simultaneous TX is supported and evaluated in this report. ☒ Simultaneous TX is not supported.

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	20	2422MHz	40	2442MHz	60	2462MHz
1	2403MHz	21	2423MHz	41	2443MHz	61	2463MHz
2	2404MHz	22	2424MHz	42	2444MHz	62	2464MHz
3	2405MHz	23	2425MHz	43	2445MHz	63	2465MHz
4	2406MHz	24	2426MHz	44	2446MHz	64	2466MHz
5	2407MHz	25	2427MHz	45	2447MHz	65	2467MHz
6	2408MHz	26	2428MHz	46	2448MHz	66	2468MHz
7	2409MHz	27	2429MHz	47	2449MHz	67	2469MHz
8	2410MHz	28	2430MHz	48	2450MHz	68	2470MHz
9	2411MHz	29	2431MHz	49	2451MHz	69	2471MHz
10	2412MHz	30	2432MHz	50	2452MHz	70	2472MHz
11	2413MHz	31	2433MHz	51	2453MHz	71	2473MHz
12	2414MHz	32	2434MHz	52	2454MHz	72	2474MHz
13	2415MHz	33	2435MHz	53	2455MHz	73	2475MHz
14	2416MHz	34	2436MHz	54	2456MHz	74	2476MHz
15	2417MHz	35	2437MHz	55	2457MHz	75	2477MHz
16	2418MHz	36	2438MHz	56	2458MHz	76	2478MHz
17	2419MHz	37	2439MHz	57	2459MHz	77	2479MHz
18	2420MHz	38	2440MHz	58	2460MHz	78	2480MHz
19	2421MHz	39	2441MHz	59	2461MHz		

Note:


In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel	2402MHz
The Middle channel	2441MHz
The Highest channel	2480MHz

4.3 Additional Instructions

EUT Test Software Settings:		
Mode:	☒ Special software is used. ☐ Through engineering command into the engineering mode. engineering command: ***3646633***	
EUT Power level:	Class10(Power level is built-in set parameters and cannot be changed and selected)	
Use test software to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT.		
Mode	Channel	Frequency(MHz)
DH1/DH3/DH5	CH0	2402
	CH39	2441
	CH78	2480
2DH1/2DH3/2DH5	CH0	2402
	CH39	2441
	CH78	2480
3DH1/3DH3/3DH5	CH0	2402
	CH39	2441
	CH78	2480

Run Software:

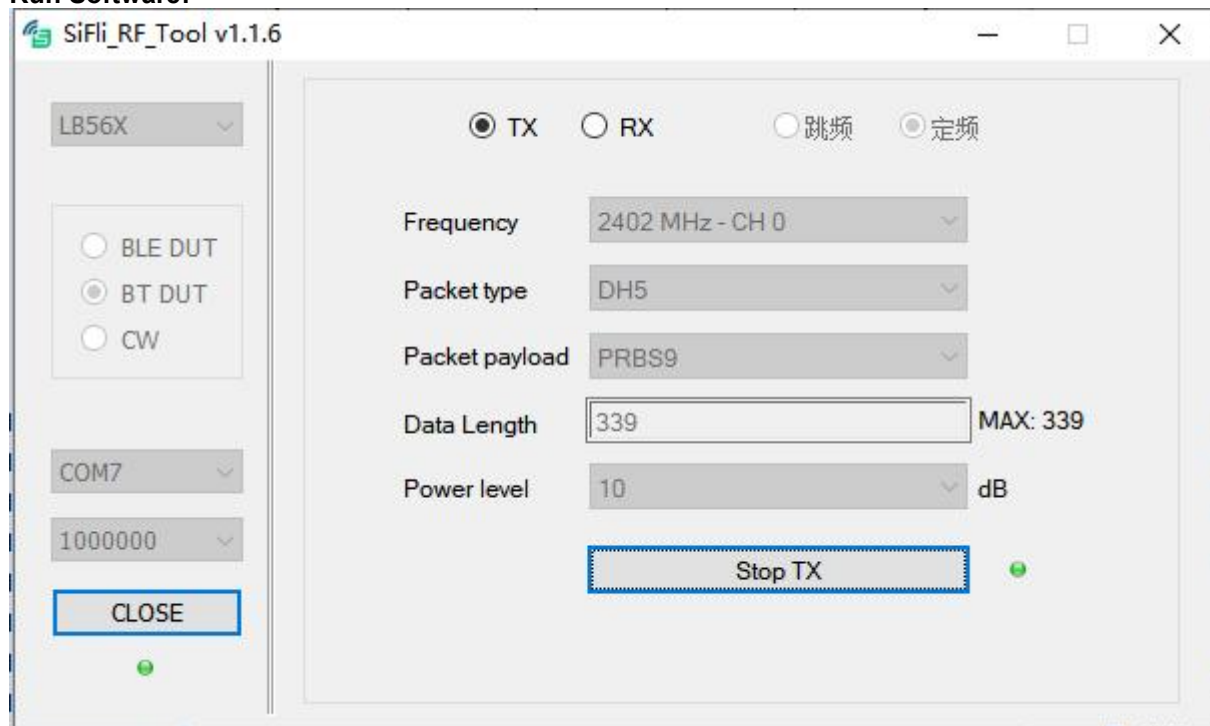

4.4 Test Environment


Operating Environment:	
Temperature:	25 °C
Humidity:	54% RH
Atmospheric Pressure:	1009mbar
Test Mode:	Use test software to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT.

4.5 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.	Remark	Supplied
Adapter	MI	/	/	CQA

4.6 Test configuration

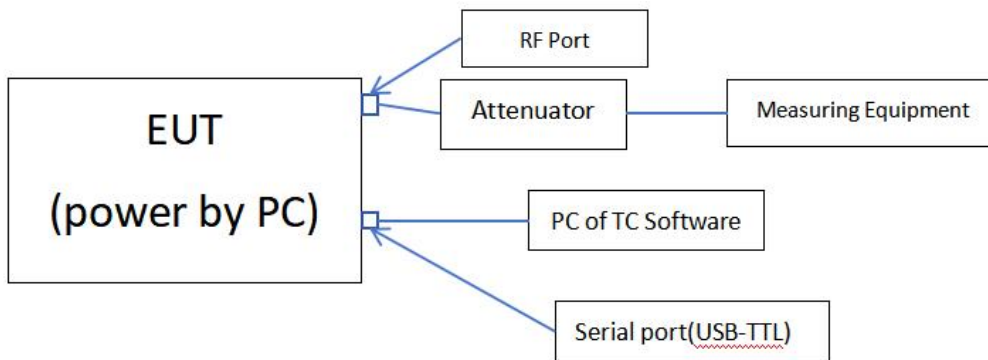

4.7 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the **SHENZHEN HUAXIA TESTING TECHNOLOGY CO., LTD** quality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CQA laboratory is reported:

No.	Item	Uncertainty
1	Radiated Emission (Below 1GHz)	5.12dB
2	Radiated Emission (Above 1GHz)	4.60dB
3	Conducted Disturbance (0.15~30MHz)	3.34dB
4	Radio Frequency	3×10^{-8}
5	Duty cycle	0.6 %
6	Occupied Bandwidth	1.1%
7	RF conducted power	0.86dB
8	RF power density	0.74
9	Conducted Spurious emissions	0.86dB
10	Temperature test	0.8℃
11	Humidity test	2.0%
12	Supply voltages	0.5 %
13	Frequency Error	5.5 Hz

4.8 Test Location

All tests were performed at:

SHENZHEN HUAXIA TESTING TECHNOLOGY CO., LTD

SHENZHEN HUAXIA TESTING TECHNOLOGY CO., LTD 102A, 102B, Building 2, Shanghenglang New Industrial Zone, Shanghenglang Community, Dalang Street, Longhua District, Shenzhen, Guangdong, People's Republic of China, 518000

4.9 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

IC Registration No.: 22984-1

The 3m Semi-anechoic chamber of SHENZHEN HUAXIA TESTING TECHNOLOGY CO., LTD has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing

The test facility is recognized, certified, or accredited by the following organizations:

• CNAS (No. CNAS L5785)

CNAS has accredited SHENZHEN HUAXIA TESTING TECHNOLOGY CO., LTD Shenzhen Branch
EMC

Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

• A2LA (Certificate No. 4742.01)

SHENZHEN HUAXIA TESTING TECHNOLOGY CO., LTD, Shenzhen EMC Laboratory is accredited by the

American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

• FCC Registration No.: 522263

SHENZHEN HUAXIA TESTING TECHNOLOGY CO., LTD, Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

4.10 Abnormalities from Standard Conditions

None.

4.11 Other Information Requested by the Customer

None.

4.12 Equipment List

Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR7	CQA-005	2025/9/1	2026/8/31
Spectrum analyzer	R&S	FSU26	CQA-038	2025/9/1	2026/8/31
Spectrum analyzer	R&S	FSU40	CQA-075	2025/9/1	2026/8/31
Preamplifier	MITEQ	AFS4-00010300-18-10P-4	CQA-035	2025/9/1	2026/8/31
Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2025/9/1	2026/8/31
Preamplifier	EMCI	EMC184055SE	CQA-089	2025/9/1	2026/8/31
Loop antenna	Schwarzbeck	FMZB1516	CQA-060	2023/9/8	2026/9/7
Bilog Antenna	R&S	HL562	CQA-011	2023/11/01	2026/10/31
Horn Antenna	R&S	HF906	CQA-012	2023/11/01	2026/10/31
Horn Antenna	Schwarzbeck	BBHA 9170	CQA-088	2023/9/7	2026/9/6
Coaxial Cable (Above 1GHz)	CQA	N/A	C007	2025/9/1	2026/8/31
Coaxial Cable (Below 1GHz)	CQA	N/A	C013	2025/9/1	2026/8/31
Antenna Connector	CQA	RFC-01	CQA-080	2025/9/1	2026/8/31
RF cable(9KHz~40GHz)	CQA	RF-01	CQA-079	2025/9/1	2026/8/31
Power meter	R&S	NRVD	CQA-029	2025/9/1	2026/8/31
Power divider	MIDWEST	PWD-2533-02-SMA-79	CQA-067	2025/9/1	2026/8/31
EMI Test Receiver	R&S	ESR7	CQA-005	2025/9/1	2026/8/31
LISN	R&S	ENV216	CQA-003	2025/9/1	2026/8/31
Coaxial cable	CQA	N/A	CQA-C009	2025/9/1	2026/8/31
DC power	KEYSIGHT	E3631A	CQA-028	2025/9/1	2026/8/31

Test software:


	Manufacturer	Software brand	Software version
Radiated Emissions test software	Tonscend	JS1120-3	Version:8
Conducted Emissions test software	Audix	e3	Version:9
RF Conducted test software	Audix	e3	V3.5.39

Note:

The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

5 Test results and Measurement Data

5.1 Antenna Requirement

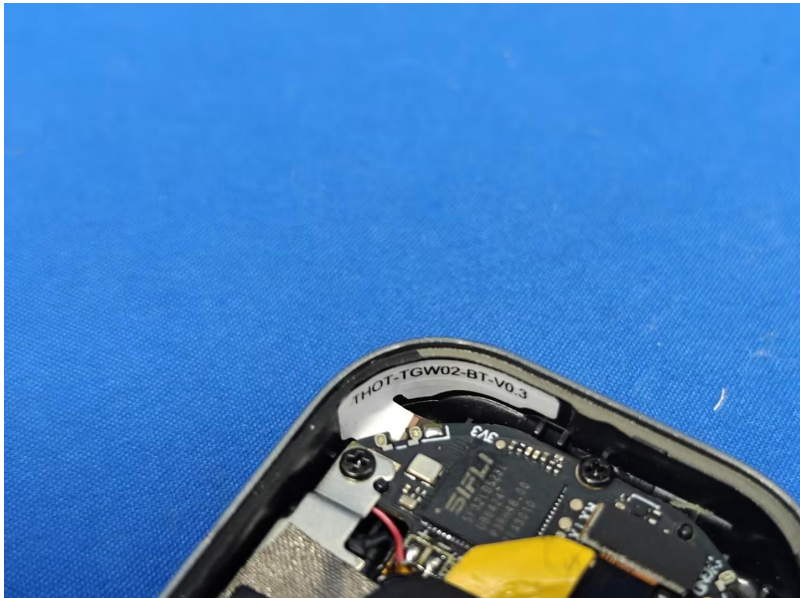
Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)
	15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
EUT Antenna:	
	The antenna is FPC antenna. The connection/connection type between the antenna to the EUT's antenna port is: unique coupling This is either permanently attachment or a unique coupling that satisfies the requirement.

Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of data type at the lowest, middle, high channel.
Final Test Mode:	Through Pre-scan, find the DH5 of data type and GFSK modulation at the lowest channel is the worst case. Only the worst case is recorded in the report.
Test Voltage:	AC 120V/60Hz
Test Results:	Pass

Measurement Data

SHENZHEN SUNHE ENERGY CO., LTD

Live line:

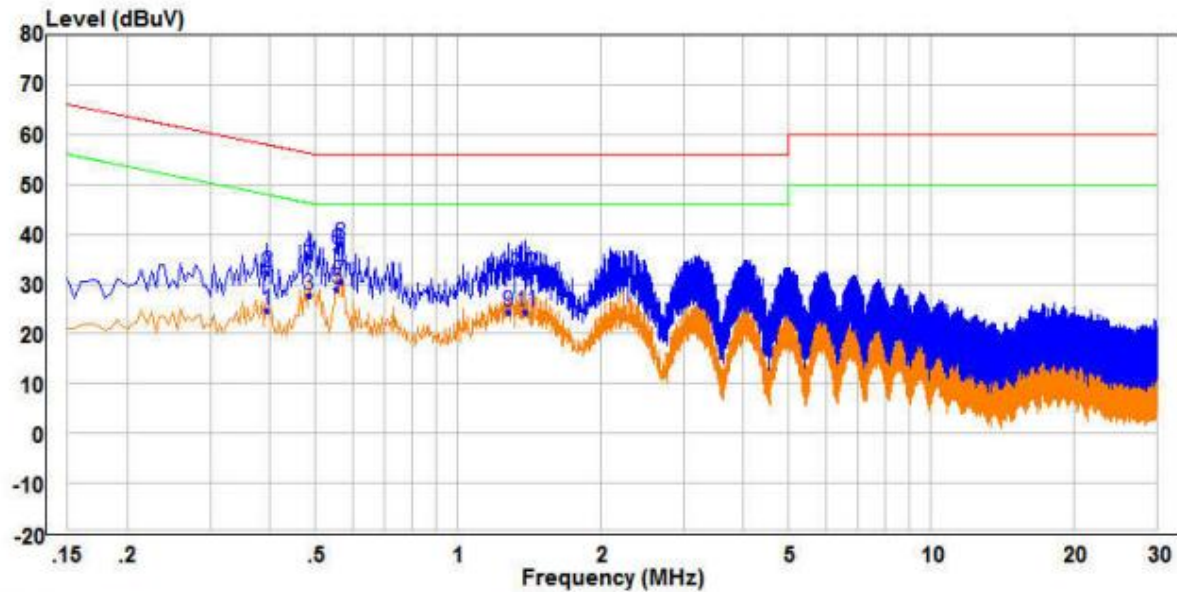


	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.395	15.20	9.60	24.80	47.96	-23.16	Average	Line
2	0.395	22.60	9.60	32.20	57.96	-25.76	QP	Line
3	0.485	18.11	9.69	27.80	46.25	-18.45	Average	Line
4	0.485	25.82	9.69	35.51	56.25	-20.74	QP	Line
5	0.555	19.10	9.76	28.86	46.00	-17.14	Average	Line
6	0.555	27.06	9.76	36.82	56.00	-19.18	QP	Line
7 PP	0.565	20.65	9.77	30.42	46.00	-15.58	Average	Line
8 QP	0.565	28.31	9.77	38.08	56.00	-17.92	QP	Line
9	1.280	14.14	10.39	24.53	46.00	-21.47	Average	Line
10	1.280	21.54	10.39	31.93	56.00	-24.07	QP	Line
11	1.390	13.78	10.62	24.40	46.00	-21.60	Average	Line
12	1.390	21.37	10.62	31.99	56.00	-24.01	QP	Line

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral line:

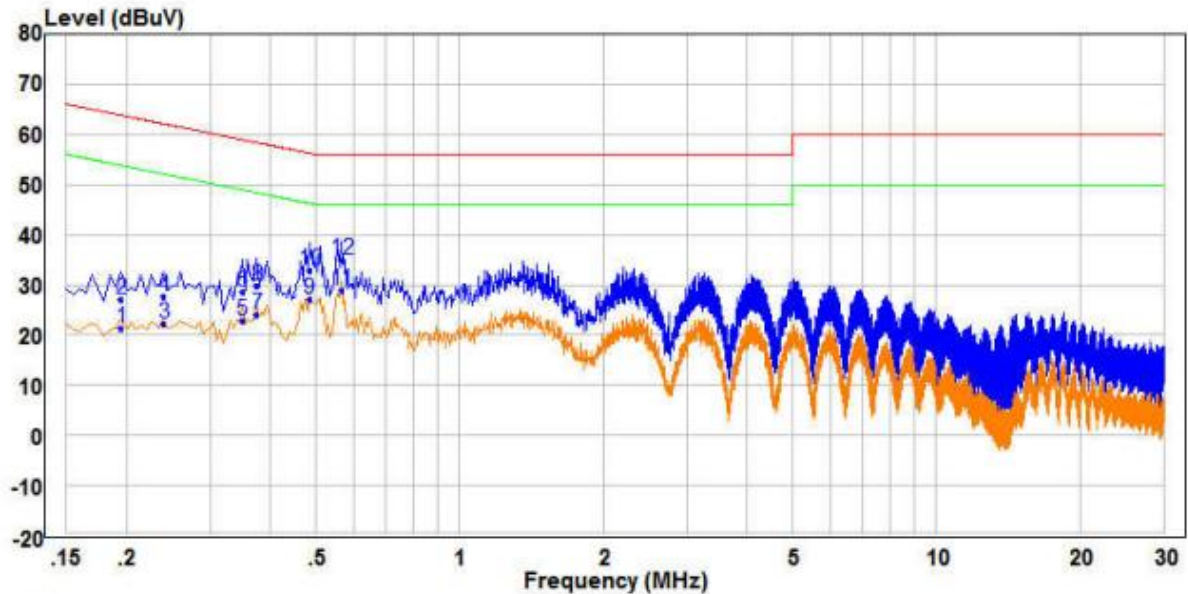


	Freq	Read	Factor	Level	Limit	Over	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.195	11.58	9.62	21.20	53.82	-32.62	Average	Neutral
2	0.195	17.44	9.62	27.06	63.82	-36.76	QP	Neutral
3	0.240	12.65	9.55	22.20	52.10	-29.90	Average	Neutral
4	0.240	18.21	9.55	27.76	62.10	-34.34	QP	Neutral
5	0.350	13.37	9.55	22.92	48.96	-26.04	Average	Neutral
6	0.350	18.99	9.55	28.54	58.96	-30.42	QP	Neutral
7	0.375	14.53	9.58	24.11	48.39	-24.28	Average	Neutral
8	0.375	20.30	9.58	29.88	58.39	-28.51	QP	Neutral
9	0.485	17.40	9.69	27.09	46.25	-19.16	Average	Neutral
10	0.485	23.07	9.69	32.76	56.25	-23.49	QP	Neutral
11 PP	0.565	19.08	9.77	28.85	46.00	-17.15	Average	Neutral
12 QP	0.565	25.14	9.77	34.91	56.00	-21.09	QP	Neutral

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

ZHONGSHAN ZHONGWANGDE NEW ENERGY TECHNOLOGY CO.,LTD.

Live line:

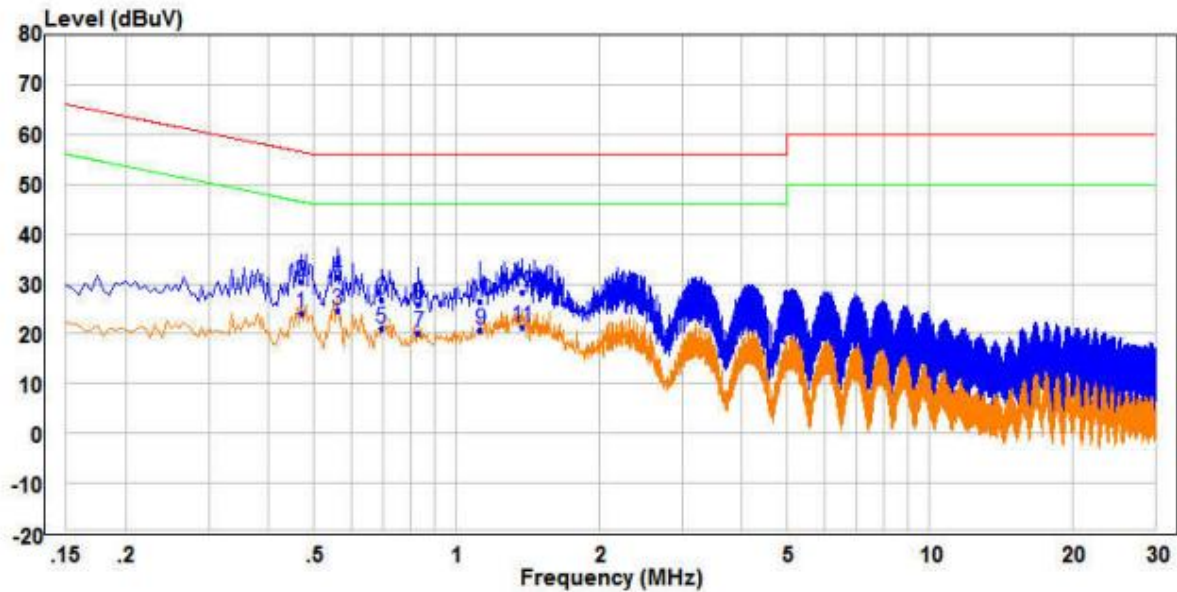


		Read		Limit	Over		
	Freq	Level	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	Pol/Phase
1	0.470	14.31	9.67	23.98	46.51	-22.53	Average
2	0.470	20.80	9.67	30.47	56.51	-26.04	QP
3 PP	0.560	14.94	9.76	24.70	46.00	-21.30	Average
4 QP	0.560	21.53	9.76	31.29	56.00	-24.71	QP
5	0.695	11.18	9.90	21.08	46.00	-24.92	Average
6	0.695	16.99	9.90	26.89	56.00	-29.11	QP
7	0.830	10.25	9.81	20.06	46.00	-25.94	Average
8	0.830	15.96	9.81	25.77	56.00	-30.23	QP
9	1.125	10.68	10.03	20.71	46.00	-25.29	Average
10	1.125	16.49	10.03	26.52	56.00	-29.48	QP
11	1.375	10.84	10.59	21.43	46.00	-24.57	Average
12	1.375	17.74	10.59	28.33	56.00	-27.67	QP

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral line:

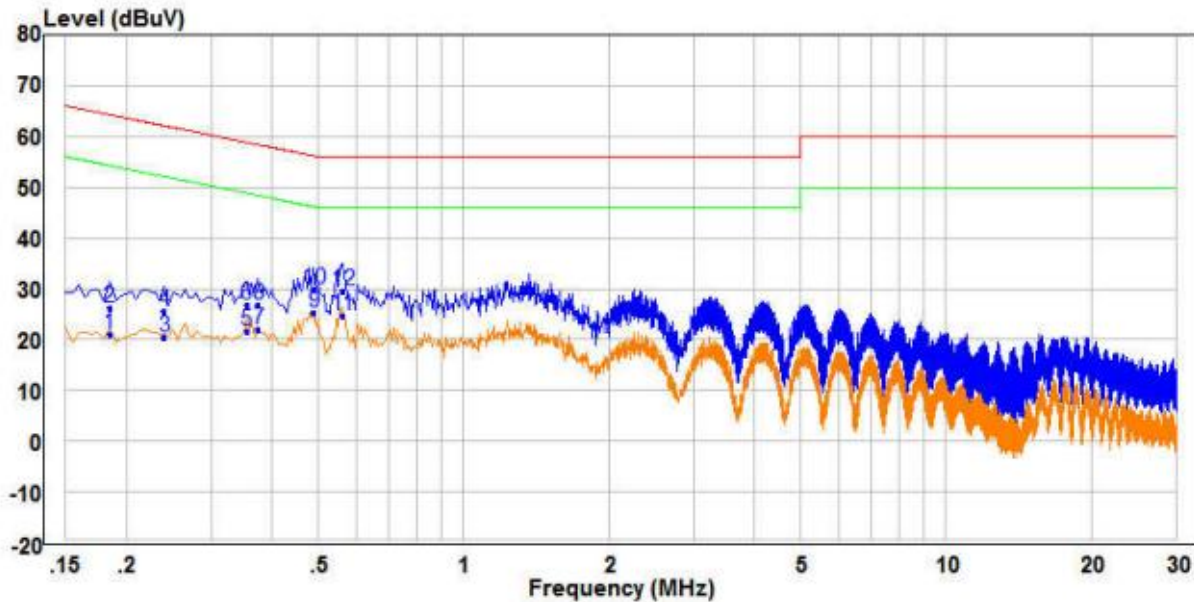


	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.185	11.53	9.63	21.16	54.26	-33.10	Average	Neutral
2	0.185	16.69	9.63	26.32	64.26	-37.94	QP	Neutral
3	0.240	10.80	9.55	20.35	52.10	-31.75	Average	Neutral
4	0.240	15.91	9.55	25.46	62.10	-36.64	QP	Neutral
5	0.355	12.11	9.55	21.66	48.84	-27.18	Average	Neutral
6	0.355	17.41	9.55	26.96	58.84	-31.88	QP	Neutral
7	0.375	12.33	9.58	21.91	48.39	-26.48	Average	Neutral
8	0.375	17.37	9.58	26.95	58.39	-31.44	QP	Neutral
9 PP	0.490	15.60	9.69	25.29	46.17	-20.88	Average	Neutral
10 QP	0.490	20.13	9.69	29.82	56.17	-26.35	QP	Neutral
11	0.560	14.97	9.76	24.73	46.00	-21.27	Average	Neutral
12	0.560	19.80	9.76	29.56	56.00	-26.44	QP	Neutral

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

5.3 Conducted Peak Output Power


Test Requirement:	47 CFR Part 15C Section 15.247 (b)(1)
Test Method:	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024
Test Setup:	Setup for Power meter measurement method  <pre> graph LR EUT[EUT] --- PM[Power Meter] </pre> Setup for Spectrum analyser measurement method  <pre> graph LR EUT[EUT] --- Att[Attenuator] --- SA[Spectrum Analyzer] </pre> <i>Remark: Offset=Cable loss+ attenuation factor.</i>
Limit:	21dBm
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Only the worst case is recorded in the report.
Test Results:	Pass

Operated Mode for Worst Duty Cycle:				
Test Mode	On time [Ton] (ms)	Period [Ttotal] ms)	Duty Cycle(%)	Average correction factor(dB)
GFSK	2.91	3.75	77.60	1.10
$\pi/4$ DQPSK	2.92	3.75	77.87	1.09
8DPSK	2.92	3.75	77.87	1.09

Remark:


- 1) Duty cycle= On Time/ Period;
- 2) Duty Cycle factor = $10 * \log(1/ \text{Duty cycle})$;

Test Graph_GFSK Duty Cycle:

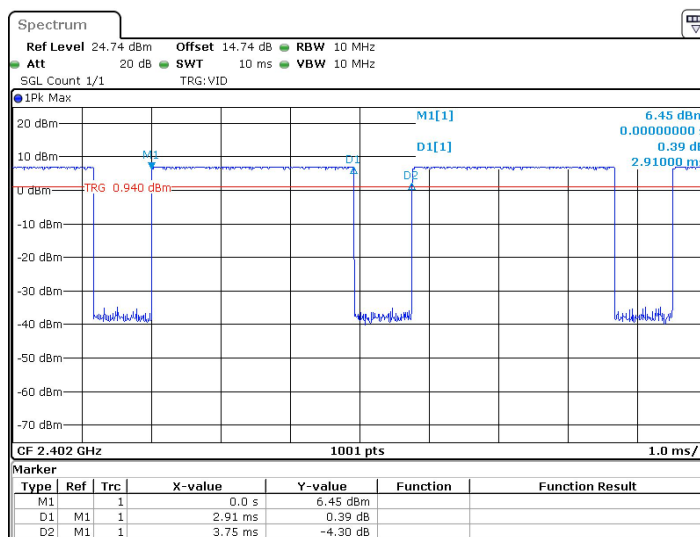


Date: 19.MAY.2026 17:11:10

Test Graph_π/4DQPSK Duty Cycle:

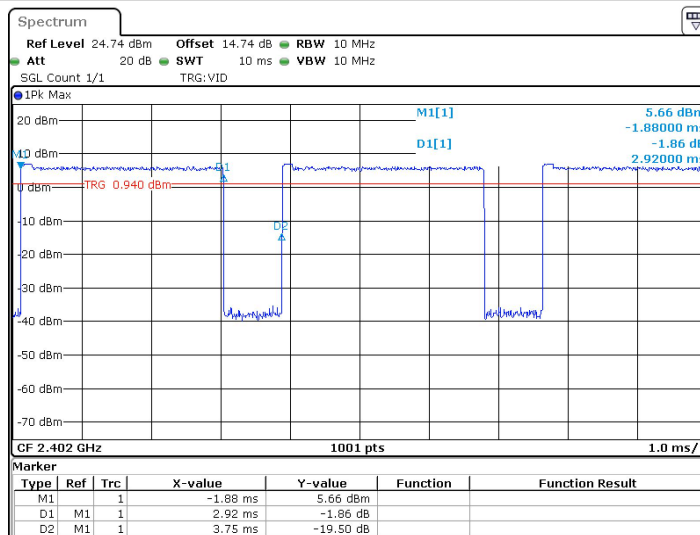

Date: 19.MAY.2026 17:14:48

Test Graph_8DPSK Duty Cycle:

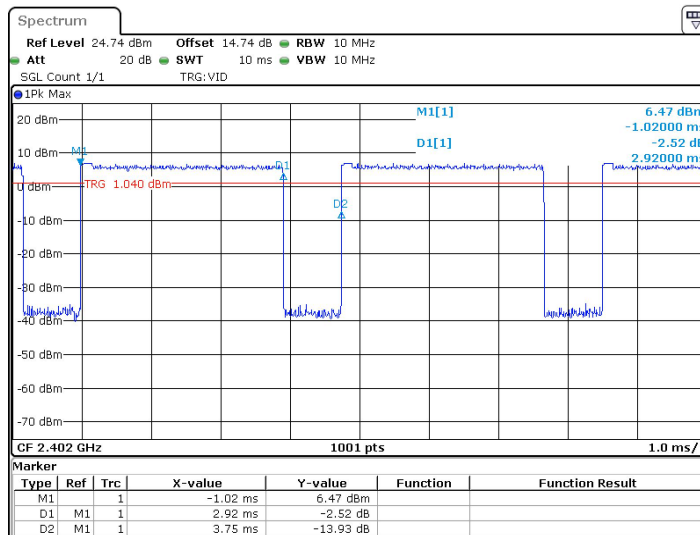



Date: 19.MAY.2026 17:32:06

Measurement Data

GFSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	6.99	21.00	Pass
Middle	7.84	21.00	Pass
Highest	7.09	21.00	Pass
$\pi/4$ DQPSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	6.67	21.00	Pass
Middle	7.32	21.00	Pass
Highest	6.64	21.00	Pass
8DPSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	6.80	21.00	Pass
Middle	7.53	21.00	Pass
Highest	6.86	21.00	Pass


Test plot as follows:

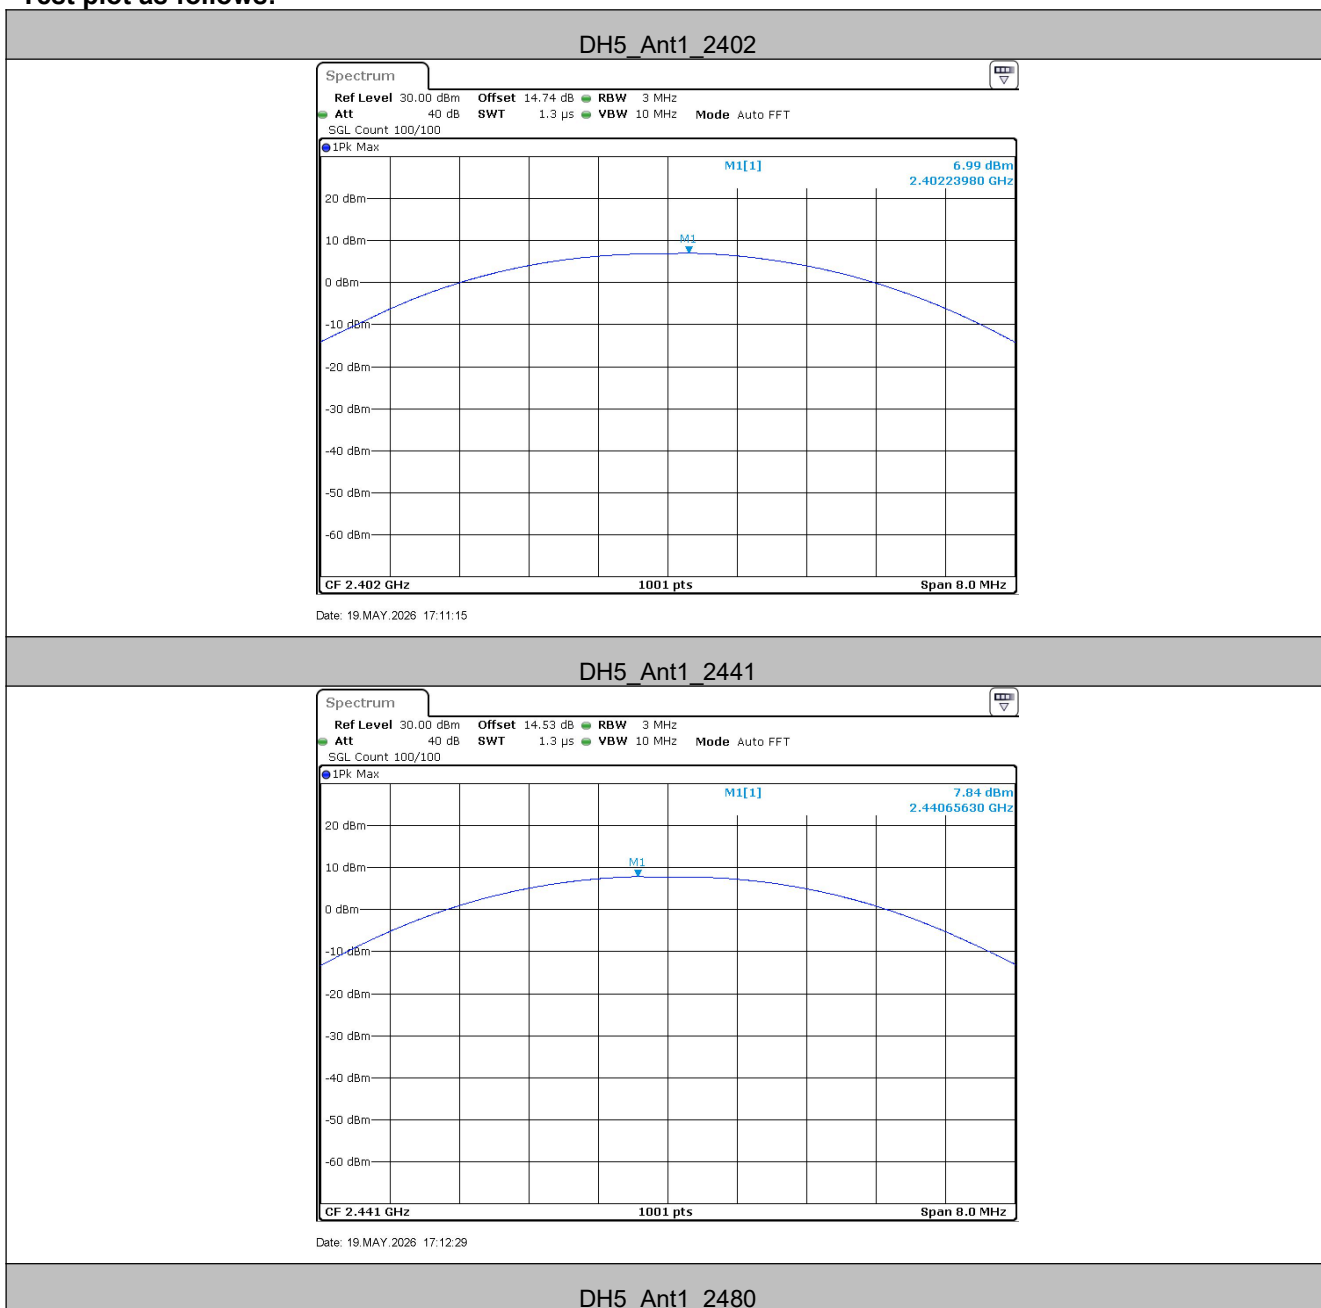

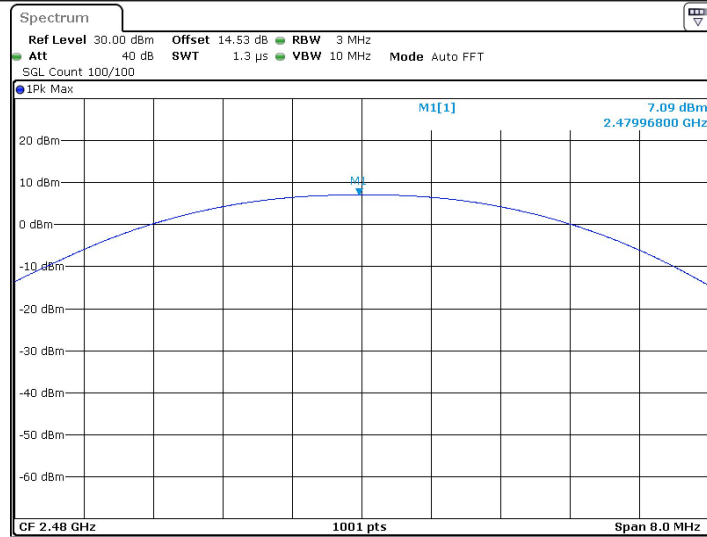


Date: 19.MAY.2026 17:14:04

2DH5_Ant1_2402

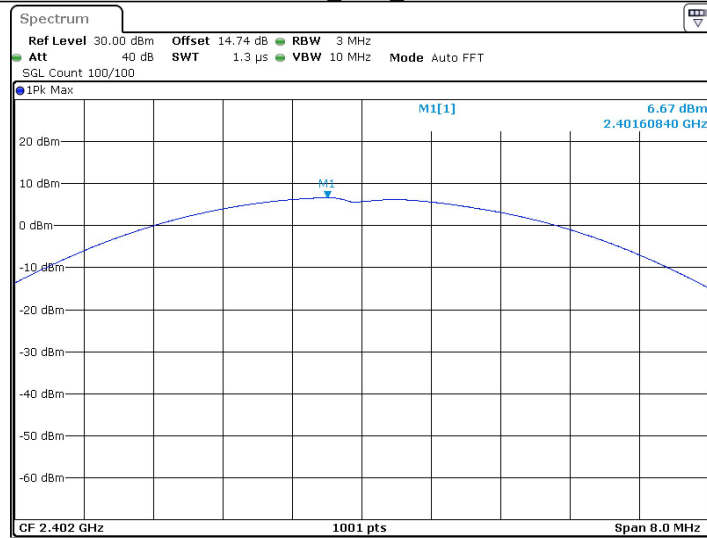


Date: 19.MAY.2026 17:14:53

2DH5_Ant1_2441

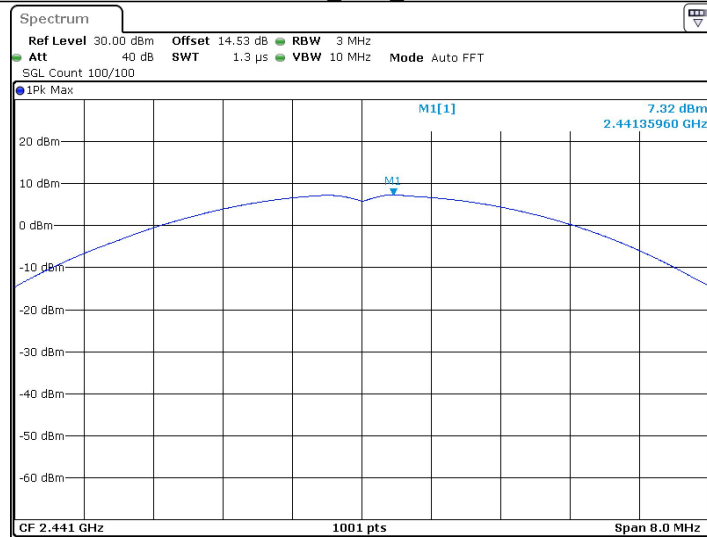


Date: 19.MAY.2026 17:16:11

2DH5_Ant1_2480

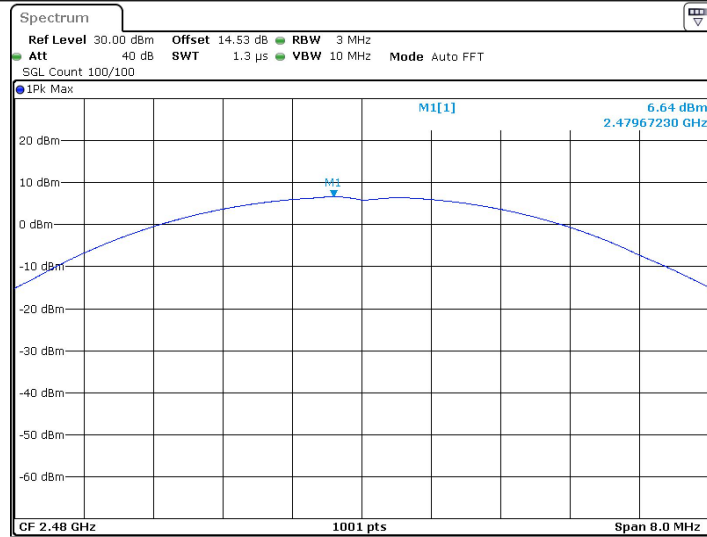


Date: 19.MAY.2026 17:16:42

3DH5_Ant1_2402

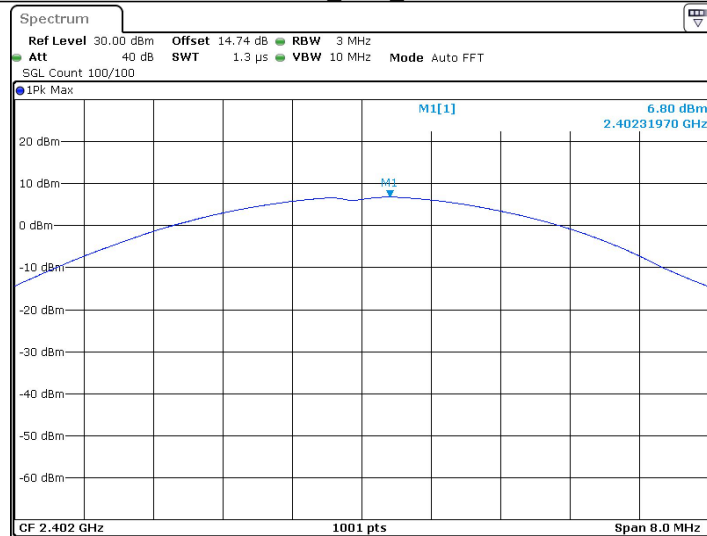


Date: 19.MAY.2026 17:32:11

3DH5_Ant1_2441

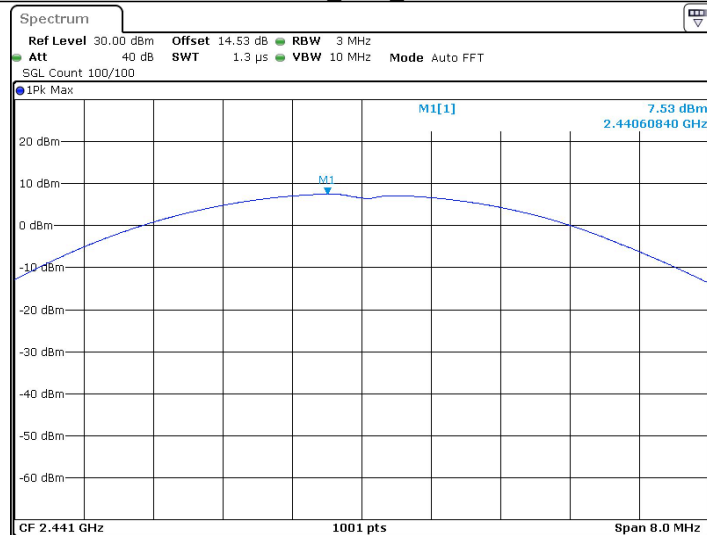


Date: 19.MAY.2026 17:33:09

3DH5_Ant1_2480

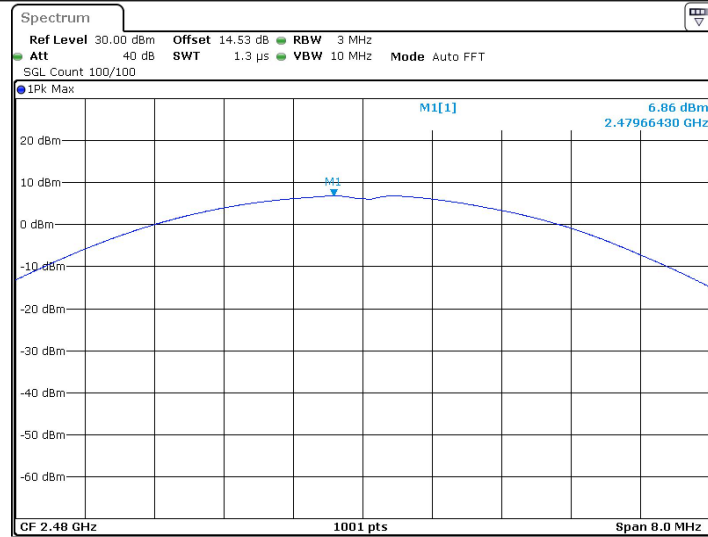

Date: 19.MAY.2026 17:34:26

5.4 20dB Occupied Bandwidth

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)
Test Method:	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024
Test Setup:	 Remark: Offset=Cable loss+ attenuation factor.
Limit:	NA
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Only the worst case is recorded in the report.
Test Results:	Pass

Measurement Data

Test channel	20dB Occupy Bandwidth (MHz)		
	GFSK	$\pi/4$ DQPSK	8DPSK
Lowest	0.95	1.18	1.20
Middle	0.95	1.18	1.20
Highest	0.86	1.18	1.20