

Appendix B

BLE

Device Under Test Properties

Model	Dimensions [mm]
45.0 x 45.0 x 12.0	

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, Head Simulating Liquid	FRONT, 10.00	ISM 2.4 GHz Band	Bluetooth, 10670-AAA	2480.000, 39	7.24	1.85	40.2

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) – 2173	HBBL-600-10000 Liquid	EX3DV4 – SN7812, 2026-01-19	DAE4ip Sn1847, 2026-03-17

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	108.0 x 108.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-08-25, 21:35	2026-08-25, 21:41
psSAR1g [W/Kg]	0.036	0.034
psSAR10g [W/Kg]	0.019	0.017
Power Drift [dB]	0.03	-0.03
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		64.7
Dist 3dB Peak [mm]		8.7

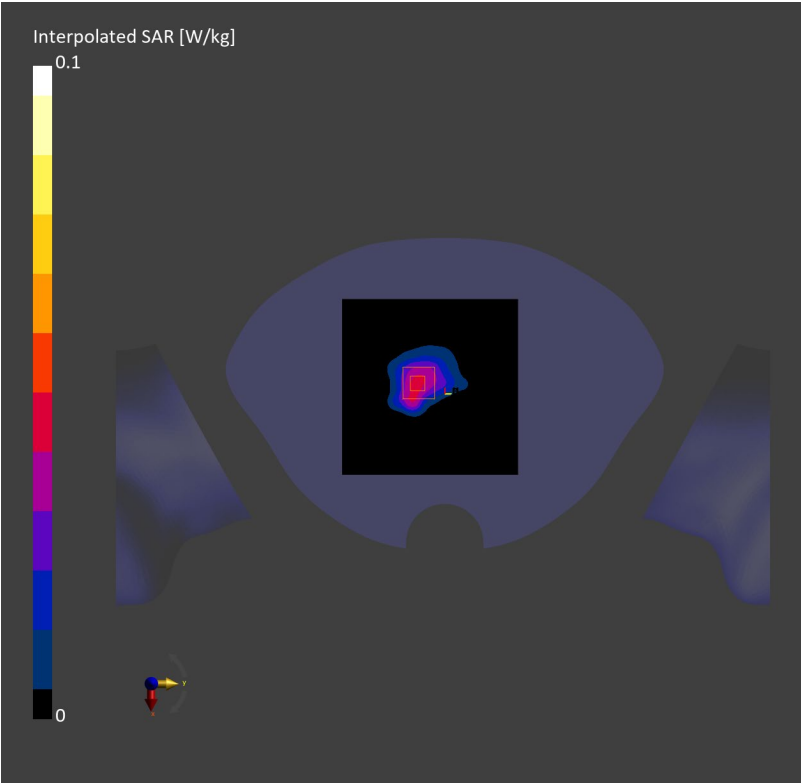

Device Under Test Properties

Model	Dimensions [mm]
45.0 x 45.0 x 12.0	

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, Head Simulating Liquid	BACK, 0.00	ISM 2.4 GHz Band	Bluetooth, 10670-AAA	2480.000, 39	7.24	1.85	40.2

Hardware Setup

Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) – 2173	HBBL-600-10000 Liquid	EX3DV4 – SN7812, 2026-01-19	DAE4ip Sn1847, 2026-03-17

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 96.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2026-08-25, 21:48	2026-08-25, 21:54
psSAR1g [W/Kg]	0.177	0.170
psSAR10g [W/Kg]	0.082	0.078
Power Drift [dB]	-0.08	-0.14
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		47.9
Dist 3dB Peak [mm]		7.3

