


Test_Mode	GFSK Transmitting	Test_Frequency	2480Mhz
Remark	/	Test_Date	2026/1/10
Remark	R		

Test Graph

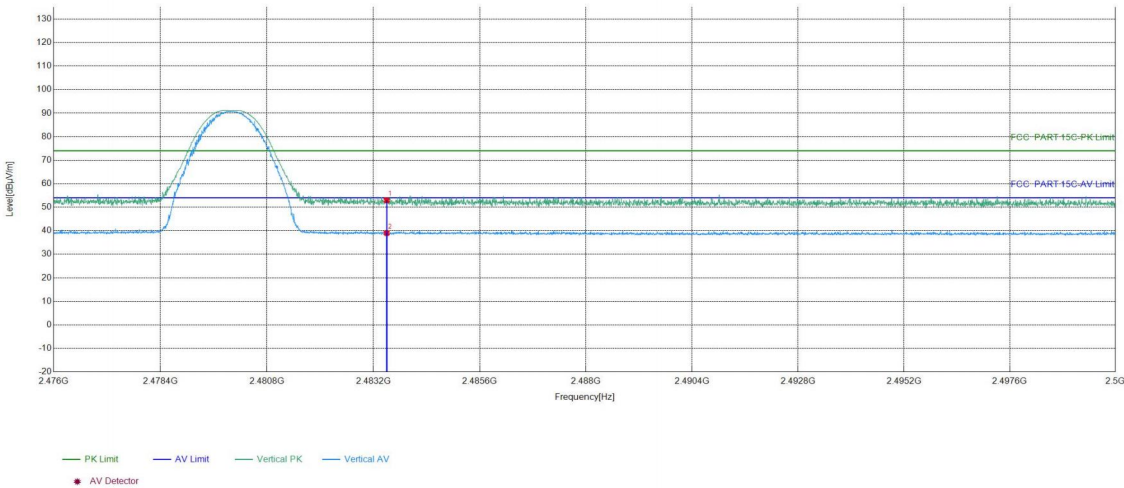


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	36.65	52.94	74.00	21.06	PASS	Vertical	PK
2	2483.5	16.29	22.72	39.01	54.00	14.99	PASS	Vertical	AV

Test_Mode	π /4DQPSK Transmitting	Test_Frequency	2402Mhz
Remark	/	Test_Date	2026/1/10
Remark	R		

Test Graph

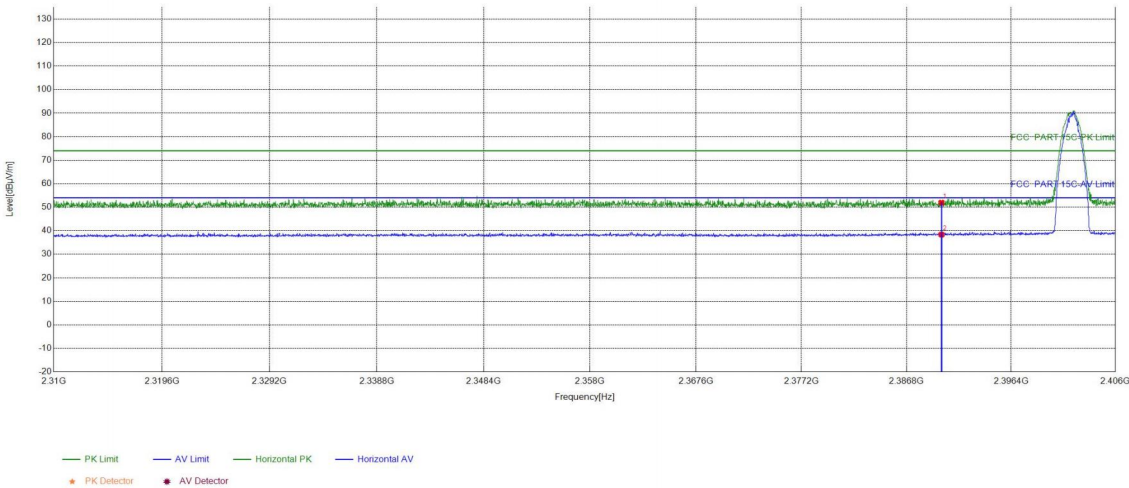


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	36.00	51.96	74.00	22.04	PASS	Horizontal	PK
2	2390	15.96	22.40	38.36	54.00	15.64	PASS	Horizontal	AV

Test_Mode	$\pi/4$ DQPSK Transmitting	Test_Frequency	2402Mhz
Remark	/	Test_Date	2026/1/10
Remark	R		


Test Graph

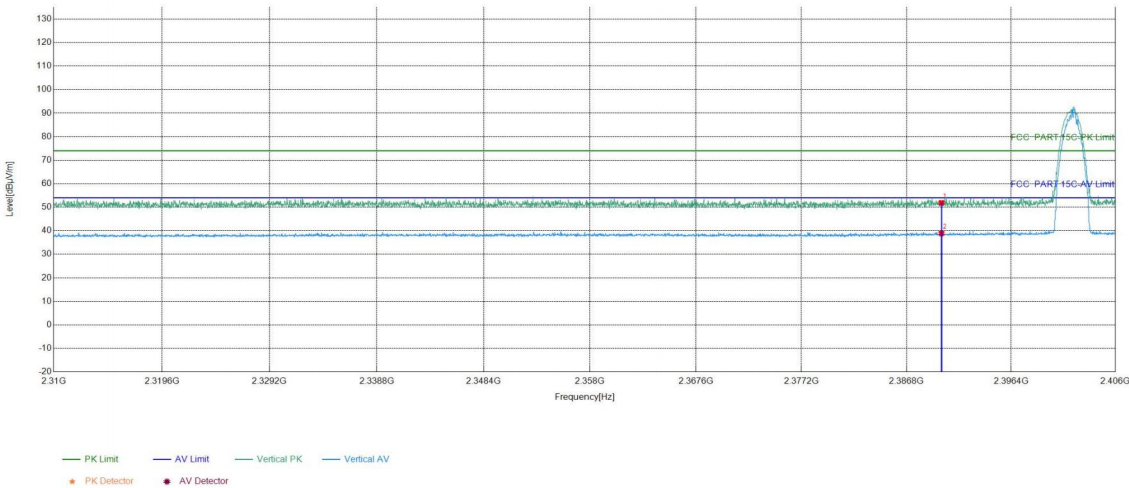

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	35.91	51.87	74.00	22.13	PASS	Vertical	PK
2	2390	15.96	22.92	38.88	54.00	15.12	PASS	Vertical	AV

Test_Mode	π /4DQPSK Transmitting	Test_Frequency	2480Mhz
Remark	/	Test_Date	2026/1/10
Remark	R		

Test Graph

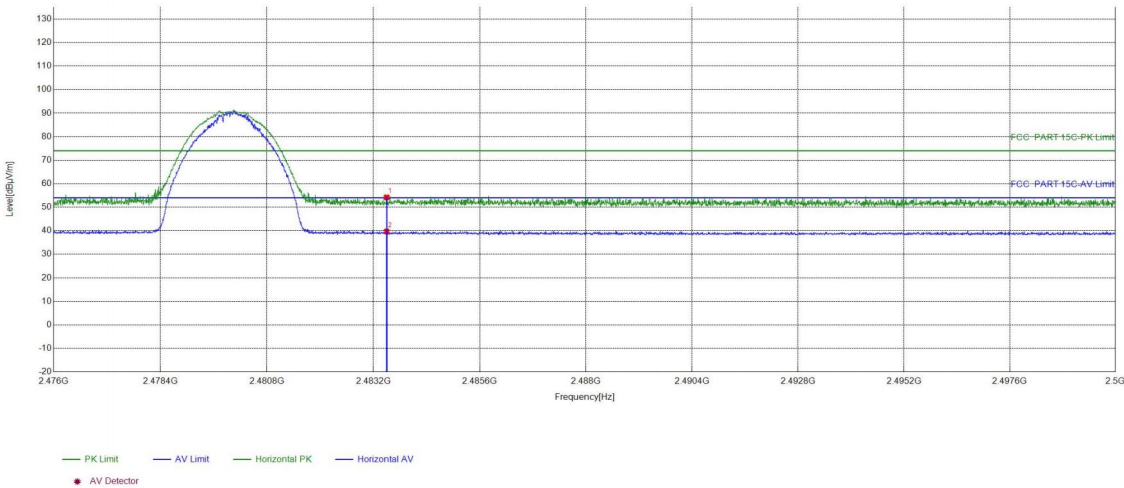


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	37.93	54.22	74.00	19.78	PASS	Horizontal	PK
2	2483.5	16.29	23.40	39.69	54.00	14.31	PASS	Horizontal	AV

Test_Mode	π /4DQPSK Transmitting	Test_Frequency	2480Mhz
Remark	/	Test_Date	2026/1/10
Remark	R		


Test Graph

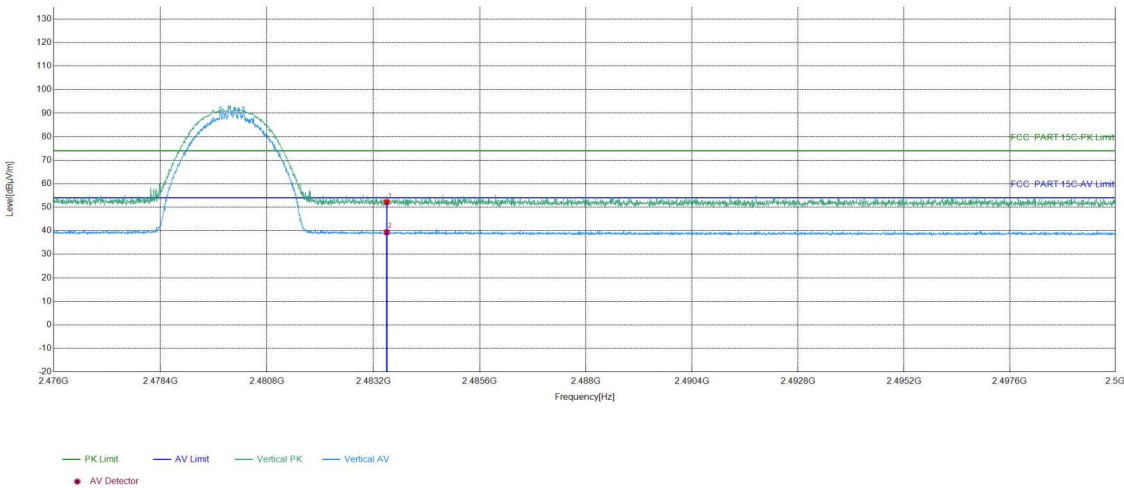

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	35.85	52.14	74.00	21.86	PASS	Vertical	PK
2	2483.5	16.29	23.06	39.35	54.00	14.65	PASS	Vertical	AV

Test_Mode	8DPSK Transmitting	Test_Frequency	2402Mhz
Remark	/	Test_Date	2026/1/10
Remark	R		

Test Graph

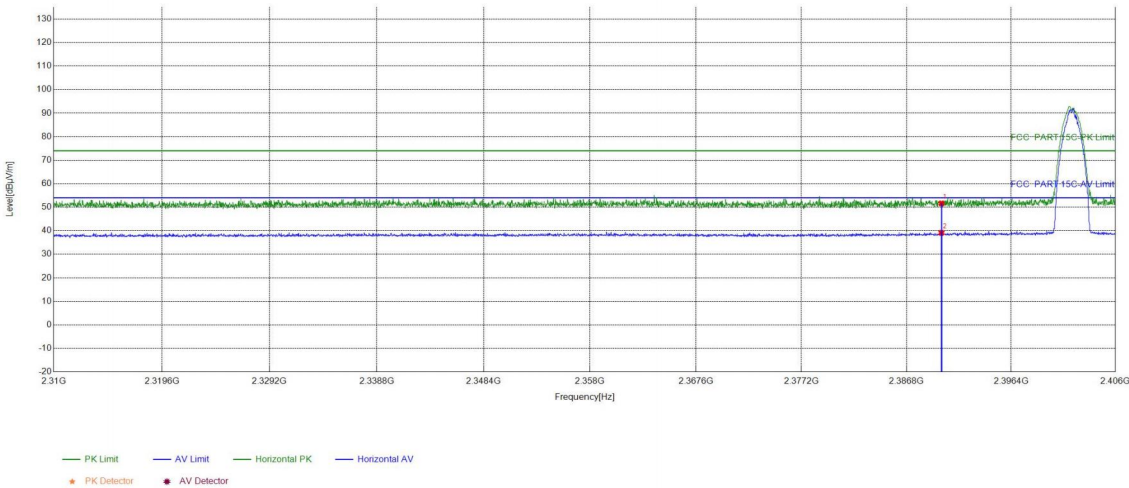


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	35.66	51.62	74.00	22.38	PASS	Horizontal	PK
2	2390	15.96	23.15	39.11	54.00	14.89	PASS	Horizontal	AV

Test_Mode	8DPSK Transmitting	Test_Frequency	2402Mhz
Remark	/	Test_Date	2026/1/10
Remark	R		

Test Graph

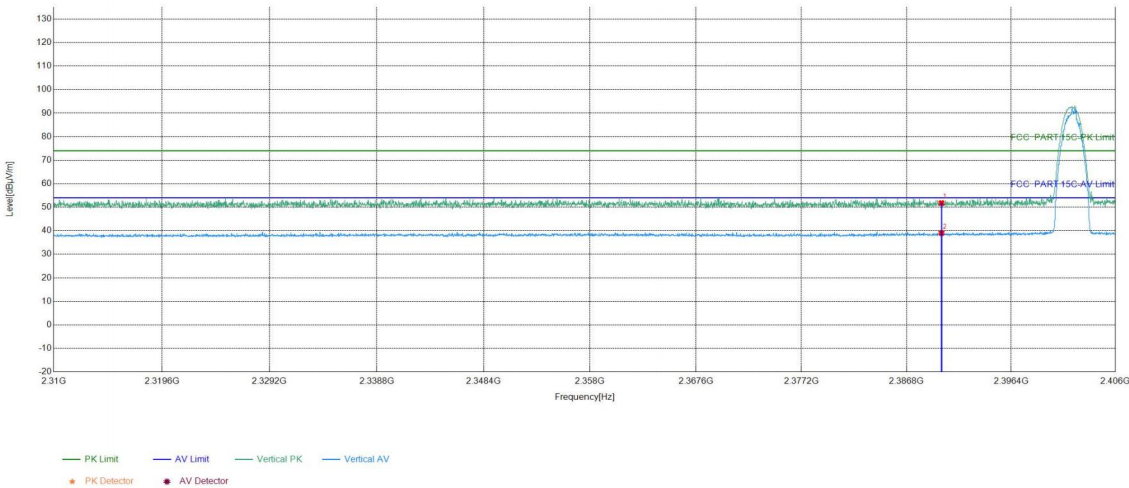


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	35.80	51.76	74.00	22.24	PASS	Vertical	PK
2	2390	15.96	23.06	39.02	54.00	14.98	PASS	Vertical	AV

Test_Mode	8DPSK Transmitting	Test_Frequency	2480Mhz
Remark	/	Test_Date	2026/1/12
Remark	R		


Test Graph

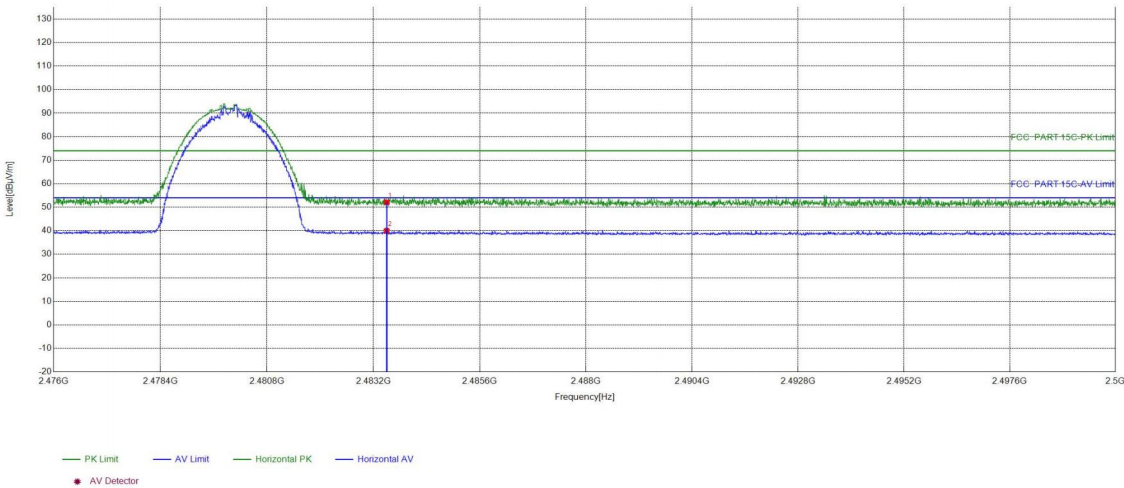

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	35.81	52.10	74.00	21.90	PASS	Horizontal	PK
2	2483.5	16.29	23.71	40.00	54.00	14.00	PASS	Horizontal	AV

Test_Mode	8DPSK Transmitting	Test_Frequency	2480Mhz
Remark	/	Test_Date	2026/1/12
Remark	R		


Test Graph

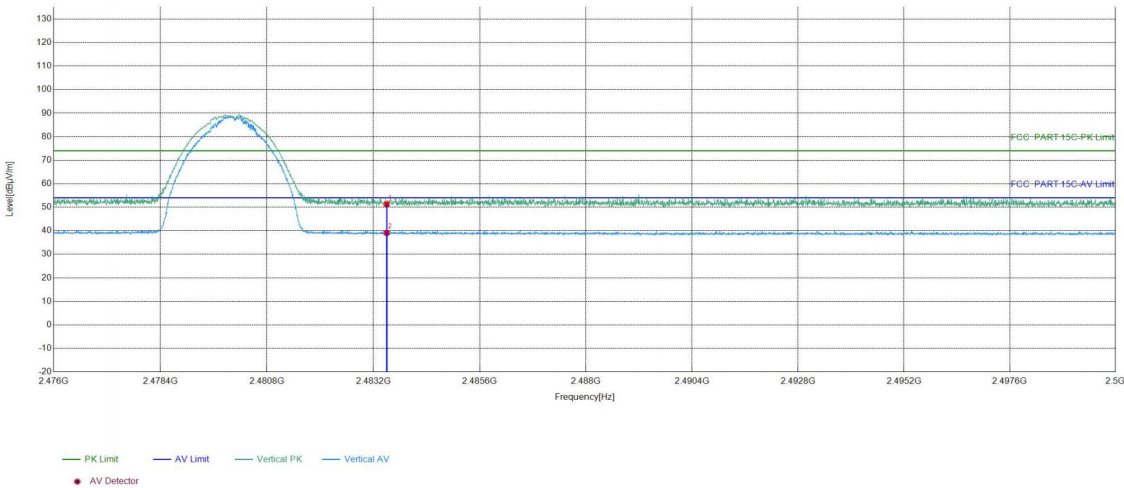

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	34.98	51.27	74.00	22.73	PASS	Vertical	PK
2	2483.5	16.29	22.81	39.10	54.00	14.90	PASS	Vertical	AV

Test_Mode	GFSK Transmitting	Test_Frequency	2402Mhz
Remark	/	Test_Date	2026/1/12
Remark	L		


Test Graph

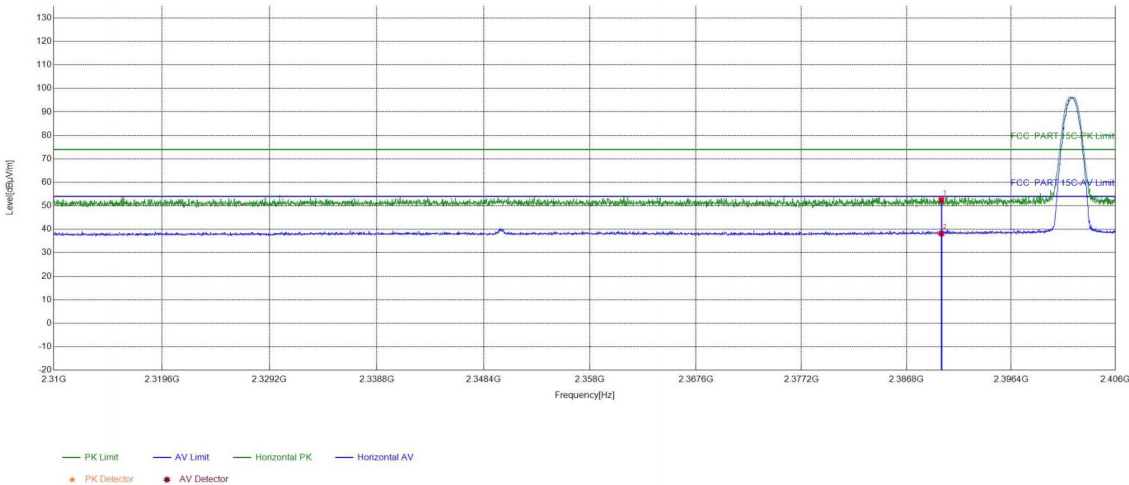

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	36.55	52.51	74.00	21.49	PASS	Horizontal	PK
2	2390	15.96	22.25	38.21	54.00	15.79	PASS	Horizontal	AV

Test_Mode	GFSK Transmitting	Test_Frequency	2402Mhz
Remark	/	Test_Date	2026/1/12
Remark	L		

Test Graph

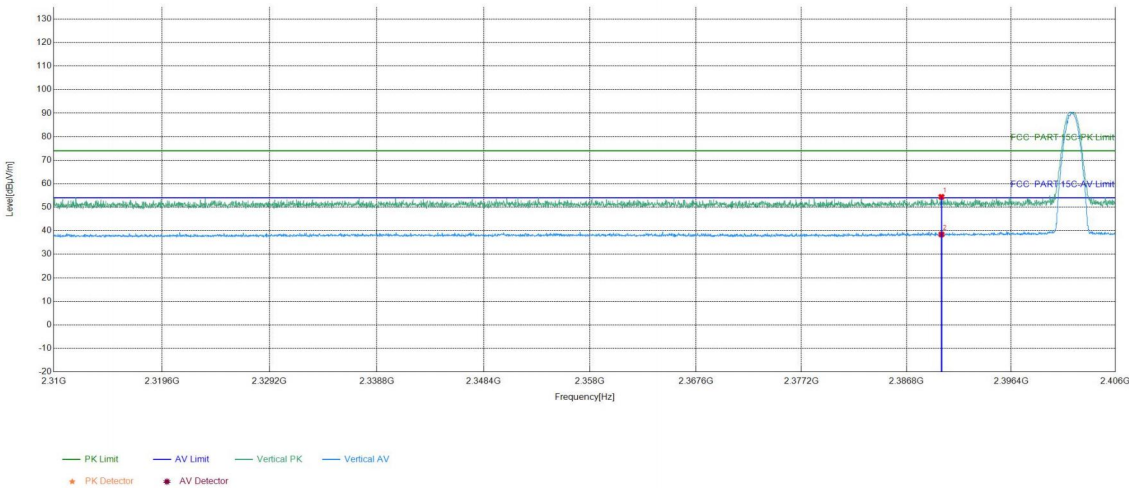


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	38.45	54.41	74.00	19.59	PASS	Vertical	PK
2	2390	15.96	22.47	38.43	54.00	15.57	PASS	Vertical	AV

Test_Mode	GFSK Transmitting	Test_Frequency	2480Mhz
Remark	/	Test_Date	2026/1/12
Remark	L		


Test Graph

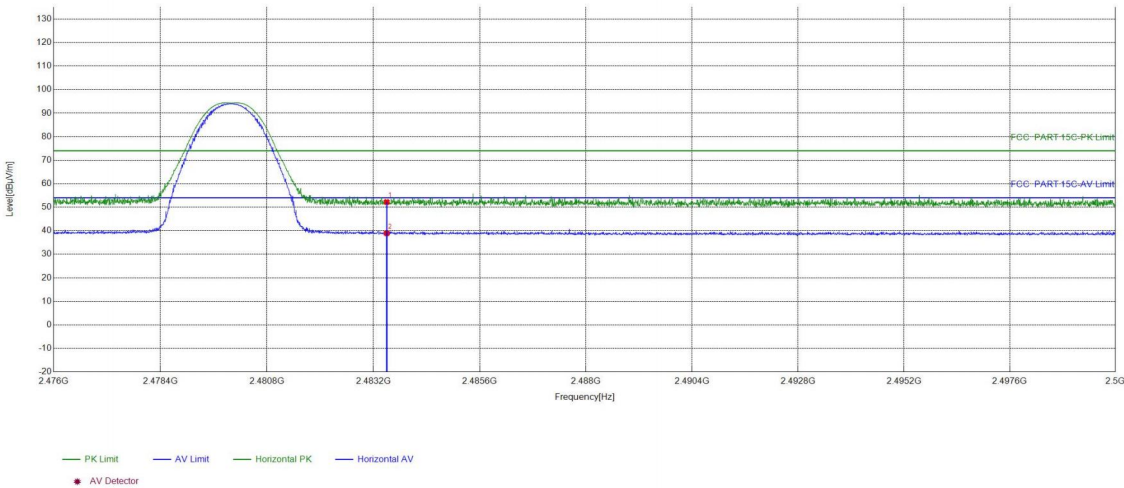

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	35.92	52.21	74.00	21.79	PASS	Horizontal	PK
2	2483.5	16.29	22.65	38.94	54.00	15.06	PASS	Horizontal	AV

Test_Mode	GFSK Transmitting	Test_Frequency	2480Mhz
Remark	/	Test_Date	2026/1/12
Remark	L		


Test Graph

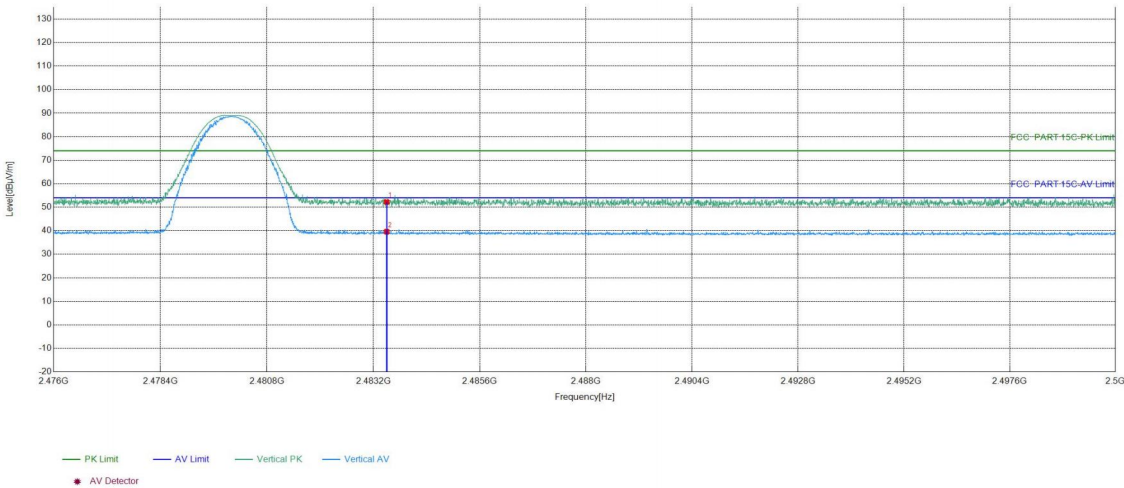

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	35.94	52.23	74.00	21.77	PASS	Vertical	PK
2	2483.5	16.29	23.30	39.59	54.00	14.41	PASS	Vertical	AV

Test_Mode	π /4DQPSK Transmitting	Test_Frequency	2402Mhz
Remark	/	Test_Date	2026/1/12
Remark	L		

Test Graph

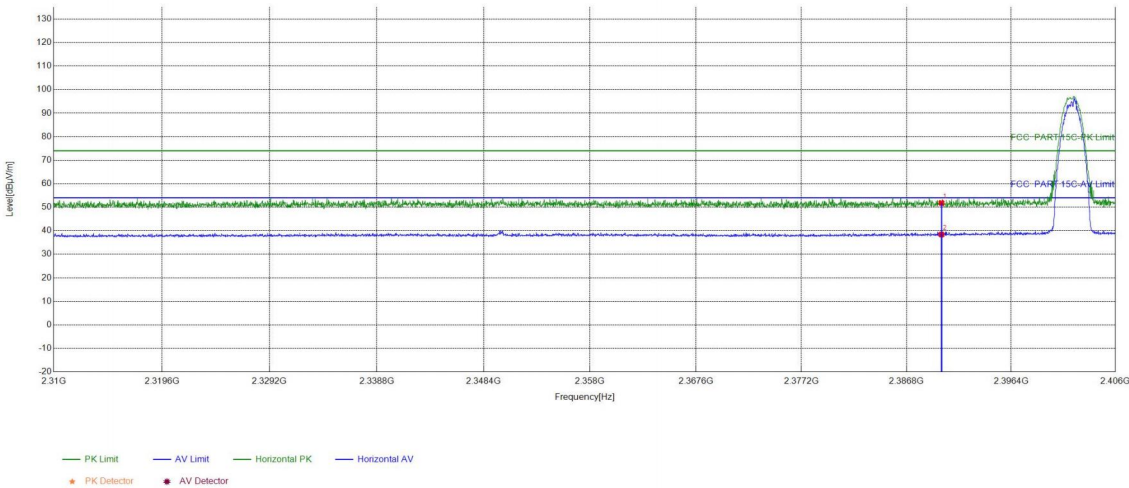


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	35.83	51.79	74.00	22.21	PASS	Horizontal	PK
2	2390	15.96	22.44	38.40	54.00	15.60	PASS	Horizontal	AV

Test_Mode	π /4DQPSK Transmitting	Test_Frequency	2402Mhz
Remark	/	Test_Date	2026/1/12
Remark	L		


Test Graph

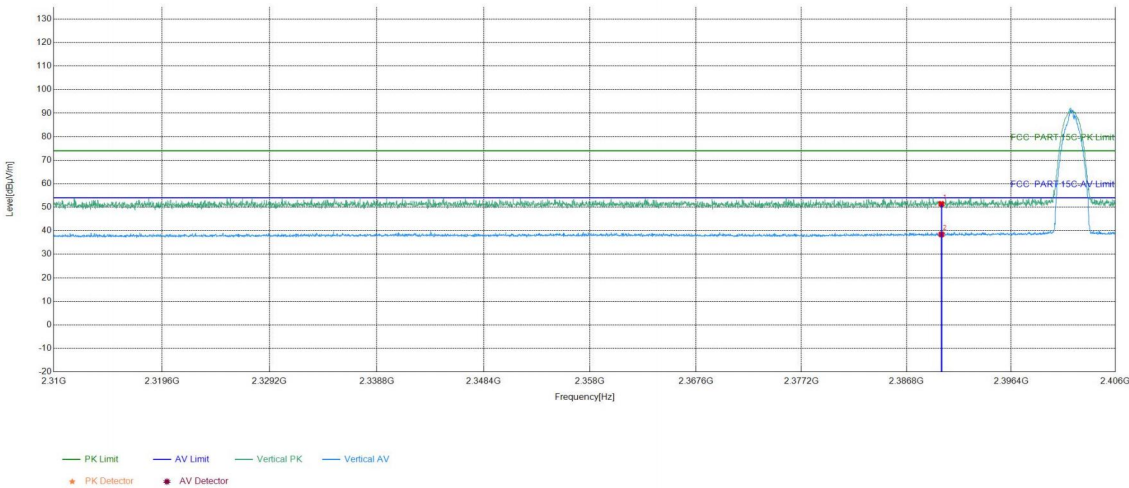

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	35.45	51.41	74.00	22.59	PASS	Vertical	PK
2	2390	15.96	22.48	38.44	54.00	15.56	PASS	Vertical	AV

Test_Mode	π /4DQPSK Transmitting	Test_Frequency	2480Mhz
Remark	/	Test_Date	2026/1/12
Remark	L		


Test Graph

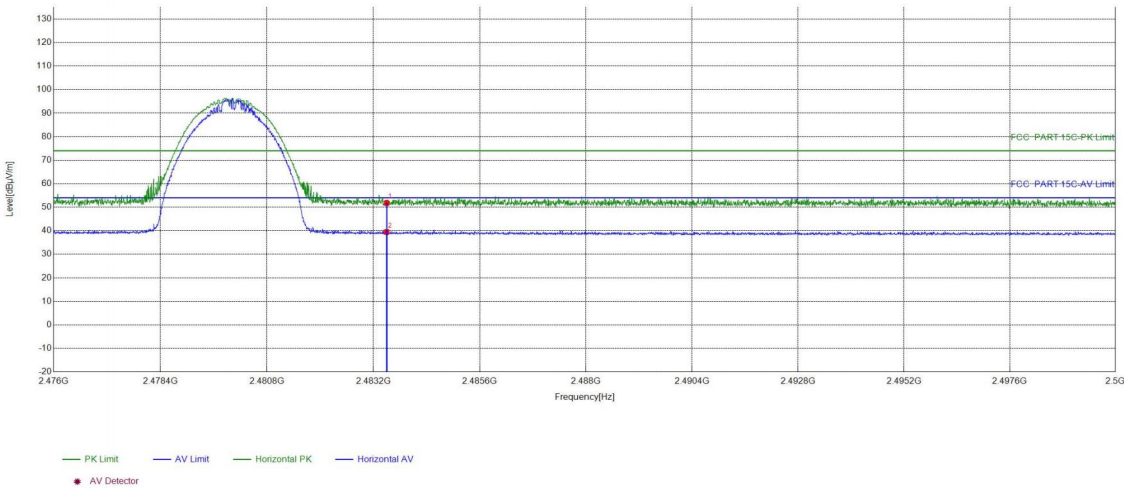

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	35.49	51.78	74.00	22.22	PASS	Horizontal	PK
2	2483.5	16.29	23.18	39.47	54.00	14.53	PASS	Horizontal	AV

Test_Mode	$\pi/4$ DQPSK Transmitting	Test_Frequency	2480Mhz
Remark	/	Test_Date	2026/1/12
Remark	L		


Test Graph

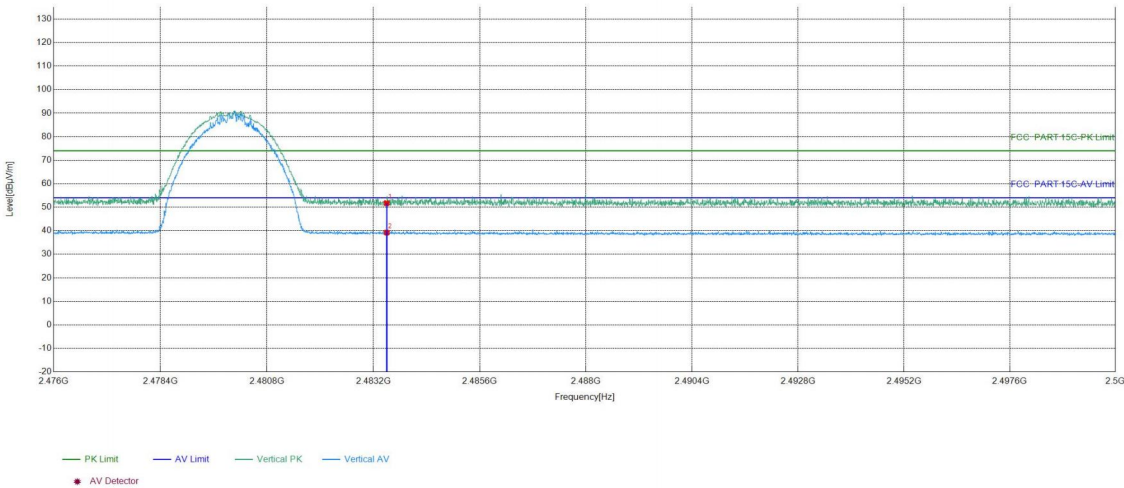

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	35.41	51.70	74.00	22.30	PASS	Vertical	PK
2	2483.5	16.29	22.92	39.21	54.00	14.79	PASS	Vertical	AV

Test_Mode	8DPSK Transmitting	Test_Frequency	2402Mhz
Remark	/	Test_Date	2026/1/12
Remark	L		

Test Graph

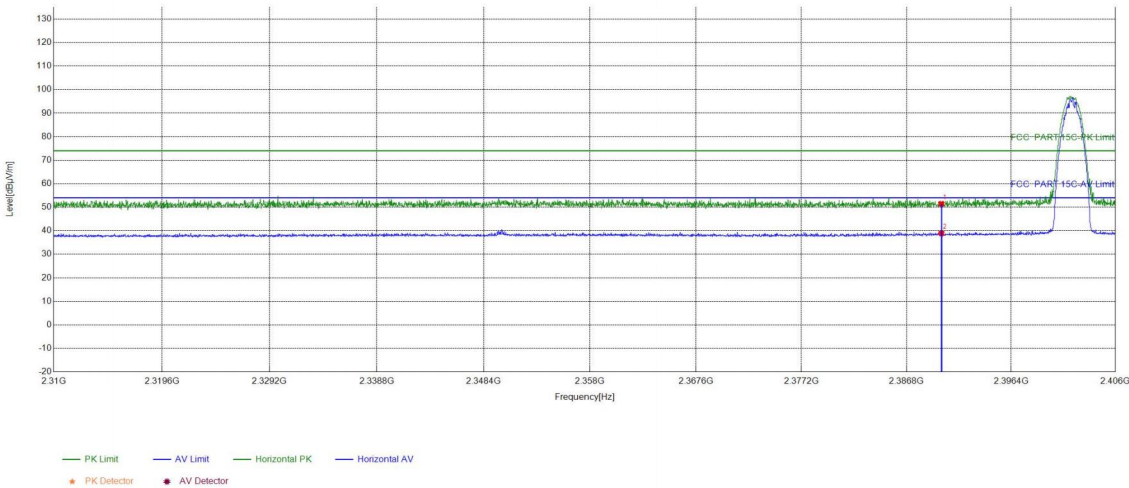


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	35.49	51.45	74.00	22.55	PASS	Horizontal	PK
2	2390	15.96	22.94	38.90	54.00	15.10	PASS	Horizontal	AV

Test_Mode	8DPSK Transmitting	Test_Frequency	2402Mhz
Remark	/	Test_Date	2026/1/12
Remark	L		


Test Graph

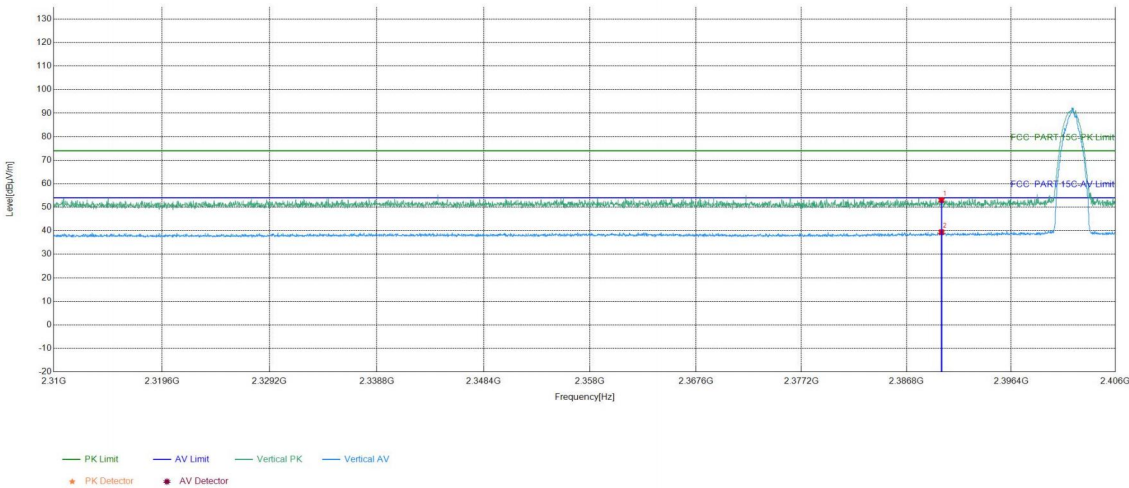

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	37.08	53.04	74.00	20.96	PASS	Vertical	PK
2	2390	15.96	23.46	39.42	54.00	14.58	PASS	Vertical	AV

Test_Mode	8DPSK Transmitting	Test_Frequency	2480Mhz
Remark	/	Test_Date	2026/1/12
Remark	L		

Test Graph

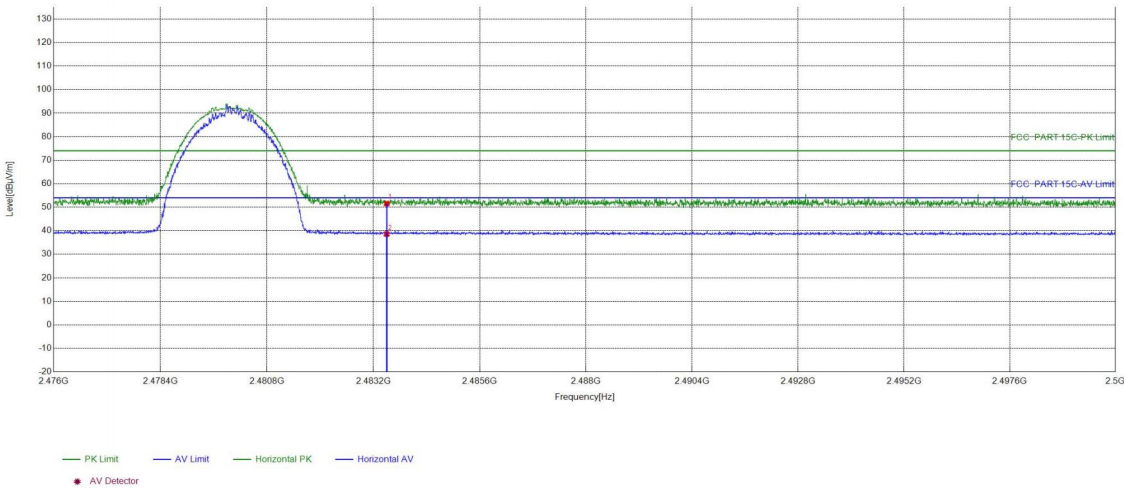


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	35.26	51.55	74.00	22.45	PASS	Horizontal	PK
2	2483.5	16.29	22.32	38.61	54.00	15.39	PASS	Horizontal	AV

Test_Mode	8DPSK Transmitting	Test_Frequency	2480Mhz
Remark	/	Test_Date	2026/1/12
Remark	L		

Test Graph

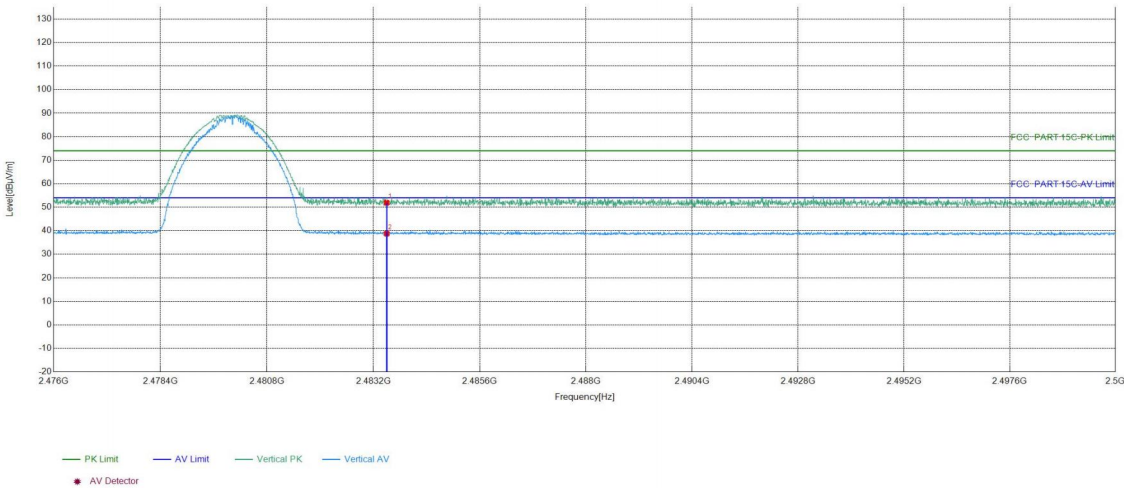

Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	35.62	51.91	74.00	22.09	PASS	Vertical	PK
2	2483.5	16.29	22.49	38.78	54.00	15.22	PASS	Vertical	AV

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor– Antenna Factor–Cable Factor

5 Appendix A

Refer to Appendix: Bluetooth Classic of EED32S80019801

6 PHOTOGRAPHS

Refer to Appendix Photographs of Report No. EED32S80019801.

Statement

1. This report is considered invalid without approved signature, special seal and the seal on the perforation;
2. The Company Name shown on Report and Address, the sample(s) and sample information was/were provided by the applicant who should be responsible for the authenticity which CTI hasn't verified;
3. The result(s) shown in this report refer(s) only to the sample(s) tested;
4. Unless otherwise stated, the decision rule for conformity reporting is based on Binary Statement for Simple Acceptance Rule stated in ILAC-G8:09/2019/CNAS-GL015:2022;
5. Without written approval of CTI, this report can't be reproduced except in full;

*** End of Report ***