

EXHIBIT A - FCC ID LABELING AND LOCATION

FCC ID Label

Lighting Control Switch
Model: MC054V RC D
Output:
120Vac 50/60Hz 4A
electronic/magnetic ballast
277Vac 50/60Hz 3A
electronic/magnetic ballast
Input: 120/277Vac 50/60Hz
FCC ID: 2A153-MC054VRC


UL **US**
LISTED
(miscellaneous controls)
E489677

merrytek[®]
www.merrytek.com

Yellow Blue Brown Black Red
Lout **N** Lin - +
☐ ☐ ☐ ☐ ☐
Indoor use only 1-10V

Detection Area			Hold Time			Stand-by Period			Stand-by DIM Level			Daylight Sensor												
	1			2	3	4		1	2	3		4	5		6	7	8	9						
ON ↑ 	I	ON	100%	I	ON	ON	ON	5S	I	ON	ON	ON	0S	I	ON	ON	ON	ON	5Lux					
				II	-	ON	ON	30S	II	-	ON	ON	1min	II	-	ON	ON	ON	15Lux					
				III	ON	-	ON	1min	III	ON	-	ON	3min	III	ON	-	ON	ON	30Lux					
	II	-	50%	IV	-	-	ON	3min	IV	-	-	ON	10min	IV	-	-	ON	ON	50Lux					
				V	ON	ON	-	20min	V	ON	ON	-	30min	V	ON	ON	-	ON	100Lux					
				VI	-	-	-	30min	VI	-	-	-	+∞	VI	ON	ON	ON	-	150Lux					
														IV	-	-	-	50%	VII	-	-	-	-	Disable

Proposed FCC ID Label Location

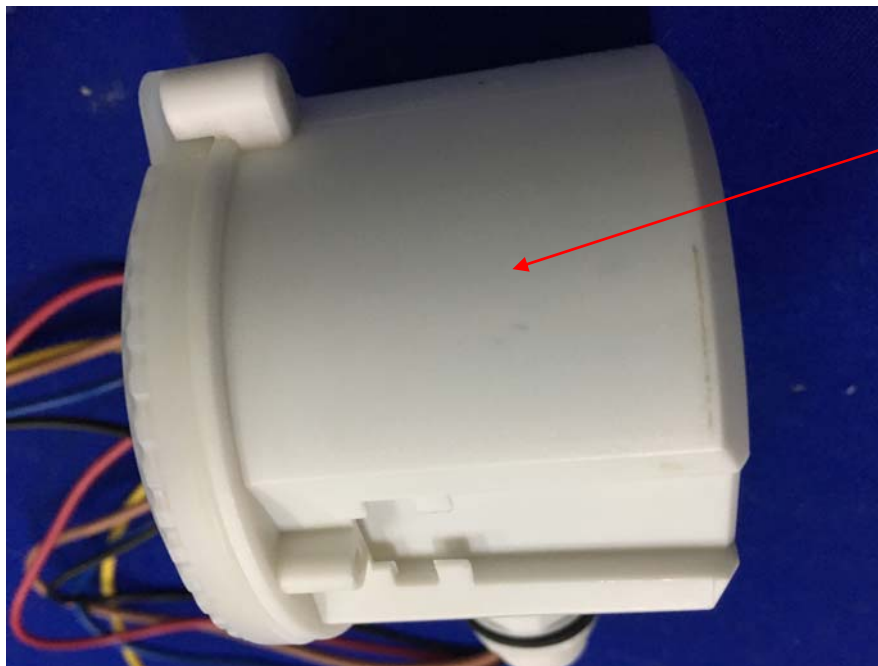

Label Here

The label shown shall be permanently affixed at a conspicuous location on the device and be readily visible to the user at the time purchase (Labeling requirements per 2.925)