



FCC Test Report

APPLICANT : Beijing Xiaomi Electronics Co., Ltd.
EQUIPMENT : Xiaomi Wi-Fi Range Extender AX1500
BRAND NAME : xiaomi
MODEL NAME : RN12
FCC ID : 2AIMRRN12
STANDARD : 47 CFR Part 15 Subpart B
CLASSIFICATION : Certification
TEST DATE(S) : Apr. 13, 2025 ~ Apr. 21, 2025

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1. GENERAL DESCRIPTION	5
1.1. Applicant.....	5
1.2. Manufacturer	5
1.3. Product Feature of Equipment Under Test	5
1.4. Product Specification of Equipment Under Test	6
1.5. Modification of EUT	6
1.6. Test Location	6
1.7. Test Software	7
1.8. Applicable Standards	7
2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1. Test Mode	8
2.2. Connection Diagram of Test System	9
2.3. Support Unit used in test configuration and system	9
2.4. EUT Operation Test Setup	9
3. TEST RESULT	10
3.1. Test of AC Conducted Emission Measurement	10
3.2. Test of Radiated Emission Measurement	14
4. LIST OF MEASURING EQUIPMENT	21
5. MEASUREMENT UNCERTAINTY	22
APPENDIX A. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FC530405	Rev. 01	Initial issue of report	May 14, 2025

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.107	AC Conducted Emission	< 15.107 limits	PASS	Under limit 11.91 dB at 0.442 MHz
3.2	15.109	Radiated Emission	< 15.109 limits	PASS	Under limit 3.22 dB at 875.110 MHz for Quasi-Peak

Conformity Assessment Condition:

The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account. Please refer to each test results in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1. General Description

1.1. Applicant

Beijing Xiaomi Electronics Co., Ltd.

Room 802, Floor 8, Building 5, No.15 KeChuang 10th Road, Beijing Economic and Technological Development Zone, Beijing City, China.

1.2. Manufacturer

Beijing Xiaomi Electronics Co., Ltd.

Room 802, Floor 8, Building 5, No.15 KeChuang 10th Road, Beijing Economic and Technological Development Zone, Beijing City, China.

1.3. Product Feature of Equipment Under Test

Product Feature	
Equipment	Xiaomi Wi-Fi Range Extender AX1500
Brand Name	xiaomi
Model Name	RN12
FCC ID	2AIMRRN12
EUT supports Radios application	WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 WLAN 5GHz 802.11ax HE20/HE40/HE80
SN Code	Conduction: 65334/N2VD00086 Radiation: 65334/N2VD00099
HW Version	V2.0
SW Version	1.0.10
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4. Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	802.11b/g/n: 2400 MHz ~ 2483.5 MHz 802.11a/n/ac/ax: 5150 MHz ~ 5250 MHz; 5250 MHz ~ 5350 MHz; 5470 MHz ~ 5725 MHz
Rx Frequency	802.11b/g/n: 2400 MHz ~ 2483.5 MHz 802.11a/n/ac/ax: 5150 MHz ~ 5250 MHz; 5250 MHz ~ 5350 MHz; 5470 MHz ~ 5725 MHz
Antenna Type	WLAN: PCB Antenna
Type of Modulation	802.11b: DSSS (DBPSK / DQPSK / CCK) 802.11a/g/n: OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM) 802.11ax: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM)

1.5. Modification of EUT

No modifications are made to the EUT during all test items.

1.6. Test Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH02-KS 10CH01-KS	CN1257	314309

1.7. Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH02-KS	AUDIX	E3	6.2009-8-24al
2.	10CH01-KS	AUDIX	E3	210616
3.	CO01-KS	AUDIX	E3	6.2009-8-24

1.8. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart B
- ♦ ANSI C63.4-2014

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.

2. Test Configuration of Equipment Under Test


2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (30MHz to the 5th harmonic of the highest frequency or to 40 GHz, whichever is lower).

Test Items	Function Type
AC Conducted Emission	Mode 1: WLAN (2.4G) Idle + LAN link (RJ45) + AC Power Mode 2: WLAN (5G) Idle + LAN link (RJ45) + AC Power
Radiated Emissions	Mode 1: WLAN (2.4G) Idle + LAN link (RJ45) + AC Power Mode 2: WLAN (5G) Idle + LAN link (RJ45) + AC Power
Remark: 1. The worst case of AC is mode 1; only the test data of this mode is reported. 2. The worst case of RE is mode 1; only the test data of this mode is reported.	

2.2.Connection Diagram of Test System

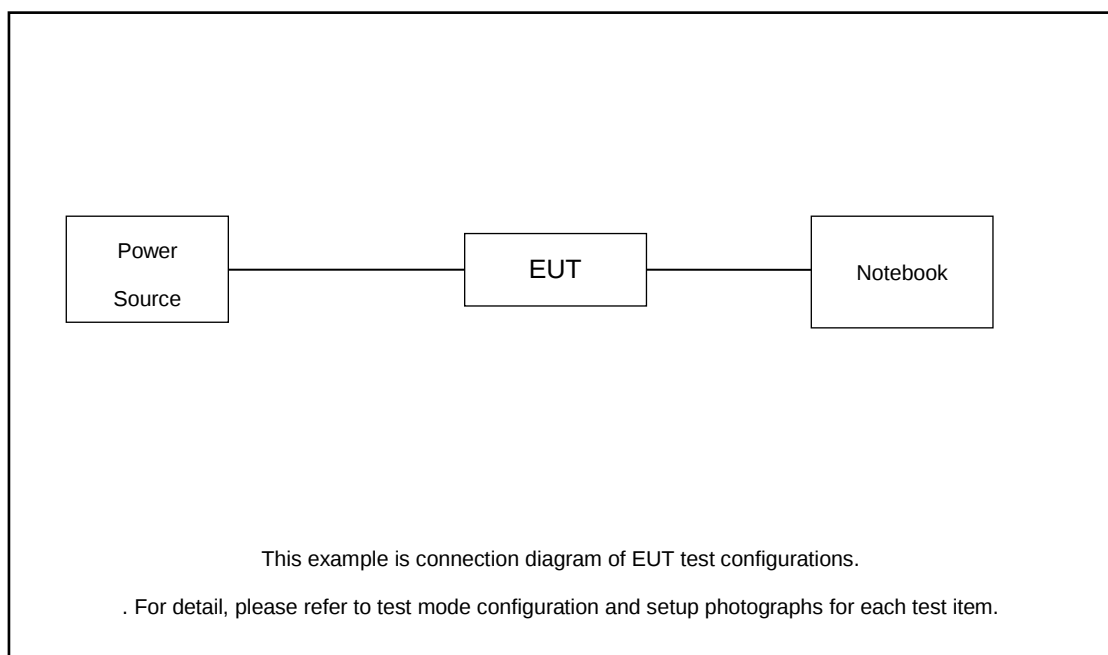

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application

2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook	Lenovo	V130-15IKB005	N/A	N/A	shielded cable DC O/P 1.8m , Unshielded AC I/P cable 1.8m
2.	SD Card	Kingston	8GB	N/A	N/A	N/A

2.4. EUT Operation Test Setup

EUT is connected with notebook via RJ-45 cable.

3. Test Result

3.1. Test of AC Conducted Emission Measurement

3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

<Class B Limit>

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedure


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.1.4 Test Setup

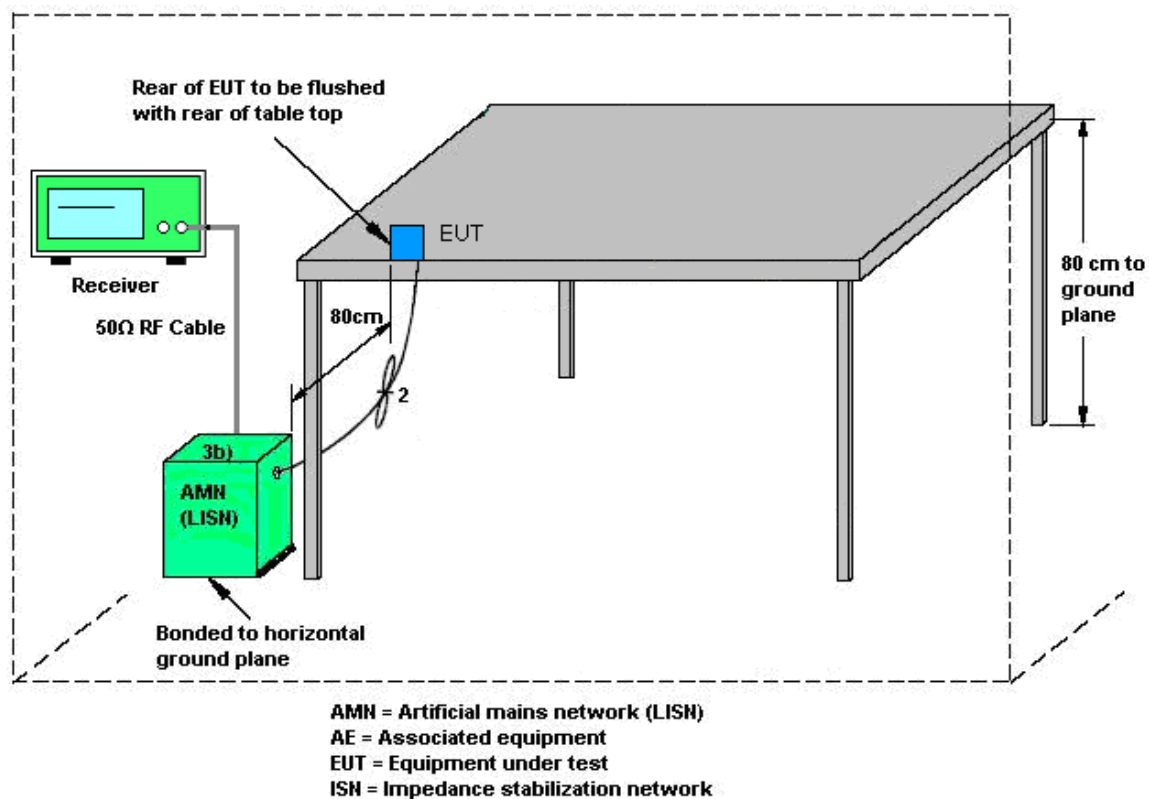

3.1.5 Test Result of AC Conducted Emission

Test Engineer :	Amos	Temperature :	24.2~25.6°C
		Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

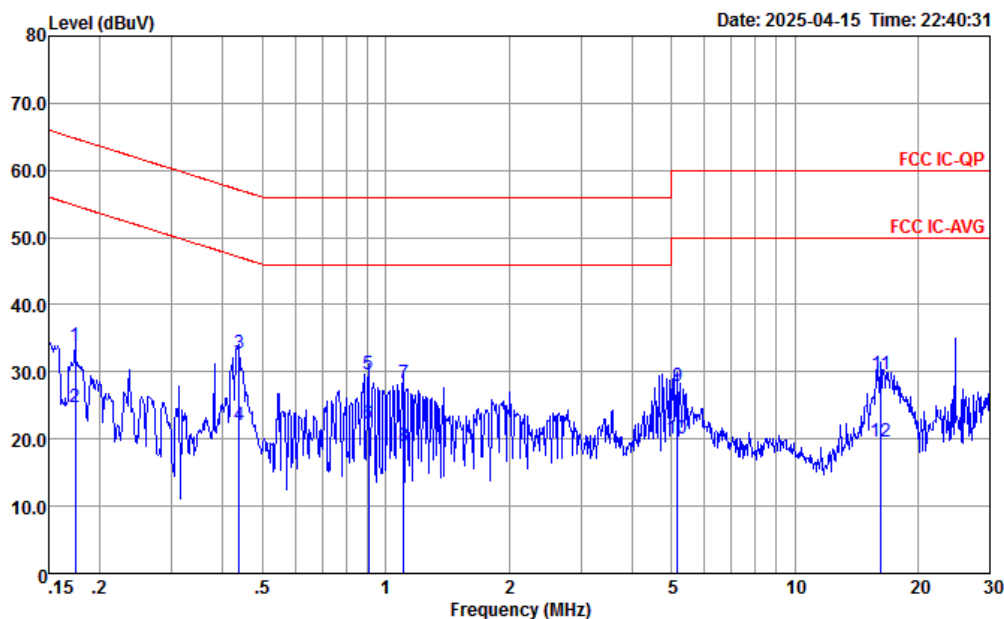


Site : CO01-KS
Condition : FCC IC-QP LISN-060105-L 2024 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.174	33.85	-30.92	64.77	23.29	0.10	10.46	QP
2	0.174	24.75	-30.02	54.77	14.19	0.10	10.46	Average
3	0.437	32.80	-24.31	57.11	22.40	-0.06	10.46	QP
4	0.437	22.10	-25.01	47.11	11.70	-0.06	10.46	Average
5	0.909	29.72	-26.28	56.00	19.60	-0.17	10.29	QP
6 *	0.909	22.22	-23.78	46.00	12.10	-0.17	10.29	Average
7	1.106	28.28	-27.72	56.00	18.20	-0.19	10.27	QP
8	1.106	18.98	-27.02	46.00	8.90	-0.19	10.27	Average
9	5.166	27.88	-32.12	60.00	17.90	-0.22	10.20	QP
10	5.166	20.08	-29.92	50.00	10.10	-0.22	10.20	Average
11	16.226	29.64	-30.36	60.00	19.60	-0.25	10.29	QP
12	16.226	19.54	-30.46	50.00	9.50	-0.25	10.29	Average



Test Engineer :	Amos	Temperature :	24.2~25.6°C
		Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

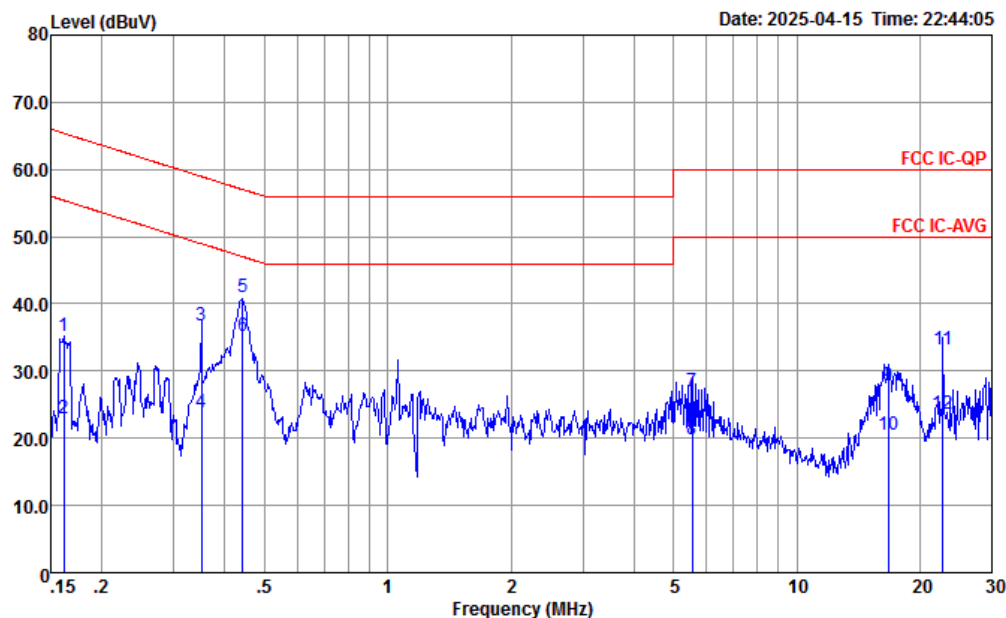

Site : CO01-KS
Condition : FCC IC-QP LISN-060105-N 2024 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.162	35.18	-30.20	65.38	24.61	0.12	10.45	QP
2	0.162	22.88	-32.50	55.38	12.31	0.12	10.45	Average
3	0.350	36.86	-22.10	58.96	26.51	-0.13	10.48	QP
4	0.350	23.86	-25.10	48.96	13.51	-0.13	10.48	Average
5	0.442	41.11	-15.91	57.02	30.80	-0.14	10.45	QP
6 *	0.442	35.11	-11.91	47.02	24.80	-0.14	10.45	Average
7	5.564	26.95	-33.05	60.00	16.96	-0.20	10.19	QP
8	5.564	19.79	-30.21	50.00	9.80	-0.20	10.19	Average
9	16.750	27.94	-32.06	60.00	17.89	-0.24	10.29	QP
10	16.750	20.54	-29.46	50.00	10.49	-0.24	10.29	Average
11	22.775	33.15	-26.85	60.00	23.20	-0.44	10.39	QP
12	22.775	23.65	-26.35	50.00	13.70	-0.44	10.39	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)

3.2. Test of Radiated Emission Measurement

3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

<Class B Limit>

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: Measurement below 1GHz follows the CISPR 22 limit line as below :

15.109 (g) As an alternative to the radiated emission limits shown in paragraphs (a) and (b) of this section, digital devices may be shown to comply with the standards contained in Third Edition of the International Special Committee on Radio Interference (CISPR), Pub. 22, "Information Technology Equipment - Radio Disturbance Characteristics - Limits and Methods of Measurement"

<CISPR 22 Class B Limit>

Frequency (MHz)	Field Strength (dBuV/meter)	Measurement Distance (meters)
30 – 230	30	10
230 – 1000	37	10

3.2.2. Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.2.3. Test Procedures


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The EUT was set 10 meters (30M~1G) and 3 meters (1G~ 13G) from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest radiation.
5. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
6. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
7. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
8. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
9. Emission level (dBμV/m) = 20 log Emission level (μV/m)
10. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
11. Exploratory radiated emissions testing of handheld and/or body-worn devices shall include rotation of the EUT through three orthogonal axes (X/Y/Z Plane) to determine the orientation (attitude) that maximizes the emissions.

3.2.4. Test Setup of Radiated Emission


For radiated emissions from 30MHz to 1GHz

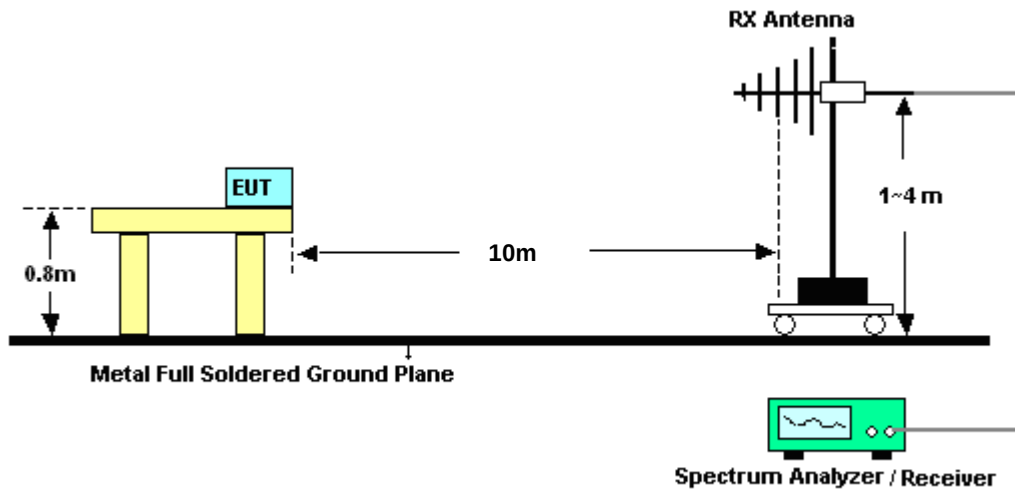


For radiated emissions above 1GHz

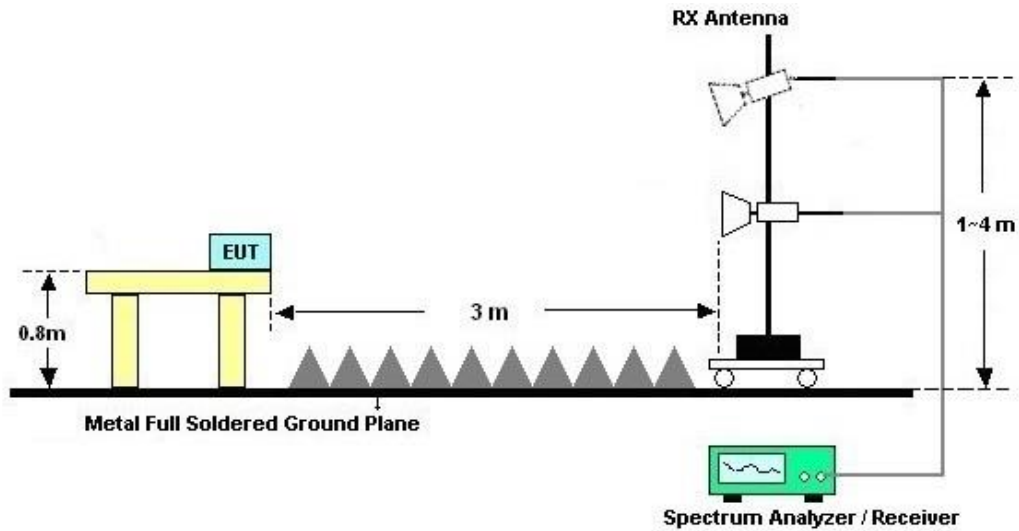


3.2.5. Test Result of Radiated Emission

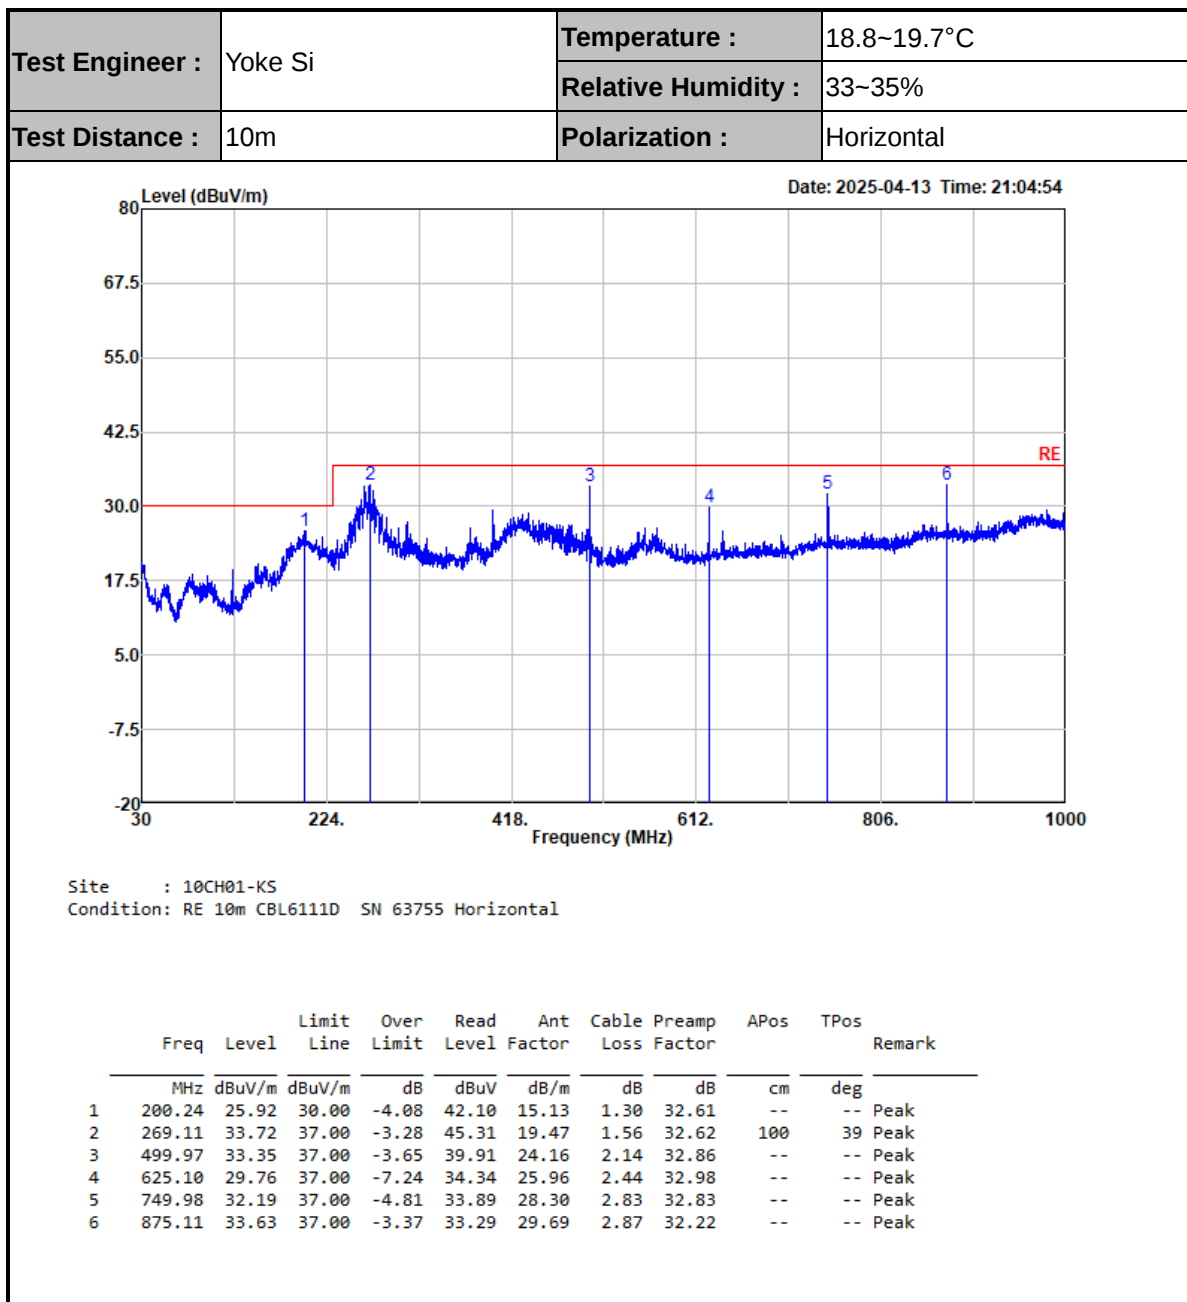

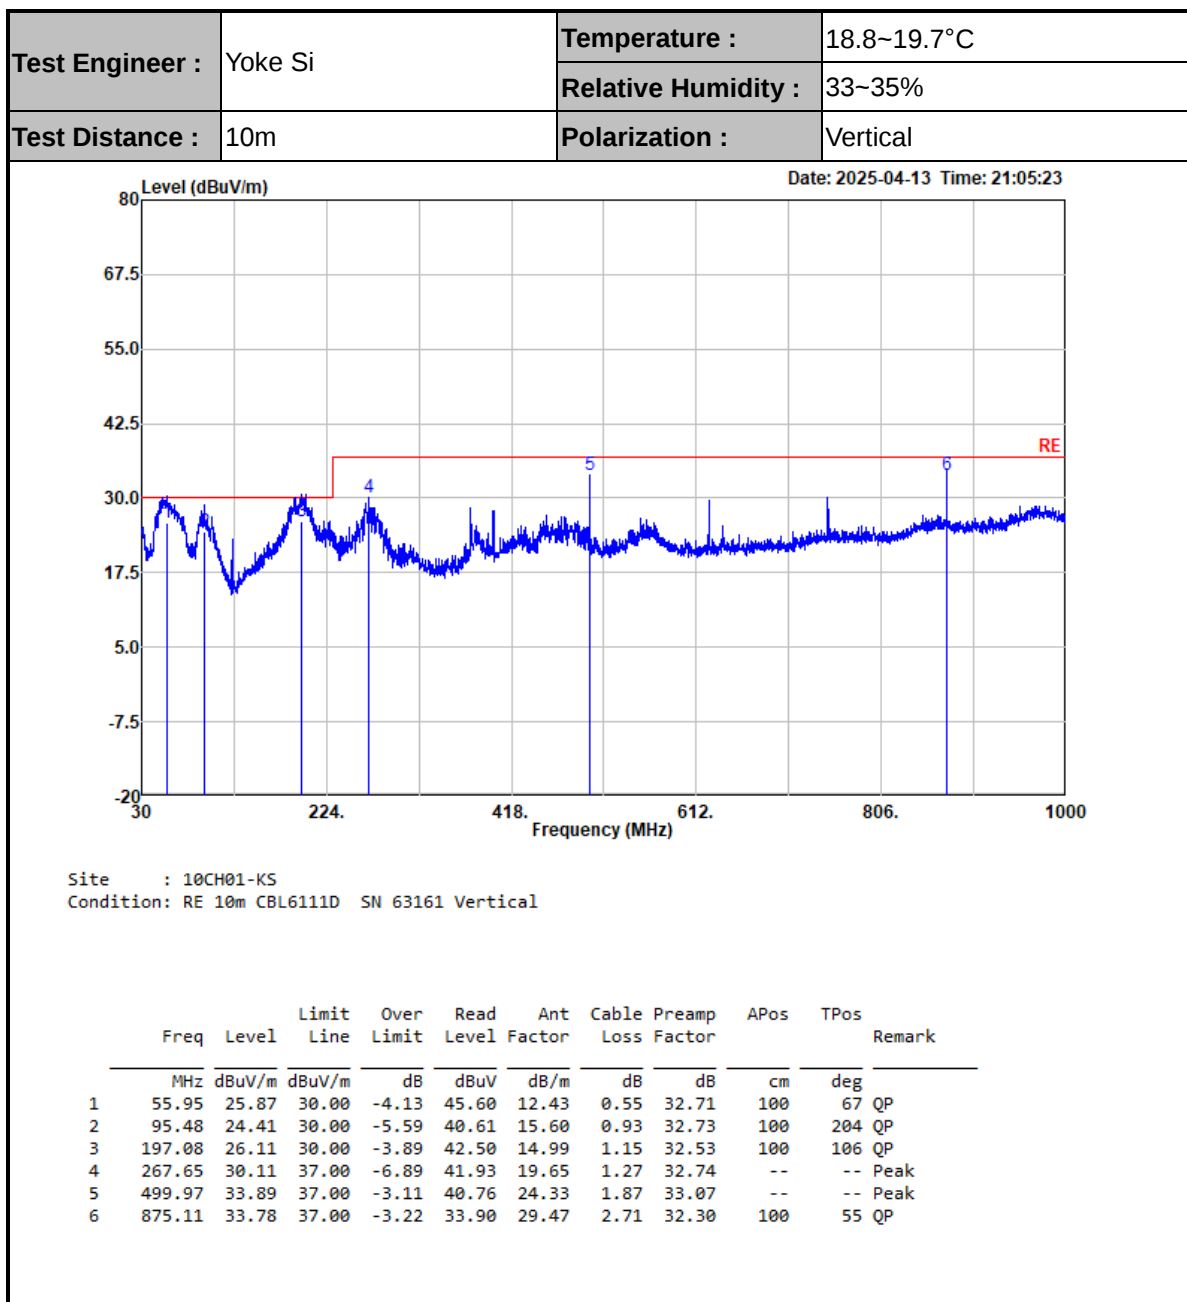


Note:

- Level(dBμV/m) = Read Level(dBμV) + Antenna Factor(dB/m) + Cable Loss(dB) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

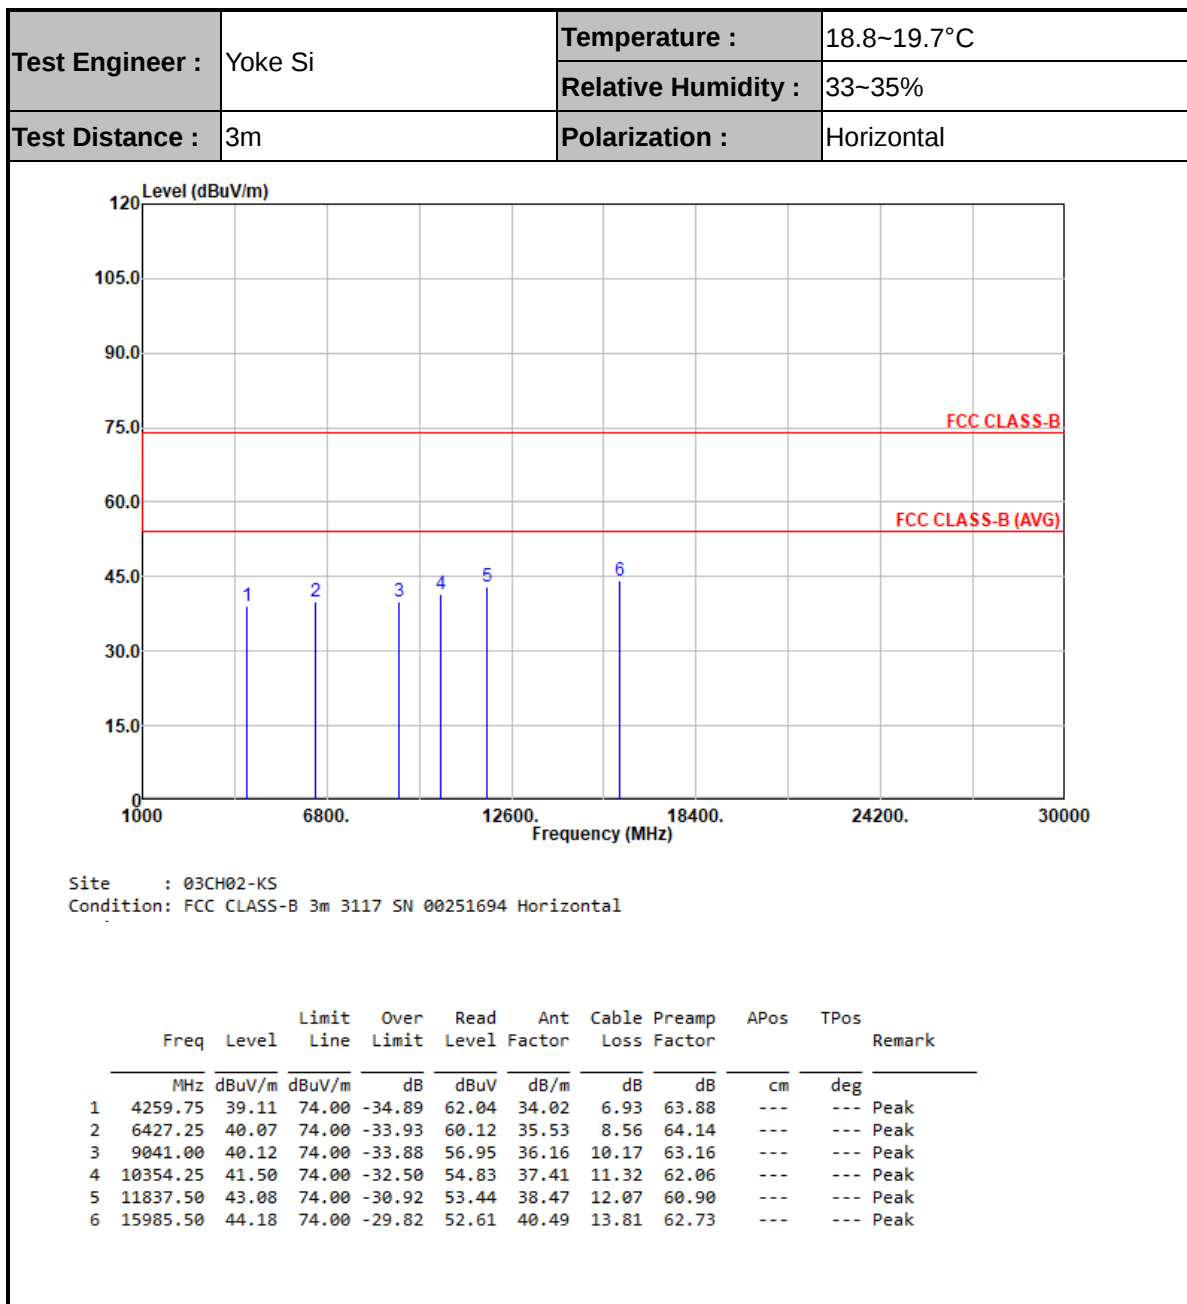

Test Engineer :	Yoke Si	Temperature :	18.8~19.7°C
		Relative Humidity :	33~35%
Test Distance :	3m	Polarization :	Vertical

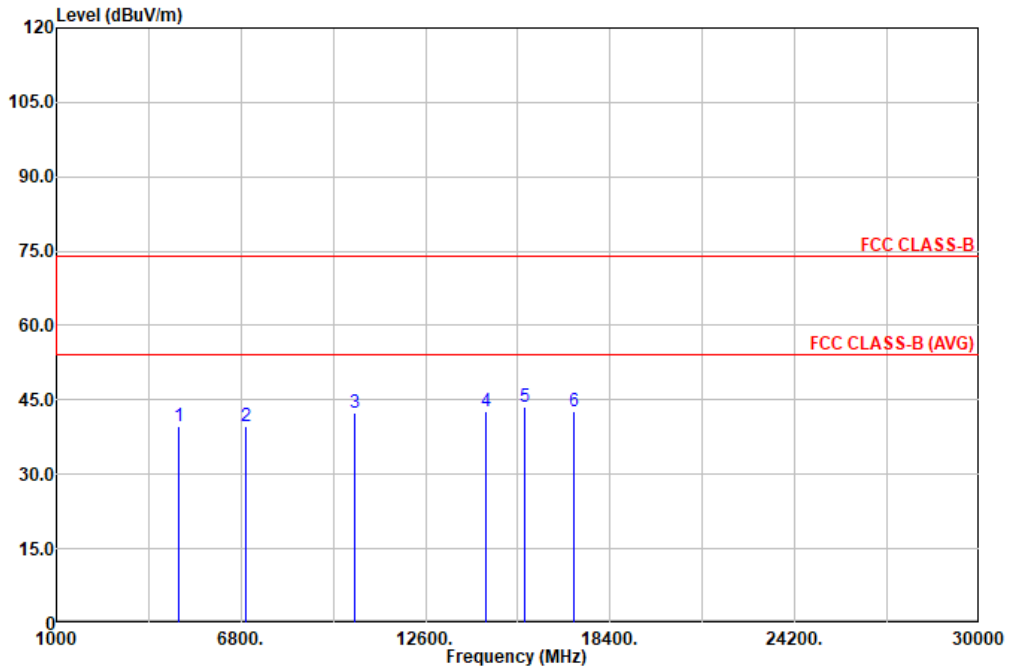

Site : 03CH02-KS
Condition: FCC CLASS-B 3m 3117 SN 00251694 Vertical

	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	4829.25	39.74	74.00	-34.26	62.49	34.20	7.38	64.33	---	---	Peak
2	6954.25	39.77	74.00	-34.23	59.11	35.84	8.95	64.13	---	---	Peak
3	10384.00	42.32	74.00	-31.68	55.59	37.43	11.34	62.04	---	---	Peak
4	14515.00	42.63	74.00	-31.37	52.04	39.31	13.51	62.23	---	---	Peak
5	15700.75	43.61	74.00	-30.39	52.21	40.29	13.78	62.67	---	---	Peak
6	17247.75	42.78	74.00	-31.22	50.01	41.12	14.43	62.78	---	---	Peak

Note:

- Level(dBμV/m) = Read Level(dBμV) + Antenna Factor(dB/m) + Cable Loss(dB) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)



4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 18, 2024	Apr. 15, 2025	Apr. 17, 2025	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Aug. 20, 2024	Apr. 15, 2025	Aug. 19, 2025	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Apr. 18, 2024	Apr. 15, 2025	Apr. 17, 2025	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 09, 2024	Apr. 15, 2025	Oct. 08, 2025	Conduction (CO01-KS)
Bilog Antenna	TESEQ	CBL6111D	63161	30MHz~1GHz	Oct. 25, 2024	Apr. 13, 2025	Oct. 24, 2025	Radiation (10CH01-KS)
Bilog Antenna	TESEQ	CBL6111D	63755	30MHz~1GHz	Oct. 25, 2024	Apr. 13, 2025	Oct. 24, 2025	Radiation (10CH01-KS)
EMI test receiver	R&S	ESR7	102630	9KHz~7GHz	Oct. 09, 2024	Apr. 13, 2025	Oct. 08, 2025	Radiation (10CH01-KS)
EMI test receiver	R&S	ESR7	102631	9KHz~7GHz	Oct. 09, 2024	Apr. 13, 2025	Oct. 08, 2025	Radiation (10CH01-KS)
Amplifier	SONOMA	310N	422544	9KHz ~1GHZ	Oct. 09, 2024	Apr. 13, 2025	Oct. 08, 2025	Radiation (10CH01-KS)
Amplifier	SONOMA	310N	422545	9KHz ~1GHZ	Oct. 09, 2024	Apr. 13, 2025	Oct. 08, 2025	Radiation (10CH01-KS)
Bore-site Antenna Mast	EM	MBD-400-1	NA	1 m~4 m	NCR	Apr. 13, 2025	NCR	Radiation (10CH01-KS)
Antenna Mast	EM	MBD-400-1	NA	1 m~4 m	NCR	Apr. 13, 2025	NCR	Radiation (10CH01-KS)
Controller	EM	3000-1	NA	NA	NCR	Apr. 13, 2025	NCR	Radiation (10CH01-KS)
Turn Table	EM	T-300-1	NA	0~360 degree	NCR	Apr. 13, 2025	NCR	Radiation (10CH01-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55370528	10Hz~44G,MAX 30dB	Oct. 11, 2024	Apr. 21, 2025	Oct. 10, 2025	Radiation (03CH02-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75959	1GHz~18GHz	Mar. 01, 2025	Apr. 21, 2025	Feb. 28, 2026	Radiation (03CH02-KS)
SHF-EHF Horn	Com-power	AH-840	101115	18GHz~40GHz	Oct. 22, 2024	Apr. 21, 2025	Oct. 21, 2025	Radiation (03CH02-KS)
Amplifier	EM	EM18G40GA	060852	18~40GHz	Jan. 03, 2025	Apr. 21, 2025	Jan. 02, 2026	Radiation (03CH02-KS)
Amplifier	EM	EM01G18G	060840	1Ghz-18Ghz	Oct. 09, 2024	Apr. 21, 2025	Oct. 08, 2025	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Apr. 21, 2025	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Apr. 21, 2025	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Apr. 21, 2025	NCR	Radiation (03CH02-KS)

NCR: No Calibration Required

5. Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.84 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)-10CH01-KS Horizontally

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.12 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)-10CH01-KS Vertically

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.12 dB
---	---------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)-03CH02-KS

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.12 dB
---	---------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)-03CH02-KS

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.30 dB
---	---------

----- THE END -----