


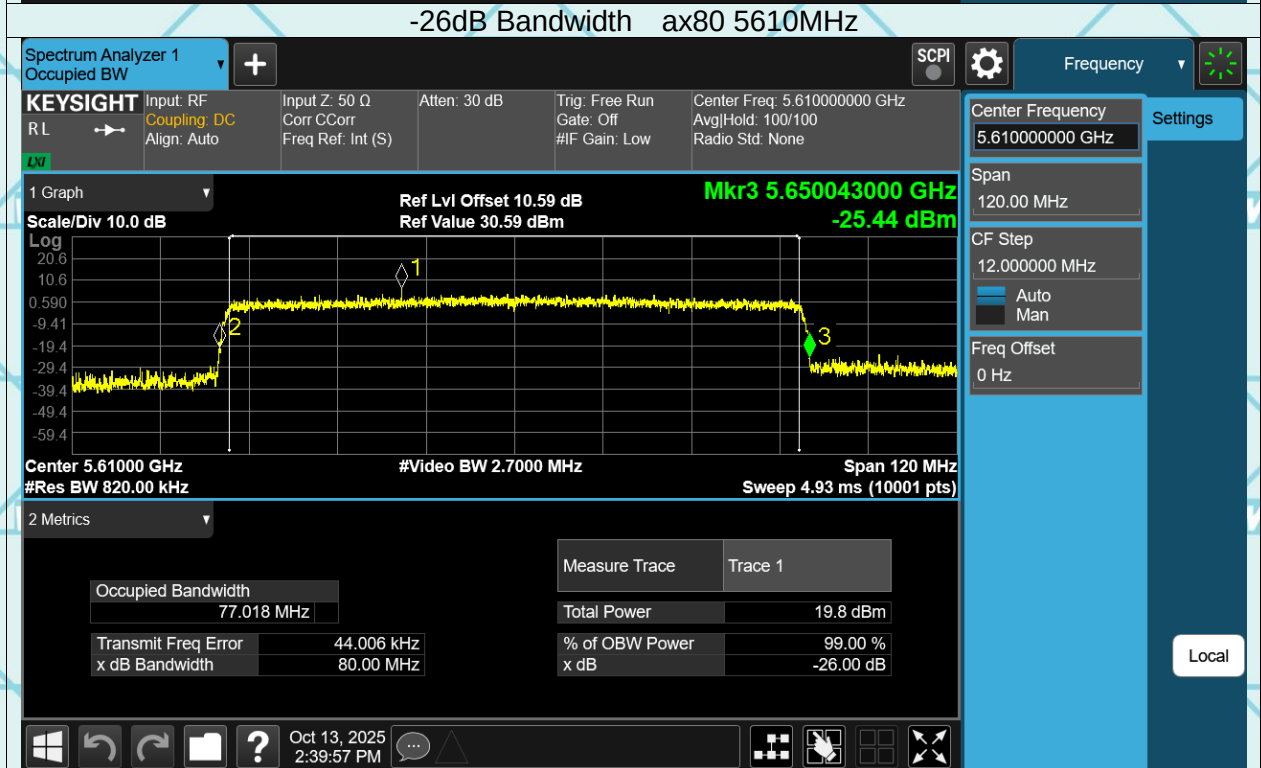
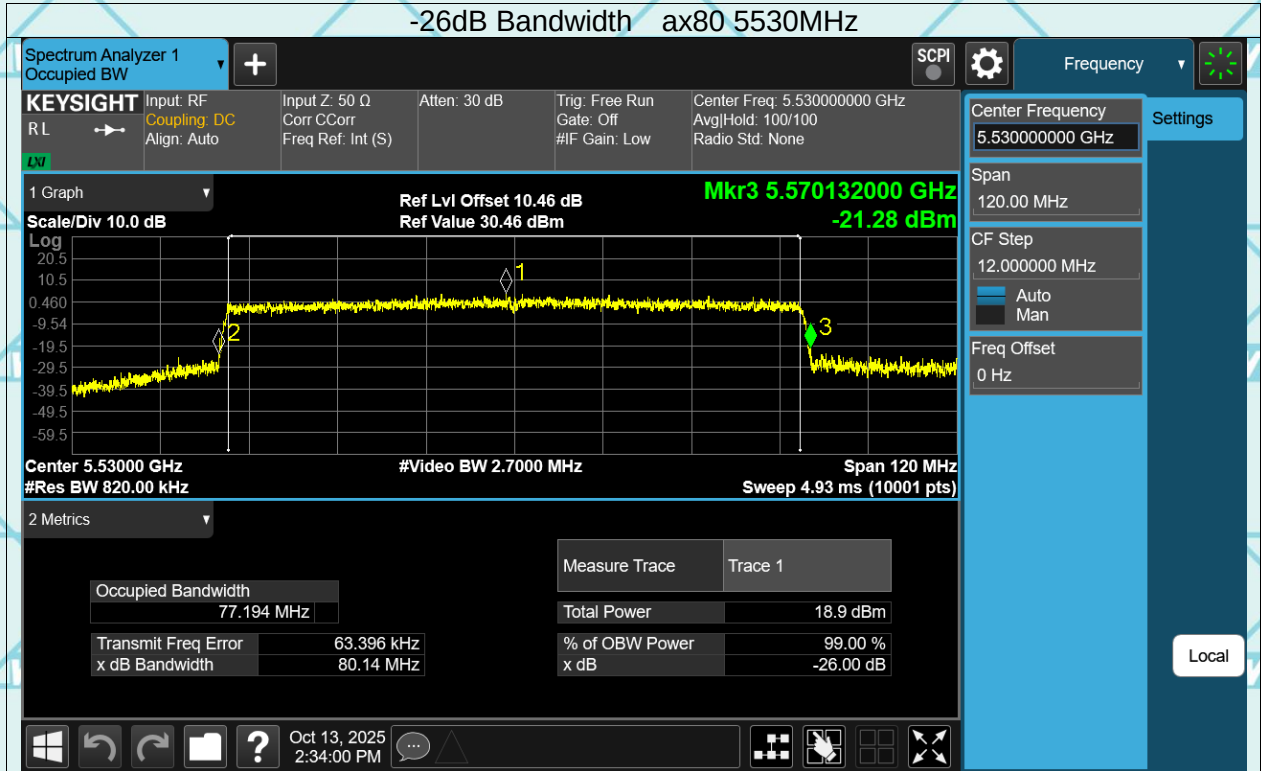
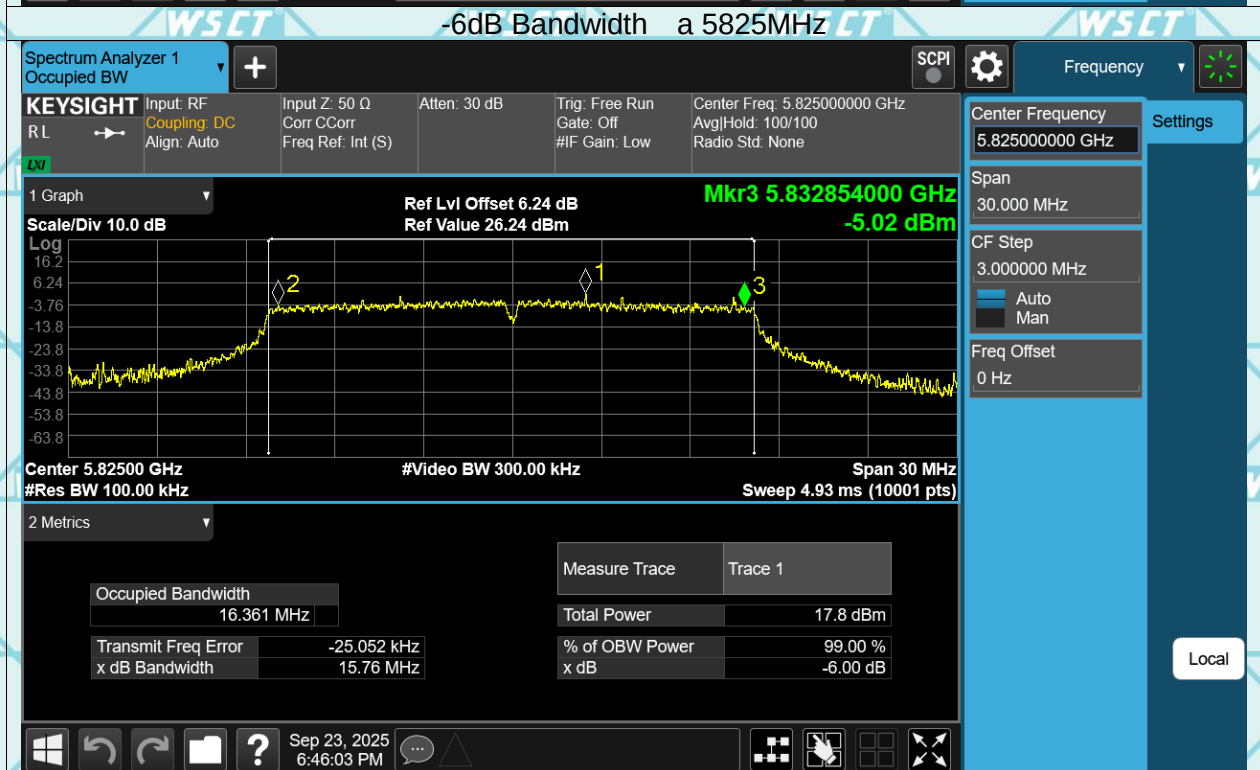



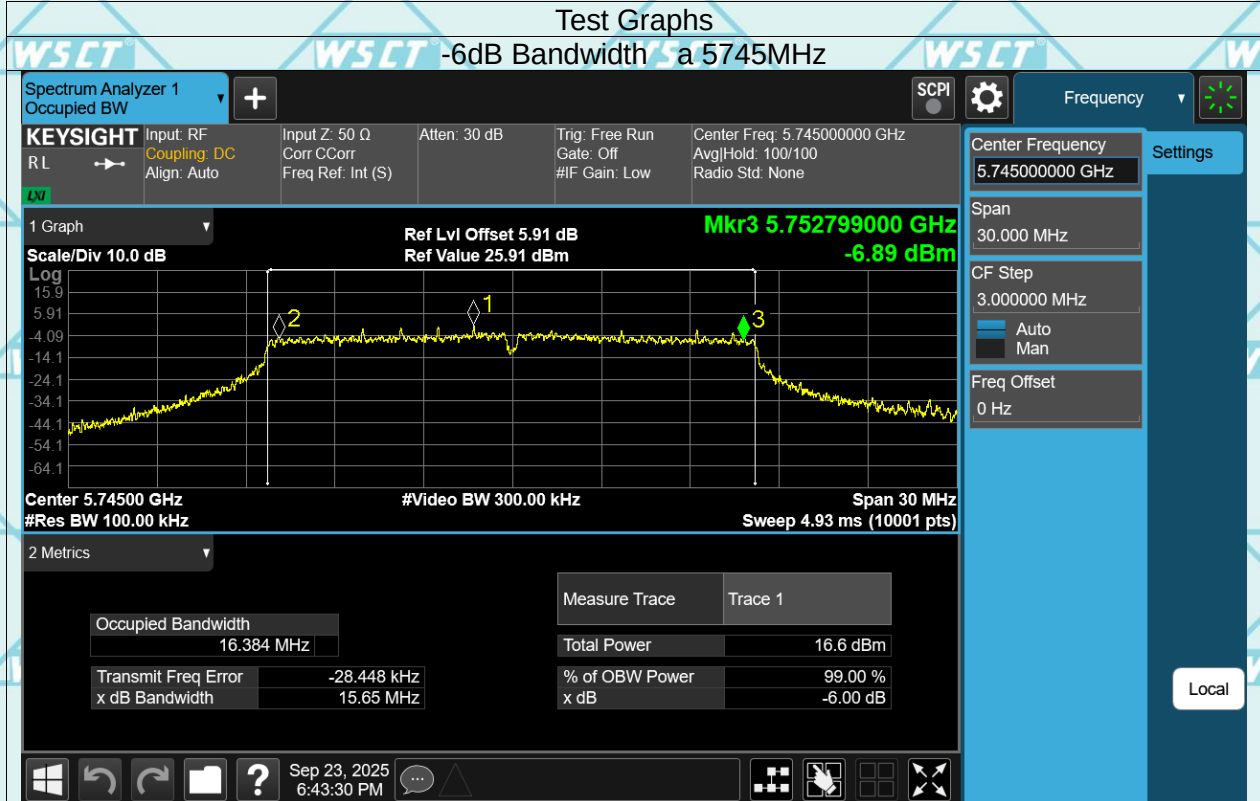




Report No.: WSCT-ANAB-R&E250900074A-Wi-Fi2 Issued Date: 19 December 2025



-6dB&99% Bandwidth


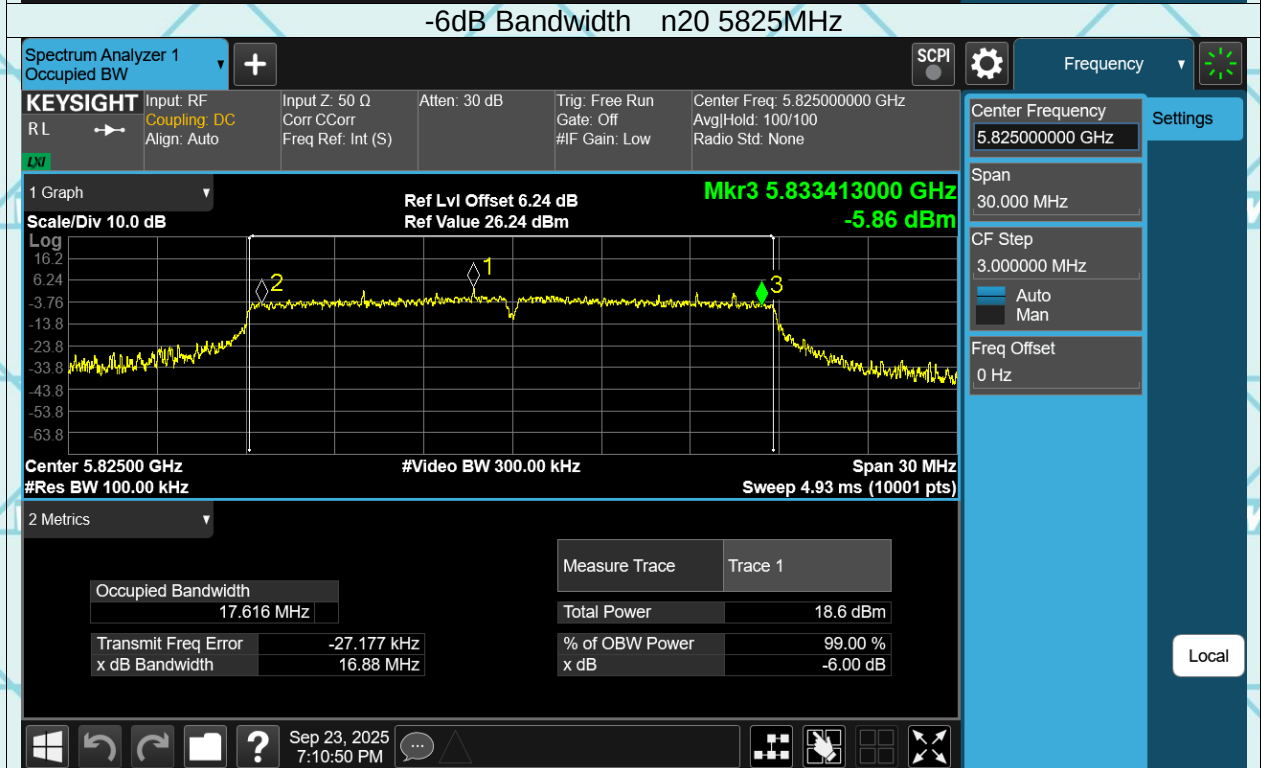



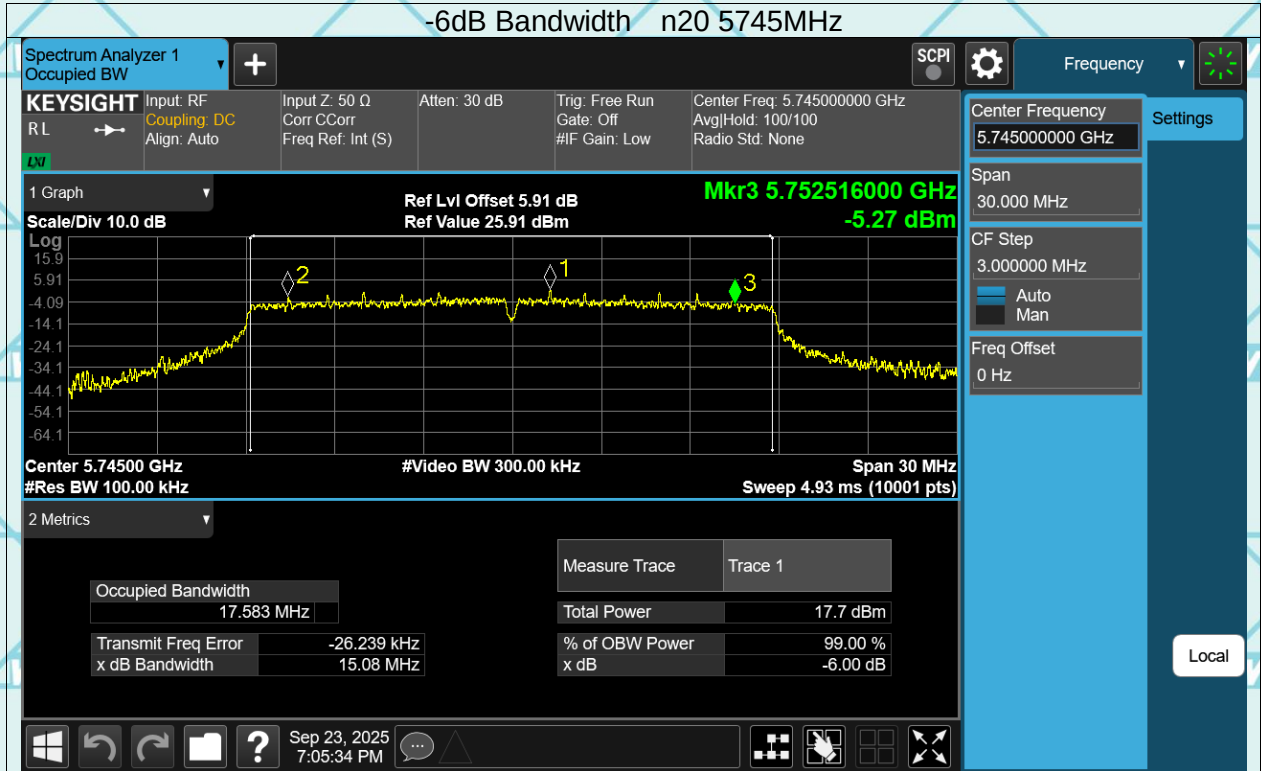


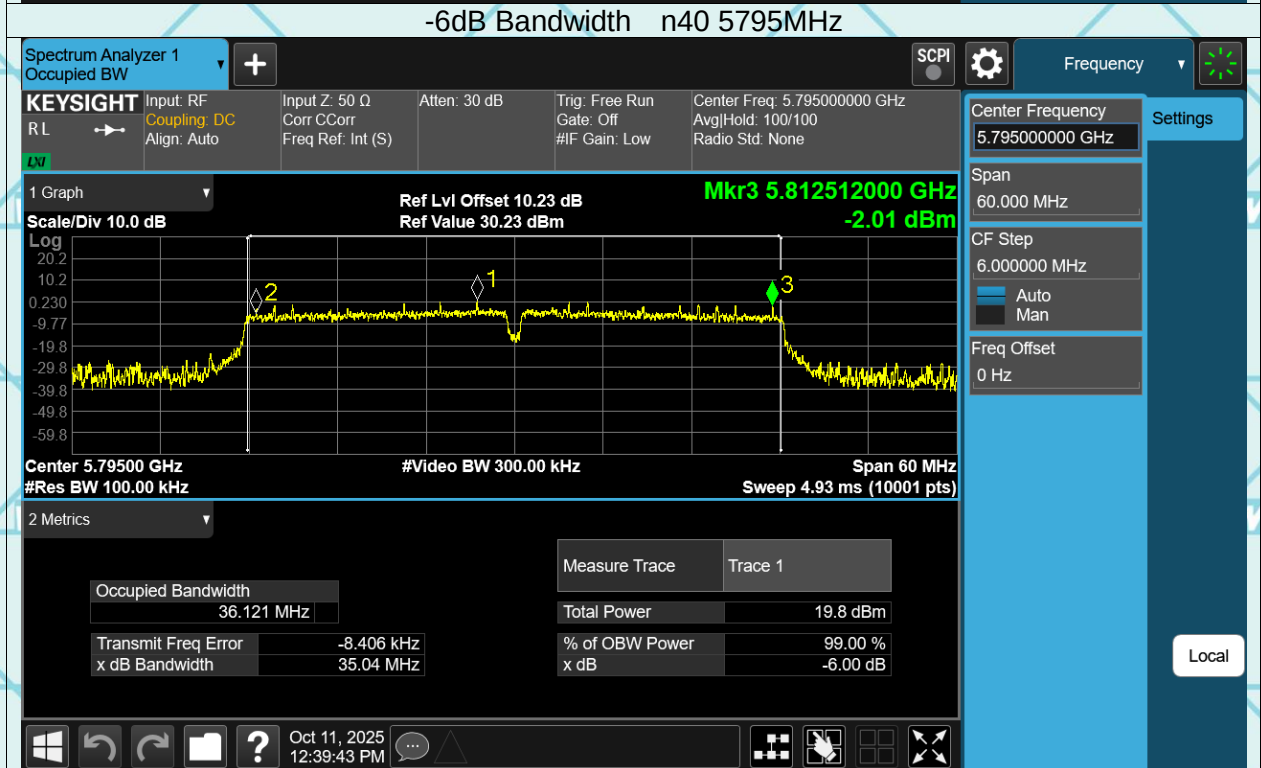
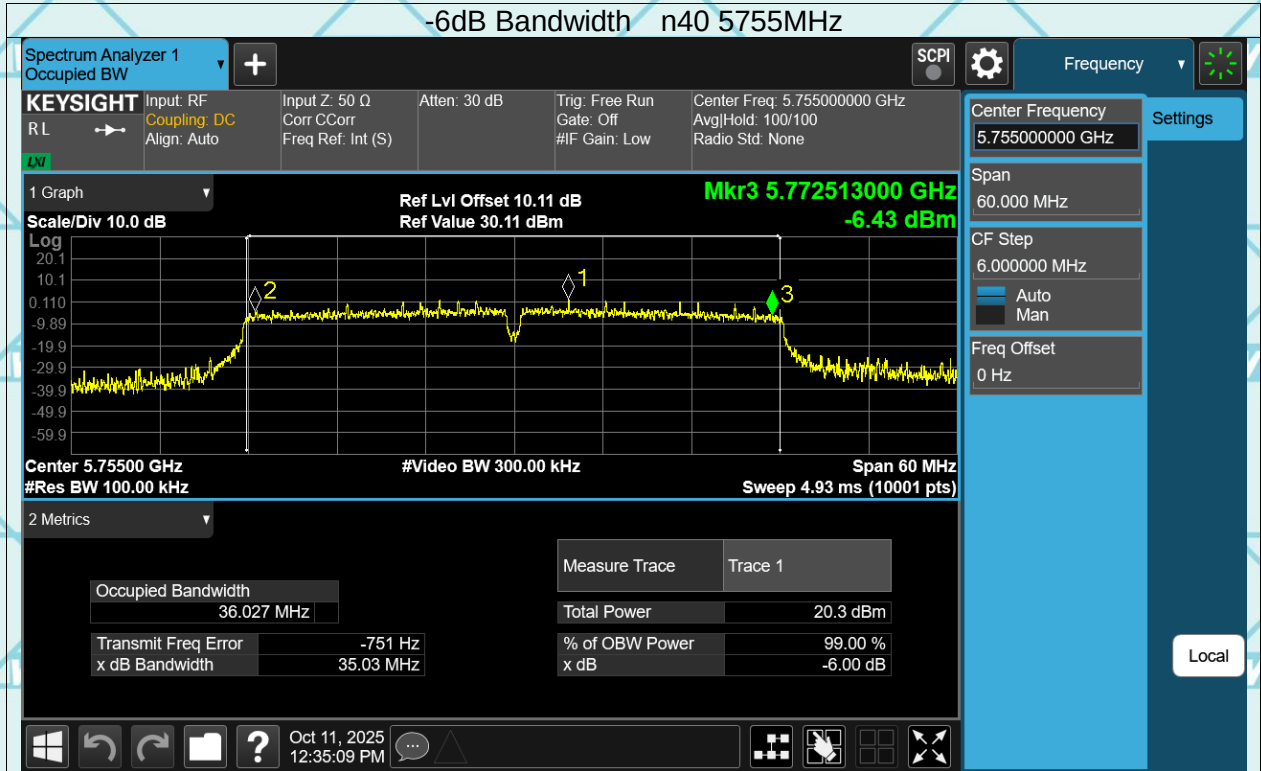


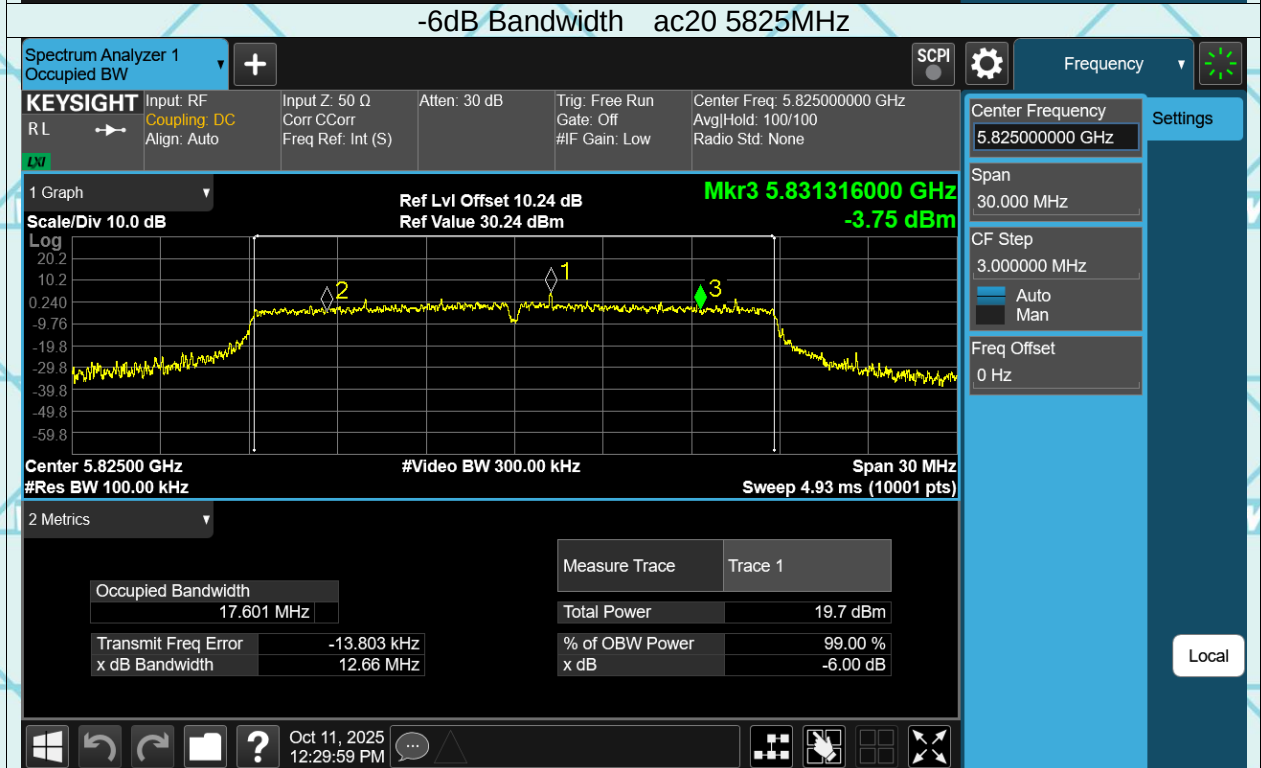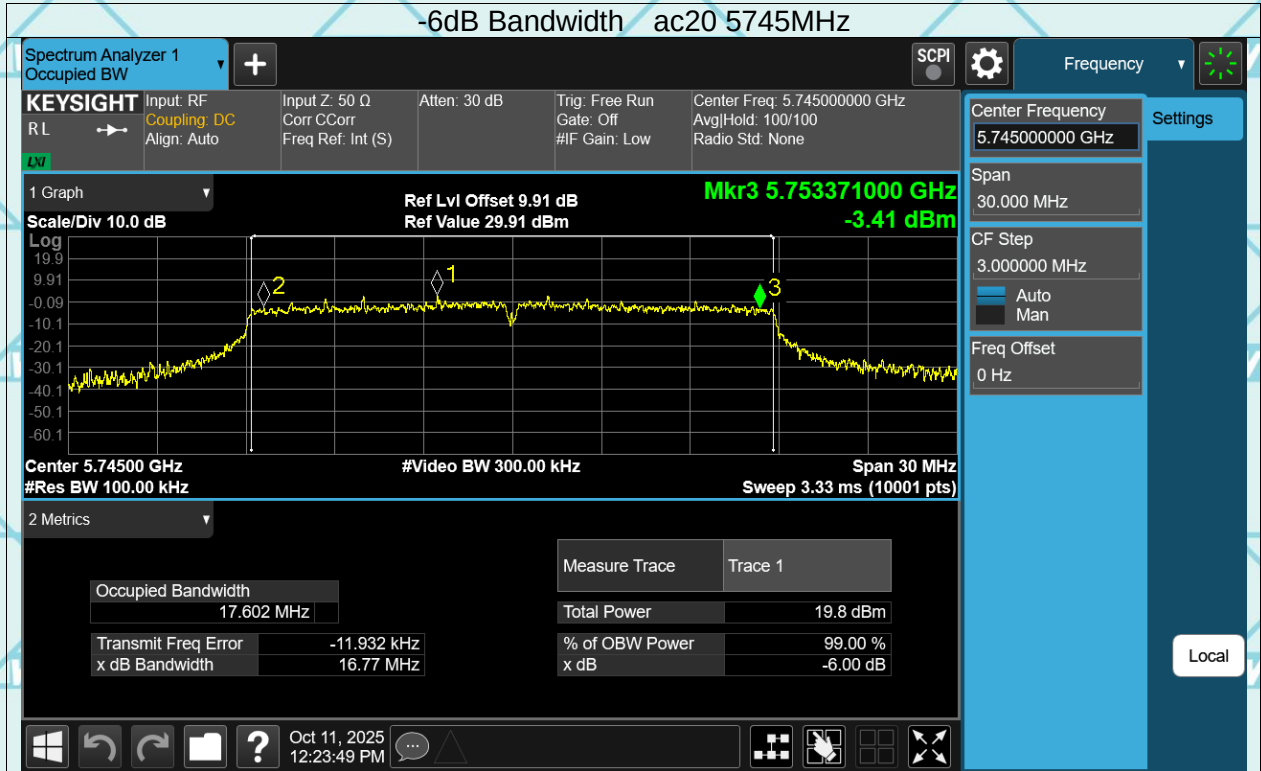

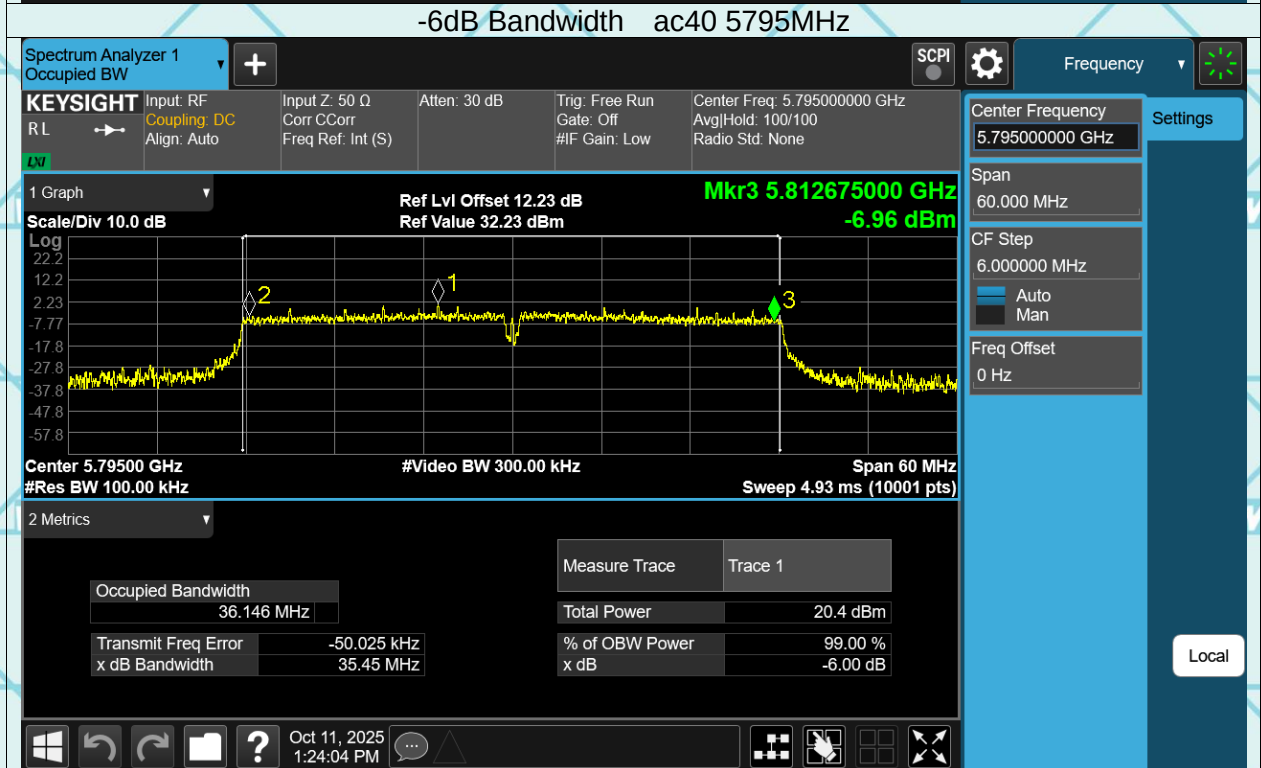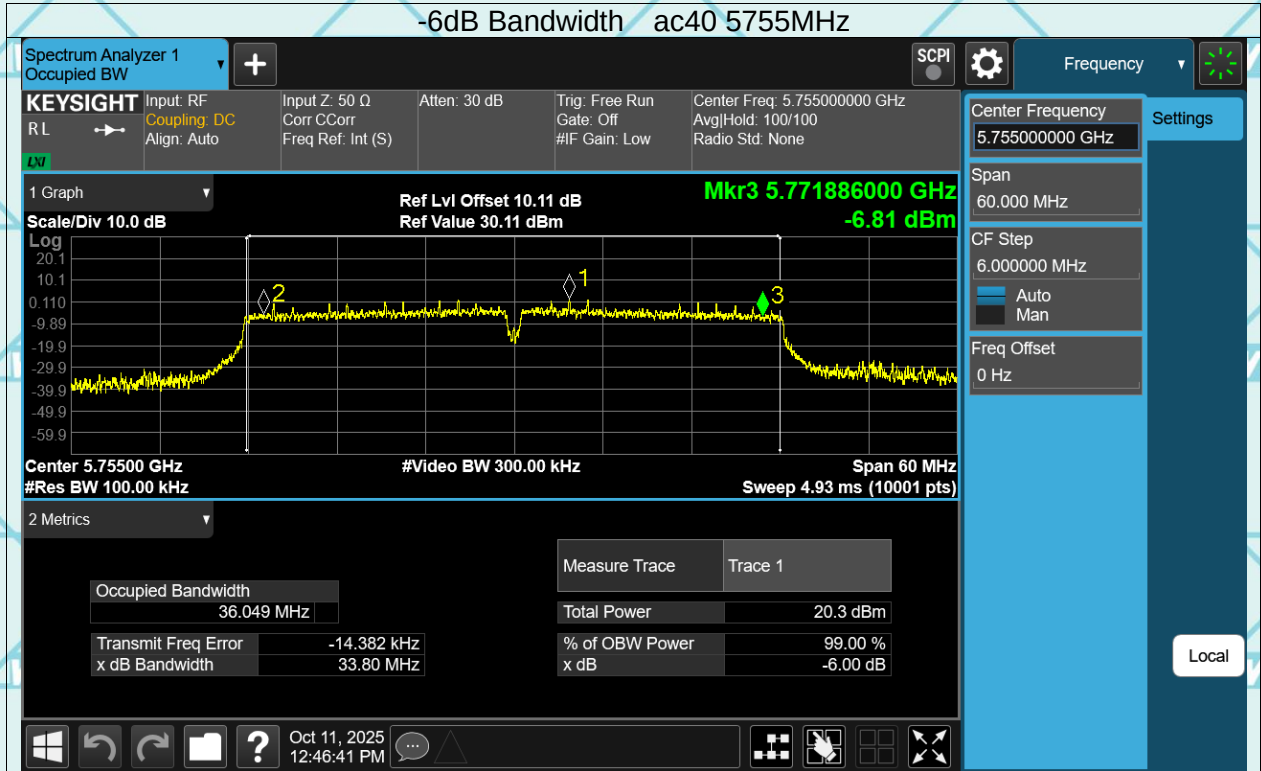

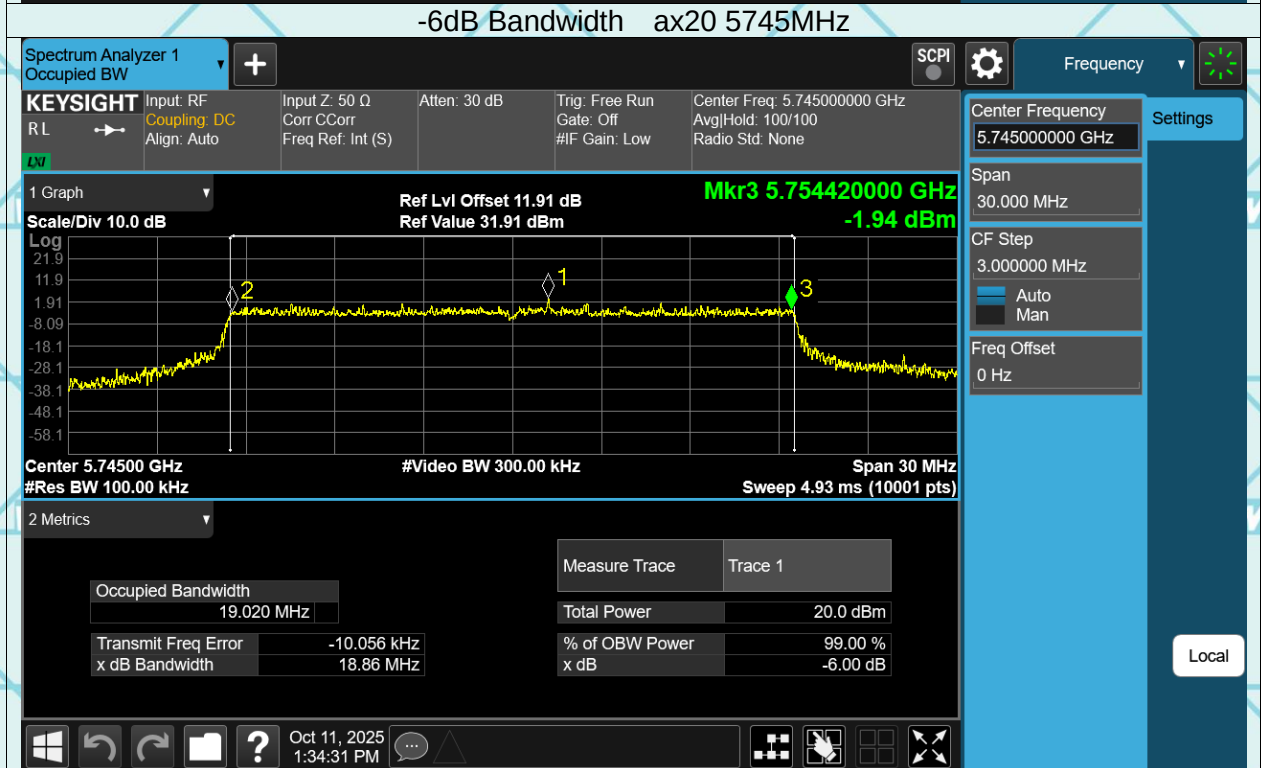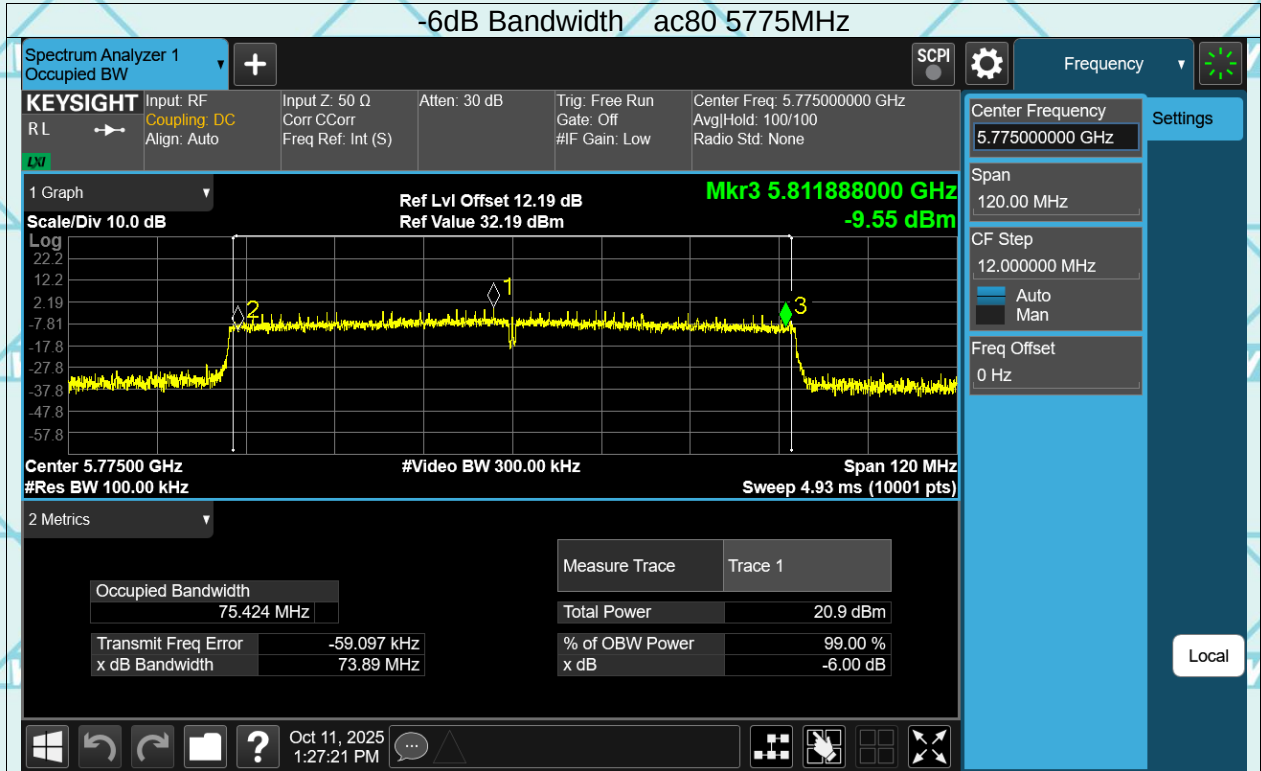

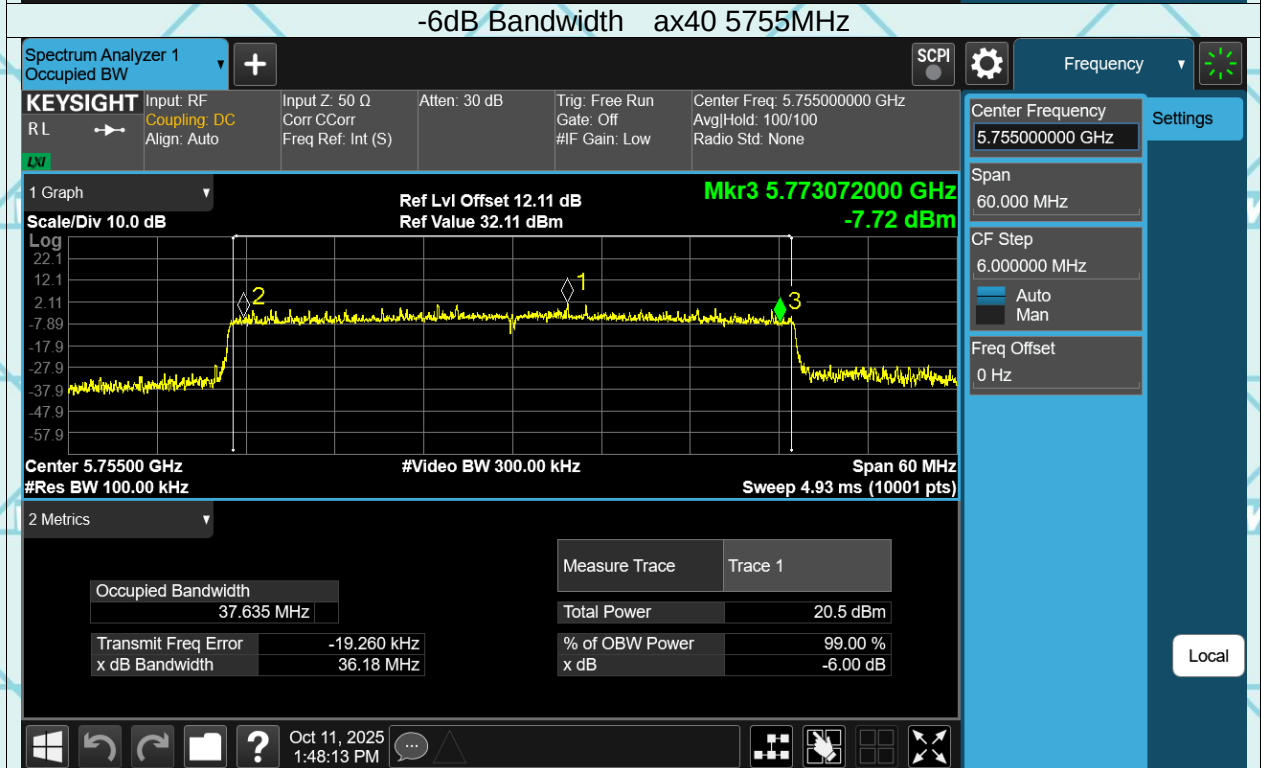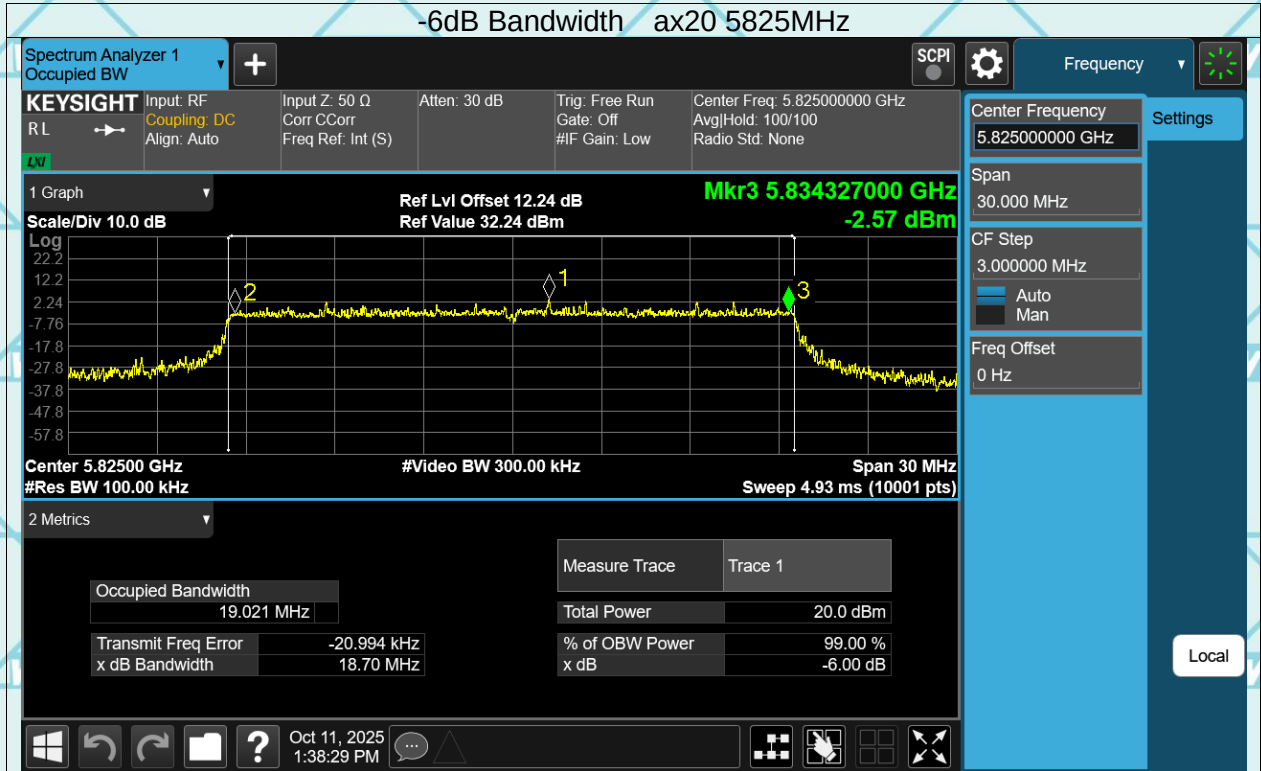

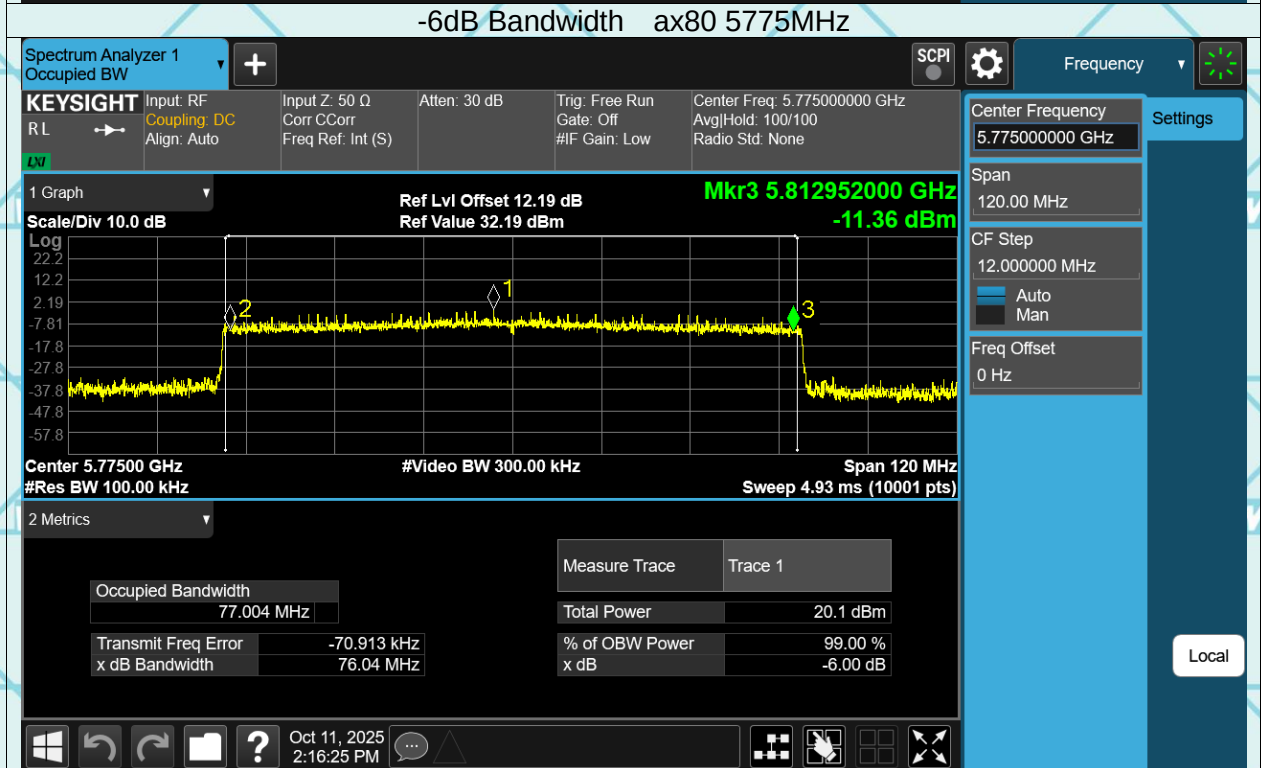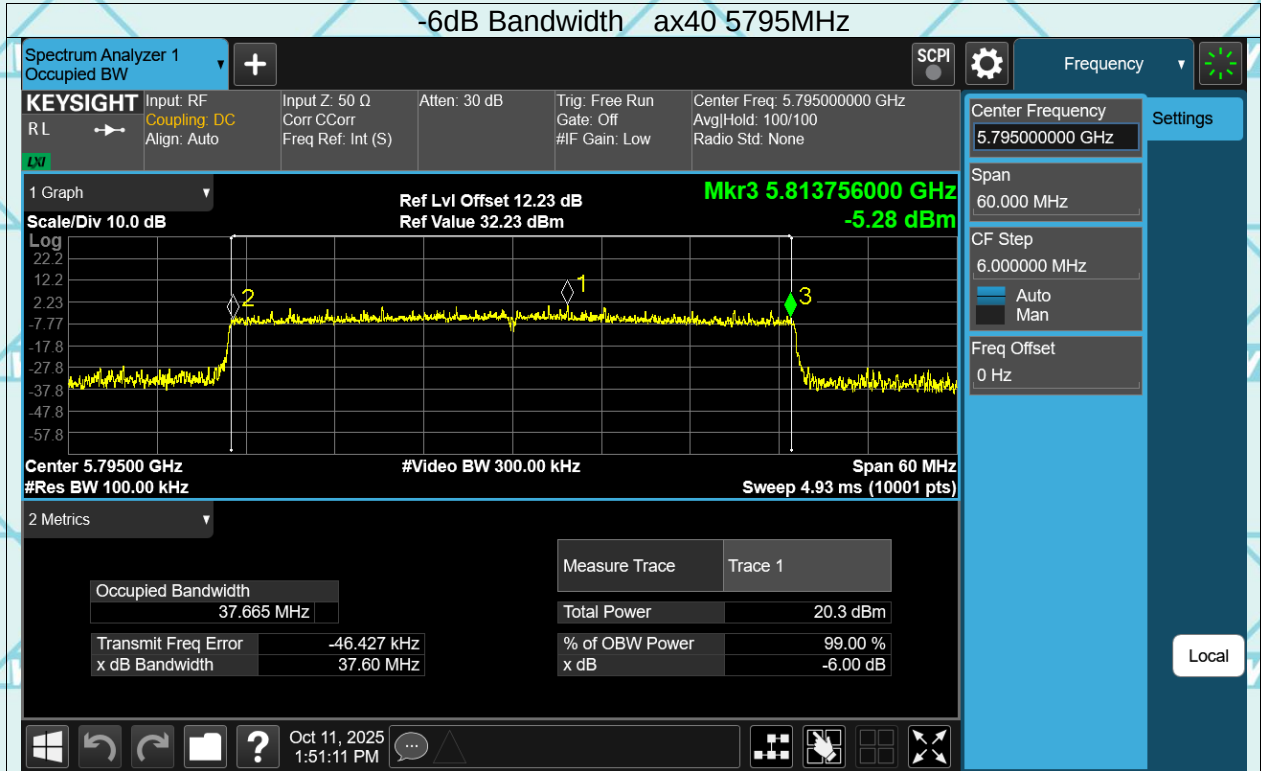

7.6 MAXIMUM CONDUCTED OUTPUT POWER

Product	: EUT-Sample	Test Mode	: See section 3.4
Test Item	: Maximum Conducted Output Power	Temperature	: 25 °C
Test Voltage	: DC 3.91V	Humidity	: 56%RH
Test Result	: PASS		

Mode	Frequency (MHz)	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
a	5180	5.88	1.84	7.72	24	Pass
a	5240	8.54	1.75	10.29	24	Pass
a	5260	8.59	1.84	10.43	24	Pass
a	5320	10.03	1.75	11.78	24	Pass
a	5500	12.64	1.77	14.41	24	Pass
a	5700	13.11	1.82	14.93	24	Pass
a	5745	11.28	1.89	13.17	30	Pass
a	5825	9.95	1.84	11.79	30	Pass
n20	5180	7.73	1.94	9.67	24	Pass
n20	5240	9.4	1.97	11.37	24	Pass
n20	5260	10.27	1.87	12.14	24	Pass
n20	5320	10.79	1.95	12.74	24	Pass
n20	5500	13.78	1.94	15.72	24	Pass
n20	5700	11.66	1.96	13.62	24	Pass
n20	5745	11.94	1.87	13.81	30	Pass
n20	5825	10.82	1.89	12.71	30	Pass
n40	5190	5.12	1.87	6.99	24	Pass
n40	5230	5.76	1.75	7.51	24	Pass
n40	5270	6.78	1.84	8.62	24	Pass
n40	5310	7.24	1.89	9.13	24	Pass
n40	5510	10.62	1.87	12.49	24	Pass
n40	5670	10.96	1.89	12.85	24	Pass
n40	5755	10.81	1.87	12.68	30	Pass
n40	5795	10.8	0.11	10.91	30	Pass
ac20	5180	6.55	1.94	8.49	24	Pass
ac20	5240	6.55	1.94	8.49	24	Pass
ac20	5260	6.93	1.94	8.87	24	Pass
ac20	5320	8.97	1.6	10.57	24	Pass
ac20	5500	11.73	1.6	13.33	24	Pass
ac20	5700	12.1	1.6	13.7	24	Pass
ac20	5745	12.7	1.86	14.56	30	Pass
ac20	5825	12.27	1.95	14.22	30	Pass
ac40	5190	5.04	1.31	6.35	24	Pass
ac40	5230	5.65	1.31	6.96	24	Pass
ac40	5270	6.78	1.44	8.22	24	Pass
ac40	5310	7.9	1.45	9.35	24	Pass
ac40	5510	10.34	0.98	11.32	24	Pass
ac40	5670	11.36	1.86	13.22	24	Pass
ac40	5755	11.76	1.95	13.71	30	Pass
ac40	5795	11.63	1.95	13.58	30	Pass
ac80	5210	4.3	1.31	5.61	24	Pass
ac80	5290	8.18	1.86	10.04	24	Pass
ac80	5530	9.25	1.95	11.2	24	Pass
ac80	5610	10.14	1.25	11.39	24	Pass
ac80	5775	10.79	1.52	12.31	30	Pass
ax20	5180	4.5	2.88	7.38	24	Pass
ax20	5240	6.12	1.97	8.09	24	Pass
ax20	5260	6.75	2.09	8.84	24	Pass
ax20	5320	7.62	2	9.62	24	Pass
ax20	5500	11.09	1.97	13.06	24	Pass
ax20	5700	10.92	1.97	12.89	24	Pass
ax20	5745	12.09	2.37	14.46	30	Pass
ax20	5825	11.89	2.36	14.25	30	Pass
ax40	5190	4.38	2.37	6.75	24	Pass
ax40	5230	5.51	2.37	7.88	24	Pass

Report No.: WSCT-ANAB-R&E250900074A-Wi-Fi2

Issued Date: 19 December 2025

ax40	5270	6.17	2.37	8.54	24	Pass
ax40	5310	9.4	1.62	11.02	24	Pass
ax40	5510	10.45	1.62	12.07	24	Pass
ax40	5670	10.55	1.62	12.17	24	Pass
ax40	5755	11.62	1.62	13.24	30	Pass
ax40	5795	11.51	1.02	12.53	30	Pass
ax80	5210	3.74	1.99	5.73	24	Pass
ax80	5290	4.28	1.69	5.97	24	Pass
ax80	5530	7.57	1.69	9.26	24	Pass
ax80	5610	9.13	1.18	10.31	24	Pass
ax80	5775	9.15	1.45	10.6	30	Pass

