


Occupied Bandwidth


5.18 Occupied Bandwidth for SA Support PI2

BPSK_Part22-24-27(NTNV)(Channel:663666, Bandwidth:50, SCS:30,
OFDM:CP-OFDM, Modulation:Pi/2-BPSK, RB Number:133, RB Position:0)

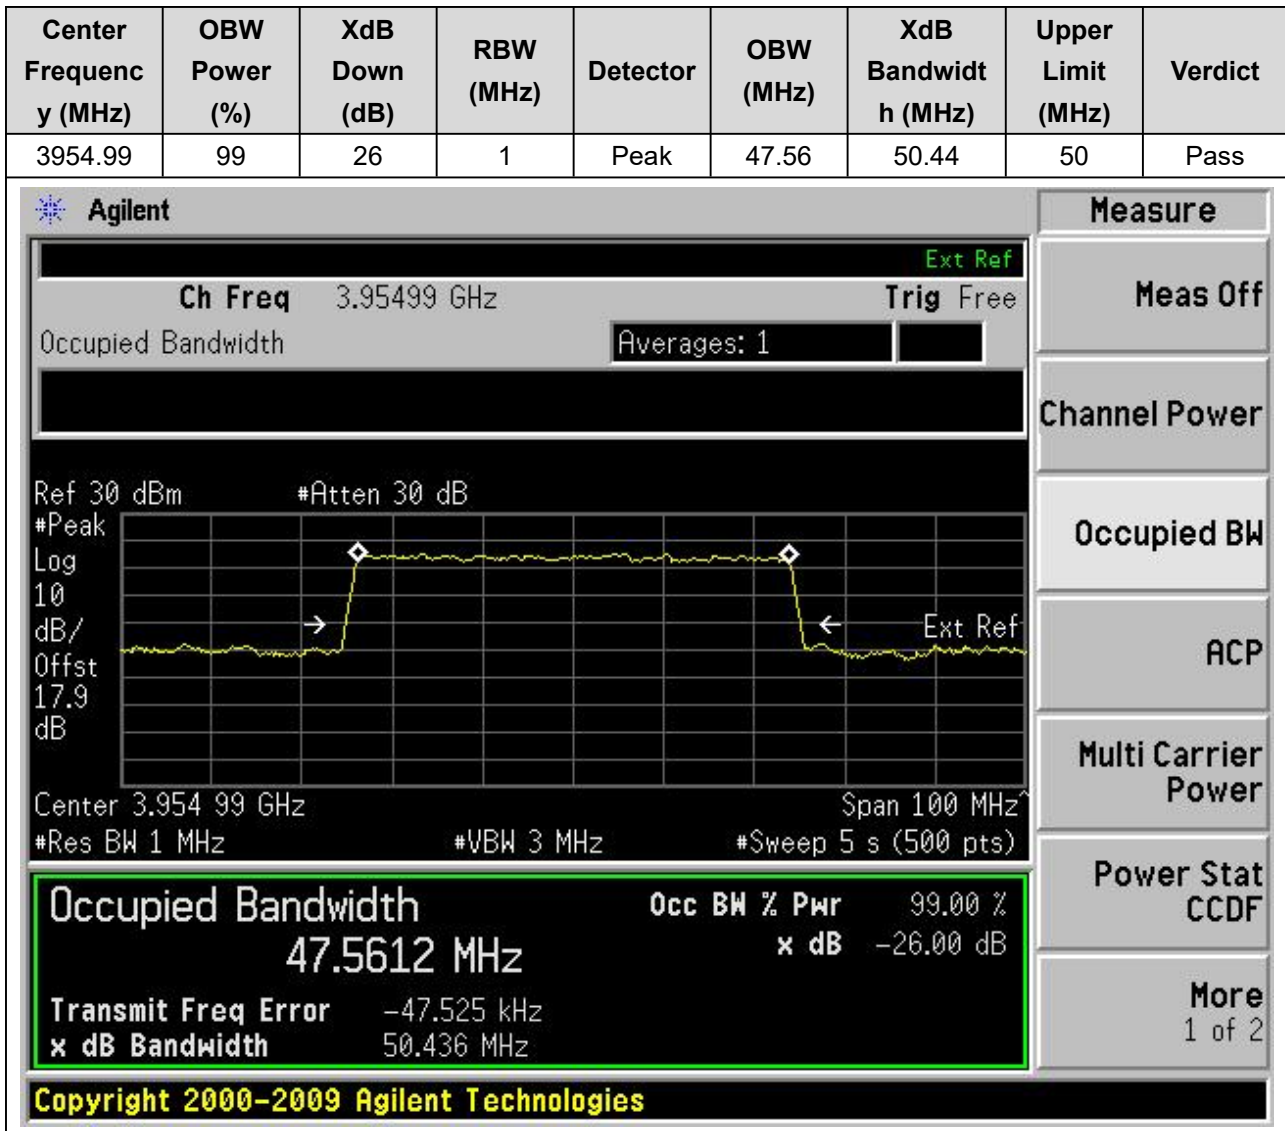

5.19 Occupied Bandwidth for SA Support PI2


BPSK_Part22-24-27(NTNV)(Channel:648334, Bandwidth:50, SCS:30,
OFDM:CP-OFDM, Modulation:QPSK, RB Number:133, RB Position:0)

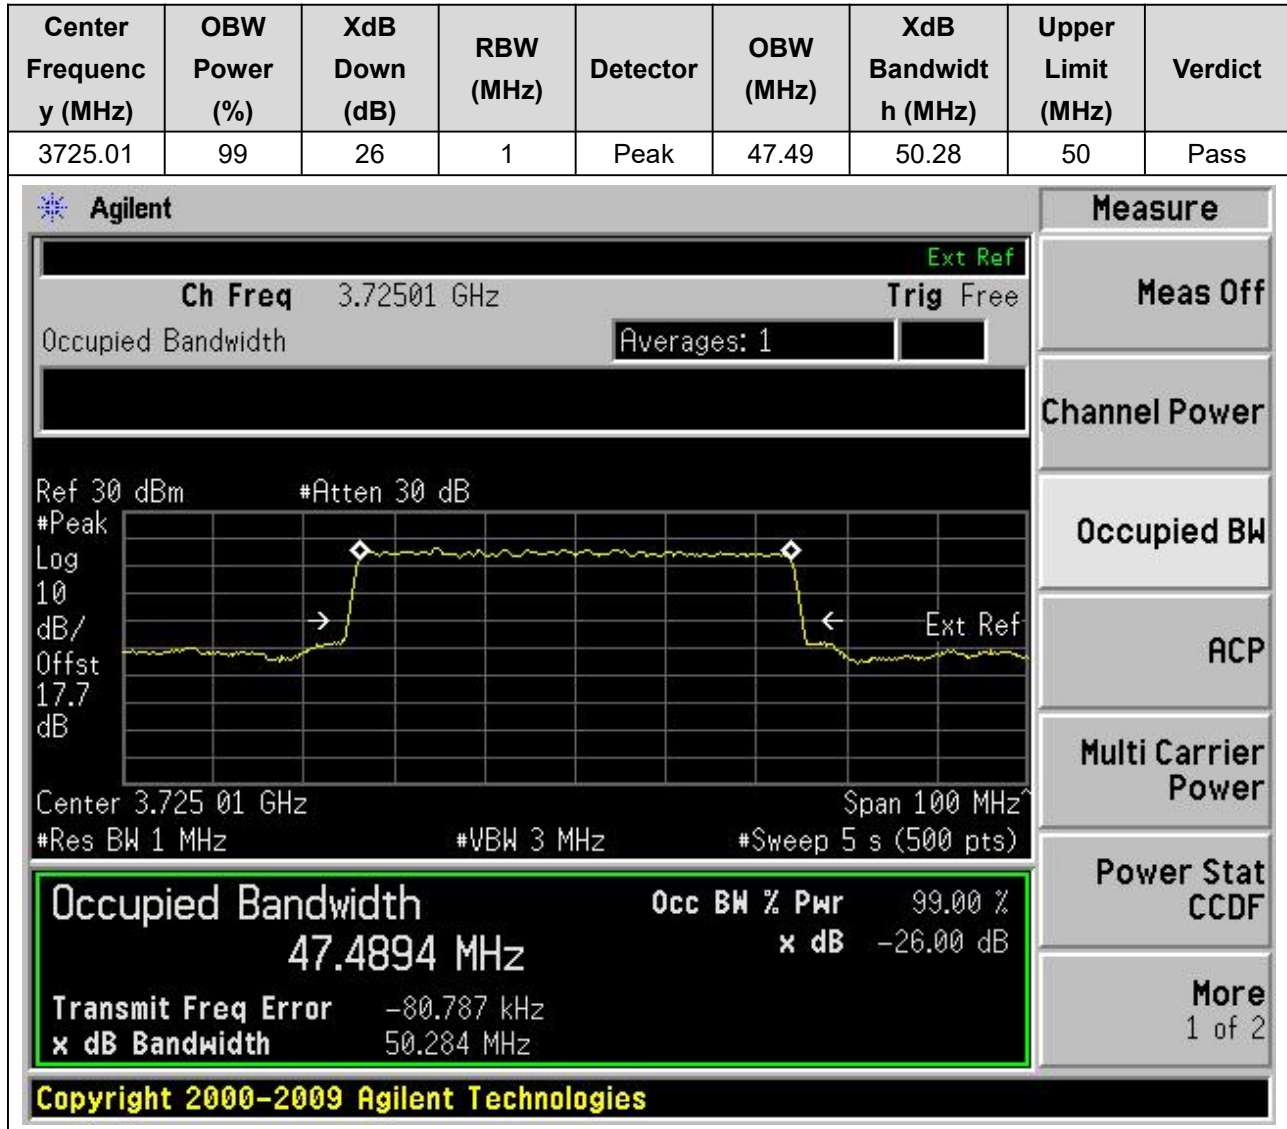

5.20 Occupied Bandwidth for SA Support PI2

BPSK_Part22-24-27(NTNV)(Channel:656000, Bandwidth:50, SCS:30,
OFDM:CP-OFDM, Modulation:QPSK, RB Number:133, RB Position:0)


Center Frequency (MHz)	OBW Power (%)	XdB Down (dB)	RBW (MHz)	Detector	OBW (MHz)	XdB Bandwidth (MHz)	Upper Limit (MHz)	Verdict
3840	99	26	1	Peak	47.51	50.28	50	Pass

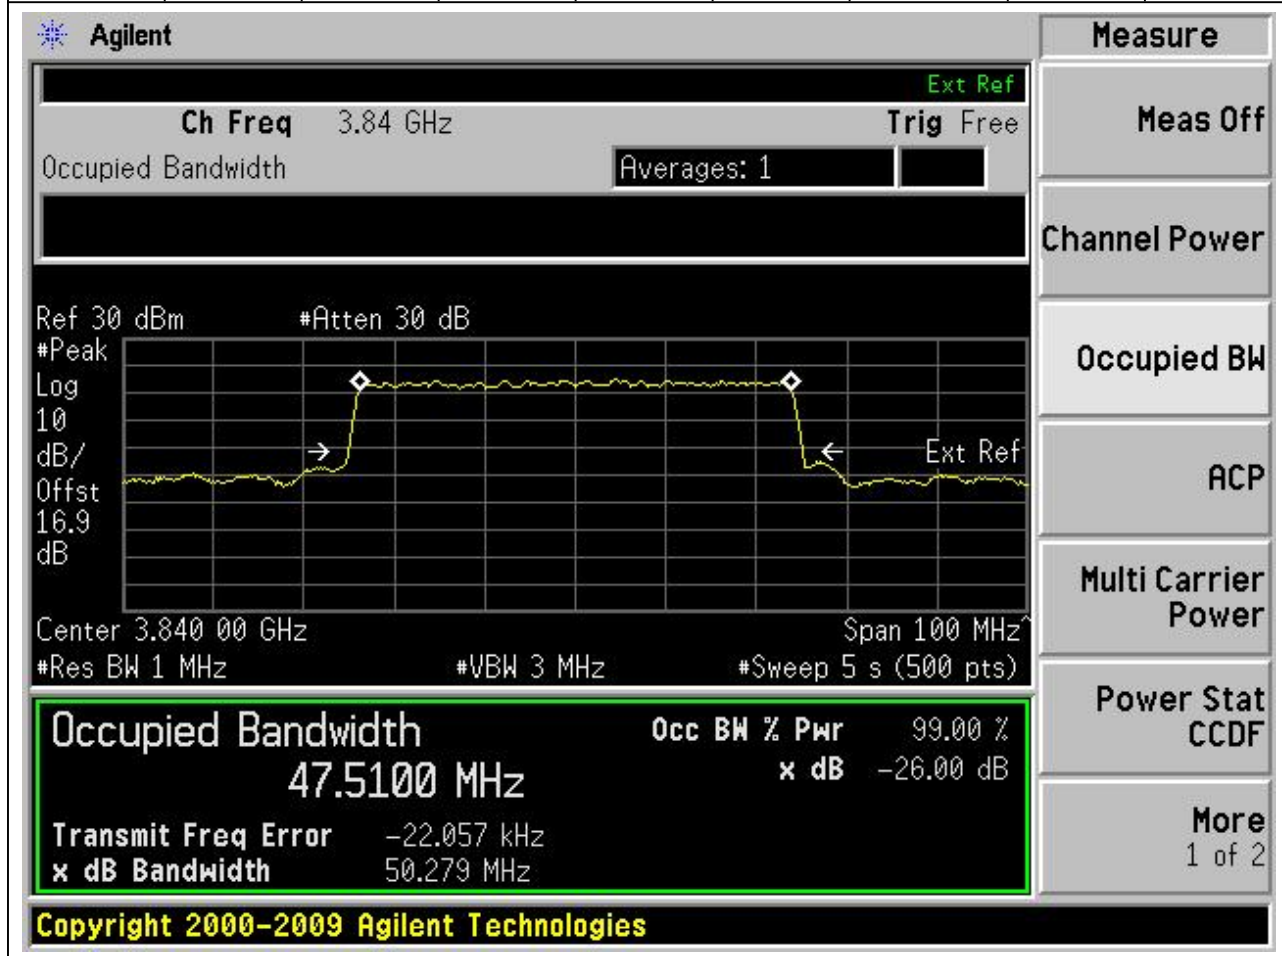

5.21 Occupied Bandwidth for SA Support PI2


BPSK_Part22-24-27(NTNV)(Channel:663666, Bandwidth:50, SCS:30,
OFDM:CP-OFDM, Modulation:QPSK, RB Number:133, RB Position:0)

Center Frequency (MHz)	OBW Power (%)	XdB Down (dB)	RBW (MHz)	Detector	OBW (MHz)	XdB Bandwidth (MHz)	Upper Limit (MHz)	Verdict
3954.99	99	26	1	Peak	47.51	50.29	50	Pass

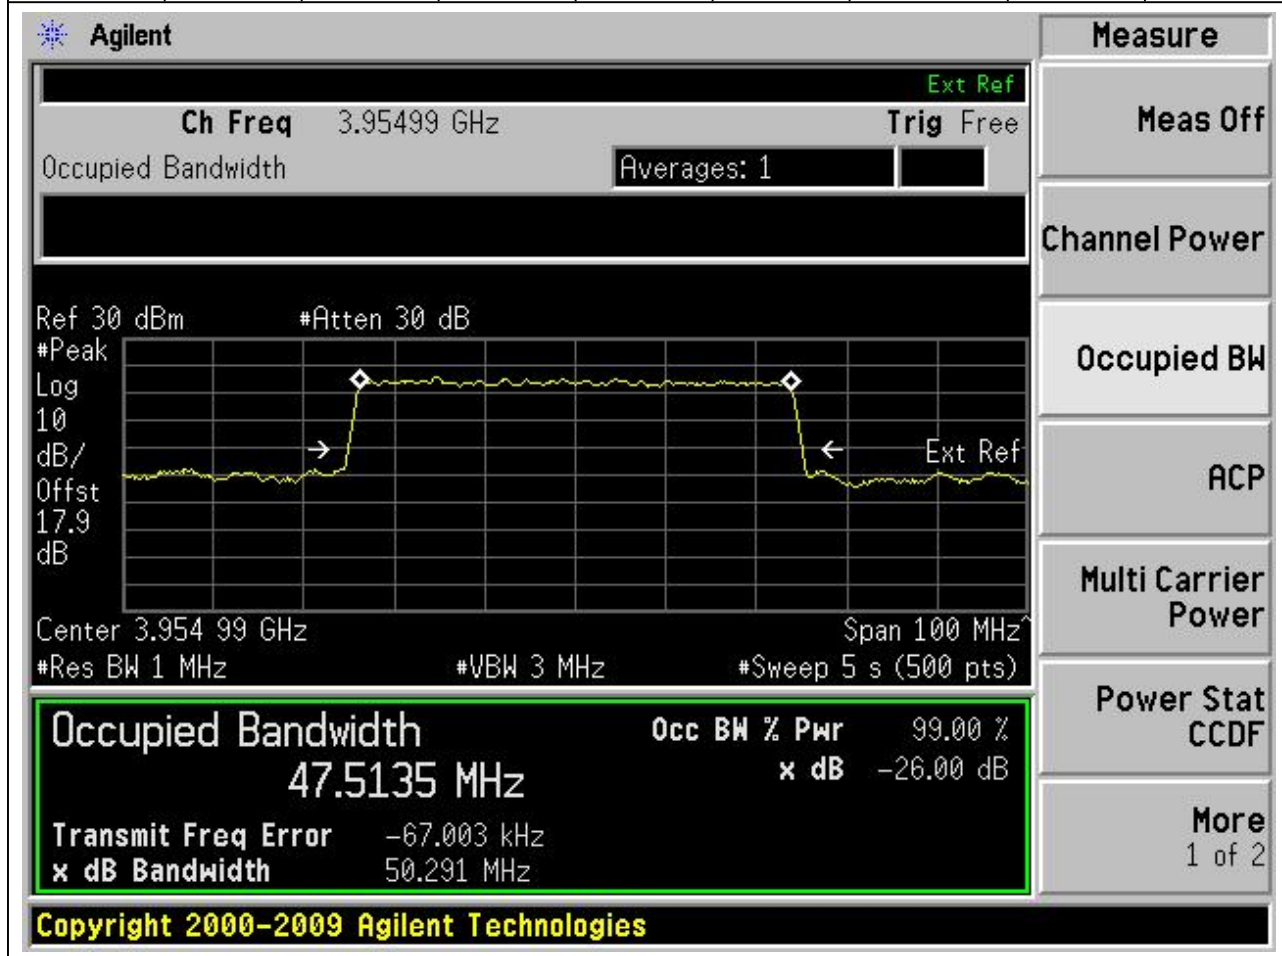


5.22 Occupied Bandwidth for SA Support PI2

BPSK_Part22-24-27(NTNV)(Channel:648334, Bandwidth:50, SCS:30,
OFDM:CP-OFDM, Modulation:16QAM, RB Number:133, RB Position:0)

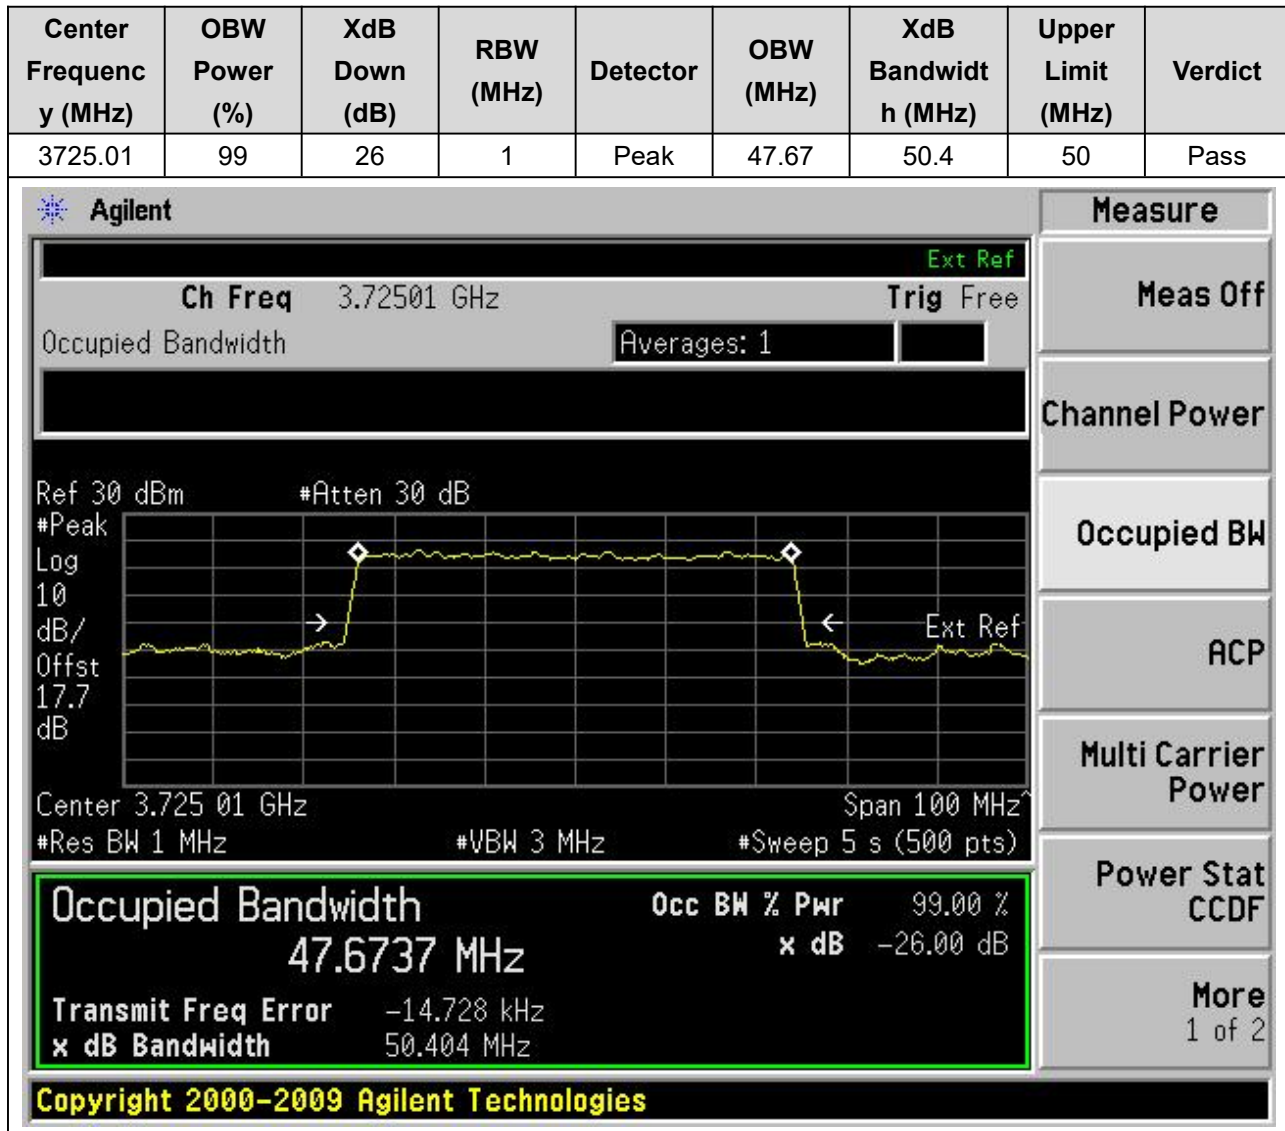


5.23 Occupied Bandwidth for SA Support PI2

BPSK_Part22-24-27(NTNV)(Channel:656000, Bandwidth:50, SCS:30,
OFDM:CP-OFDM, Modulation:16QAM, RB Number:133, RB Position:0)

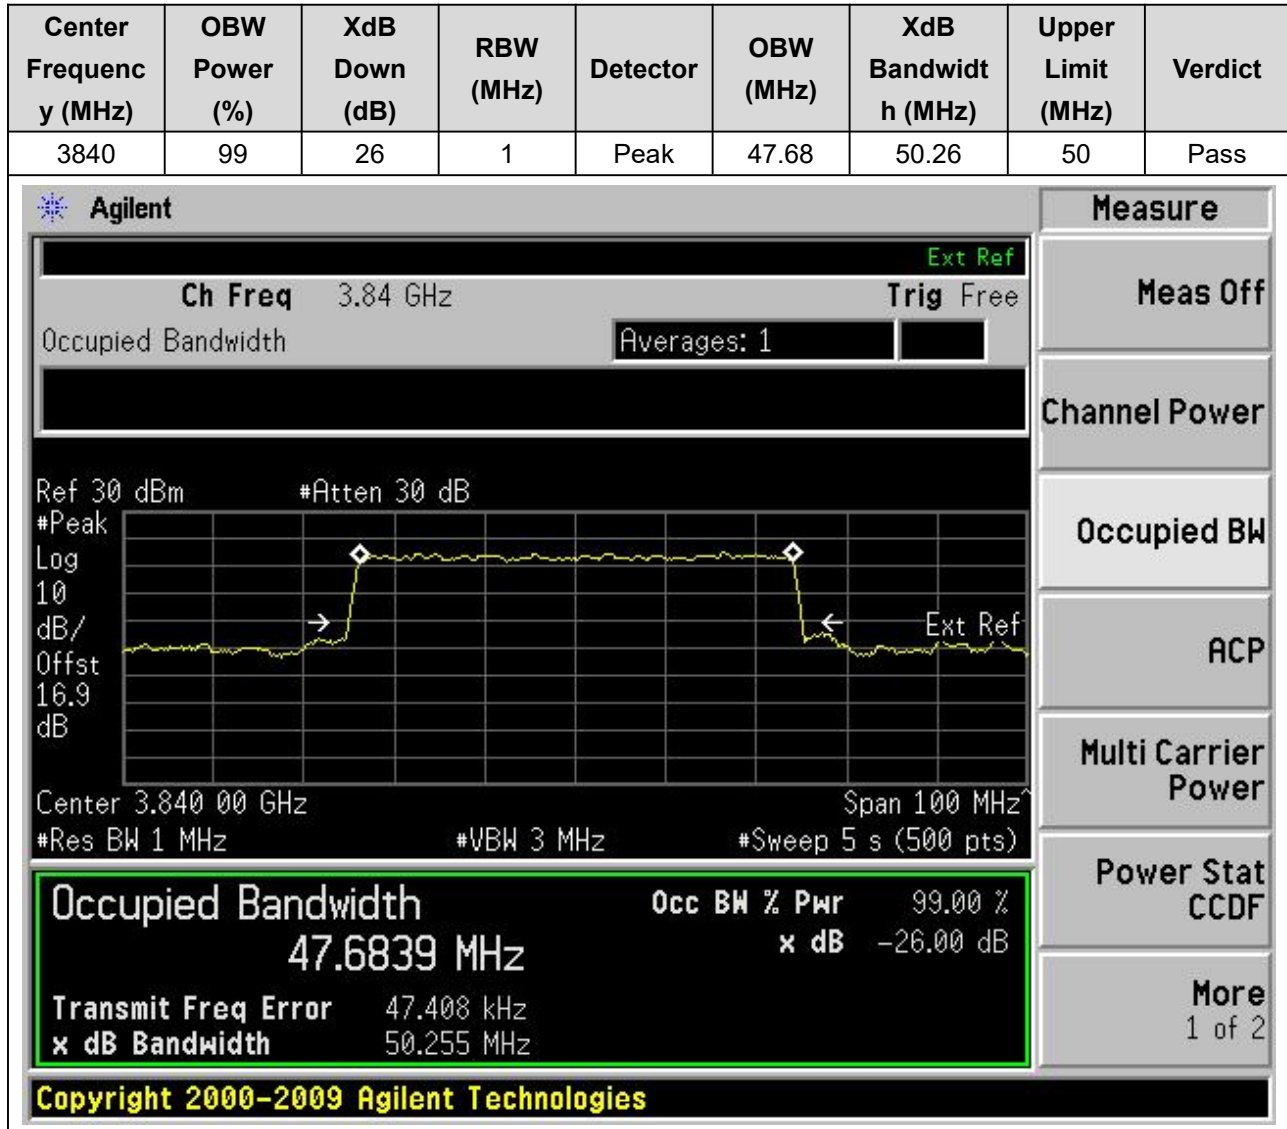

5.24 Occupied Bandwidth for SA Support PI2


BPSK_Part22-24-27(NTNV)(Channel:663666, Bandwidth:50, SCS:30,
OFDM:CP-OFDM, Modulation:16QAM, RB Number:133, RB Position:0)

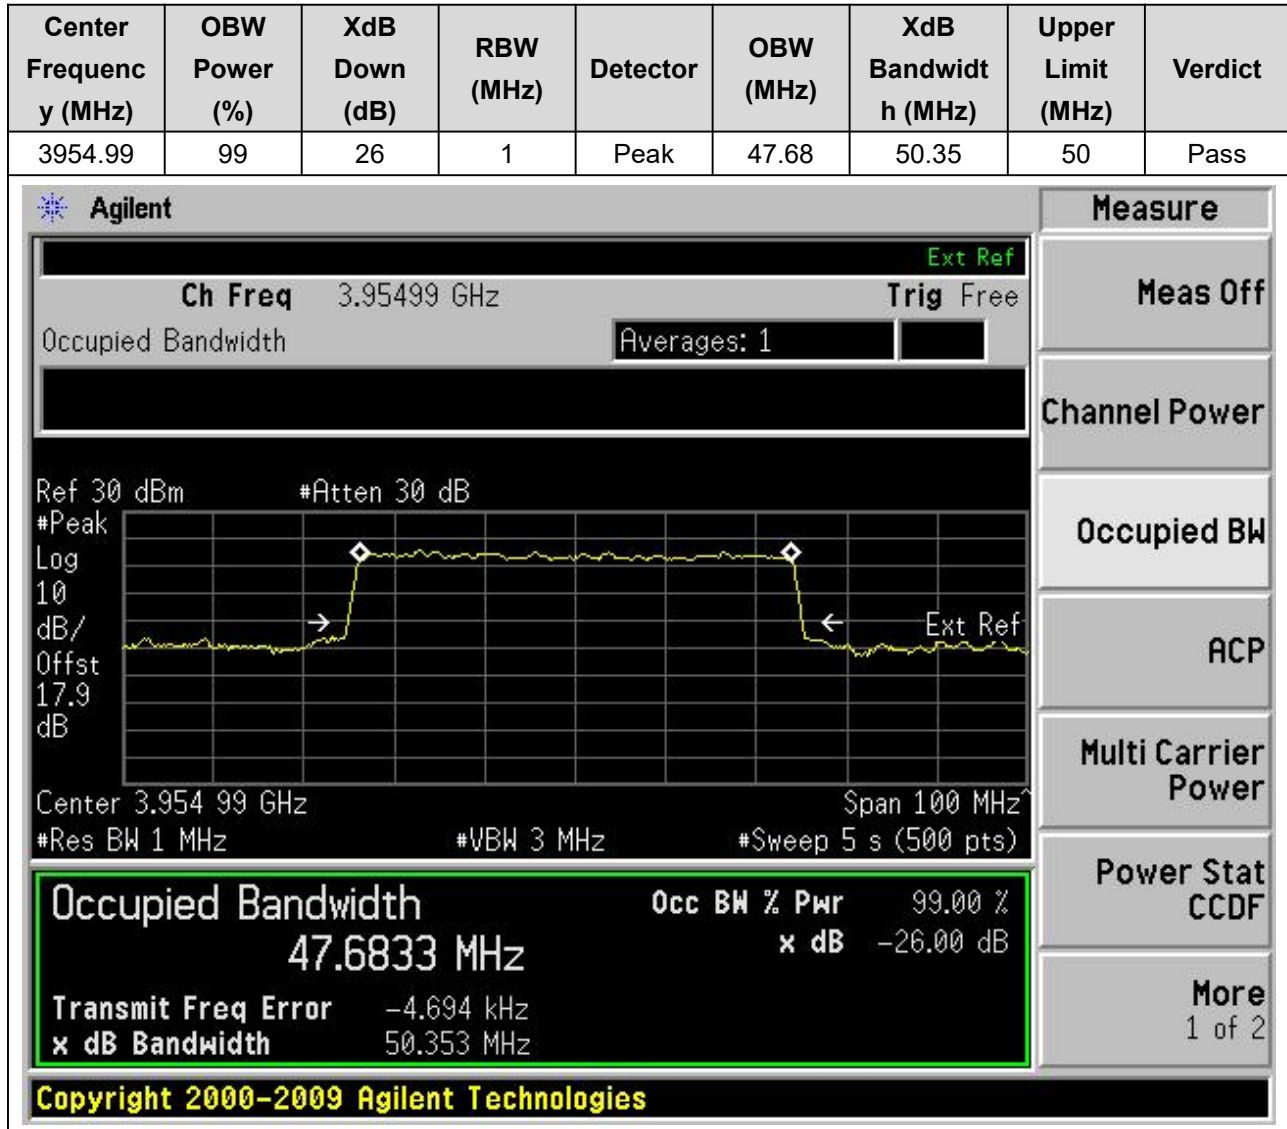

5.25 Occupied Bandwidth for SA Support PI2

BPSK_Part22-24-27(NTNV)(Channel:648334, Bandwidth:50, SCS:30,
OFDM:CP-OFDM, Modulation:64QAM, RB Number:133, RB Position:0)


Center Frequency (MHz)	OBW Power (%)	XdB Down (dB)	RBW (MHz)	Detector	OBW (MHz)	XdB Bandwidth (MHz)	Upper Limit (MHz)	Verdict
3725.01	99	26	1	Peak	47.51	50.32	50	Pass

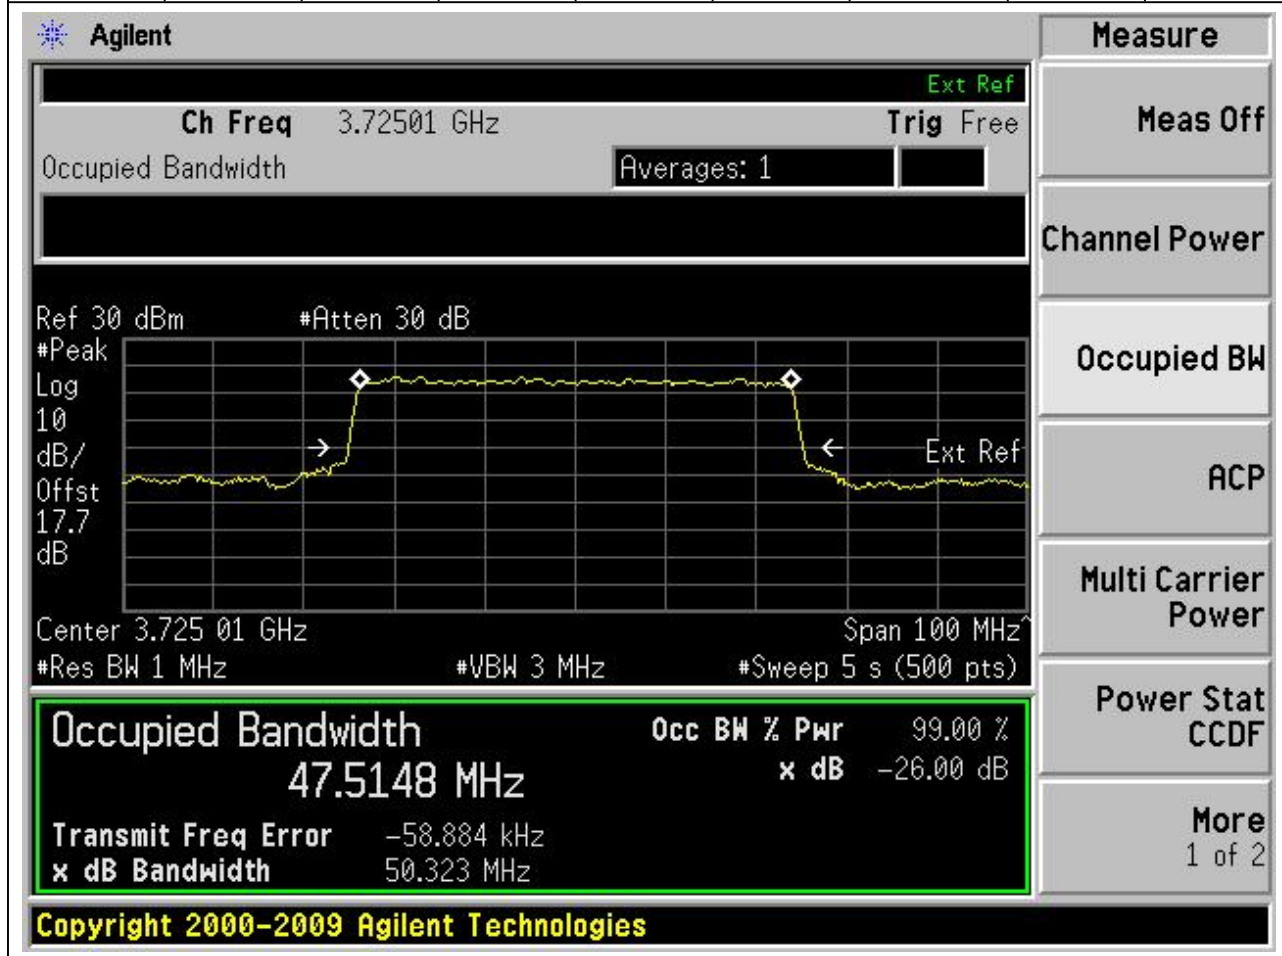

5.26 Occupied Bandwidth for SA Support PI2


BPSK_Part22-24-27(NTNV)(Channel:656000, Bandwidth:50, SCS:30,
OFDM:CP-OFDM, Modulation:64QAM, RB Number:133, RB Position:0)

Center Frequency (MHz)	OBW Power (%)	XdB Down (dB)	RBW (MHz)	Detector	OBW (MHz)	XdB Bandwidth (MHz)	Upper Limit (MHz)	Verdict
3840	99	26	1	Peak	47.57	50.32	50	Pass

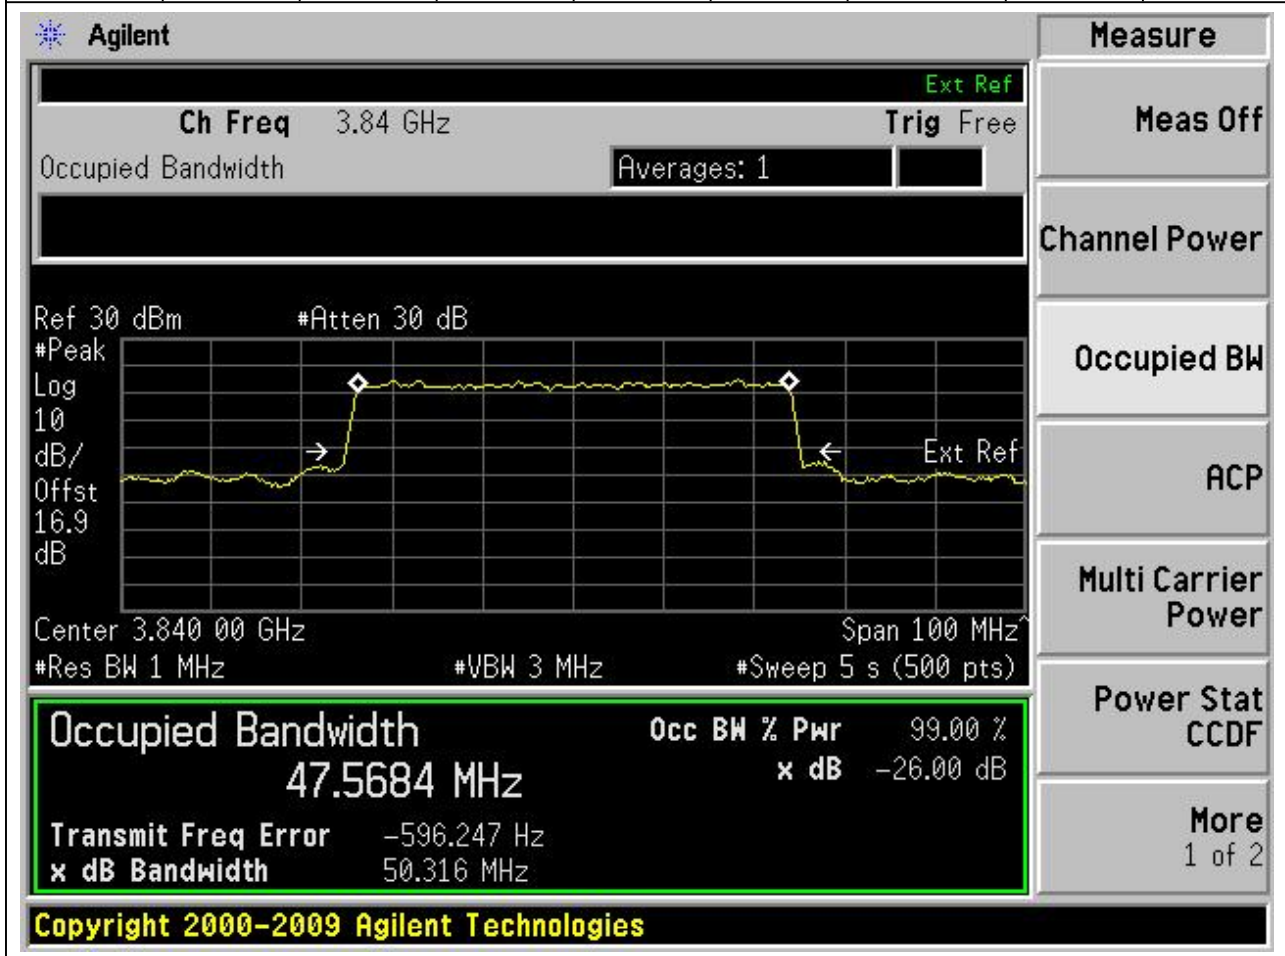

5.27 Occupied Bandwidth for SA Support PI2


BPSK_Part22-24-27(NTNV)(Channel:663666, Bandwidth:50, SCS:30,
OFDM:CP-OFDM, Modulation:64QAM, RB Number:133, RB Position:0)

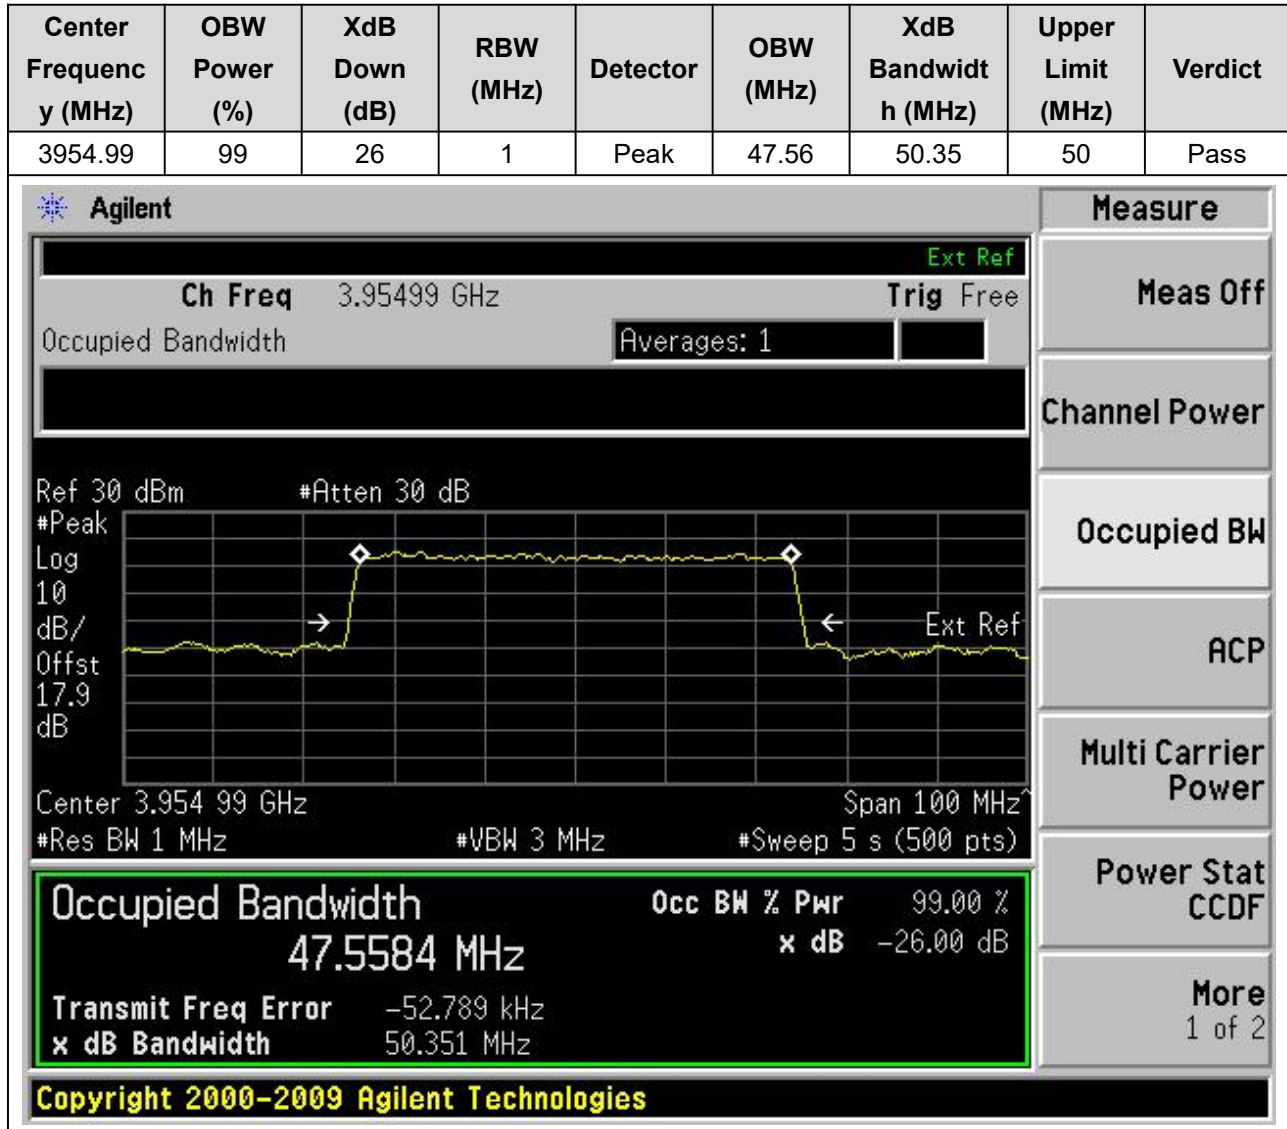

5.28 Occupied Bandwidth for SA Support PI2


BPSK_Part22-24-27(NTNV)(Channel:648334, Bandwidth:50, SCS:30,
OFDM:CP-OFDM, Modulation:256QAM, RB Number:133, RB Position:0)

Center Frequency (MHz)	OBW Power (%)	XdB Down (dB)	RBW (MHz)	Detector	OBW (MHz)	XdB Bandwidth (MHz)	Upper Limit (MHz)	Verdict
3725.01	99	26	1	Peak	47.53	50.38	50	Pass

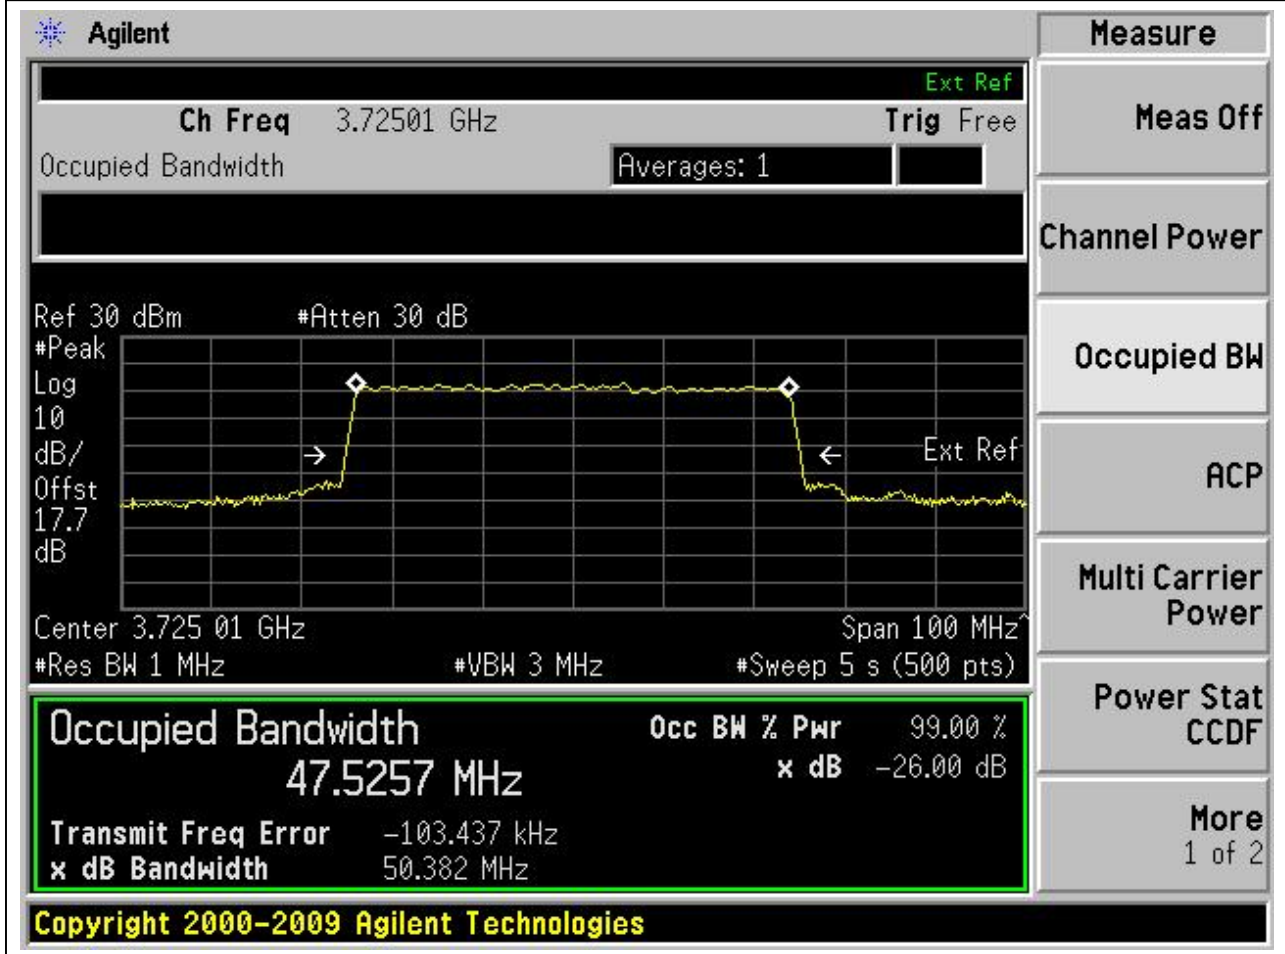

5.29 Occupied Bandwidth for SA Support PI2


BPSK_Part22-24-27(NTNV)(Channel:656000, Bandwidth:50, SCS:30,
OFDM:CP-OFDM, Modulation:256QAM, RB Number:133, RB Position:0)

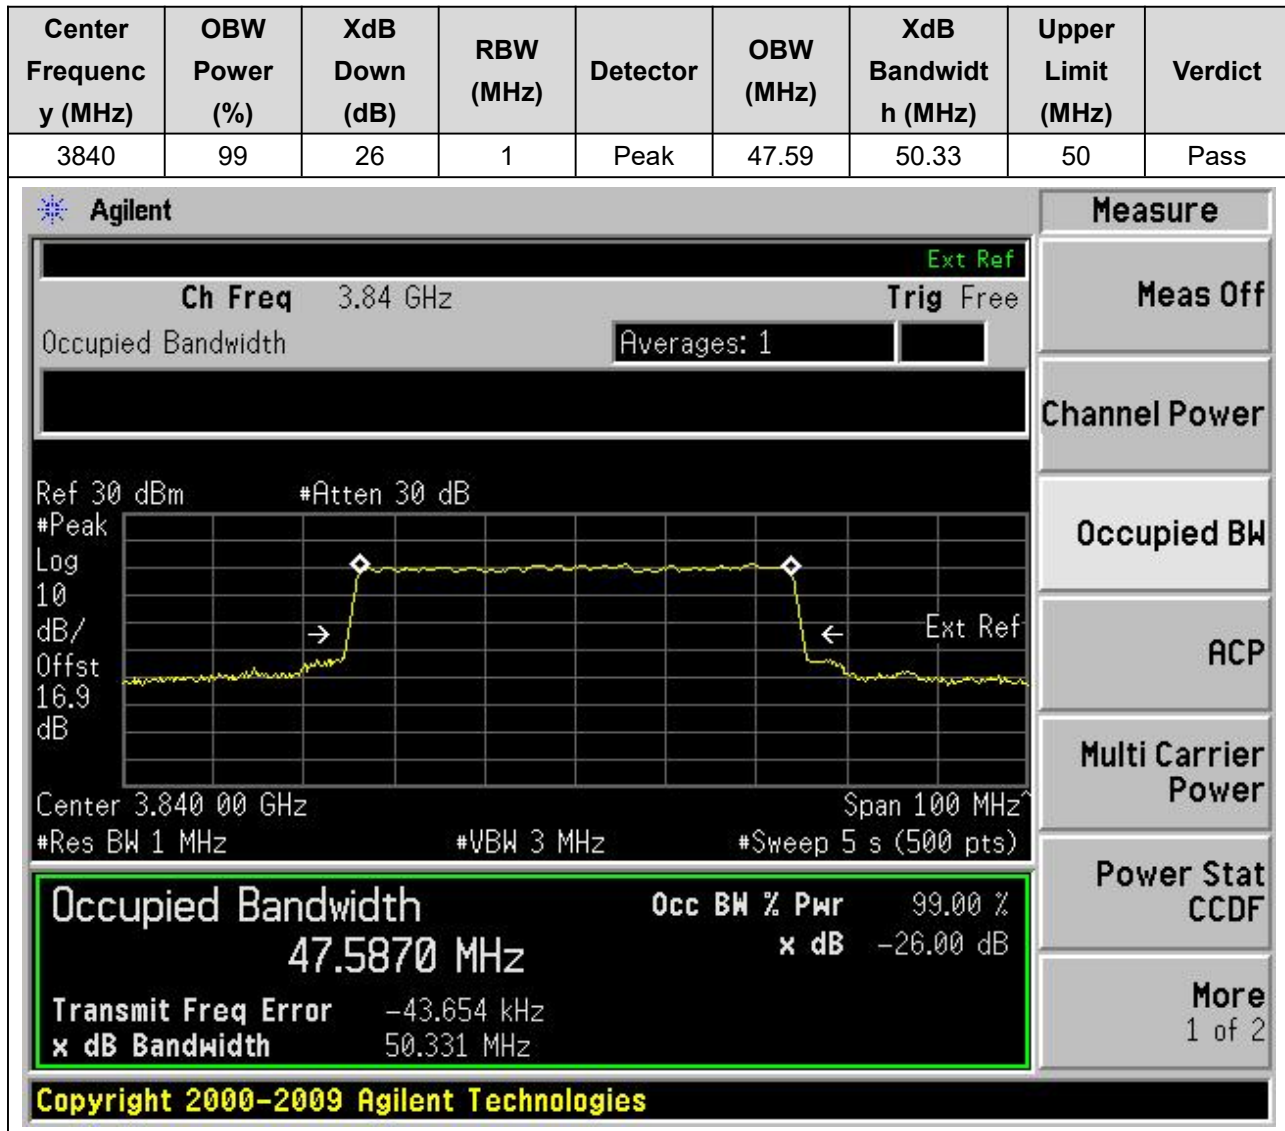

5.30 Occupied Bandwidth for SA Support PI2


BPSK_Part22-24-27(NTNV)(Channel:663666, Bandwidth:50, SCS:30,
OFDM:CP-OFDM, Modulation:256QAM, RB Number:133, RB Position:0)

Center Frequency (MHz)	OBW Power (%)	XdB Down (dB)	RBW (MHz)	Detector	OBW (MHz)	XdB Bandwidth (MHz)	Upper Limit (MHz)	Verdict
3954.99	99	26	1	Peak	47.56	50.39	50	Pass

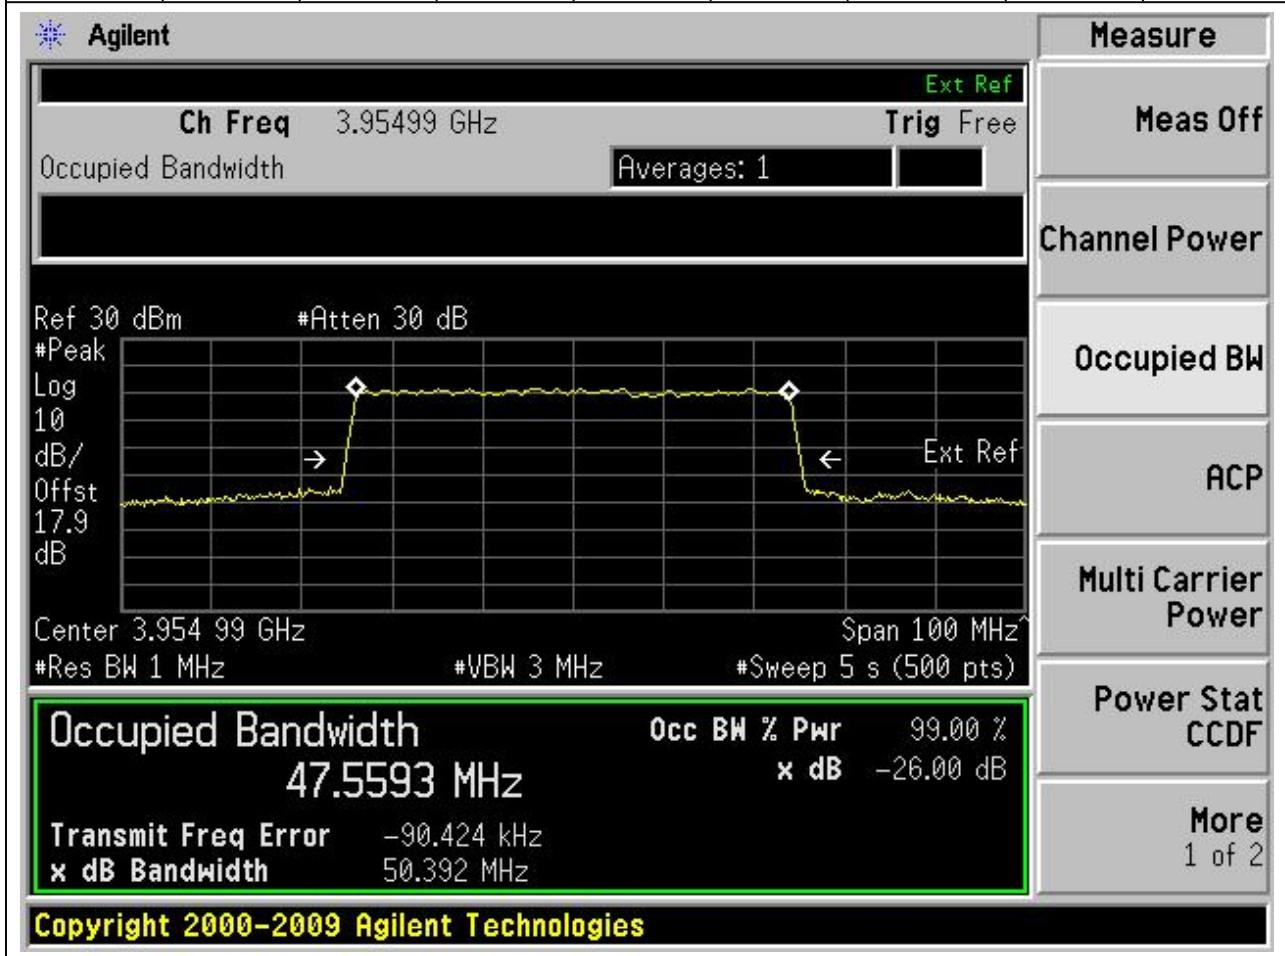


5.31 Occupied Bandwidth for SA Support PI2

BPSK_Part22-24-27(NTNV)(Channel:650000, Bandwidth:100, SCS:30,
OFDM:CP-OFDM, Modulation:Pi/2-BPSK, RB Number:273, RB Position:0)

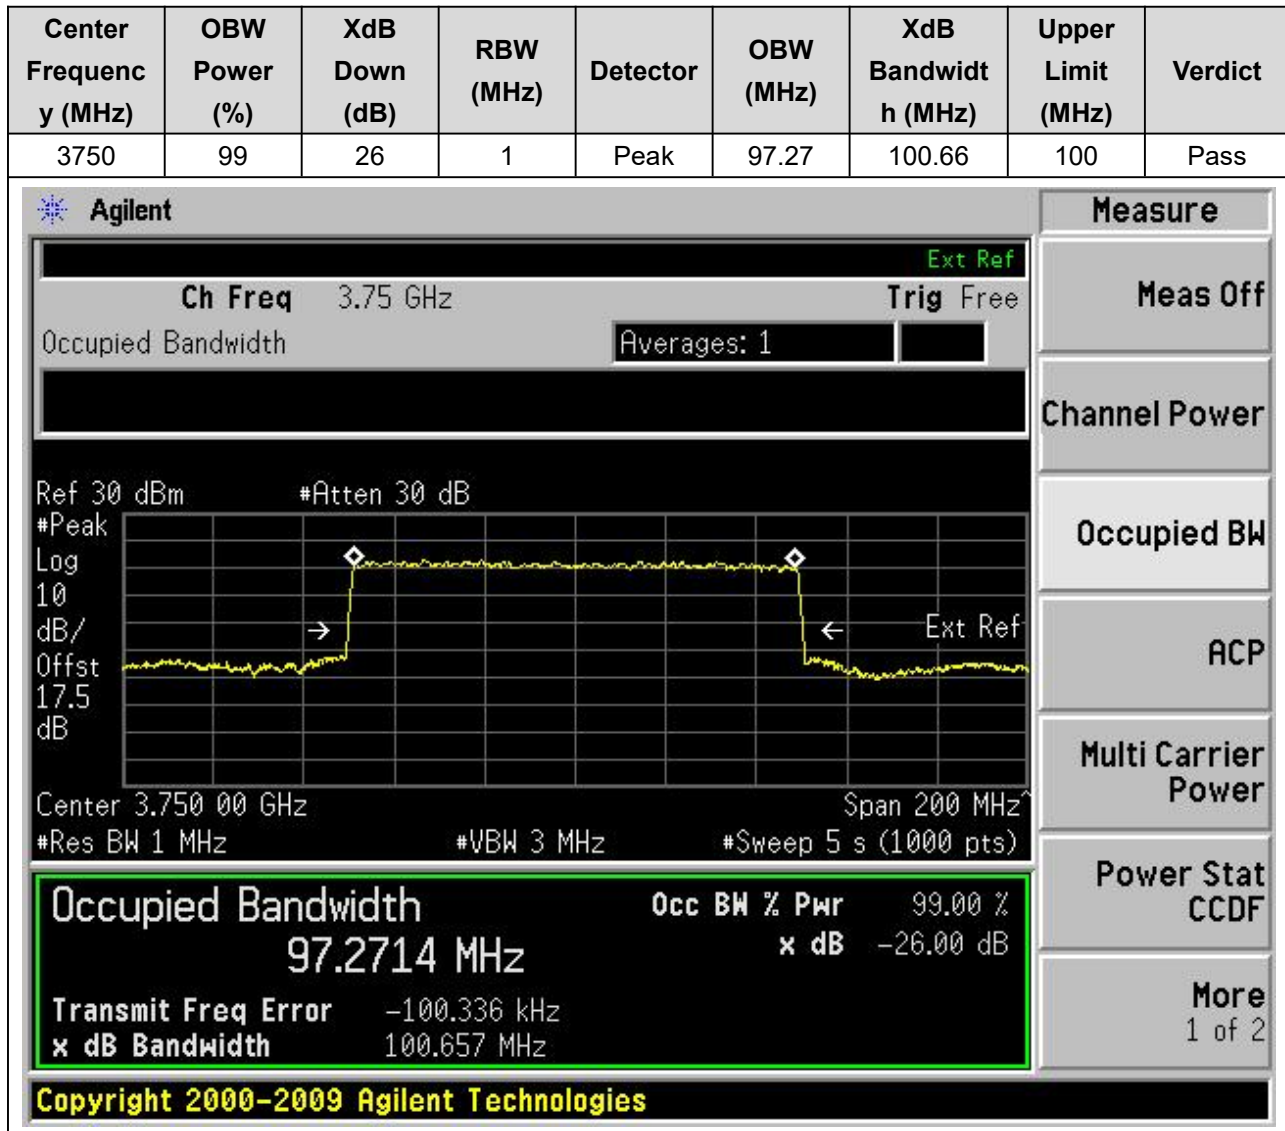

5.32 Occupied Bandwidth for SA Support PI2


BPSK_Part22-24-27(NTNV)(Channel:656000, Bandwidth:100, SCS:30,
OFDM:CP-OFDM, Modulation:Pi/2-BPSK, RB Number:273, RB Position:0)

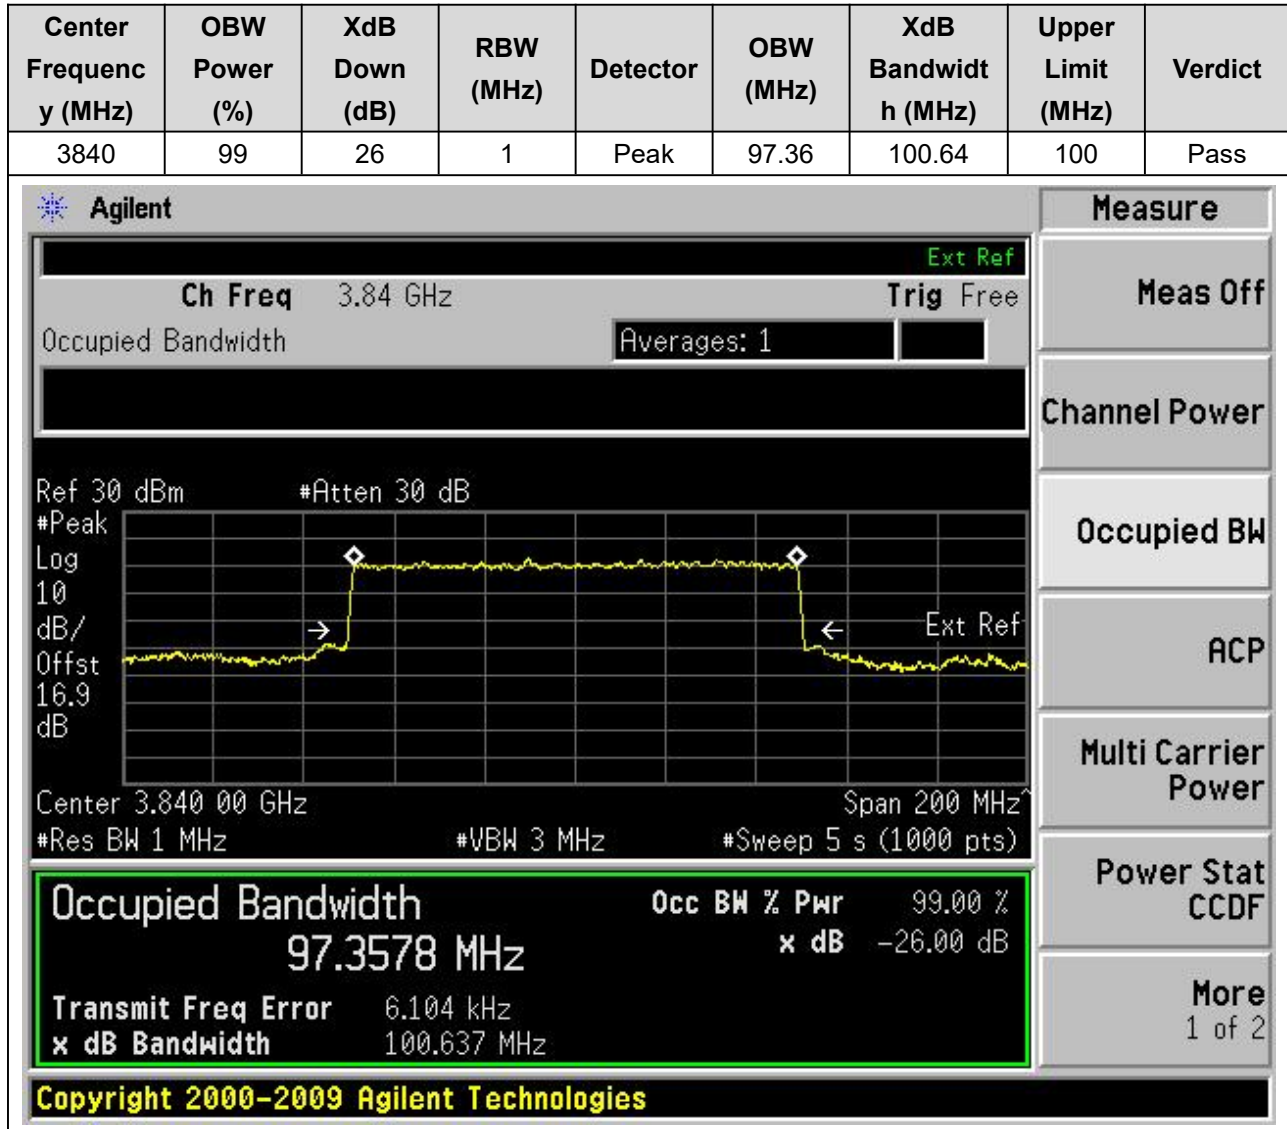

5.33 Occupied Bandwidth for SA Support PI2


BPSK_Part22-24-27(NTNV)(Channel:662000, Bandwidth:100, SCS:30,
OFDM:CP-OFDM, Modulation:Pi/2-BPSK, RB Number:273, RB Position:0)

Center Frequency (MHz)	OBW Power (%)	XdB Down (dB)	RBW (MHz)	Detector	OBW (MHz)	XdB Bandwidth (MHz)	Upper Limit (MHz)	Verdict
3930	99	26	1	Peak	97.35	100.64	100	Pass

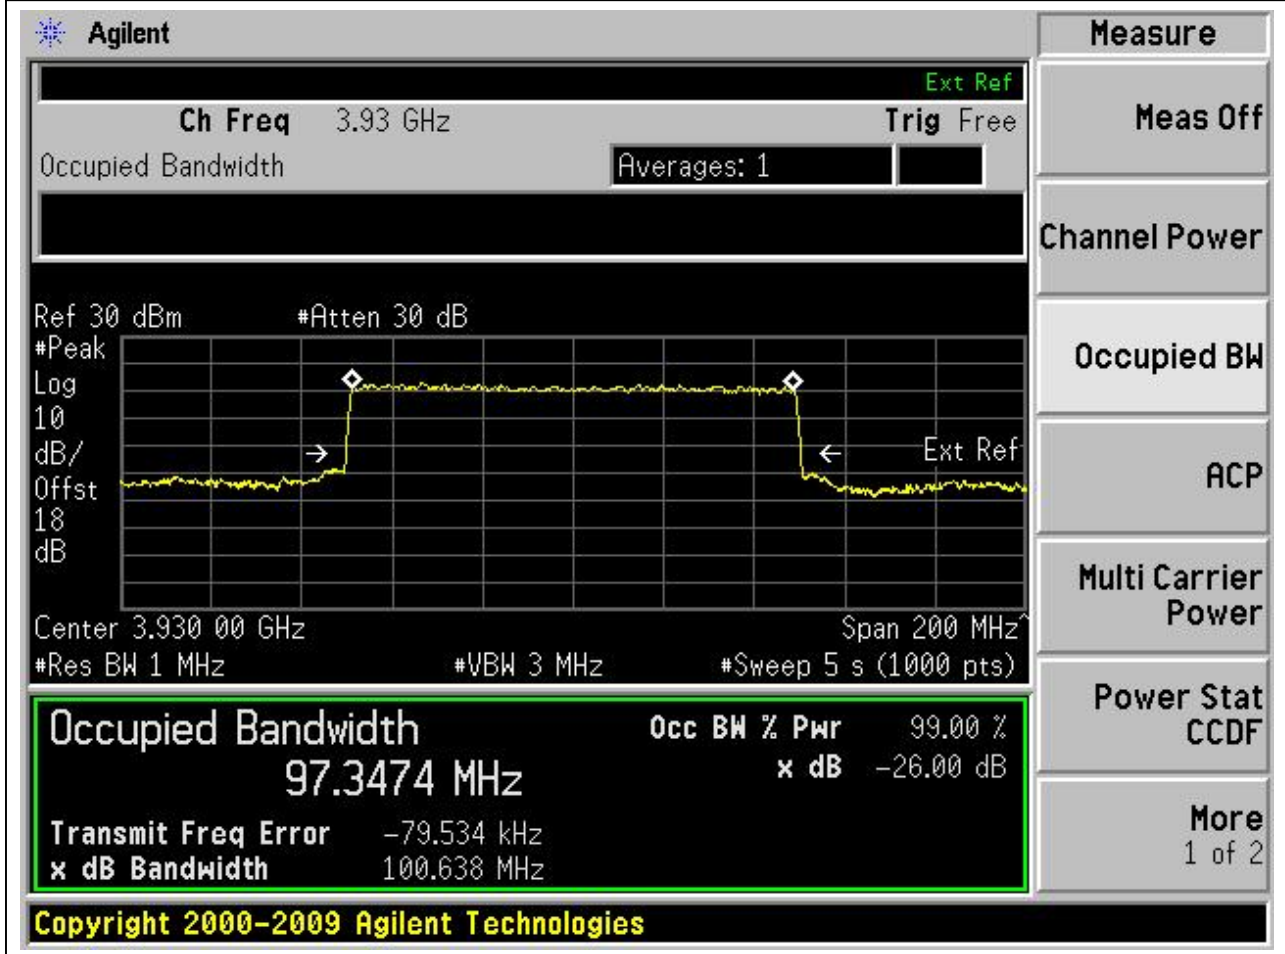


5.34 Occupied Bandwidth for SA Support PI2

BPSK_Part22-24-27(NTNV)(Channel:650000, Bandwidth:100, SCS:30,
OFDM:CP-OFDM, Modulation:QPSK, RB Number:273, RB Position:0)

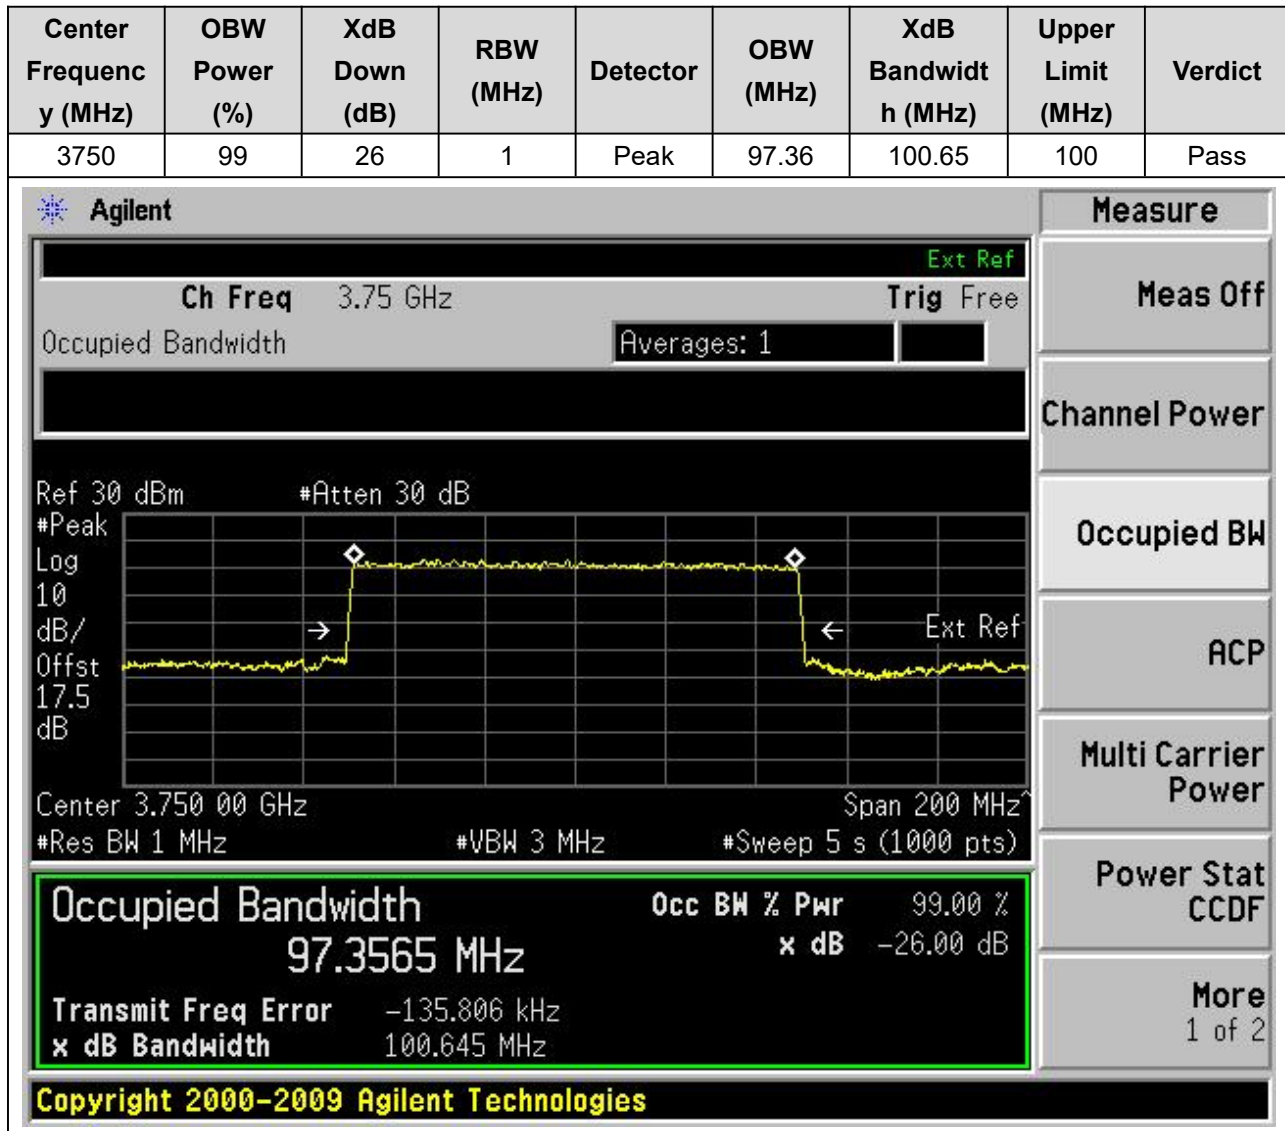


5.35 Occupied Bandwidth for SA Support PI2

BPSK_Part22-24-27(NTNV)(Channel:656000, Bandwidth:100, SCS:30,
OFDM:CP-OFDM, Modulation:QPSK, RB Number:273, RB Position:0)

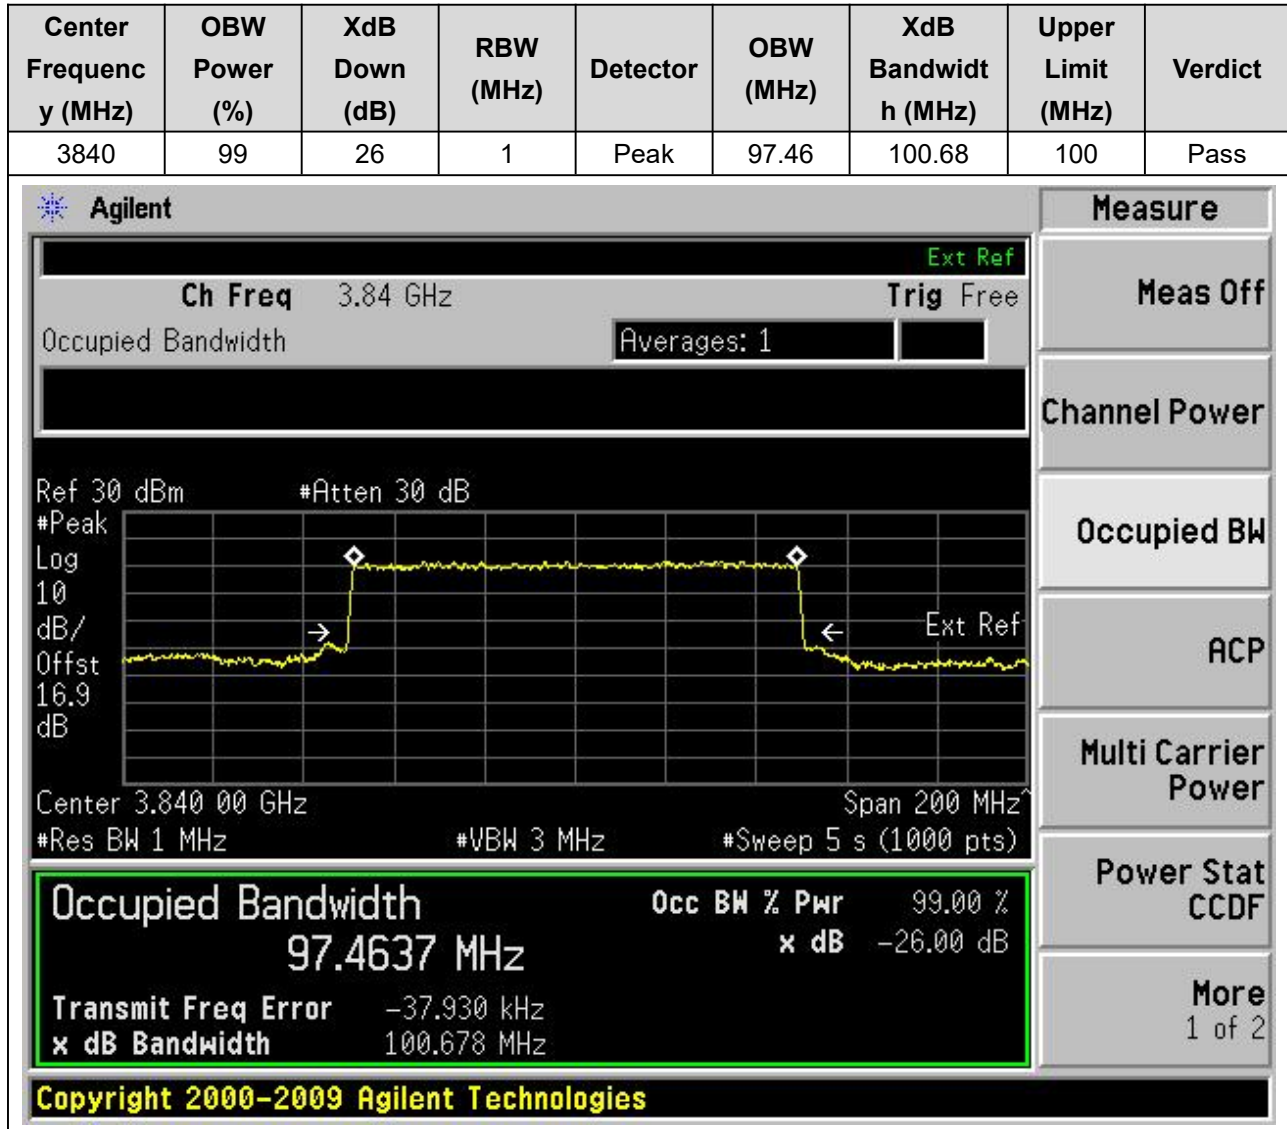

5.36 Occupied Bandwidth for SA Support PI2


BPSK_Part22-24-27(NTNV)(Channel:662000, Bandwidth:100, SCS:30,
OFDM:CP-OFDM, Modulation:QPSK, RB Number:273, RB Position:0)

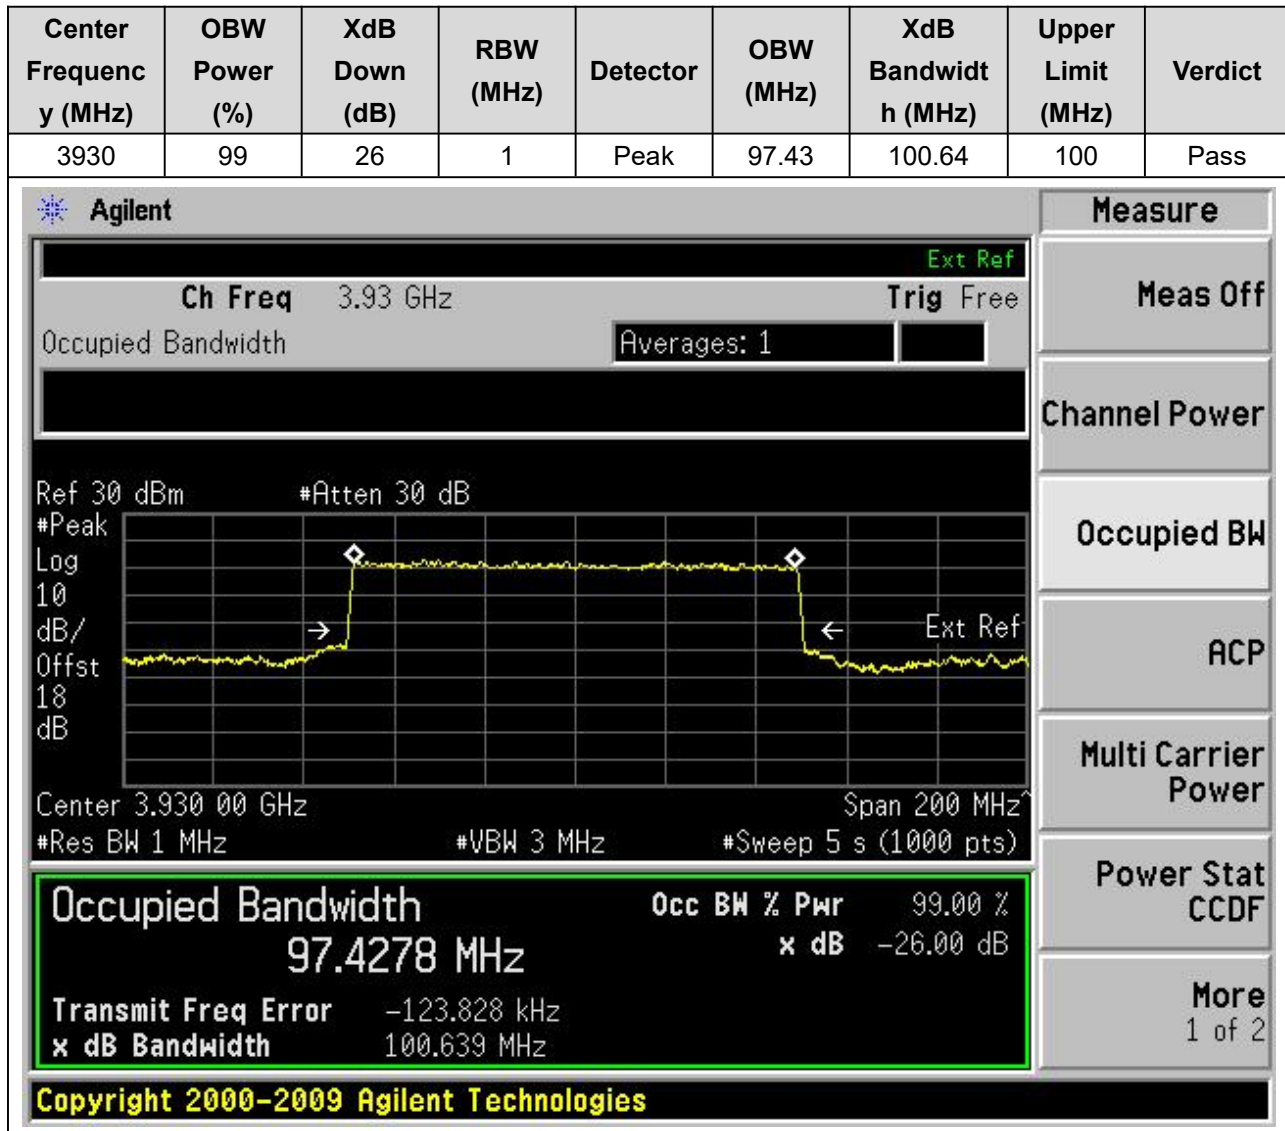

5.37 Occupied Bandwidth for SA Support PI2


BPSK_Part22-24-27(NTNV)(Channel:650000, Bandwidth:100, SCS:30,
OFDM:CP-OFDM, Modulation:16QAM, RB Number:273, RB Position:0)

Center Frequency (MHz)	OBW Power (%)	XdB Down (dB)	RBW (MHz)	Detector	OBW (MHz)	XdB Bandwidth (MHz)	Upper Limit (MHz)	Verdict
3750	99	26	1	Peak	97.32	100.65	100	Pass

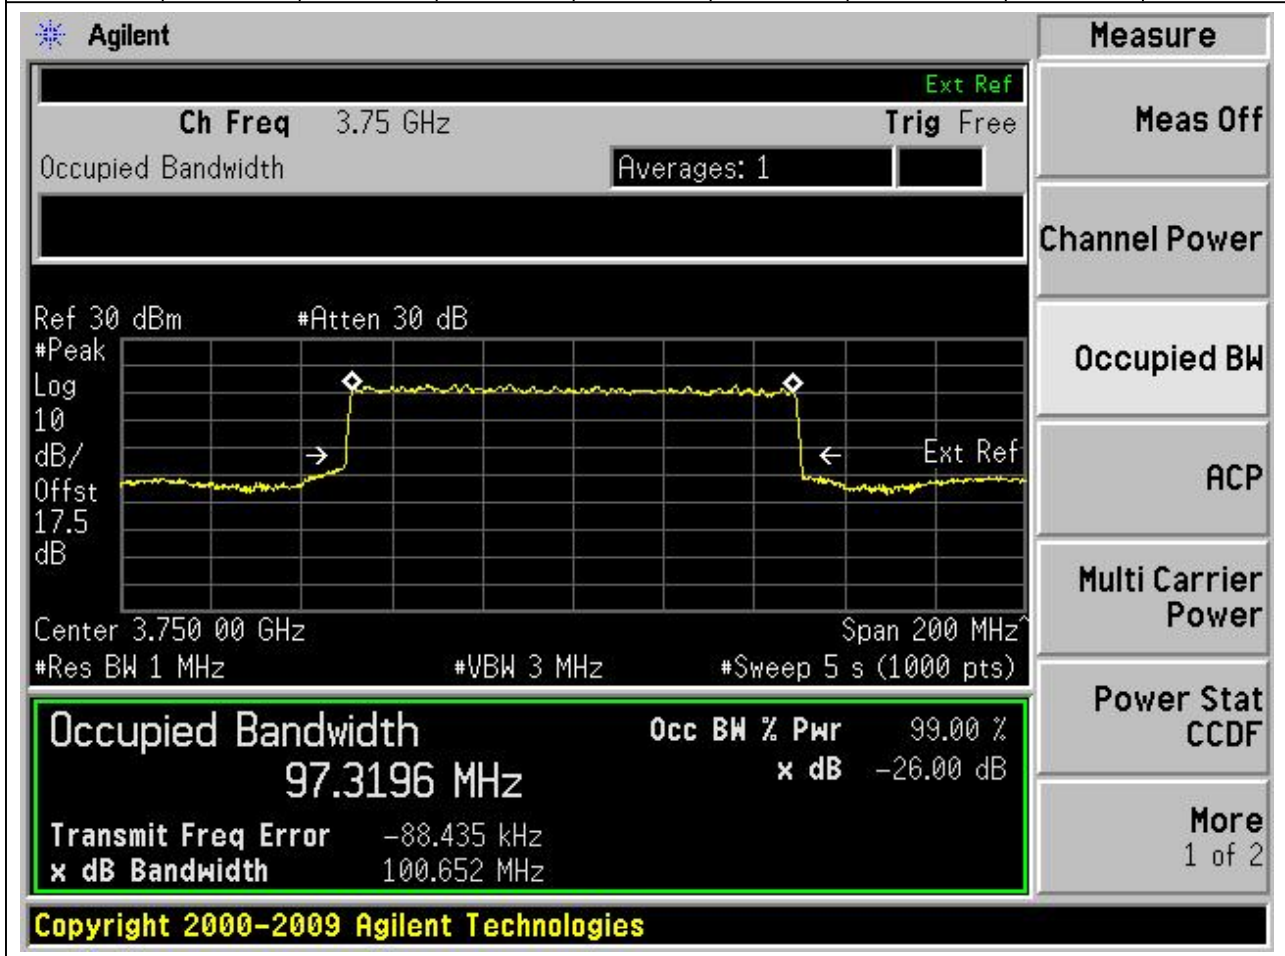


5.38 Occupied Bandwidth for SA Support PI2

BPSK_Part22-24-27(NTNV)(Channel:656000, Bandwidth:100, SCS:30,
OFDM:CP-OFDM, Modulation:16QAM, RB Number:273, RB Position:0)

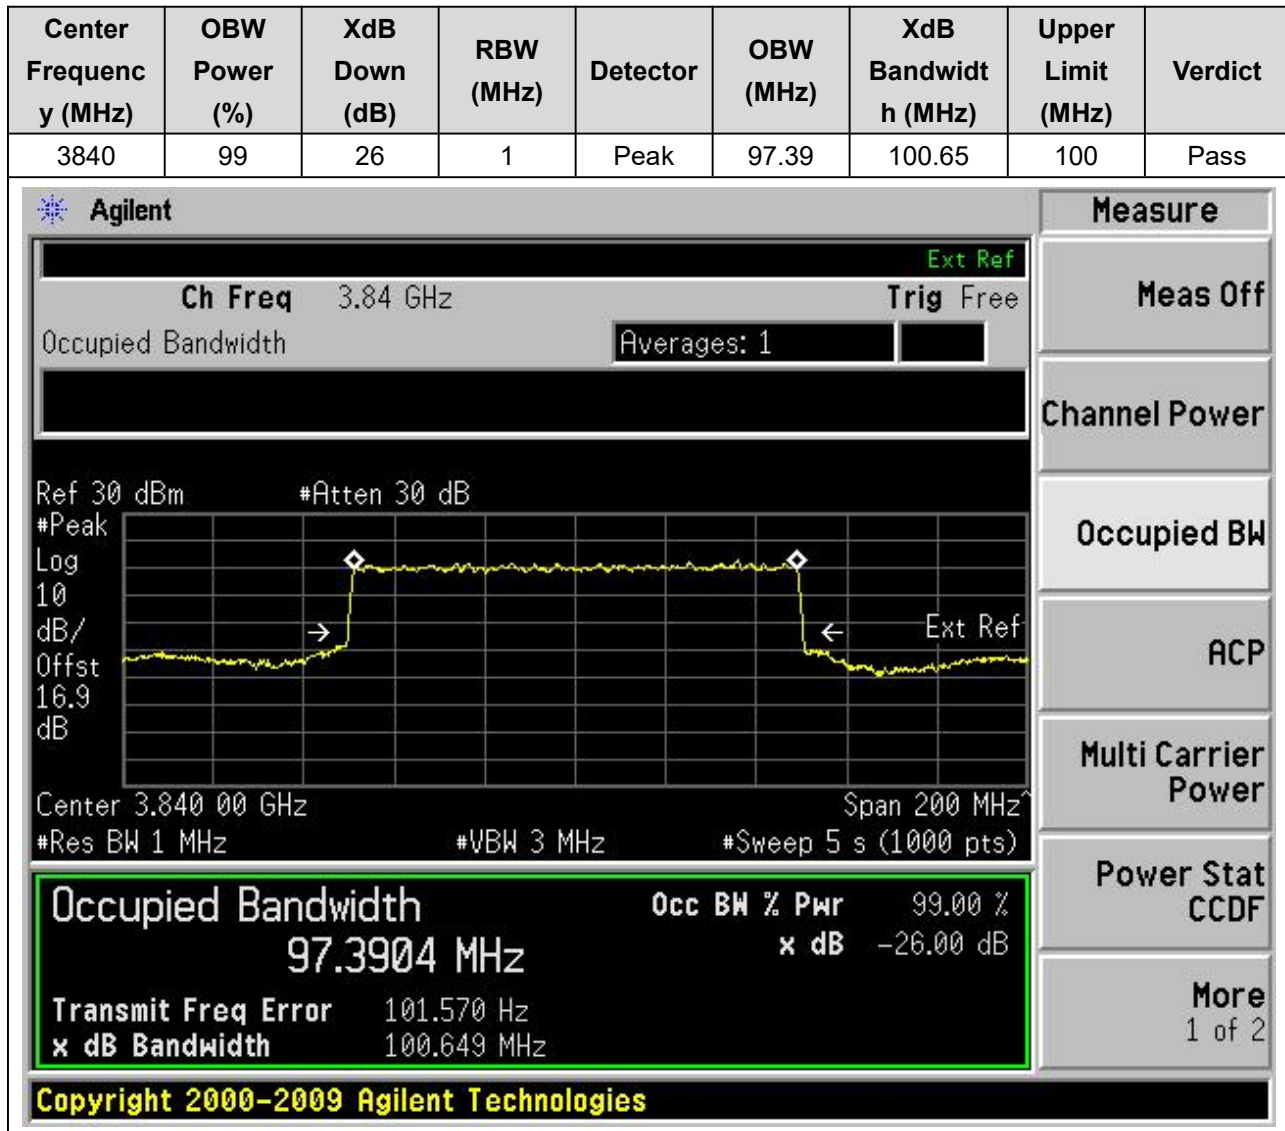


5.39 Occupied Bandwidth for SA Support PI2

BPSK_Part22-24-27(NTNV)(Channel:662000, Bandwidth:100, SCS:30,
OFDM:CP-OFDM, Modulation:16QAM, RB Number:273, RB Position:0)

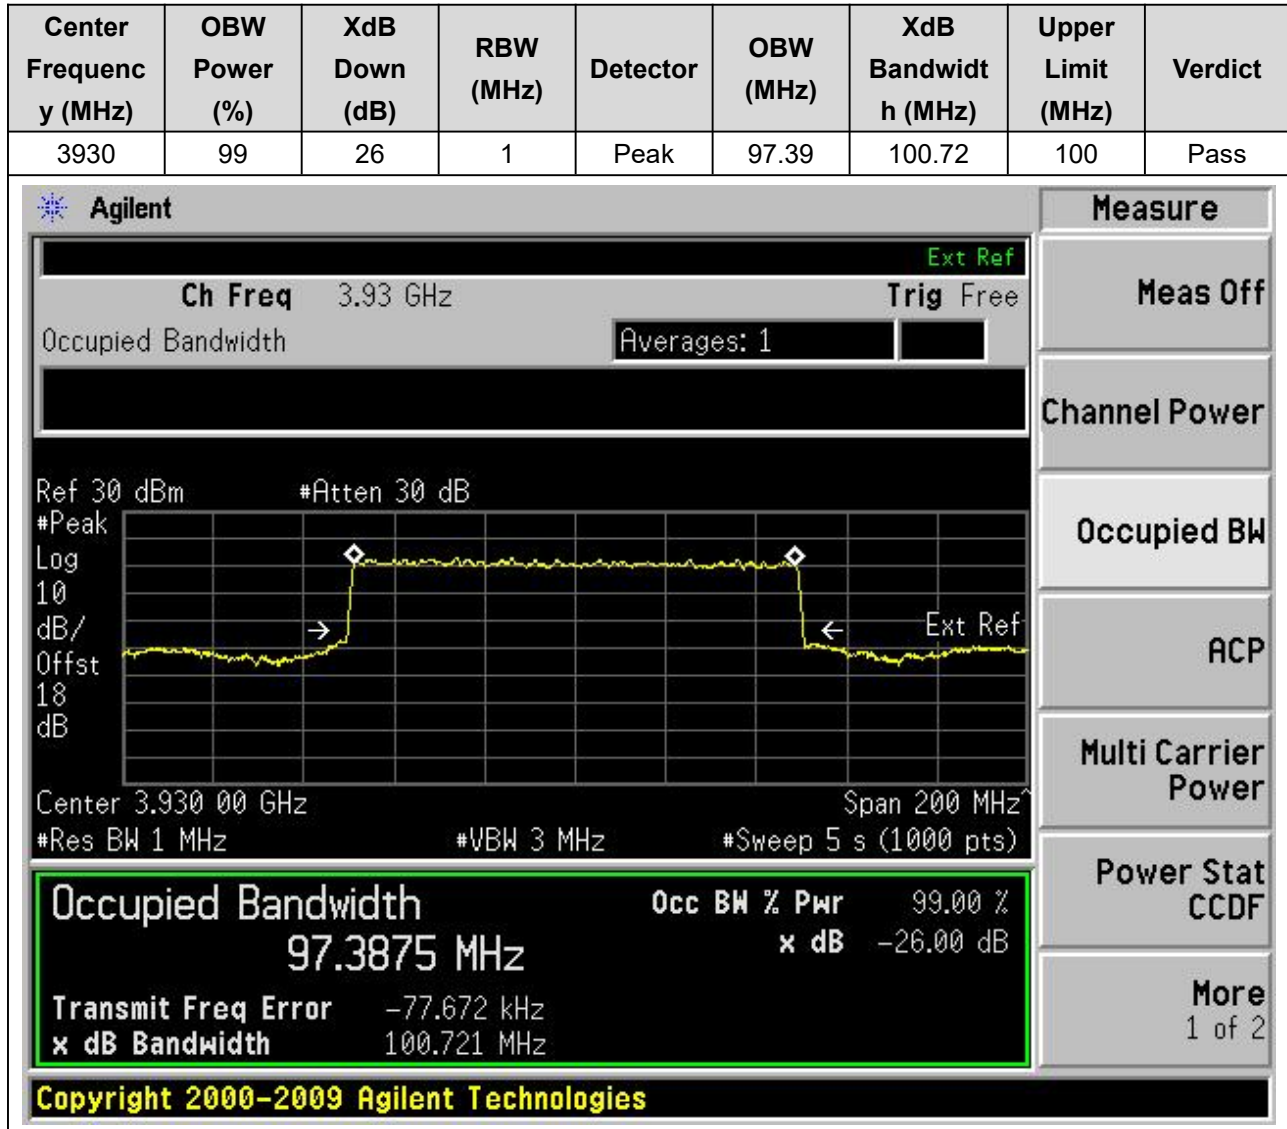


5.40 Occupied Bandwidth for SA Support PI2

BPSK_Part22-24-27(NTNV)(Channel:650000, Bandwidth:100, SCS:30,
OFDM:CP-OFDM, Modulation:64QAM, RB Number:273, RB Position:0)

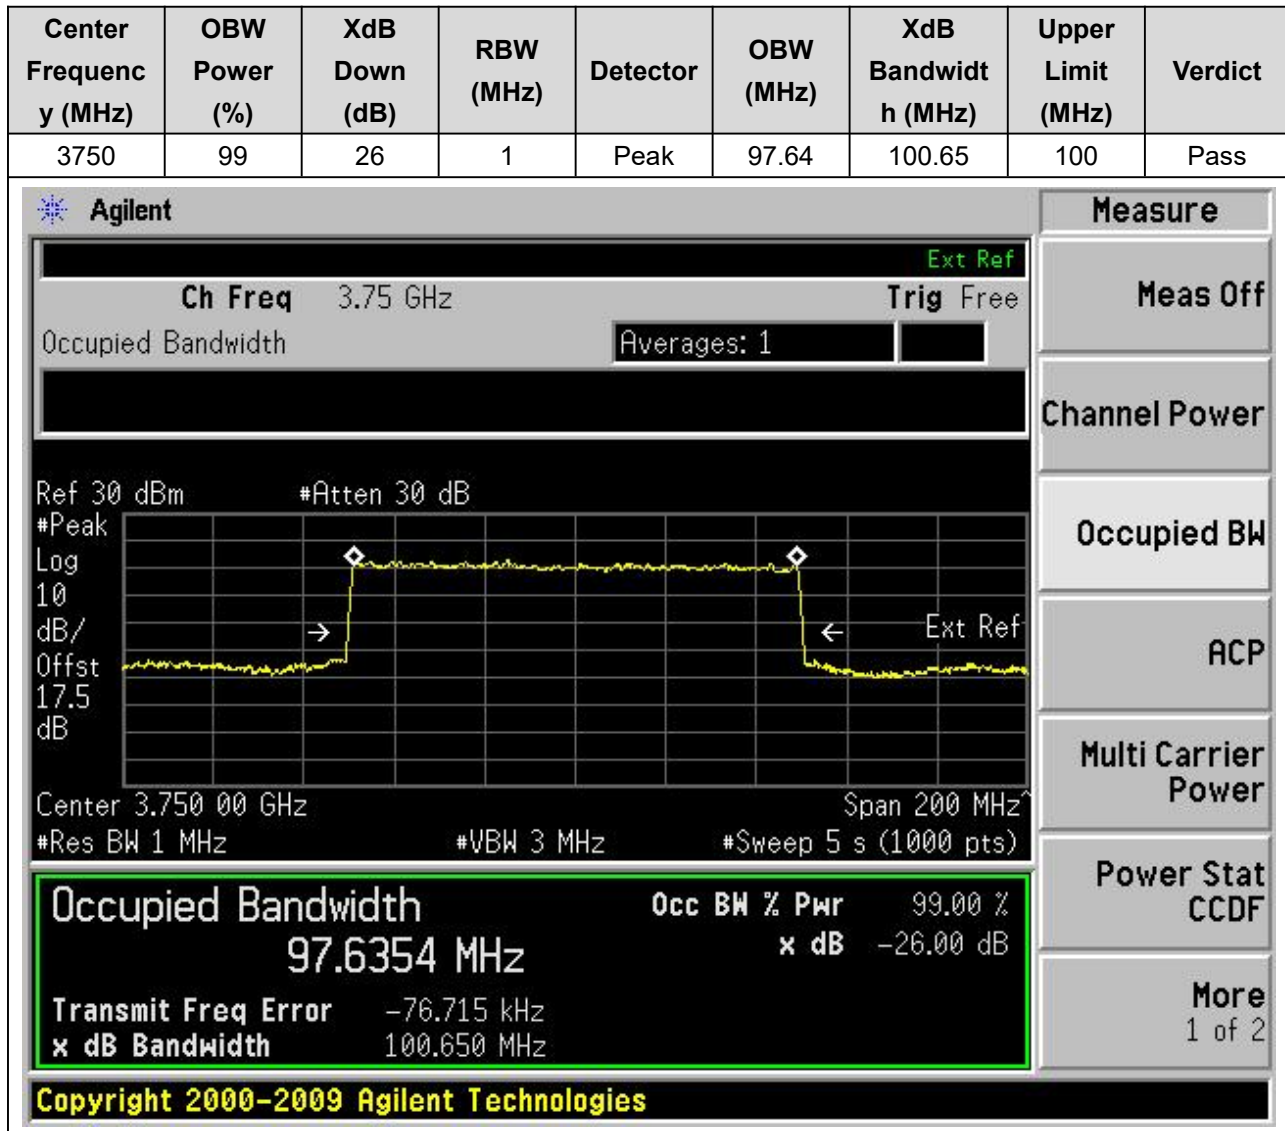

5.41 Occupied Bandwidth for SA Support PI2


BPSK_Part22-24-27(NTNV)(Channel:656000, Bandwidth:100, SCS:30,
OFDM:CP-OFDM, Modulation:64QAM, RB Number:273, RB Position:0)

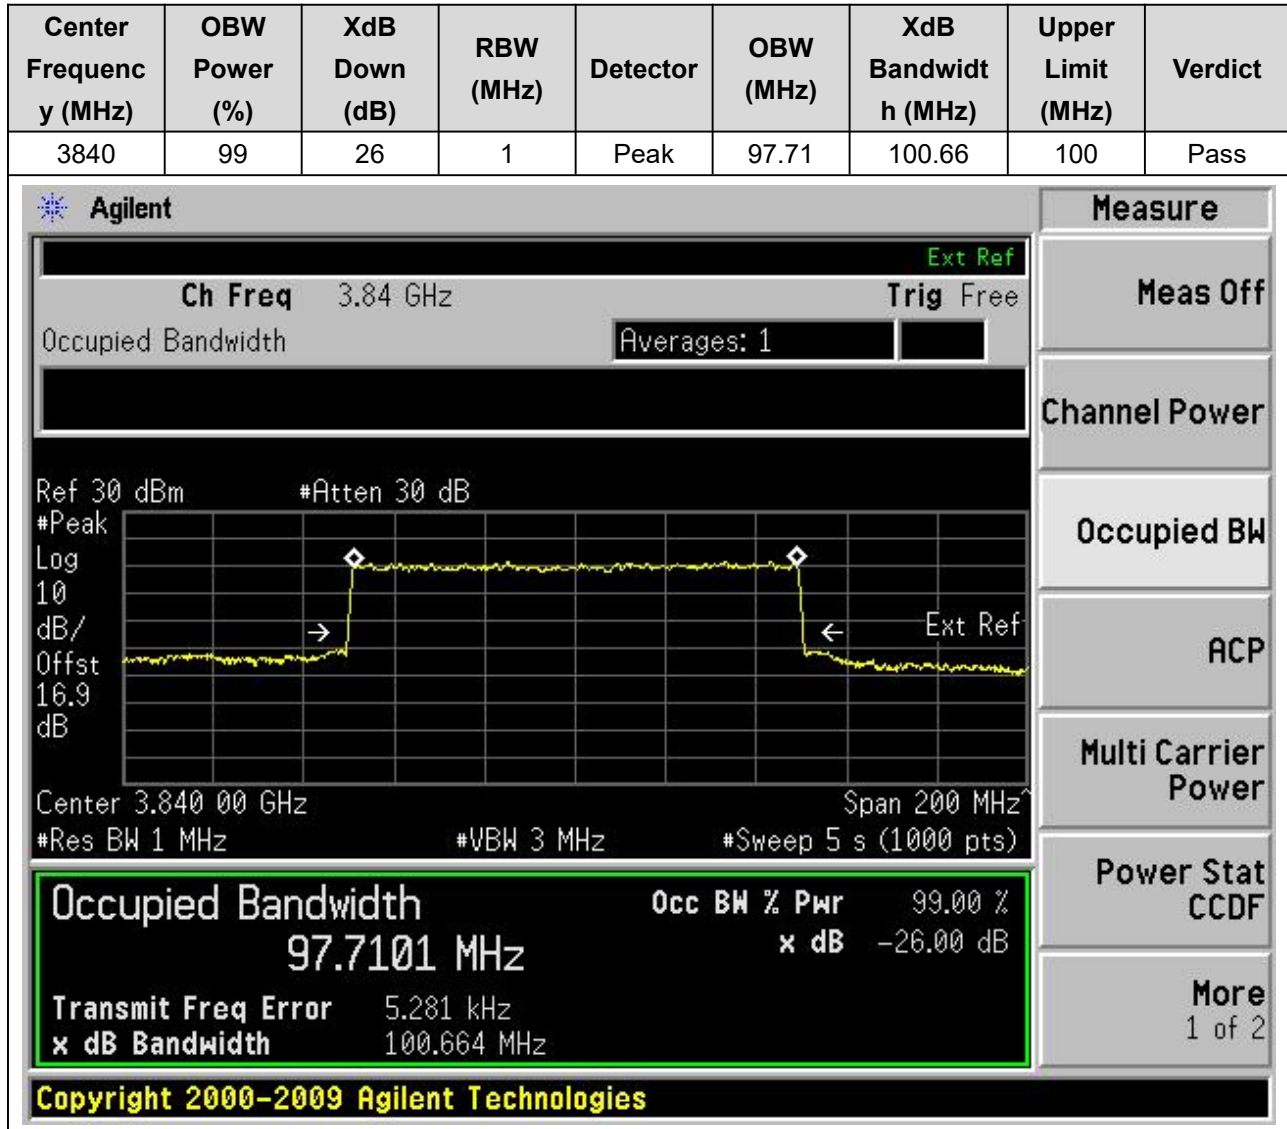

5.42 Occupied Bandwidth for SA Support PI2

BPSK_Part22-24-27(NTNV)(Channel:662000, Bandwidth:100, SCS:30,
OFDM:CP-OFDM, Modulation:64QAM, RB Number:273, RB Position:0)


Center Frequency (MHz)	OBW Power (%)	XdB Down (dB)	RBW (MHz)	Detector	OBW (MHz)	XdB Bandwidth (MHz)	Upper Limit (MHz)	Verdict
3930	99	26	1	Peak	97.71	100.63	100	Pass

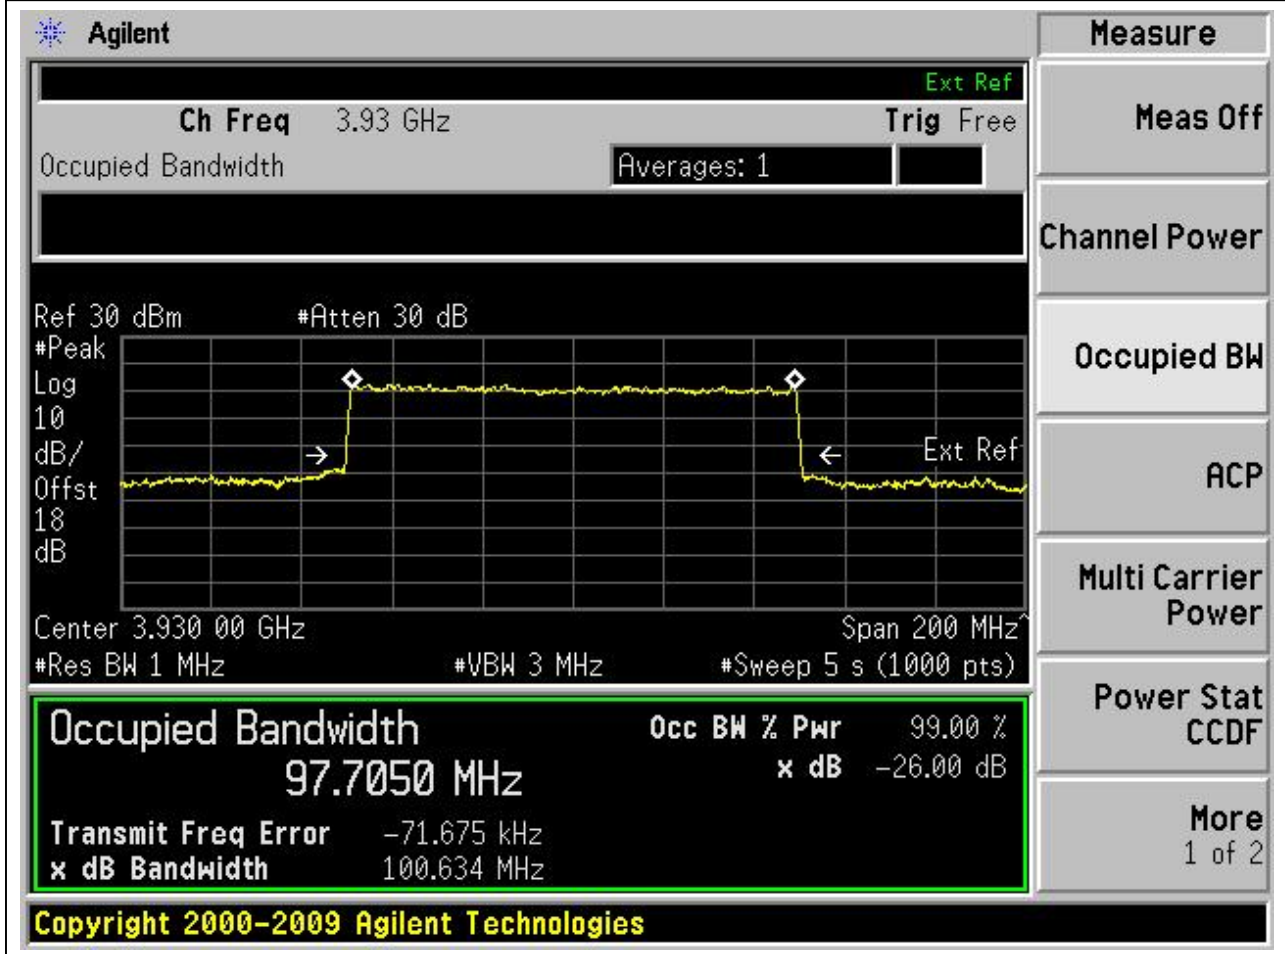

5.43 Occupied Bandwidth for SA Support PI2


BPSK_Part22-24-27(NTNV)(Channel:650000, Bandwidth:100, SCS:30,
OFDM:CP-OFDM, Modulation:256QAM, RB Number:273, RB Position:0)

Center Frequency (MHz)	OBW Power (%)	XdB Down (dB)	RBW (MHz)	Detector	OBW (MHz)	XdB Bandwidth (MHz)	Upper Limit (MHz)	Verdict
3750	99	26	1	Peak	97.37	100.68	100	Pass

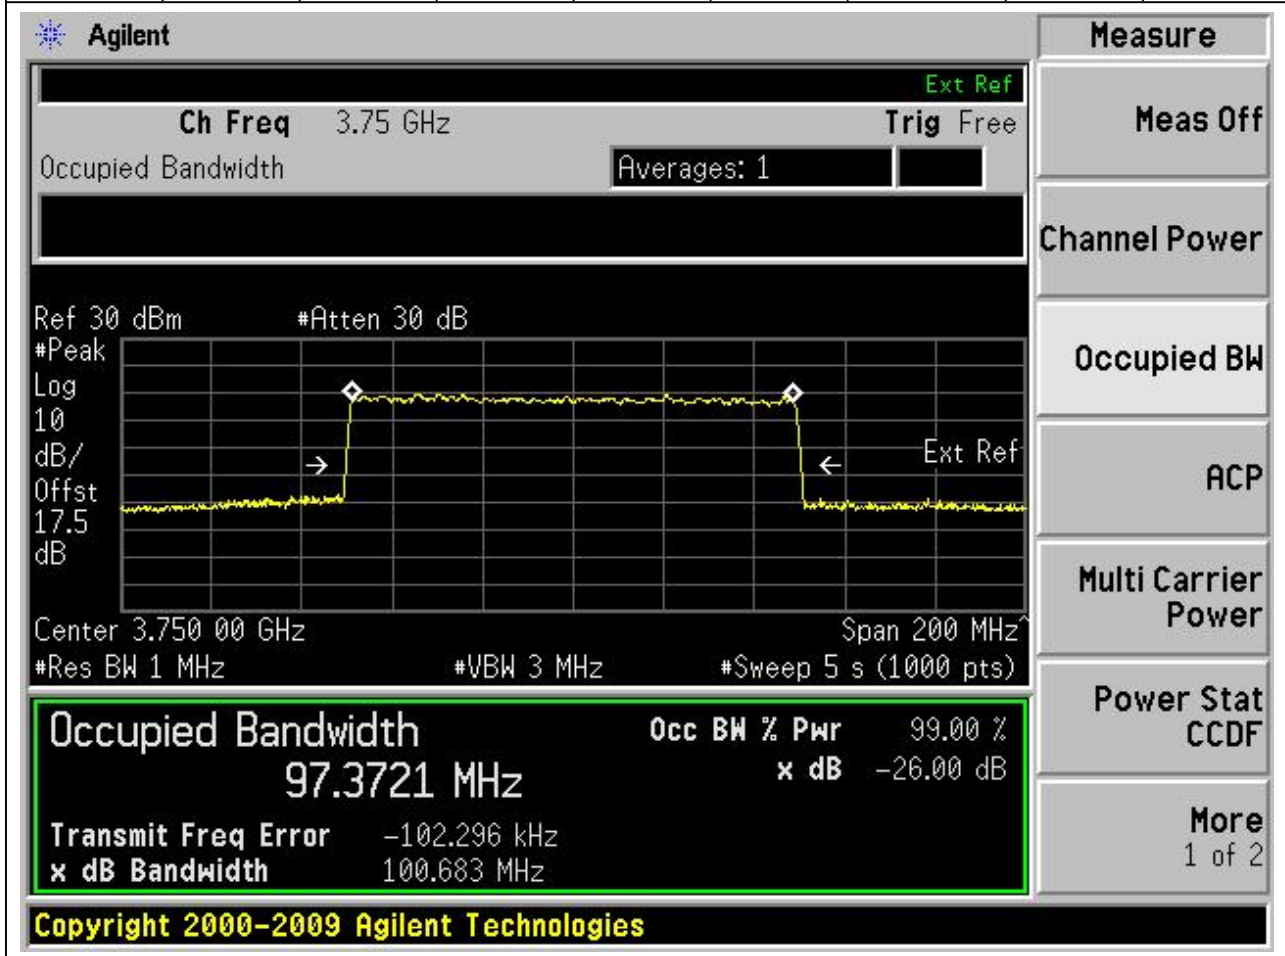


5.44 Occupied Bandwidth for SA Support PI2

BPSK_Part22-24-27(NTNV)(Channel:656000, Bandwidth:100, SCS:30,
OFDM:CP-OFDM, Modulation:256QAM, RB Number:273, RB Position:0)

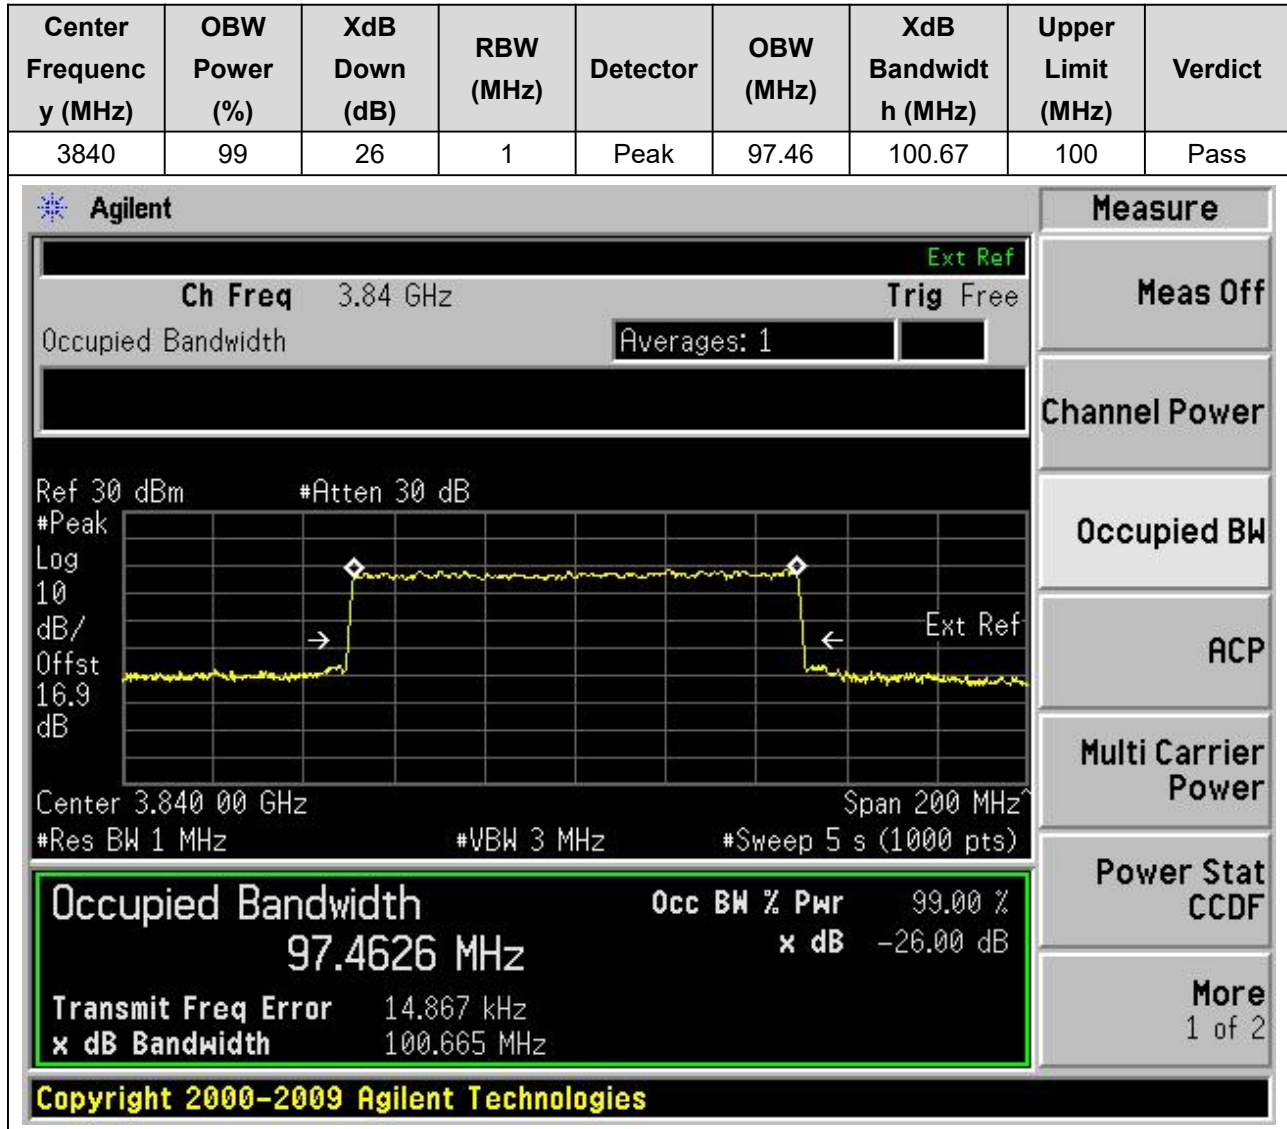

5.45 Occupied Bandwidth for SA Support PI2


BPSK_Part22-24-27(NTNV)(Channel:662000, Bandwidth:100, SCS:30,
OFDM:CP-OFDM, Modulation:256QAM, RB Number:273, RB Position:0)

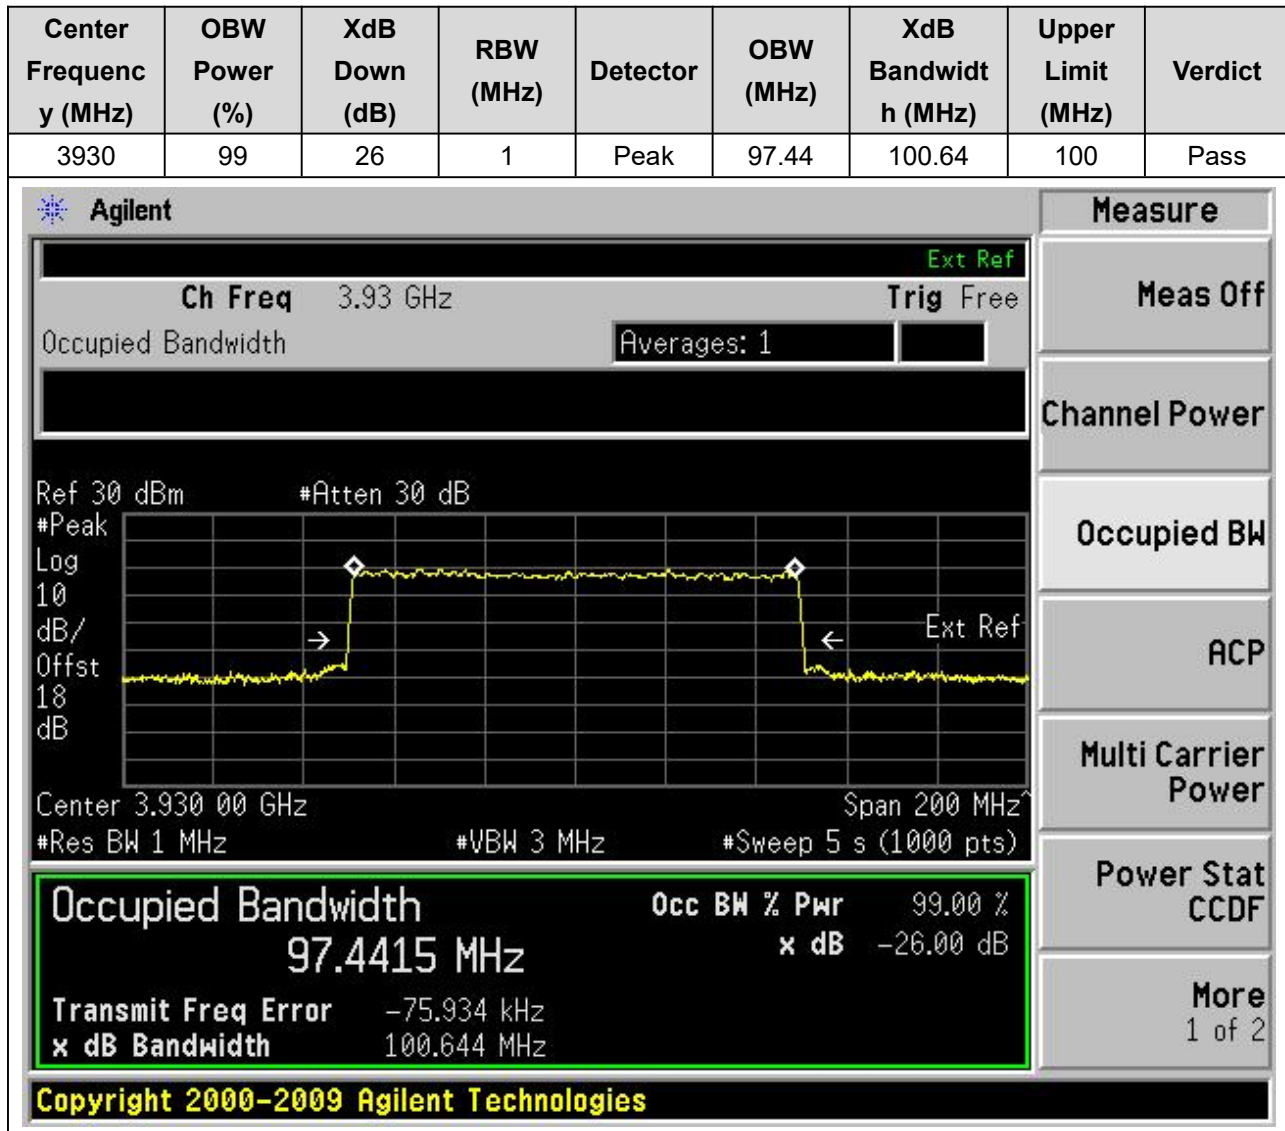

6. n78 30kHz(3700-3800)

6.1 Occupied Bandwidth for SA Support PI2


BPSK_Part22-24-27(NTNV)(Channel:647000, Bandwidth:10, SCS:30,
OFDM:CP-OFDM, Modulation:Pi/2-BPSK, RB Number:24, RB Position:0)

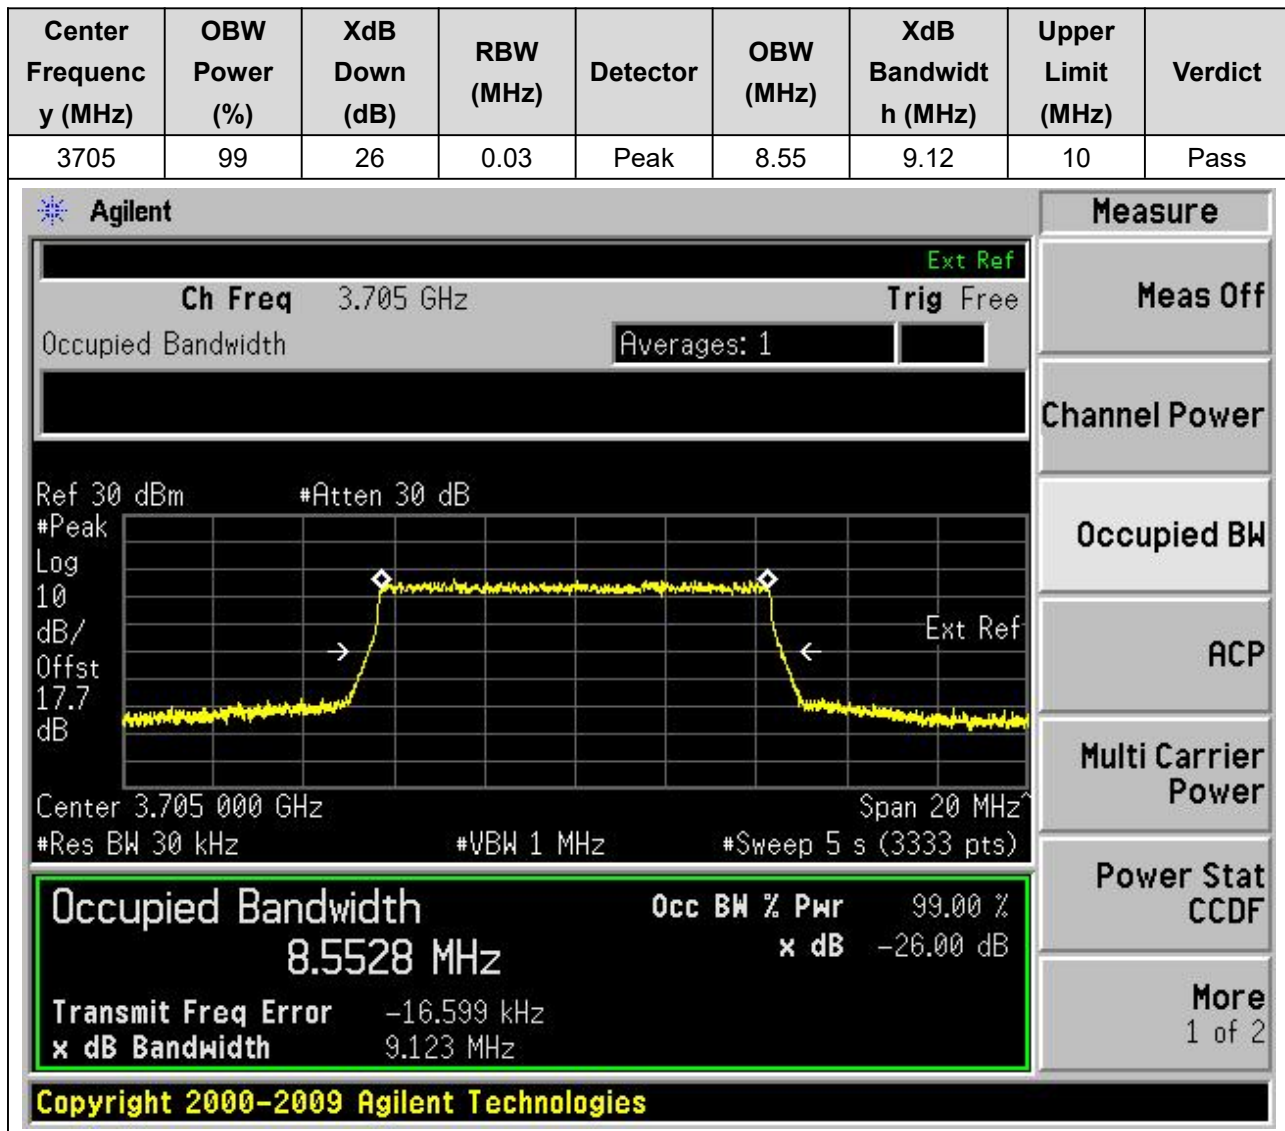

6.2 Occupied Bandwidth for SA Support PI2

BPSK_Part22-24-27(NTNV)(Channel:650000, Bandwidth:10, SCS:30,
OFDM:CP-OFDM, Modulation:Pi/2-BPSK, RB Number:24, RB Position:0)


Center Frequency (MHz)	OBW Power (%)	XdB Down (dB)	RBW (MHz)	Detector	OBW (MHz)	XdB Bandwidth (MHz)	Upper Limit (MHz)	Verdict
3750	99	26	0.03	Peak	8.56	9.19	10	Pass

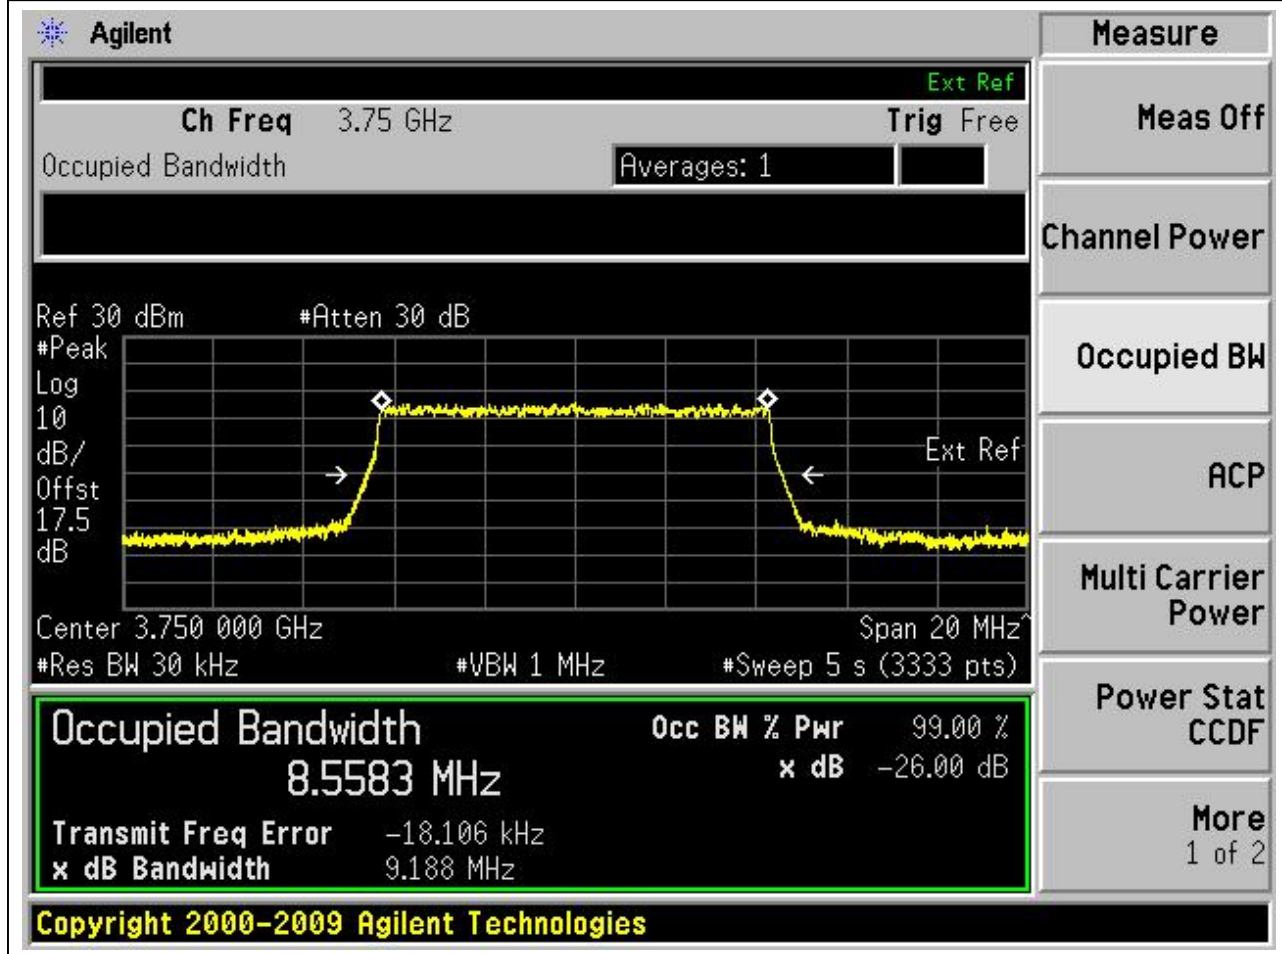

6.3 Occupied Bandwidth for SA Support PI2

BPSK_Part22-24-27(NTNV)(Channel:653000, Bandwidth:10, SCS:30,
OFDM:CP-OFDM, Modulation:Pi/2-BPSK, RB Number:24, RB Position:0)


Center Frequency (MHz)	OBW Power (%)	XdB Down (dB)	RBW (MHz)	Detector	OBW (MHz)	XdB Bandwidth (MHz)	Upper Limit (MHz)	Verdict
3795	99	26	0.03	Peak	8.55	9.12	10	Pass

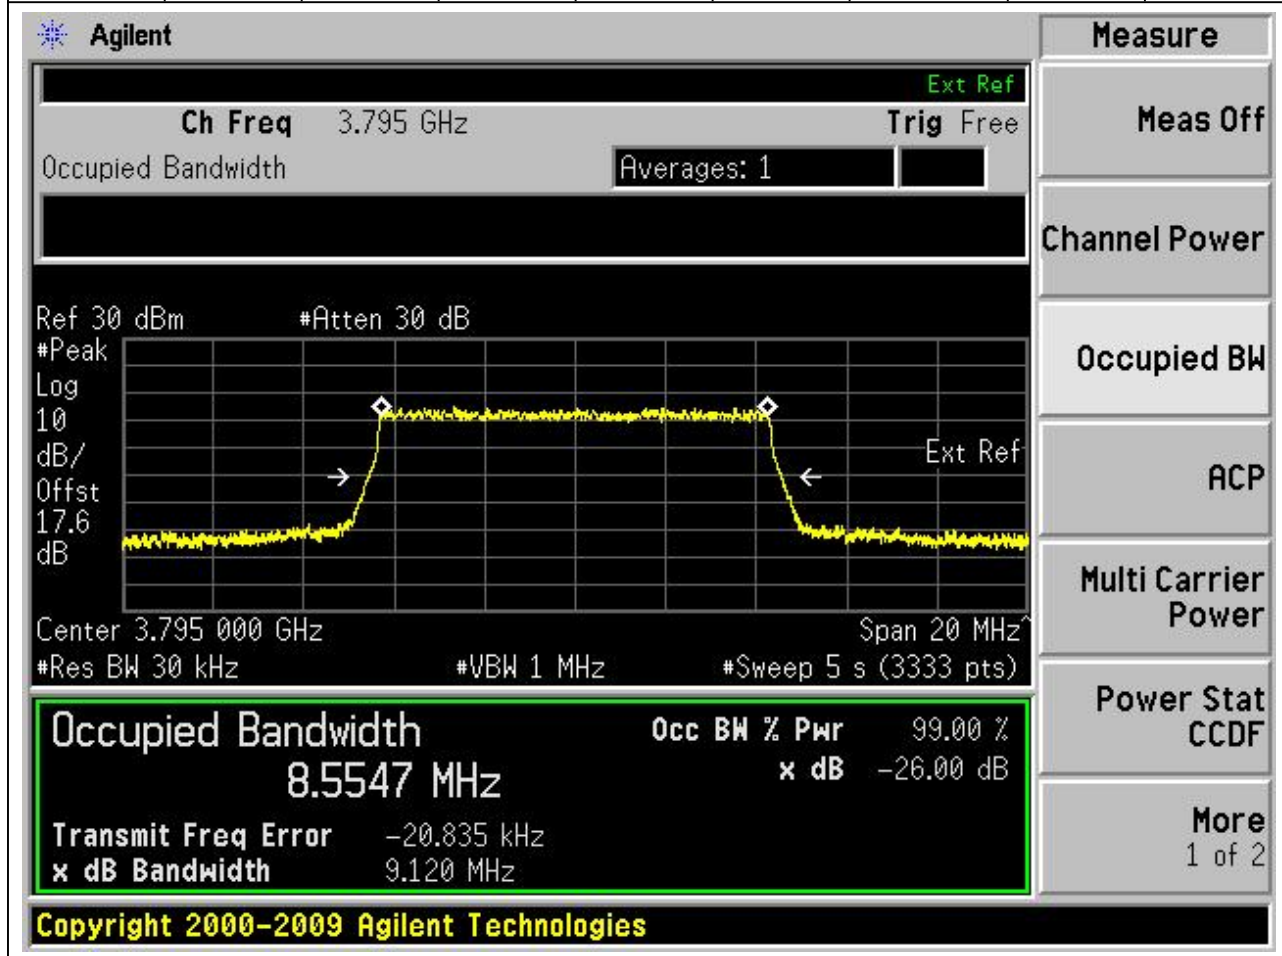

6.4 Occupied Bandwidth for SA Support PI2

BPSK_Part22-24-27(NTNV)(Channel:647000, Bandwidth:10, SCS:30,
OFDM:CP-OFDM, Modulation:QPSK, RB Number:24, RB Position:0)


Center Frequency (MHz)	OBW Power (%)	XdB Down (dB)	RBW (MHz)	Detector	OBW (MHz)	XdB Bandwidth (MHz)	Upper Limit (MHz)	Verdict
3705	99	26	0.03	Peak	8.56	9.08	10	Pass

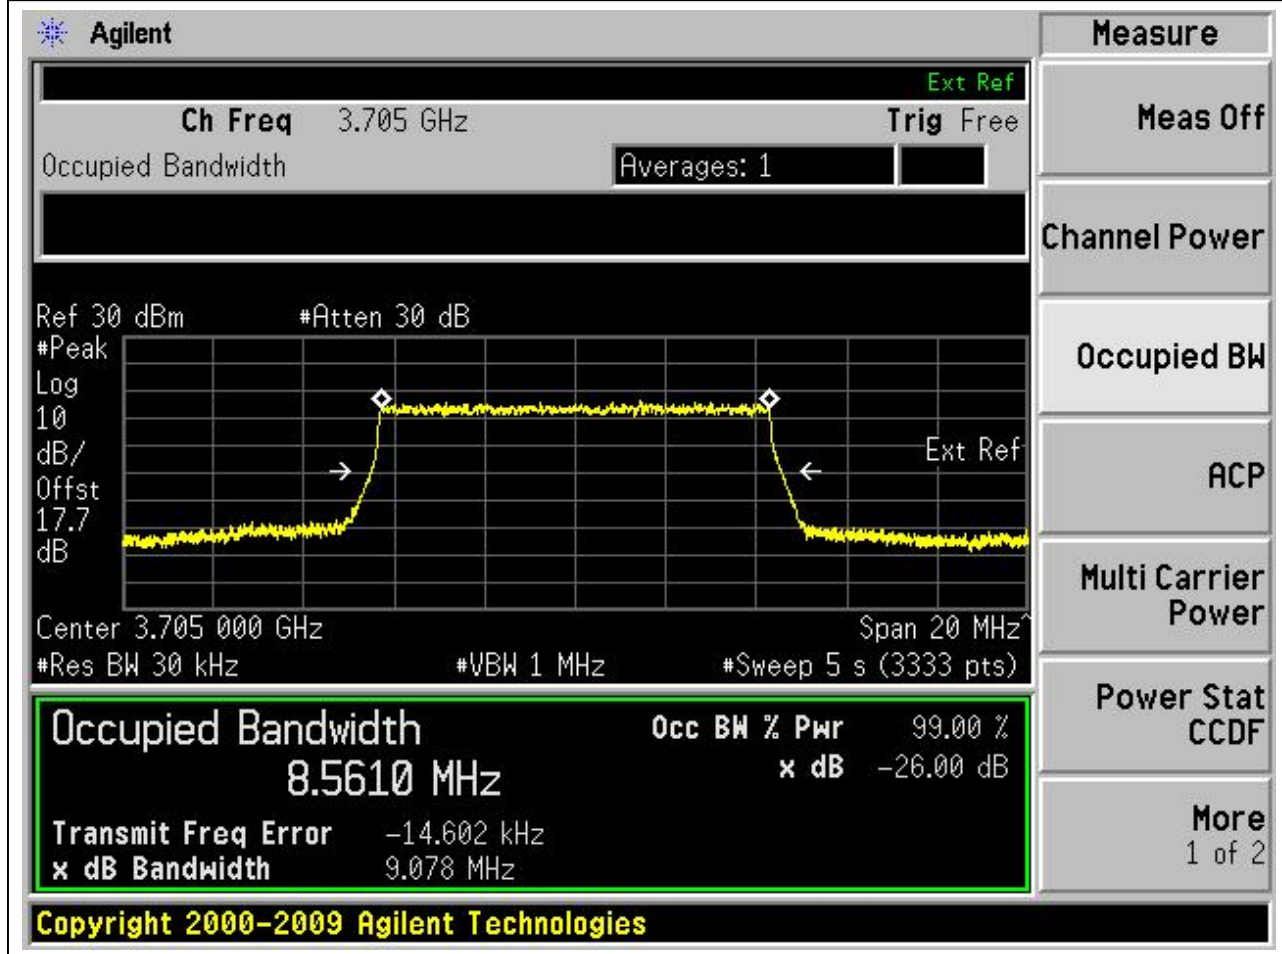

6.5 Occupied Bandwidth for SA Support PI2

BPSK_Part22-24-27(NTNV)(Channel:650000, Bandwidth:10, SCS:30,
OFDM:CP-OFDM, Modulation:QPSK, RB Number:24, RB Position:0)


Center Frequency (MHz)	OBW Power (%)	XdB Down (dB)	RBW (MHz)	Detector	OBW (MHz)	XdB Bandwidth (MHz)	Upper Limit (MHz)	Verdict
3750	99	26	0.03	Peak	8.56	9.1	10	Pass

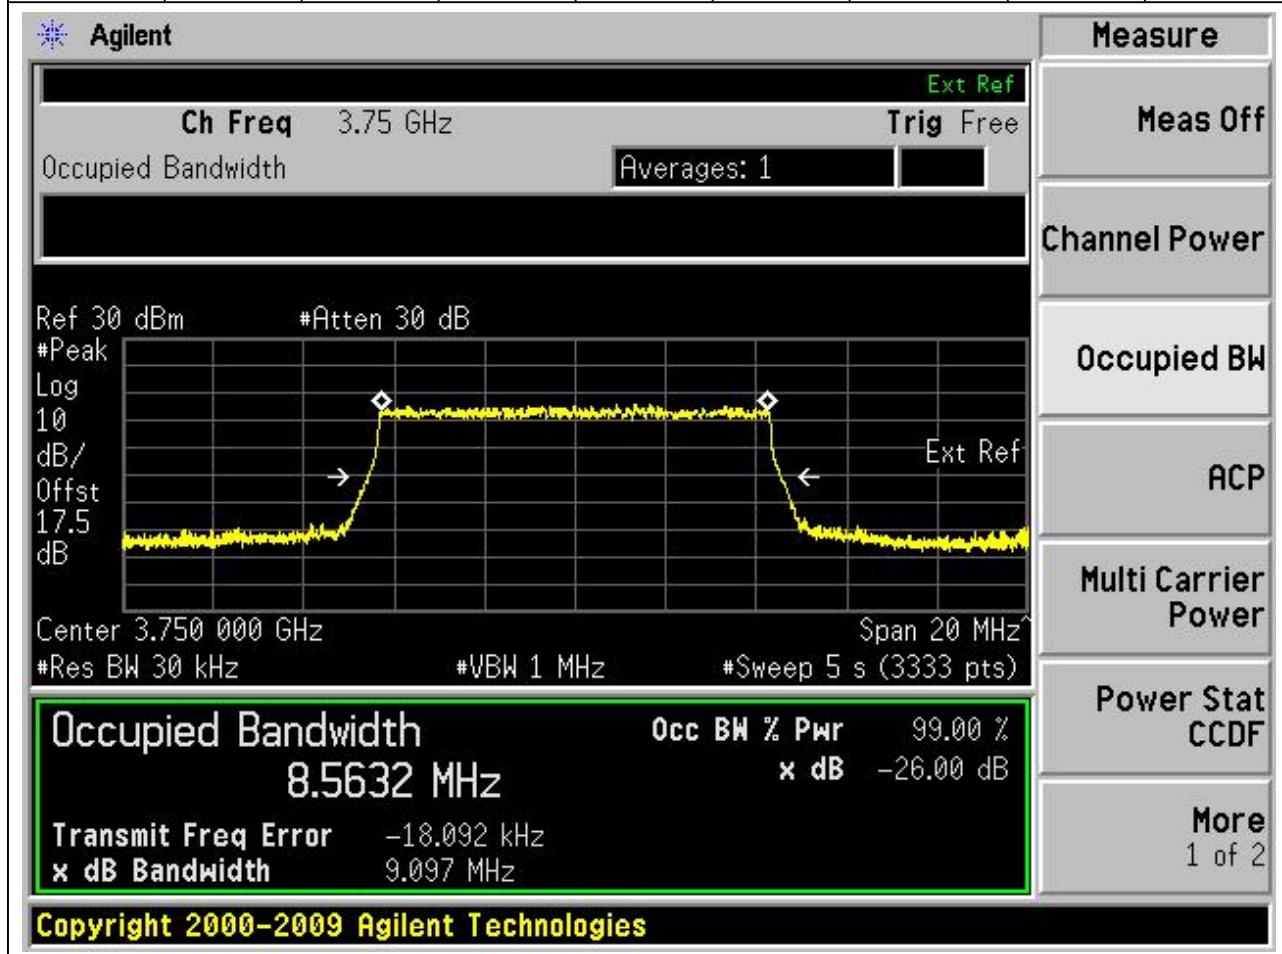

6.6 Occupied Bandwidth for SA Support PI2

BPSK_Part22-24-27(NTNV)(Channel:653000, Bandwidth:10, SCS:30,
OFDM:CP-OFDM, Modulation:QPSK, RB Number:24, RB Position:0)


Center Frequency (MHz)	OBW Power (%)	XdB Down (dB)	RBW (MHz)	Detector	OBW (MHz)	XdB Bandwidth (MHz)	Upper Limit (MHz)	Verdict
3795	99	26	0.03	Peak	8.56	9.07	10	Pass

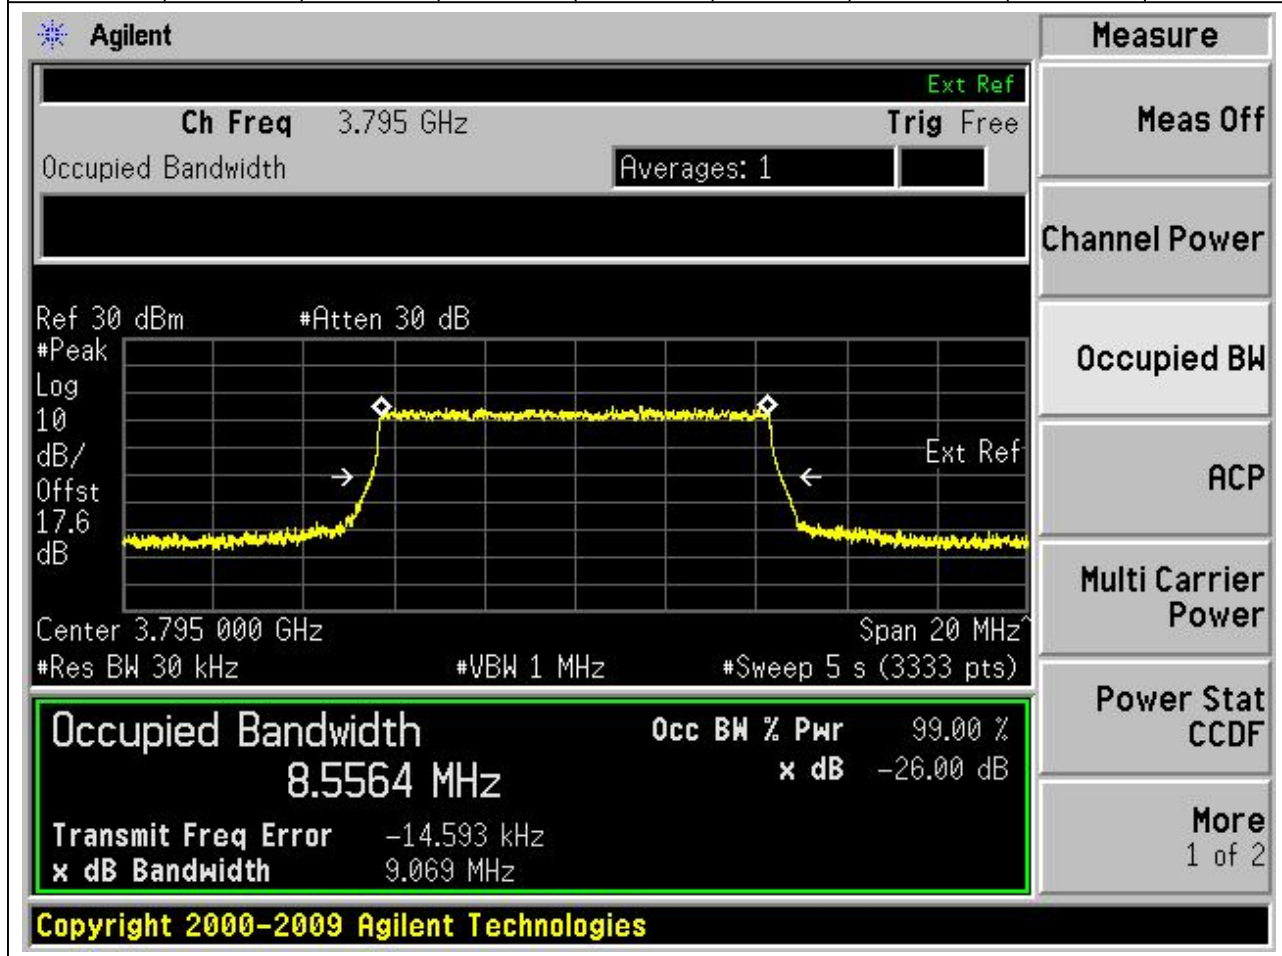

6.7 Occupied Bandwidth for SA Support PI2

BPSK_Part22-24-27(NTNV)(Channel:647000, Bandwidth:10, SCS:30,
OFDM:CP-OFDM, Modulation:16QAM, RB Number:24, RB Position:0)


Center Frequency (MHz)	OBW Power (%)	XdB Down (dB)	RBW (MHz)	Detector	OBW (MHz)	XdB Bandwidth (MHz)	Upper Limit (MHz)	Verdict
3705	99	26	0.03	Peak	8.56	9.07	10	Pass

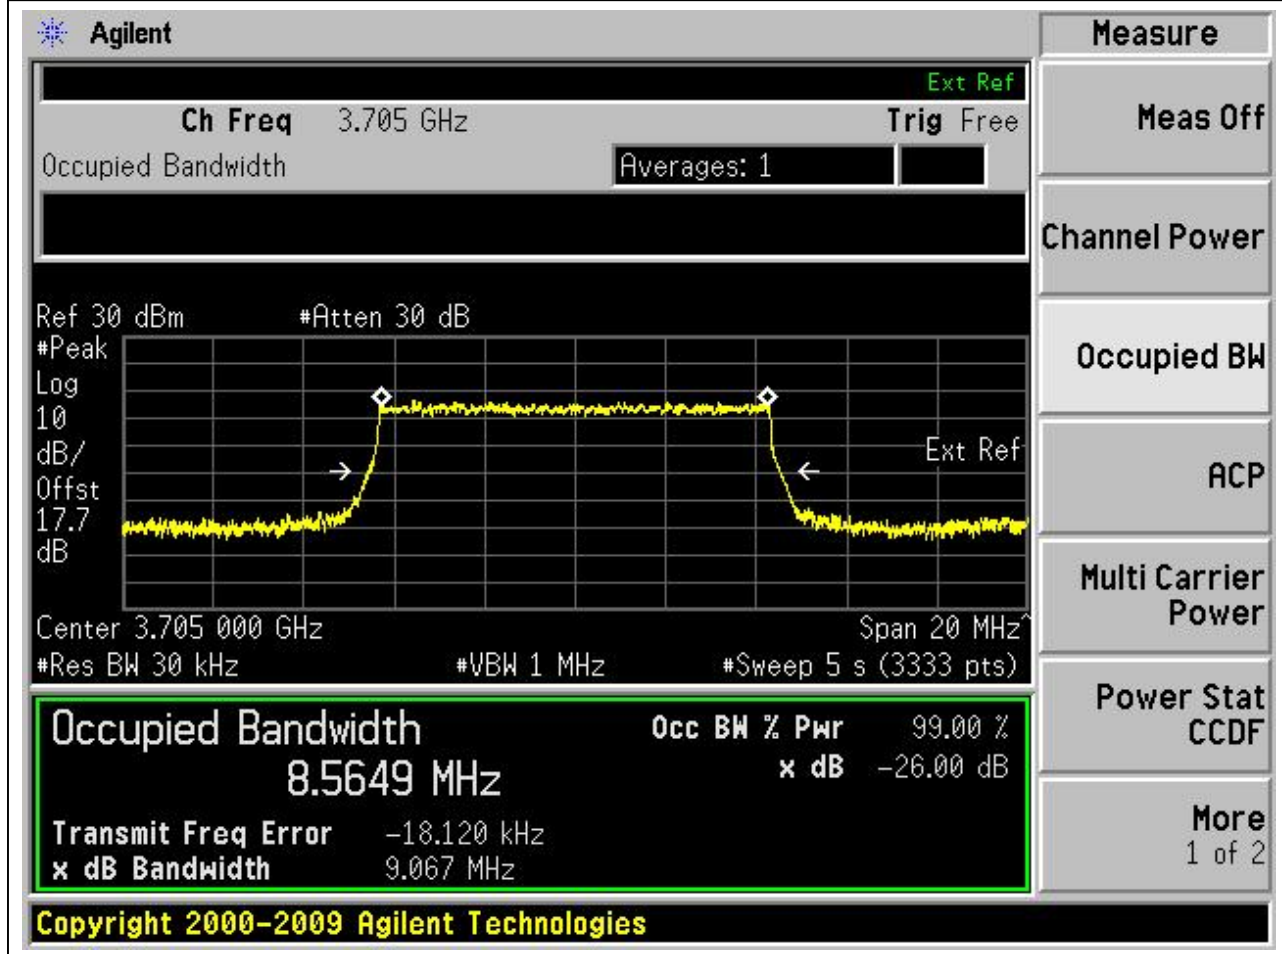

6.8 Occupied Bandwidth for SA Support PI2

BPSK_Part22-24-27(NTNV)(Channel:650000, Bandwidth:10, SCS:30,
OFDM:CP-OFDM, Modulation:16QAM, RB Number:24, RB Position:0)


Center Frequency (MHz)	OBW Power (%)	XdB Down (dB)	RBW (MHz)	Detector	OBW (MHz)	XdB Bandwidth (MHz)	Upper Limit (MHz)	Verdict
3750	99	26	0.03	Peak	8.55	9.06	10	Pass

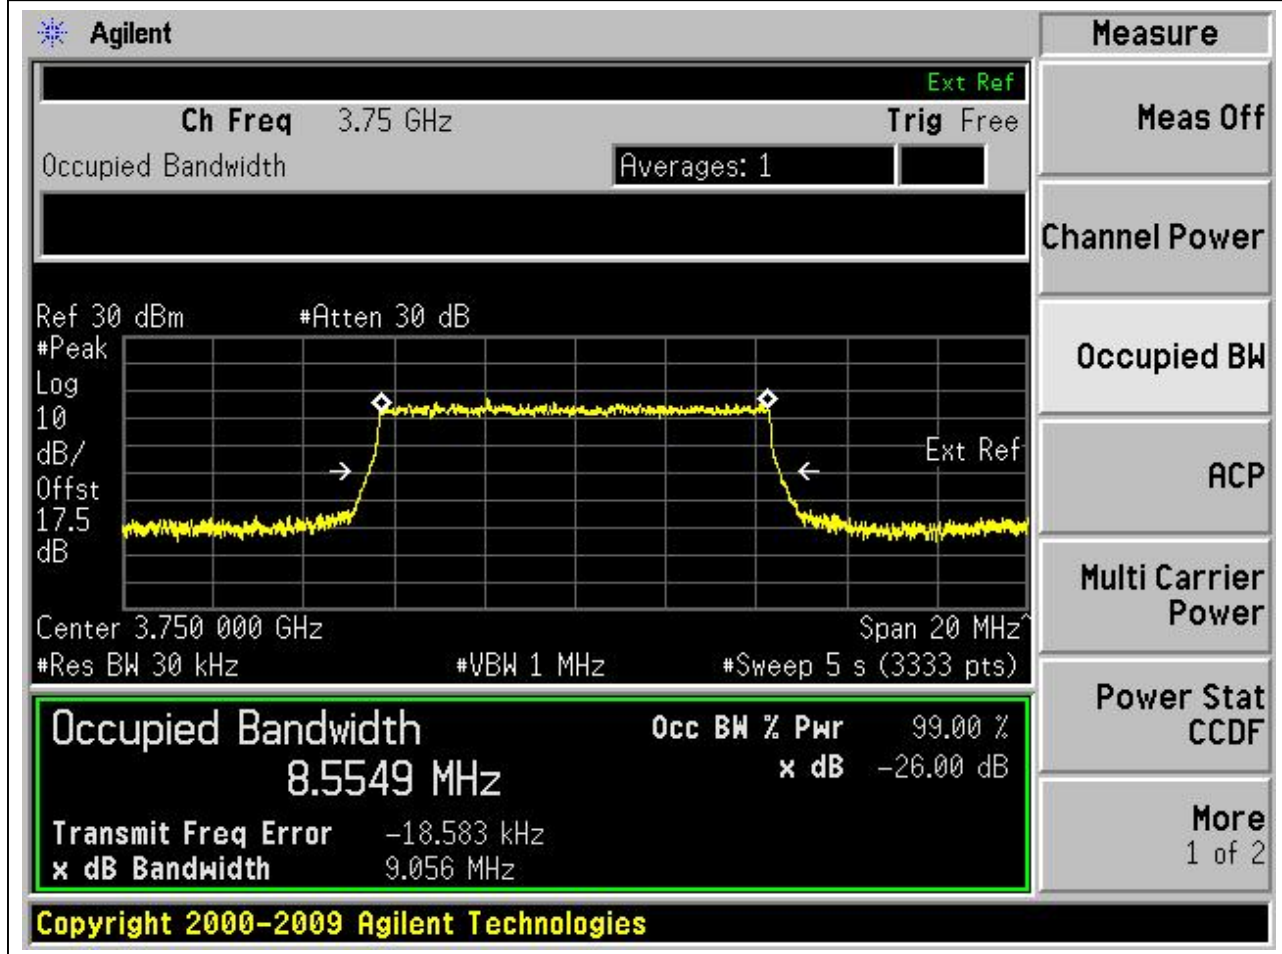

6.9 Occupied Bandwidth for SA Support PI2

BPSK_Part22-24-27(NTNV)(Channel:653000, Bandwidth:10, SCS:30,
OFDM:CP-OFDM, Modulation:16QAM, RB Number:24, RB Position:0)


Center Frequency (MHz)	OBW Power (%)	XdB Down (dB)	RBW (MHz)	Detector	OBW (MHz)	XdB Bandwidth (MHz)	Upper Limit (MHz)	Verdict
3795	99	26	0.03	Peak	8.57	9.09	10	Pass

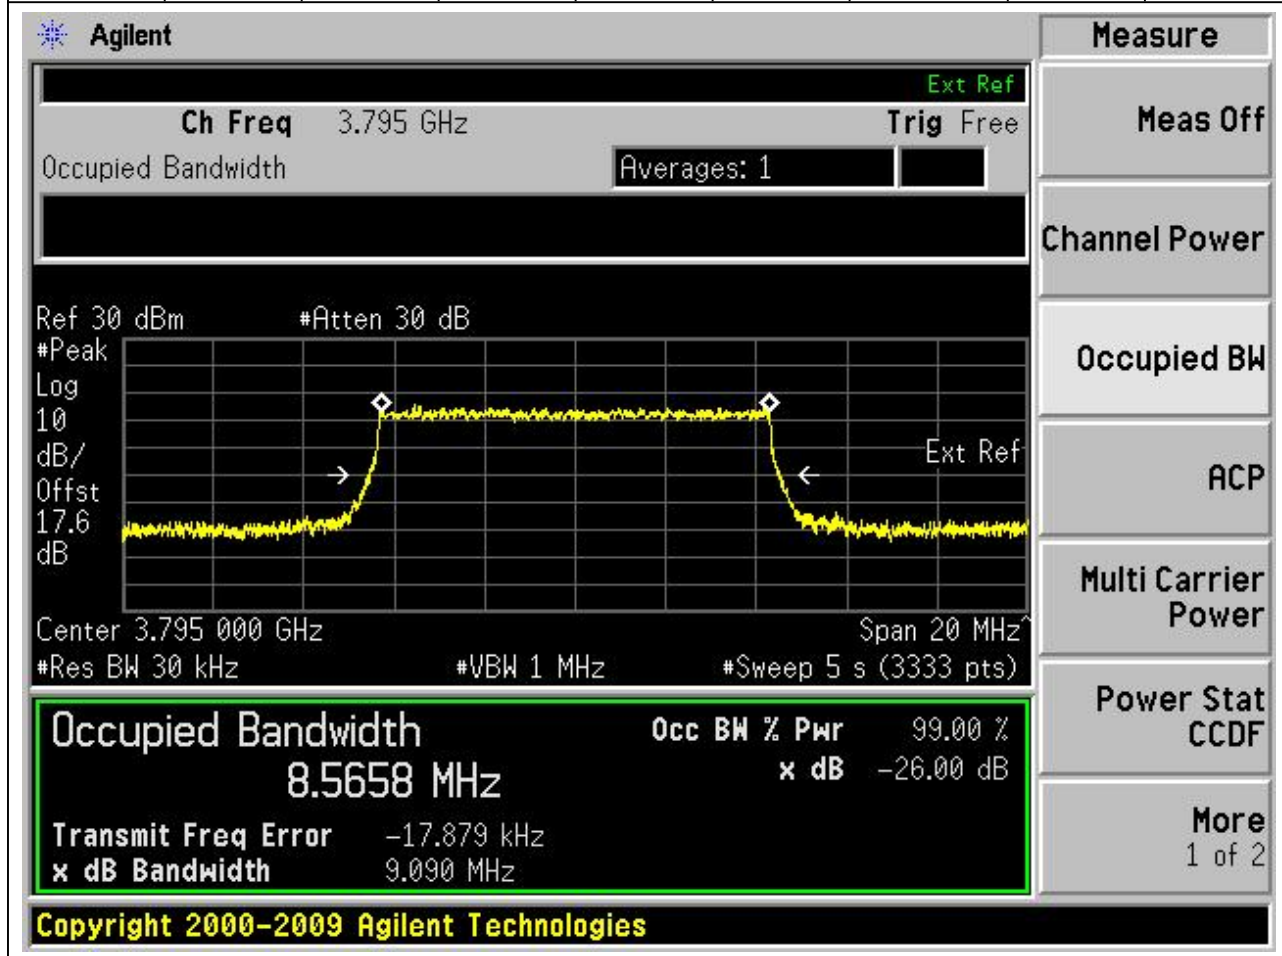

6.10 Occupied Bandwidth for SA Support PI2

BPSK_Part22-24-27(NTNV)(Channel:647000, Bandwidth:10, SCS:30,
OFDM:CP-OFDM, Modulation:64QAM, RB Number:24, RB Position:0)


Center Frequency (MHz)	OBW Power (%)	XdB Down (dB)	RBW (MHz)	Detector	OBW (MHz)	XdB Bandwidth (MHz)	Upper Limit (MHz)	Verdict
3705	99	26	0.03	Peak	8.55	9	10	Pass

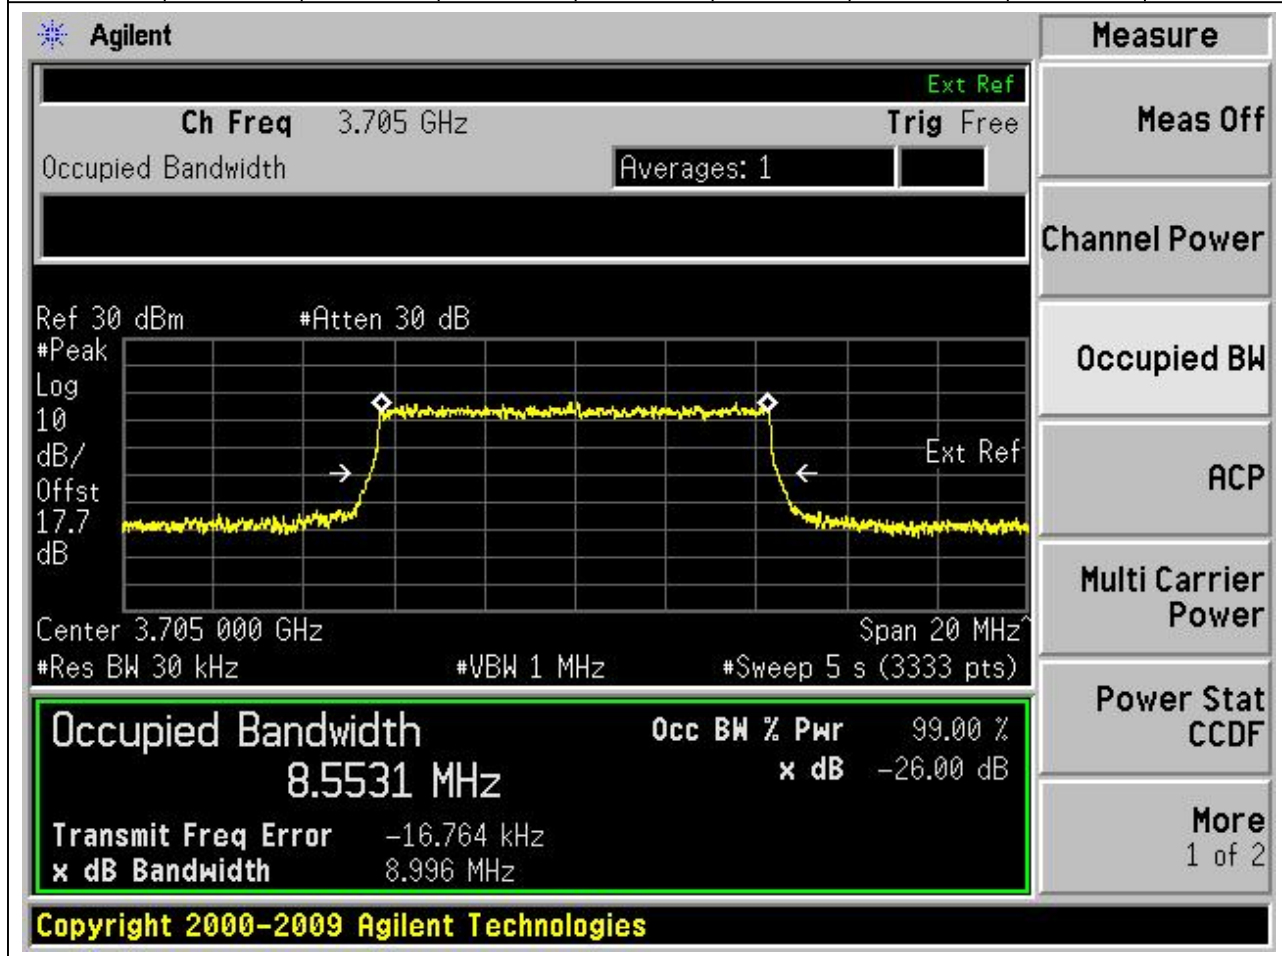

6.11 Occupied Bandwidth for SA Support PI2

BPSK_Part22-24-27(NTNV)(Channel:650000, Bandwidth:10, SCS:30,
OFDM:CP-OFDM, Modulation:64QAM, RB Number:24, RB Position:0)


Center Frequency (MHz)	OBW Power (%)	XdB Down (dB)	RBW (MHz)	Detector	OBW (MHz)	XdB Bandwidth (MHz)	Upper Limit (MHz)	Verdict
3750	99	26	0.03	Peak	8.56	9.05	10	Pass

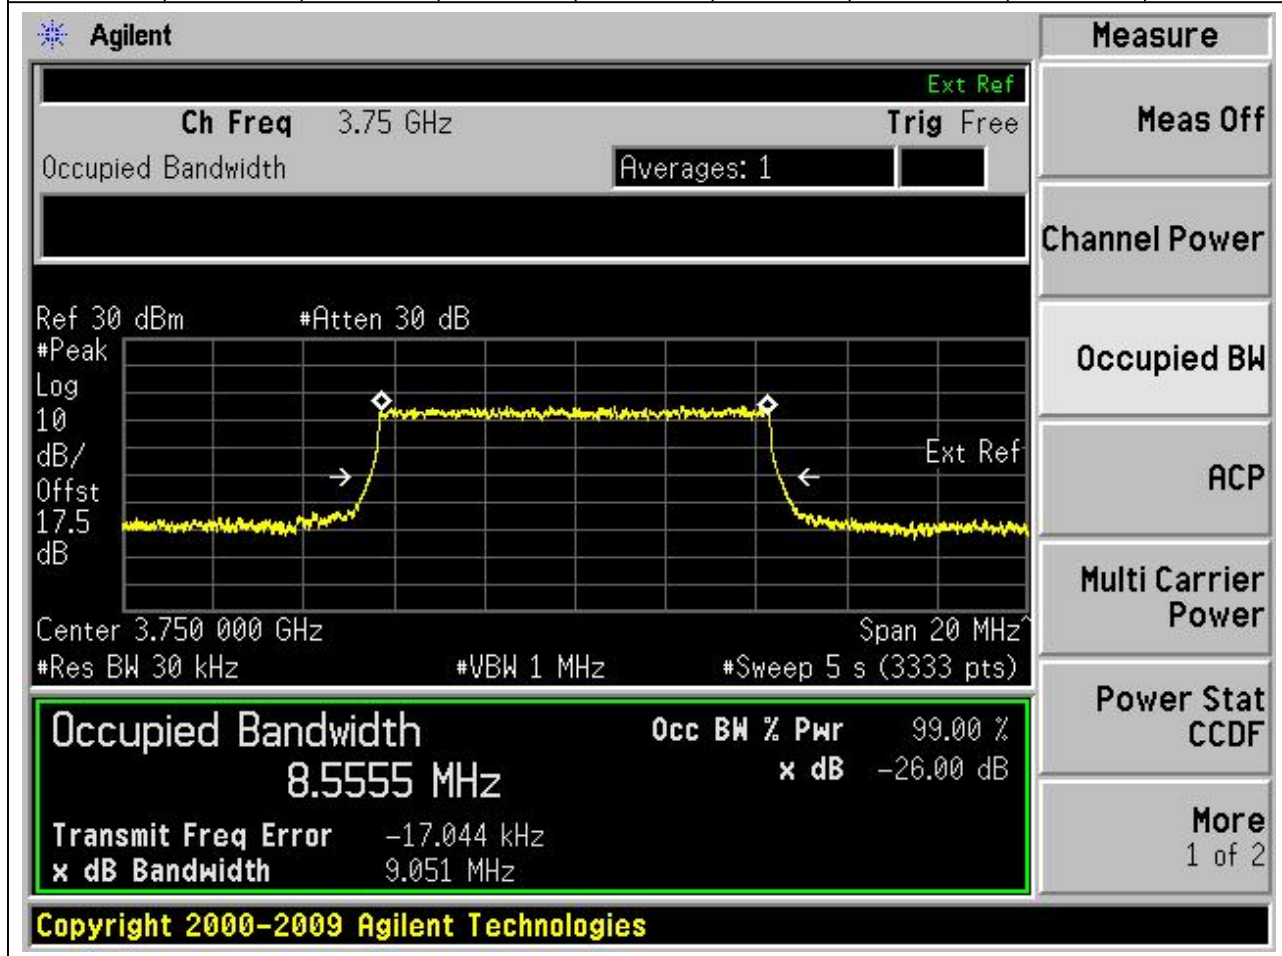

6.12 Occupied Bandwidth for SA Support PI2

BPSK_Part22-24-27(NTNV)(Channel:653000, Bandwidth:10, SCS:30,
OFDM:CP-OFDM, Modulation:64QAM, RB Number:24, RB Position:0)


Center Frequency (MHz)	OBW Power (%)	XdB Down (dB)	RBW (MHz)	Detector	OBW (MHz)	XdB Bandwidth (MHz)	Upper Limit (MHz)	Verdict
3795	99	26	0.03	Peak	8.55	9.02	10	Pass

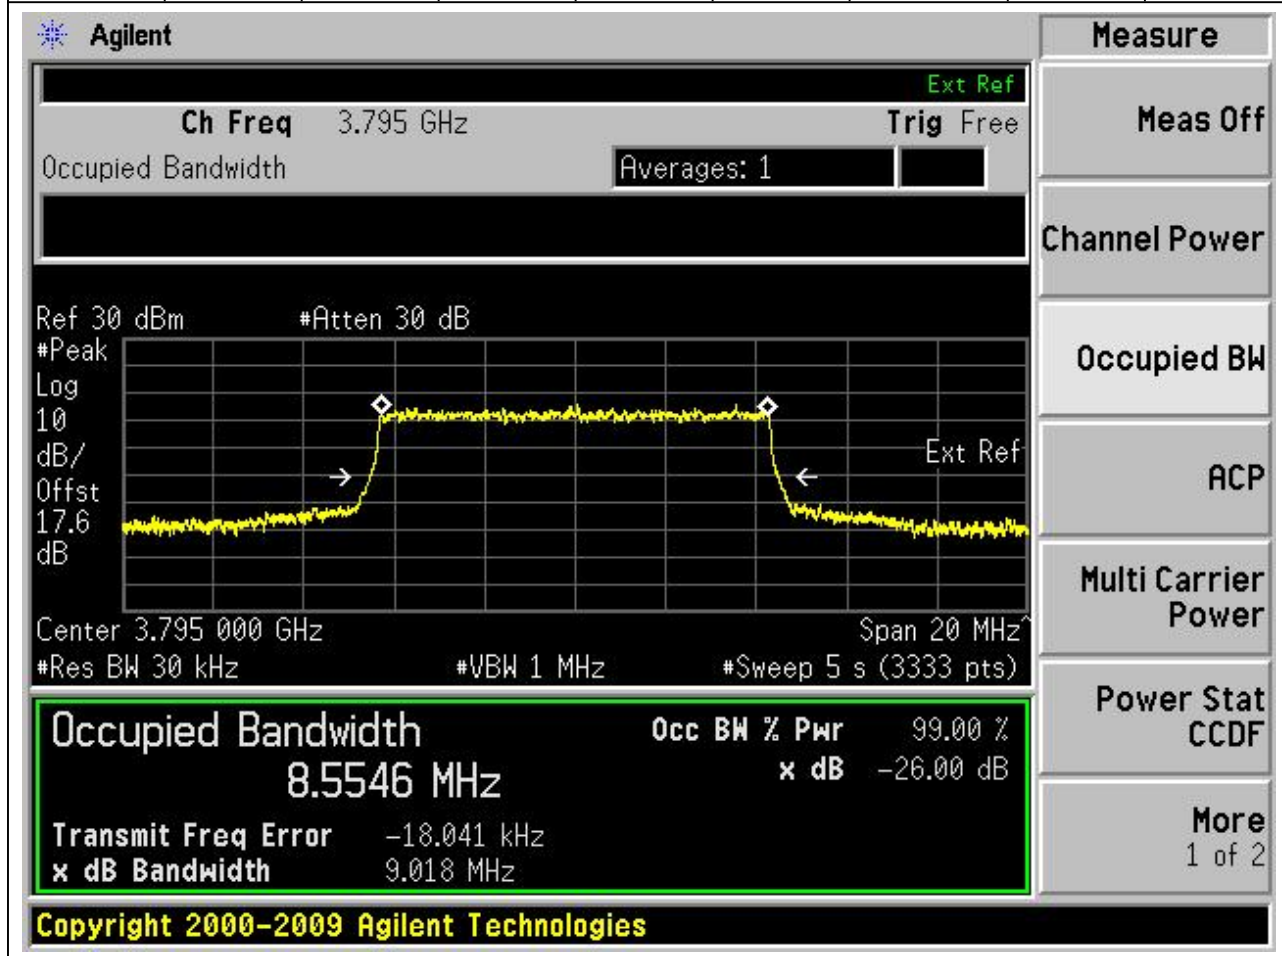

6.13 Occupied Bandwidth for SA Support PI2

BPSK_Part22-24-27(NTNV)(Channel:647000, Bandwidth:10, SCS:30,
OFDM:CP-OFDM, Modulation:256QAM, RB Number:24, RB Position:0)


Center Frequency (MHz)	OBW Power (%)	XdB Down (dB)	RBW (MHz)	Detector	OBW (MHz)	XdB Bandwidth (MHz)	Upper Limit (MHz)	Verdict
3705	99	26	0.03	Peak	8.57	9	10	Pass

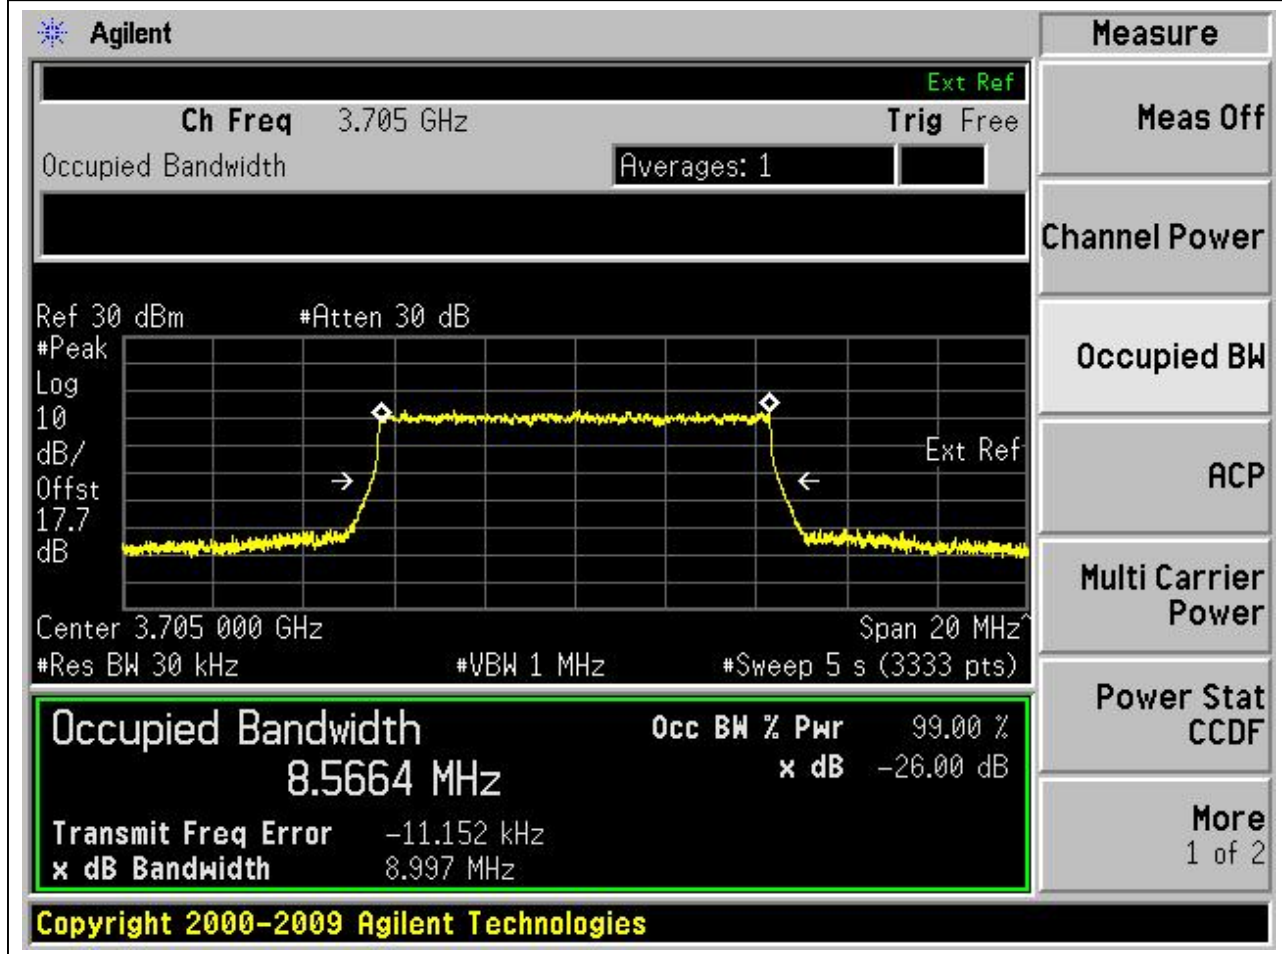

6.14 Occupied Bandwidth for SA Support PI2

BPSK_Part22-24-27(NTNV)(Channel:650000, Bandwidth:10, SCS:30,
OFDM:CP-OFDM, Modulation:256QAM, RB Number:24, RB Position:0)


Center Frequency (MHz)	OBW Power (%)	XdB Down (dB)	RBW (MHz)	Detector	OBW (MHz)	XdB Bandwidth (MHz)	Upper Limit (MHz)	Verdict
3750	99	26	0.03	Peak	8.56	9.08	10	Pass

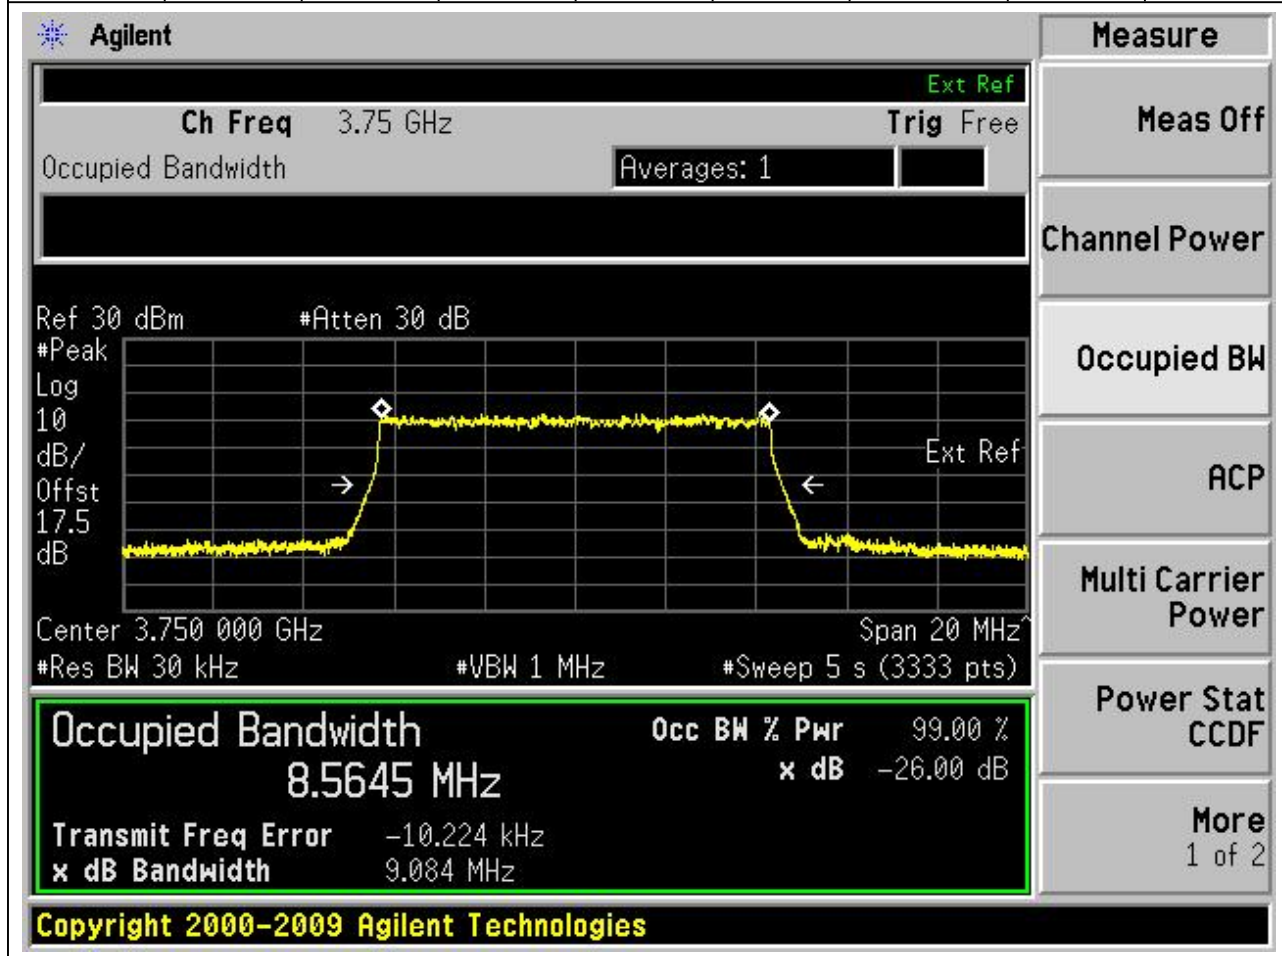

6.15 Occupied Bandwidth for SA Support PI2

BPSK_Part22-24-27(NTNV)(Channel:653000, Bandwidth:10, SCS:30,
OFDM:CP-OFDM, Modulation:256QAM, RB Number:24, RB Position:0)

Center Frequency (MHz)	OBW Power (%)	XdB Down (dB)	RBW (MHz)	Detector	OBW (MHz)	XdB Bandwidth (MHz)	Upper Limit (MHz)	Verdict
3795	99	26	0.03	Peak	8.57	9.03	10	Pass

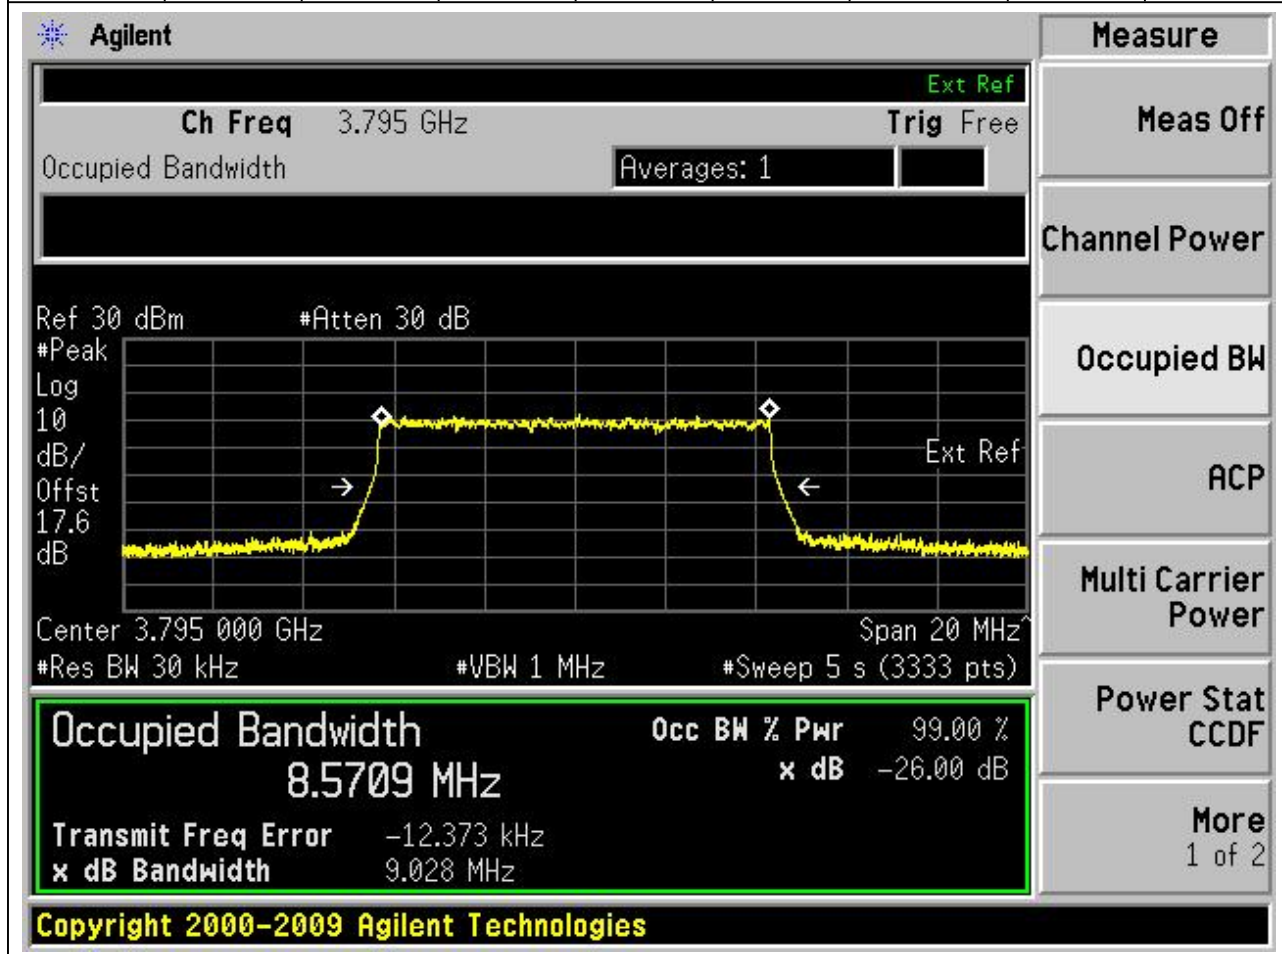


6.16 Occupied Bandwidth for SA Support PI2

BPSK_Part22-24-27(NTNV)(Channel:648334, Bandwidth:50, SCS:30,

OFDM:CP-OFDM, Modulation:Pi/2-BPSK, RB Number:133, RB Position:0)


Center Frequency (MHz)	OBW Power (%)	XdB Down (dB)	RBW (MHz)	Detector	OBW (MHz)	XdB Bandwidth (MHz)	Upper Limit (MHz)	Verdict
3725.01	99	26	1	Peak	47.53	50.43	50	Pass

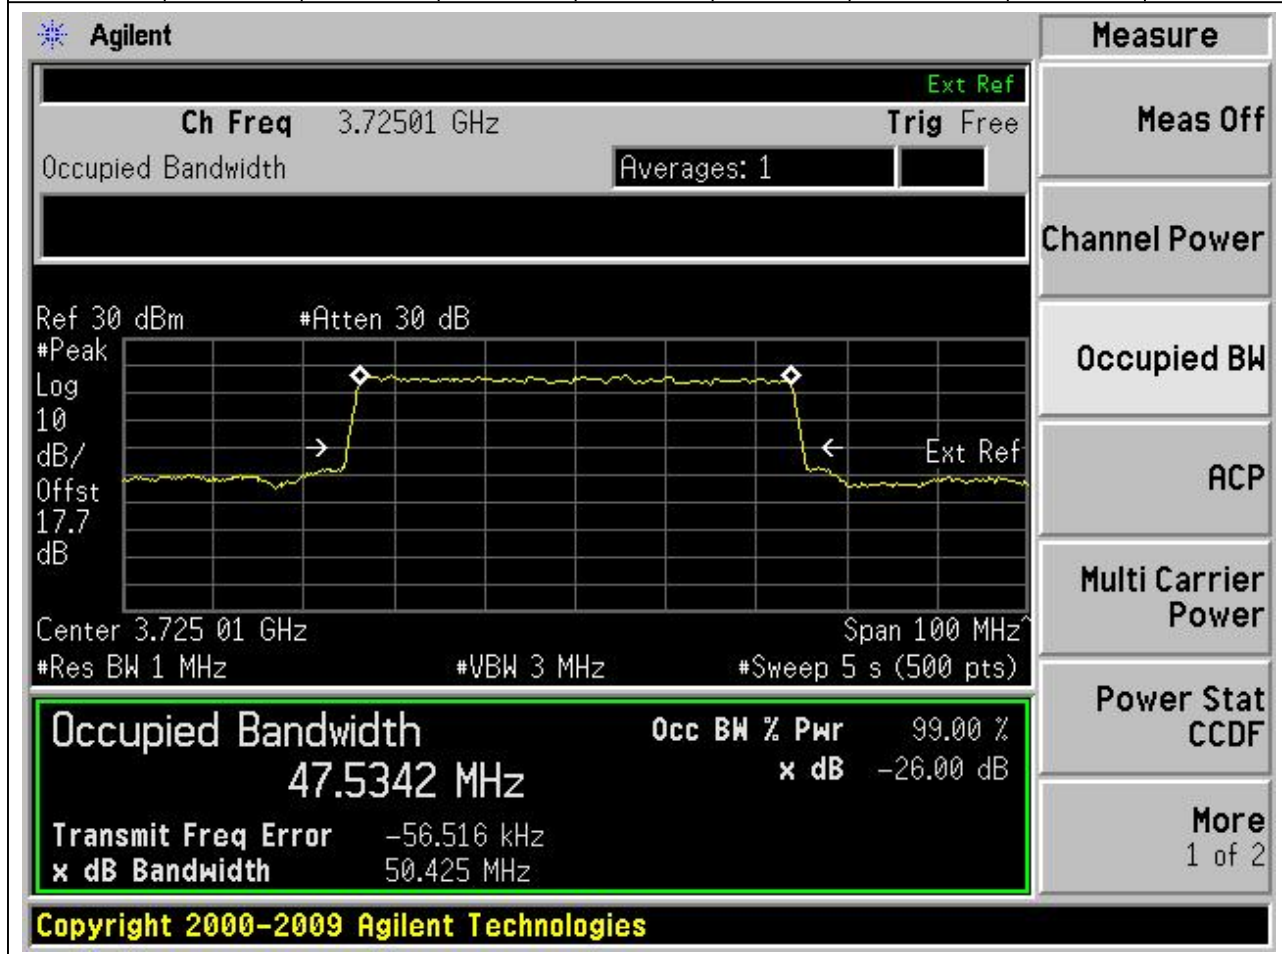

6.17 Occupied Bandwidth for SA Support PI2

BPSK_Part22-24-27(NTNV)(Channel:650000, Bandwidth:50, SCS:30,
OFDM:CP-OFDM, Modulation:Pi/2-BPSK, RB Number:133, RB Position:0)

Center Frequency (MHz)	OBW Power (%)	XdB Down (dB)	RBW (MHz)	Detector	OBW (MHz)	XdB Bandwidth (MHz)	Upper Limit (MHz)	Verdict
3750	99	26	1	Peak	47.73	50.41	50	Pass

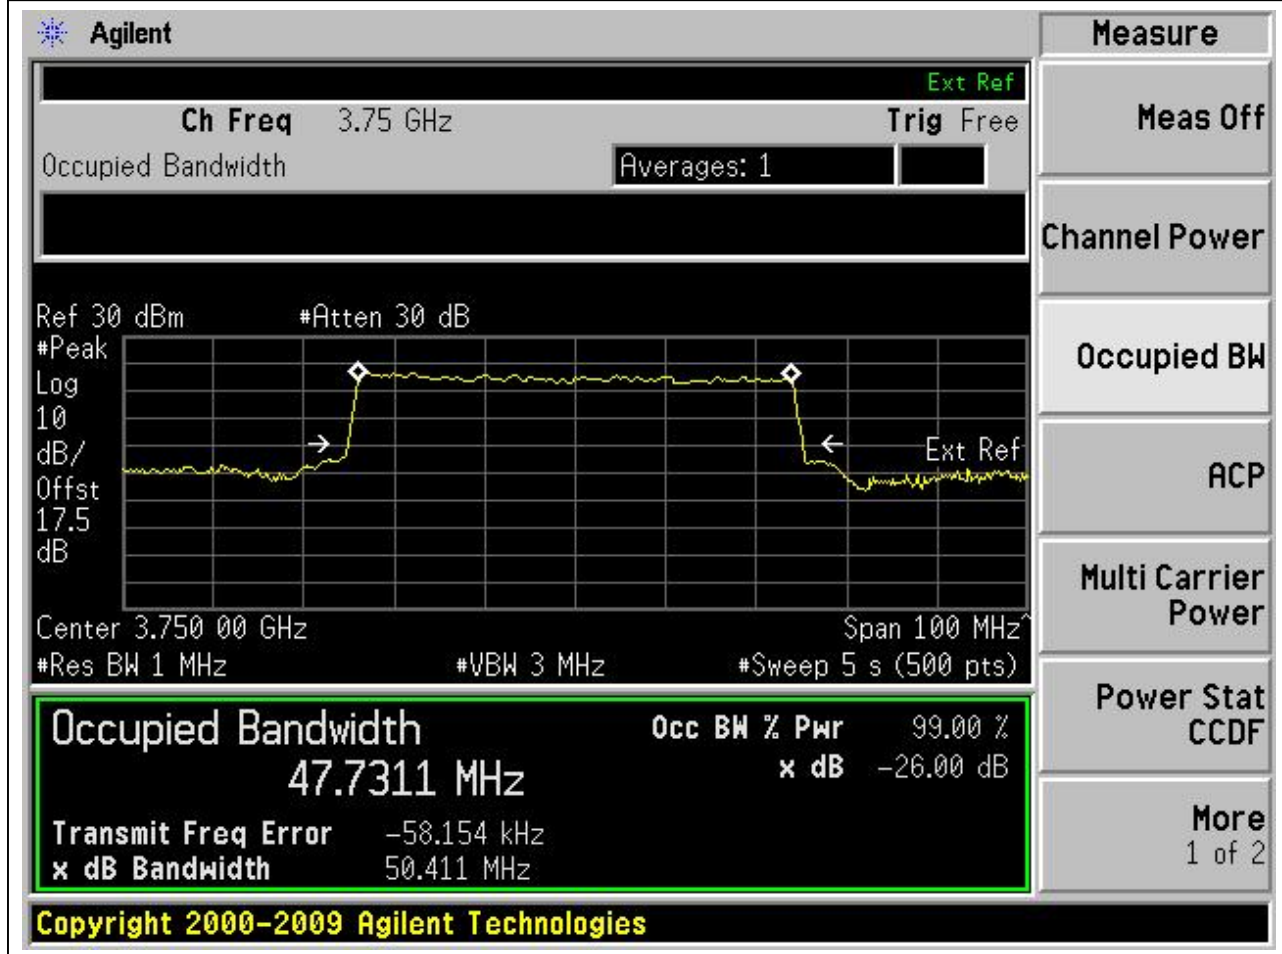


6.18 Occupied Bandwidth for SA Support PI2

BPSK_Part22-24-27(NTNV)(Channel:651666, Bandwidth:50, SCS:30,

OFDM:CP-OFDM, Modulation:Pi/2-BPSK, RB Number:133, RB Position:0)


Center Frequency (MHz)	OBW Power (%)	XdB Down (dB)	RBW (MHz)	Detector	OBW (MHz)	XdB Bandwidth (MHz)	Upper Limit (MHz)	Verdict
3774.99	99	26	1	Peak	47.51	50.34	50	Pass

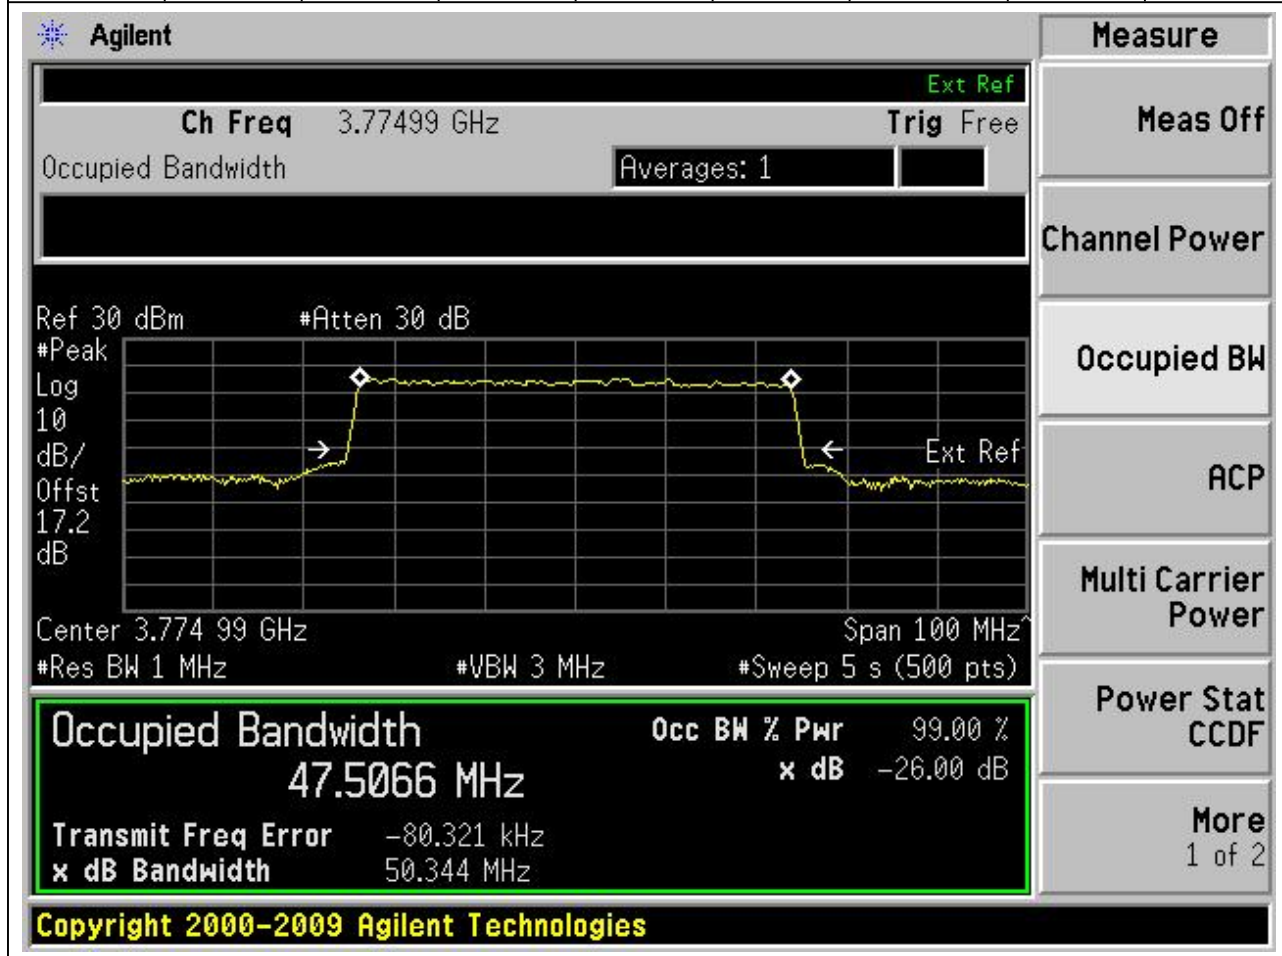

6.19 Occupied Bandwidth for SA Support PI2

BPSK_Part22-24-27(NTNV)(Channel:648334, Bandwidth:50, SCS:30,
OFDM:CP-OFDM, Modulation:QPSK, RB Number:133, RB Position:0)


Center Frequency (MHz)	OBW Power (%)	XdB Down (dB)	RBW (MHz)	Detector	OBW (MHz)	XdB Bandwidth (MHz)	Upper Limit (MHz)	Verdict
3725.01	99	26	1	Peak	47.56	50.31	50	Pass

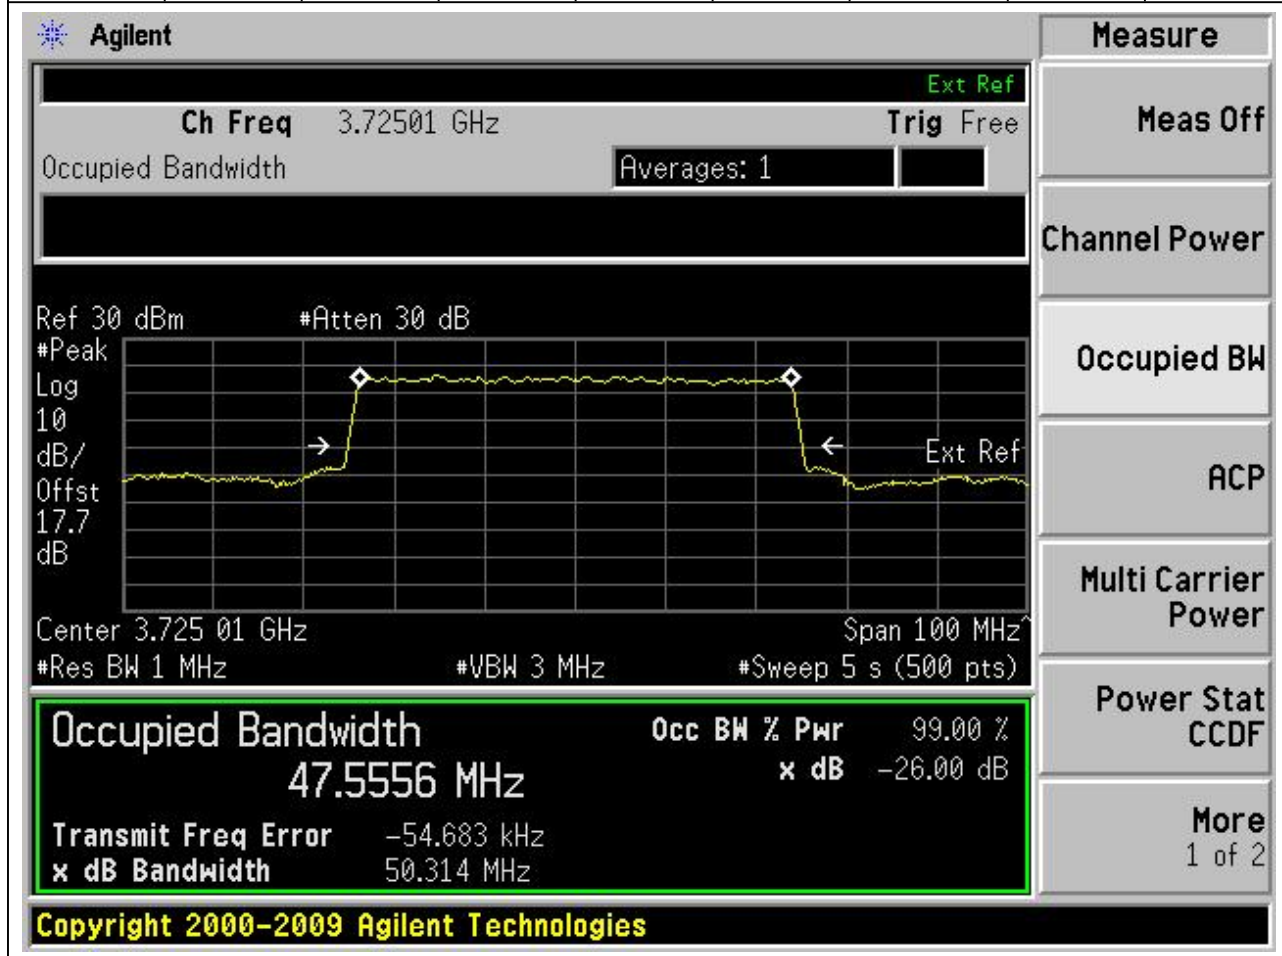

6.20 Occupied Bandwidth for SA Support PI2

BPSK_Part22-24-27(NTNV)(Channel:650000, Bandwidth:50, SCS:30,
OFDM:CP-OFDM, Modulation:QPSK, RB Number:133, RB Position:0)


Center Frequency (MHz)	OBW Power (%)	XdB Down (dB)	RBW (MHz)	Detector	OBW (MHz)	XdB Bandwidth (MHz)	Upper Limit (MHz)	Verdict
3750	99	26	1	Peak	47.6	50.22	50	Pass

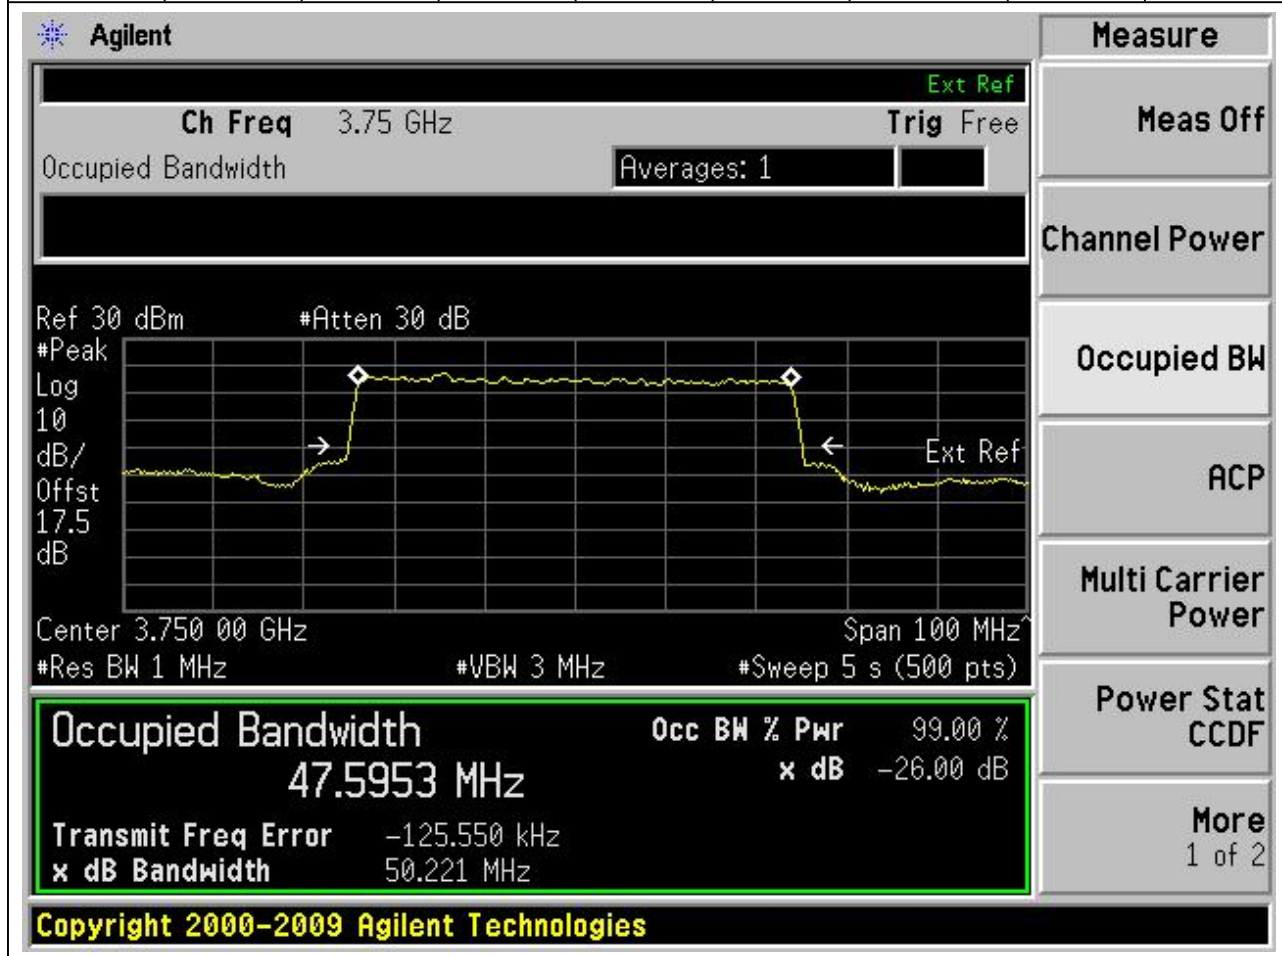

6.21 Occupied Bandwidth for SA Support PI2

BPSK_Part22-24-27(NTNV)(Channel:651666, Bandwidth:50, SCS:30,
OFDM:CP-OFDM, Modulation:QPSK, RB Number:133, RB Position:0)


Center Frequency (MHz)	OBW Power (%)	XdB Down (dB)	RBW (MHz)	Detector	OBW (MHz)	XdB Bandwidth (MHz)	Upper Limit (MHz)	Verdict
3774.99	99	26	1	Peak	47.48	50.3	50	Pass

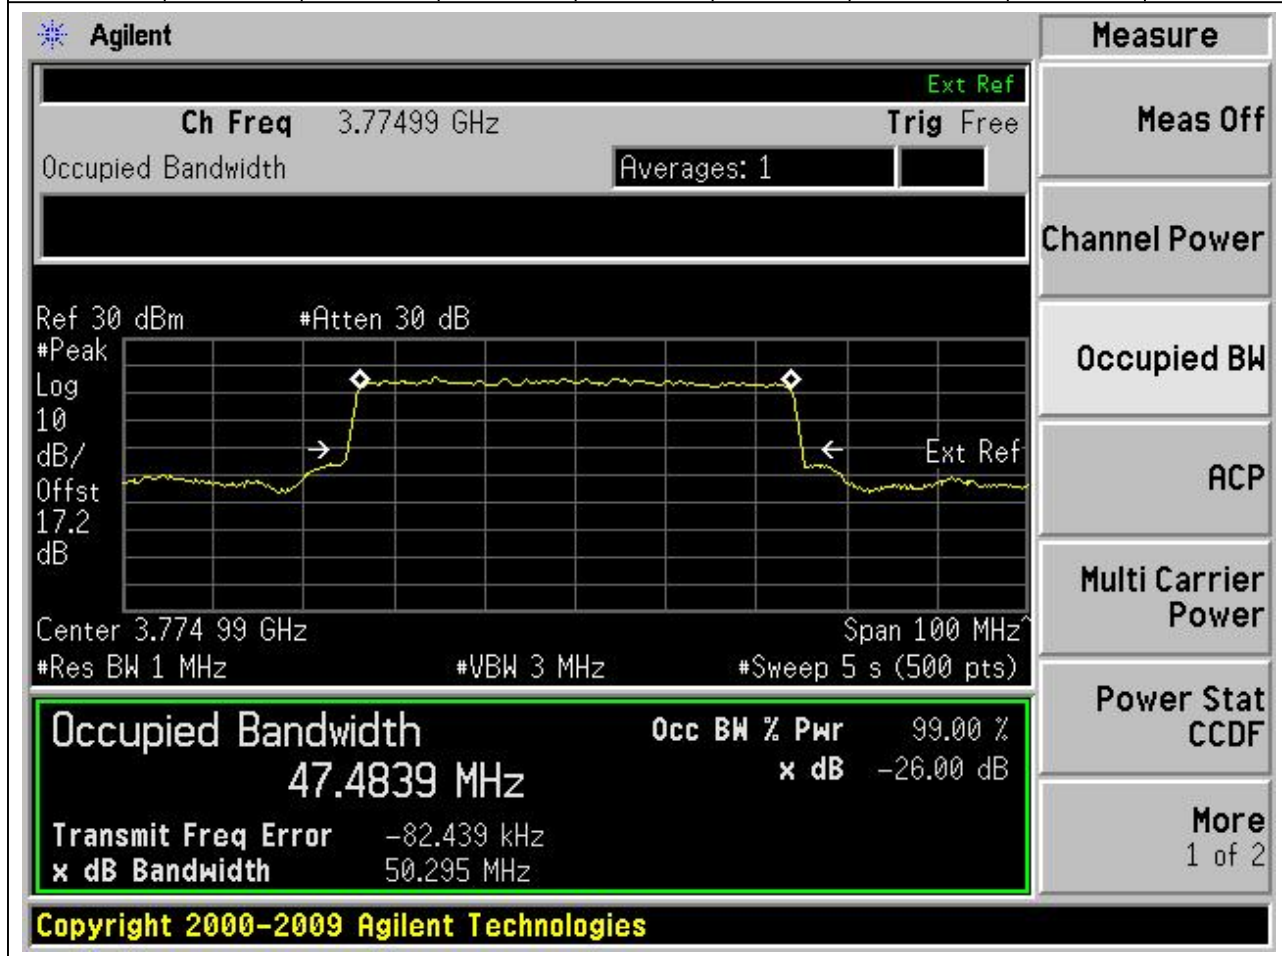

6.22 Occupied Bandwidth for SA Support PI2

BPSK_Part22-24-27(NTNV)(Channel:648334, Bandwidth:50, SCS:30,
OFDM:CP-OFDM, Modulation:16QAM, RB Number:133, RB Position:0)


Center Frequency (MHz)	OBW Power (%)	XdB Down (dB)	RBW (MHz)	Detector	OBW (MHz)	XdB Bandwidth (MHz)	Upper Limit (MHz)	Verdict
3725.01	99	26	1	Peak	47.69	50.35	50	Pass

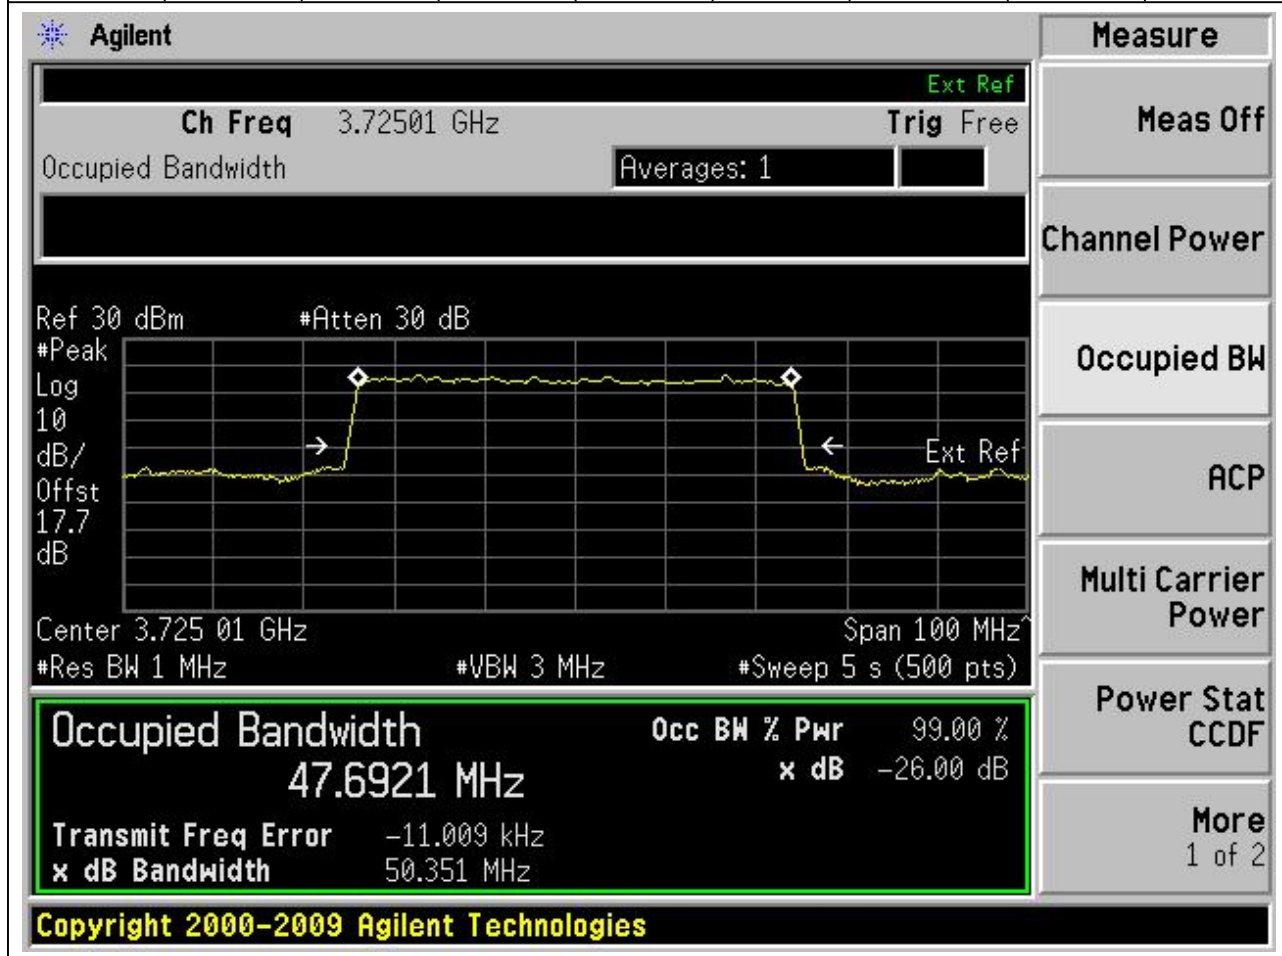

6.23 Occupied Bandwidth for SA Support PI2

BPSK_Part22-24-27(NTNV)(Channel:650000, Bandwidth:50, SCS:30,
OFDM:CP-OFDM, Modulation:16QAM, RB Number:133, RB Position:0)


Center Frequency (MHz)	OBW Power (%)	XdB Down (dB)	RBW (MHz)	Detector	OBW (MHz)	XdB Bandwidth (MHz)	Upper Limit (MHz)	Verdict
3750	99	26	1	Peak	47.79	50.24	50	Pass

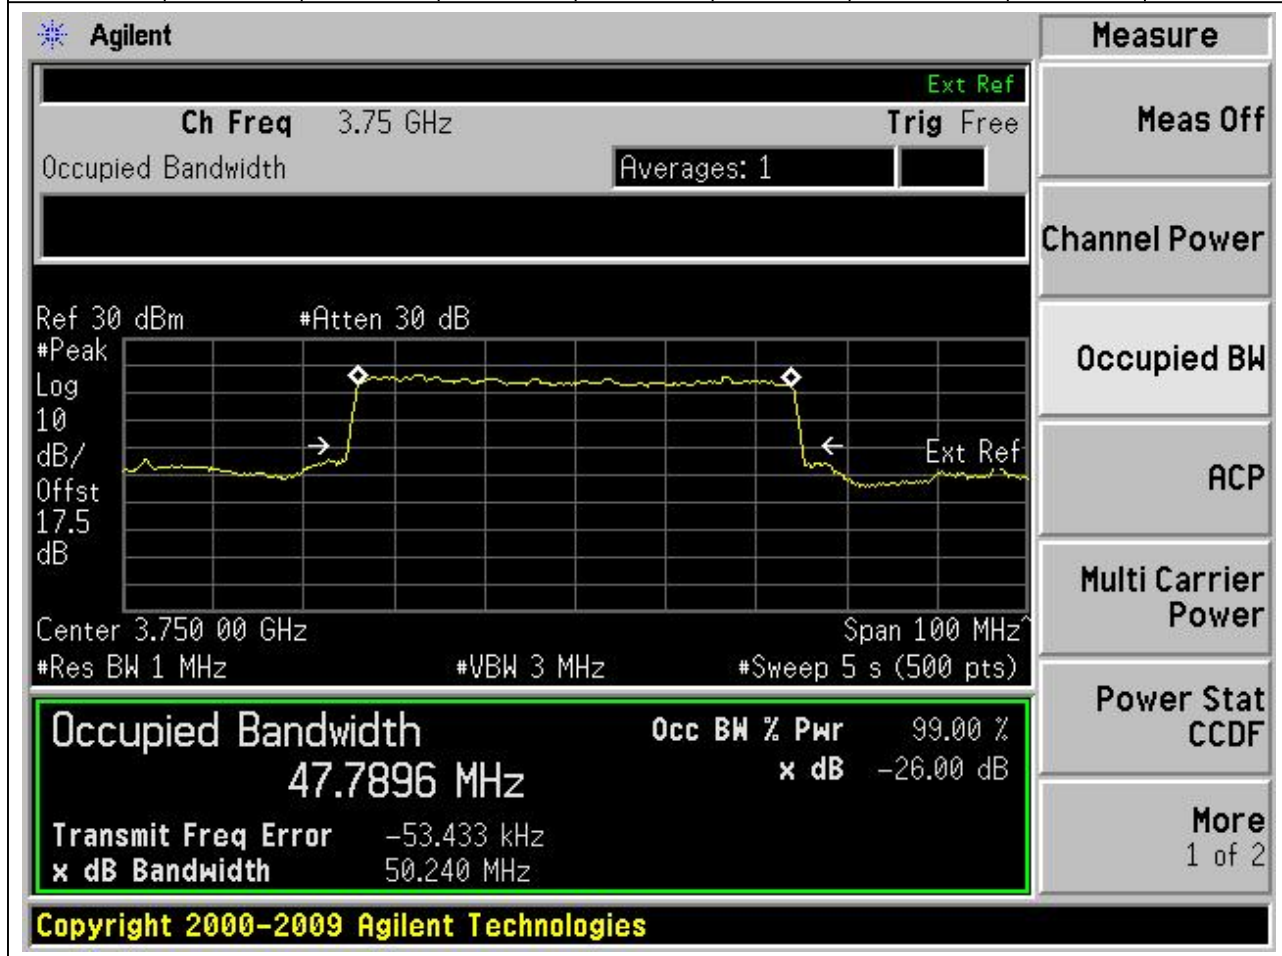

6.24 Occupied Bandwidth for SA Support PI2

BPSK_Part22-24-27(NTNV)(Channel:651666, Bandwidth:50, SCS:30,
OFDM:CP-OFDM, Modulation:16QAM, RB Number:133, RB Position:0)


Center Frequency (MHz)	OBW Power (%)	XdB Down (dB)	RBW (MHz)	Detector	OBW (MHz)	XdB Bandwidth (MHz)	Upper Limit (MHz)	Verdict
3774.99	99	26	1	Peak	47.65	50.35	50	Pass

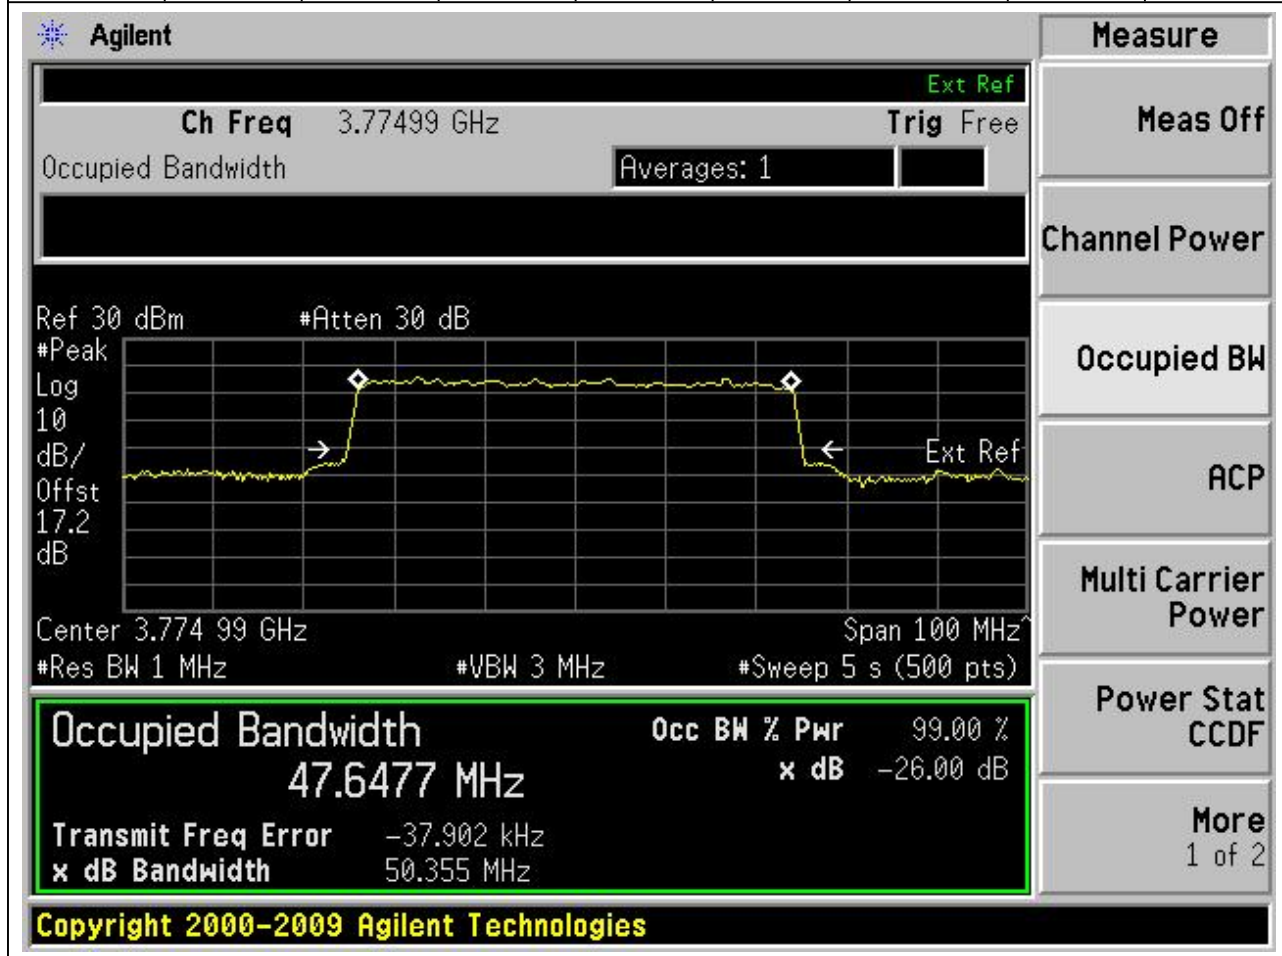

6.25 Occupied Bandwidth for SA Support PI2

BPSK_Part22-24-27(NTNV)(Channel:648334, Bandwidth:50, SCS:30,
OFDM:CP-OFDM, Modulation:64QAM, RB Number:133, RB Position:0)


Center Frequency (MHz)	OBW Power (%)	XdB Down (dB)	RBW (MHz)	Detector	OBW (MHz)	XdB Bandwidth (MHz)	Upper Limit (MHz)	Verdict
3725.01	99	26	1	Peak	47.55	50.36	50	Pass

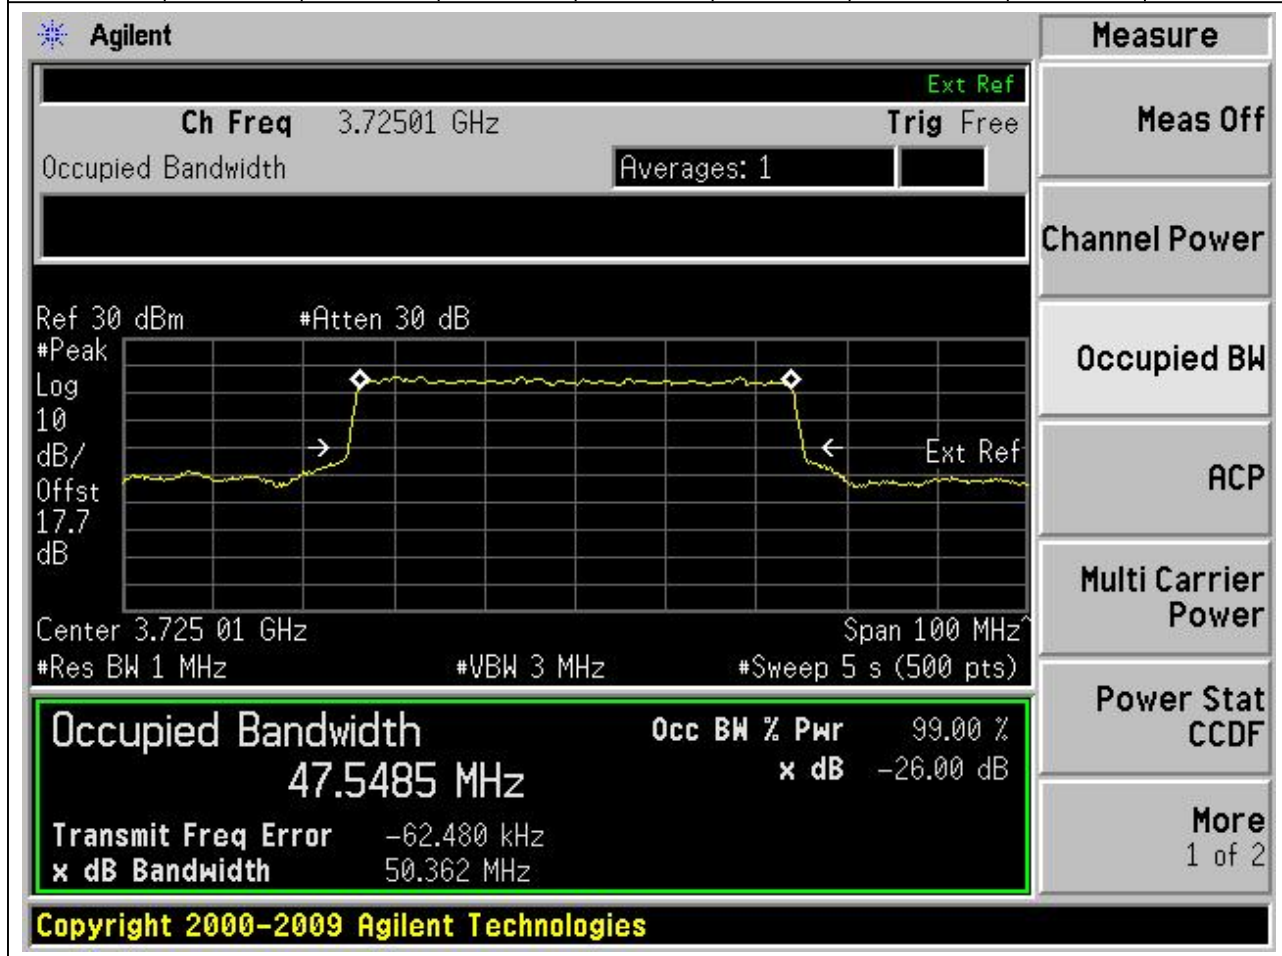

6.26 Occupied Bandwidth for SA Support PI2

BPSK_Part22-24-27(NTNV)(Channel:650000, Bandwidth:50, SCS:30,
OFDM:CP-OFDM, Modulation:64QAM, RB Number:133, RB Position:0)


Center Frequency (MHz)	OBW Power (%)	XdB Down (dB)	RBW (MHz)	Detector	OBW (MHz)	XdB Bandwidth (MHz)	Upper Limit (MHz)	Verdict
3750	99	26	1	Peak	47.69	50.31	50	Pass

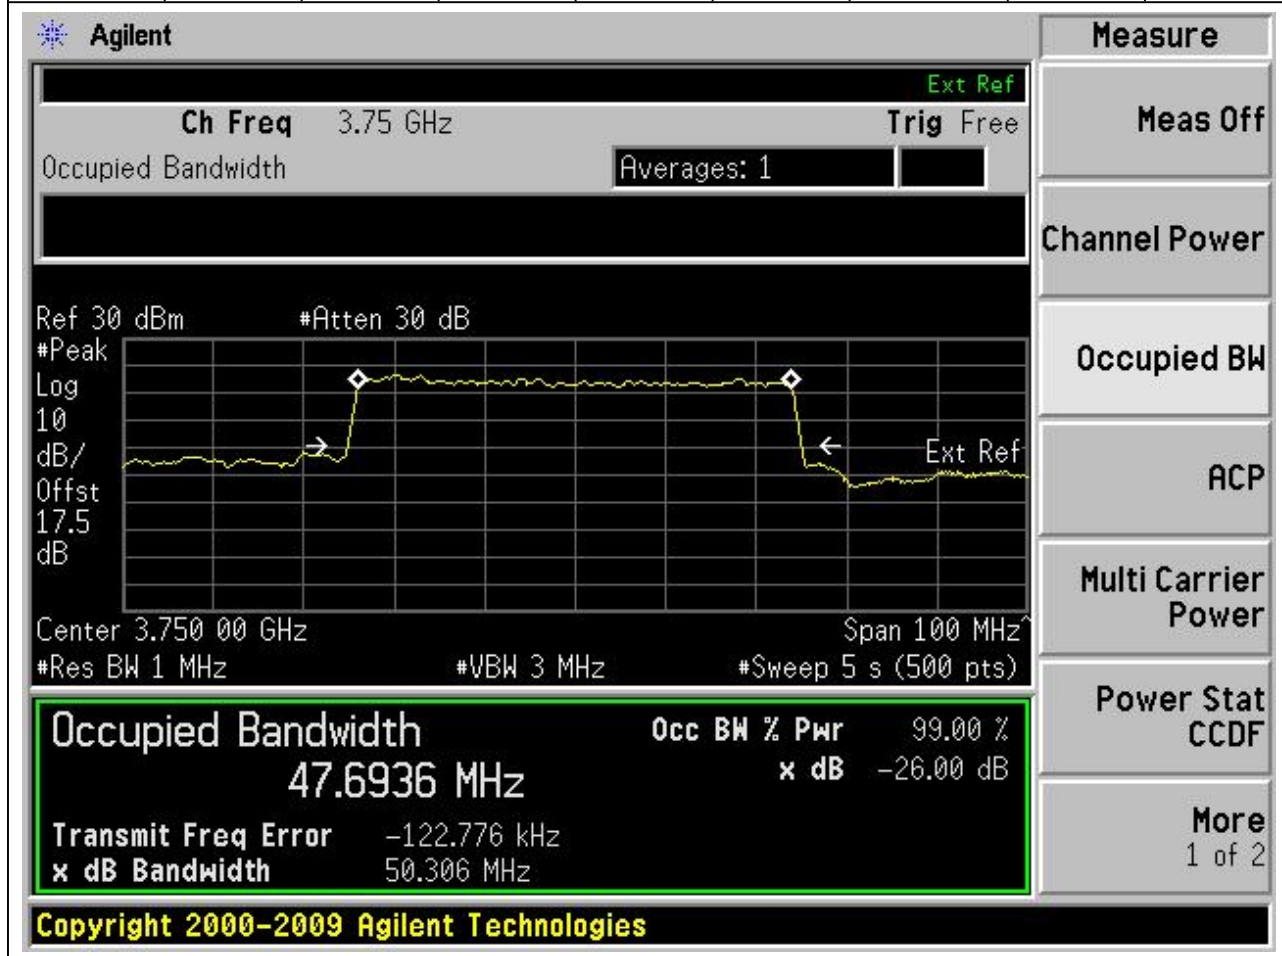

6.27 Occupied Bandwidth for SA Support PI2

BPSK_Part22-24-27(NTNV)(Channel:651666, Bandwidth:50, SCS:30,
OFDM:CP-OFDM, Modulation:64QAM, RB Number:133, RB Position:0)


Center Frequency (MHz)	OBW Power (%)	XdB Down (dB)	RBW (MHz)	Detector	OBW (MHz)	XdB Bandwidth (MHz)	Upper Limit (MHz)	Verdict
3774.99	99	26	1	Peak	47.48	50.35	50	Pass

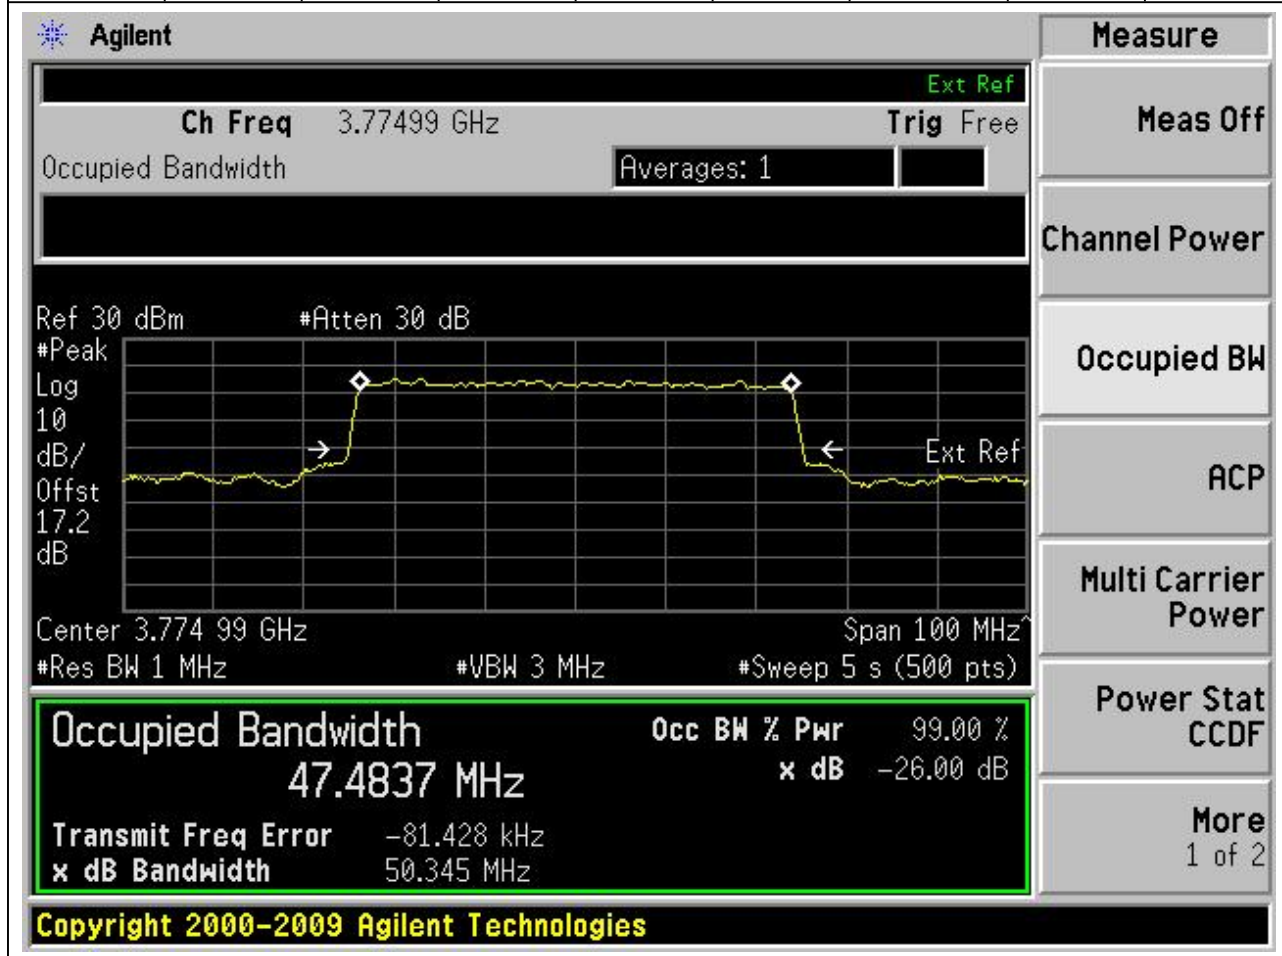

6.28 Occupied Bandwidth for SA Support PI2

BPSK_Part22-24-27(NTNV)(Channel:648334, Bandwidth:50, SCS:30,
OFDM:CP-OFDM, Modulation:256QAM, RB Number:133, RB Position:0)


Center Frequency (MHz)	OBW Power (%)	XdB Down (dB)	RBW (MHz)	Detector	OBW (MHz)	XdB Bandwidth (MHz)	Upper Limit (MHz)	Verdict
3725.01	99	26	1	Peak	47.56	50.38	50	Pass

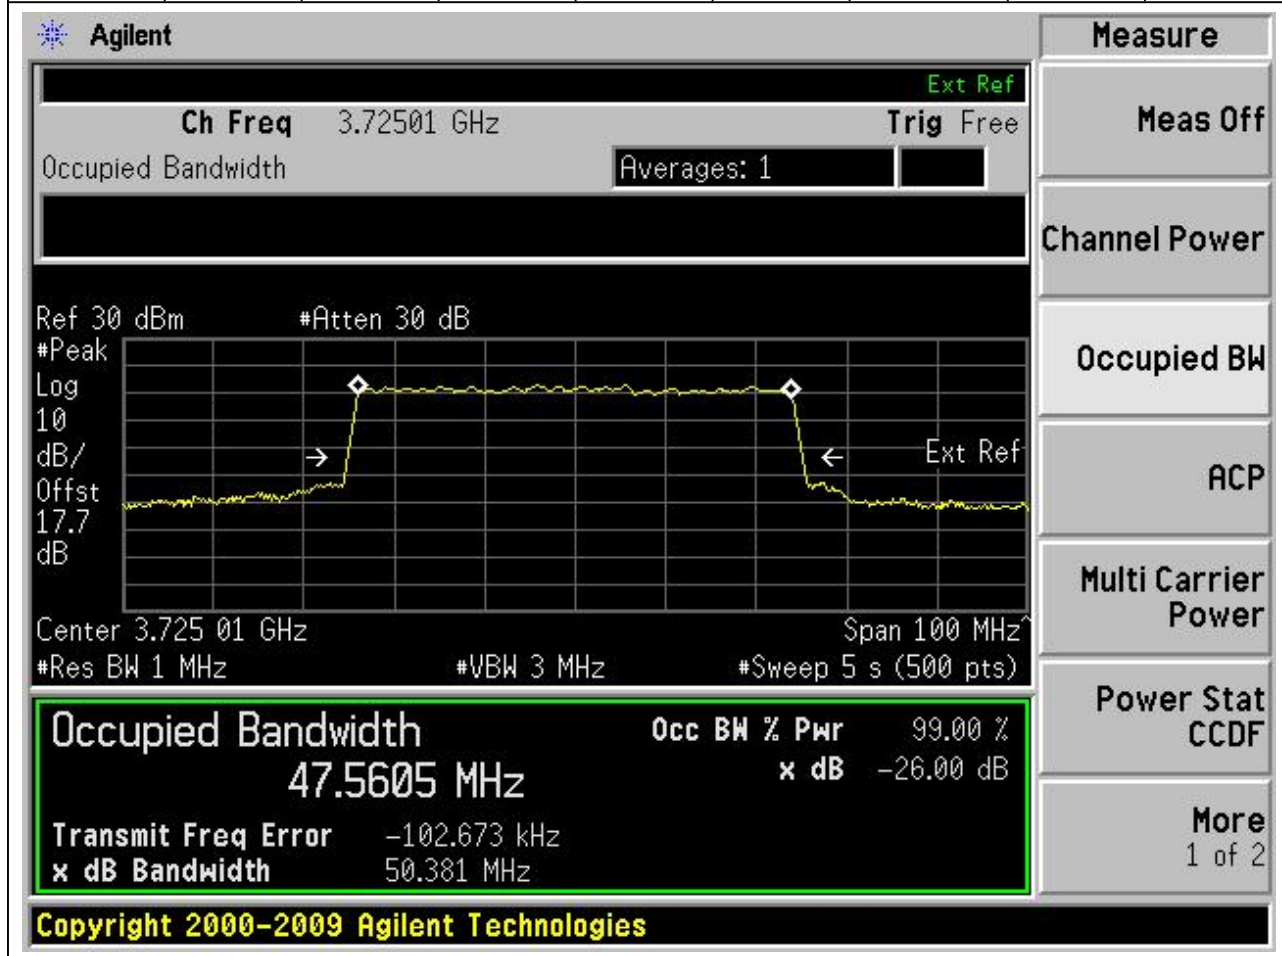

6.29 Occupied Bandwidth for SA Support PI2

BPSK_Part22-24-27(NTNV)(Channel:650000, Bandwidth:50, SCS:30,
OFDM:CP-OFDM, Modulation:256QAM, RB Number:133, RB Position:0)


Center Frequency (MHz)	OBW Power (%)	XdB Down (dB)	RBW (MHz)	Detector	OBW (MHz)	XdB Bandwidth (MHz)	Upper Limit (MHz)	Verdict
3750	99	26	1	Peak	47.67	50.36	50	Pass

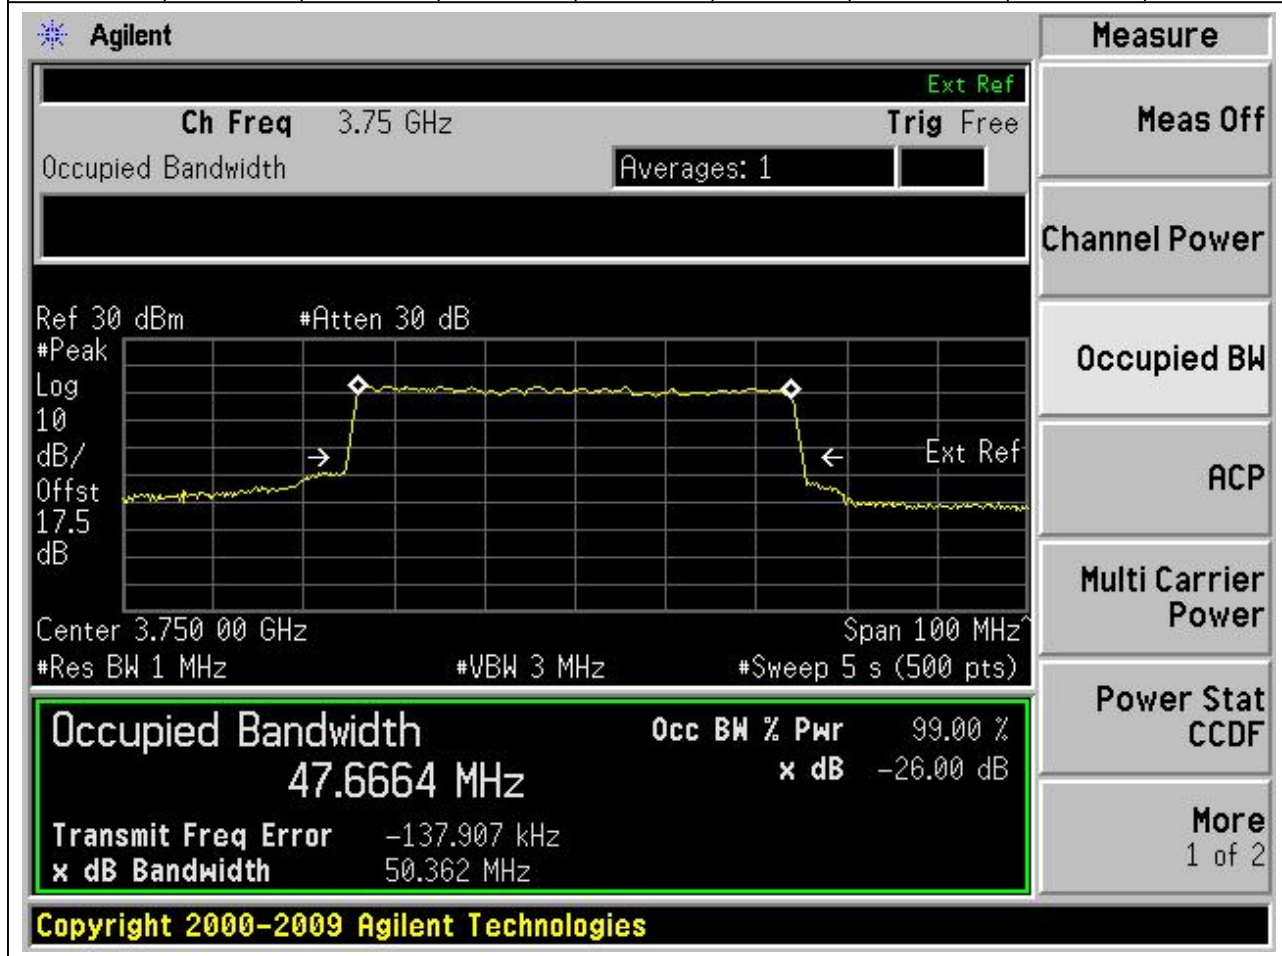

6.30 Occupied Bandwidth for SA Support PI2

BPSK_Part22-24-27(NTNV)(Channel:651666, Bandwidth:50, SCS:30,
OFDM:CP-OFDM, Modulation:256QAM, RB Number:133, RB Position:0)


Center Frequency (MHz)	OBW Power (%)	XdB Down (dB)	RBW (MHz)	Detector	OBW (MHz)	XdB Bandwidth (MHz)	Upper Limit (MHz)	Verdict
3774.99	99	26	1	Peak	47.51	50.34	50	Pass

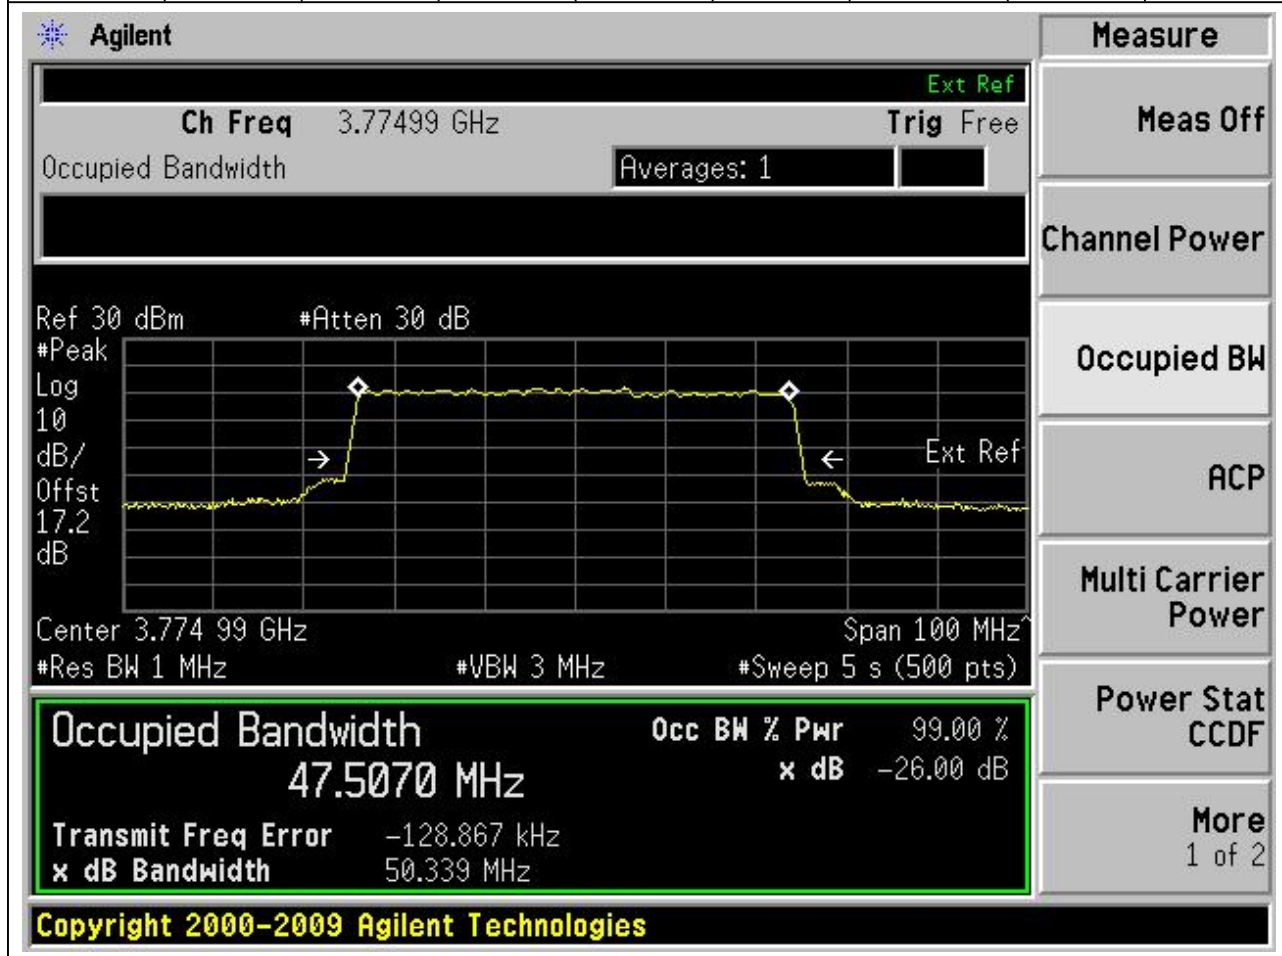

6.31 Occupied Bandwidth for SA Support PI2

BPSK_Part22-24-27(NTNV)(Channel:650000, Bandwidth:100, SCS:30,
OFDM:CP-OFDM, Modulation:Pi/2-BPSK, RB Number:273, RB Position:0)


Center Frequency (MHz)	OBW Power (%)	XdB Down (dB)	RBW (MHz)	Detector	OBW (MHz)	XdB Bandwidth (MHz)	Upper Limit (MHz)	Verdict
3750	99	26	1	Peak	97.29	100.61	100	Pass

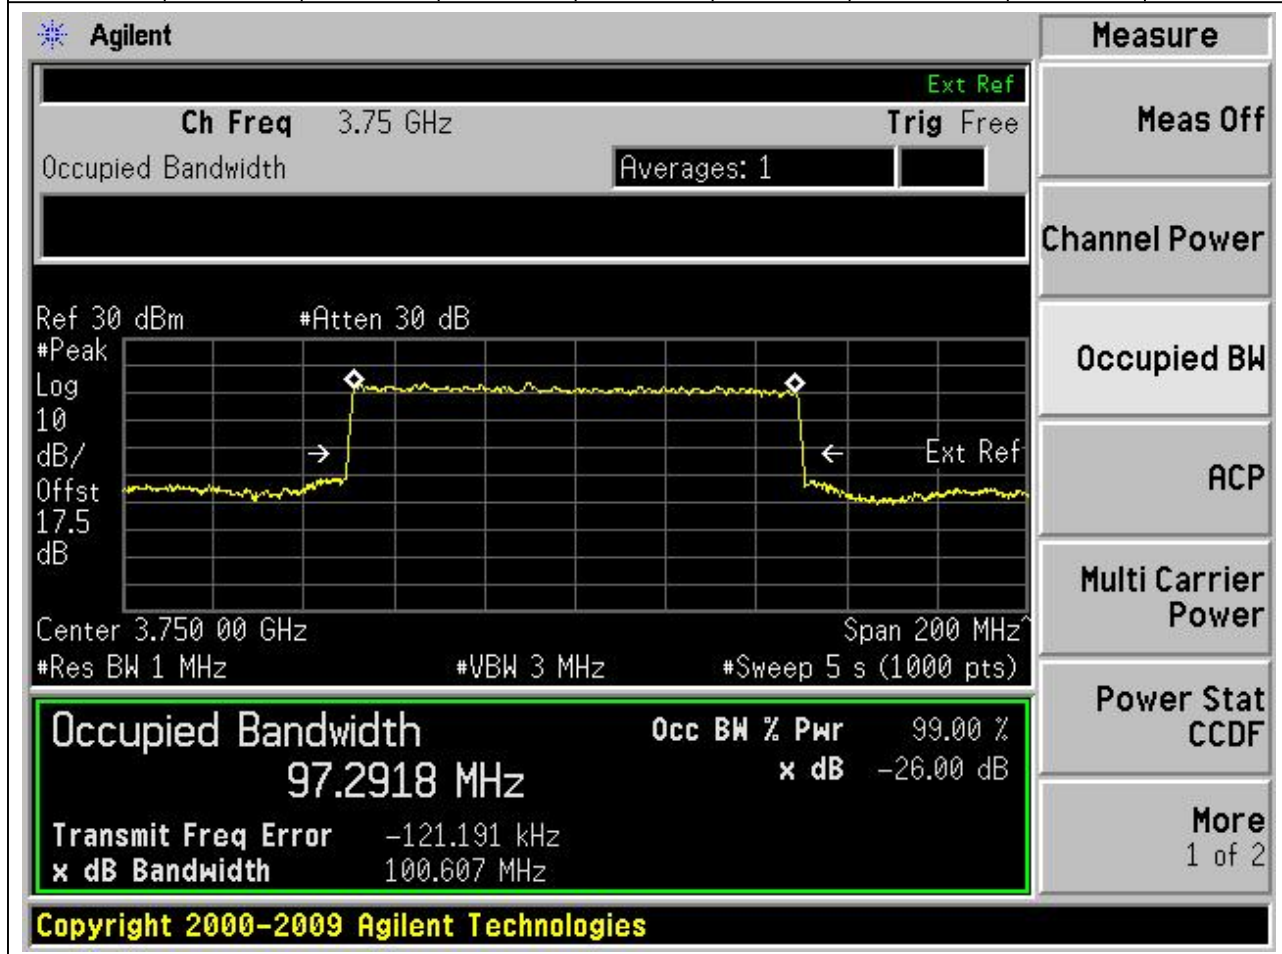

6.32 Occupied Bandwidth for SA Support PI2

BPSK_Part22-24-27(NTNV)(Channel:650000, Bandwidth:100, SCS:30,
OFDM:CP-OFDM, Modulation:QPSK, RB Number:273, RB Position:0)


Center Frequency (MHz)	OBW Power (%)	XdB Down (dB)	RBW (MHz)	Detector	OBW (MHz)	XdB Bandwidth (MHz)	Upper Limit (MHz)	Verdict
3750	99	26	1	Peak	97.39	100.64	100	Pass

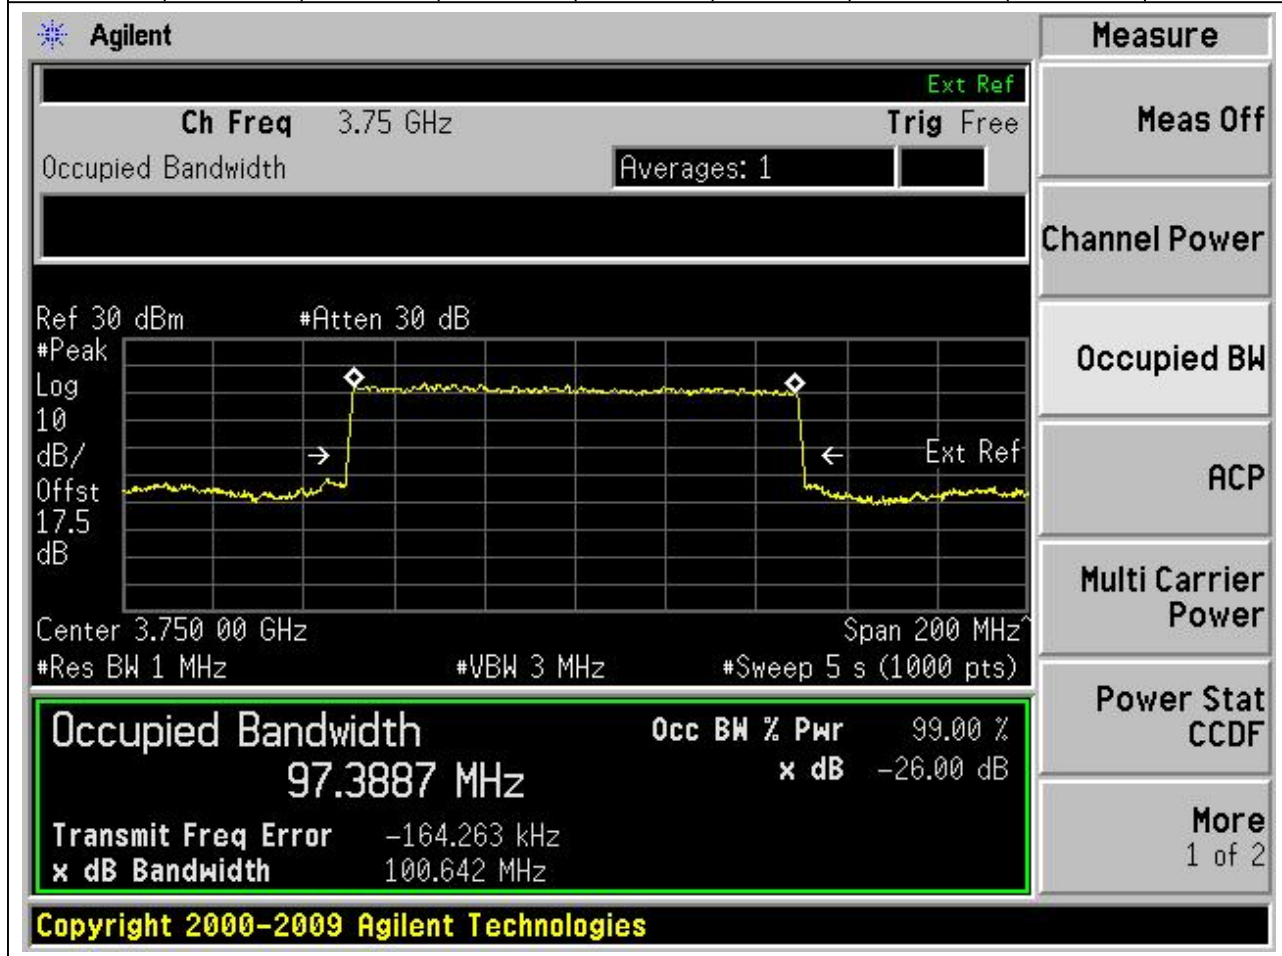

6.33 Occupied Bandwidth for SA Support PI2

BPSK_Part22-24-27(NTNV)(Channel:650000, Bandwidth:100, SCS:30,
OFDM:CP-OFDM, Modulation:16QAM, RB Number:273, RB Position:0)


Center Frequency (MHz)	OBW Power (%)	XdB Down (dB)	RBW (MHz)	Detector	OBW (MHz)	XdB Bandwidth (MHz)	Upper Limit (MHz)	Verdict
3750	99	26	1	Peak	97.36	100.64	100	Pass

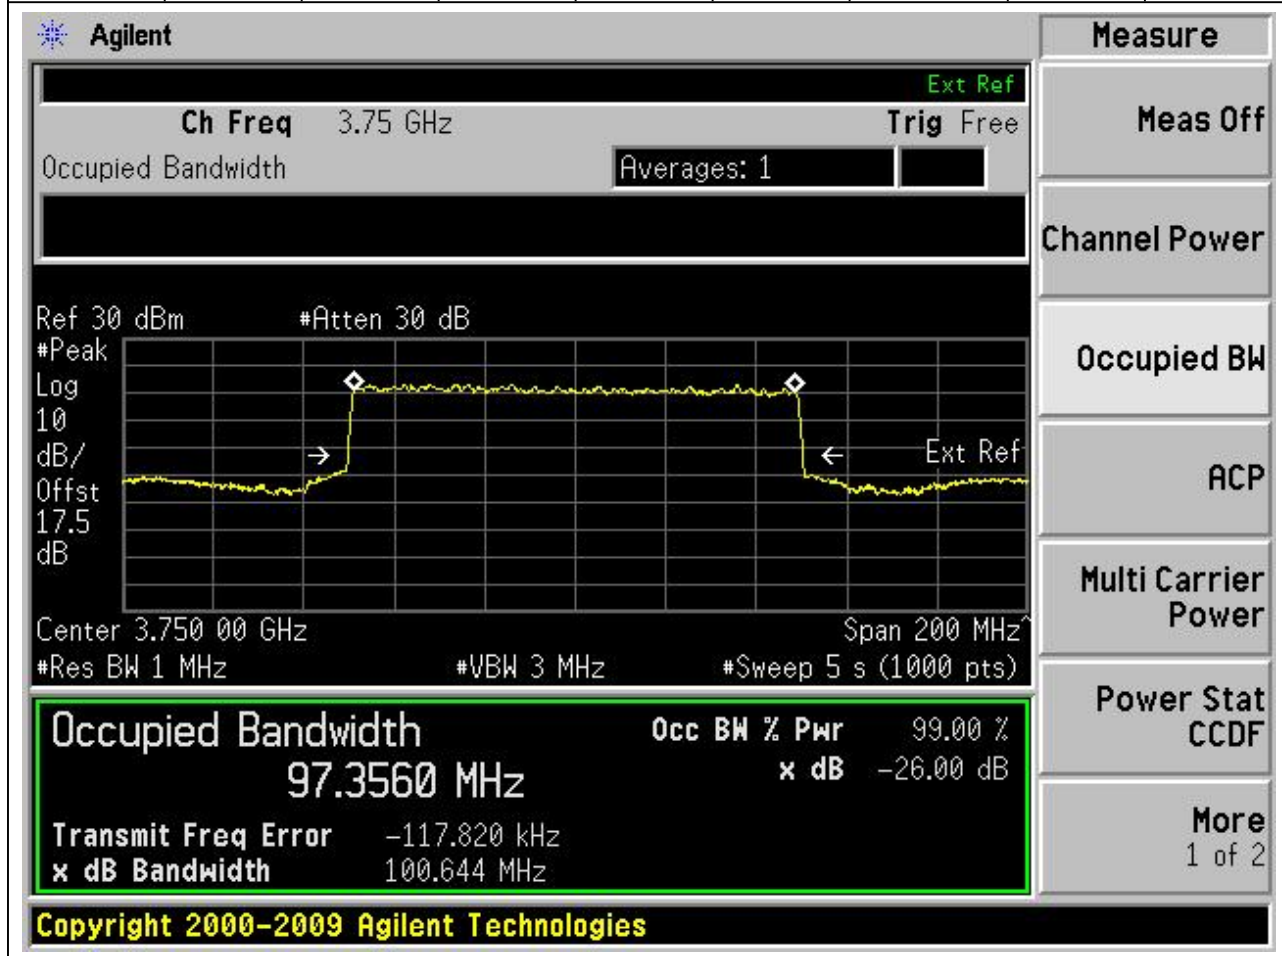

6.34 Occupied Bandwidth for SA Support PI2

BPSK_Part22-24-27(NTNV)(Channel:650000, Bandwidth:100, SCS:30,
OFDM:CP-OFDM, Modulation:64QAM, RB Number:273, RB Position:0)


Center Frequency (MHz)	OBW Power (%)	XdB Down (dB)	RBW (MHz)	Detector	OBW (MHz)	XdB Bandwidth (MHz)	Upper Limit (MHz)	Verdict
3750	99	26	1	Peak	97.67	100.65	100	Pass

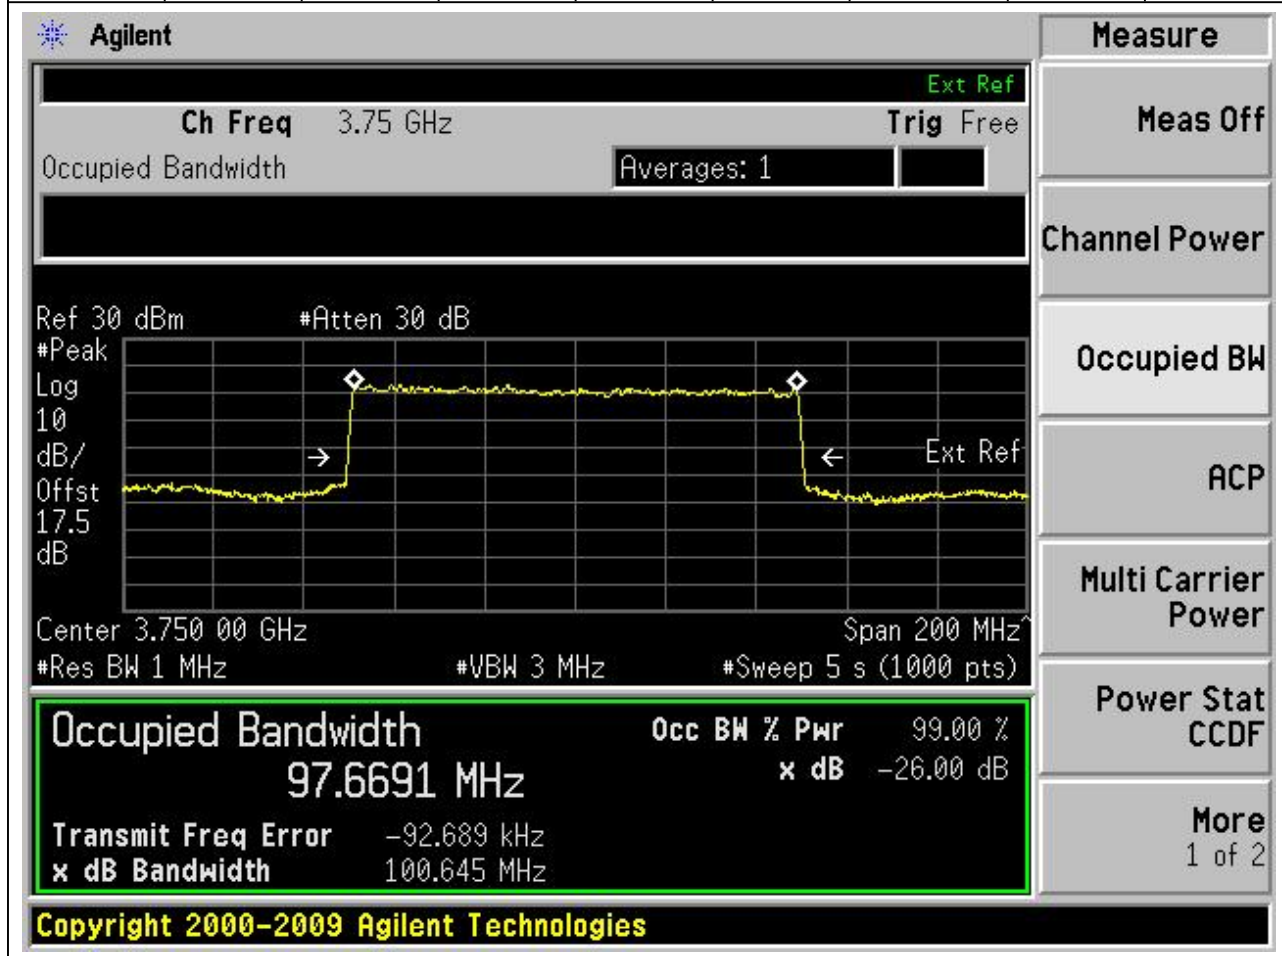

6.35 Occupied Bandwidth for SA Support PI2

BPSK_Part22-24-27(NTNV)(Channel:650000, Bandwidth:100, SCS:30,
OFDM:CP-OFDM, Modulation:256QAM, RB Number:273, RB Position:0)


Center Frequency (MHz)	OBW Power (%)	XdB Down (dB)	RBW (MHz)	Detector	OBW (MHz)	XdB Bandwidth (MHz)	Upper Limit (MHz)	Verdict
3750	99	26	1	Peak	97.41	100.68	100	Pass

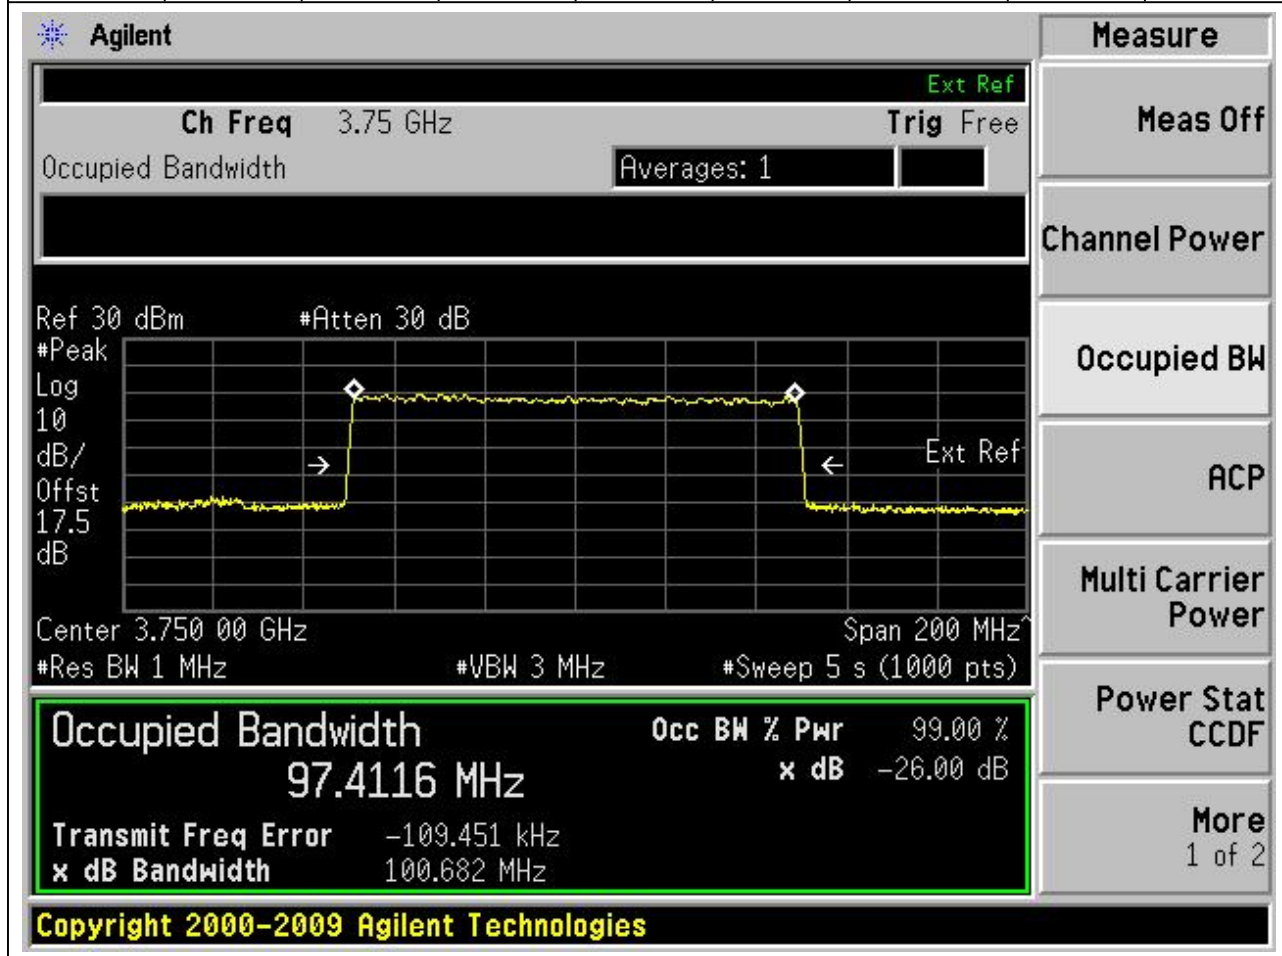

7. n5

7.1 Occupied Bandwidth for SA Support PI2


BPSK_Part22-24-27(NTNV)(Channel:165300, Bandwidth:5, SCS:15,
OFDM:CP-OFDM, Modulation:Pi/2-BPSK, RB Number:25, RB Position:0)

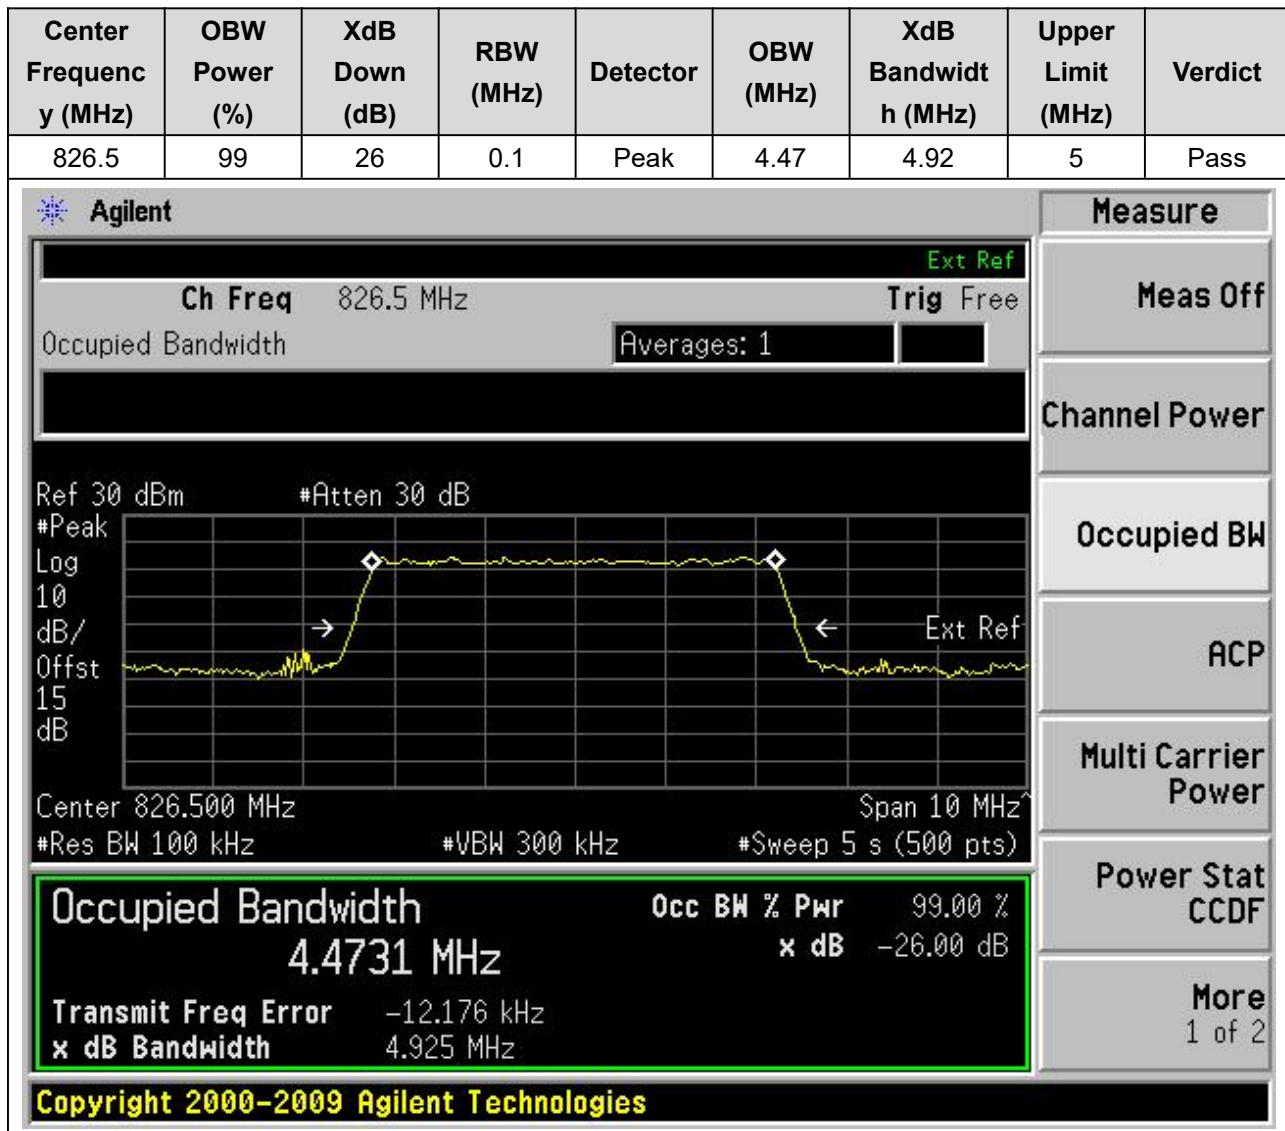

7.2 Occupied Bandwidth for SA Support PI2

BPSK_Part22-24-27(NTNV)(Channel:167300, Bandwidth:5, SCS:15,
OFDM:CP-OFDM, Modulation:Pi/2-BPSK, RB Number:25, RB Position:0)


Center Frequency (MHz)	OBW Power (%)	XdB Down (dB)	RBW (MHz)	Detector	OBW (MHz)	XdB Bandwidth (MHz)	Upper Limit (MHz)	Verdict
836.5	99	26	0.1	Peak	4.49	4.93	5	Pass

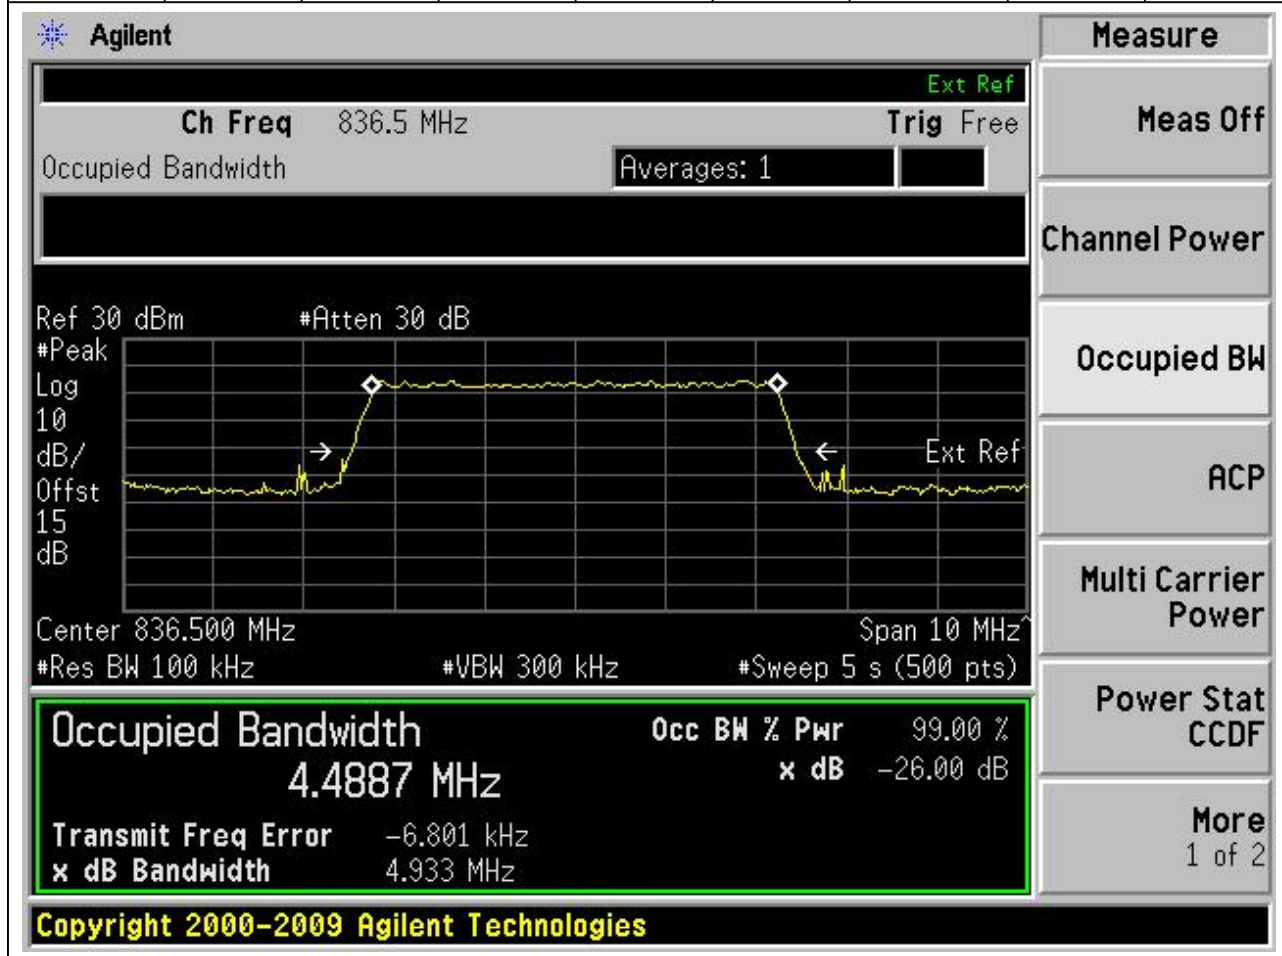

7.3 Occupied Bandwidth for SA Support PI2

BPSK_Part22-24-27(NTNV)(Channel:169300, Bandwidth:5, SCS:15,
OFDM:CP-OFDM, Modulation:Pi/2-BPSK, RB Number:25, RB Position:0)


Center Frequency (MHz)	OBW Power (%)	XdB Down (dB)	RBW (MHz)	Detector	OBW (MHz)	XdB Bandwidth (MHz)	Upper Limit (MHz)	Verdict
846.5	99	26	0.1	Peak	4.48	4.94	5	Pass

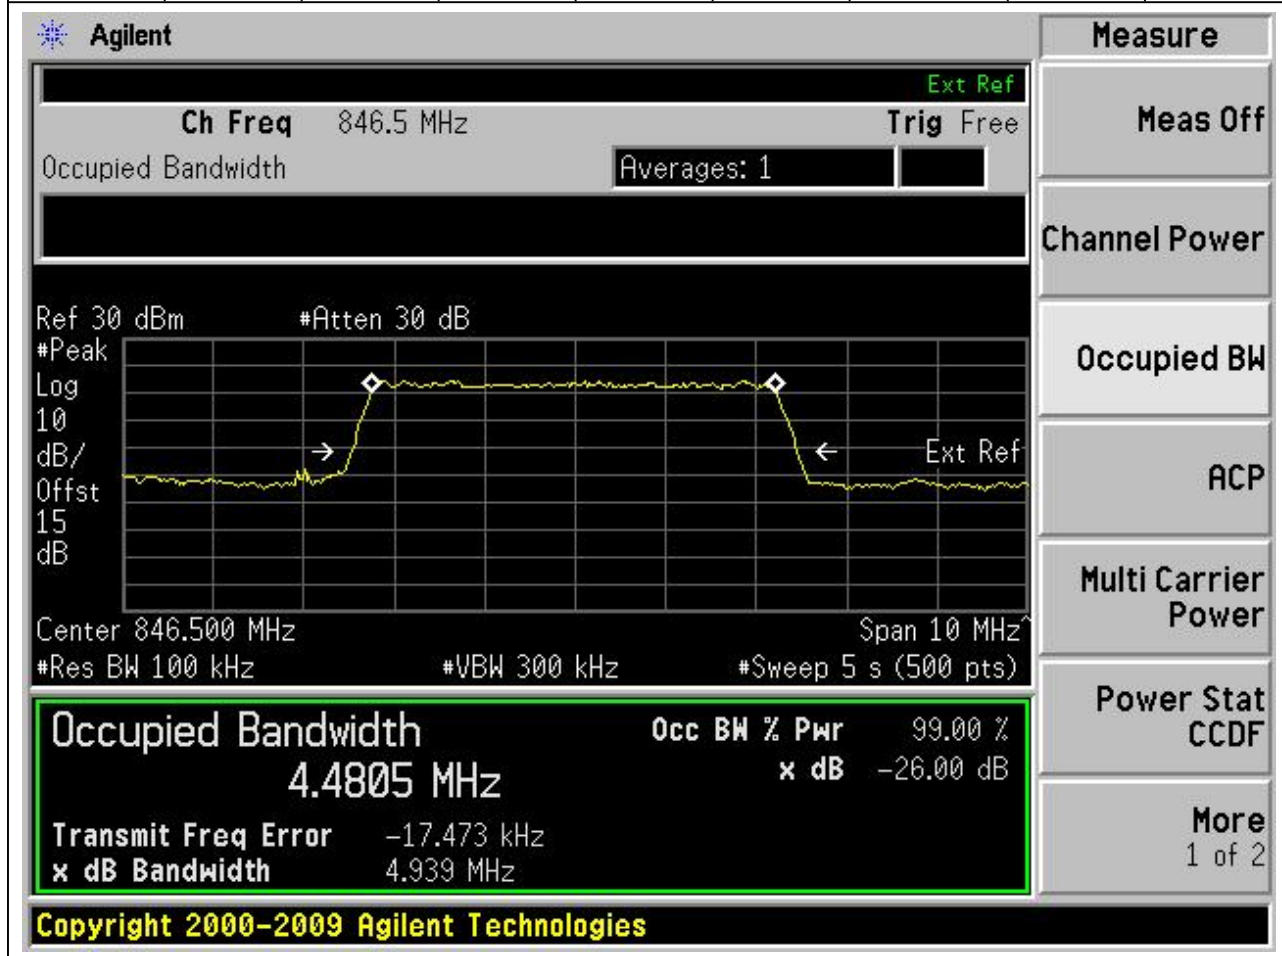

7.4 Occupied Bandwidth for SA Support PI2

BPSK_Part22-24-27(NTNV)(Channel:165300, Bandwidth:5, SCS:15,
OFDM:CP-OFDM, Modulation:QPSK, RB Number:25, RB Position:0)


Center Frequency (MHz)	OBW Power (%)	XdB Down (dB)	RBW (MHz)	Detector	OBW (MHz)	XdB Bandwidth (MHz)	Upper Limit (MHz)	Verdict
826.5	99	26	0.1	Peak	4.49	4.91	5	Pass

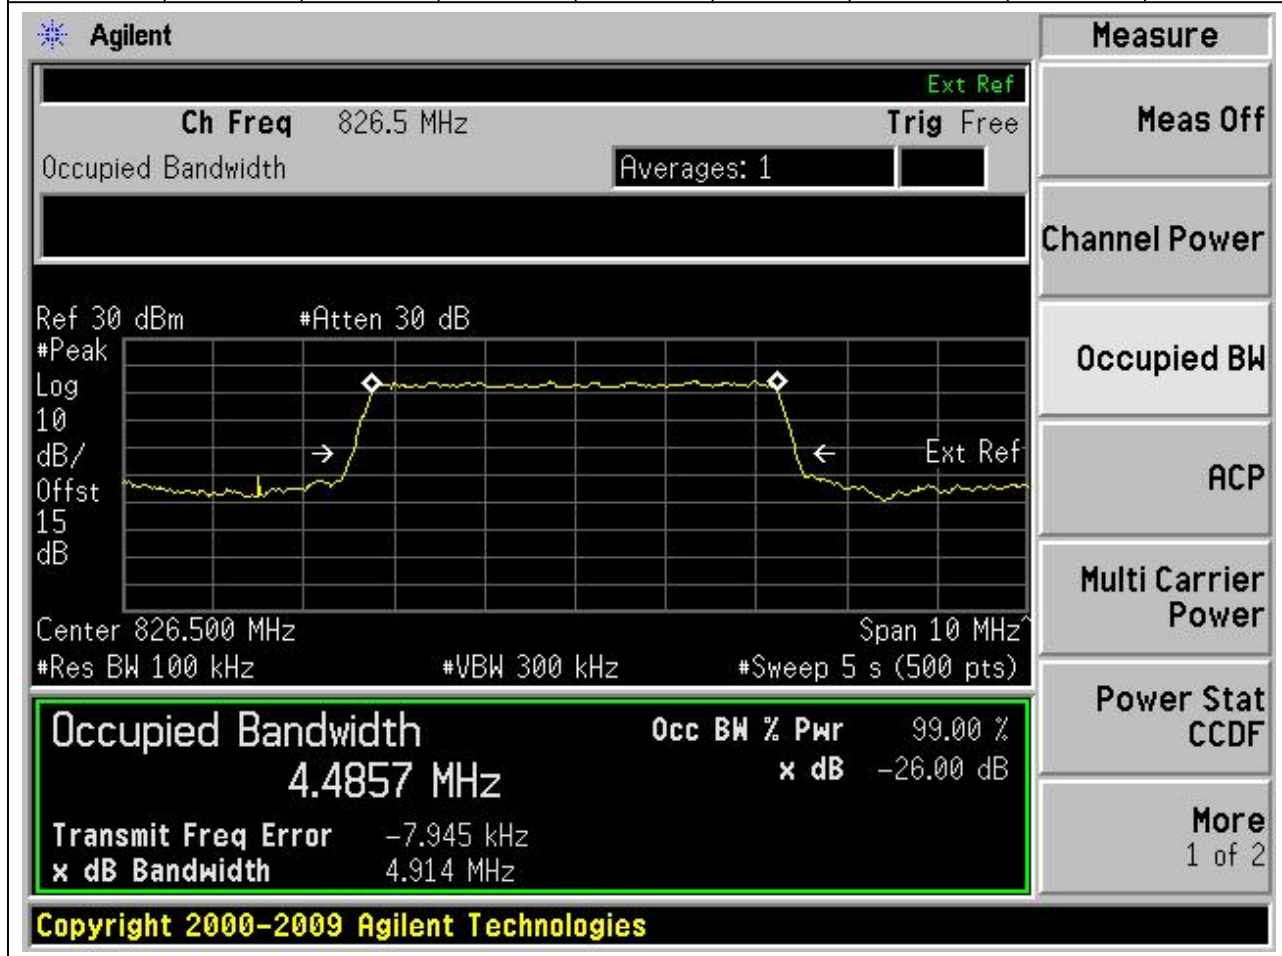

7.5 Occupied Bandwidth for SA Support PI2

BPSK_Part22-24-27(NTNV)(Channel:167300, Bandwidth:5, SCS:15,
OFDM:CP-OFDM, Modulation:QPSK, RB Number:25, RB Position:0)


Center Frequency (MHz)	OBW Power (%)	XdB Down (dB)	RBW (MHz)	Detector	OBW (MHz)	XdB Bandwidth (MHz)	Upper Limit (MHz)	Verdict
836.5	99	26	0.1	Peak	4.49	4.94	5	Pass

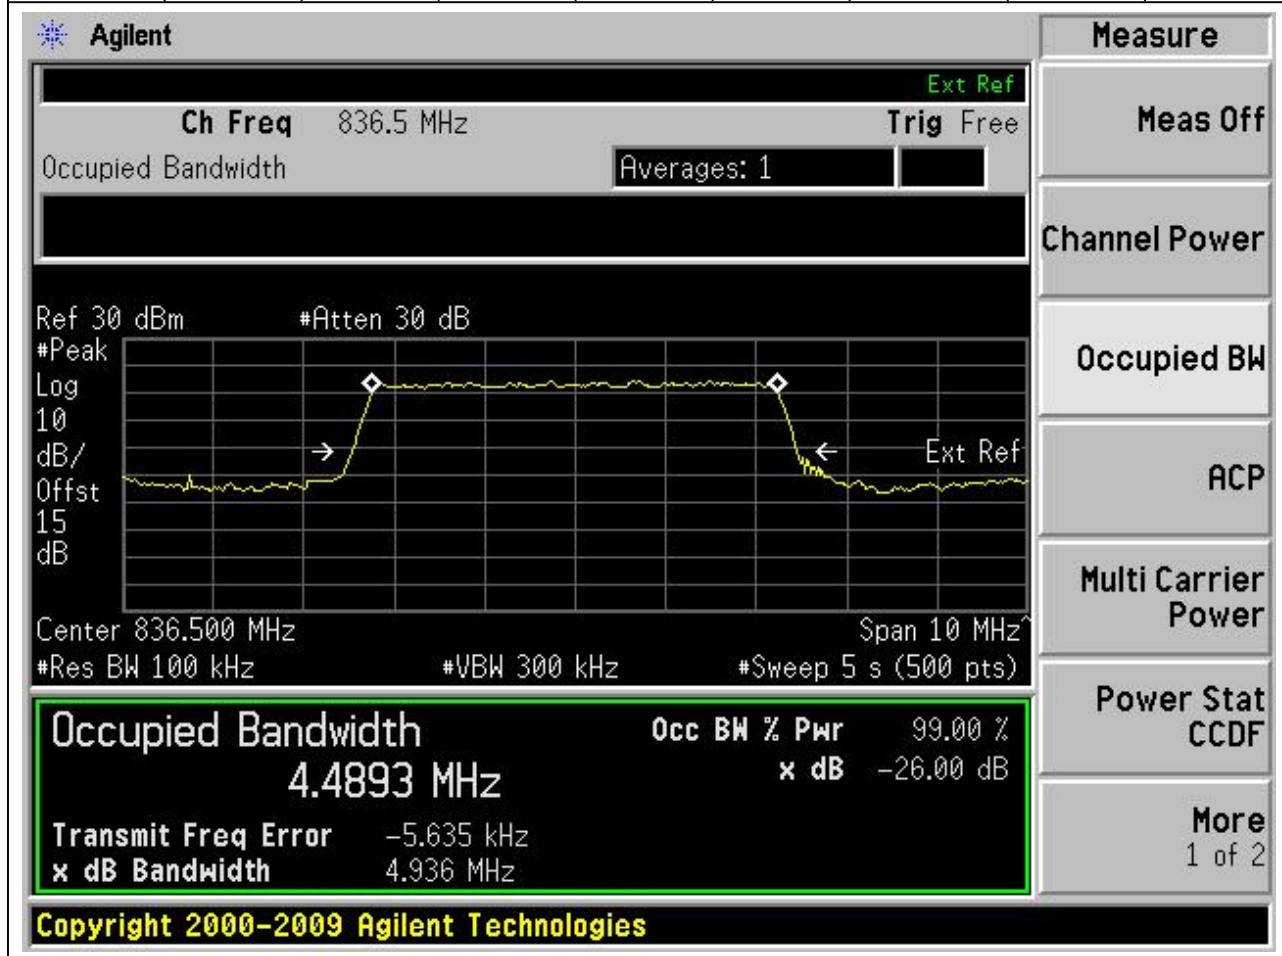

7.6 Occupied Bandwidth for SA Support PI2

BPSK_Part22-24-27(NTNV)(Channel:169300, Bandwidth:5, SCS:15,
OFDM:CP-OFDM, Modulation:QPSK, RB Number:25, RB Position:0)

Center Frequency (MHz)	OBW Power (%)	XdB Down (dB)	RBW (MHz)	Detector	OBW (MHz)	XdB Bandwidth (MHz)	Upper Limit (MHz)	Verdict
846.5	99	26	0.1	Peak	4.49	4.93	5	Pass

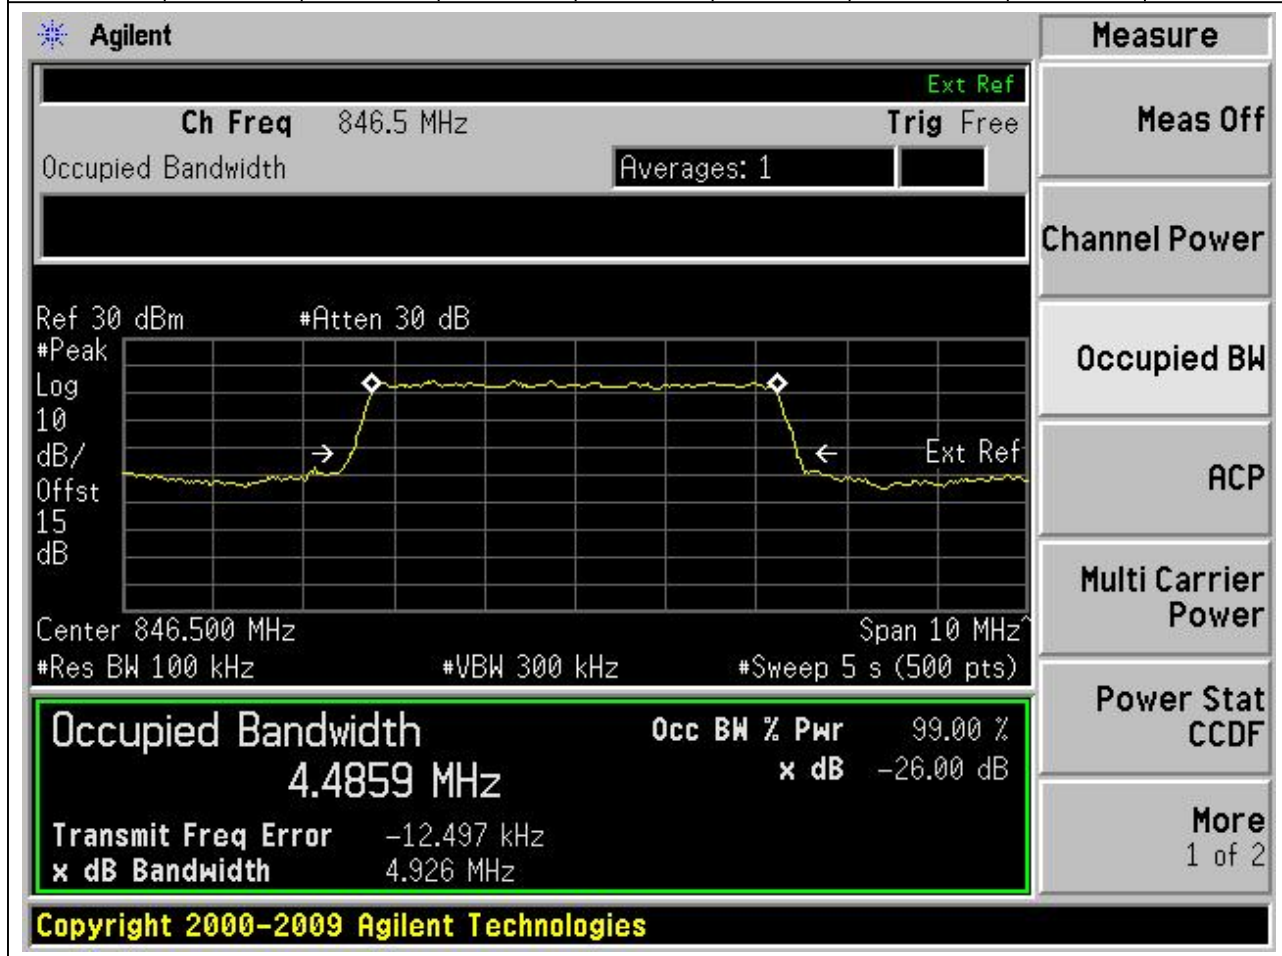

7.7 Occupied Bandwidth for SA Support PI2

BPSK_Part22-24-27(NTNV)(Channel:165300, Bandwidth:5, SCS:15,
OFDM:CP-OFDM, Modulation:16QAM, RB Number:25, RB Position:0)

Center Frequency (MHz)	OBW Power (%)	XdB Down (dB)	RBW (MHz)	Detector	OBW (MHz)	XdB Bandwidth (MHz)	Upper Limit (MHz)	Verdict
826.5	99	26	0.1	Peak	4.49	4.97	5	Pass

