


MAIN Antenna Test Result

Project Number: P-CC26010298
Test Time: 2026-02-06_07.54.03

EUT Name:	Mobile Phone	Temp.(°C):	22.6
Model Number:	X6895	Humidity (%RH):	54
Sample Number:	CC26010335-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11b CH6 P=18
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Siyuan	Remark:	适配器:A02+数据线:A11 ANT12

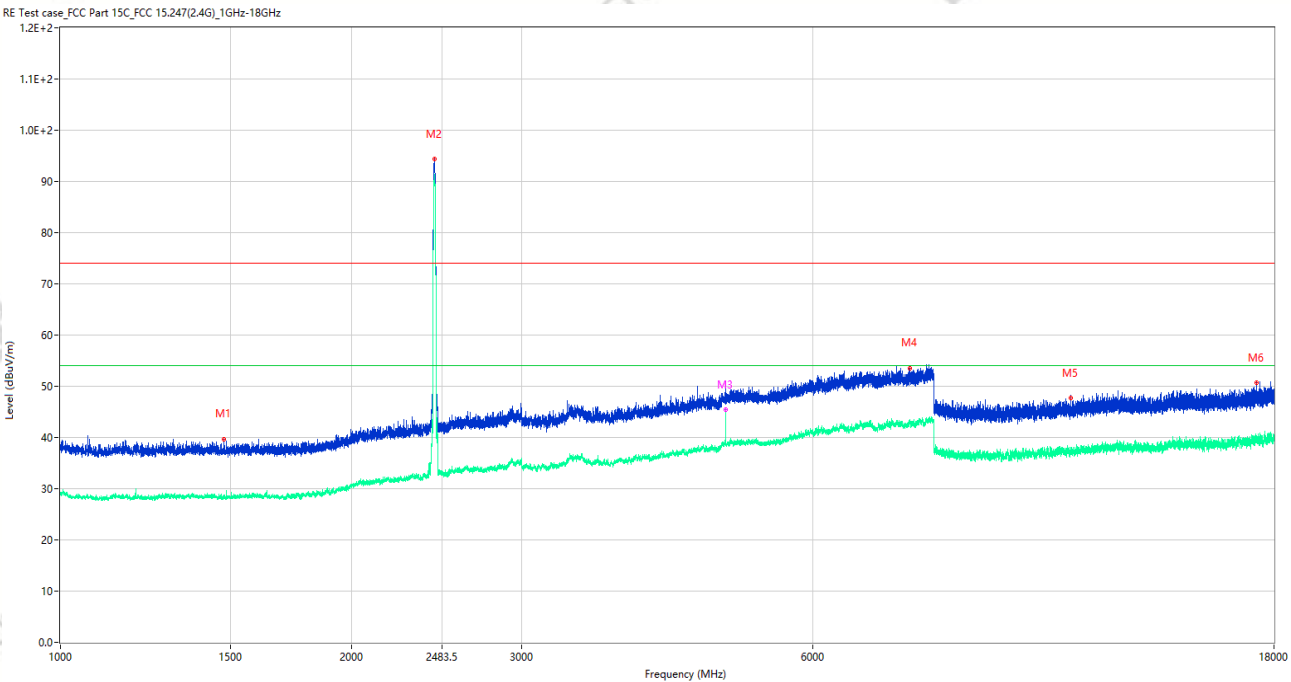

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1475.500	39.73	-16.31	74.0	34.27	Peak	276.00	150	Vertical	Pass
1**	1475.500	28.76	-16.31	54.0	25.24	AV	276.00	150	Vertical	Pass
2	2438.250	94.33	-12.38	74.0	-20.33	Peak	148.00	150	Vertical	N/A
2**	2438.250	91.48	-12.38	54.0	-37.48	AV	148.00	150	Vertical	N/A
3	4874.500	50.01	-2.25	74.0	23.99	Peak	5.00	150	Vertical	Pass
3**	4874.500	45.41	-2.25	54.0	8.59	AV	5.00	150	Vertical	Pass
4	7560.500	53.43	0.97	74.0	20.57	Peak	0.00	150	Vertical	Pass
4**	7560.500	42.77	0.97	54.0	11.23	AV	0.00	150	Vertical	Pass
5	11086.500	47.64	-3.79	74.0	26.36	Peak	148.00	150	Vertical	Pass
5**	11086.500	37.30	-3.79	54.0	16.70	AV	148.00	150	Vertical	Pass
6	17260.501	50.62	-1.36	74.0	23.38	Peak	360.00	150	Vertical	Pass
6**	17260.501	40.37	-1.36	54.0	13.63	AV	360.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010298

Test Time: 2026-02-06_08.00.25

EUT Name: Mobile Phone

Temp.(°C): 22.6

Model Number: X6895

Humidity (%RH): 54

Sample Number: CC26010335-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 2.4GWIFI 11b CH6 P=18


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Siyuan

Remark: 适配器:A02+数据线:A11 ANT12

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

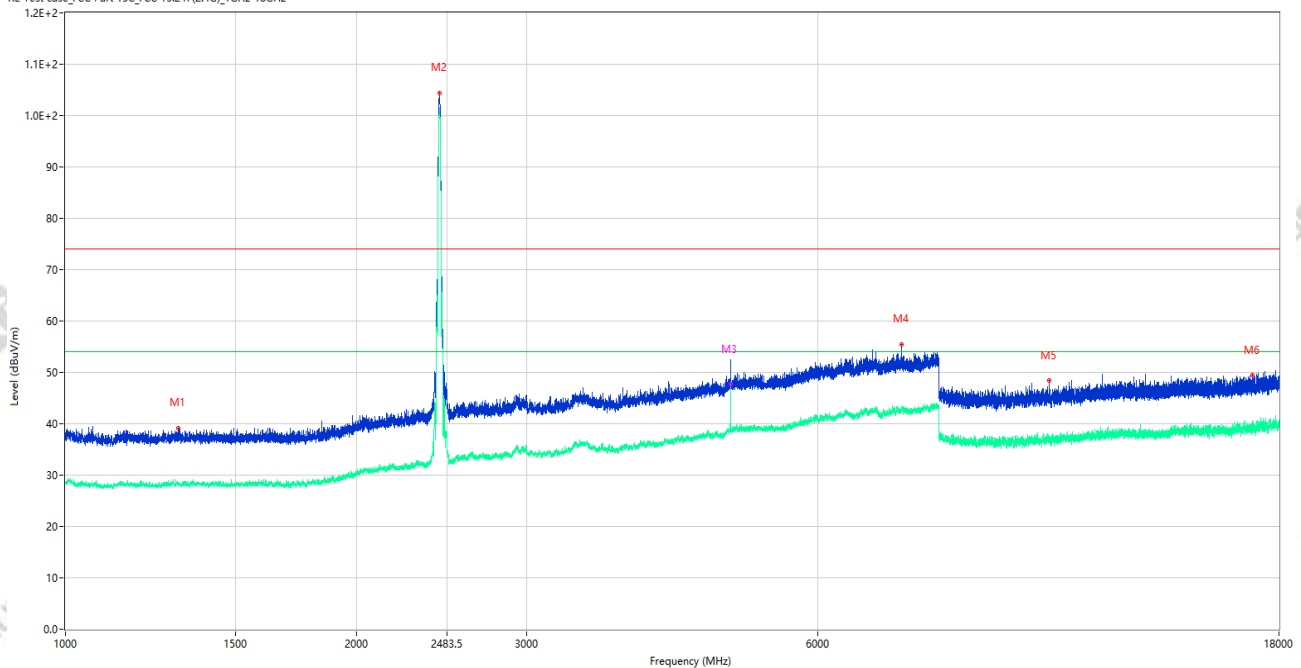

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1308.500	39.14	-15.69	74.0	34.86	Peak	0.00	150	Horizontal	Pass
1**	1308.500	28.21	-15.69	54.0	25.79	AV	0.00	150	Horizontal	Pass
2	2438.250	104.39	-12.38	74.0	-30.39	Peak	26.00	150	Horizontal	N/A
2**	2438.250	101.51	-12.38	54.0	-47.51	AV	26.00	150	Horizontal	N/A
3	4874.500	51.27	-2.25	74.0	22.73	Peak	125.00	150	Horizontal	Pass
3**	4874.500	47.66	-2.25	54.0	6.34	AV	125.00	150	Horizontal	Pass
4	7331.500	55.47	0.95	74.0	18.53	Peak	298.00	150	Horizontal	Pass
4**	7331.500	43.08	0.95	54.0	10.92	AV	298.00	150	Horizontal	Pass
5	10410.000	48.37	-3.23	74.0	25.63	Peak	212.00	150	Horizontal	Pass
5**	10410.000	37.13	-3.23	54.0	16.87	AV	212.00	150	Horizontal	Pass
6	16897.500	49.47	-0.70	74.0	24.53	Peak	66.00	150	Horizontal	Pass
6**	16897.500	39.80	-0.70	54.0	14.20	AV	66.00	150	Horizontal	Pass


审核员 (Reviewer) : Huang Chengkun

日期 (Date) : 2026/02/07

Test Result

Project Number: P-CC26010298
Test Time: 2026-02-06_08.14.33

EUT Name:	Mobile Phone	Temp.(°C):	22.6
Model Number:	X6895	Humidity (%RH):	54
Sample Number:	CC26010335-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11g CH6 P=16
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Siyuan	Remark:	适配器:A02+数据线:A11 ANT12

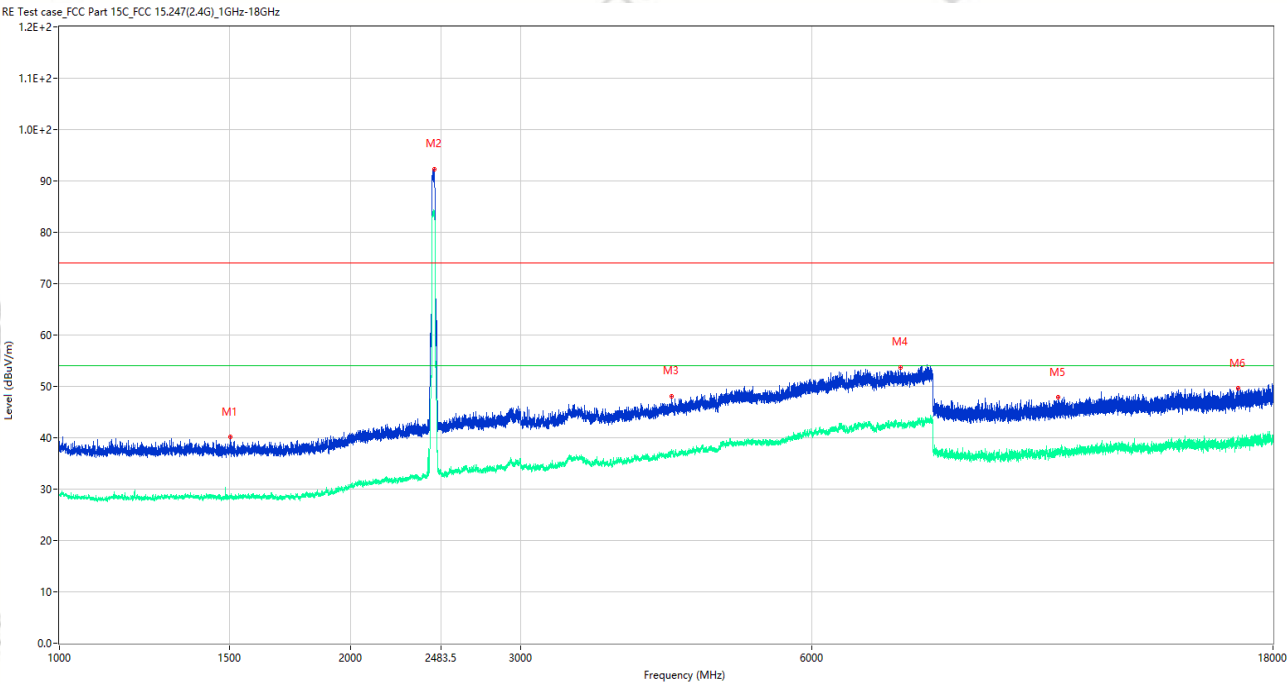


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1503.250	40.11	-16.08	74.0	33.89	Peak	0.00	150	Vertical	Pass
1**	1503.250	28.71	-16.08	54.0	25.29	AV	0.00	150	Vertical	Pass
2	2440.500	92.35	-12.38	74.0	-18.35	Peak	88.00	150	Vertical	N/A
2**	2440.500	84.21	-12.38	54.0	-30.21	AV	88.00	150	Vertical	N/A
3	4297.000	48.13	-3.79	74.0	25.87	Peak	326.00	150	Vertical	Pass
3**	4297.000	36.61	-3.79	54.0	17.39	AV	326.00	150	Vertical	Pass
4	7419.000	53.64	0.97	74.0	20.36	Peak	277.00	150	Vertical	Pass
4**	7419.000	42.74	0.97	54.0	11.26	AV	277.00	150	Vertical	Pass
5	10786.000	47.81	-3.04	74.0	26.19	Peak	11.00	150	Vertical	Pass
5**	10786.000	36.95	-3.04	54.0	17.05	AV	11.00	150	Vertical	Pass
6	16569.500	49.63	-0.89	74.0	24.37	Peak	39.00	150	Vertical	Pass
6**	16569.500	39.36	-0.89	54.0	14.64	AV	39.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010298

Test Time: 2026-02-06_08.08.40

EUT Name:	Mobile Phone	Temp.(°C):	22.6
Model Number:	X6895	Humidity (%RH):	54
Sample Number:	CC26010335-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11g CH6 P=16
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Siyuan	Remark:	适配器:A02+数据线:A11 ANT12

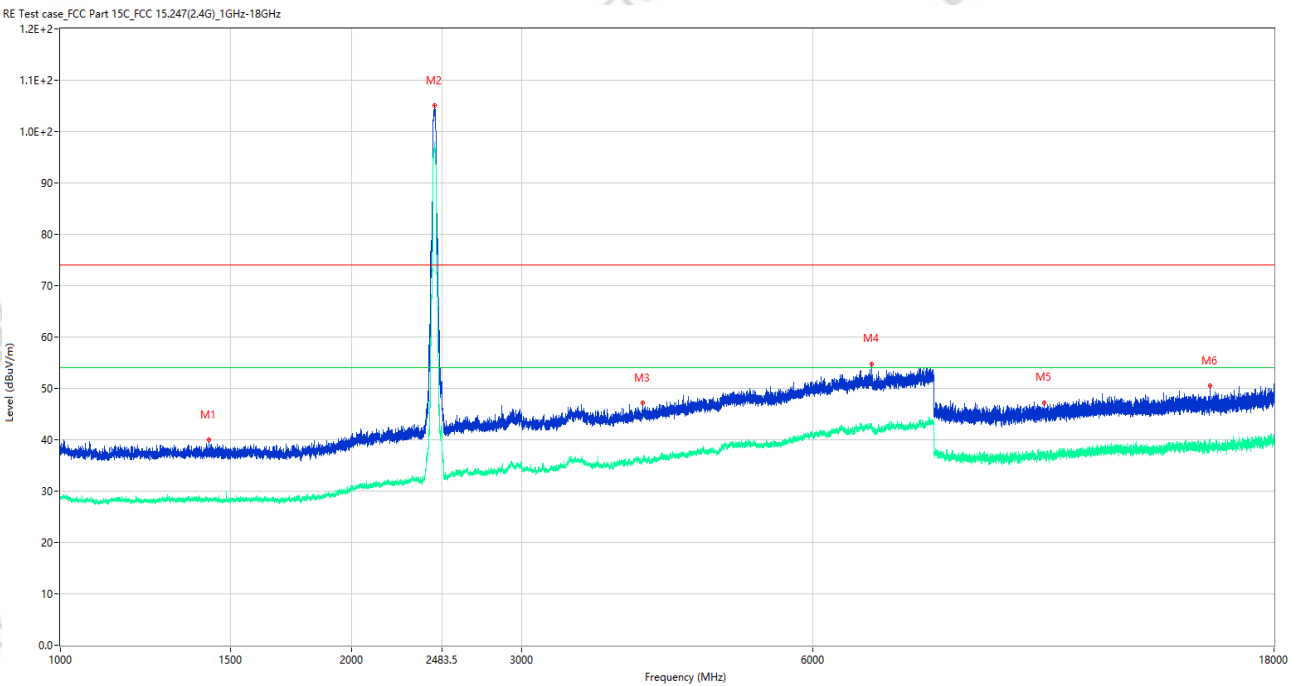


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1425.500	39.93	-15.97	74.0	34.07	Peak	171.00	150	Horizontal	Pass
1**	1425.500	28.56	-15.97	54.0	25.44	AV	171.00	150	Horizontal	Pass
2	2436.000	105.06	-12.33	74.0	-31.06	Peak	29.00	150	Horizontal	N/A
2**	2436.000	96.90	-12.33	54.0	-42.90	AV	29.00	150	Horizontal	N/A
3	4004.500	47.16	-4.80	74.0	26.84	Peak	303.00	150	Horizontal	Pass
3**	4004.500	35.80	-4.80	54.0	18.20	AV	303.00	150	Horizontal	Pass
4	6901.000	54.74	0.56	74.0	19.26	Peak	60.00	150	Horizontal	Pass
4**	6901.000	42.84	0.56	54.0	11.16	AV	60.00	150	Horizontal	Pass
5	10407.500	47.24	-3.22	74.0	26.76	Peak	60.00	150	Horizontal	Pass
5**	10407.500	37.25	-3.22	54.0	16.75	AV	60.00	150	Horizontal	Pass
6	15467.000	50.46	-2.01	74.0	23.54	Peak	32.00	150	Horizontal	Pass
6**	15467.000	39.02	-2.01	54.0	14.98	AV	32.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010298

Test Time: 2026-02-06_08.20.43

EUT Name:	Mobile Phone	Temp.(°C):	22.6
Model Number:	X6895	Humidity (%RH):	54
Sample Number:	CC26010335-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11n20 CH6 P=17
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Siyuan	Remark:	适配器:A02+数据线:A11 ANT12

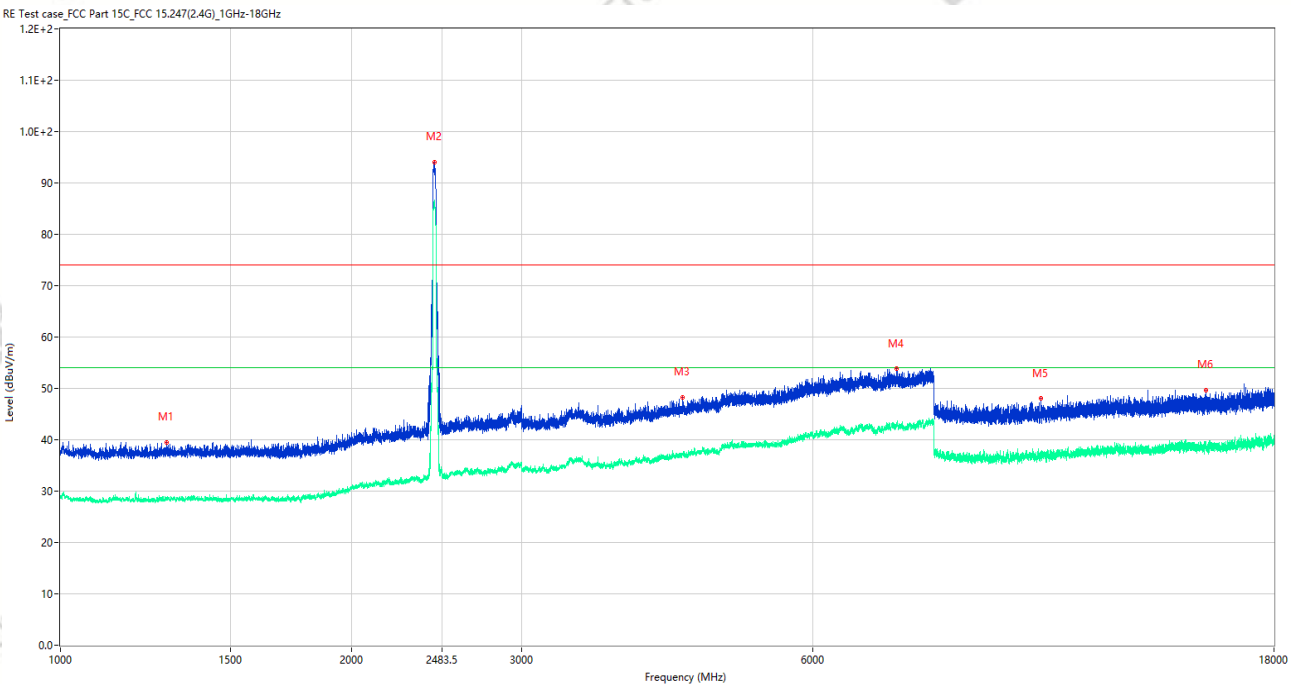


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1288.250	39.50	-15.93	74.0	34.50	Peak	244.00	150	Vertical	Pass
1**	1288.250	28.85	-15.93	54.0	25.15	AV	244.00	150	Vertical	Pass
2	2435.750	94.10	-12.32	74.0	-20.10	Peak	106.00	150	Vertical	N/A
2**	2435.750	86.66	-12.32	54.0	-32.66	AV	106.00	150	Vertical	N/A
3	4402.500	48.32	-3.07	74.0	25.68	Peak	185.00	150	Vertical	Pass
3**	4402.500	37.32	-3.07	54.0	16.68	AV	185.00	150	Vertical	Pass
4	7327.500	53.84	0.79	74.0	20.16	Peak	0.00	150	Vertical	Pass
4**	7327.500	42.82	0.79	54.0	11.18	AV	0.00	150	Vertical	Pass
5	10338.000	48.02	-3.36	74.0	25.98	Peak	264.00	150	Vertical	Pass
5**	10338.000	36.93	-3.36	54.0	17.07	AV	264.00	150	Vertical	Pass
6	15320.500	49.74	-2.51	74.0	24.26	Peak	292.00	150	Vertical	Pass
6**	15320.500	37.60	-2.51	54.0	16.40	AV	292.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010298

Test Time: 2026-02-06_08.27.34

EUT Name:	Mobile Phone	Temp.(°C):	22.6
Model Number:	X6895	Humidity (%RH):	54
Sample Number:	CC26010335-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11n20 CH6 P=17
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Siyuan	Remark:	适配器:A02+数据线:A11 ANT12

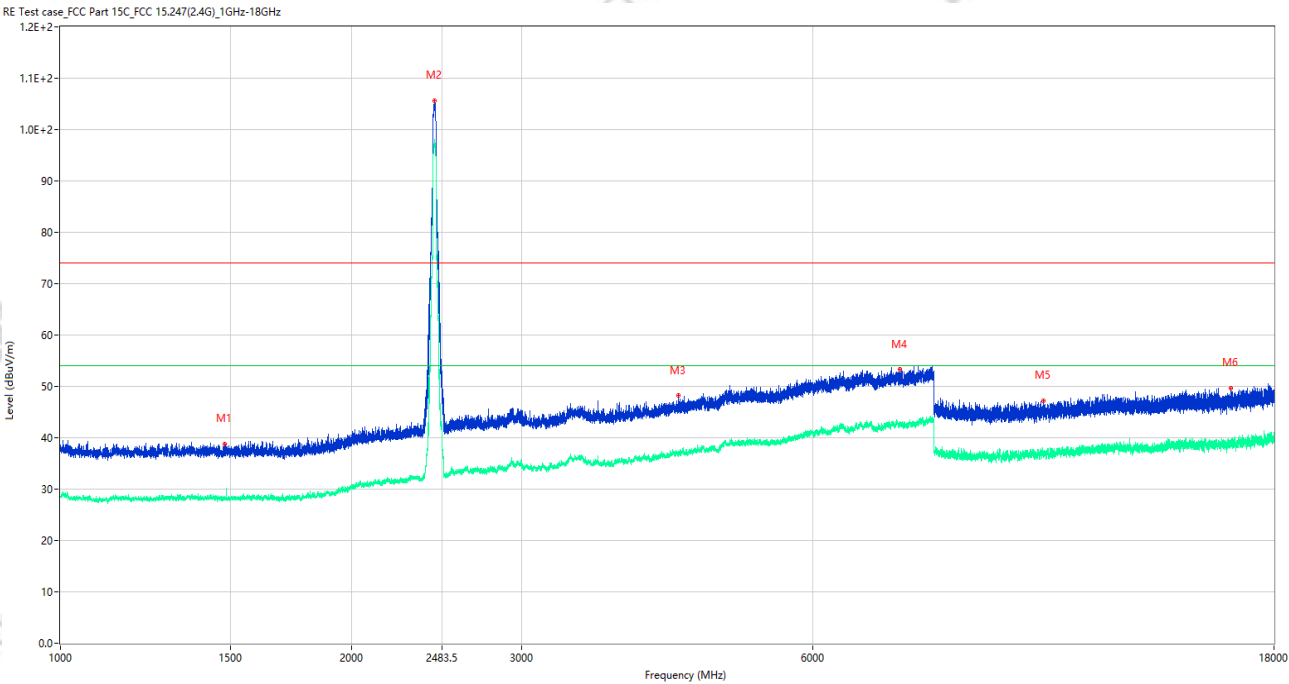


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1477.750	38.78	-16.29	74.0	35.22	Peak	130.00	150	Horizontal	Pass
1**	1477.750	28.09	-16.29	54.0	25.91	AV	130.00	150	Horizontal	Pass
2	2438.250	105.69	-12.38	74.0	-31.69	Peak	327.00	150	Horizontal	N/A
2**	2438.250	97.81	-12.38	54.0	-43.81	AV	327.00	150	Horizontal	N/A
3	4357.000	48.18	-3.48	74.0	25.82	Peak	126.00	150	Horizontal	Pass
3**	4357.000	36.44	-3.48	54.0	17.56	AV	126.00	150	Horizontal	Pass
4	7379.500	53.27	0.85	74.0	20.73	Peak	157.00	150	Horizontal	Pass
4**	7379.500	42.35	0.85	54.0	11.65	AV	157.00	150	Horizontal	Pass
5	10393.000	47.24	-3.49	74.0	26.76	Peak	0.00	150	Horizontal	Pass
5**	10393.000	36.20	-3.49	54.0	17.80	AV	0.00	150	Horizontal	Pass
6	16252.000	49.62	-1.47	74.0	24.38	Peak	68.00	150	Horizontal	Pass
6**	16252.000	38.97	-1.47	54.0	15.03	AV	68.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010298

Test Time: 2026-02-07_03.05.27

EUT Name:	Mobile Phone	Temp.(°C):	23.2
Model Number:	X6895	Humidity (%RH):	55
Sample Number:	CC26010335-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	Normal working Link(2.4G WIFI)
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Siyuan	Remark:	适配器:A02+数据线:A11 ANT12

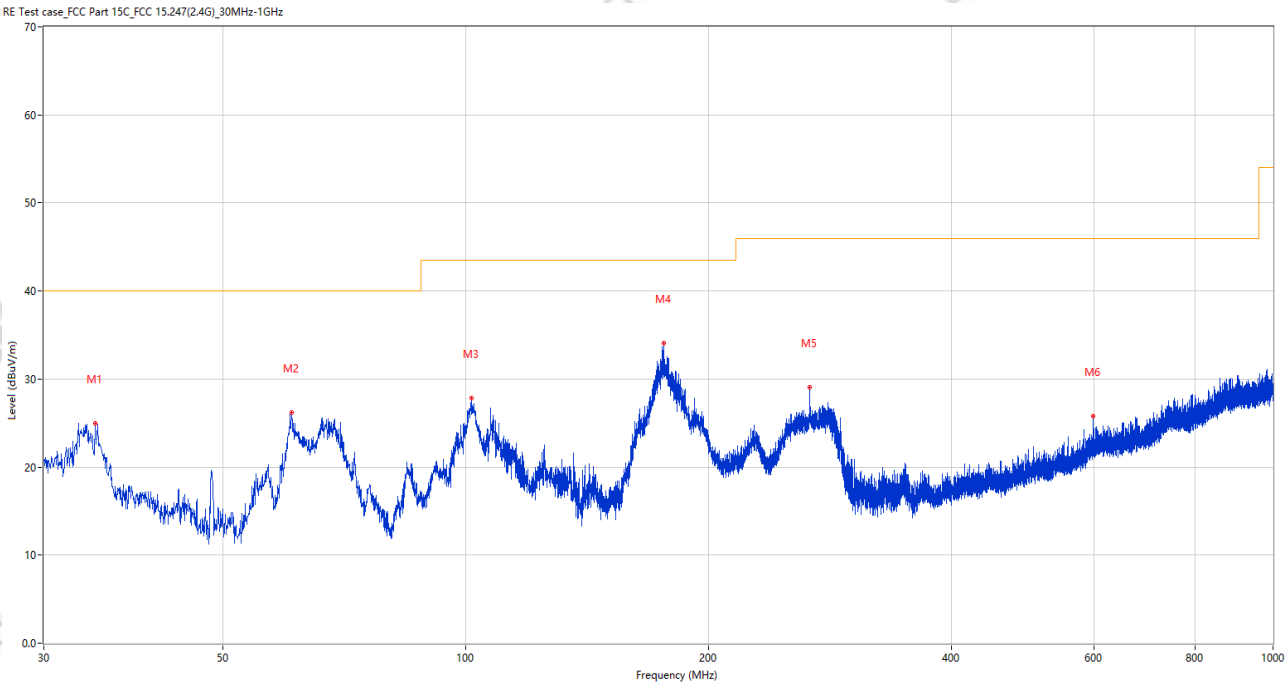


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	34.705	24.95	-27.87	40.0	15.05	Peak	218.00	100	Vertical	Pass
2	60.895	26.19	-26.24	40.0	13.81	Peak	175.00	100	Vertical	Pass
3	101.634	27.83	-26.11	43.5	15.67	Peak	224.00	100	Vertical	Pass
4	175.694	34.09	-28.22	43.5	9.41	Peak	203.00	200	Vertical	Pass
5	266.922	29.07	-24.09	46.0	16.93	Peak	325.00	200	Vertical	Pass
6	597.984	25.82	-14.97	46.0	20.18	Peak	284.00	100	Vertical	Pass

Test Result

Project Number: P-CC26010298

Test Time: 2026-02-07_03.10.47

EUT Name:	Mobile Phone	Temp.(°C):	23.2
Model Number:	X6895	Humidity (%RH):	55
Sample Number:	CC26010335-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	Normal working Link(2.4G WIFI)
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Siyuan	Remark:	适配器:A02+数据线:A11 ANT12

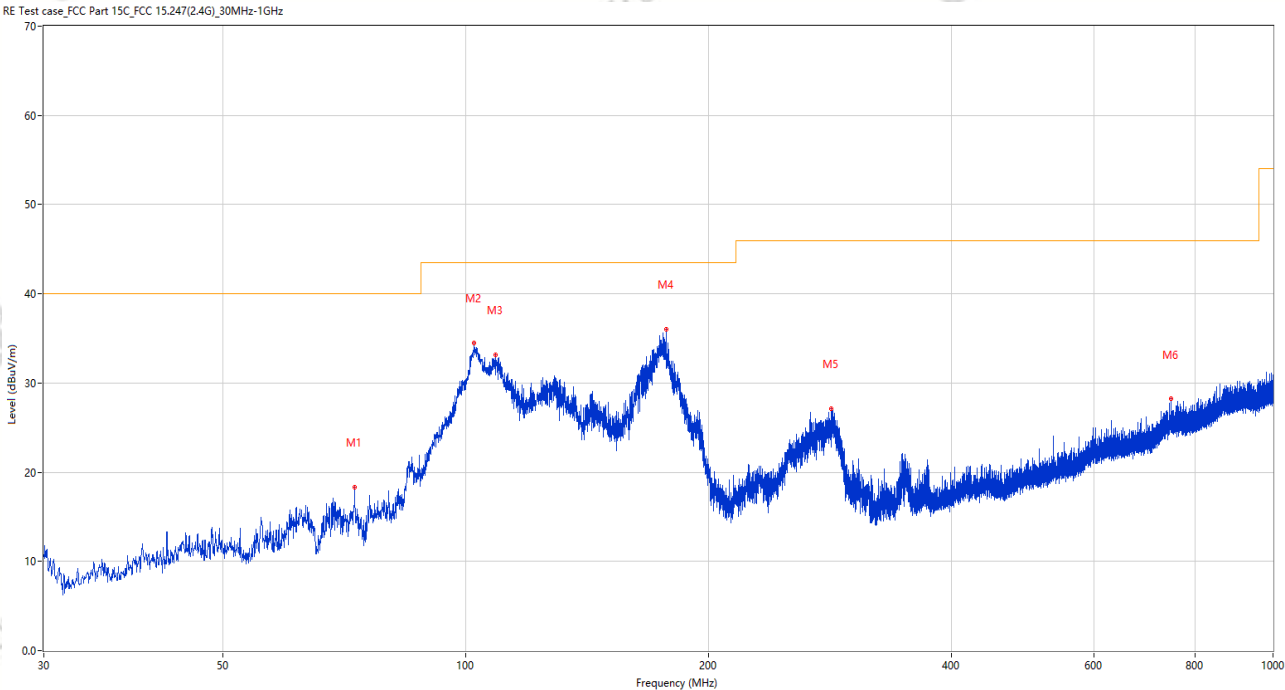


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	72.777	18.31	-29.89	40.0	21.69	Peak	359.00	200	Horizontal	Pass
2	102.362	34.46	-26.09	43.5	9.04	Peak	360.00	200	Horizontal	Pass
3	108.764	33.20	-26.52	43.5	10.30	Peak	168.00	200	Horizontal	Pass
4	176.955	36.00	-28.12	43.5	7.50	Peak	326.00	100	Horizontal	Pass
5	283.849	27.10	-23.39	46.0	18.90	Peak	271.00	200	Horizontal	Pass
6	747.509	28.20	-11.95	46.0	17.80	Peak	57.00	200	Horizontal	Pass

AUX Antenna Test Result

Project Number: P-CC26010298

Test Time: 2026-02-06_09.37.13

EUT Name:	Mobile Phone	Temp.(°C):	22.6
Model Number:	X6895	Humidity (%RH):	54
Sample Number:	CC26010335-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11a CH6 P=18
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Siyuan	Remark:	适配器:A02+数据线:A11 ANT13

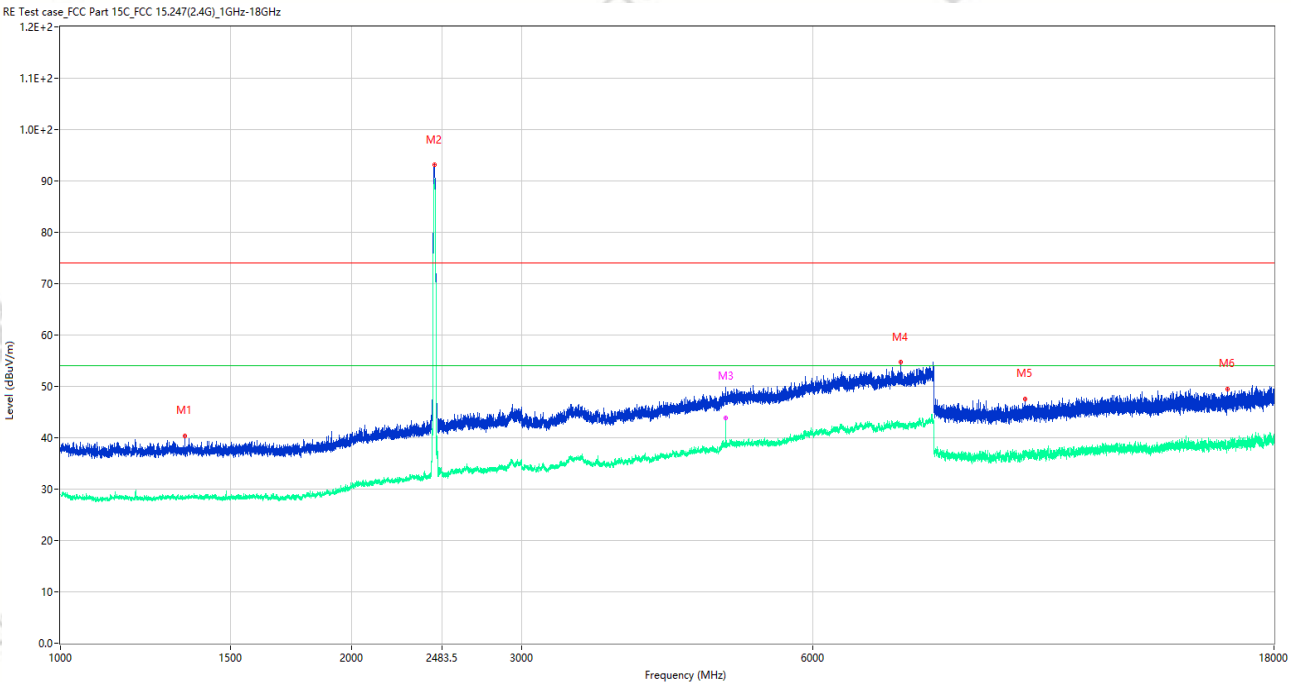

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1344.000	40.38	-16.05	74.0	33.62	Peak	360.00	150	Vertical	Pass
1**	1344.000	28.31	-16.05	54.0	25.69	AV	360.00	150	Vertical	Pass
2	2438.250	93.12	-12.38	74.0	-19.12	Peak	298.00	150	Vertical	N/A
2**	2438.250	90.31	-12.38	54.0	-36.31	AV	298.00	150	Vertical	Fail
3	4874.500	48.75	-2.25	74.0	25.25	Peak	234.00	150	Vertical	Pass
3**	4874.500	43.91	-2.25	54.0	10.09	AV	234.00	150	Vertical	Pass
4	7395.000	54.71	0.79	74.0	19.29	Peak	203.00	150	Vertical	Pass
4**	7395.000	42.27	0.79	54.0	11.73	AV	203.00	150	Vertical	Pass
5	9954.500	47.60	-3.98	74.0	26.40	Peak	7.00	150	Vertical	Pass
5**	9954.500	36.53	-3.98	54.0	17.47	AV	7.00	150	Vertical	Pass
6	16115.500	49.39	-1.47	74.0	24.61	Peak	7.00	150	Vertical	Pass
6**	16115.500	38.43	-1.47	54.0	15.57	AV	7.00	150	Vertical	Pass

Test Result

Project Number: P-CC26010298

Test Time: 2026-02-06_09.33.23

EUT Name: Mobile Phone

Temp.(°C): 22.6

Model Number: X6895

Humidity (%RH): 54

Sample Number: CC26010335-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 2.4GWIFI 11a CH6 P=18


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Siyuan

Remark: 适配器:A02+数据线:A11 ANT13

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

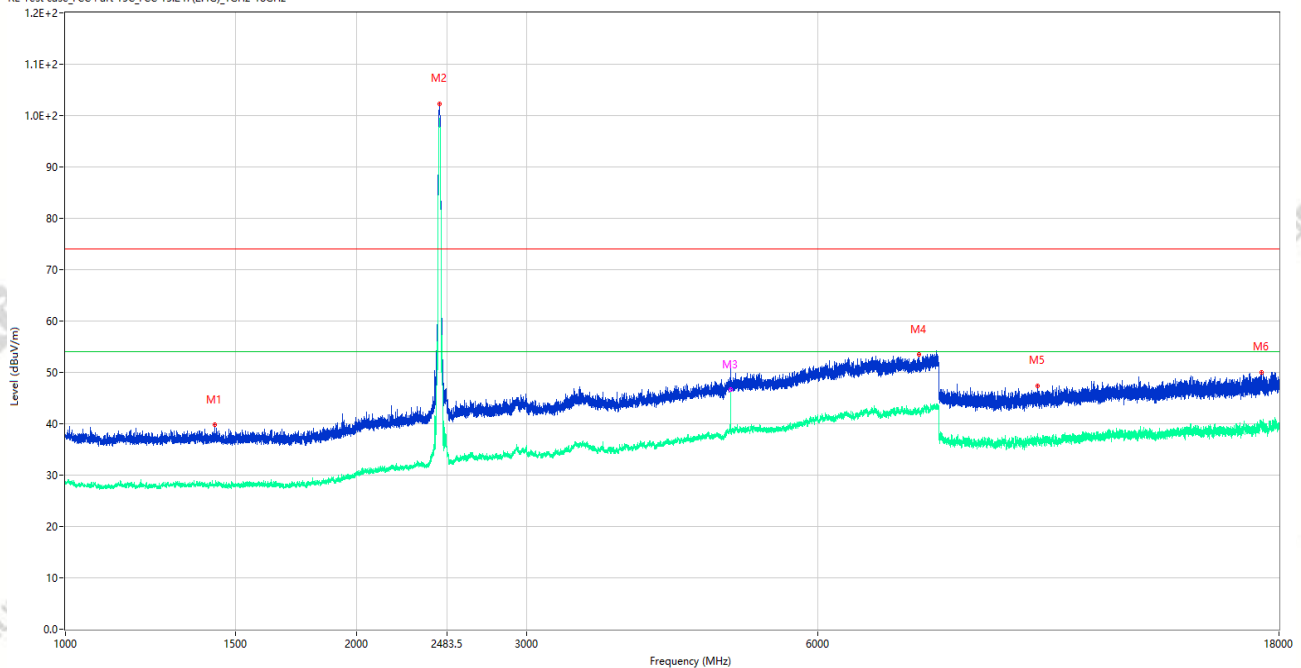

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1426.500	39.77	-15.96	74.0	34.23	Peak	101.00	150	Horizontal	Pass
1**	1426.500	27.91	-15.96	54.0	26.09	AV	101.00	150	Horizontal	Pass
2	2438.000	102.32	-12.38	74.0	-28.32	Peak	56.00	150	Horizontal	N/A
2**	2438.000	99.31	-12.38	54.0	-45.31	AV	56.00	150	Horizontal	Fail
3	4874.500	50.10	-2.25	74.0	23.90	Peak	136.00	150	Horizontal	Pass
3**	4874.500	46.58	-2.25	54.0	7.42	AV	136.00	150	Horizontal	Pass
4	7637.500	53.42	0.56	74.0	20.58	Peak	360.00	150	Horizontal	Pass
4**	7637.500	42.50	0.56	54.0	11.50	AV	360.00	150	Horizontal	Pass
5	10126.000	47.41	-4.06	74.0	26.59	Peak	38.00	150	Horizontal	Pass
5**	10126.000	37.61	-4.06	54.0	16.39	AV	38.00	150	Horizontal	Pass
6	17251.500	50.08	-0.64	74.0	23.92	Peak	300.00	150	Horizontal	Pass
6**	17251.500	39.90	-0.64	54.0	14.10	AV	300.00	150	Horizontal	Pass


审核员 (Reviewer) : Huang Chengkun

日期 (Date) : 2026/02/07

Test Result

Project Number: P-CC26010298
Test Time: 2026-02-07_04.32.52

EUT Name:	Mobile Phone	Temp.(°C):	23.2
Model Number:	X6895	Humidity (%RH):	55
Sample Number:	CC26010335-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11g CH6 P=16
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Siyuan	Remark:	适配器:A02+数据线:A11 ANT13

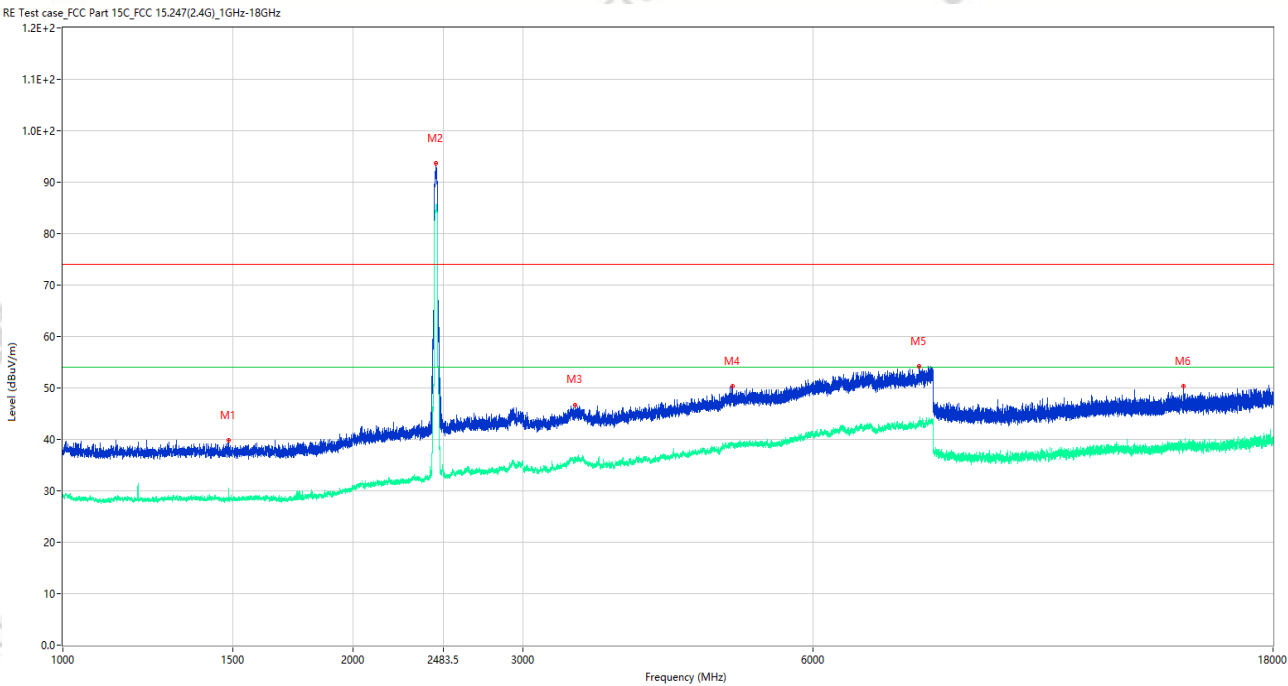

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1484.500	39.90	-16.28	74.0	34.10	Peak	324.00	150	Vertical	Pass
1**	1484.500	28.81	-16.28	54.0	25.19	AV	324.00	150	Vertical	Pass
2	2439.250	93.68	-12.37	74.0	-19.68	Peak	53.00	150	Vertical	N/A
2**	2439.250	85.32	-12.37	54.0	-31.32	AV	53.00	150	Vertical	N/A
3	3399.500	46.69	-5.69	74.0	27.31	Peak	315.00	150	Vertical	Pass
3**	3399.500	35.99	-5.69	54.0	18.01	AV	315.00	150	Vertical	Pass
4	4953.500	50.32	-1.73	74.0	23.68	Peak	350.00	150	Vertical	Pass
4**	4953.500	38.77	-1.73	54.0	15.23	AV	350.00	150	Vertical	Pass
5	7730.500	54.18	0.92	74.0	19.82	Peak	20.00	150	Vertical	Pass
5**	7730.500	43.00	0.92	54.0	11.00	AV	20.00	150	Vertical	Pass
6	14545.000	50.31	-2.61	74.0	23.69	Peak	63.00	150	Vertical	Pass
6**	14545.000	38.82	-2.61	54.0	15.18	AV	63.00	150	Vertical	Pass


Test Result

Project Number: P-CC26010298

Test Time: 2026-02-07_04.37.59

EUT Name:	Mobile Phone	Temp.(°C):	23.2
Model Number:	X6895	Humidity (%RH):	55
Sample Number:	CC26010335-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11g CH6 P=16
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Siyuan	Remark:	适配器:A02+数据线:A11 ANT13

RE Test case FCC Part 15C FCC 15.247(2.4G)_1GHz-18GHz

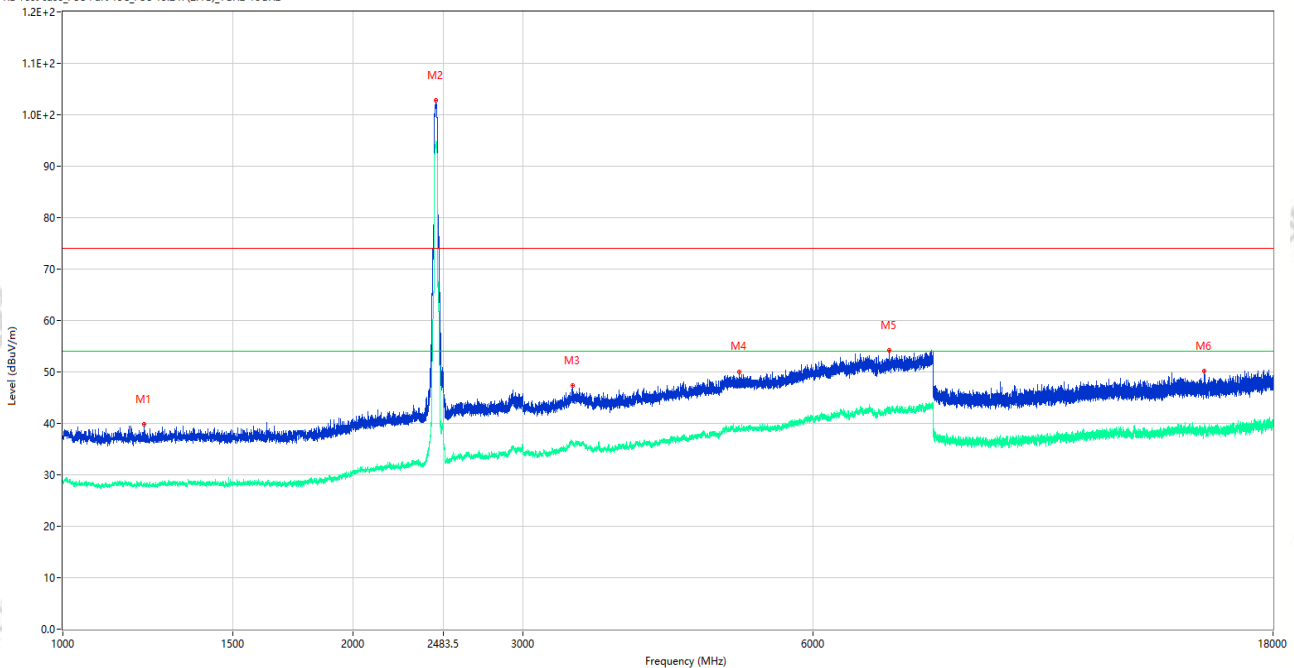


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1215.000	39.79	-15.94	74.0	34.21	Peak	90.00	150	Horizontal	Pass
1**	1215.000	27.90	-15.94	54.0	26.10	AV	90.00	150	Horizontal	Pass
2	2436.000	102.72	-12.33	74.0	-28.72	Peak	176.00	150	Horizontal	N/A
2**	2436.000	94.51	-12.33	54.0	-40.51	AV	176.00	150	Horizontal	N/A
3	3376.000	47.32	-4.87	74.0	26.68	Peak	331.00	150	Horizontal	Pass
3**	3376.000	36.13	-4.87	54.0	17.87	AV	331.00	150	Horizontal	Pass
4	5030.000	50.06	-2.13	74.0	23.94	Peak	360.00	150	Horizontal	Pass
4**	5030.000	38.90	-2.13	54.0	15.10	AV	360.00	150	Horizontal	Pass
5	7199.500	54.20	0.37	74.0	19.80	Peak	161.00	150	Horizontal	Pass
5**	7199.500	42.81	0.37	54.0	11.19	AV	161.00	150	Horizontal	Pass
6	15268.000	50.16	-1.09	74.0	23.84	Peak	0.00	150	Horizontal	Pass
6**	15268.000	39.66	-1.09	54.0	14.34	AV	0.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010298
Test Time: 2026-02-07_04.47.07

EUT Name:	Mobile Phone	Temp.(°C):	23.2
Model Number:	X6895	Humidity (%RH):	55
Sample Number:	CC26010335-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11n20 CH6 P=17
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Siyuan	Remark:	适配器:A02+数据线:A11 ANT13

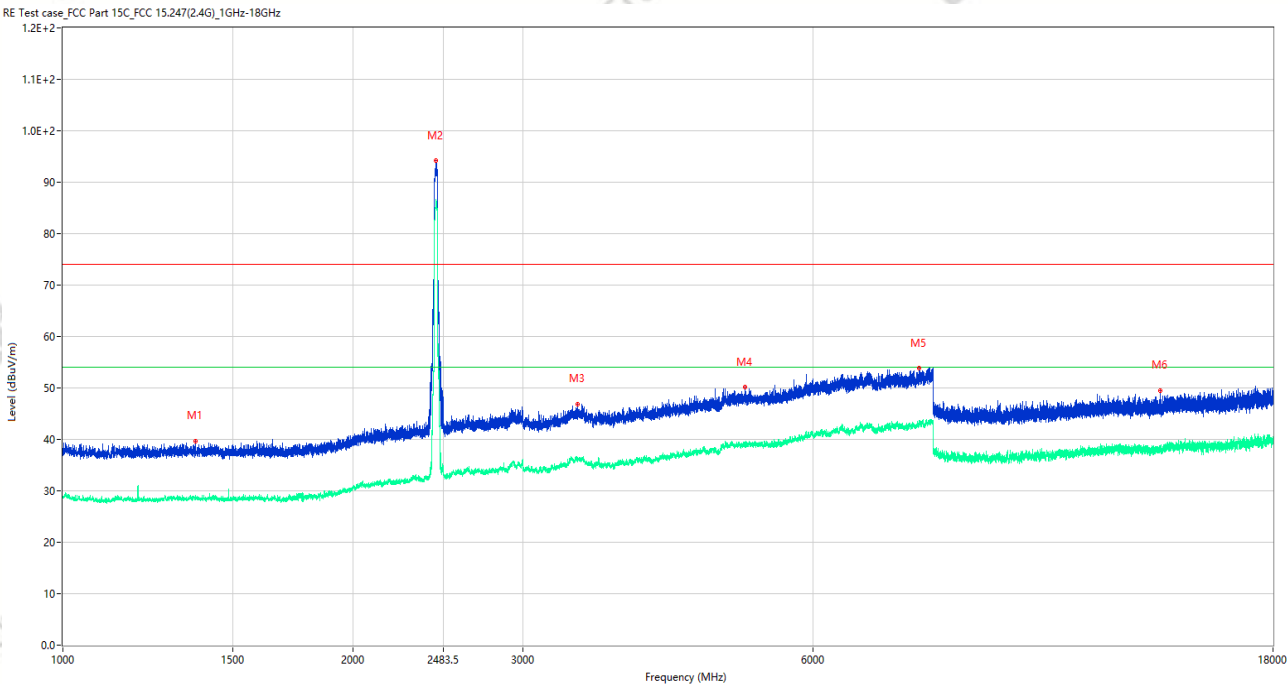

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1373.500	39.67	-15.98	74.0	34.33	Peak	228.00	150	Vertical	Pass
1**	1373.500	29.04	-15.98	54.0	24.96	AV	228.00	150	Vertical	Pass
2	2439.500	94.16	-12.37	74.0	-20.16	Peak	55.00	150	Vertical	N/A
2**	2439.500	86.14	-12.37	54.0	-32.14	AV	55.00	150	Vertical	N/A
3	3422.000	46.86	-4.91	74.0	27.14	Peak	356.00	150	Vertical	Pass
3**	3422.000	36.00	-4.91	54.0	18.00	AV	356.00	150	Vertical	Pass
4	5097.500	50.15	-2.47	74.0	23.85	Peak	360.00	150	Vertical	Pass
4**	5097.500	39.39	-2.47	54.0	14.61	AV	360.00	150	Vertical	Pass
5	7733.500	53.82	1.11	74.0	20.18	Peak	123.00	150	Vertical	Pass
5**	7733.500	43.23	1.11	54.0	10.77	AV	123.00	150	Vertical	Pass
6	13738.000	49.49	-2.58	74.0	24.51	Peak	300.00	150	Vertical	Pass
6**	13738.000	38.53	-2.58	54.0	15.47	AV	300.00	150	Vertical	Pass


Test Result

Project Number: P-CC26010298

Test Time: 2026-02-07_04.43.29

EUT Name:	Mobile Phone	Temp.(°C):	23.2
Model Number:	X6895	Humidity (%RH):	55
Sample Number:	CC26010335-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11n20 CH6 P=17
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Siyuan	Remark:	适配器:A02+数据线:A11 ANT13

RE Test case FCC Part 15C FCC 15.247(2.4G)_1GHz-18GHz

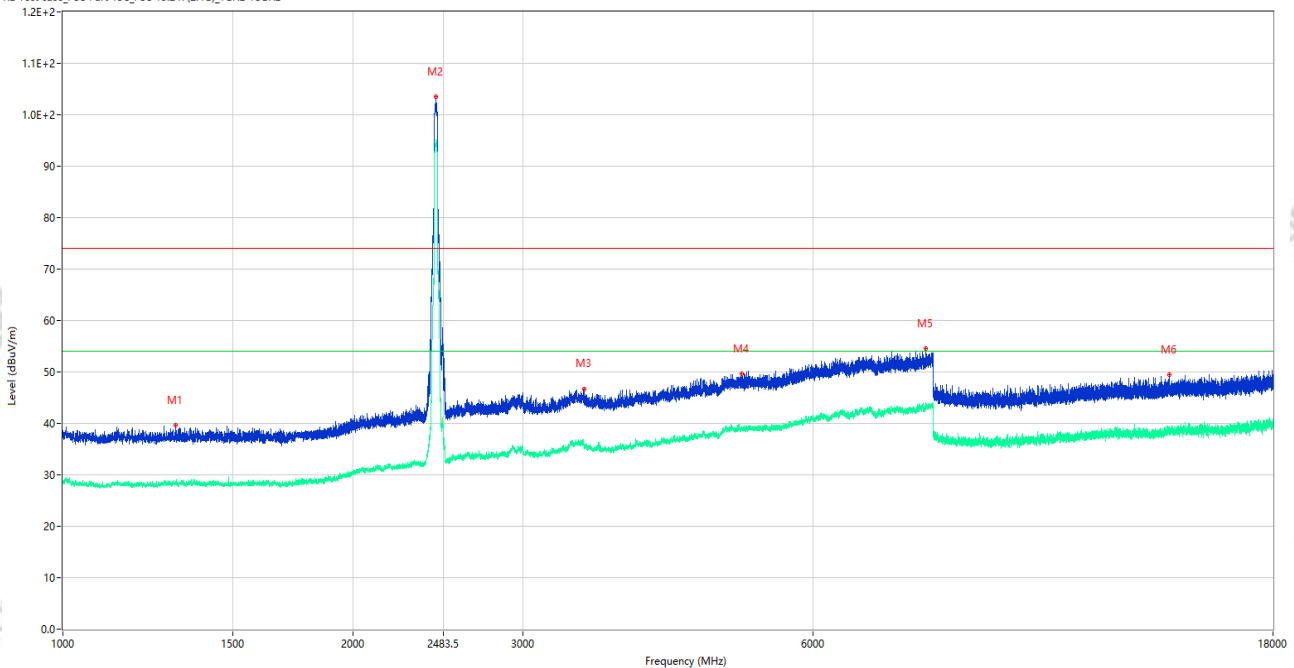


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1310.250	39.58	-15.73	74.0	34.42	Peak	5.00	150	Horizontal	Pass
1**	1310.250	28.30	-15.73	54.0	25.70	AV	5.00	150	Horizontal	Pass
2	2438.500	103.43	-12.37	74.0	-29.43	Peak	154.00	150	Horizontal	N/A
2**	2438.500	95.12	-12.37	54.0	-41.12	AV	154.00	150	Horizontal	N/A
3	3473.000	46.67	-5.85	74.0	27.33	Peak	28.00	150	Horizontal	Pass
3**	3473.000	35.81	-5.85	54.0	18.19	AV	28.00	150	Horizontal	Pass
4	5060.000	49.57	-2.34	74.0	24.43	Peak	0.00	150	Horizontal	Pass
4**	5060.000	38.93	-2.34	54.0	15.07	AV	0.00	150	Horizontal	Pass
5	7854.000	54.53	1.56	74.0	19.47	Peak	0.00	150	Horizontal	Pass
5**	7854.000	43.63	1.56	54.0	10.37	AV	0.00	150	Horizontal	Pass
6	14042.000	49.40	-1.94	74.0	24.60	Peak	322.00	150	Horizontal	Pass
6**	14042.000	38.30	-1.94	54.0	15.70	AV	322.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26010298

Test Time: 2026-02-07_03.22.04

EUT Name:	Mobile Phone	Temp.(°C):	23.2
Model Number:	X6895	Humidity (%RH):	55
Sample Number:	CC26010335-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	Normal working Link(2.4G WIFI)
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Siyuan	Remark:	适配器:A02+数据线:A11 ANT13

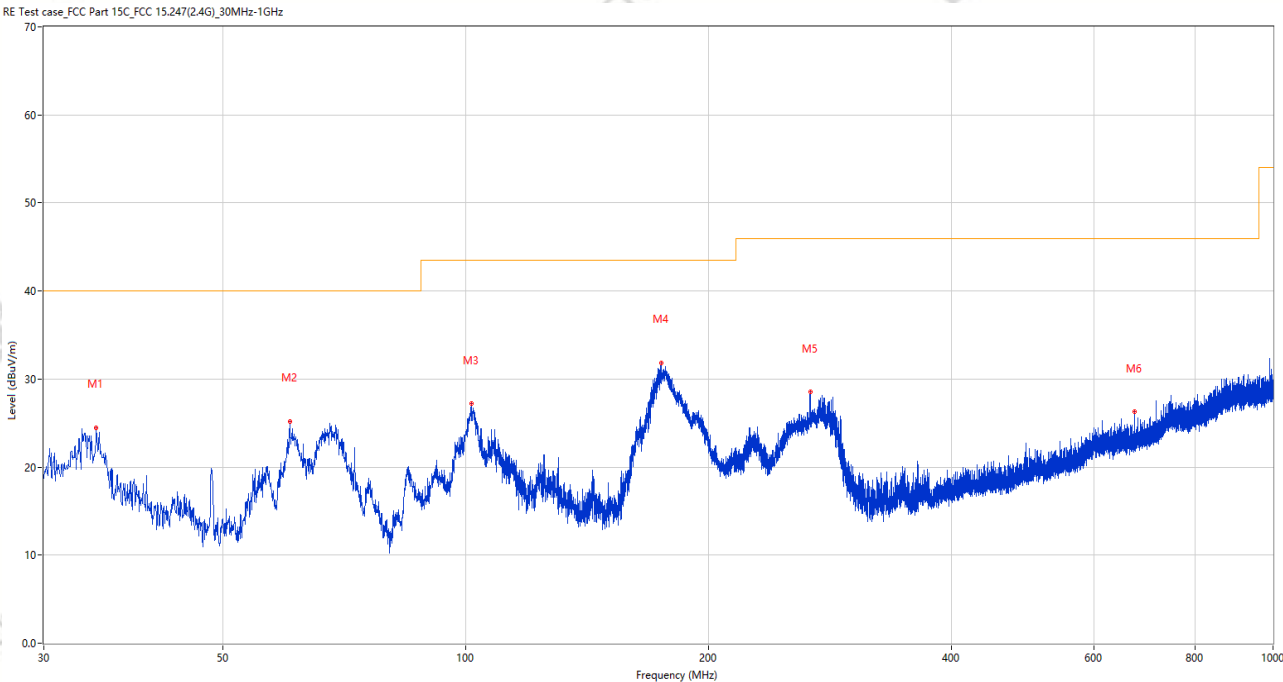


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	34.850	24.47	-27.81	40.0	15.53	Peak	138.00	100	Vertical	Pass
2	60.507	25.21	-26.15	40.0	14.79	Peak	163.00	100	Vertical	Pass
3	101.683	27.18	-26.11	43.5	16.32	Peak	303.00	100	Vertical	Pass
4	174.724	31.87	-28.24	43.5	11.63	Peak	192.00	200	Vertical	Pass
5	267.408	28.51	-24.08	46.0	17.49	Peak	28.00	100	Vertical	Pass
6	673.062	26.26	-14.16	46.0	19.74	Peak	82.00	200	Vertical	Pass

Test Result

Project Number: P-CC26010298

Test Time: 2026-02-07_03.17.46

EUT Name:	Mobile Phone	Temp.(°C):	23.2
Model Number:	X6895	Humidity (%RH):	55
Sample Number:	CC26010335-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	Normal working Link(2.4G WIFI)
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Siyuan	Remark:	适配器:A02+数据线:A11 ANT13

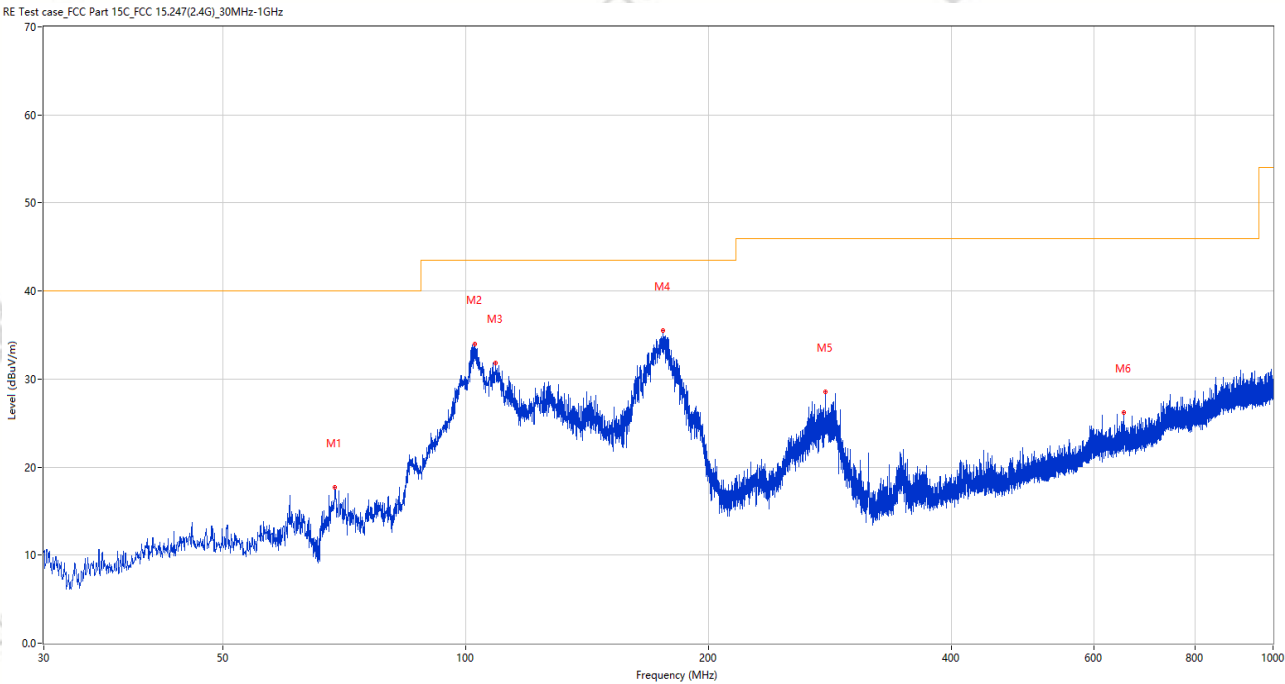

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	68.849	17.74	-28.61	40.0	22.26	Peak	5.00	200	Horizontal	Pass
2	102.604	34.01	-26.11	43.5	9.49	Peak	360.00	200	Horizontal	Pass
3	108.861	31.86	-26.52	43.5	11.64	Peak	154.00	200	Horizontal	Pass
4	175.500	35.54	-28.24	43.5	7.96	Peak	300.00	100	Horizontal	Pass
5	279.193	28.54	-23.75	46.0	17.46	Peak	277.00	200	Horizontal	Pass
6	653.953	26.25	-14.40	46.0	19.75	Peak	78.00	100	Horizontal	Pass