

Amateur Radio
UV-5R Mini Series
USER'S MANUAL

English

PREFACE

Thank you for purchasing this product. which is a dual band/dual display/dual watch. This easy-to-use radio will deliver you secure, instant and reliable communications at peak efficiency. Please read this manual carefully before use. The information presented herein will help you to derive maximum performance from your radio.



WARNING ! European Users should note that operation of this unit in Transmit mode requires the operator to have a valid Amateur Radio License from their respective Countries Amateur Radio Licensing Authority for the Frequencies and Transmitter Power levels that this Radio transmits on. Failure to comply may be unlawful and liable for prosecution. At this subject, refer to the “EU” specification guide 2014/53/EU.



ATTENTION! When programming the radio, start by reading the factory software data, and then rewrite this data with your frequency etc., to a new saved code plug, otherwise errors may occur. You can use the programming cable with a PC to program the authorized frequency, bandwidth, power, etc. your programming must comply with your FCC (or EU other country) license certification.



ATTENTION! *Before using this product, read the RF Energy Exposure and Product Safety Guide that ship with the radio which contains instructions for safe usage and RF energy awareness and control for compliance with applicable standards and regulation.*

Getting Started

Regulations and Safety Warnings

■ EU Regulatory Conformance

As certified by the qualified laboratory, the product is in compliance with the essential requirements and other relevant provisions of the Directive 1999/5/EC (2014/53/EU). All applicable EU regulations are regarded (2006/66/EC, 2011/65/EU, 2012/19/EU). Please note that the above information is applicable to EU countries only.

■ FCC Part15

FCC Part 15 Compliance

This device complies with Part 15 of the FCC rules. Operation is subjected to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void your authority to operate the equipment.

FCC Regulatory Conformance

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates and can radiate radio frequency energy. If not installed and used in accordance with the instructions, it may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. Verification of harmful interference by this equipment to radio or television reception can be determined by turning it off and then on. The user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Operating Instructions:

- Transmit no more than the rated duty factor of 50% of the time. To transmit (talk), press the Push-to-Talk (PTT) key. To receive calls, release the [PTT] key. Transmitting 50% of the time, or less, is important because the radio generates measurable RF energy only when transmitting (in terms of measuring for standards compliance).
- Keep the radio unit at least 2.5cm away from the face. Keeping the radio at the proper distance is important as RF exposure decreases with distance from the antenna. The antenna should be kept away from the face and eyes.
- When worn on the body, always place the radio in an approved holder, holster, case, or body harness or by use of the correct clip for this product. Use of non-approved accessories may result in exposure levels which exceed the FCC's occupational/ controlled environmental RF exposure limits.
- Use of non-approved antennas, batteries, and accessories causes the radio to exceed the FCC RF exposure guidelines.
- Contact your local dealer for the product's optional accessories.

■FCC RF Exposure

WARNING! It is up to the user to properly operate this radio transmitter to insure safe operation. Please adhere to the following:

Do not use the radio with a damaged antenna. If a damaged antenna comes into contact with the skin, a minor burn may result.

Please contact your local dealer for a replacement antenna.

Hand-Held Operation (Held-to-Face)

This device was evaluated for typical hand-held (held-to-face) operations with a 1 inch spacing from the front of the radio. For hand-held operation, the radio should be held 1 inch from the user's face in order to comply with FCC RF exposure requirements.

Body-Worn Operation

This device was evaluated for body-worn operations with the supplied belt-clip accessory. (All necessary accessories are included in the package; any additional or optional accessories are not required for compliance with the guidelines.) Third party accessories (unless approved by the manufacturer) should be avoided as these might not comply with FCC RF exposure guidelines.

For body worn operation, this device has been tested and meets the Industry FCC RF exposure guidelines when used with our company accessories supplied or designated for this product. Use of other accessories may not ensure compliance with Industry FCC RF exposure guidelines.

■Precautions for Portable Terminals

Operating Prohibitions

To protect you against any property loss, bodily injury or even death, be sure to observe the following safety instructions:

1. Do not operate the product in a location containing fuels, chemicals, explosive atmospheres and other flammable or explosive materials. In such location, only an approved Ex-protection model is allowed for use, but any attempt to assemble or disassemble it is strictly prohibited.
2. Do not operate the product near or in any blasting area.
3. Do not operate the product near any medical or electronic equipment that is vulnerable to RF signals.
4. Do not hold the product while driving.
5. Do not operate the product in any area where use of wireless communication equipment is completely prohibited.

Important Tips

To help you make better use of the product, be sure to observe the following instructions:

1. Do not use any unauthorized or damaged accessory.
2. Keep the product at least 2.5 centimeters away from your body during transmission.
3. Do not keep the product receiving at high volume for a long time.
4. For vehicles with an air bag, do not place the product in the area over the air bag or in the air bag deployment area.
5. Keep the product and its accessories out of reach of children and pets.
6. Please operate the product within the specified temperature range.
7. Continuous transmission for a long time may lead to heat accumulation within the product. In this case, please keep it at a proper location for cooling.
8. Handle the product with care.
9. Do not disassemble, modify or repair the product and its accessories without authorization.

■Precautions for Batteries

Charging Prohibitions

To protect you against any property loss, bodily injury or even death, be sure to observe the following safety instructions:

1. Do not charge or replace your battery in a location containing fuels, chemicals, explosive atmospheres and other flammable or explosive materials.
2. Do not charge your battery that is wet. Please dry it with a soft and clean cloth prior to charge.
3. Do not charge your battery suffering deformation, leakage and overheat.
4. Do not charge your battery with an unauthorized charger.
5. Do not charge your battery in a location where strong radiation is present.
6. Overcharge shall always be prohibited for it may shorten the life of your battery.

Maintenance Instructions

To help your battery work normally or prolong its life, be sure to observe the following instructions:

1. Accumulated dust on charging connector may affect normal charging. Please use a clean and dry cloth to wipe it on a regular basis.
2. It is recommended to charge the battery under 5°C~40°C. Violation of the said limit may cause battery life reduction or even battery leakage.
3. To charge a battery attached to the product, turn it off to ensure a full charge.
4. Do not remove the battery or unplug the power cord during charging to ensure a smooth charging process.
5. Do not dispose of the battery in fire.
6. Do not expose the battery to direct sunlight for a long time nor place it close to other heating sources.
7. Do not squeeze and penetrate the battery, nor remove its housing.

Transportation Instructions

1. Damaged batteries must not be transported.
2. To avoid short circuit, separate the battery from metal parts or from each other if two or more batteries are transported in one packaging.
3. The radio must be switched off and secured against switch-on, if the battery is attached.

The content of the shipment must be declared in the shipping documents and by a Battery Shipping Label on the packaging. Contact your hauler for the local regulations and further information.

Maintenance

Your Two Way Radio is an electronic product of exact design and should be treated with care.

The suggestions below will help you to fulfill any warranty obligations and to enjoy this product for many years.

- Do not attempt to open the radio for any reason! The radio's precision mechanics and electronics require experience and specialized equipment; for the same reason, the radio should under no circumstances be realigned as it has

already been calibrated for maximum performance. Unauthorized opening of the transceiver will void the warranty.

- Do not store the Radio under the sunshine or in hot areas.
- High temperatures can shorten the life of electronic devices, and warp or melt certain plastics.
- Do not store the radio in dusty and dirty areas.
- Keep the Radio dry. Rainwater or damp will corrode electronic circuits.
- If it appears that the Radio diffuses peculiar smell or smoke, please shut off its power immediately and take off the charger or battery from the radio.
- Do not transmit without antenna.

Functional features

-4 band scan receiver: 108-136MHz, 136-174MHz, 350-390MHz, 400-520MHz

-Transmit frequency: 144-148MHz, 420-450MHz

-5W RF output, dual PTT transmitter

-Wireless read/write frequency

-1.44" TFT large screen, full keyboard, full open menu operation, local channel storage and deletion

-Full keyboard manual frequency input, 999 channel memory

-One-click frequency pairing, easy pairing and grouping.

-Relay function settings: frequency difference, frequency difference direction, relay activation audio settings

-Alarm function (three types of alarm settings), to protect your security

-Built-in input method, supports local editing of channel name, receiving frequency, transmitting frequency

-DTMF encoding and decoding function, 20 DTMF calls

-Side button function customization: radio, scan, sweep, voice control, flashlight, alarm


- FM radio function (receive frequency 76~108MHz)
- Automatic or manual keypad lock, backlight selection
- 7.4V_1600mAh rechargeable lithium battery life
- Support Type-C charge, more convenient range

Items in the Package

Item	Quantity (PCS)	Item	Quantity (PCS)
Radio	1	Power Adapter	1
Battery	1	Lanyard	1
Antenna	1	Operation Manual	1
Belt Clip	1		

*Charger and power adapter are subject to the final configuration of the dealer. Please understand that the charging instructions in this manual may not be appropriate if Type-C charging method.

Product Overview

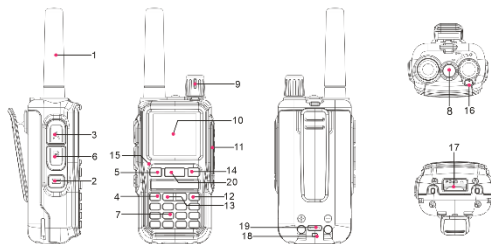

1. Antenne

2. SK1-Customized Function Keys/Monitor button

3. PTT-A Button

4. OK/Menu button

5. V/M-VFO/MR

6. PTT-B Button

7. Numeric Keypad

8. Flashlight

9. Volume/Power Knob

10. Screen

11. Accessory Port

12. Cancel/Back button

13. ▲ Up button/ ▼ Down button

14. A/B

15. Microphone

16. LED Indicator

17. Battery Latch

18. Type-C Charging indicator light

19. Type-C Charging Port

20. Search/Flashlight button

Side Key [SK1] Customization Function

The function of the "SideKey SK1" allows the setting of shortcut functions via the CPS programming software or via the menu - Radio settings - "SideKey SK1".

-FM Radio: Quickly turns the radio function on or off.

-Scan: Quickly turns the scanning function on or off. The scan function can also be turned on or off by long pressing the # key.

-SEARCH: Quickly turn on or off the one-touch sweep function.

-VOX: Quickly turn on or off the VOX function.

-LAMP: Quickly turn on or off the flashlight.

-SOS: Quickly turn on or off the alarm function.

LCD Display

Icon	Description
RSSI	Squelch Open/ Close Indicator
H	Transmit power level indicator, According to Power
🔊	Make sure you can hear the DTMF side tone from the radio speaker, set to DT-ST, ANI-ST, DT+ANI.
Ⓚ	DCS enabled
Ⓒ	CTCSS enabled
+	Enables access of repeaters in VFO/Frequency Mode. TX will be shifted higher in frequency than RX.
-	Enables access of repeaters in VFO/Frequency Mode. TX will be shifted lower in frequency than RX
D	Dual watch enabled
🔒	Keypad lock enabled
V	VOX enabled

	The confidential calling feature is activated
N	Narrowband enabled
	Battery level indicator
R	Reverse function enabled
T	The terminal is switched from transit mode to pass-through mode.
SCR	The voice scramble function has been activated

Before Use

When using the terminal for the first time, a low battery warning may occur. It is recommended to turn off the radio during charging. The battery's LEDs provide an indication of the current state of charge, as shown in the table below.

Indicator light	Charging status
Red light is always on	Charging
Green light is always on	Charging complete

Attaching the Antenna

Turn the antenna clockwise until it is tight. To remove the antenna, turn it counterclockwise.

CAUTION

Do not hold the radio antenna in your hand, as this will reduce the performance of the radio and the life of the antenna. Do not shake the radio with the top of the antenna in your hand, as this will degrade the performance and life of the radio antenna.

Attaching the Belt Clip

1. Use a Phillips screwdriver to turn the screw on the back of the radio counter-clockwise and remove it.

2. Align the screw holes on the belt clip with the screw holes on the back of the radio. Align the screw holes on the back of the radio.
3. Put the screws back in place and use a Phillips screwdriver to turn the screws clockwise. Turn the screwdriver clockwise until it is hand-tight.

Basic operations

Turning your Radio On and Off

To turn your radio ON, turn the **[Volume/Power]** rotary knob clockwise.

To turn your radio OFF, turn the **[Volume/Power]** rotary knob counterclockwise.

Setting the Volume

Increase volume by turning the **[Volume/Power]** rotary knob clockwise.

To decrease volume, turn the **[Volume/Power]** rotary knob counterclockwise.

Do not hold the radio close to your ear. If the volume is set to an uncomfortable level, it could hurt your ear.

Locking or Unlocking Keypad

To avoid accidentally changing radio settings:

1. Press and hold the **[*🔒]** key to lock the keypad until the screen displays the "🔒" icon.
2. In lock mode, you can turn the intercom on and off, adjust the volume, receive, transmit, send call tones, send emergency alerts, and listen to channels. All other functions remain locked.
3. In lock mode, press and hold the **[*🔒]** key to unlock the keypad until the "🔒" icon is no longer displayed to unlock the radio.

Keypad Entry

You can enter radio aliases, channel aliases, numbers, etc. using the radio's numeric keypad.

1. To switch between input methods, press **[# ↑]** key.
2. Press 1 to enter a special character (except in numeric input mode, where the number 1 is entered)
3. Press 0 to enter a space (except in the numeric input mode, in which special characters are entered).

Select a Channel

The channel is the channel through which the signal is transmitted. Press the **[V/M]** button to toggle between VFO and channel mode to select channel mode.

Press the **▲/▼** buttons or the rotary encoder to select the desired channel.

Enter the channel number using the keypad. For example, to switch to channel 64, enter 064 totaling 3 digits to switch to channel 64.

Channel Memory

In Frequency and in Standby mode, you can store frequencies and parameters.

Press **[MENU] [3] [MENU] [1] [5]**, the screen will display "**MEMCH**".

Press **[MENU]** to enter the function. Press the **▲/▼** buttons to select the channel, then press **[MENU]** to store it. A sound tone will confirm that the storing succeeded. Press **[EXIT]** to exit to return to standby mode.

NOTES

If you want to set CTCSS tones, DCS codes or the frequency offset, you have to do it before storing the channel. Stored channels are displayed as CH-, other channels have no CH- display.

Delete a channel (DEL-CH)

VFO mode and in standby mode, press **[MENU] [3] [MENU] [1] [6]**, the screen will display "**DELCH**".

Press **[MENU]** to enter the function. Press the **▲/▼** buttons or rotate the encoder to select the channel you want to delete, then press **[MENU]** to confirm.

To return to the standby mode press **[EXIT]** key.

NOTE: Channel 1 cannot be deleted.

Main Band/Sub Band Switch

In standby mode, press the **[A/B]** key to toggle between the A and B bands to switch between the main/sub bands.

The main band is the highlighted band. The darker displayed band is the sub-band.

VFO/Channel Switch

Press the **[V/M]** button to switch between VFO and channel display.

VFO mode will display the 'VFO' icon. MR mode will display the channel serial number.

Setting the VFO Frequency

Turn the radio to VFO mode, then press the **[A/B]** key to switch to the main channel.

Operation 1: Input the VFO frequency directly with the keypad.

Operation 2: Press the **▲/▼** button or rotary encoder to adjust the VFO frequency in the set frequency step.

Call Service

All radios in the group must be set to the same channel and sub-code to communicate.

To ensure optimal reception volume, keep the distance between the microphone and your mouth at 2.5 cm to 5 cm when transmitting.

-Initiate a call: Select a channel, press and hold the **[PTT-A]** key, the radio transmits on segment A (upper screen) and the red indicator light is always on. Then speak into the microphone with normal voice tone.

Press and hold the **[PTT-B]** key, the radio transmits on the B segment (lower screen), and the red indicator light is always on. Then speak into the microphone in a normal voice tone.

-Receive a call: After releasing the **[PTT]** key, the radio is in a receivable state. When receiving a call, the green indicator light is always on.

Note: In standby, press and hold the 8 key to toggle the transmission power.

Emergency Alarm

Emergency alarm means that the terminal can initiate an emergency alarm to seek help from the companion or the control center when it encounters an emergency.

In standby mode, press the preset **[SOS]** key to enable or disable the emergency alarm function.

Flashlight

In standby mode, press the preset  key to turn the flashlight on or off.

FM Radio Function

Set the **[SK1]** key to the radio function via Menu >> Radio Set >> Press SK1.

Turn on the radio and press the SK1 key **[FM Radio]** to enter radio mode and the screen displays the tuning frequency. The following operations can be performed:

- Press **▲/▼** key to search for radio channels at the preset step frequency.
- Press the **[# ↑]** key to search for radio channels automatically, the screen displays 'SEEK...'
- Press **[EXIT]** key to switch frequency band between 65.0/75.0MHz.
- Press SK1 key **[FM Radio]** to exit radio mode.

Monitor

Press and hold the pre-programmed **[Monitor]** key to enter monitor mode and listen for weak signals on the current channel.

You can also listen to the volume level of the radio when you are not receiving. This allows you to adjust the volume, if necessary.

Release the **[Monitor]** key to exit the monitor mode.

Frequency Search

Press the pre-programmed **[SEARCH]** key or press and hold  key, the radio enters into frequency search state, the screen displays "SEARCH...". Press **[# ↑]** key to switch the searching band, such as VHF/UHF, etc. The frequency and CTCSS/DCS code will be displayed after searching is completed.

Press **[MENU]** to save the channel.

Reverse Frequency Function

Short press the **[*A]** key in relay mode can invert the receive frequency and transmit frequency, the screen shows 'R' icon.

-This function is often used in repeater channels, and is effective when there is a frequency difference between the receive frequency and the transmit frequency.

Talk Around Function

In repeater mode, press [***M**] to switch between Talkaround Mode and Repeater Mode, the screen displays between 'T' icon and 'R' icon.

-In Talkaround mode, the receive frequency is equal to the transmit frequency.

Repeater Activation Tone

Turn on the radio, press and hold the [**PTT**] key, then press the [**SK1**] to transmit 1750Hz audio to activate a repeater in hibernation.

Voice-activated transmit (VOX)

Enable VOX function, you don't need to press **PTT** key to transmit, through the voice of normal speech automatically transmit, after the speech stops, it will stop transmitting automatically and wait for receiving. VOX function is enabled:

(1) Standby status, press [**MENU**][2][**MENU**][4] to enter Vox Switch;

(2) Press [**MENU**][2][**MENU**][5] to enter Vox Level, press ▲/▼ to select VOX level (level 1-9);

-Open VOX, select VOX level 1 level-9, the smaller the value, the higher the sensitivity, the 'V' icon is displayed at the top of the screen. Default is off.

-Turn off VOX, select OFF OFF, V icon disappears.

(3) Press [**MENU**] key to save the setting and return to the upper menu.

-Repeat the above operation and select OFF to turn off the VOX function.

Dual Watch

When in Dual watch mode, the radio can receive the frequency set for channel A or B. Operation is as follows:

1. Press **[MENU]** **[2]** to enter Radio Set.
2. Press **[MENU]** + **▲/▼** to select "**15 Dual Watch**".
3. Press **[MENU]** key to enter Dual Watch Setting, press **▲/▼** key to select "On".
4. Press **[MENU]** key to save and return to the upper menu. The dual watch function will be turned on, and the icon 'D' will be displayed on the first line of the screen.
-Repeat the above operation and select "Off", the Dual Watch function is turned off and the icon 'D' disappears from the first line of the screen. The sub-band displays the  icon.

Stopwatch Function

Press and hold the **[MENU]** key to enable the stopwatch function. The stopwatch timing operates as follows:

- Press the **[MENU]** key to start the stopwatch.
- Press the **[MENU]** key again to stop the stopwatch.
- Press the **[EXIT]** key to exit the stopwatch function.

Weather Radio/Scan Weather Channel

Your radio has a NOAA Weather Radio function, to enable the user to receive weather reports from designated NOAA stations. Your radio also has a NOAA Weather Scan function, to enable the user to scan all 10 channels of the NOAA Weather Radio.

- (1) To turn the NOAA Weather Scan on, press and hold the **[0]** key for 3 seconds ,  icon appears. The radio will go to Weather band mode.
- (2) Press and hold the **[# ↑]** key for 3 seconds to start automatic scanning of all 10 channels and stop on active channels.
Pressing and holding the **[# ↑]** key for 3 seconds during a NOAA weather scan will stop the scan.
- (3) After stopping NOAA weather scan, it is allowed to manually select the weather channel by press the **▲** or **▼** key.
- (4) To exit the Weather Radio broadcast mode, press the  key or **[PTT]** key.

Weather channel frequencies and names

Channel Number	RX Frequency MHz	Channel Number	RX Frequency MHz
CH-01	162.550	CH-06	162.500
CH-02	162.400	CH-07	162.525
CH-03	162.475	CH-08	161.650
CH-04	162.425	CH-09	161.775
CH-05	162.450	CH-10	163.275

NOTE: Weather Channels Wx 1 Thru 10, Receive-only channels for NOAA and Canadian weather broadcasts. You cannot transmit on these channels.

Use of menu functions

Basic use

Using the menu with arrow keys

1. Press the **[MENU]** button to enter the menu.
2. Use the **▼/▲** buttons or the encoder to navigate between menu items.
3. Once you find the desired menu item, press **[MENU]** again to select that menu item.
4. Use the **▼/▲** buttons or the encoder to select the desired parameter.
5. When you've selected the parameter you want to set for a given menu item;
 - A) To confirm your selection, press **[MENU]** and it will save your setting and bring you back to the main menu.
 - B) To cancel your changes, press **[EXIT]** and it will reset that menu item and bring you out of the menu entirely.
6. To exit out of the menu at any time, press the **[EXIT]** button.

Using the menu with short-cuts

1. Press the **[MENU]** button to enter the menu.
2. Use the numerical keypad to enter the number of the menu item.

3. To enter the menu item, press the **[MENU]** button.
4. For entering the desired parameter you have two options:
 - A) Use the arrow buttons as we did in the previous section; or
 - B) Use the numerical keypad to enter the numerical short-cut code.
5. And just as in the previous section;
 - A) To confirm your selection, press **[MENU]** and it will save your setting and bring you back to the main menu.
 - B) To cancel your changes, press **[EXIT]** and it will reset that menu item and bring you out of the menu entirely.
6. To exit out of the menu at any time, press the **[EXIT]** button.

Wireless Program Radio

You can program the radio wirelessly. Before programming the radio wirelessly, you need to install the APP program. Download at www.baofengradio.com or scan



The radio operates as follows:

1. Press **[MENU]** + **[4]** to enter Wireless CPS .
2. Press **[MENU]** + **▲/▼** to select "On";

The  icon will be displayed on the first line of the screen.

Download baofengradio APP

You can program the terminal through the baofengradio APP. Download and install baofengradio APP on your Android phone. After the APP is opened, allow the Bluetooth of the cell phone and open the location function, select the brand Baofeng in the APP, select the walkie-talkie model 5Rmini Series, connect the radio, click Walkie-talkie. prompt the connection success and return to

the home page.

- **Read the radio data:** After finishing the frequency reading, click the program to enter the program details. In the program details interface you can program channel information, frequency mode, optional functions.

- **Save Profile:** The programmed profile allows you to save the profile as a new profile and name the new profile.

If you select Replace Program, click Replace Program and save.

- **Write data to radio:** click home page, select program, click 'Write' to enter write frequency, the radio will restart automatically when finish writing frequency.

Technical Specifications

General

Receiver Frequency	FM: 76-108 MHz; BT: 2402MHz-2480MHz VHF: 108-136MHz, 136-174MHz, UHF: 400-520MHz, 350-390MHz
Transmission Frequency	VHF 144-148MHz, UHF 420-450MHz (Amateur Band) BT: 2402MHz-2480MHz
Channel Spacing	25.0kHz(Wide)/12.5kHz(Narr)
Memory Channel	999 Groups
Operation Voltage	DC 7.4 V $\pm$ 10%
Dimensions	108mm×52mm×37mm (No antenna)
Weight	200g (Battery pack included)
Transmission current	$\leq$ 1600mA
Receive Sensitivity	0.25 μ V (12dB SINAD)
Receive current	$\leq$ 380mA
Connection for accessories	2 pin Kenwood jack
Power	5W

NOTE: All specifications may be modified without prior notice or liability. Thank you.

Shortcut Menu operations

Menu		Name		Setting	Description
1	SCAN	1	Freq Ranger	NNNNnnnn	Input VFO range lower and upper frequency
		2	Scan Mode	Time	Time Operation - scanning will resume after a fixed time has passed
				Carrier	Carrier Operation -scanning will resume after the signal disappears
				Search	Search Operation -scanning will not resume
		3	Scan Memory	ALL	RX_TX are saved (default is all, encoding and decoding are the same)
				DECODER	Save only in Transmitter CTCSS/DCS
				ENCODER	Save only in Receiver CTCSS/DCS
2	Radio Setting	1	Step	2.5-100K	Selects the amount of frequency change in VFO/Frequency mode when scanning or pressing the ▲ or ▼ keys.
		2	Squelch	OFF,LEVEL1-LEVEL5	Squelch silences the receiver when there is no signal. Setting the squelch to 0 will open up the squelch entirely.
		3	Power Save	OFF	Turn off radio sleep. The battery consumption is large, and the standby time may be shortened
				ON	Turn on radio sleep. Turning on is more power efficient, but you might miss the first few syllables before the RX turns on.
		4	VOX Switch	OFF	Turn off the radio VOX.
				ON	Turn on the radio VOX.
		5	VOX Level	LEVEL1-LEVEL9	When enabled it is not necessary to push the [PTT] button on the transceiver. Adjust the gain level to an appropriate sensitivity to allow smooth transmission.

6	VOX Delay	0.5.....2.0s	When the VOX is enabled, set up the VOX delay to help to extend the transmission time to avoid stopping a transmission too early. 0.5s-2s, Step 0.1 second. a total of 16 times offered.
7	TOT	OFF	Allow continuous launch, launch time is not limited
		15;30;45...180	Maximum allowed time for transmission while holding down the PTT key.
8	TOA	OFF	Disable TOA function
		0.....10	Activate TOA function. Range 0 – 10 seconds, Step 1 second.
9	Voice	OFF	Disable voice prompts
		ON	Activate voice prompts
10	Language	Chinese	Display menus and voice prompts in Chinese language
		English	Display menus and voice prompts in English language
11	ROGER	OFF	Disable ROGER function. Release PTT key without ROGER audio.
		BEEP	Activate the ROGER function. Sends an end-of-transmission tone to indicate to other stations that the transmission has ended.
		TONE 1200	Activates the ROGER function. Sends the DMC1200 transmission end tone to indicate to other stations that the transmission has ended.
12	Beep	OFF	Disable key confirmation tone.
		ON	Activation key to confirm tone. Allows audible confirmation of a key press
13	BackLight	ALWAYS ON	The backlight is always on.
		5.....20	Set the backlight off time in no-operation delay time. 5-20, step value is 5.
14	Power on	PICTURE	Show preset picture when radio is on

	Image	VOLTAGE	Display battery voltage when radio is on
15	Dual Watch	OFF	Disable dual table, dual receive.
		ON	Monitor [A] and [B] at the same time. The display with the most recent activity ([A] or [B]) becomes the selected display.
16	AutoLock	OFF	Disable automatic keypad lock. Allow manual keypad lock (press and hold the  key to lock/unlock the keyboard)
		ON	When ON, the keypad will be locked if not used in 8 seconds. Pressing the  key for 2 seconds will unlock the keypad.
17	Alarm Mode	On Site	Sounds alarm through your radio speaker only
		Send Sound	Transmits a cycling tone over-the-air
		Send Code	Transmits '119' (911 in reverse) followed by the ANI code over-the-air
18	Alarm Tone	OFF	The radio speaker blocks the alarm sound.
		ON	The radio speaker sounds an alarm
19	ANI-Edit	100	View the ANI ID, and if necessary, will allow to change the ANI ID
20	Display ANI	OFF	Disable the ANI code display function
		ON	Enable ANI code display
21	DTMF-ST	OFF	No DTMF Side Tones are heard
		DT-ST	Side Tones are heard only from manually keyed DTMF codes
		ANI-ST	Side Tones are heard only from automatically keyed DTMF codes
		DT+ANI	All DTMF Side Tones are heard
22	PTT-ID	OFF	No ID is sent.
		BOT	The selected S-CODE is sent at the beginning
		EOT	The selected S-CODE is sent at the ending
		BOTH	The selected S-CODE is sent at the beginning and ending

3	Program Channel	23	PTT-DLY	100-3000ms	Signal code sending delay. PTT-ID Delay (milliseconds)
		24	ALERT	1000Hz	The following configurations will transmit accordingly: PTT + SK1 = Transmits 1000Hz Tone Burst
				1450Hz	PTT + SK1 = Transmits 1450Hz Tone Burst
				1750Hz	PTT + SK1 = Transmits 1750Hz Tone Burst
				2100Hz	PTT + SK1 = Transmits 2100Hz Tone Burst
		25	TAIL	OFF	Disable Squelch Tail Elimination.
				ON	Enable Squelch tail elimination. to prevent any squelch tails from being heard.
		26	Press SK1	FM Radio	FM Radio on/off
				SCAN	SCA on/off
				SEARCH	Search on/off
				VOX	VOX on/off
				LAMP	Flashlight on/off
				SOS	SOS on/off
		27	Reset	VFO MODE	Reset the radio's VFO menu to factory defaults (no reset for bank, scan settings)
				RESET ALL	Resets the radio to factory defaults, with some exceptions.
		1	CH.NAME	Channel 1	View channel name, allows to rename the current channel. Press the  key to switch the input method, allowing the input of letters, numbers and symbols.
		2	RX Frequency		View the current channel Receiver frequency.
		3	TX Frequency		View the current channel Transmitter frequency.
		4	Power	Selects transmitter power when in VFO/Frequency mode.	

5	Bandwidth	Wide	Wideband (25 kHz bandwidth)
		Narrow	narrowband (12.5 kHz bandwidth)
6	RX CTCSS	OFF;67-254.1	Mutes the speaker of the transceiver in the absence of a specific and continuous sub-audible signal. If the station you are listening to does not transmit this specific and continuous signal, you will not hear anything.
7	RX DCS	OFF;023N-754I	Mutes the speaker of the transceiver in the absence of a specific low-level digital signal. If the station you are listening to does not transmit this specific signal, you will not hear anything.
8	TX CTCSS	OFF;67-254	Transmits a specific and continuous sub audible signal to unlock the squelch of a distant receiver (usually a repeater).
9	TX DCS	OFF;023N-754I	Transmits a specific low-level digital signal to unlock the squelch of a distant receiver (usually a repeater).
10	Encryption	OFF	Disable encrypted mode, your conversations are not private.
		ON	Activating encryption mode ensures the privacy of your conversations. To use the Encryption function, the other part of the radio must also have Encryption activated and must be tuned on the same DCS code.
11	Signaling	1-20	Selects 1 of 20 DTMF codes. The DTMF codes are programmed with software and are up to 3 digits each.
12	CH-MDF	NAME	MR/Channel mode is displayed in NAME format. Note: NAME allows CPS program or edit in the channel name (Munu 1) .
		FREQ	MR/Channel mode is displayed in frequency format.
		CH	MR/Channel mode is displayed in CH format.
13	SP-Mute	QT	when radios is set in this mode, the monitor feature is

					activated only when the radio receives the correct CTCSS/DCS.
				QT+DTMF	with this option, the monitor is activated when the radio receives the correct CTCSS/DCS and the correct DTMF code.
				QT*DTMF	• QT*DTMF: the monitor is activated when the radio receives the correct CTCSS/DCS or the correct DTMF code.
		14	SCAN ADD	OFF	Forbid the current channel to join the scan group.
				ON	Add the current channel to the scan group.
				OFF	The [PTT] button on the channel is always allowed.
		15	Busy Lockout	ON	Disables the [PTT] button on a channel that is already in use. The transceiver will sound a beep tone and will not transmit if the [PTT] button is pressed when a channel is already in use.
		*13	OffSet		Specifies the difference between the TX and RX frequencies
		*14	Direction	None	TX = RX (simplex). Disable access to repeaters in VFO/Frequency mode
				Plus	Plus frequency shift direction. TX will be shifted higher in frequency than RX
				Minus	Minus frequency shift direction. TX will be shifted lower in frequency than RX
		16	CH_Memory	CH001-CH999	This menu is used to either create new or modify existing channels (1 through 999) so that they can be accessed from MR/Channel Mode.
		17	CH_Delete	CH001-CH999	This menu is used to delete the programmed information from the specified channel (1 through 999) so that it can either be programmed again or be left empty.
4	Wireless CPS	1	OFF		Turn off Wireless CPS and disable the Wireless programming function
		2	ON		Enable Wireless CPS to program the radio via Wireless

5	Radio Info	Radio ID\Firmware\Hardware	Displays radio ID, firmware version, hardware version. to check the radio information.
---	------------	----------------------------	--

Disclaimer

The accuracy and completeness of the contents are sought in the process of compilation, but we do not bear any responsibility for the possible errors or omissions. With the continuous development of technology, we reserve the right to change the design and specification of the product without notice. No copy, modification, translation and dissemination of this handbook may be made in any form without the prior written authorization of our department.



PO FUNG ELECTRONIC (HK) INTERNATIONAL GROUP COMPANY

Address: 3/F FULOK BLDG 131-133 WING LOK ST SHEUNG WAN, Hong Kong

[Http://www.pofungshop.com](http://www.pofungshop.com)

E-mail: sales@pofungshop.com

Print version: 5R Mini_V1.0