

Test Result

Project Number: P-CC26050246
Test Time: 2026-05-25_13.38.34

EUT Name:	Tablet	Temp.(°C):	22.4
Model Number:	P10005L	Humidity (%RH):	52
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11b CH1
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Hao Longda	Remark:	适配器: A04+数据线: A07



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	51.60	-4.87	74.0	22.40	Peak	64.37	150	Vertical	Pass
1**	2390.000	40.76	-4.87	54.0	13.24	AV	64.37	150	Vertical	Pass
2	2383.600	52.70	-4.51	74.0	21.30	Peak	0.00	150	Vertical	Pass
2**	2383.600	40.79	-4.51	54.0	13.21	AV	0.00	150	Vertical	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_13.39.48

EUT Name:	Tablet	Temp.(°C):	22.4
Model Number:	P10005L	Humidity (%RH):	52
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11b CH1
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Hao Longda	Remark:	适配器: A04+数据线: A07




No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	51.30	-4.87	74.0	22.70	Peak	360.00	150	Horizontal	Pass
1**	2390.000	41.06	-4.87	54.0	12.94	AV	360.00	150	Horizontal	Pass
2	2369.800	53.24	-4.02	74.0	20.76	Peak	302.00	150	Horizontal	Pass
2**	2369.800	41.39	-4.02	54.0	12.61	AV	302.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_13.44.27

EUT Name:	Tablet	Temp.(°C):	22.4
Model Number:	P10005L	Humidity (%RH):	52
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11b CH11
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Hao Longda	Remark:	适配器: A04+数据线: A07

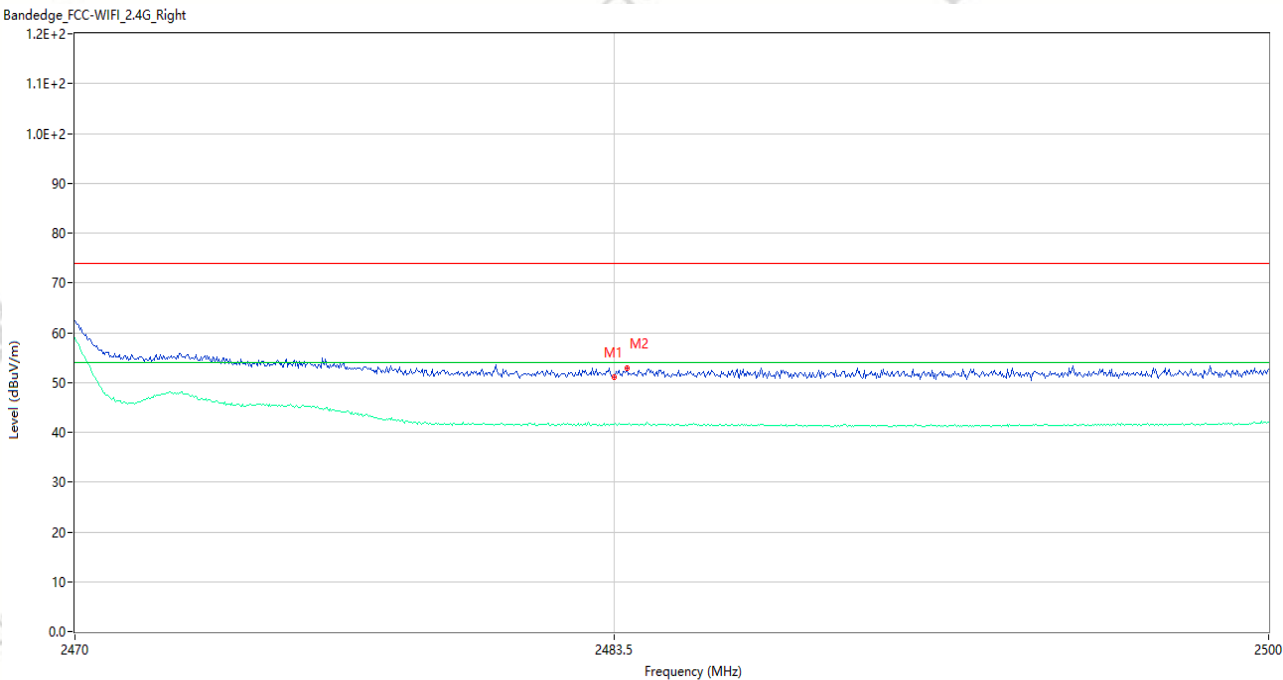


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	51.11	-3.78	74.0	22.89	Peak	352.00	150	Vertical	Pass
1**	2483.500	41.49	-3.78	54.0	12.51	AV	352.00	150	Vertical	Pass
2	2483.830	52.98	-3.78	74.0	21.02	Peak	109.00	150	Vertical	Pass
2**	2483.830	41.64	-3.78	54.0	12.36	AV	109.00	150	Vertical	Pass

Test Result

Project Number: P-CC26050246
Test Time: 2026-05-25_13.43.10

EUT Name:	Tablet	Temp.(°C):	22.4
Model Number:	P10005L	Humidity (%RH):	52
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11b CH11
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Hao Longda	Remark:	适配器: A04+数据线: A07

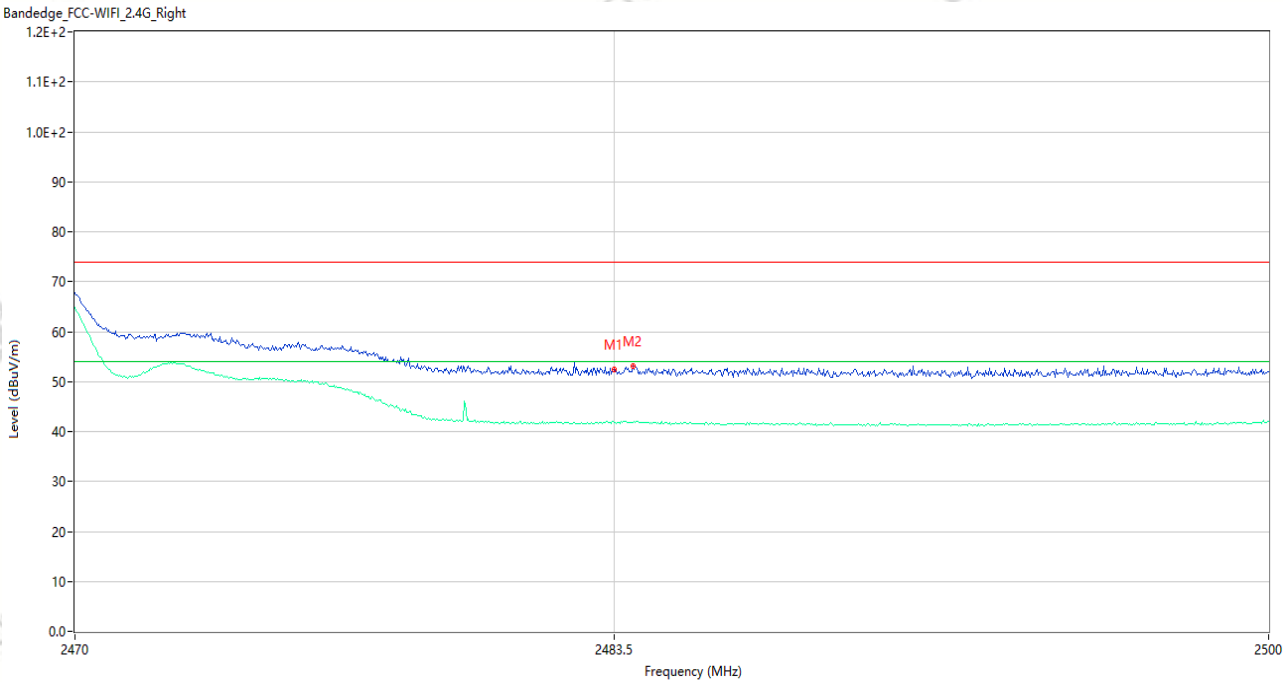

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	52.32	-3.78	74.0	21.68	Peak	360.00	150	Horizontal	Pass
1**	2483.500	41.73	-3.78	54.0	12.27	AV	360.00	150	Horizontal	Pass
2	2483.980	53.21	-3.78	74.0	20.79	Peak	260.00	150	Horizontal	Pass
2**	2483.980	41.76	-3.78	54.0	12.24	AV	260.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_13.46.58

EUT Name:	Tablet	Temp.(°C):	22.4
Model Number:	P10005L	Humidity (%RH):	52
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11g CH1
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Hao Longda	Remark:	适配器: A04+数据线: A07



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	52.75	-4.87	74.0	21.25	Peak	73.00	150	Vertical	Pass
1**	2390.000	41.42	-4.87	54.0	12.58	AV	73.00	150	Vertical	Pass
2	2379.100	52.80	-4.28	74.0	21.20	Peak	99.00	150	Vertical	Pass
2**	2379.100	41.08	-4.28	54.0	12.92	AV	99.00	150	Vertical	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_13.48.10

EUT Name:	Tablet	Temp.(°C):	22.4
Model Number:	P10005L	Humidity (%RH):	52
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11g CH1
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Hao Longda	Remark:	适配器: A04+数据线: A07



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	57.07	-4.87	74.0	16.93	Peak	352.55	150	Horizontal	Pass
1**	2390.000	43.30	-4.87	54.0	10.70	AV	352.55	150	Horizontal	Pass
2	2388.800	56.31	-4.81	74.0	17.69	Peak	342.00	150	Horizontal	Pass
2**	2388.800	42.00	-4.81	54.0	12.00	AV	342.00	150	Horizontal	Pass


Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_13.54.51

EUT Name:	Tablet	Temp.(°C):	22.4
Model Number:	P10005L	Humidity (%RH):	52
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11g CH11 P=13
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Hao Longda	Remark:	适配器: A04+数据线: A07

Bandedge_FCC-WIFI_2.4G_Right

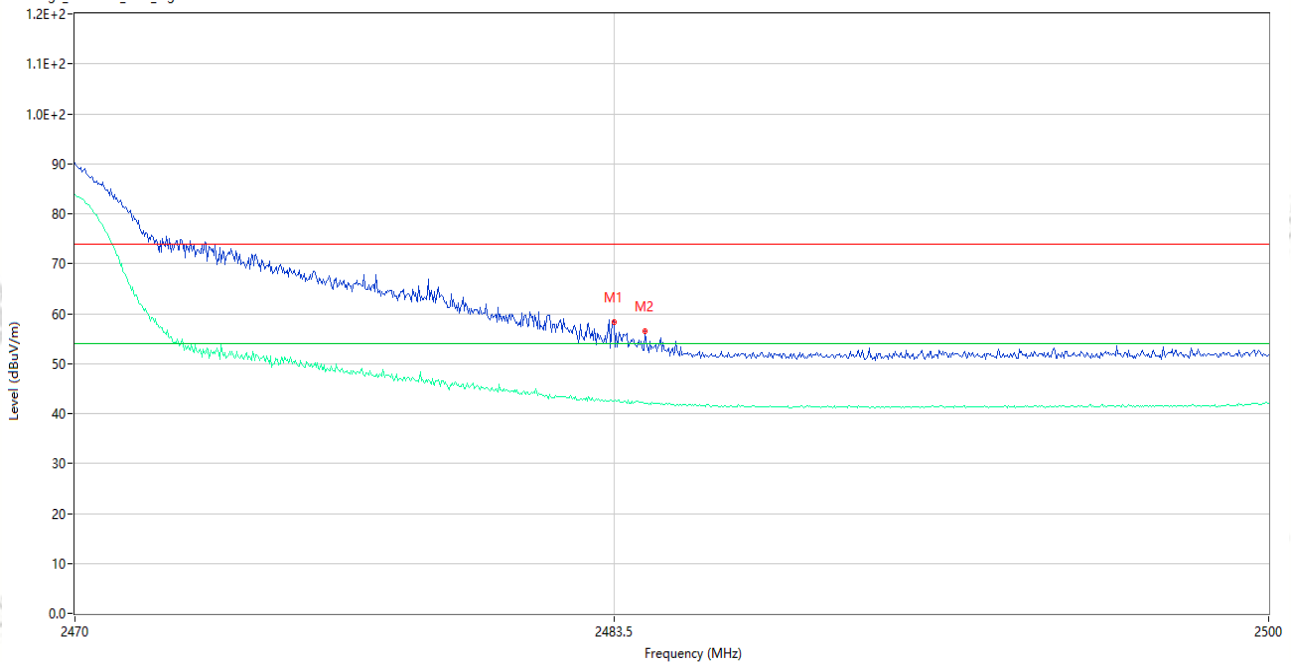

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	58.40	-3.78	74.0	15.60	Peak	11.00	150	Vertical	Pass
1**	2483.500	42.59	-3.78	54.0	11.41	AV	11.00	150	Vertical	Pass
2	2484.280	56.53	-3.78	74.0	17.47	Peak	50.00	150	Vertical	Pass
2**	2484.280	41.99	-3.78	54.0	12.01	AV	50.00	150	Vertical	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_13.56.05

EUT Name: Tablet

Temp.(°C): 22.4

Model Number: P10005L

Humidity (%RH): 52

Sample Number: CC26050193-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 2.4GWIFI 11g CH11 P=13


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Hao Longda

Remark: 适配器: A04+数据线: A07

Bandedge_FCC-WIFI_2.4G_Right

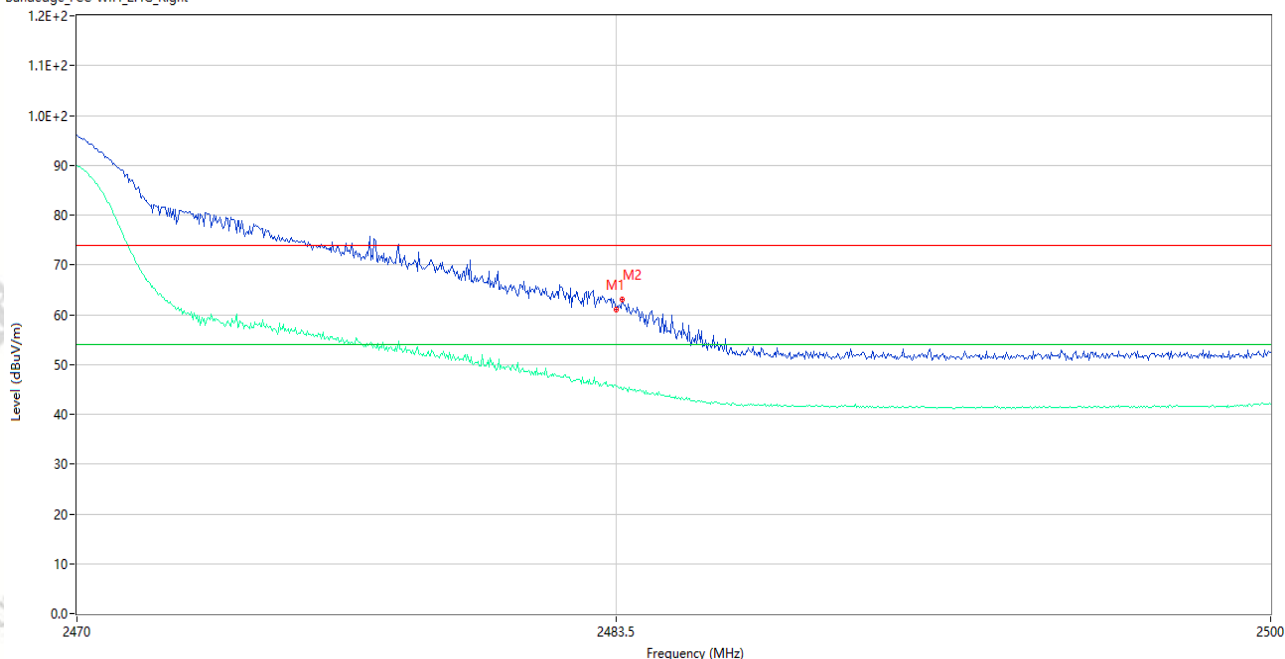


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	60.97	-3.78	74.0	13.03	Peak	347.00	150	Horizontal	Pass
1**	2483.500	45.74	-3.78	54.0	8.26	AV	347.00	150	Horizontal	Pass
2	2483.650	63.03	-3.78	74.0	10.97	Peak	353.00	150	Horizontal	Pass
2**	2483.650	45.06	-3.78	54.0	8.94	AV	353.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_14.00.08

EUT Name:	Tablet	Temp.(°C):	22.4
Model Number:	P10005L	Humidity (%RH):	52
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11n20 CH1
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Hao Longda	Remark:	适配器: A04+数据线: A07

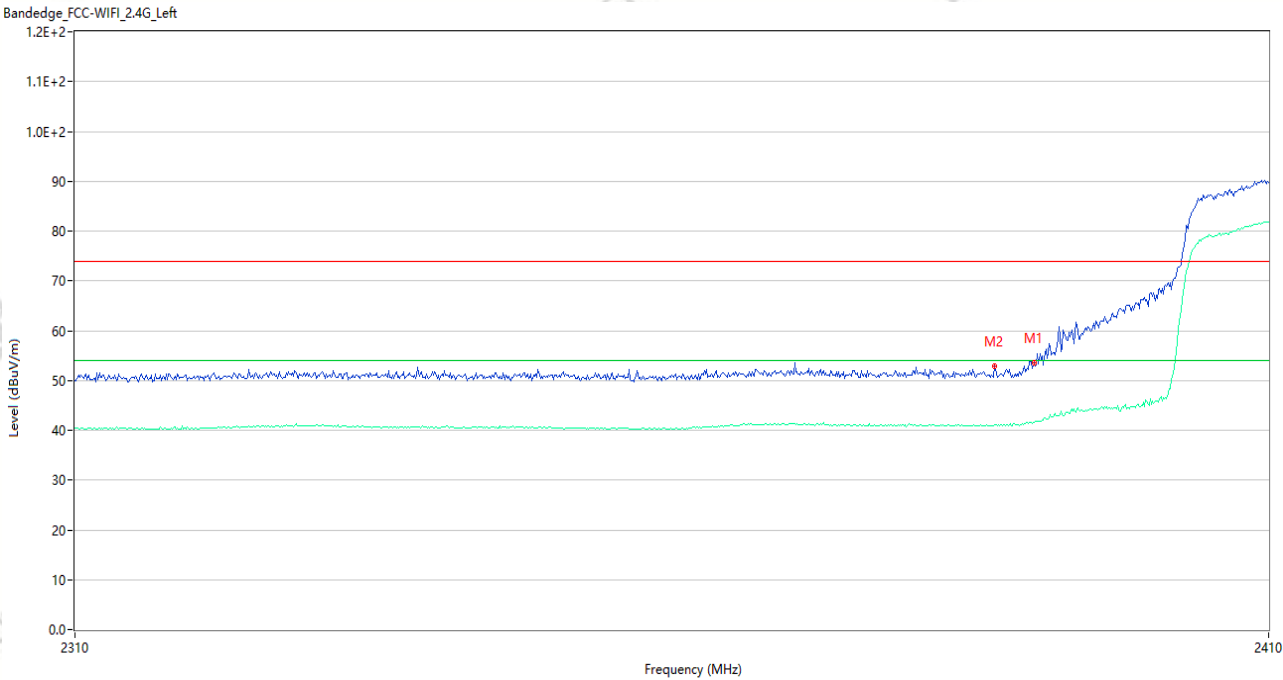

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	53.45	-4.87	74.0	20.55	Peak	29.04	150	Vertical	Pass
1**	2390.000	41.58	-4.87	54.0	12.42	AV	29.04	150	Vertical	Pass
2	2386.700	52.99	-4.68	74.0	21.01	Peak	296.00	150	Vertical	Pass
2**	2386.700	41.02	-4.68	54.0	12.98	AV	296.00	150	Vertical	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_13.58.54

EUT Name:	Tablet	Temp.(°C):	22.4
Model Number:	P10005L	Humidity (%RH):	52
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11n20 CH1
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Hao Longda	Remark:	适配器: A04+数据线: A07



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	58.22	-4.87	74.0	15.78	Peak	349.01	150	Horizontal	Pass
1**	2390.000	43.68	-4.87	54.0	10.32	AV	349.01	150	Horizontal	Pass
2	2389.500	59.15	-4.85	74.0	14.85	Peak	360.00	150	Horizontal	Pass
2**	2389.500	42.93	-4.85	54.0	11.07	AV	360.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_14.03.18

EUT Name: Tablet

Temp.(°C): 22.4

Model Number: P10005L

Humidity (%RH): 52

Sample Number: CC26050193-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 2.4GWIFI 11n20 CH11


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Hao Longda

Remark: 适配器: A04+数据线: A07

Bandedge_FCC-WIFI_2.4G_Right

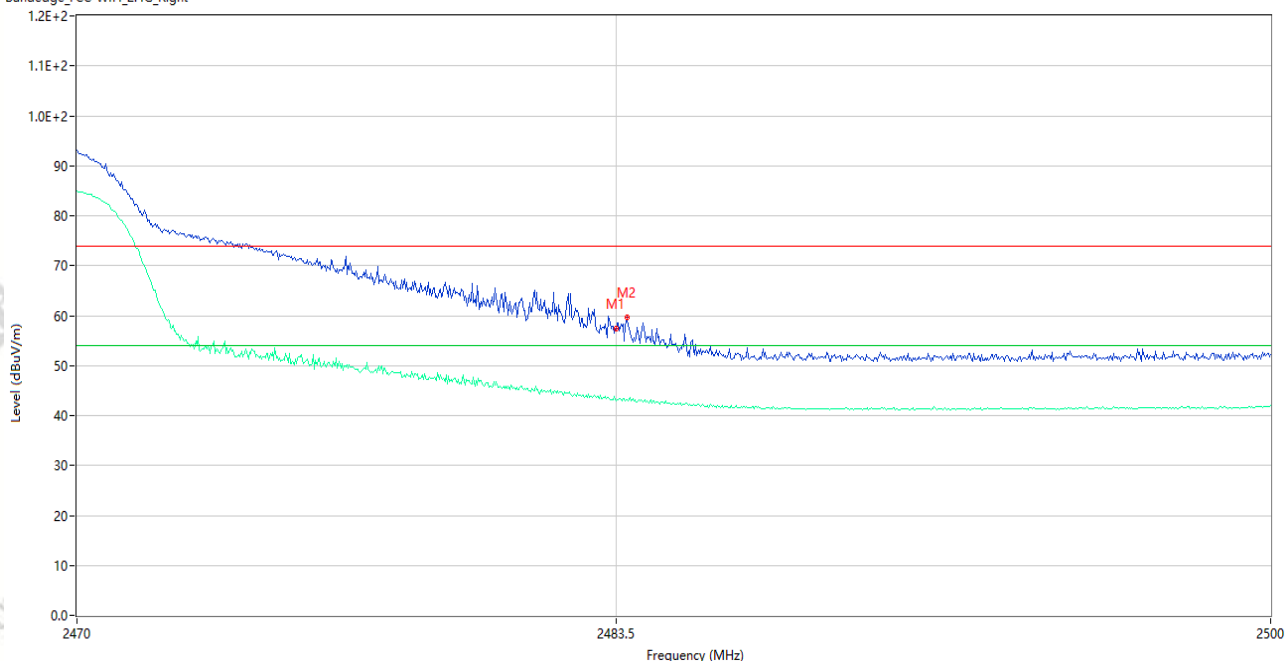


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	57.44	-3.78	74.0	16.56	Peak	21.00	150	Vertical	Pass
1**	2483.500	43.00	-3.78	54.0	11.00	AV	21.00	150	Vertical	Pass
2	2483.770	59.64	-3.78	74.0	14.36	Peak	276.00	150	Vertical	Pass
2**	2483.770	43.16	-3.78	54.0	10.84	AV	276.00	150	Vertical	Pass

Test Result

Project Number: P-CC26050246

Test Time: 2026-05-25_14.04.30

EUT Name:	Tablet	Temp.(°C):	22.4
Model Number:	P10005L	Humidity (%RH):	52
Sample Number:	CC26050193-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4GWIFI 11n20 CH11
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Hao Longda	Remark:	适配器: A04+数据线: A07

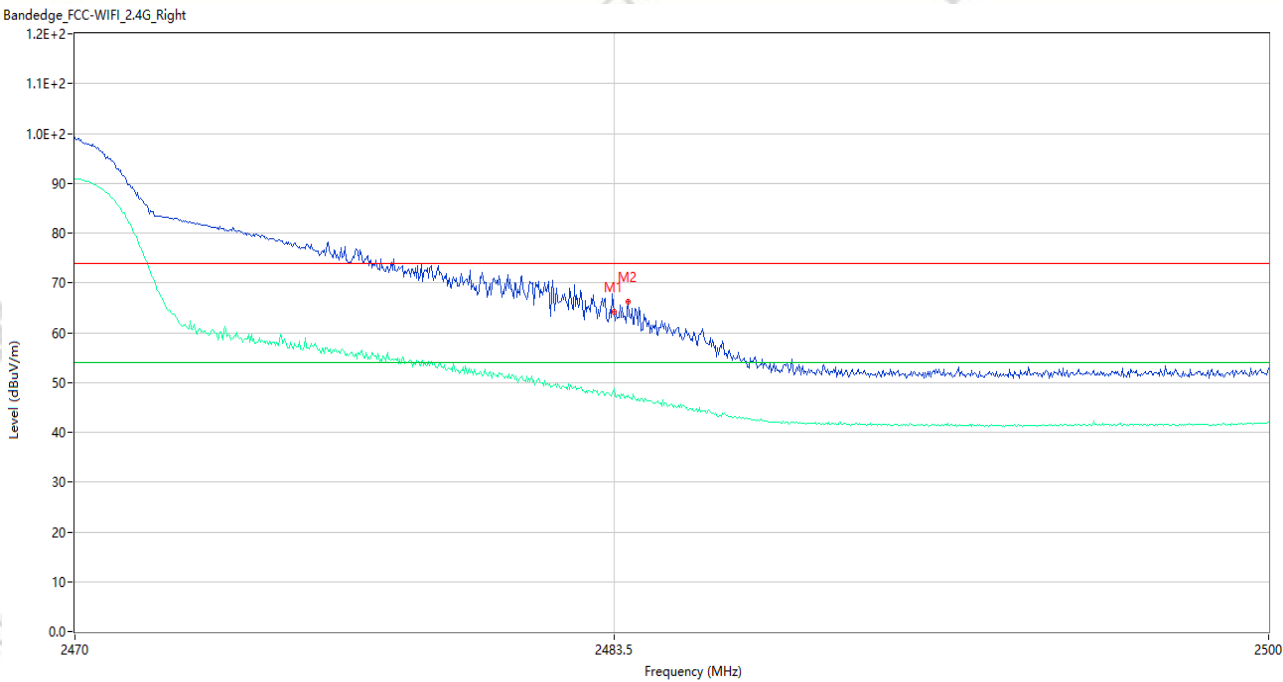

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	64.21	-3.78	74.0	9.79	Peak	0.00	150	Horizontal	Pass
1**	2483.500	48.82	-3.78	54.0	5.18	AV	0.00	150	Horizontal	Pass
2	2483.860	66.27	-3.78	74.0	7.73	Peak	348.00	150	Horizontal	Pass
2**	2483.860	47.56	-3.78	54.0	6.44	AV	348.00	150	Horizontal	Pass