



Walt Disney Parks and Resorts US, Inc.

TPv2/300-004278

FCC 15.225:2018

13.56 MHz Radio

Report # SYNA0242.4



NVLAP LAB CODE: 200629-0



This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government of the United States of America. This Report shall not be reproduced, except in full without written approval of the laboratory.

EAR-Controlled Data - This document contains technical data whose export and reexport/retransfer is subject to control by the U.S. Department of Commerce under the Export Administration Act and the Export Administration Regulations. The Department of Commerce's prior written approval may be required for the export or re-export/retransfer of such technical data to any foreign person, foreign entity or foreign organization whether in the United States or abroad.

More: <https://www.bis.doc.gov/index.php/forms-documents/regulations-docs/14-commerce-country-chart/fileT>

CERTIFICATE OF TEST

Last Date of Test: June 8, 2018
Walt Disney Parks and Resorts US, Inc.
Model: TPv2/300-004278

Radio Equipment Testing

Standards

Specification	Method
FCC 15.225:2018	ANSI C63.10:2013

Results

Method Clause	Test Description	Applied	Results	Comments
6.2	Powerline Conducted Emissions	No	N/A	Not required for evaluation of a Permissive Change due to a change of enclosure.
6.4	Field Strength of Fundamental	Yes	Pass	
6.4	Field Strength of Spurious Emissions Less Than 30 MHz	Yes	Pass	
6.5	Field Strength of Spurious Emissions Greater Than 30 MHz	Yes	Pass	
6.8	Frequency Stability	No	N/A	Not required for evaluation of a Permissive Change due to a change of enclosure.

Deviations From Test Standards

None

Approved By:



Rod Munro, Operations Manager

Product compliance is the responsibility of the client; therefore, the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. The results of this test pertain only to the sample(s) tested. The specific description is noted in each of the individual sections of the test report supporting this certificate of test. This report reflects only those tests from the referenced standards shown in the certificate of test. It does not include inspection or verification of labels, identification, marking or user information.

REVISION HISTORY



Revision Number	Description	Date	Page Number
00	None		

ACCREDITATIONS AND AUTHORIZATIONS



United States

FCC - Designated by the FCC as a Telecommunications Certification Body (TCB). Certification chambers, Open Area Test Sites, and conducted measurement facilities are listed with the FCC.

A2LA - Accredited by A2LA to ISO / IEC 17065 as a product certifier. This allows Element to certify transmitters to FCC and IC specifications.

NVLAP - Each laboratory is accredited by NVLAP to ISO 17025

Canada

ISED - Recognized by Innovation, Science and Economic Development Canada as a Certification Body (CB). Certification chambers and Open Area Test Sites are filed with ISED.

European Union

European Commission – Within Element, we have a EU Notified Body validated for the EMCD and RED Directives.

Australia/New Zealand

ACMA - Recognized by ACMA as a CAB for the acceptance of test data.

Korea

MSIT / RRA - Recognized by KCC's RRA as a CAB for the acceptance of test data.

Japan

VCCI - Associate Member of the VCCI. Conducted and radiated measurement facilities are registered.

Taiwan

BSMI – Recognized by BSMI as a CAB for the acceptance of test data.

NCC - Recognized by NCC as a CAB for the acceptance of test data.

Singapore

IDA – Recognized by IDA as a CAB for the acceptance of test data.

Israel

MOC – Recognized by MOC as a CAB for the acceptance of test data.

Hong Kong

OFCA – Recognized by OFCA as a CAB for the acceptance of test data.

Vietnam

MIC – Recognized by MIC as a CAB for the acceptance of test data.

SCOPE

For details on the Scopes of our Accreditations, please visit:


<http://portlandcustomer.element.com/ts/scope/scope.htm>

<http://gsi.nist.gov/global/docs/cabs/designations.html>

FACILITIES



California Labs OC01-17 41 Tesla Irvine, CA 92618 (949) 861-8918	Minnesota Labs MN01-10 9349 W Broadway Ave. Brooklyn Park, MN 55445 (612)-638-5136	New York Labs NY01-04 4939 Jordan Rd. Elbridge, NY 13060 (315) 554-8214	Oregon Labs EV01-12 6775 NE Evergreen Pkwy #400 Hillsboro, OR 97124 (503) 844-4066	Texas Labs TX01-09 3801 E Plano Pkwy Plano, TX 75074 (469) 304-5255	Washington Labs NC01-05 19201 120 th Ave NE Bothell, WA 98011 (425)984-6600
NVLAP					
NVLAP Lab Code: 200676-0	NVLAP Lab Code: 200881-0	NVLAP Lab Code: 200761-0	NVLAP Lab Code: 200630-0	NVLAP Lab Code:201049-0	NVLAP Lab Code: 200629-0
Innovation, Science and Economic Development Canada					
2834B-1, 2834B-3	2834E-1, 2834E-3	N/A	2834D-1, 2834D-2	2834G-1	2834F-1
BSMI					
SL2-IN-E-1154R	SL2-IN-E-1152R	N/A	SL2-IN-E-1017	SL2-IN-E-1158R	SL2-IN-E-1153R
VCCI					
A-0029	A-0109	N/A	A-0108	A-0201	A-0110
Recognized Phase I CAB for ACMA, BSMI, IDA, KCC/RRR, MIC, MOC, NCC, OFCA					
US0158	US0175	N/A	US0017	US0191	US0157

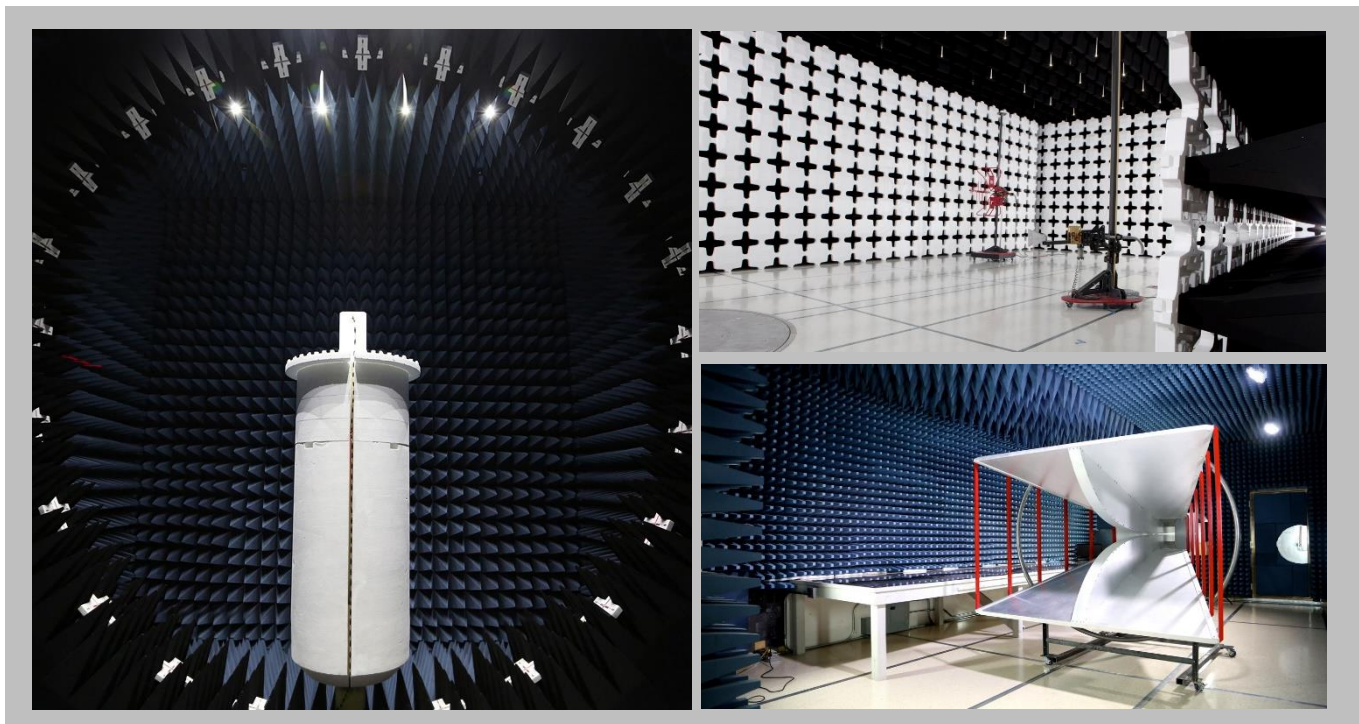

MEASUREMENT UNCERTAINTY



Measurement Uncertainty

When a measurement is made, the result will be different from the true or theoretically correct value. The difference is the result of tolerances in the measurement system that cannot be completely eliminated. To the extent that technology allows us, it has been our aim to minimize this error. Measurement uncertainty is a statistical expression of measurement error qualified by a probability distribution.

A measurement uncertainty estimation has been performed for each test per our internal quality document QM205.4.6. The estimation is used to compare the measured result with its "true" or theoretically correct value. The expanded measurement uncertainty (K=2) can be found included as part of the applicable test description page. Our measurement data meets or exceeds the measurement uncertainty requirements of the applicable specification; therefore, the test data can be compared directly to the specification limit to determine compliance. The calculations for estimating measurement uncertainty are based upon ETSI TR 100 028 (or CISPR 16-4-2 as applicable), and are available upon request.

The following table represents the Measurement Uncertainty (MU) budgets for each of the tests that may be contained in this report.

Test	+ MU	- MU
Frequency Accuracy (Hz)	0.0007%	-0.0007%
Amplitude Accuracy (dB)	1.2 dB	-1.2 dB
Conducted Power (dB)	0.3 dB	-0.3 dB
Radiated Power via Substitution (dB)	0.7 dB	-0.7 dB
Temperature (degrees C)	0.7°C	-0.7°C
Humidity (% RH)	2.5% RH	-2.5% RH
Voltage (AC)	1.0%	-1.0%
Voltage (DC)	0.7%	-0.7%
Field Strength (dB)	0	0
AC Powerline Conducted Emissions (dB)	0	0

Test Setup Block Diagrams

Antenna Port Conducted Measurements



Near Field Test Fixture Measurements



Spurious Radiated Emissions



PRODUCT DESCRIPTION

Client and Equipment Under Test (EUT) Information

Company Name:	Walt Disney Parks and Resorts US, Inc.
Address:	PO Box 1000
City, State, Zip:	Lake Buena Vista, Florida 32830
Test Requested By:	Brian Piquette of Synapse Product Development on behalf of Walt Disney Parks and Resorts US, Inc.
Model:	TPv2/300-004278
First Date of Test:	June 7, 2018
Last Date of Test:	June 8, 2018
Receipt Date of Samples:	June 4, 2018
Equipment Design Stage:	Production
Equipment Condition:	No Damage
Purchase Authorization:	Verified

Information Provided by the Party Requesting the Test

Functional Description of the EUT:
Multi-ticket media reader with Ethernet network interface Device containing an HF RFID reader (ISO 14443), UHF RFID Reader (ISO 18000), BT/BLE Radio, and proprietary 2.4GHz DTS radio.
Testing Objective:
To demonstrate compliance to FCC Part 15.225 specifications for a Permissive Change under FCC ID: 2AJS4-TP-R1G2.

CONFIGURATIONS



Configuration SYNA0242- 5

Software/Firmware Running during test	
Description	Version
UHF Tool	N/A

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
Access Point	Walt Disney Parks and Resorts US, Inc.	TPv2/300-004278	SN05

Remote Equipment Outside of Test Setup Boundary			
Description	Manufacturer	Model/Part Number	Serial Number
Laptop PC	Apple	MacBook Pro	None
DC Power Supply	Mastech	HY3003D-2	None

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
AC Power	No	1.8m	No	AC Mains	DC Power Supply
DC Power	No	3.0m	No	DC Power Supply	Access Point
Ethernet	No	5.0m	No	Access Point	Laptop PC

CONFIGURATIONS



Configuration SYNA0242- 8

Software/Firmware Running during test	
Description	Version
rfidtest	N/A

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
Access Point	Walt Disney Parks and Resorts US, Inc.	TPv2/300-004278	SN05

Remote Equipment Outside of Test Setup Boundary			
Description	Manufacturer	Model/Part Number	Serial Number
Laptop PC	Apple	MacBook Pro	None
DC Power Supply	Mastech	HY3003D-2	None

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
AC Power	No	1.8m	No	AC Mains	DC Power Supply
DC Power	No	3.0m	No	DC Power Supply	Access Point
Ethernet	No	5.0m	No	Access Point	Laptop PC

MODIFICATIONS



Equipment Modifications

Item	Date	Test	Modification	Note	Disposition of EUT
1	6/7/2018	Field Strength of Fundamental	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
2	6/7/2018	Field Strength of Spurious Emissions Less than 30 MHz	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT was taken home by the client before the next scheduled test.
3	6/8/2018	Field Strength of Spurious Emissions Greater than 30 MHz	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	Scheduled testing was completed.

FIELD STRENGTH OF FUNDAMENTAL



PSA-ESCI 2018.05.04

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

MODES OF OPERATION

Continuously Transmitting RFID, 13.56 MHz, Default Power Max Power Setting

POWER SETTINGS INVESTIGATED

24 VDC

CONFIGURATIONS INVESTIGATED

SYNA0242 - 8

FREQUENCY RANGE INVESTIGATED

Start Frequency 13.11 MHz Stop Frequency 14.01 MHz

SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Analyzer - Spectrum Analyzer	Agilent	E4440A	AFE	24-Jun-2017	12 mo
Cable	Element	NC01 Mag Field Loop Cable	NC6	4-May-2018	12 mo
Antenna - Loop	EMCO	6502	AZC	5-Jun-2017	24 mo

MEASUREMENT BANDWIDTHS

Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
0.01 - 0.15	1.0	0.2	0.2
0.15 - 30.0	10.0	9.0	9.0
30.0 - 1000	100.0	120.0	120.0
Above 1000	1000.0	N/A	1000.0

TEST DESCRIPTION

The antennas to be used with the EUT were tested. The EUT was continuously transmitting while set to the channel specified.

The fundamental carrier of the EUT was maximized by rotating the EUT on a turntable, adjusting the position of the EUT and EUT antenna in three orthogonal axis, and adjusting the measurement antenna height and polarization (per ANSI C63.10). A calibrated active loop antenna was used for this test in order to provide sufficient measurement sensitivity. The center of the loop antenna was maintained at 1m above the ground plane during the testing.

Measurements were made with the required detectors and annotated on the data for each individual point using the following annotation:

QP = Quasi-Peak Detector

PK = Peak Detector

AV = RMS Detector

As outlined in 15.209(e), 15.31(f)(2), and RSS-GEN, 6.4, measurements may be performed at a distance closer than what is specified with the limit. The limit at the specified distance is shown on the data sheet. Measurements are made at a closer distance and the data is adjusted using a distance correction factor of 40dB/decade for comparison to the limit.



FIELD STRENGTH OF FUNDAMENTAL


EmiRS 2018.05.07

PSA-ESCI 2018.05.04

Work Order:	SYNA0242	Date:	7-Jun-2018	
Project:	None	Temperature:	22.5 °C	
Job Site:	NC01	Humidity:	44.3% RH	
Serial Number:	SN05	Barometric Pres.:	1019 mbar	
EUT:	TPv2/300-004278			
Configuration:	8			
Customer:	Walt Disney Parks and Resorts US, Inc.			
Attendees:	Reily Blackner			
EUT Power:	24 VDC			
Operating Mode:	Continuously Transmitting RFID, 13.56 MHz, Default Power Max Power Setting			
Deviations:	None			
Comments:	None			

Test Specifications	Test Method
FCC 15.225:2018	ANSI C63.10:2013

Run #	68	Test Distance (m)	3	Antenna Height	1 (m)	Results	Pass
-------	----	-------------------	---	----------------	-------	---------	------

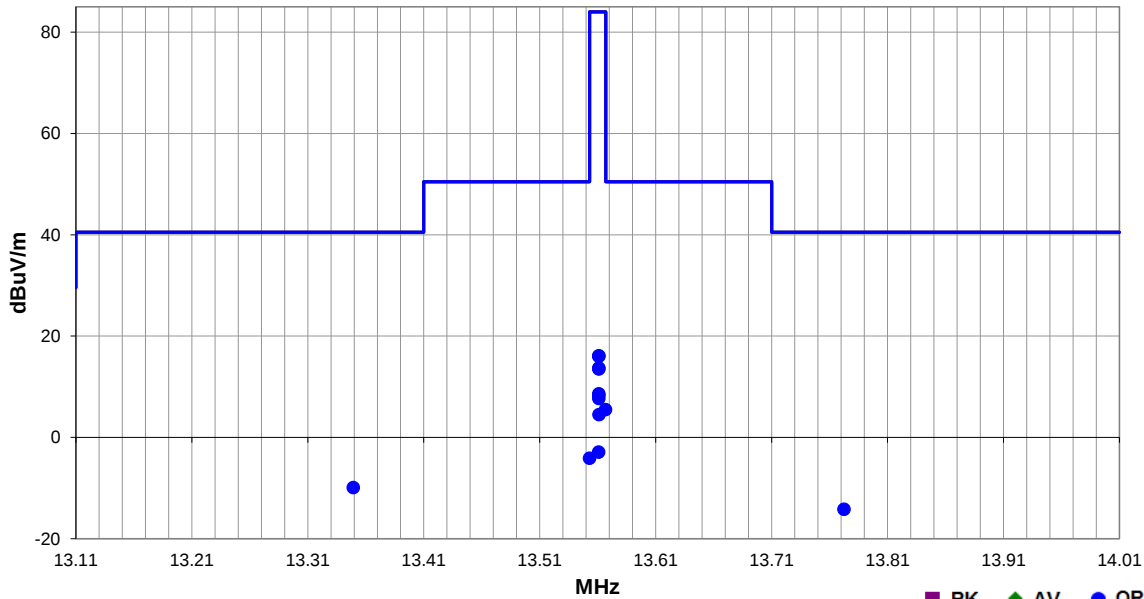

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
13.567	33.7	11.8	1.0	12.0	3.0	0.0	QP	-40.0	5.5	50.5	-45.0	EUT Normal, Ant Perp to GND, Para to EUT
13.349	18.2	11.9	1.0	32.0	3.0	0.0	QP	-40.0	-9.9	40.5	-50.4	EUT Normal, Ant Perp to GND, Para to EUT
13.553	24.1	11.8	1.0	12.0	3.0	0.0	QP	-40.0	-4.1	50.5	-54.6	EUT Normal, Ant Perp to GND, Para to EUT
13.772	13.9	11.9	1.0	41.0	3.0	0.0	QP	-40.0	-14.2	40.5	-54.7	EUT Normal, Ant Perp to GND, Para to EUT
13.561	44.3	11.8	1.0	17.0	3.0	0.0	QP	-40.0	16.1	84.0	-67.9	EUT Normal, Ant Perp to GND, Para to EUT
13.561	44.2	11.8	1.0	14.0	3.0	0.0	QP	-40.0	16.0	84.0	-68.0	EUT on Side, Ant Perp to GND, Para to EUT
13.561	41.9	11.8	1.0	93.0	3.0	0.0	QP	-40.0	13.7	84.0	-70.3	EUT Normal, Ant Perp to GND, Perp to EUT
13.561	41.7	11.8	1.0	104.0	3.0	0.0	QP	-40.0	13.5	84.0	-70.5	EUT on Side, Ant Perp to GND, Perp to EUT
13.561	36.8	11.8	1.0	347.0	3.0	0.0	QP	-40.0	8.6	84.0	-75.4	EUT Normal, Ant Para to GND, Perp to EUT
13.561	36.5	11.8	1.0	97.0	3.0	0.0	QP	-40.0	8.3	84.0	-75.7	EUT on Back, Ant Para to GND, Perp to EUT
13.561	35.9	11.8	1.0	342.0	3.0	0.0	QP	-40.0	7.7	84.0	-76.3	EUT on Side, Ant Para to GND, Perp to EUT
13.561	32.7	11.8	1.0	144.0	3.0	0.0	QP	-40.0	4.5	84.0	-79.5	EUT on Back, Ant Perp to GND, Para to EUT
13.561	25.3	11.8	1.0	52.0	3.0	0.0	QP	-40.0	-2.9	84.0	-86.9	EUT on Back, Ant Perp to GND, Perp to EUT

FIELD STRENGTH OF SPURIOUS EMISSIONS LESS THAN 30 MHz



PSA-ESCI 2018.05.04

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

MODES OF OPERATION

Continuously Transmitting RFID, 13.56 MHz, Default Power Max Power Setting

POWER SETTINGS INVESTIGATED

24 VDC

CONFIGURATIONS INVESTIGATED

SYNA0242 - 8

FREQUENCY RANGE INVESTIGATED

Start Frequency 10 kHz Stop Frequency 30 MHz

SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Analyzer - Spectrum Analyzer	Agilent	E4440A	AFE	24-Jun-2017	12 mo
Cable	Element	NC01 Mag Field Loop Cable	NC6	4-May-2018	12 mo
Antenna - Loop	EMCO	6502	AZC	5-Jun-2017	24 mo

MEASUREMENT BANDWIDTHS

Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
0.01 - 0.15	1.0	0.2	0.2
0.15 - 30.0	10.0	9.0	9.0
30.0 - 1000	100.0	120.0	120.0
Above 1000	1000.0	N/A	1000.0

TEST DESCRIPTION

The antennas to be used with the EUT were tested. The EUT was continuously transmitting while set to the channel specified.

For each configuration, the spectrum was scanned throughout the specified range as part of the exploratory investigation of the emissions. These "pre-scans" are not included in the report. Final measurements on individual emissions were then made and included in this test report.

The individual emissions from the EUT were maximized by rotating the EUT on a turntable, adjusting the position of the EUT and EUT antenna in three orthogonal axis if required, and adjusting the measurement antenna height and polarization (per ANSI C63.10). An active loop antenna was used for this test in order to provide sufficient measurement sensitivity.

Measurements were made with the required detectors and annotated on the data for each individual point using the following annotation:

QP = Quasi-Peak Detector

PK = Peak Detector

AV = RMS Detector

If there are no detectable emissions above the noise floor, the data included may show noise floor measurements for reference only.

Measurements at the edges of the allowable band may be presented in an alternative method as provided for in the ANSI C63.10 Marker-Delta method. This method involves performing an in-band fundamental measurement followed by a screen capture of the fundamental and out-of-band emission using reduced measurement instrumentation bandwidths. The amplitude delta measured on this screen capture is applied to the fundamental emission value to show the out-of-band emission level as applied to the limit.

As outlined in 15.209(e), 15.31(f)(2), and RSS-GEN, 6.4, measurements may be performed at a distance closer than what is specified with the limit. The limit at the specified distance is shown on the data sheet. Measurements are made at a closer distance and the data is adjusted using a distance correction factor of 40dB/decade for comparison to the limit.

FIELD STRENGTH OF SPURIOUS EMISSIONS LESS THAN 30 MHz




EmiRS 2018.05.07

PSA-ESCI 2018.05.04

Work Order:	SYNA0242	Date:	7-Jun-2018	
Project:	None	Temperature:	22.5 °C	
Job Site:	NC01	Humidity:	44.3% RH	
Serial Number:	SN05	Barometric Pres.:	1019 mbar	
Tested by: Richard Mellroth				
EUT:	TPv2/300-004278			
Configuration:	8			
Customer:	Walt Disney Parks and Resorts US, Inc.			
Attendees:	Reily Blackner			
EUT Power:	24 VDC			
Operating Mode:	Continuously Transmitting RFID, 13.56 MHz, Default Power Max Power Setting			
Deviations:	None			
Comments:	None			

Test Specifications	Test Method
FCC 15.225:2018	ANSI C63.10:2013

Run #	69	Test Distance (m)	3	Antenna Height	1 (m)	Results	Pass
-------	----	-------------------	---	----------------	-------	---------	------

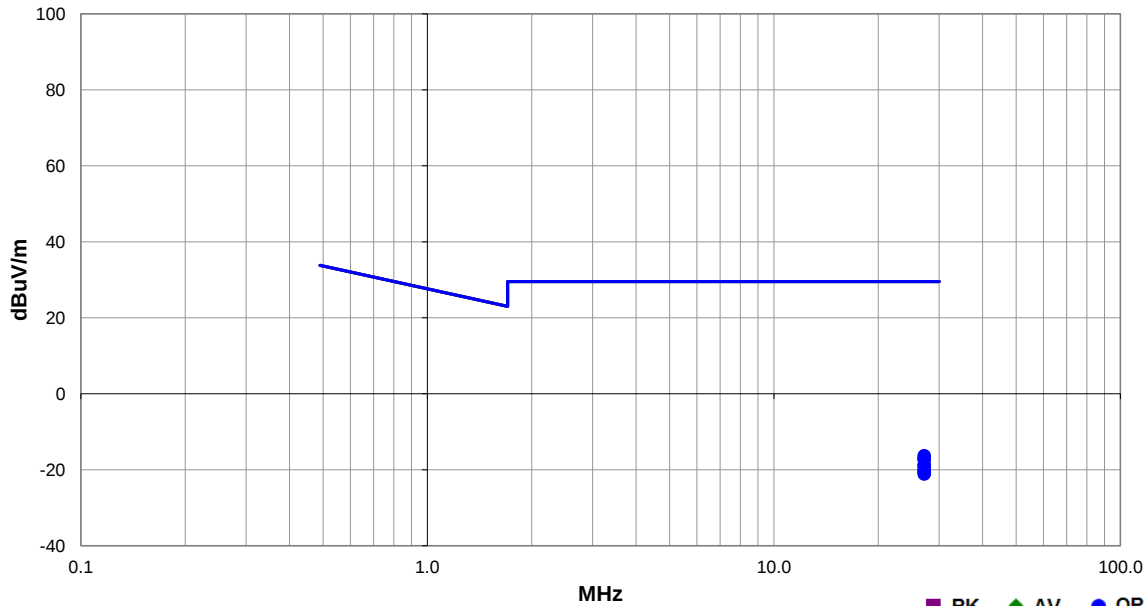

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
27.160	13.1	10.6	1.0	190.0	3.0	0.0	QP	-40.0	-16.3	29.5	-45.8	EUT on Side, Ant Perp to GND, Perp to EUT
27.159	12.3	10.6	1.0	355.0	3.0	0.0	QP	-40.0	-17.1	29.5	-46.6	EUT Normal, Ant Perp to GND, Perp to EUT
27.160	12.1	10.6	1.0	265.0	3.0	0.0	QP	-40.0	-17.3	29.5	-46.8	EUT on Back, Ant Perp to GND, Perp to EUT
27.160	10.7	10.6	1.0	65.0	3.0	0.0	QP	-40.0	-18.7	29.5	-48.2	EUT on Side, Ant Para to GND, Perp to EUT
27.160	10.4	10.6	1.0	0.0	3.0	0.0	QP	-40.0	-19.0	29.5	-48.5	EUT Normal, Ant Para to GND, Perp to EUT
27.160	9.5	10.6	1.0	322.0	3.0	0.0	QP	-40.0	-19.9	29.5	-49.4	EUT on Back, Ant Para to GND, Perp to EUT
27.160	8.9	10.6	1.0	174.0	3.0	0.0	QP	-40.0	-20.5	29.5	-50.0	EUT Normal, Ant Perp to GND, Para to EUT
27.159	8.9	10.6	1.0	185.0	3.0	0.0	QP	-40.0	-20.5	29.5	-50.0	EUT on Back, Ant Perp to GND, Para to EUT
27.160	8.3	10.6	1.0	353.0	3.0	0.0	QP	-40.0	-21.1	29.5	-50.6	EUT on Side, Ant Perp to GND, Para to EUT

FIELD STRENGTH OF SPURIOUS EMISSIONS GREATER THAN 30 MHz



PSA-ESCI 2018.05.04

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

MODES OF OPERATION

Continuously Transmitting RFID, 13.56 MHz, Default Power Max Power Setting

POWER SETTINGS INVESTIGATED

24 VDC

CONFIGURATIONS INVESTIGATED

SYNA0242 - 5

FREQUENCY RANGE INVESTIGATED

Start Frequency 30 MHz Stop Frequency 140 MHz

SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Analyzer - Spectrum Analyzer	Agilent	E4440A	AFE	24-Jun-2017	12 mo
Antenna - Biconilog	Teseq	CBL 6141B	AYL	11-Aug-2017	24 mo
Amplifier - Pre-Amplifier	Miteq	AM-1616-1000	PAB	11-Jul-2017	12 mo
Cable	Northwest EMC	Bilog Cables	NC1	11-Jul-2017	12 mo

MEASUREMENT BANDWIDTHS

Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
0.01 - 0.15	1.0	0.2	0.2
0.15 - 30.0	10.0	9.0	9.0
30.0 - 1000	100.0	120.0	120.0
Above 1000	1000.0	N/A	1000.0

TEST DESCRIPTION

The antennas to be used with the EUT were tested. The EUT was transmitting while set at the operating channel.

For each configuration, the spectrum was scanned throughout the specified range as part of the exploratory investigation of the emissions. These “pre-scans” are not included in the report. Final measurements on individual emissions were then made and included in this test report.

The individual emissions from the EUT were maximized by rotating the EUT on a turntable, adjusting the position of the EUT and EUT antenna in three orthogonal axis, and adjusting the measurement antenna height and polarization (per ANSI C63.10). A preamp and high pass filter (and notch filter) were used for this test in order to provide sufficient measurement sensitivity.

Measurements were made with the required detectors and annotated on the data for each individual point using the following annotation:

QP = Quasi-Peak Detector

PK = Peak Detector

AV = RMS Detector

Measurements were made to satisfy the specific requirements of the test specification for out of band emissions as well as the restricted band requirements.

If there are no detectable emissions above the noise floor, the data included may show noise floor measurements for reference only.

Measurements at the edges of the allowable band may be presented in an alternative method as provided for in the ANSI C63.10 Marker-Delta method. This method involves performing an in-band fundamental measurement followed by a screen capture of the fundamental and out-of-band emission using reduced measurement instrumentation bandwidths. The amplitude delta measured on this screen capture is applied to the fundamental emission value to show the out-of-band emission level as applied to the limit.

FIELD STRENGTH OF SPURIOUS EMISSIONS GREATER THAN 30 MHz




EmiRS 2018.05.07

PSA-ESCI 2018.05.04

Work Order:	SYNA0242	Date:	8-Jun-2018	
Project:	None	Temperature:	22.5 °C	
Job Site:	NC01	Humidity:	44.4% RH	
Serial Number:	SN05	Barometric Pres.:	1020 mbar	
EUT:	TPv2/300-004278			
Configuration:	5			
Customer:	Walt Disney Parks and Resorts US, Inc.			
Attendees:	Reily Blackner			
EUT Power:	24 VDC			
Operating Mode:	Continuously Transmitting RFID, 13.56 MHz, Default Power Max Power Setting			
Deviations:	None			
Comments:	None			

Test Specifications	Test Method
FCC 15.225:2018	ANSI C63.10:2013

Run #	70	Test Distance (m)	3	Antenna Height(s)	1 to 4(m)	Results	Pass
-------	----	-------------------	---	-------------------	-----------	---------	------

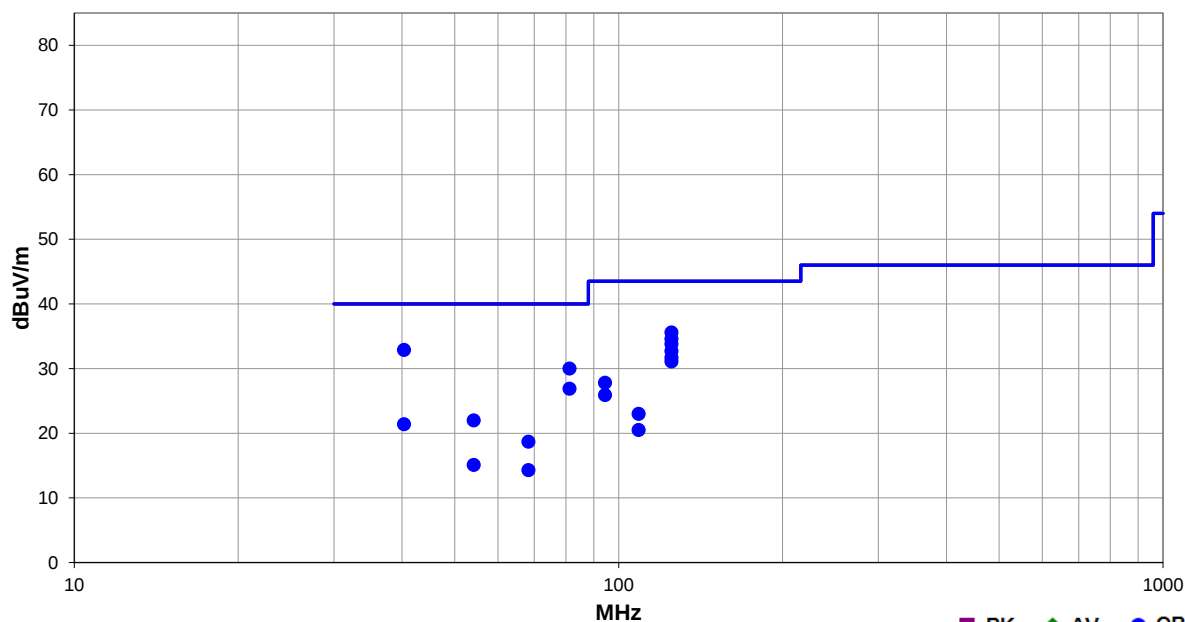

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
40.348	29.4	3.5	1.0	267.0	3.0	0.0	Vert	QP	0.0	32.9	40.0	-7.1	EUT Normal
125.014	37.2	-1.6	2.6	98.0	3.0	0.0	Horz	QP	0.0	35.6	43.5	-7.9	EUT Normal
125.014	36.2	-1.6	1.0	203.0	3.0	0.0	Vert	QP	0.0	34.6	43.5	-8.9	EUT Normal
125.019	35.4	-1.6	2.4	109.0	3.0	0.0	Horz	QP	0.0	33.8	43.5	-9.7	EUT on Side
81.215	36.5	-6.5	1.0	214.0	3.0	0.0	Vert	QP	0.0	30.0	40.0	-10.0	EUT Normal
125.019	34.3	-1.6	2.5	99.0	3.0	0.0	Horz	QP	0.0	32.7	43.5	-10.8	EUT on Back
125.019	33.3	-1.6	1.0	192.0	3.0	0.0	Vert	QP	0.0	31.7	43.5	-11.8	EUT on Side
125.019	32.7	-1.6	1.5	12.0	3.0	0.0	Vert	QP	0.0	31.1	43.5	-12.4	EUT on Back
81.214	33.4	-6.5	3.9	122.0	3.0	0.0	Horz	QP	0.0	26.9	40.0	-13.1	EUT Normal
94.393	32.6	-4.8	1.0	234.0	3.0	0.0	Vert	QP	0.0	27.8	43.5	-15.7	EUT Normal
94.390	30.7	-4.8	3.1	318.0	3.0	0.0	Horz	QP	0.0	25.9	43.5	-17.6	EUT Normal
54.178	24.6	-2.6	1.0	37.0	3.0	0.0	Vert	QP	0.0	22.0	40.0	-18.0	EUT Normal
40.346	17.9	3.5	1.0	289.0	3.0	0.0	Horz	QP	0.0	21.4	40.0	-18.6	EUT Normal
108.818	25.9	-2.9	1.0	25.0	3.0	0.0	Vert	QP	0.0	23.0	43.5	-20.5	EUT Normal
68.244	25.0	-6.3	1.0	174.0	3.0	0.0	Vert	QP	0.0	18.7	40.0	-21.3	EUT Normal
108.825	23.4	-2.9	2.4	272.0	3.0	0.0	Horz	QP	0.0	20.5	43.5	-23.0	EUT Normal
54.163	17.7	-2.6	3.7	254.0	3.0	0.0	Horz	QP	0.0	15.1	40.0	-24.9	EUT Normal
68.247	20.6	-6.3	3.0	166.0	3.0	0.0	Horz	QP	0.0	14.3	40.0	-25.7	EUT Normal