




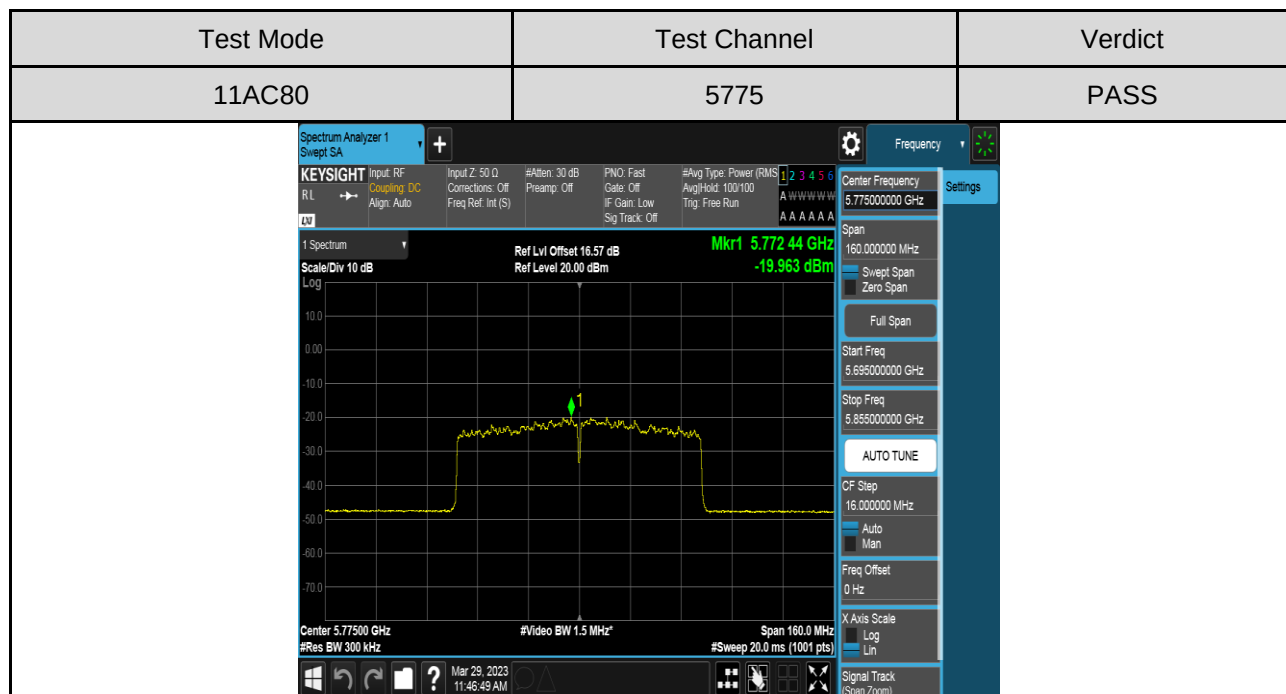
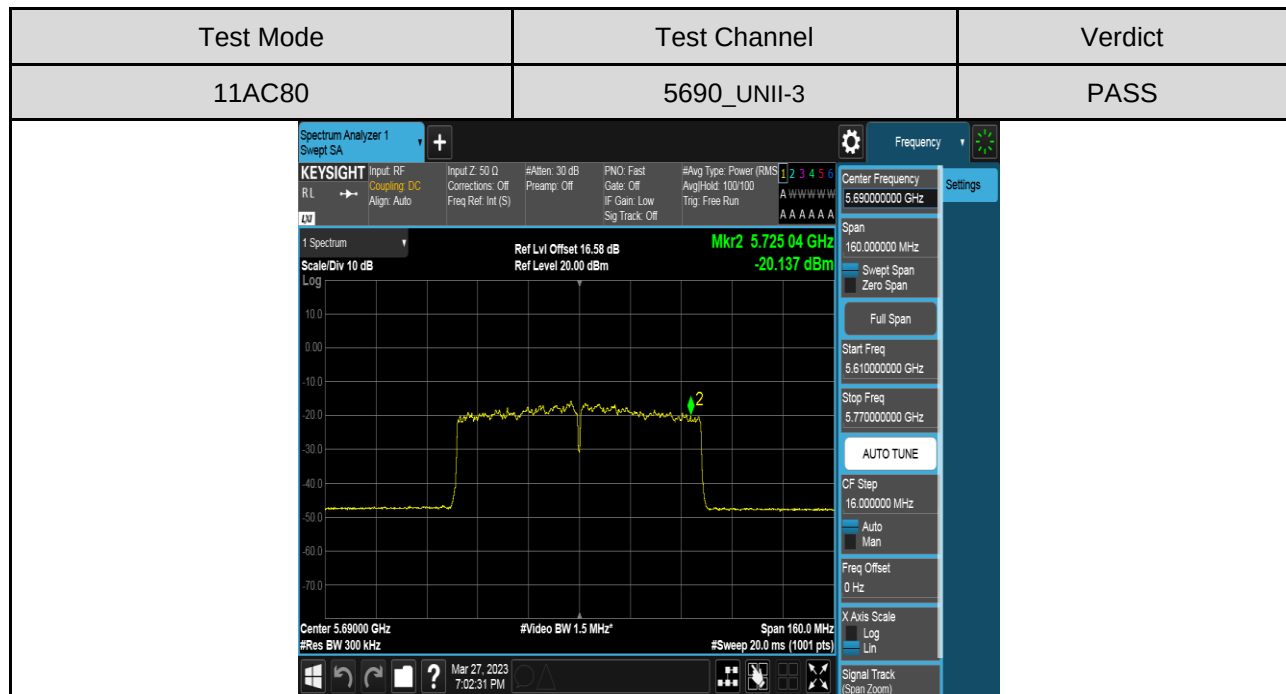
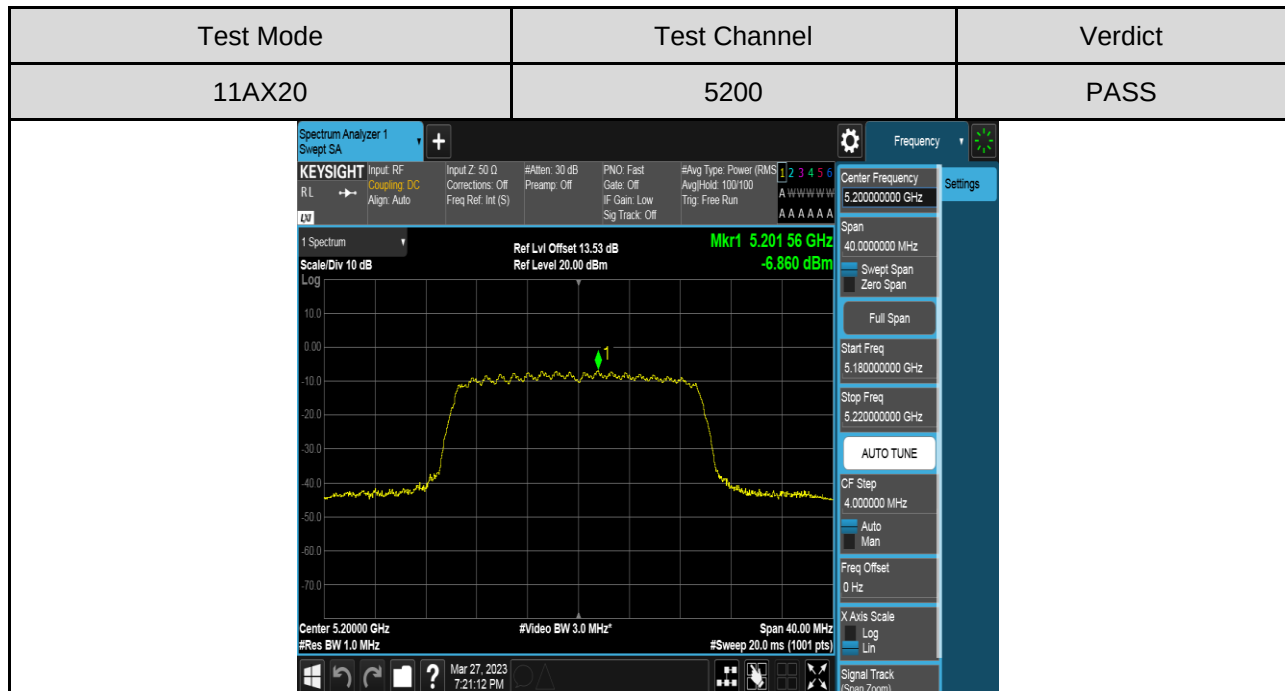
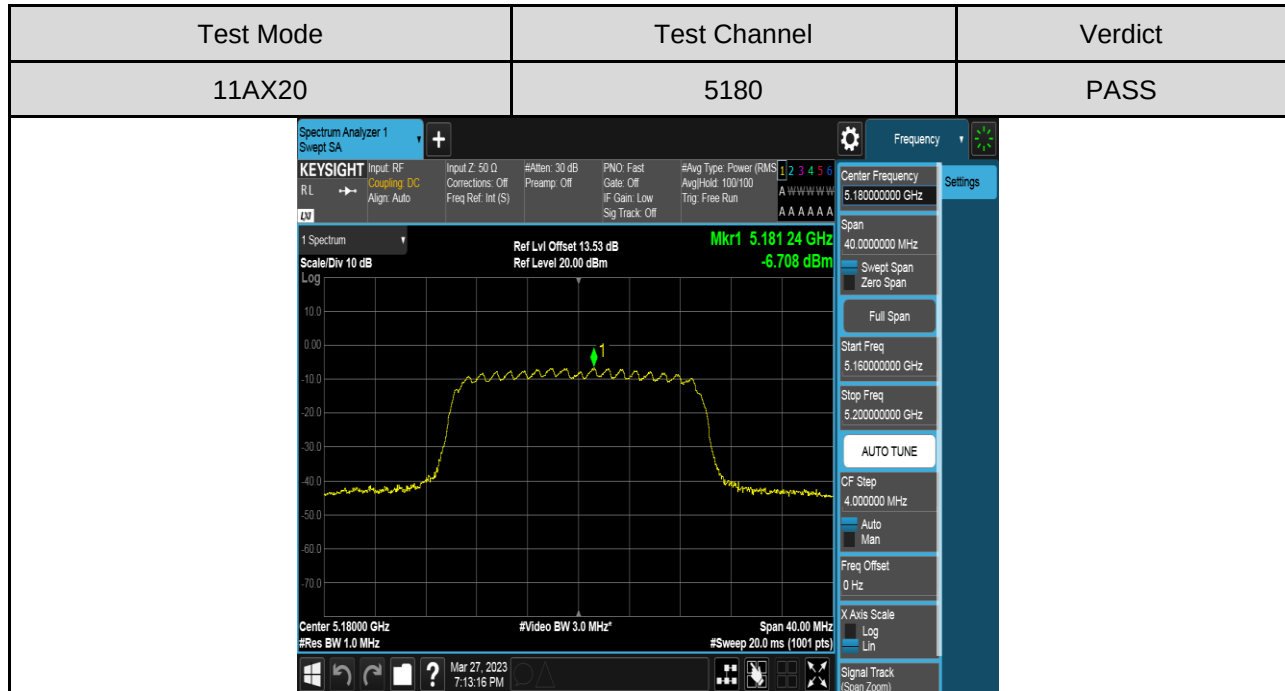
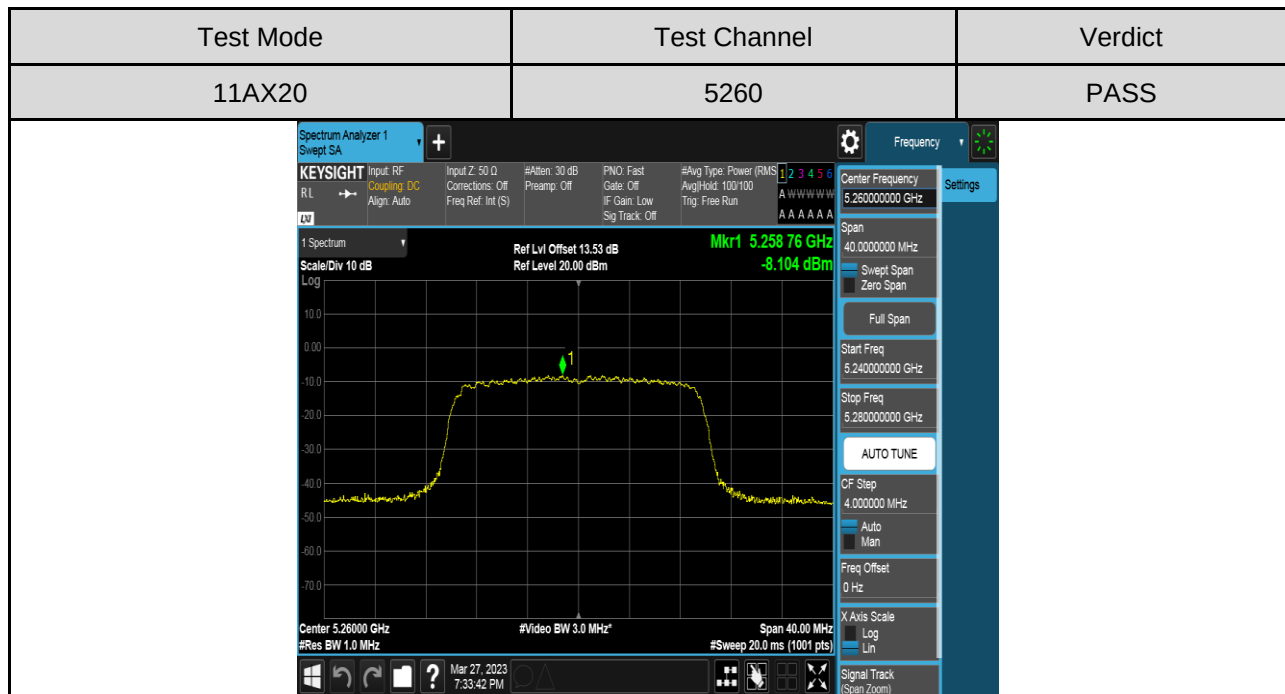



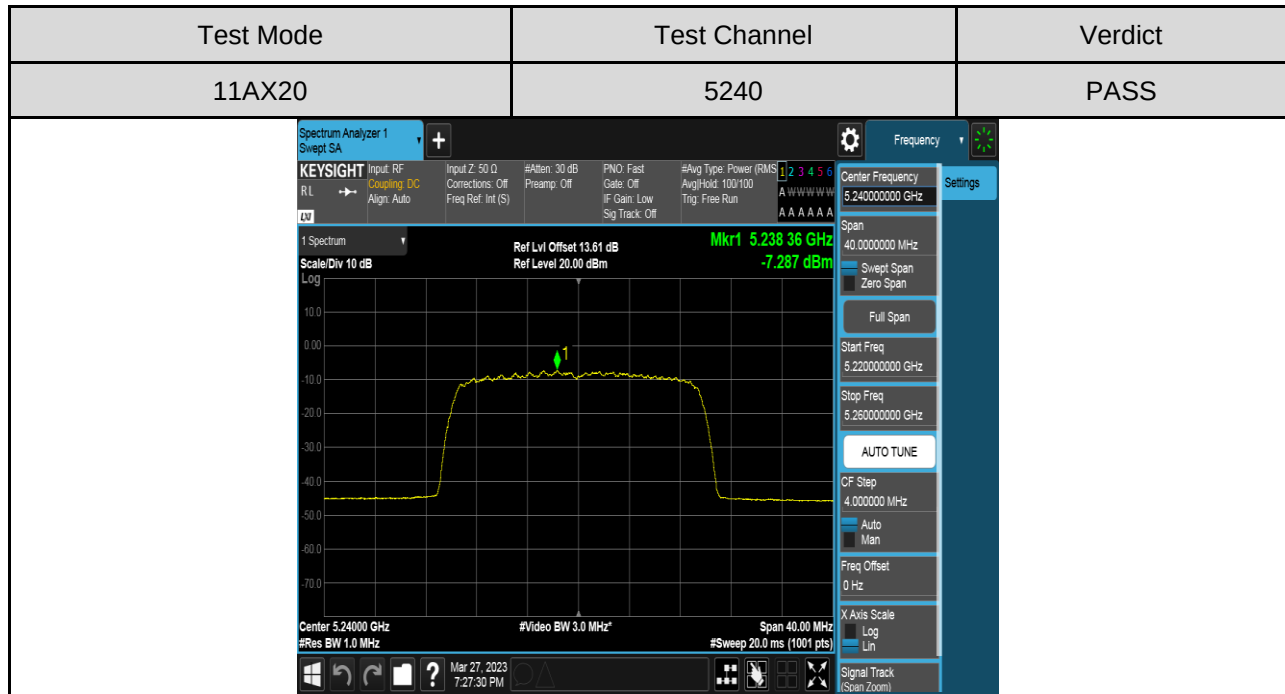



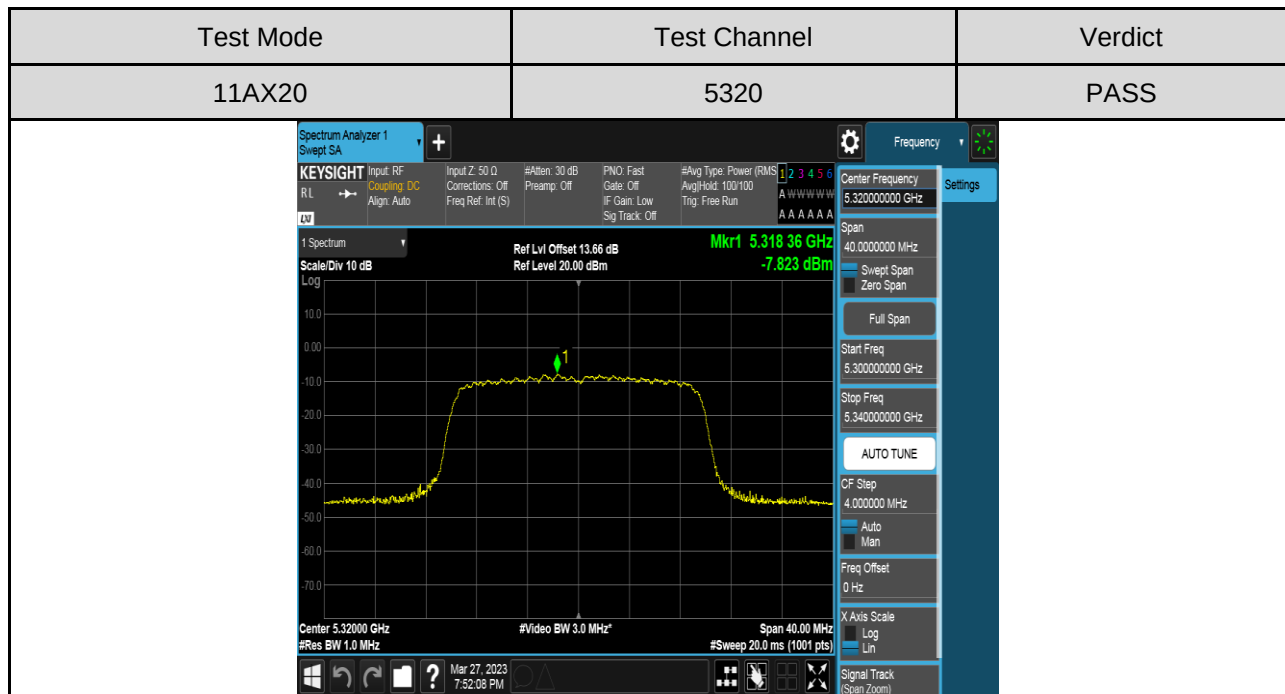



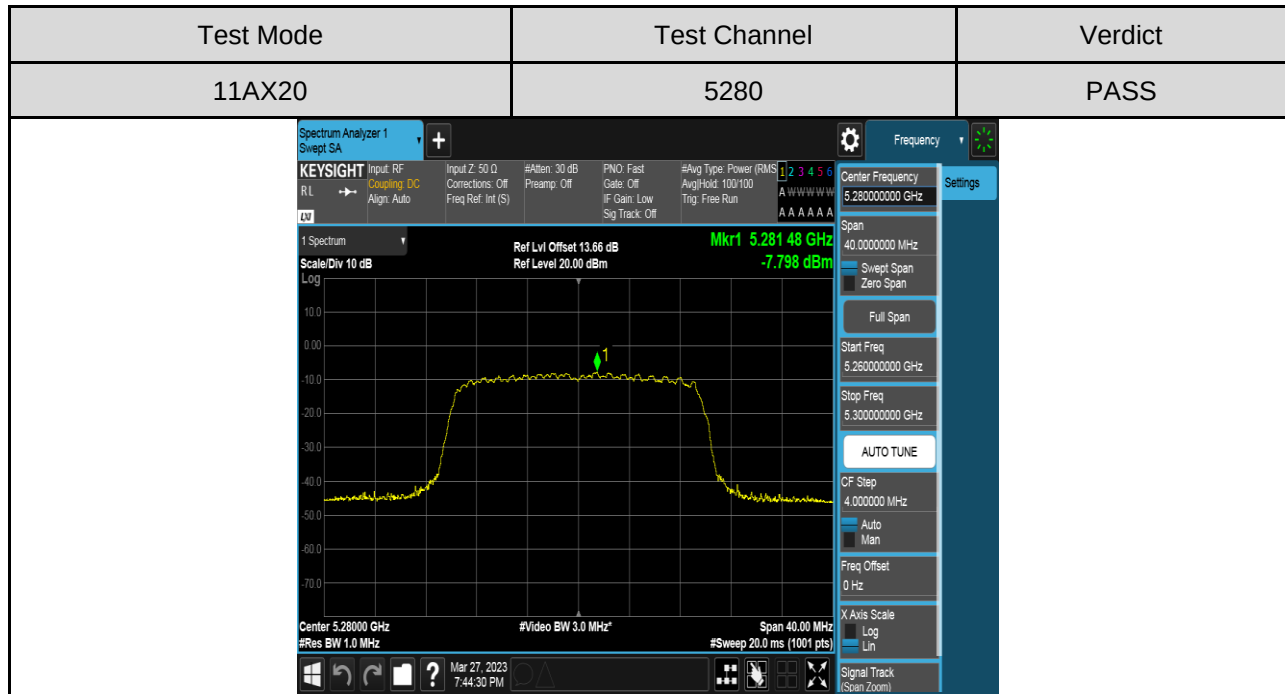



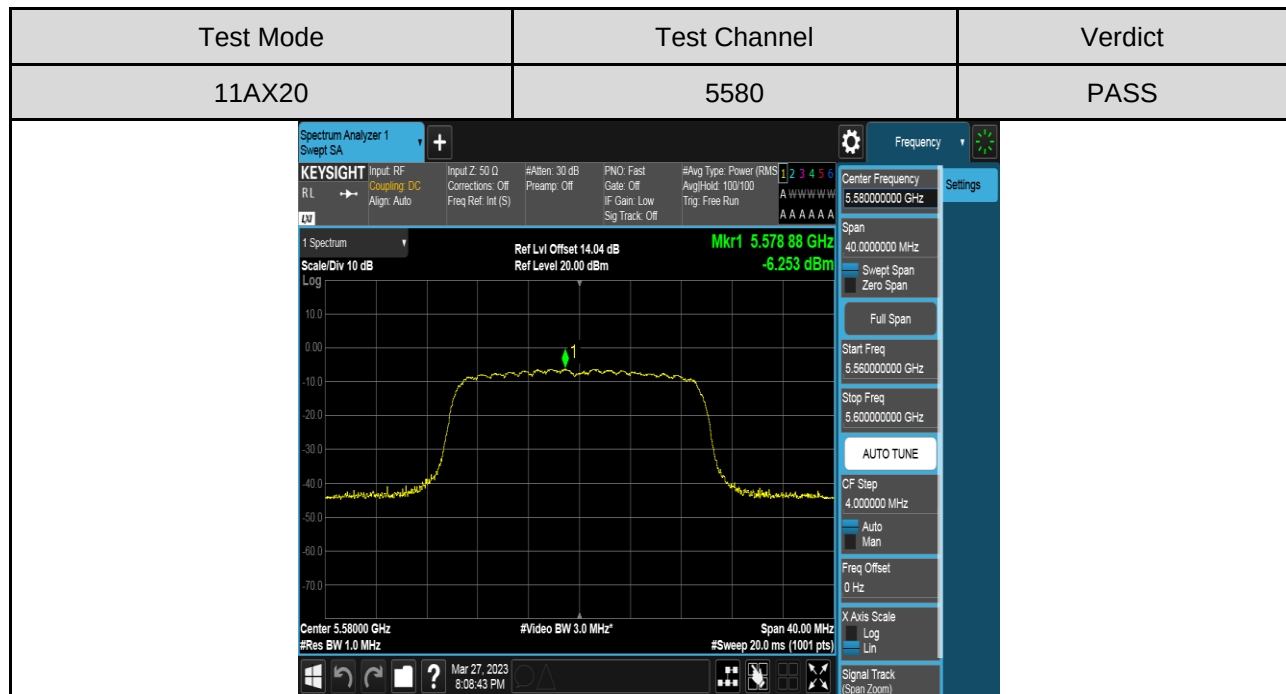



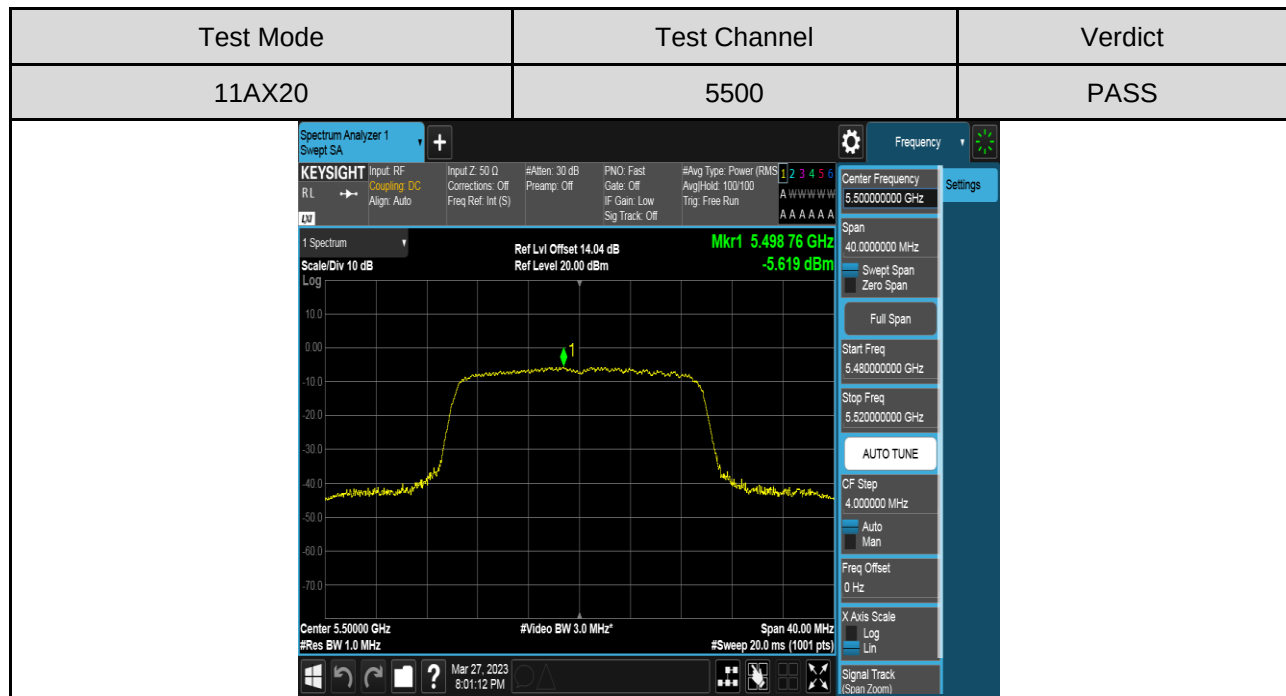


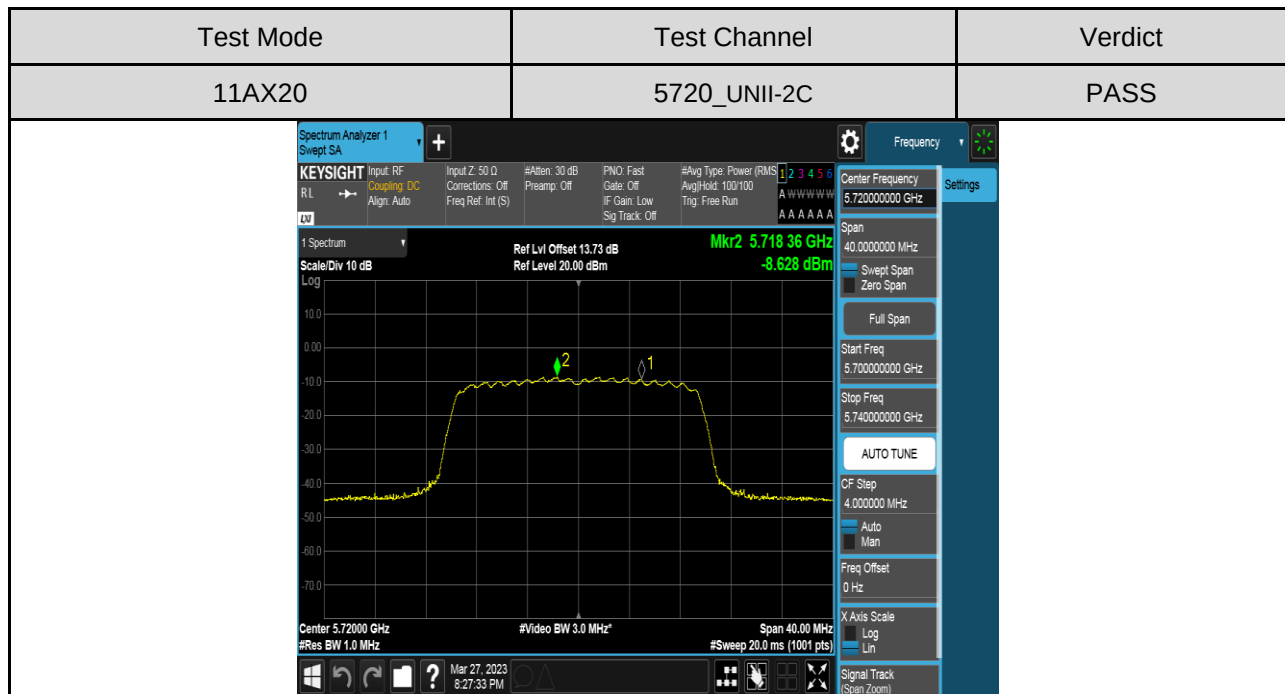
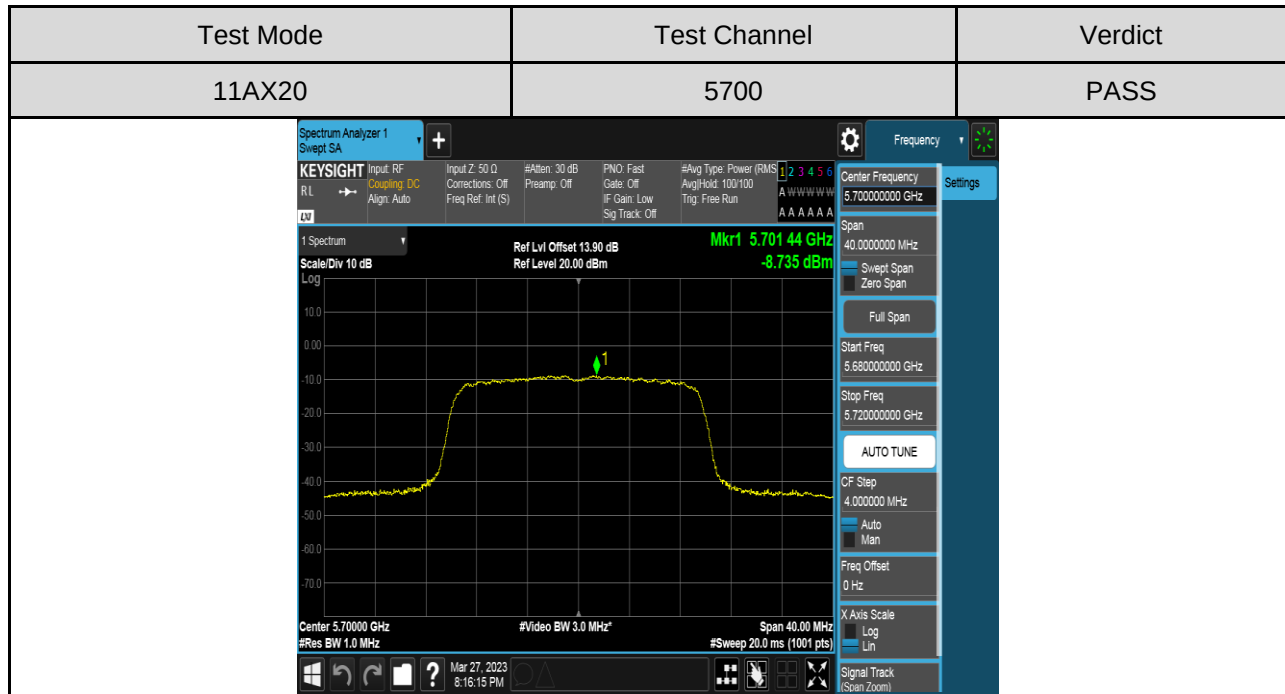


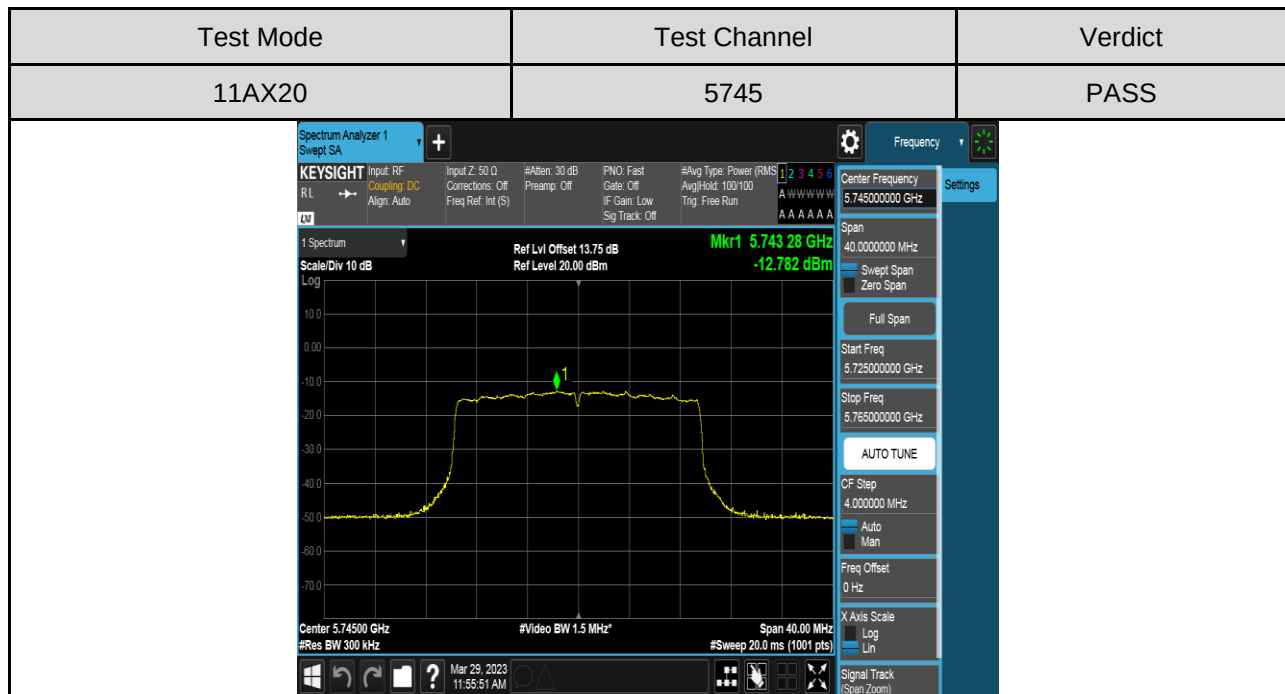
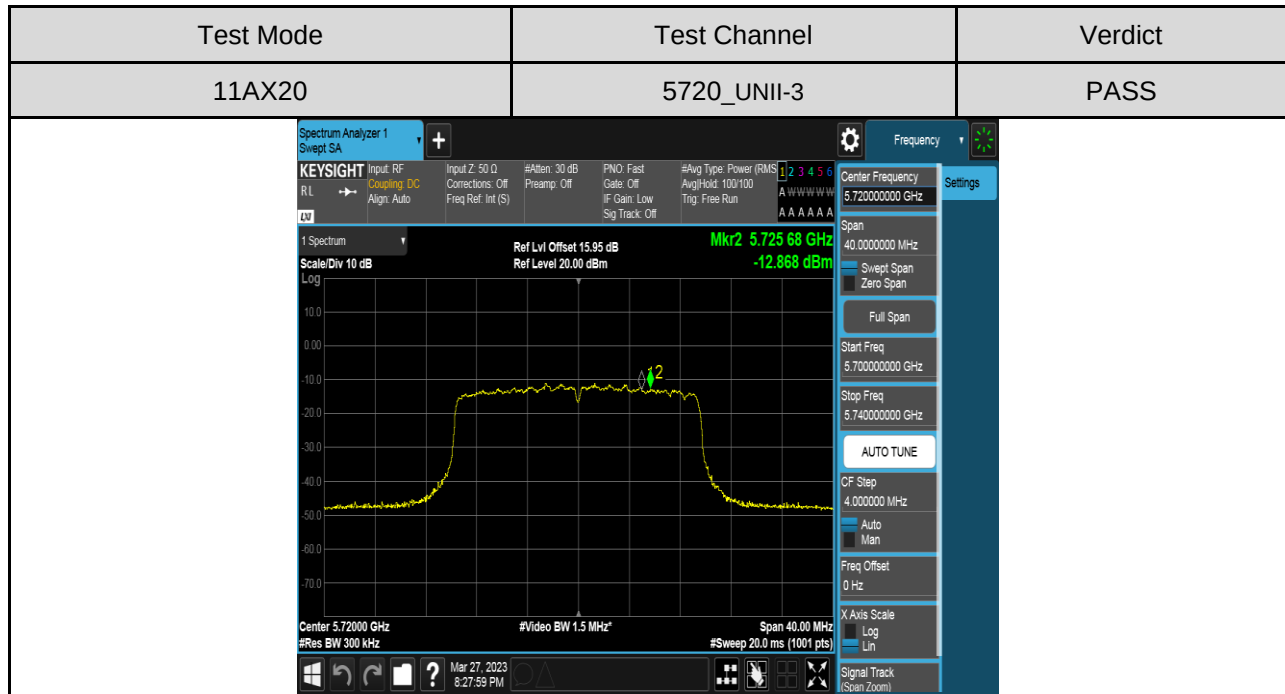


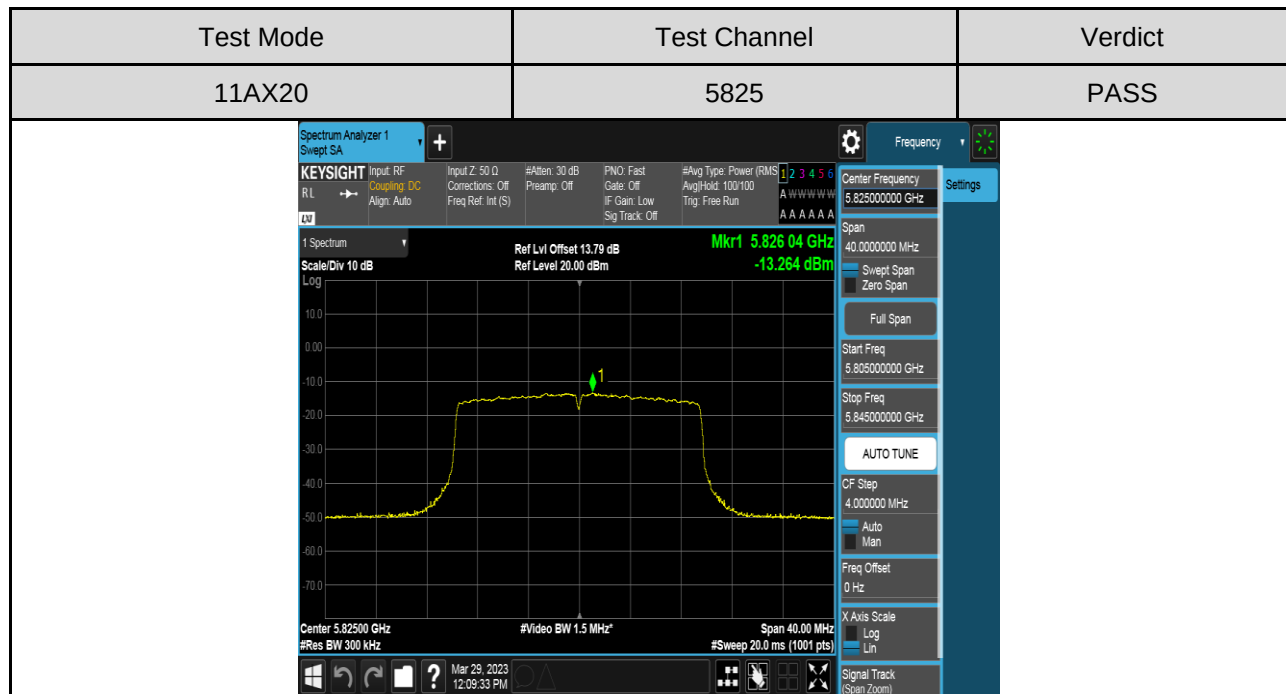
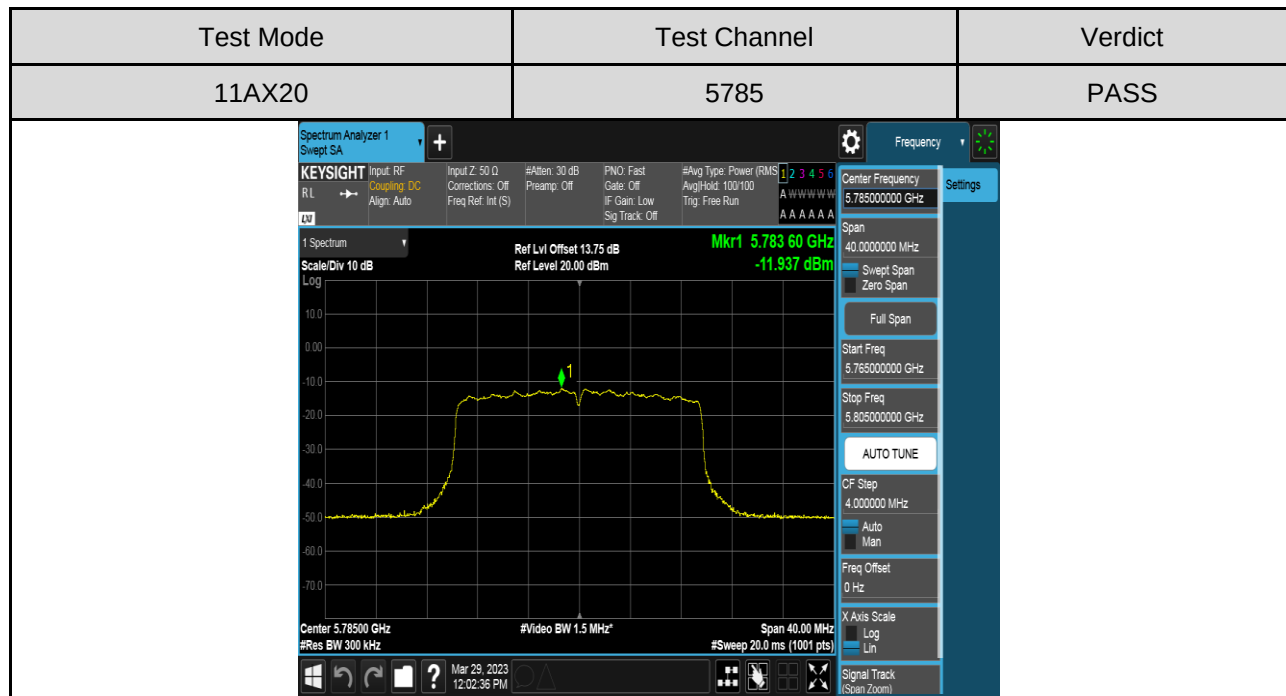


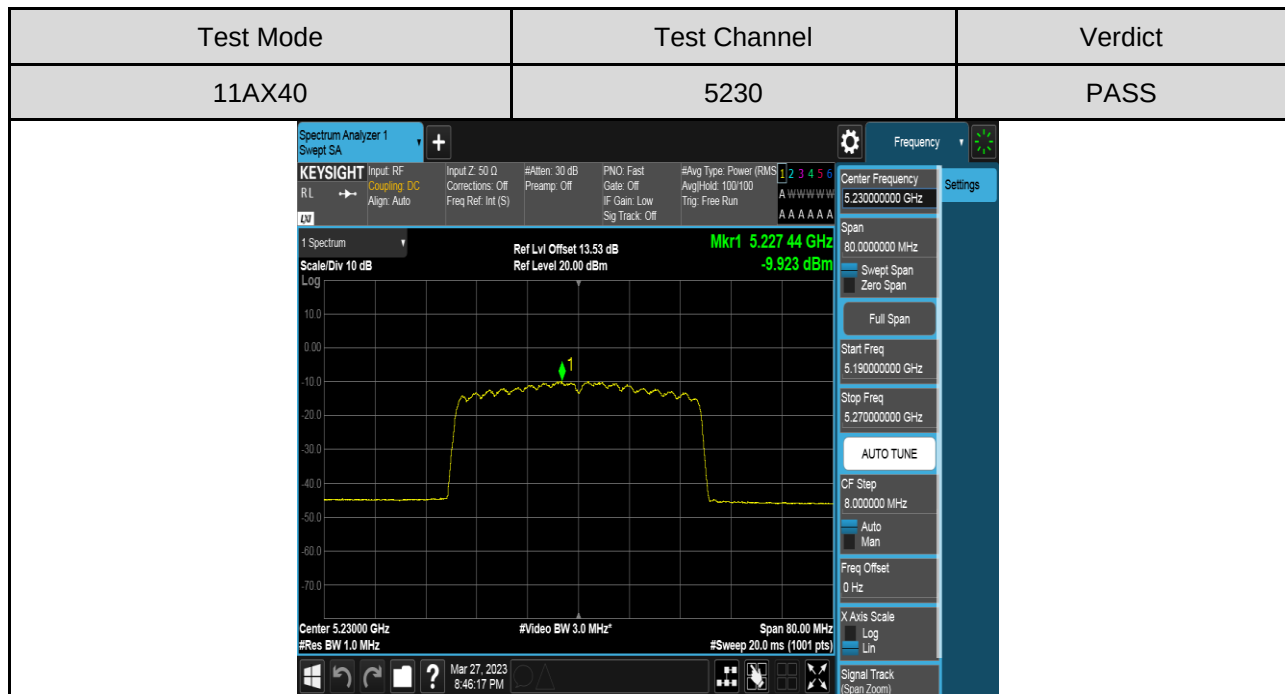
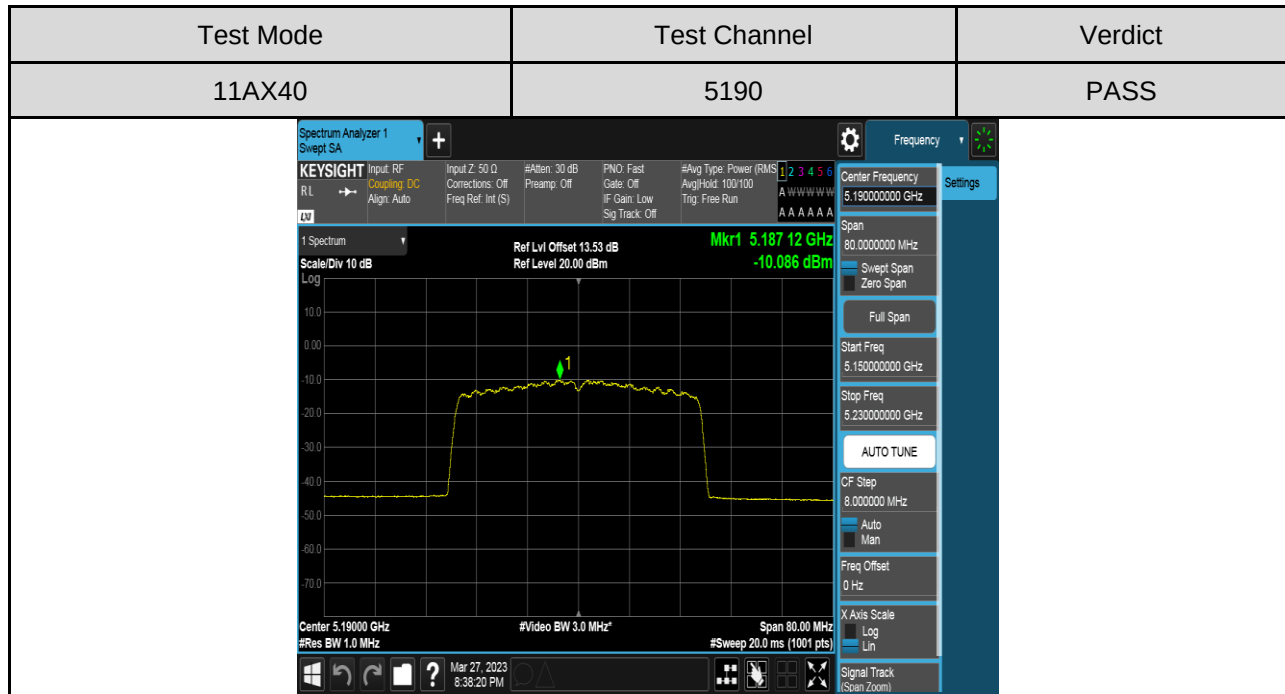


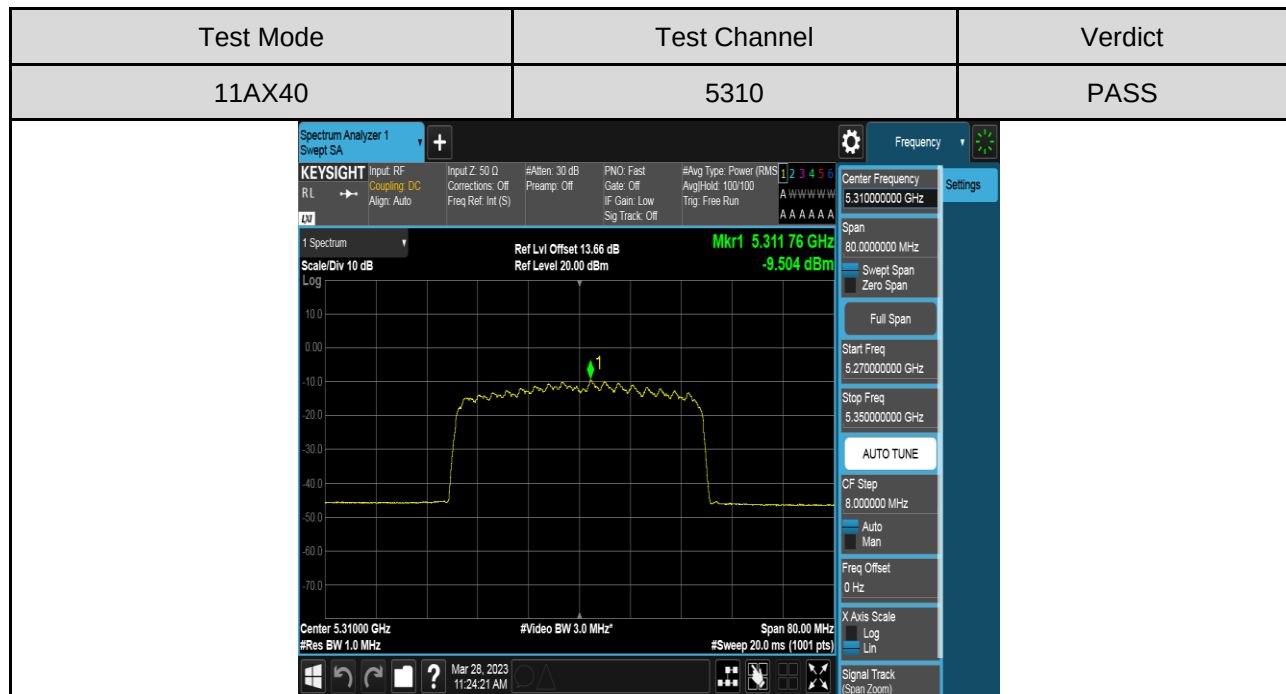
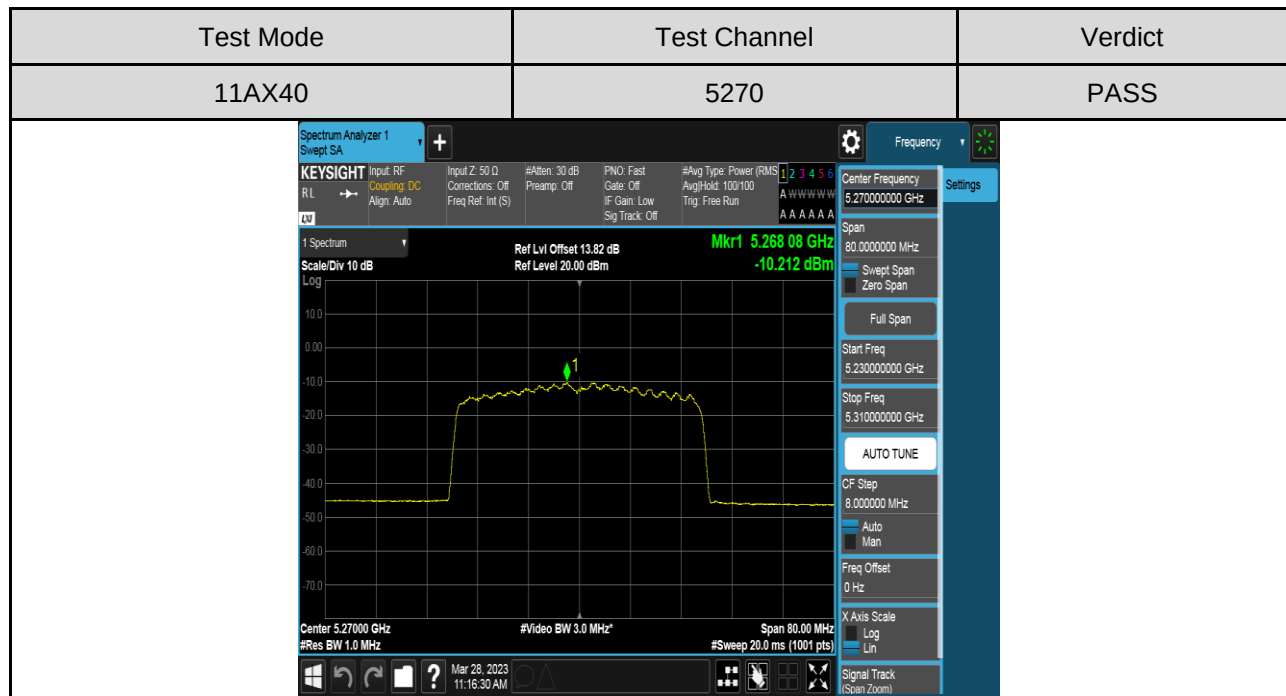


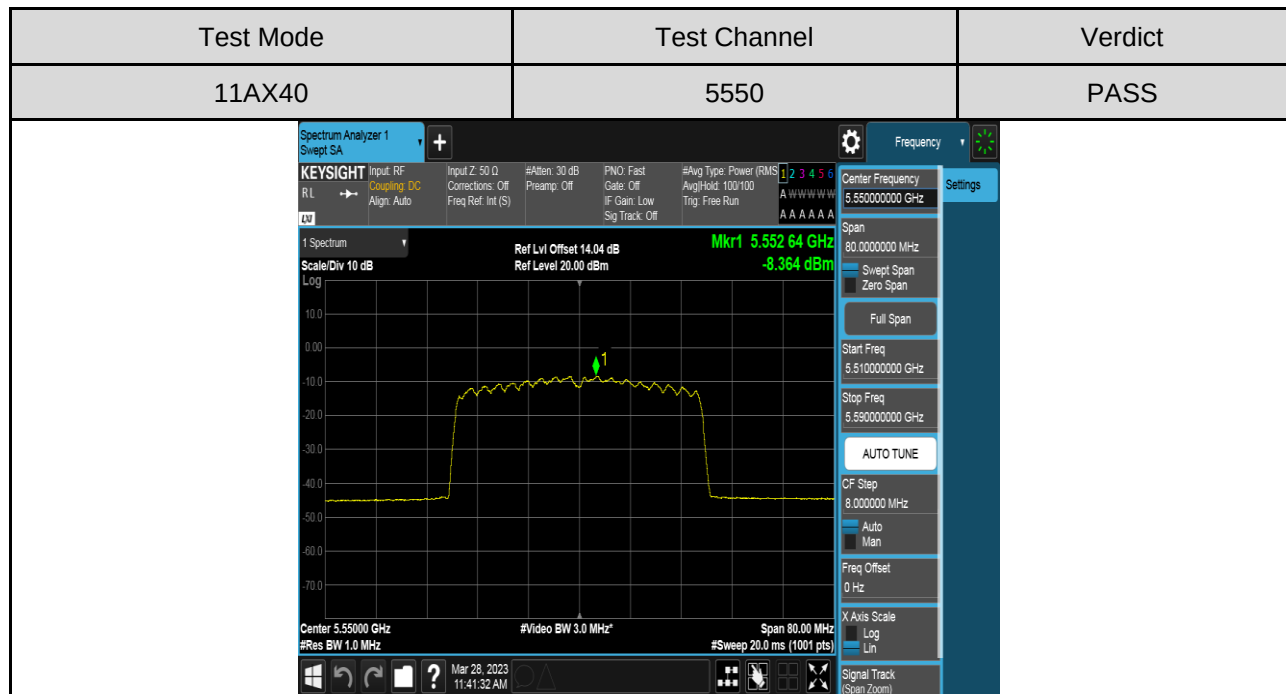
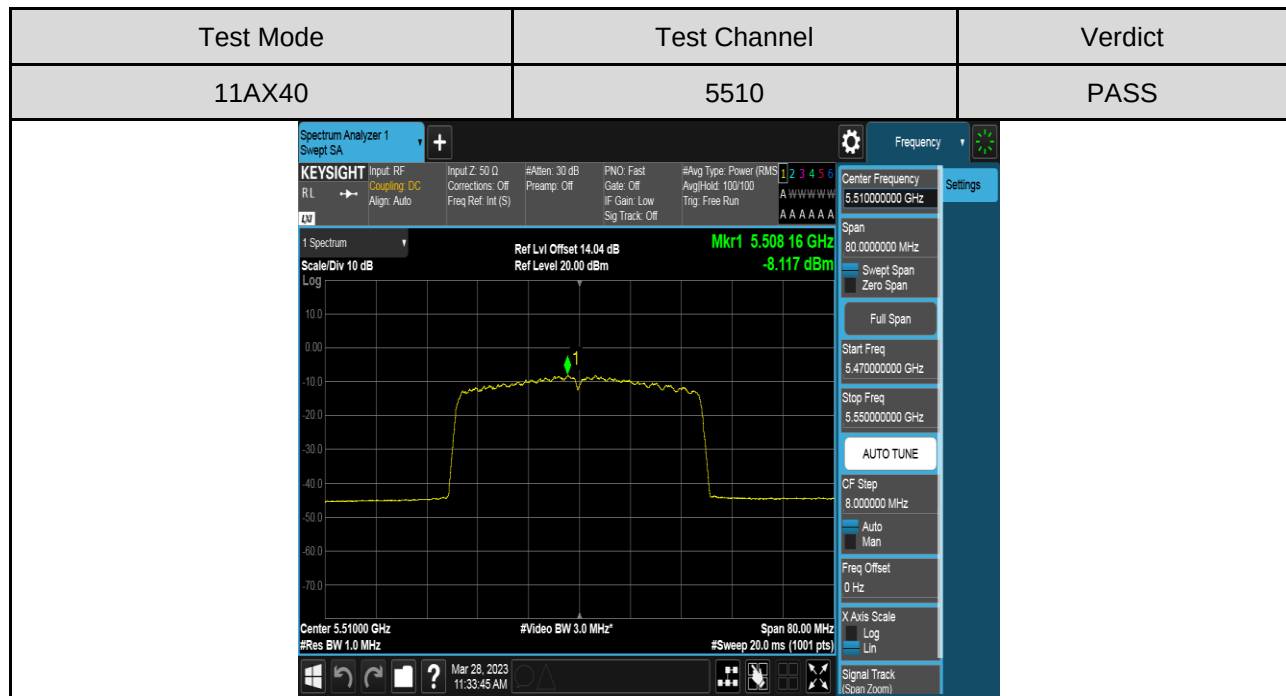


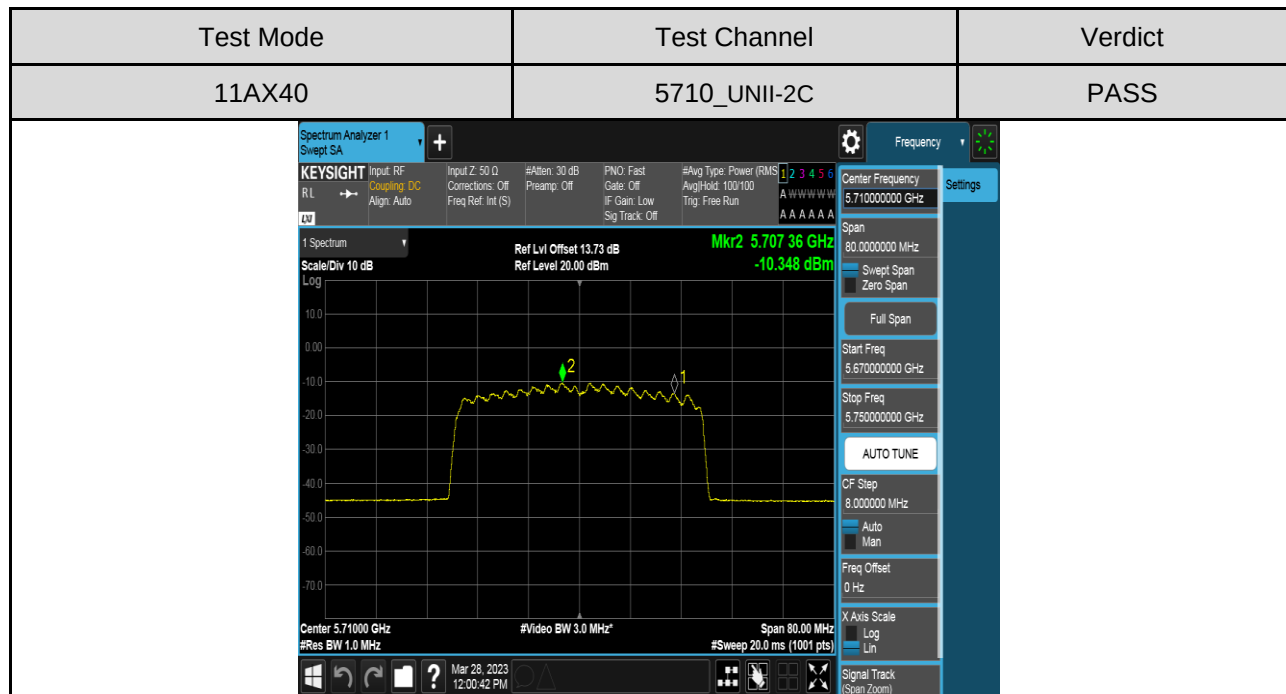
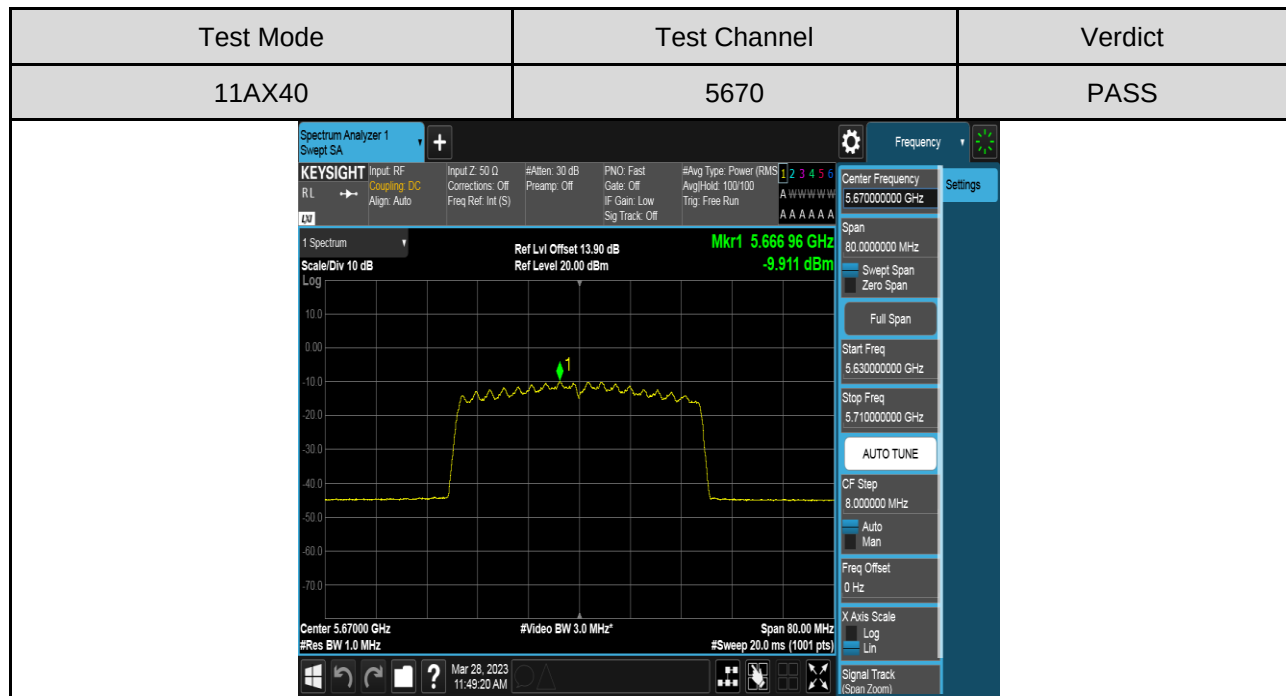


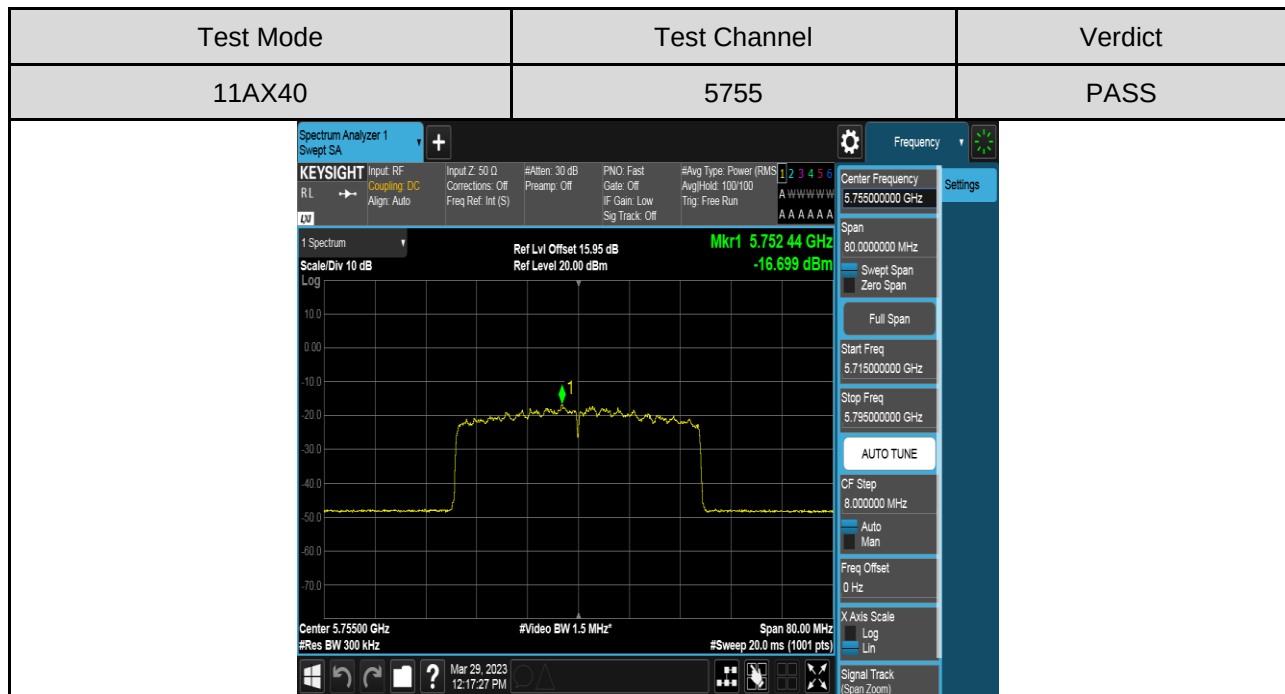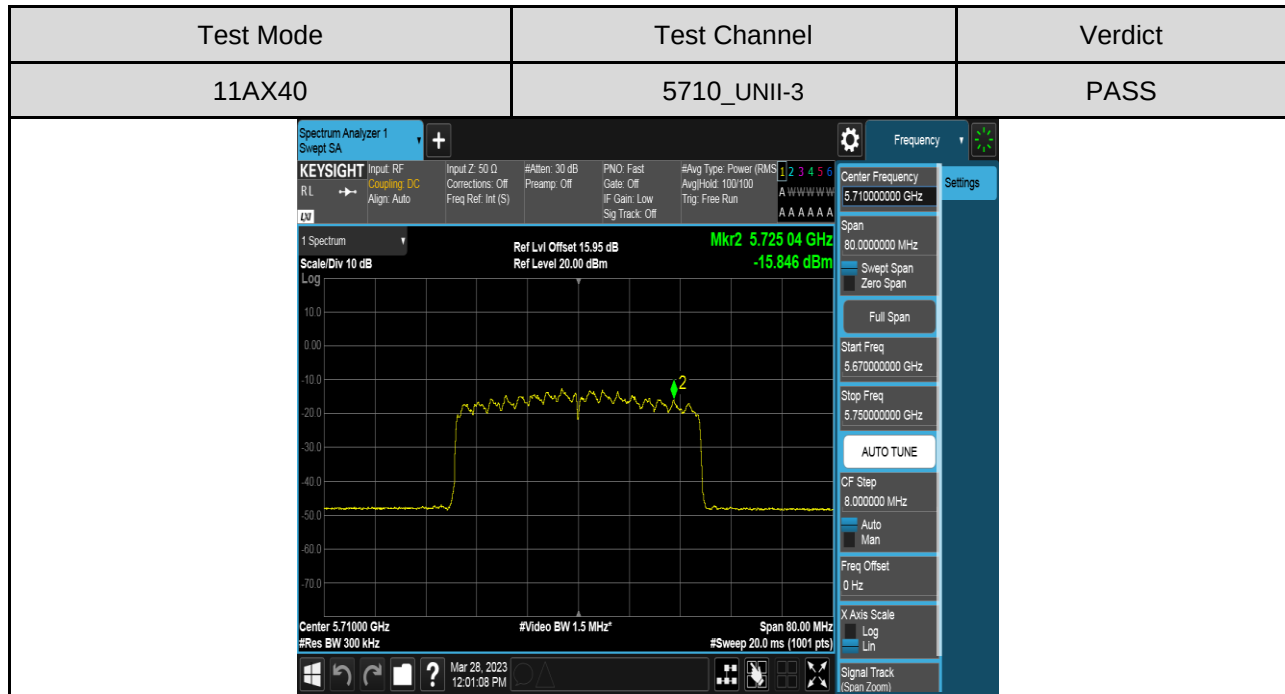

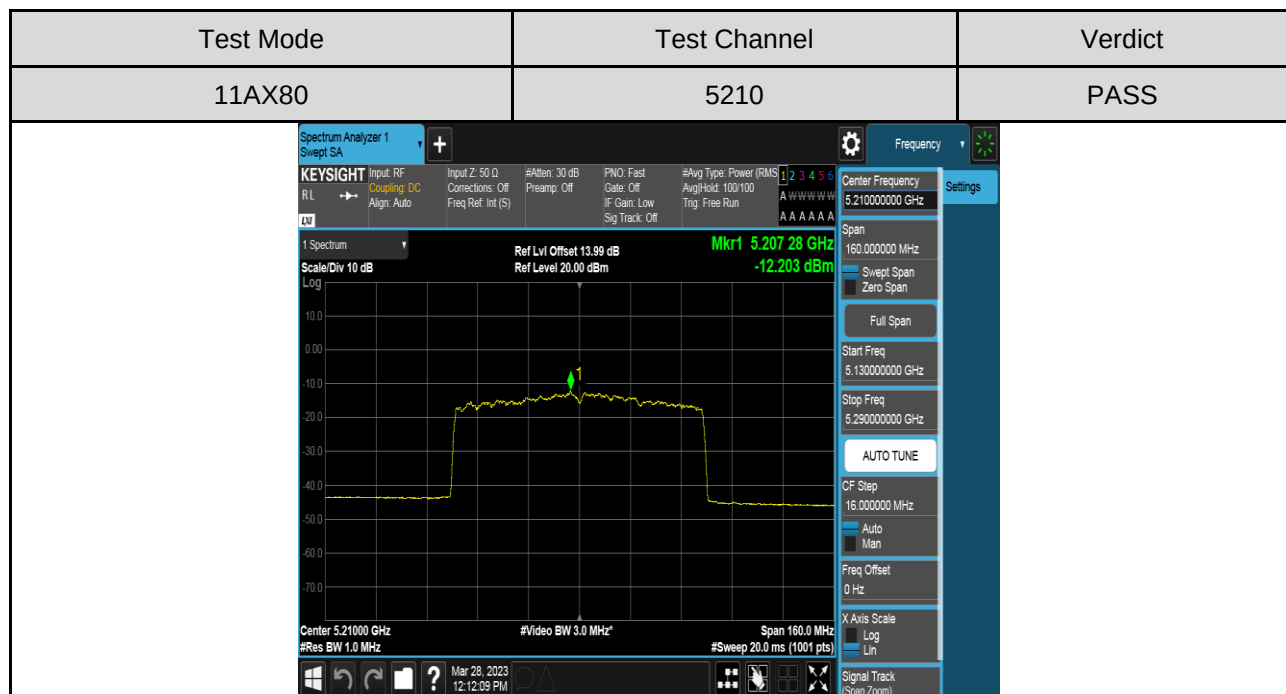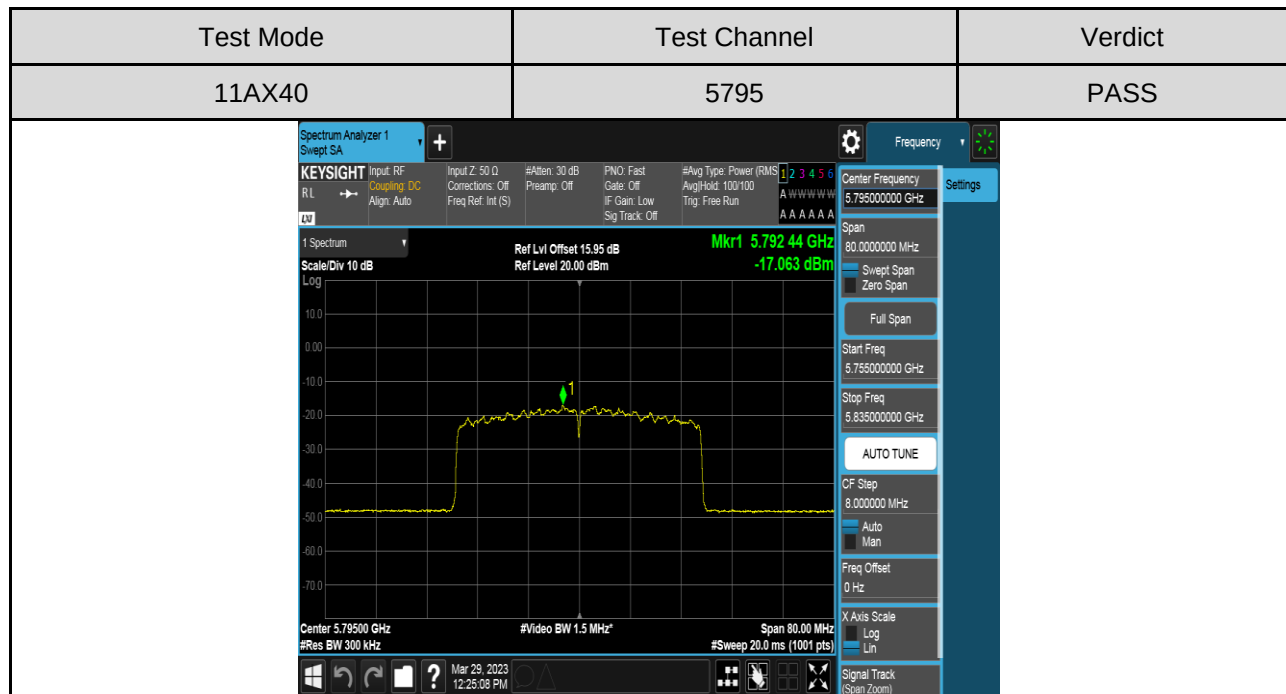

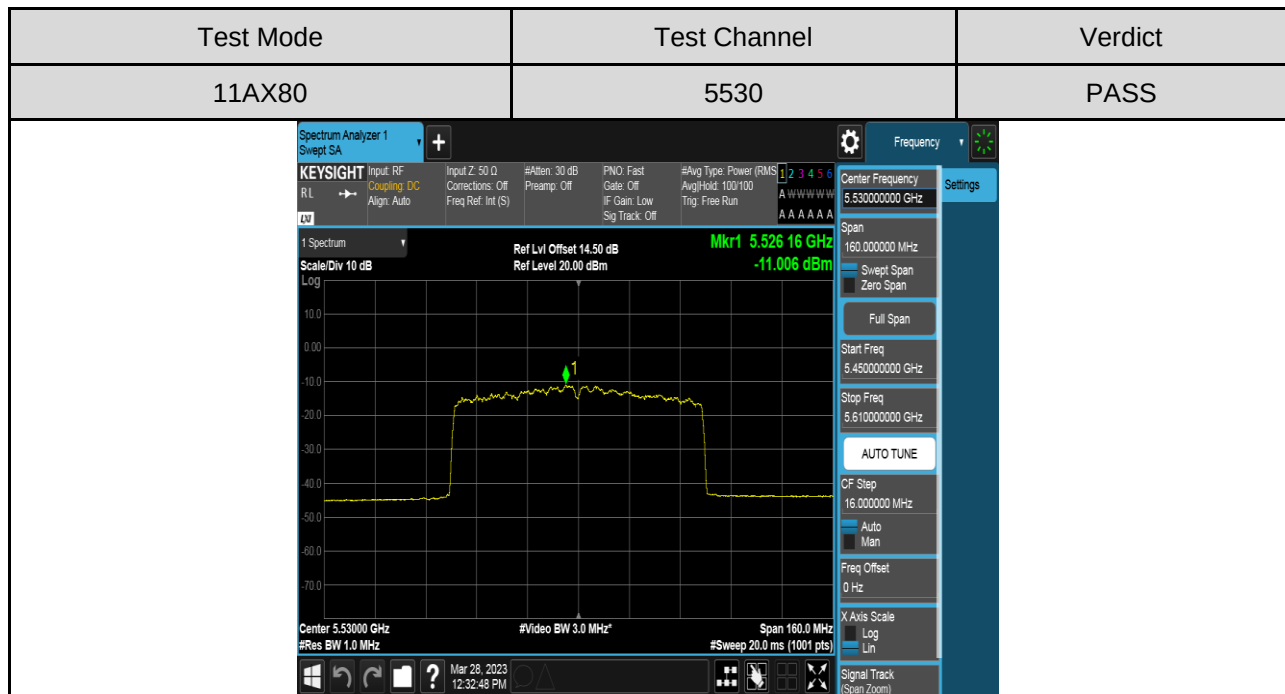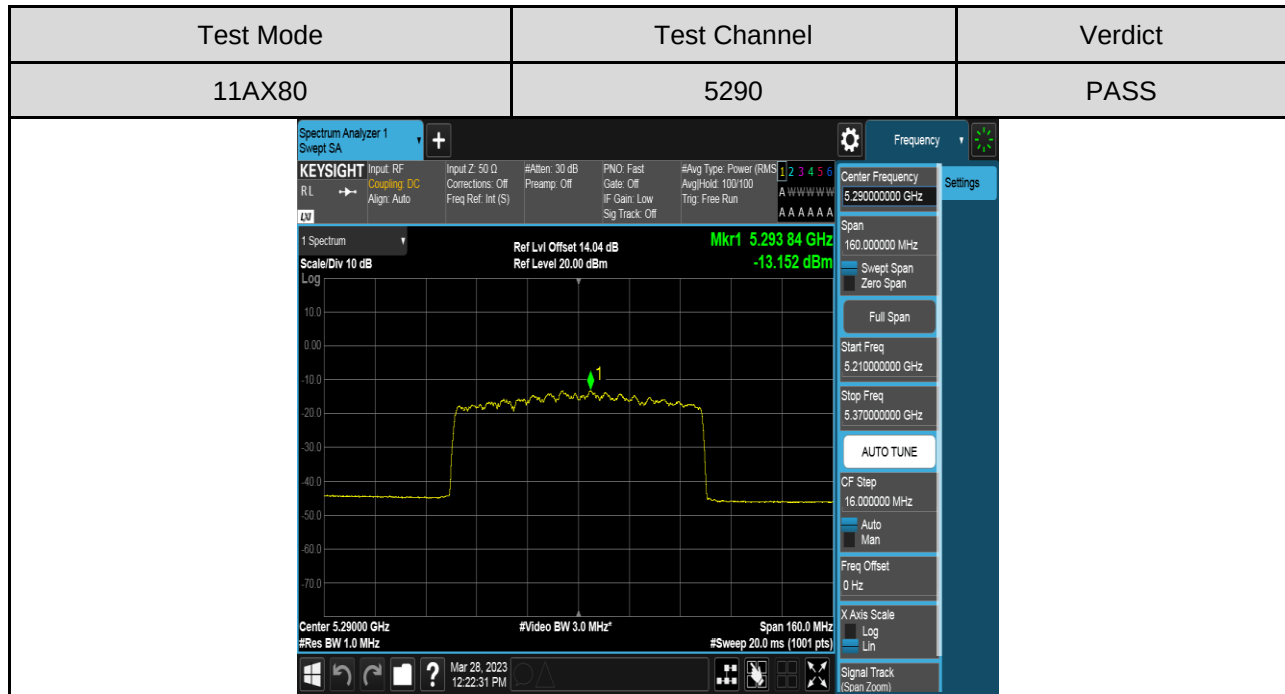

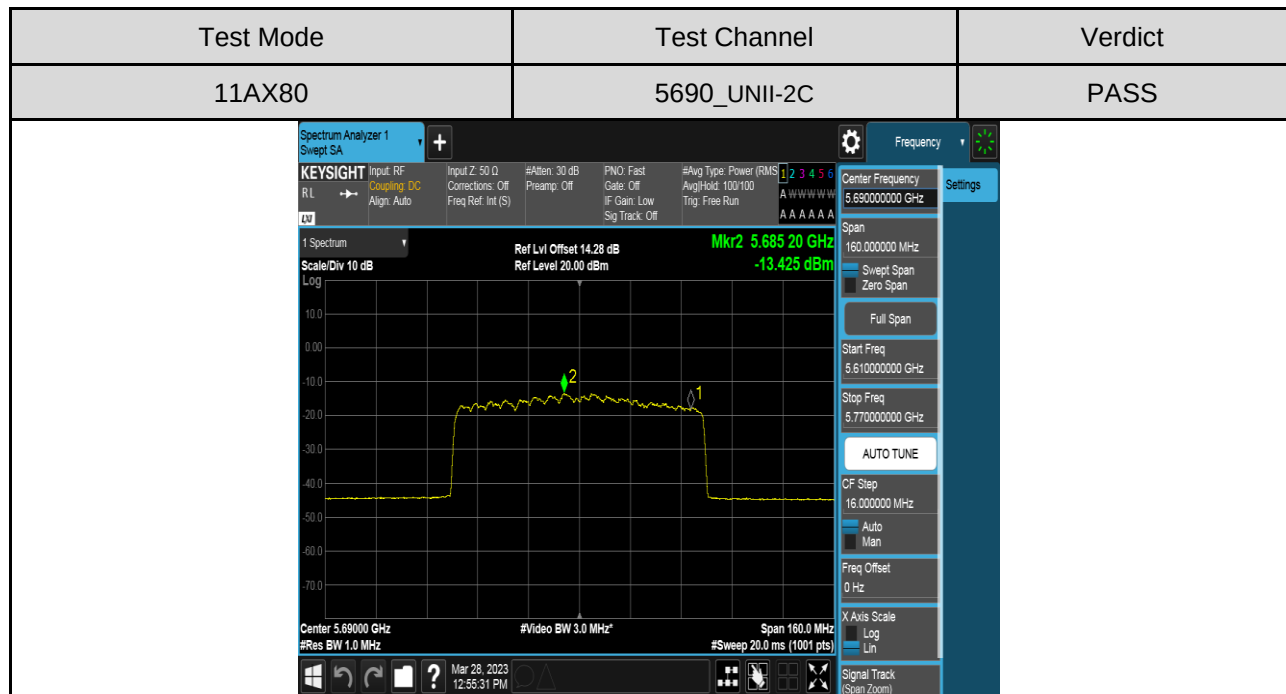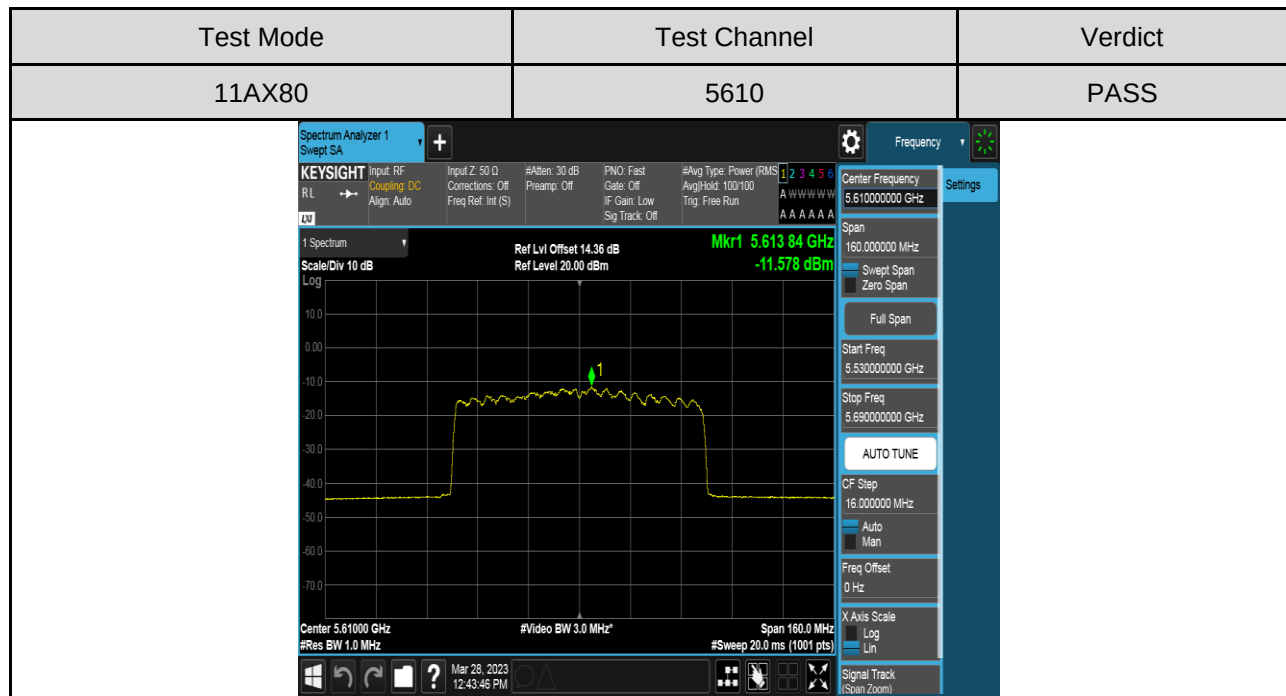

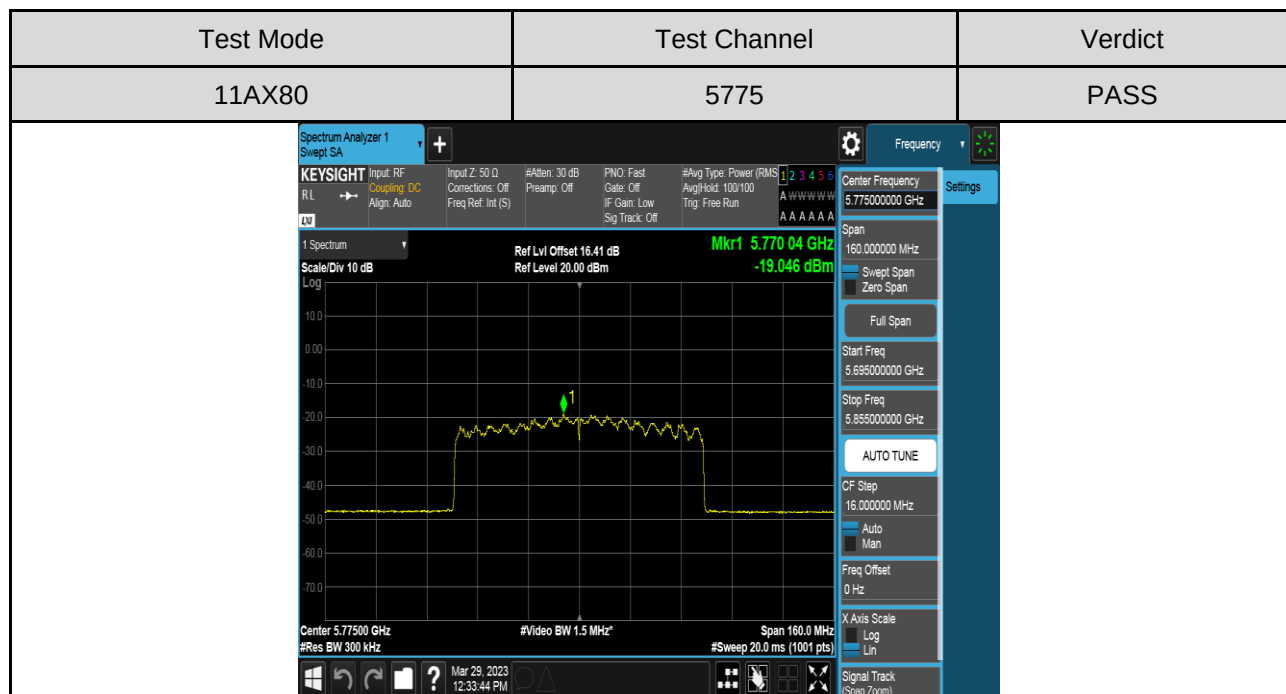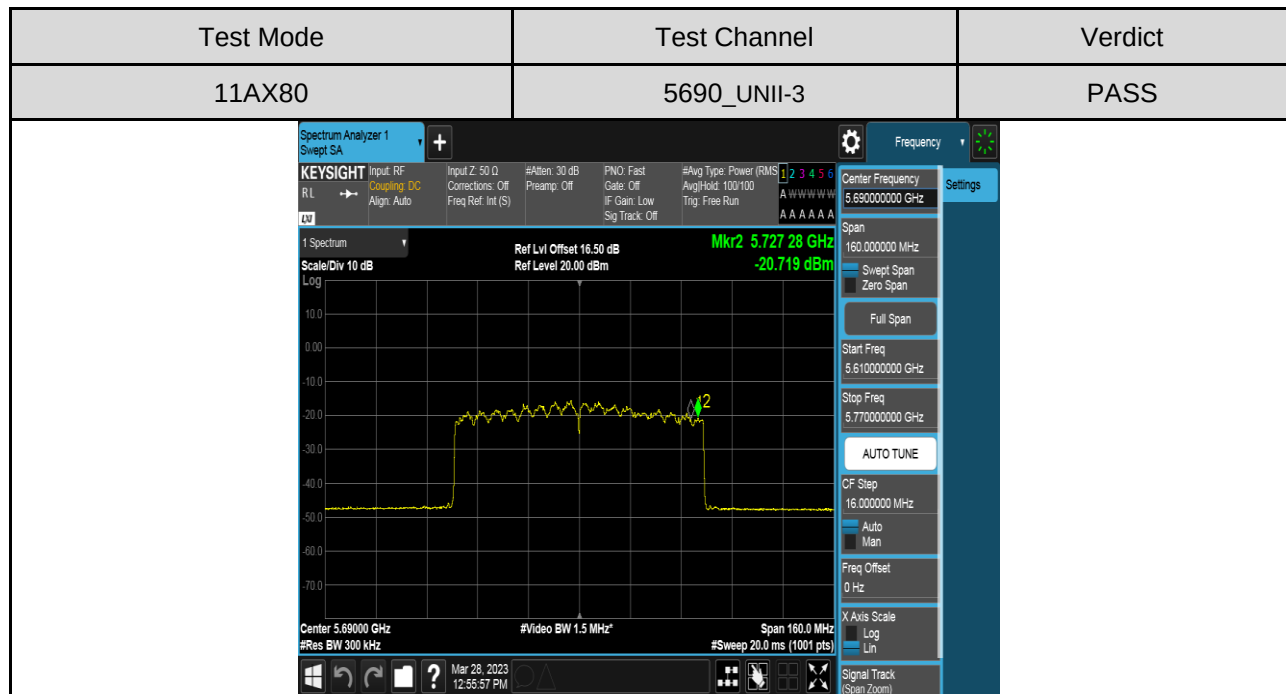

7. RADIATED TEST RESULTS

LIMITS

Refer to CFR 47 FCC §15.205, §15.209 and §15.407 (b).

Radiation Disturbance Test Limit for FCC (Class B) (9 kHz ~ 1 GHz)

Emissions radiated outside of the specified frequency bands above 30 MHz			
Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m	
		Quasi-Peak	
30 - 88	100	40	
88 - 216	150	43.5	
216 - 960	200	46	
Above 960	500	54	
Above 1000	500	Peak	Average
		74	54

FCC Emissions radiated outside of the specified frequency bands below 30 MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

FCC Restricted bands of operation refer to FCC §15.205 (a):

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Remark: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6c

Limits of unwanted/undesirable emission out of the restricted bands refer to CFR 47 FCC §15.407 (b) and ISSED RSS-247 6.2.

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1GHz)		
Frequency Range (MHz)	EIRP Limit	Field Strength Limit (dBuV/m) at 3 m
5150~5250 MHz	PK: -27 (dBm/MHz)	PK: 68.2(dBμV/m)
5250~5350 MHz		
5470~5725 MHz		
5725~5850 MHz	PK: -27 (dBm/MHz) *1 PK: 10 (dBm/MHz) *2 PK: 15.6 (dBm/MHz) *3 PK: 27 (dBm/MHz) *4	PK: 68.2(dBμV/m) *1 PK: 105.2 (dBμV/m) *2 PK: 110.8(dBμV/m) *3 PK: 122.2 (dBμV/m) *4

Remark:

*1 beyond 75 MHz or more above of the band edge.


*2 below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above.

*3 below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above.

*4 from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

TEST SETUP AND PROCEDURE

Below 30 MHz

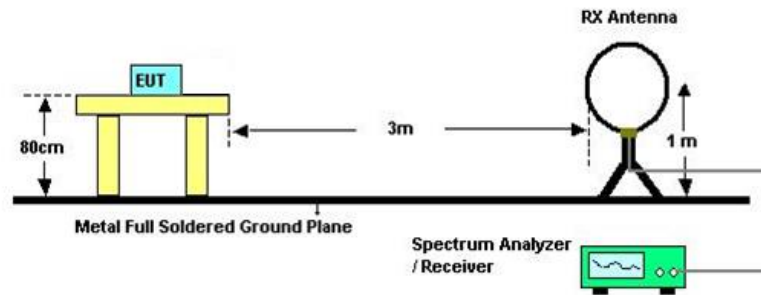


The setting of the spectrum analyser

RBW	200 Hz (From 9 kHz to 0.15 MHz) / 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz) / 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 and KDB 414788.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30 m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.
8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377 Ω . For example, the measurement frequency X kHz resulted in a level of Y dBuV/m, which is equivalent to $Y-51.5 = Z$ dBuA/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.

Below 1 GHz and above 30 MHz

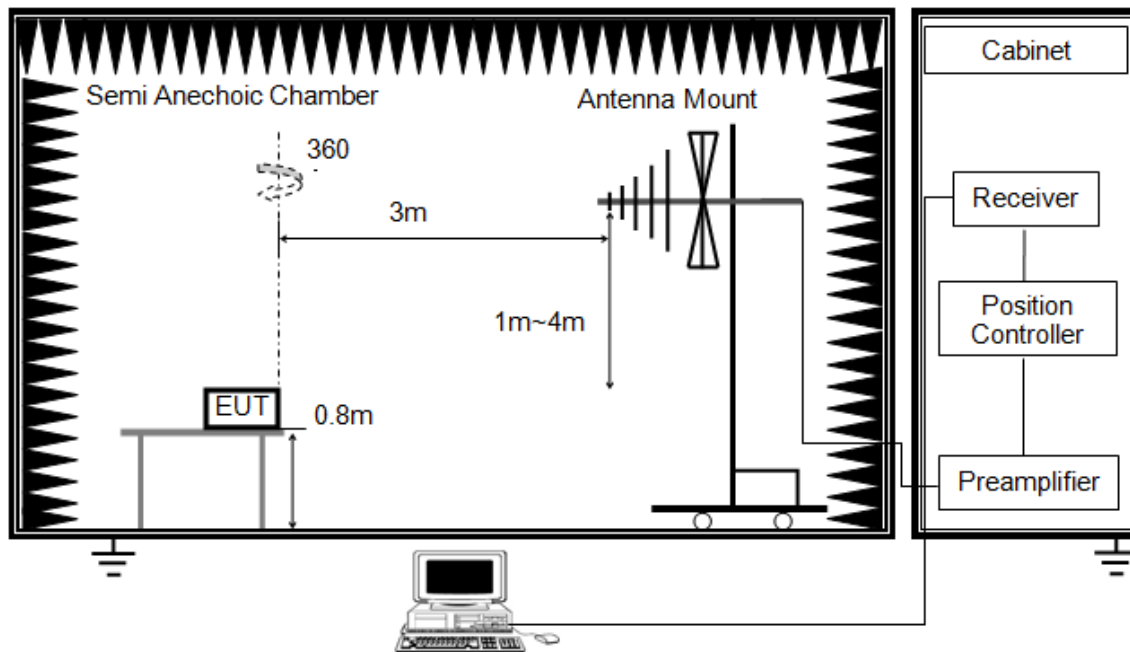


The setting of the spectrum analyser

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 11.11.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

Above 1G

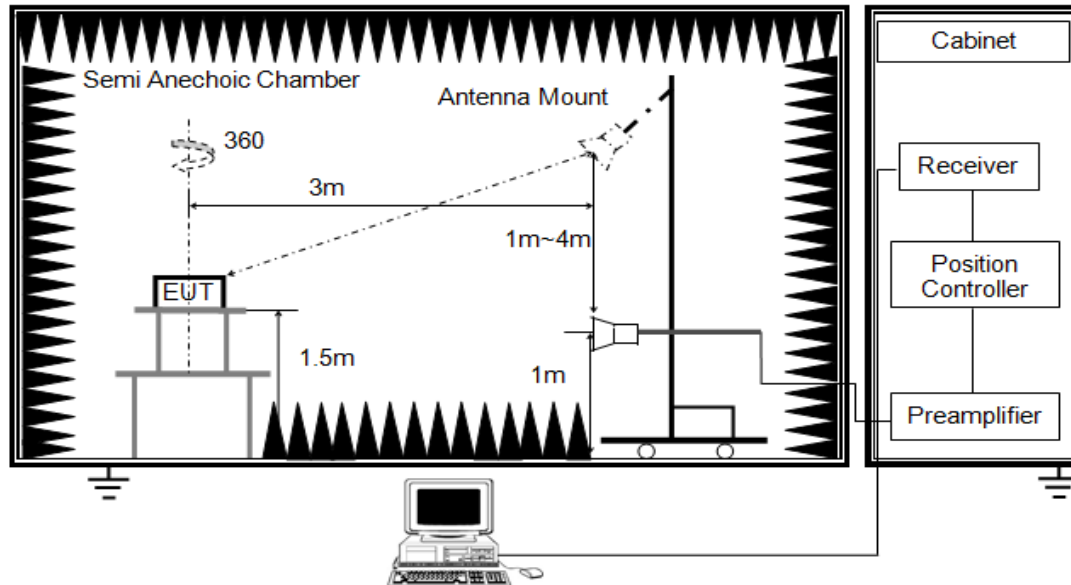


The setting of the spectrum analyzer

RBW	1MHz
VBW	PEAK: 3MHz AVG: see Remark 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the Antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector. For the Duty Cycle please refer to clause 6.2. ON TIME AND DUTY CYCLE.

X axis, Y axis, Z axis positions:

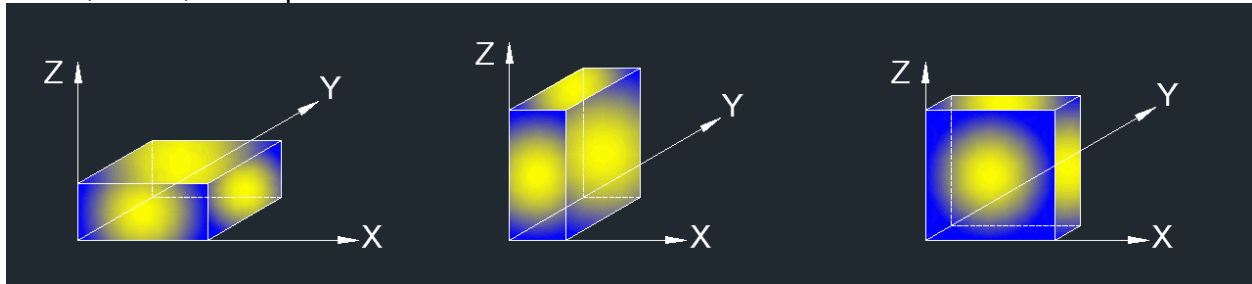

Remark 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

7.1. RESTRICTED BANDEDGE

TEST ENVIRONMENT

Temperature	21.4°C	Relative Humidity	57.3%
Atmosphere Pressure	101.9kpa	Test Voltage	DC5V

TEST RESULT TABLE


Test Mode	Antenna	Channel	Puw(dBm)	Verdict
11A	Ant2	5180	<Limit	PASS
		5320	<Limit	PASS
		5500	<Limit	PASS
		5700	<Limit	PASS
		5745	<Limit	PASS
		5825	<Limit	PASS
11AC20MIMO	Ant1+2	5180	<Limit	PASS
		5320	<Limit	PASS
		5500	<Limit	PASS
		5700	<Limit	PASS
		5745	<Limit	PASS
		5825	<Limit	PASS
11AC40MIMO	Ant1+2	5190	<Limit	PASS
		5310	<Limit	PASS
		5510	<Limit	PASS
		5670	<Limit	PASS
		5755	<Limit	PASS
		5795	<Limit	PASS
11AC80MIMO	Ant1+2	5210	<Limit	PASS
		5290	<Limit	PASS
		5530	<Limit	PASS
		5610	<Limit	PASS
		5775	<Limit	PASS
11AX20MIMO	Ant1+2	5180	<Limit	PASS
		5320	<Limit	PASS
		5500	<Limit	PASS
		5700	<Limit	PASS
		5745	<Limit	PASS
		5825	<Limit	PASS
11AX40MIMO	Ant1+2	5190	<Limit	PASS
		5310	<Limit	PASS
		5510	<Limit	PASS
		5670	<Limit	PASS
		5755	<Limit	PASS
		5795	<Limit	PASS
11AX80MIMO	Ant1+2	5210	<Limit	PASS
		5290	<Limit	PASS
		5530	<Limit	PASS
		5610	<Limit	PASS
		5775	<Limit	PASS

Remark:

- 1) Since 802.11ac VHT20/VHT40 modes are different from 802.11n HT20/HT40 only in control messages, so all the tests are performed on the worst case (802.11ac VHT20/802.11ac VHT40) mode between these 4 modes and only the worst data was recorded in this report.
- 2) Pre-testing both antennas of 11 a mode, only the data of worse case is included in this report.

TEST GRAPHS:

Test Mode	Channel	Polarization	Verdict
11A	5180	Horizontal	PASS

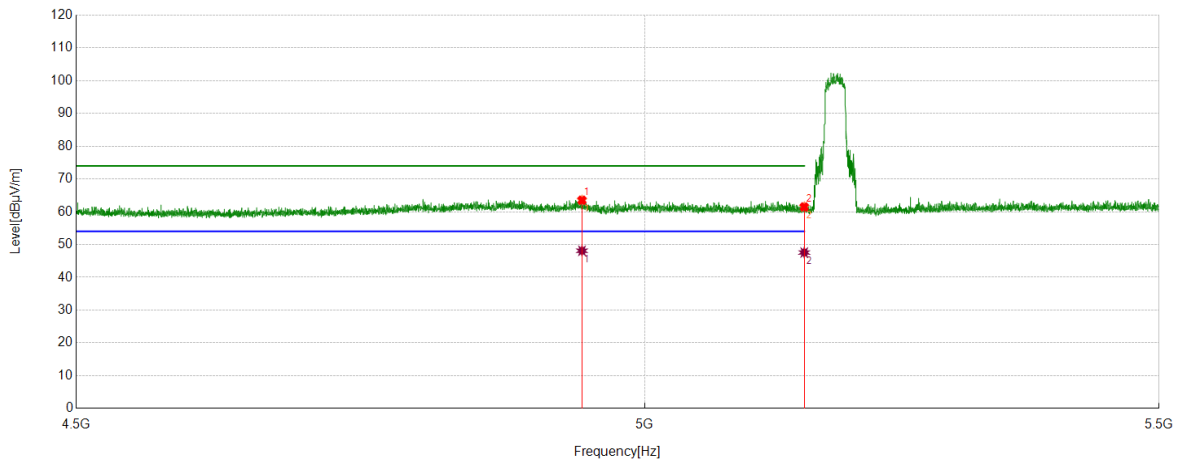

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	4942.2442	43.17	20.35	63.52	74.00	10.48	peak
2	5150.0000	42.01	19.46	61.47	74.00	12.53	peak

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	4942.2442	27.76	20.35	48.11	54.00	5.89	AV
2	5150.0000	28.11	19.46	47.57	54.00	6.43	AV

- Remark: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11A	5180	Vertical	PASS

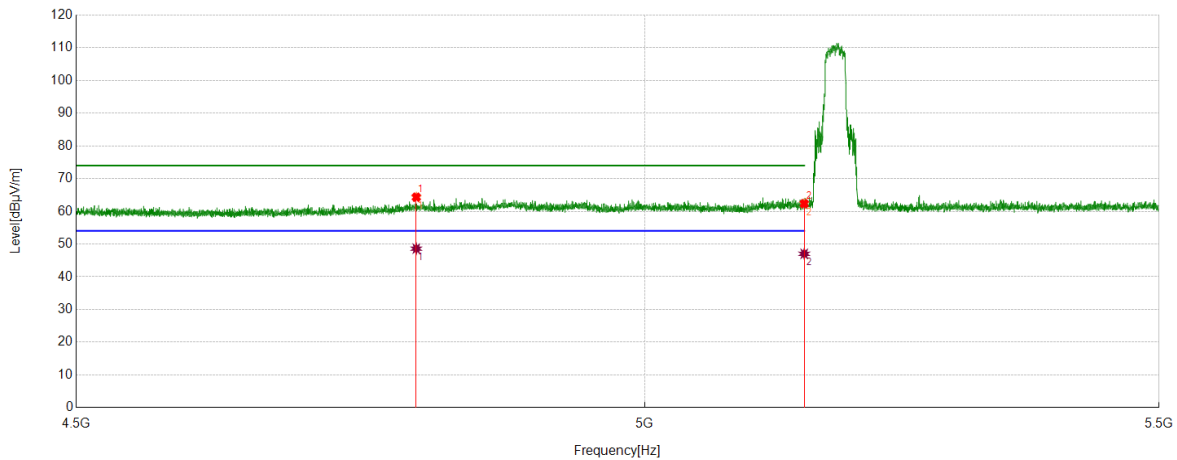

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	4792.8293	44.28	20.04	64.32	74.00	9.68	peak
2	5150.0000	42.88	19.46	62.34	74.00	11.66	peak

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	4792.8293	28.55	20.04	48.59	54.00	5.41	AV
2	5150.0000	27.56	19.46	47.02	54.00	6.98	AV

- Remark: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11A	5320	Horizontal	PASS

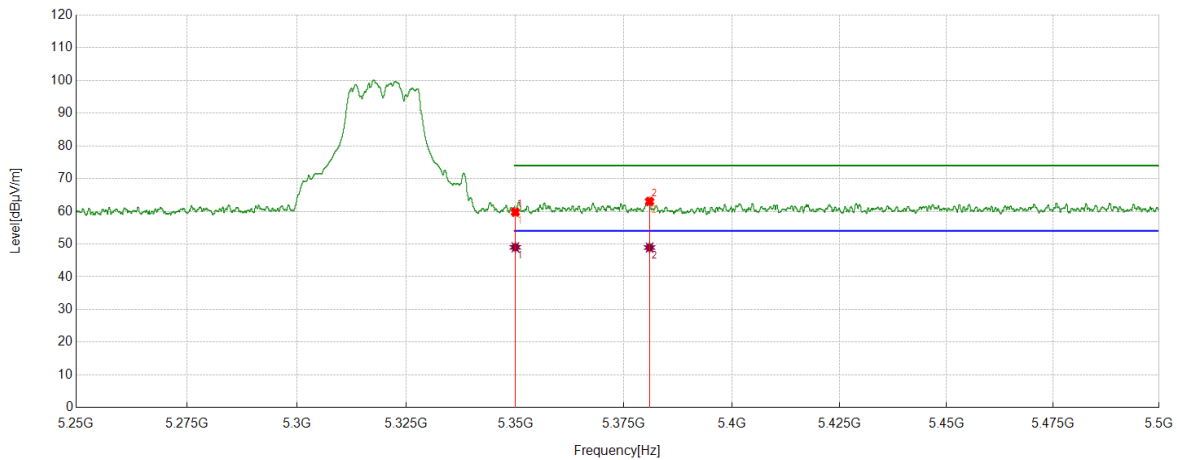

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	5350.0000	39.08	20.68	59.76	74.00	14.24	peak
2	5380.9381	42.58	20.46	63.04	74.00	10.96	peak

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	5350.0000	28.33	20.68	49.01	54.00	4.99	AV
2	5380.9381	28.47	20.46	48.93	54.00	5.07	AV

- Remark: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11A	5320	Vertical	PASS

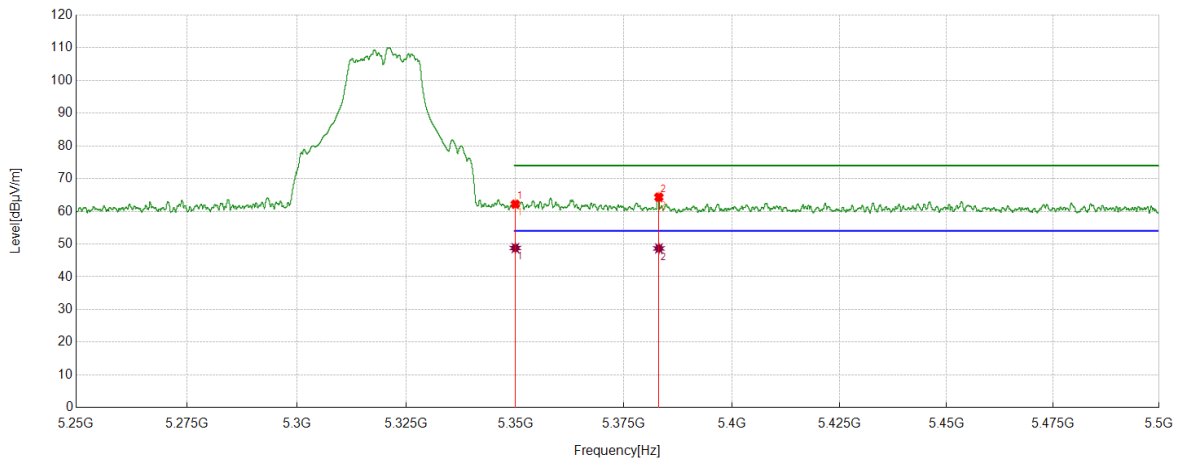

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	5350.0000	41.50	20.68	62.18	74.00	11.82	peak
2	5383.0883	43.91	20.43	64.34	74.00	9.66	peak

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	5350.0000	28.11	20.68	48.79	54.00	5.21	AV
2	5383.0883	28.23	20.43	48.66	54.00	5.34	AV

- Remark: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11A	5500	Horizontal	PASS

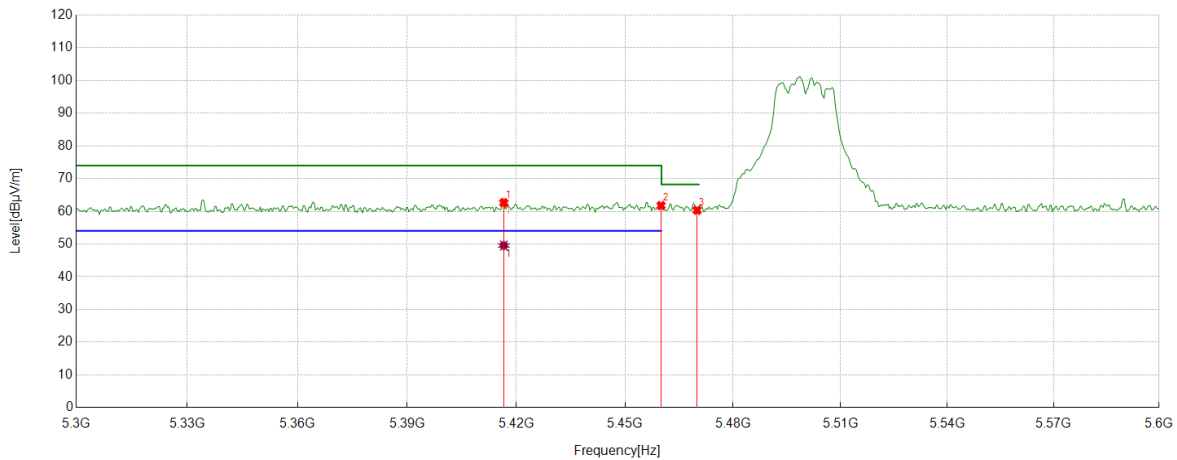

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	5416.5165	41.82	20.82	62.64	74.00	11.36	peak
2	5460.0000	41.05	20.71	61.76	74.00	12.24	peak
3	5470.0000	39.76	20.58	60.34	68.20	7.86	peak

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	5416.5165	28.73	20.82	49.55	54.00	4.45	AV

- Remark: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11A	5500	Vertical	PASS

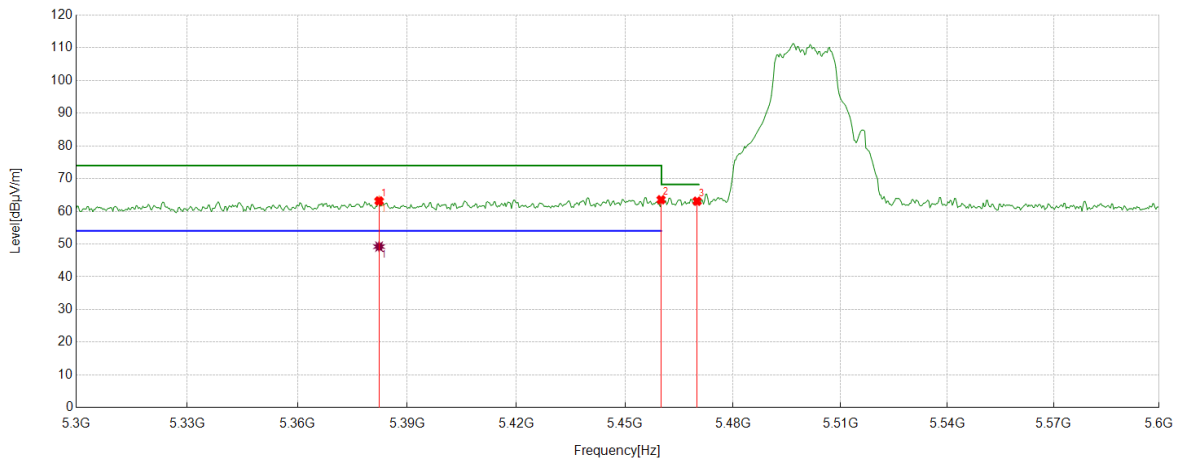

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	5382.2823	42.73	20.44	63.17	74.00	10.83	peak
2	5460.0000	42.83	20.71	63.54	74.00	10.46	peak
3	5470.0000	42.51	20.58	63.09	68.20	5.11	peak

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	5382.2823	28.77	20.44	49.21	54.00	4.79	AV

- Remark: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11A	5700	Horizontal	PASS

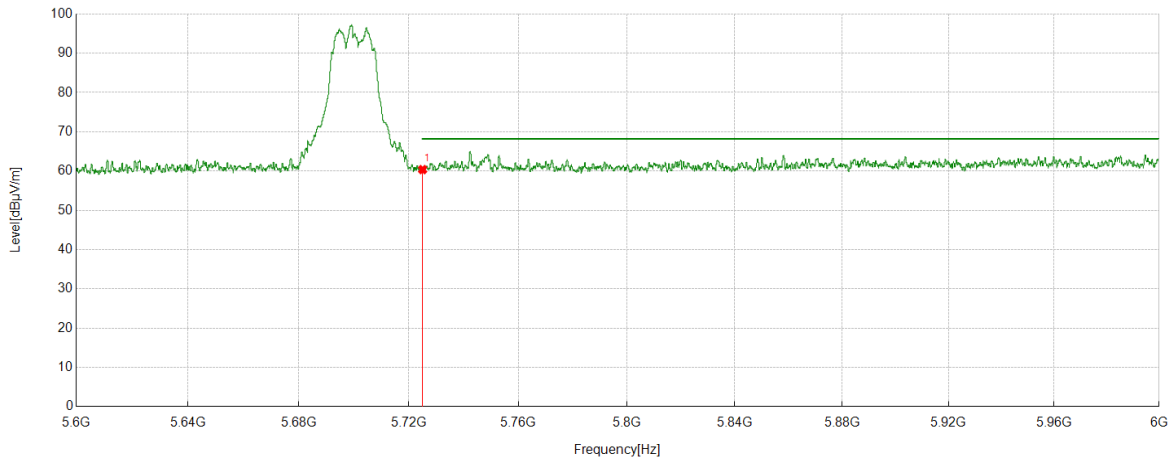


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	5725.0000	39.81	20.56	60.37	68.20	7.83	peak

- Remark: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11A	5700	Vertical	PASS

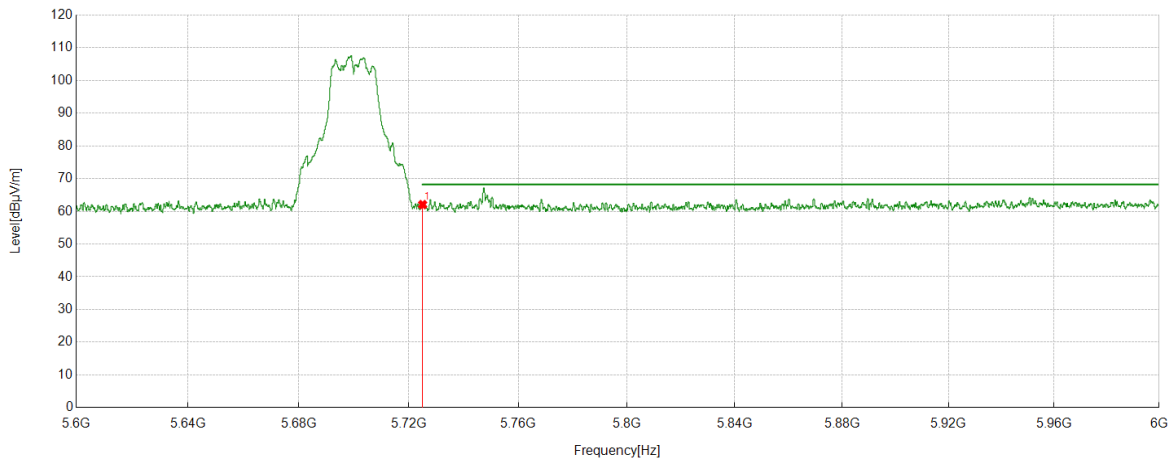


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	5725.0000	41.51	20.56	62.07	68.20	6.13	peak

- Remark: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11A	5745	Horizontal	PASS

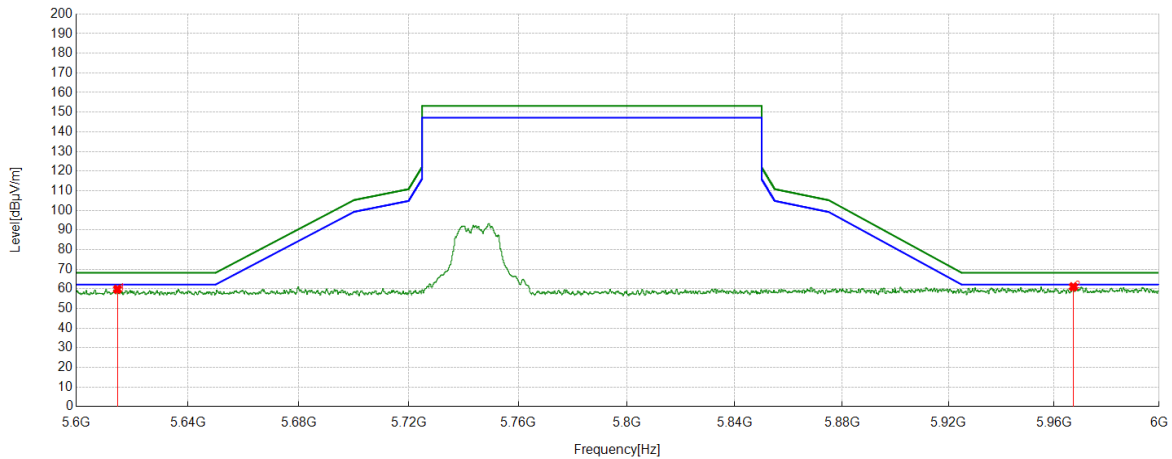


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	5614.8015	39.16	20.64	59.80	68.20	8.40	peak
2	5967.2767	39.69	21.37	61.06	68.20	7.14	peak

- Remark: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11A	5745	Vertical	PASS

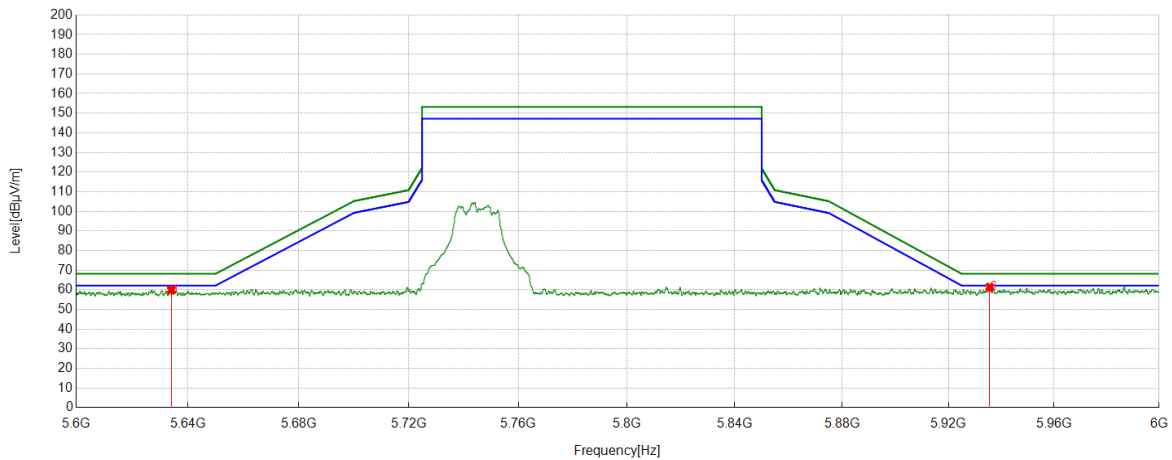


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	5634.0834	39.25	20.73	59.98	68.20	8.22	peak
2	5935.5936	40.08	21.31	61.39	68.20	6.81	peak

- Remark: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11A	5825	Horizontal	PASS

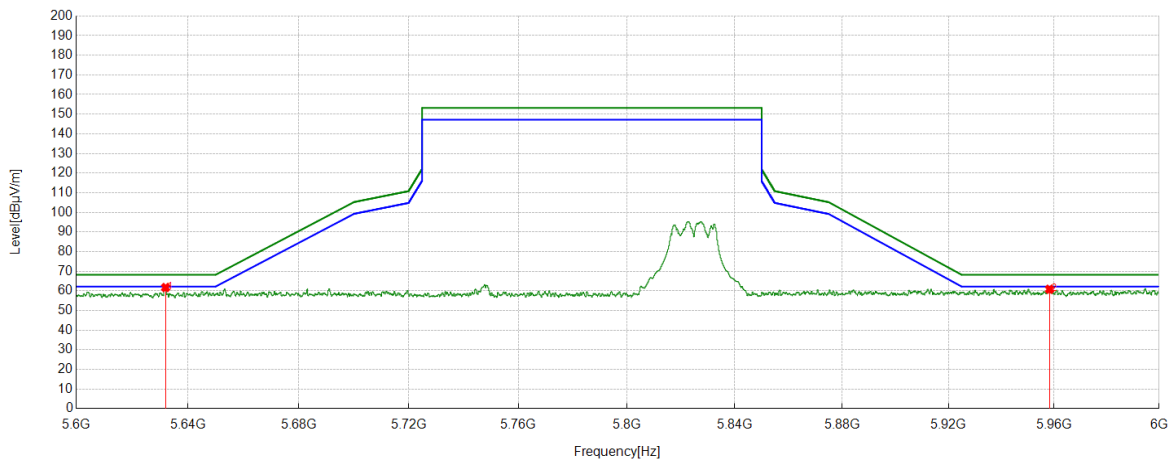


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	5632.0432	40.97	20.75	61.72	68.20	6.48	peak
2	5958.2758	39.37	21.44	60.81	68.20	7.39	peak

- Remark: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11A	5825	Vertical	PASS

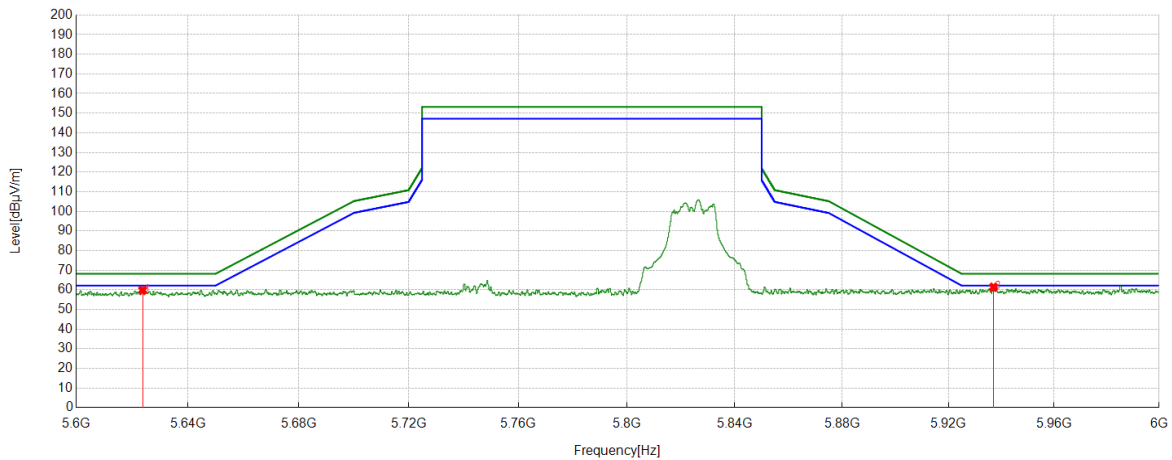


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	5623.8024	39.15	20.72	59.87	68.20	8.33	peak
2	5937.0337	40.02	21.36	61.38	68.20	6.82	peak

- Remark: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AC20	5180	Horizontal	PASS

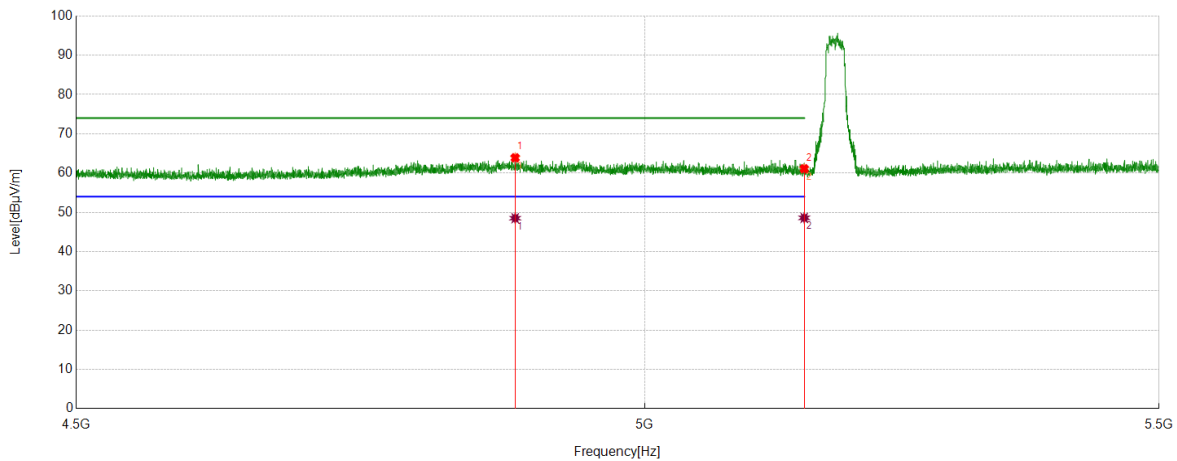

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	4881.4381	43.86	20.02	63.88	74.00	10.12	peak
2	5150.0000	41.64	19.46	61.10	74.00	12.90	peak

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	4881.4381	28.49	20.02	48.51	54.00	5.49	AV
2	5150.0000	29.13	19.46	48.59	54.00	5.41	AV

- Remark: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AC20	5180	Vertical	PASS

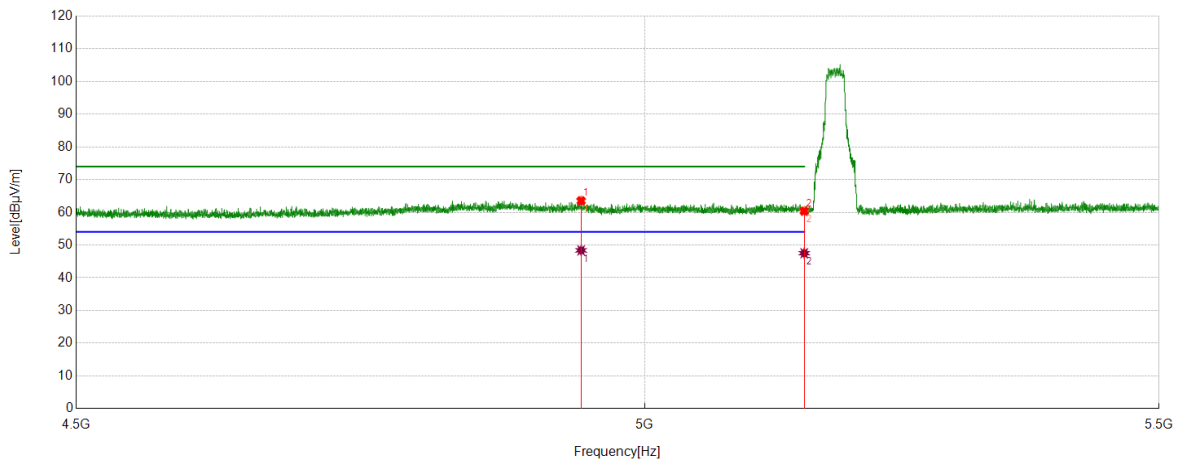

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	4941.4441	43.15	20.39	63.54	74.00	10.46	peak
2	5150.0000	40.90	19.46	60.36	74.00	13.64	peak

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	4941.4441	27.99	20.39	48.38	54.00	5.62	AV
2	5150.0000	28.05	19.46	47.51	54.00	6.49	AV

- Remark: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AC20	5320	Horizontal	PASS

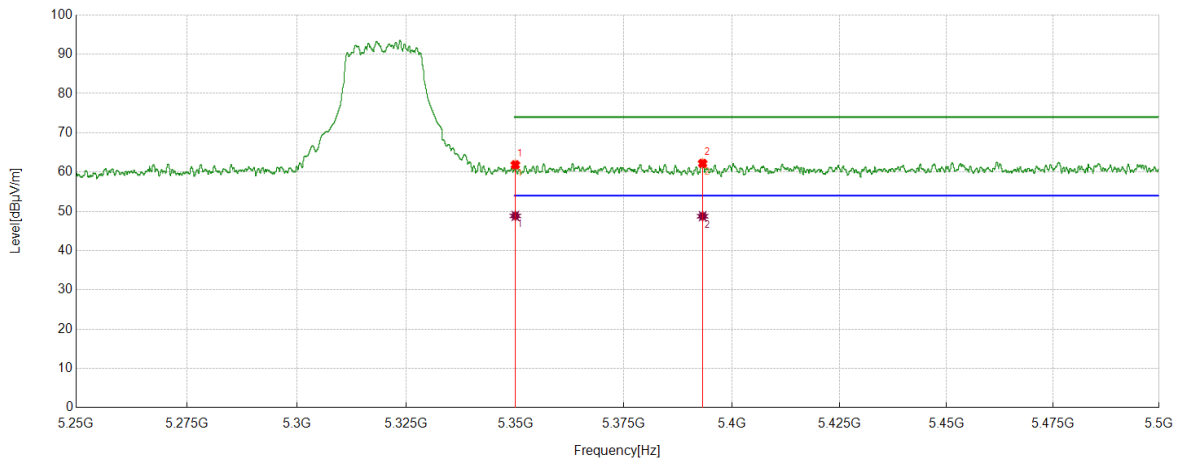

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	5350.0000	41.17	20.68	61.85	74.00	12.15	peak
2	5393.2143	41.73	20.48	62.21	74.00	11.79	peak

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	5350.0000	28.16	20.68	48.84	54.00	5.16	AV
2	5393.2143	28.28	20.48	48.76	54.00	5.24	AV

- Remark: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AC20	5320	Vertical	PASS

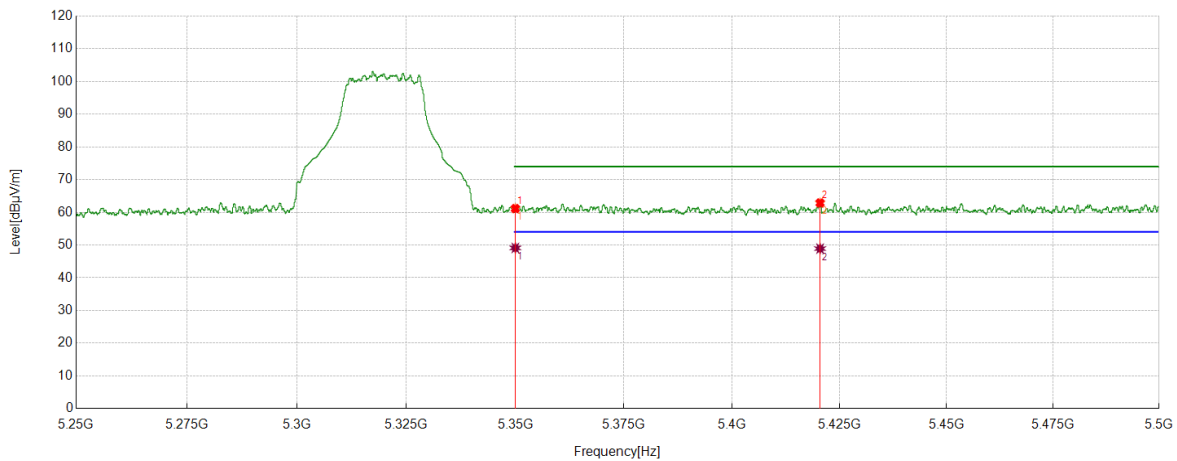

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	5350.0000	40.47	20.68	61.15	74.00	12.85	peak
2	5420.492	42.08	20.79	62.87	74.00	11.13	peak

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	5350.0000	28.44	20.68	49.12	54.00	4.88	AV
2	5420.492	28.12	20.79	48.91	54.00	5.09	AV

- Remark: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AC20	5500	Horizontal	PASS

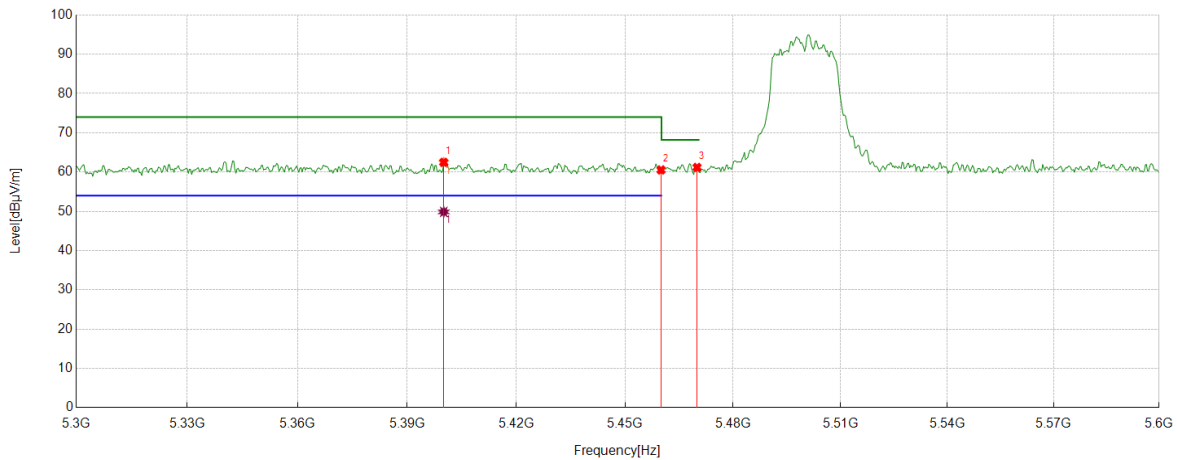

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	5400	41.73	20.75	62.48	74.00	11.52	peak
2	5460.0000	39.83	20.71	60.54	74.00	13.46	peak
3	5470.0000	40.60	20.58	61.18	68.20	7.02	peak

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	5400	29.11	20.75	49.86	54.00	4.14	AV

- Remark: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AC20	5500	Vertical	PASS

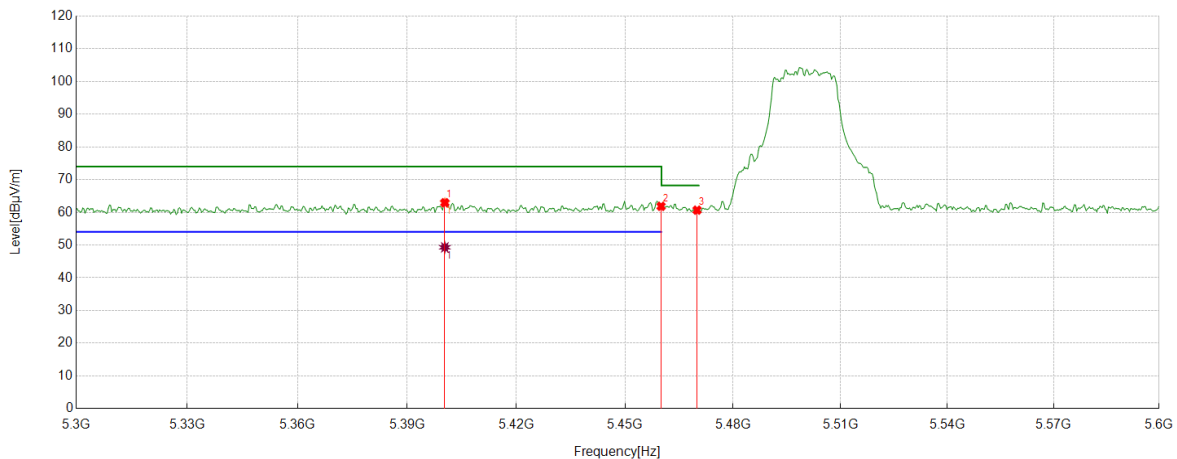

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	5400.3003	42.19	20.75	62.94	74.00	11.06	peak
2	5460.0000	41.13	20.71	61.84	74.00	12.16	peak
3	5470.0000	40.09	20.58	60.67	68.20	7.53	peak

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	5400.3003	28.55	20.75	49.30	54.00	4.70	AV

- Remark: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AC20	5700	Horizontal	PASS

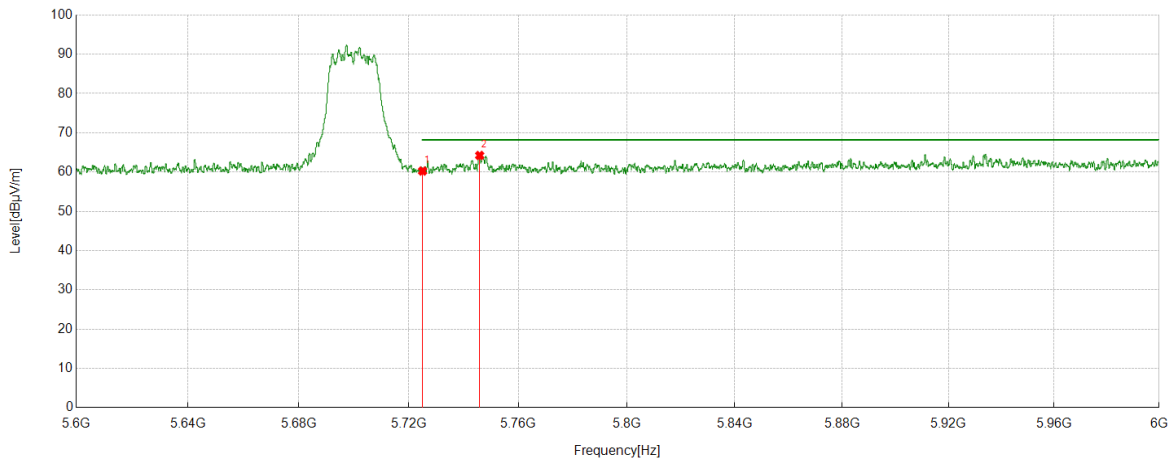


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	5725.0000	39.70	20.56	60.26	68.20	7.94	peak
2	5745.8546	43.67	20.56	64.23	68.20	3.97	peak

- Remark: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AC20	5700	Vertical	PASS

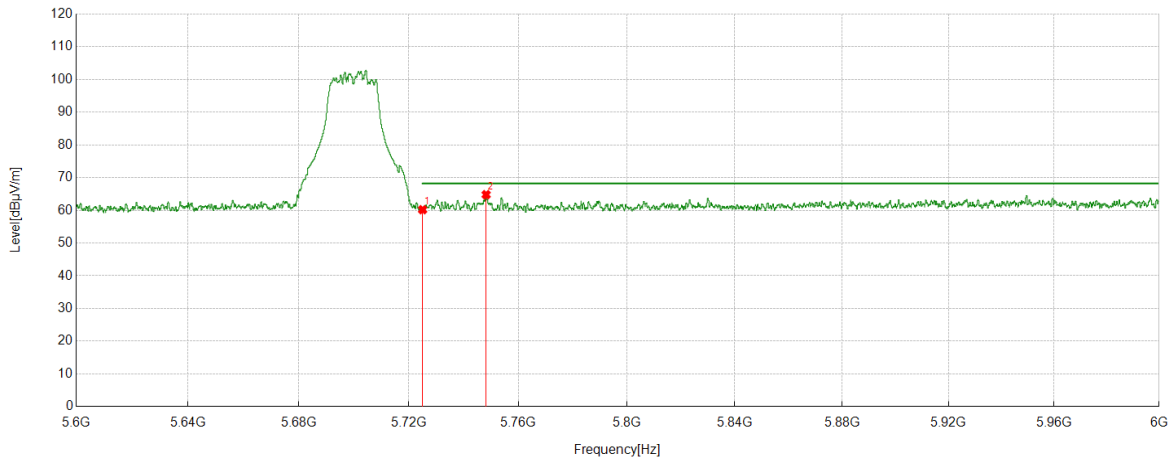


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	5725.0000	39.64	20.56	60.20	68.20	8.00	peak
2	5748.2148	44.26	20.53	64.79	68.20	3.41	peak

- Remark: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AC20	5745	Horizontal	PASS

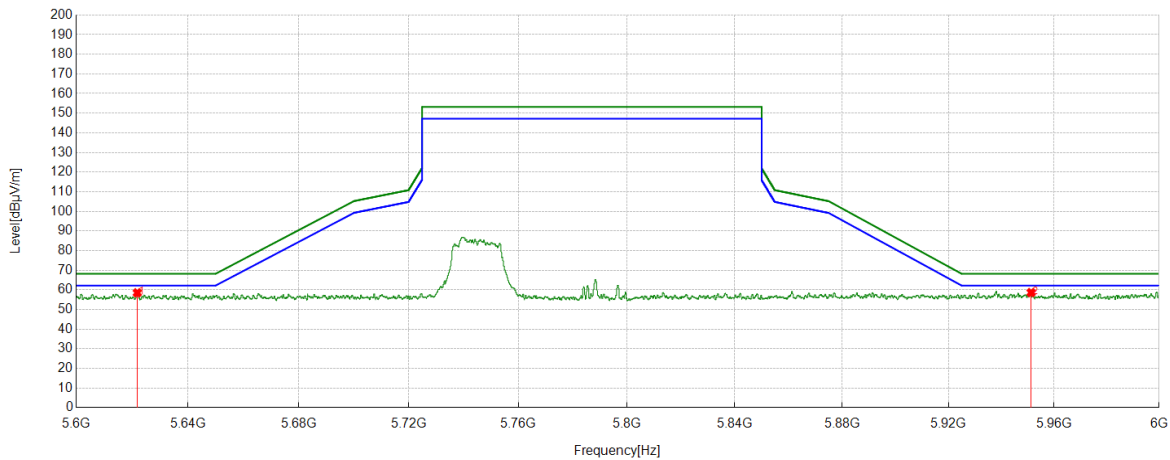


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	5621.8822	37.78	20.72	58.50	68.20	9.70	peak
2	5951.2751	37.26	21.36	58.62	68.20	9.58	peak

- Remark: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AC20	5745	Vertical	PASS

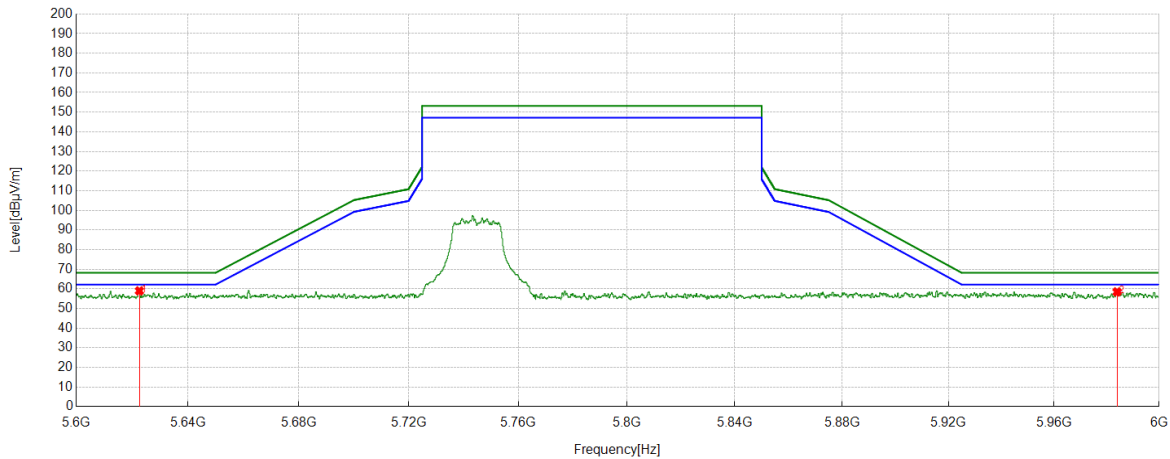


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	5622.6423	38.29	20.71	59.00	68.20	9.20	peak
2	5983.9584	37.02	21.43	58.45	68.20	9.75	peak

- Remark: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AC20	5825	Horizontal	PASS

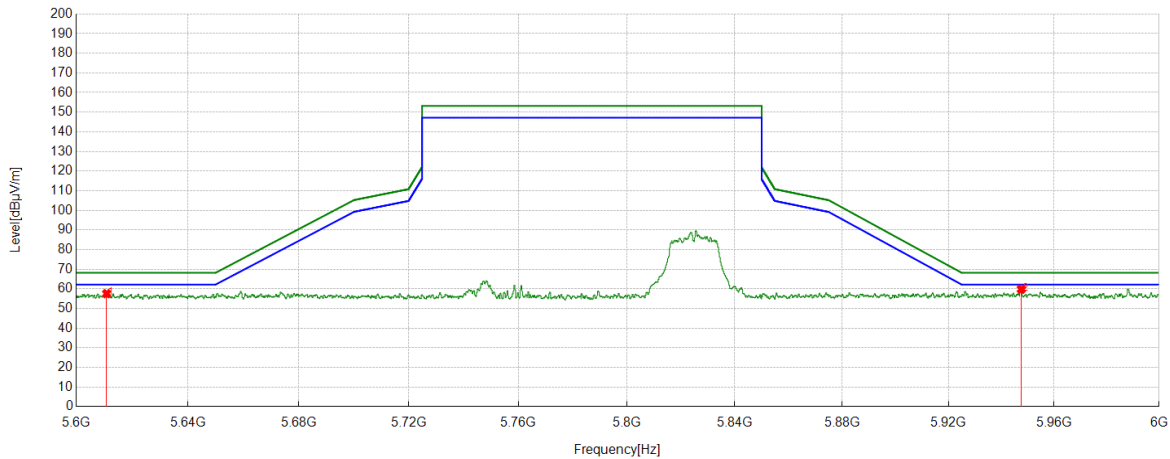


PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	5610.9211	37.00	20.59	57.59	68.20	10.61	peak
2	5947.5548	38.47	21.38	59.85	68.20	8.35	peak

- Remark: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AC20	5825	Vertical	PASS

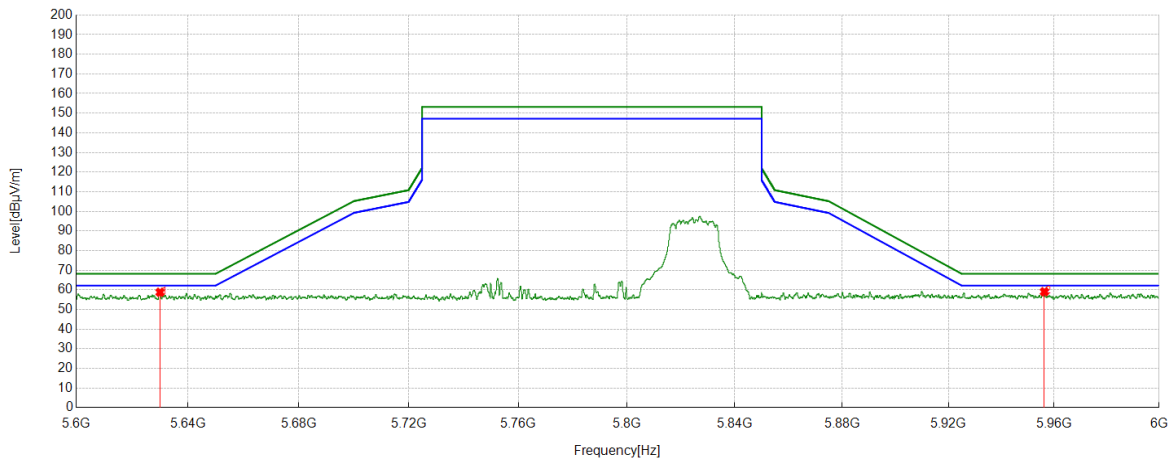


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	5630.043	38.02	20.76	58.78	68.20	9.42	peak
2	5956.3156	37.63	21.42	59.05	68.20	9.15	peak

- Remark: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AC40	5190	Horizontal	PASS

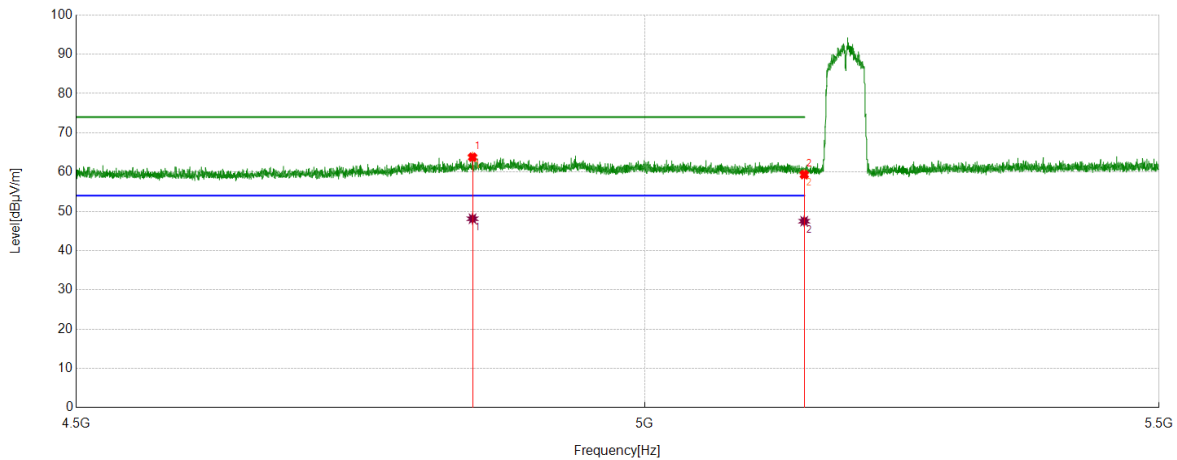

PK Result:


No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	4843.0343	43.53	20.26	63.79	74.00	10.21	peak
2	5150.0000	39.90	19.46	59.36	74.00	14.64	peak

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	4843.0343	27.86	20.26	48.12	54.00	5.88	AV
2	5150.0000	28.03	19.46	47.49	54.00	6.51	AV

- Remark: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11AC40	5190	Vertical	PASS

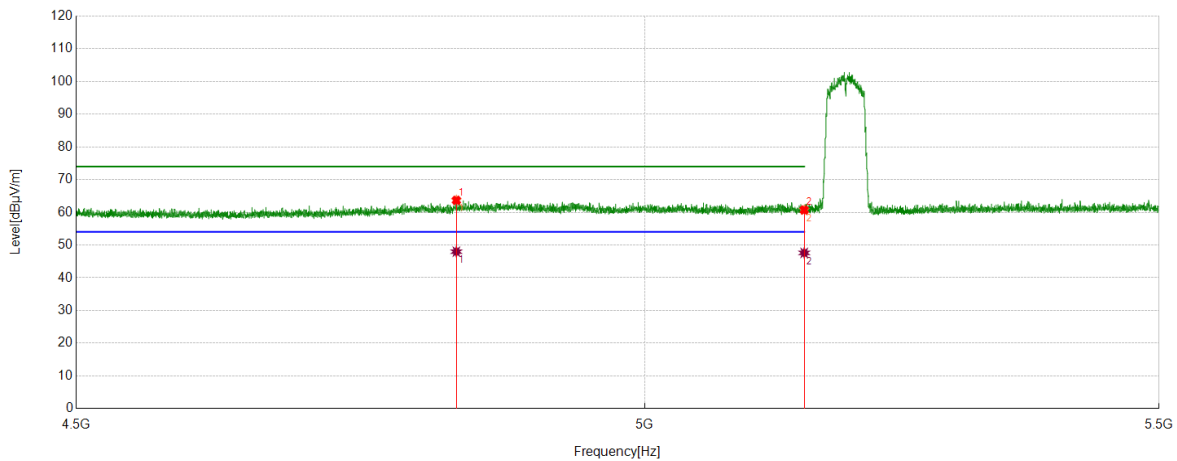

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	4828.5329	43.58	20.09	63.67	74.00	10.33	peak
2	5150.0000	41.25	19.46	60.71	74.00	13.29	peak

AV Result:

No.	Frequency [MHz]	Reading Level [dBuV]	Correct Factor [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	4828.5329	27.89	20.09	47.98	54.00	6.02	AV
2	5150.0000	28.14	19.46	47.60	54.00	6.40	AV

- Remark: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.