

FCC

EMC

TEST REPORT


ISSUED BY
Shenzhen BALUN Technology Co., Ltd.



FOR
3G PERS

ISSUED TO
IdentiFind, LLC

1504 Penny Ln. Keller, TX 76248 USA.

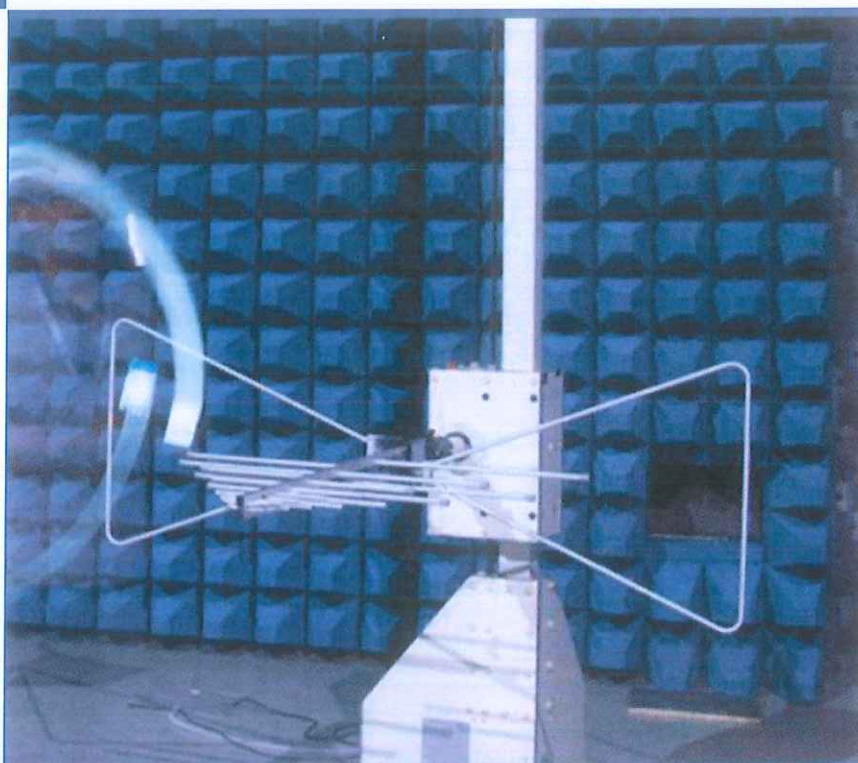

Tested by: Xia Long

Xia Long

(Engineer)

Date

Jun. 30, 2017

Approved by: Liao Jianming

Liao Jianming

(Technical Director)

Date

Jun. 30, 2017

Report No.: BL-SZ1750270-401

EUT Name: 3G PERS

Model Name: IF-3G

Brand Name: IdentiFind

Test Standard: 47 CFR Part 15 Subpart B

FCC ID: 2AMCHIF3G

Test Conclusion: Pass

Test Date: Jun. 26, 2017 ~ Jun. 28, 2017

Date of Issue: Jun. 30, 2017

NOTE: This test report of test results only related to testing samples, which can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. BALUN Laboratory. Any objections should be raised within thirty days from the date of issue. To validate the report, please contact us.

Revision History

Version	Issue Date	Revisions Content
<u>Rev. 01</u>	<u>Jun. 30, 2017</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	GENERAL INFORMATION	4
1.1	Identification of the Testing Laboratory	4
1.2	Identification of the Responsible Testing Location	4
1.3	Laboratory Condition	4
1.4	Announce	4
2	PRODUCT INFORMATION	5
2.1	Applicant Information	5
2.2	Manufacturer Information	5
2.3	Factory Information	5
2.4	General Description for Equipment under Test (EUT)	5
2.5	Ancillary Equipment	6
2.6	Technical Information	6
3	SUMMARY OF TEST RESULTS	7
3.1	Test Standards	7
3.2	Verdict	7
3.3	Test Uncertainty	7
4	GENERAL TEST CONFIGURATIONS	8
4.1	Test Environments	8
4.2	Test Equipment List	8
4.3	Test Enclosure list	9
4.4	Test Configurations	10
4.5	Test Setups	10
4.6	Test Conditions	12
5	TEST ITEMS	13
5.1	Emission Tests	13
ANNEX A	TEST RESULTS	15

A.1	Radiated Emission	15
A.2	Conducted Emission	19
ANNEX B	TEST SETUP PHOTOS	21
ANNEX C	EUT EXTERNAL PHOTOS	21
ANNEX D	EUT INTERNAL PHOTOS	21

1 GENERAL INFORMATION

1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 11524A-1. The laboratory has been listed by US Federal Communications Commission to perform electromagnetic emission measurements. The recognition numbers of test site are 832625. The laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L6791.
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055

1.3 Laboratory Condition

Ambient Temperature	20°C~25°C
Ambient Relative Humidity	45% - 55%
Ambient Pressure	100 kPa - 102 kPa

1.4 Announce

- (1) The test report reference to the report template version v6.5.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (5) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.
- (6) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	IdentiFind, LLC
Address	1504 Penny Ln. Keller, TX 76248 USA.

2.2 Manufacturer Information

Manufacturer	Huizhou tendetel industrial development co., ltd
Address	14D, Heqing Business building, Dongping District, Donghu West Road No.168, Huizhou City, Guangdong Province, China.

2.3 Factory Information

Factory	Huizhou tendetel industrial development co., ltd
Address	14D, Heqing Business building, Dongping District, Donghu West Road No.168, Huizhou City, Guangdong Province, China.

2.4 General Description for Equipment under Test (EUT)

EUT Name	3G PERS
Model Name	IF-3G
Series Model Name	N/A
Description of Model name differentiation	N/A
Hardware Version	V 215
Software Version	215 V1.00
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A
Network and Wireless connectivity	2G Network GSM/GPRS 850 MHz/1900 MHz; 3G Network WCDMA Band 2/5; FSM 315MHz RX only
About the Product	The equipment is 3G PERS, intended for used with information technology equipment.
Note 1: The EUT is a Cellular Wireless Emergency Response System, supporting single SIM card slot.	

2.5 Ancillary Equipment

Ancillary Equipment 1	Charger	
	Brand Name	MINGXIN
	Model No.	MX18W1-0503000V
	Rated Input	100-240 V~, 0.5 A, 50/60 Hz
	Rated Output	5 V=, 3A
Ancillary Equipment 2	RJ11 Cable	
	Length (Approx.)	1.50 m
Ancillary Equipment 3	RJ45 Cable	
	Length (Approx.)	1.84 m

2.6 Technical Information

The requirement for the following technical information of the EUT was tested in this report:

RX frequency band	315MHz
About the Product	The EUT is a Cellular Wireless Emergency Response System, intended for used a 315MHz RX module (tanner) receiving from FCC 15.231 transmitter

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	FCC 47 CFR Part 15 Subpart B (10-1-16 Edition)	Unintentional Radiators
2	ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low- Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

3.2 Verdict

No.	Description	FCC Rule	Test Verdict	Result
1	Radiated Emission	15.109	Pass	Annex A .1
2	Conducted Emission, AC Ports	15.107	Pass	Annex A .2

3.3 Test Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Value
Conducted emissions (9 kHz-30 MHz)	3.23 dB
Radiated emissions (30 MHz-1 GHz)	4.30 dB
Radiated emissions (1 GHz-18 GHz)	4.81 dB
Radiated emissions (18 GHz-40 GHz)	5.71 dB

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

Environment Parameter	Selected Values During Tests			
	Temperature	Voltage	Relative Humidity	Ambient Pressure
Normal Temperature, Normal Voltage (NTNV)	23°C~26°C	AC 120 V/60 Hz	50%-55%	100 to 102 kPa

4.2 Test Equipment List

Radiated Emission Test For Frequency Below 1 GHz						
Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due	Use
EMI Receiver	ROHDE&SCHWA RZ	ESRP	101036	2016.07.05	2017.07.04	☒
Test Antenna- Bi-Log	SCHWARZBECK	VULB 9163	9163-977	2016.07.19	2018.07.18	☒
Test Antenna- Horn	SCHWARZBECK	BBHA 9120D	9120D-1600	2016.07.12	2018.07.11	☐
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60 *7.35m	N/A	2016.08.09	2018.08.08	☒

Radiated Emission Test For Frequency Above 1 GHz						
Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due	Use
EMI Receiver	KEYSIGHT	N9038A	MY53220118	2016.09.09	2017.09.08	☒
Test Antenna- Bi-Log	SCHWARZBECK	VULB 9163	9163-624	2015.07.22	2017.07.21	☐
Test Antenna- Horn	SCHWARZBECK	BBHA 9120D	9120D-1148	2015.07.22	2017.07.21	☒
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	2017.02.21	2019.02.20	☒

Conducted Emission Test						
Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due	Use
EMI Receiver	ROHDE&SCHWA RZ	ESRP	101036	2016.07.05	2017.07.04	☒
LISN	SCHWARZBECK	NSLK 8127	8127-687	2016.07.05	2017.07.04	☒
LISN	SCHWARZBECK	NNLK 8129	8129-462	2016.09.14	2017.09.13	☐
AMN	SCHWARZBECK	NNBM8124	8124-509	2016.07.05	2017.07.04	☐
AMN	SCHWARZBECK	NNBM8124	8124-510	2016.07.05	2017.07.04	☐
ISN	TESEQ	ISN T800	34449	2016.07.05	2017.07.04	☐
Shielded Enclosure	ChangNing	CN-130701	130703	N/A	N/A	☒

4.3 Test Enclosure list


Description	Manufacturer	Model	Serial No.	Length	Description	Use
PC	Dell	015K3N	N/A	N/A	Special Handled	☐
Laptop	Apple	A1465	N/A	N/A	N/A	☐
Printer	HP	DESKJET 1000	N/A	N/A	N/A	☐
Keyboard	Logitech	Y-BP62a	N/A	N/A	N/A	☐
Mouse	Logitech	M100	N/A	N/A	N/A	☐
USB disk	Kingston	N/A	N/A	N/A	N/A	☐
TF Card	Kingston	N/A	N/A	N/A	N/A	☐
VGA Cable	N/A	N/A	N/A	1.5 m	Shielded with core	☐
HDMI Cable	N/A	N/A	N/A	1.5 m	Shielded with core	☐
DVI Cable	N/A	N/A	N/A	1.5 m	Shielded with core	☐
Coaxial video cable	N/A	N/A	N/A	2.0 m	Shielded with core	☐
iPhone	Apple	A1586	N/A	N/A	N/A	☐
Phone	MI	M4	N/A	N/A	N/A	☐
Bluetooth Earphone	SAMSUNG	Gear Circle	N/A	N/A	N/A	☐
GPS/GLONASS Vector signal generator	R&S	N5172B EXG	N/A	N/A	N/A	☐
WIFI Router	TP-LINK	TL-WDR7500	N/A	N/A	N/A	☐
Earphone	N/A	OPPO	N/A	1.1 m	N/A	☐
Car Battery	Camel	55530	N/A	N/A	12 V/55 Ah	☐
Artificial load	N/A	N/A	N/A	N/A	2.5 Ω /100 W	☐
Artificial load	N/A	N/A	N/A	N/A	5 Ω /100 W	☐
Electronic Load	ITECH	IT8511	N/A	N/A	N/A	☐
USB Cable	N/A	N/A	N/A	1.5 m	Shielded with core	☐
DC Power Supply	ITECH	IT6863A	60001401068 7210006	N/A	N/A	☐
LCD Monitor	SAMSUNG	UA32C4000P	N/A	N/A	N/A	☐
LCD Monitor	Dell	U241HB	N/A	N/A	N/A	☐
RJ45 Cable	N/A	N/A	N/A	1.5 m	Shielded with core	☐

4.4 Test Configurations

Test Configurations (TC) No.	Description
Traffic Test Mode	
TC01	<u>The GSM 850 Link Test Mode</u> FSK 315MHz receiving + GSM 850 Link + Adapter + Battery
TC02	<u>The GPRS 850 Link Test Mode</u> FSK 315MHz receiving + EDGE 850 Link + Adapter + Battery
TC03	<u>The GSM 1900 Link Test Mode</u> FSK 315MHz receiving + GSM 1900 Link + Adapter + Battery
TC04	<u>The GPRS 1900 Link Test Mode</u> FSK 315MHz receiving + EDGE 1900 Link + Adapter + Battery
TC05	<u>The WCDMA 850 Link Test Mode</u> FSK 315MHz receiving + WCDMA 850 Link + Adapter + Battery
TC06	<u>The WCDMA 1900 Link Test Mode</u> FSK 315MHz receiving + WCDMA 1900 Link + Adapter + Battery


4.5 Test Setups

Test Setup 1

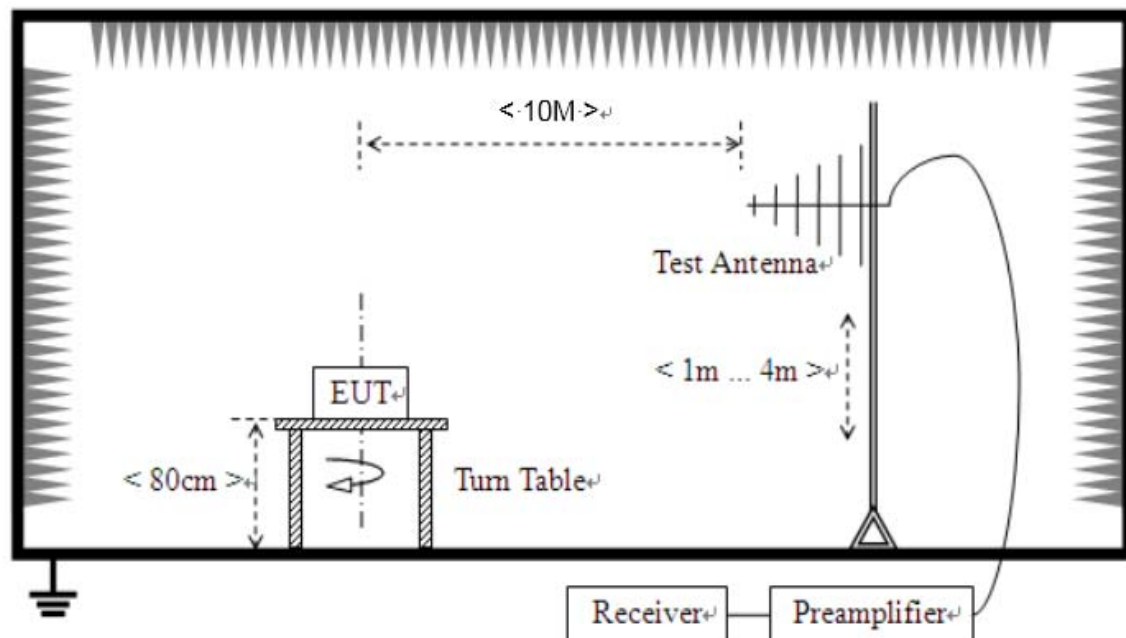


(For Radiated Emission Test (30 MHz-1 GHz))

Test Setup 2

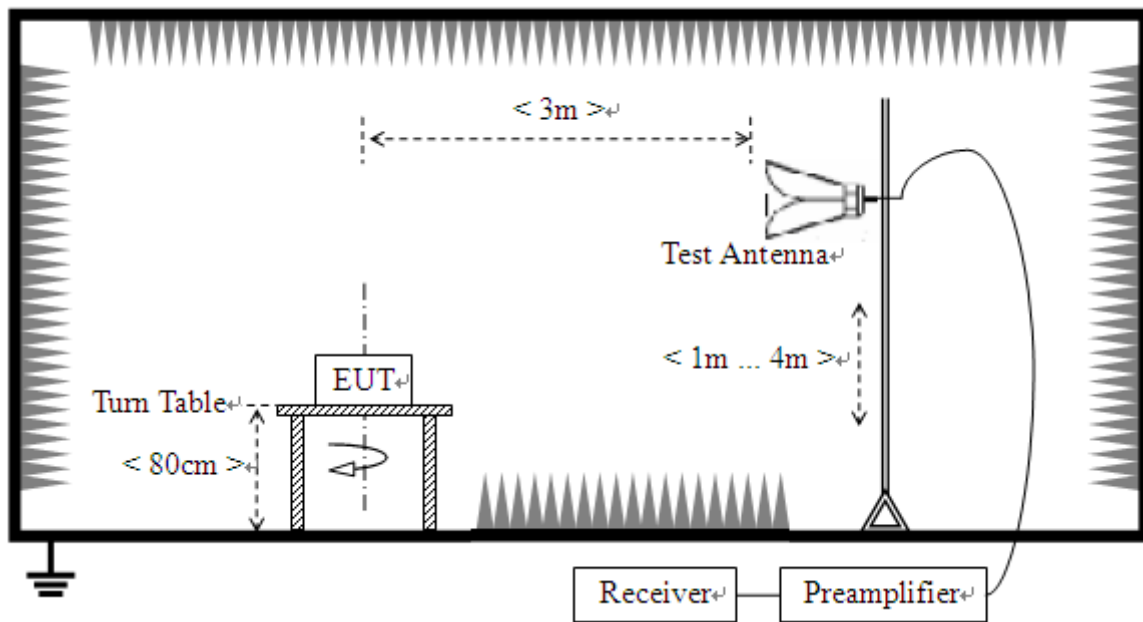

(For Radiated Emission Test (above 1 GHz))

Test Setup 3

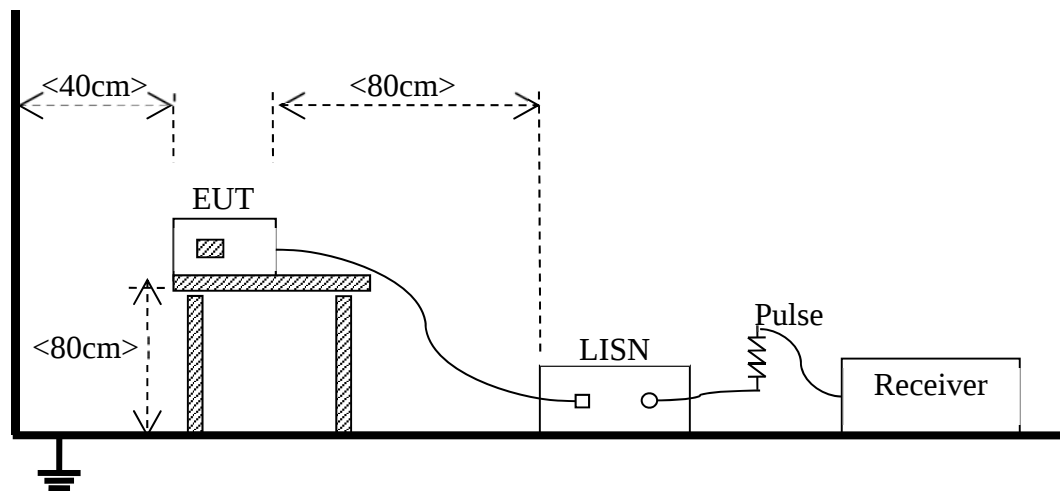

(For Conducted Emission, AC Ports Test)

4.6 Test Conditions

Test Case	Test Conditions	
Radiated Emission	Test Env.	NTNV
	Test Setup	Test Setup 1&2
	Test Configuration	TC01~TC06
Conducted Emission, AC Ports	Test Env.	NTNV
	Test Setup	Test Setup 3
	Test Configuration	TC01~TC06
Note: Based on client request, all normal using modes of the normal function were tested but only the worst test data of the worst mode is reported by this report. The GSM 850 Link test mode is the worst mode in this report.		

5 TEST ITEMS

5.1 Emission Tests

5.1.1 Radiated Emission

5.1.1.1 Limit

Frequency range (MHz)	Class B (at 10 m)		Class A (at 10 m)	
	Field Strength ($\mu\text{V/m}$)	Field Strength (dB $\mu\text{V/m}$)	Field Strength ($\mu\text{V/m}$)	Field Strength (dB $\mu\text{V/m}$)
30 - 88	100	30	90	39
88 - 216	150	33.5	150	43.5
216 - 960	200	36	210	46.4
Above 960	500	44	300	49.5

NOTE:

- 1) Field Strength (dB $\mu\text{V/m}$) = $20 \cdot \log [\text{Field Strength } (\mu\text{V/m})]$.
- 2) In the emission tables above, the tighter limit applies at the band edges.

5.1.1.2 Test Setup

Refer to 4.5 section (test setup 1 to test setup 2) for radiated emission test, the photo of test setup please refer to ANNEX B.

5.1.1.3 Test Procedure

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

An initial pre-scan was performed in the chamber using the EMI Receiver in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by Bi-Log antenna with 2 orthogonal polarities.

5.1.1.4 Test Result

Please refer to ANNEX A.1.

5.1.2 Conducted Emission

5.1.2.1 Test Limit

Frequency range (MHz)	Class A	
	Quasi-peak (dB μ V)	Average (dB μ V)
0.15 - 0.50	79	66
0.50 - 30	73	60

Frequency range (MHz)	Class B	
	Quasi-peak (dB μ V)	Average (dB μ V)
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- 1) The lower limit shall apply at the band edges.
- 2) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50 MHz.

5.1.2.2 Test Setup

Refer to 4.5 section test (test setup 3) for conducted emission, the photo of test setup please refer to ANNEX B.

5.1.2.3 Test Procedure

The EUT is connected to the power mains through a LISN which provides 50 Ω /50 μ H of coupling impedance for the measuring instrument. The test frequency range is from 150 kHz to 30 MHz. The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels that are more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

5.1.2.4 Test Result

Please refer to ANNEX A.2.

ANNEX A TEST RESULTS

A.1 Radiated Emission

Note 1: The symbol of “--” in the table which means not application.

Note 2: For the test data above 1 GHz, according the ANSI C63.4-2014, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.


Test Data and Plots

The test mode: GSM 850 Link

Note 3: Below 1GHz, the 850 MHz signal is filtered out.

A.1.1 Test Antenna Vertical, 30 MHz – 1 GHz @ 10m chamber


RE Test Case_FCC Certification_FCC 15B ClassB 30MHz-1GHz

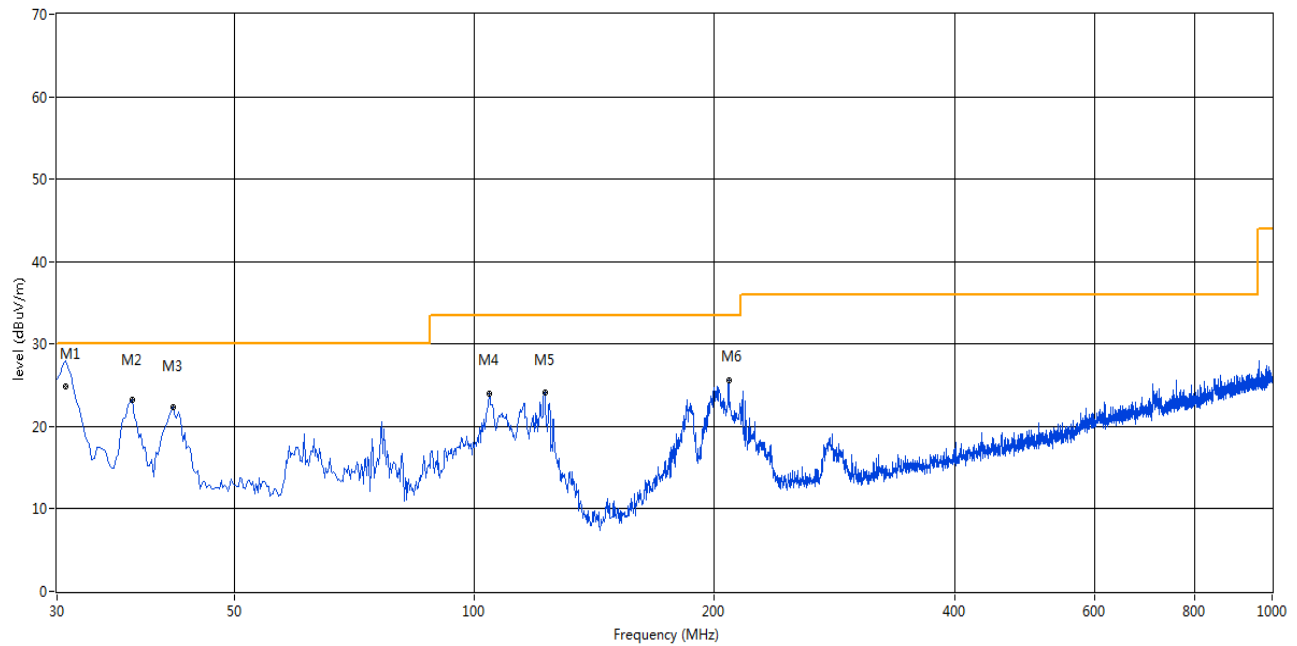

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	30.745	28.32	-16.71	30.0	1.68	Peak	360.00	108.00	Vertical	N/A
1*	30.745	24.87	-16.71	30.0	5.13	QP	360.00	108.00	Vertical	Pass
2	37.273	23.18	-15.21	30.0	6.82	Peak	0.00	200	Vertical	Pass
3	41.880	22.31	-13.87	30.0	7.69	Peak	4.00	300	Vertical	Pass
4	104.429	24.05	-15.05	33.5	9.45	Peak	42.00	100	Vertical	Pass
5	122.612	24.08	-17.58	33.5	9.42	Peak	100.00	100	Vertical	Pass
6	208.435	25.54	-15.20	33.5	7.96	Peak	360.00	200	Vertical	Pass

A.1.2 Test Antenna Horizontal, 30 MHz – 1 GHz @ 10m chamber


RE Test Case_FCC Certification_FCC 15B ClassB 30MHz-1GHz

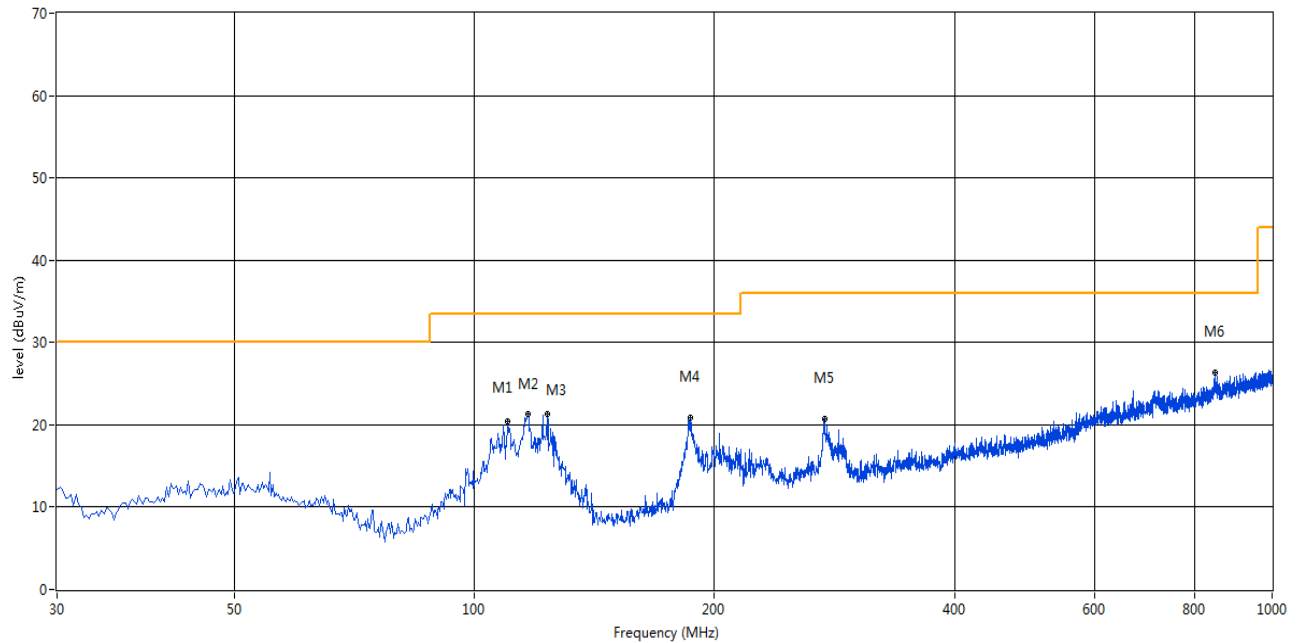

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	110.247	20.36	-15.48	33.5	13.14	Peak	325.00	300	Horizontal	Pass
2	116.793	21.36	-16.46	33.5	12.14	Peak	325.00	300	Horizontal	Pass
3	123.339	21.30	-17.71	33.5	12.20	Peak	0.00	400	Horizontal	Pass
4	186.616	20.89	-16.26	33.5	12.61	Peak	288.00	400	Horizontal	Pass
5	274.864	20.77	-13.02	36.0	15.23	Peak	254.00	400	Horizontal	Pass
6	848.475	26.33	-1.86	36.0	9.67	Peak	302.00	400	Horizontal	Pass

A.1.3 Test Antenna Vertical, 1 GHz – 6 GHz @ 3m Chamber

RE Test case_FCC_Part 15B_FCC Part 15B Class B 1GHz-6GHz

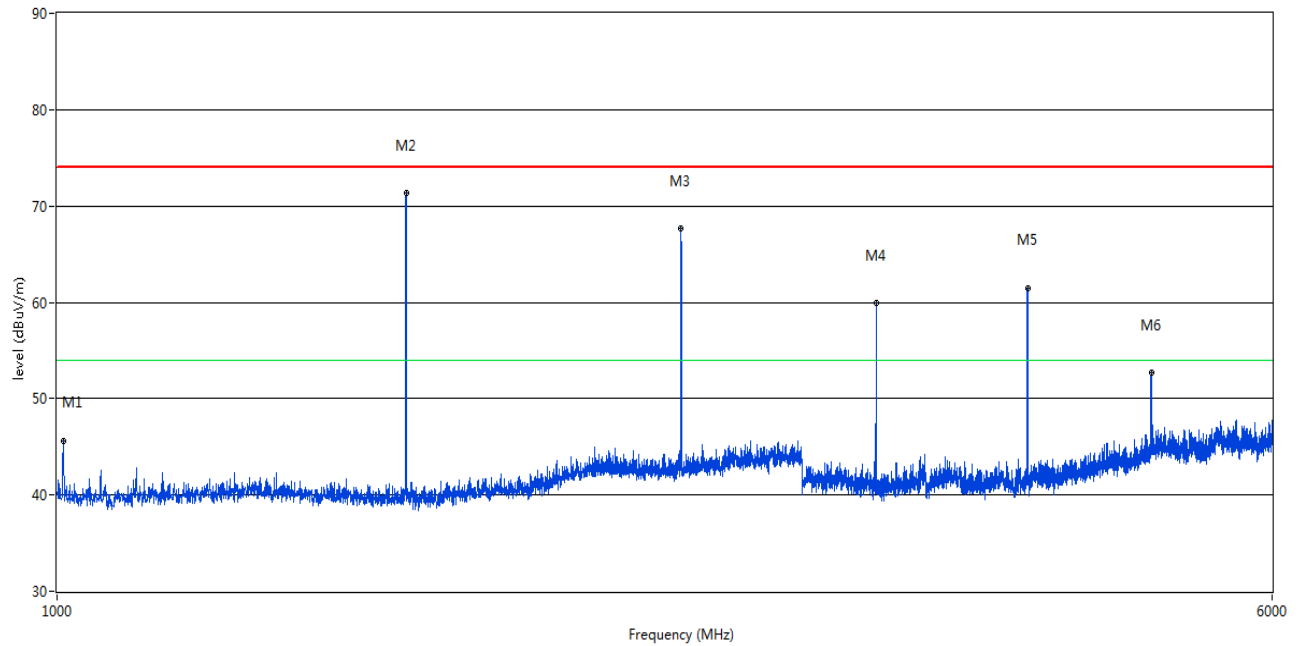


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1009.000	45.57	-7.12	74.0	28.43	Peak	194.00	100	Vertical	Pass
2	1673.000	71.35	-5.89	74.0	2.65	Peak	302.00	100	Vertical	N/A ^{note1}
3	2509.500	67.64	-2.40	74.0	6.36	Peak	323.20	100	Vertical	N/A ^{note1}
4	3346.500	59.90	5.96	74.0	14.10	Peak	194.60	100	Vertical	N/A ^{note1}
5	4183.500	61.51	8.58	74.0	12.49	Peak	337.30	100	Vertical	N/A ^{note1}
6	5019.750	52.65	10.71	74.0	21.35	Peak	121.00	100	Vertical	N/A ^{note1}

Note 1: harmonics for WWAN traffic band, was inspect FCC part 22, Part 24 test report.

A.1.4 Test Antenna Horizontal, 1 GHz – 6 GHz @ 3m Chamber

RE Test case_FCC_Part 15B_FCC Part 15B Class B 1GHz-6GHz

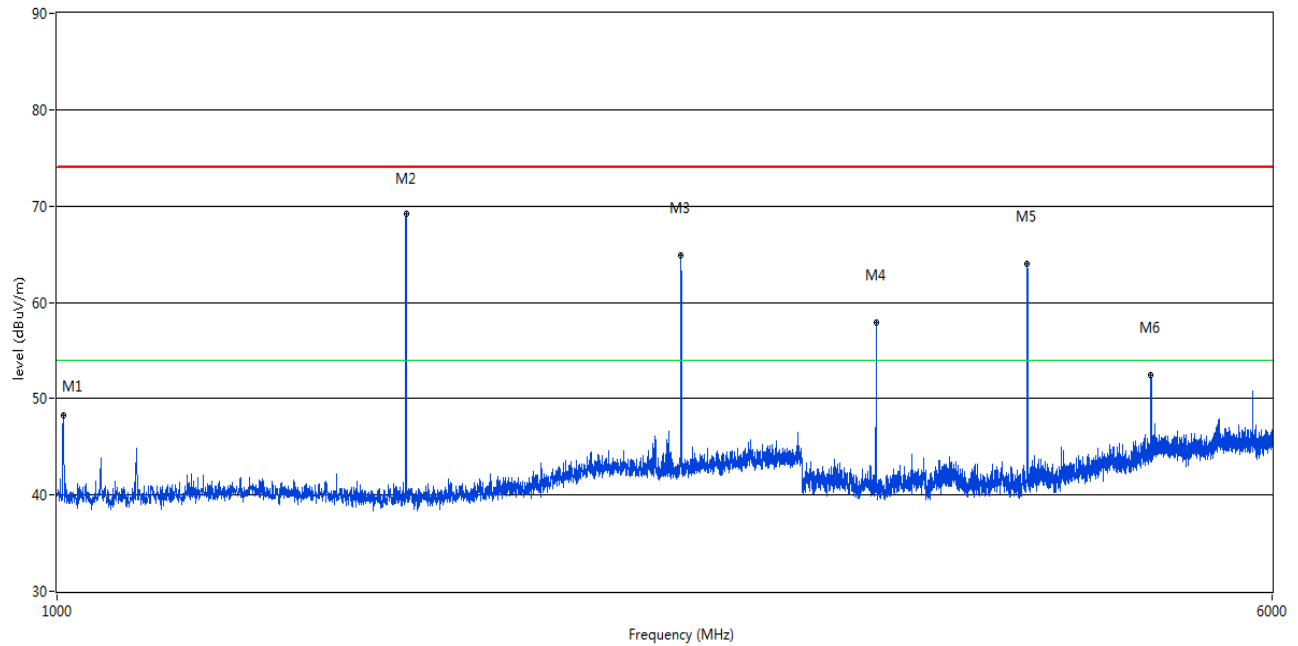

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1009.000	48.25	-7.12	74.0	25.75	Peak	259.30	100	Horizontal	Pass
2	1673.000	69.23	-5.89	74.0	4.77	Peak	279.20	100	Horizontal	N/A ^{note1}
3	2509.500	64.87	-2.40	74.0	9.13	Peak	244.40	100	Horizontal	N/A ^{note1}
4	3345.750	57.87	5.97	74.0	16.13	Peak	98.80	100	Horizontal	N/A ^{note1}
5	4182.750	63.99	8.59	74.0	10.01	Peak	248.00	100	Horizontal	N/A ^{note1}
6	5019.000	52.46	10.69	74.0	21.54	Peak	333.60	100	Horizontal	N/A ^{note1}

Note 1: harmonics for WWAN traffic band, was inspect FCC part 22, Part 24 test report.

A.2 Conducted Emission


Test Data and Plots

The worst test mode: GSM 850 Link

Note: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

A.2.1 L Phase


CE Test case_FCC_CE_FCC PART 15_Class B

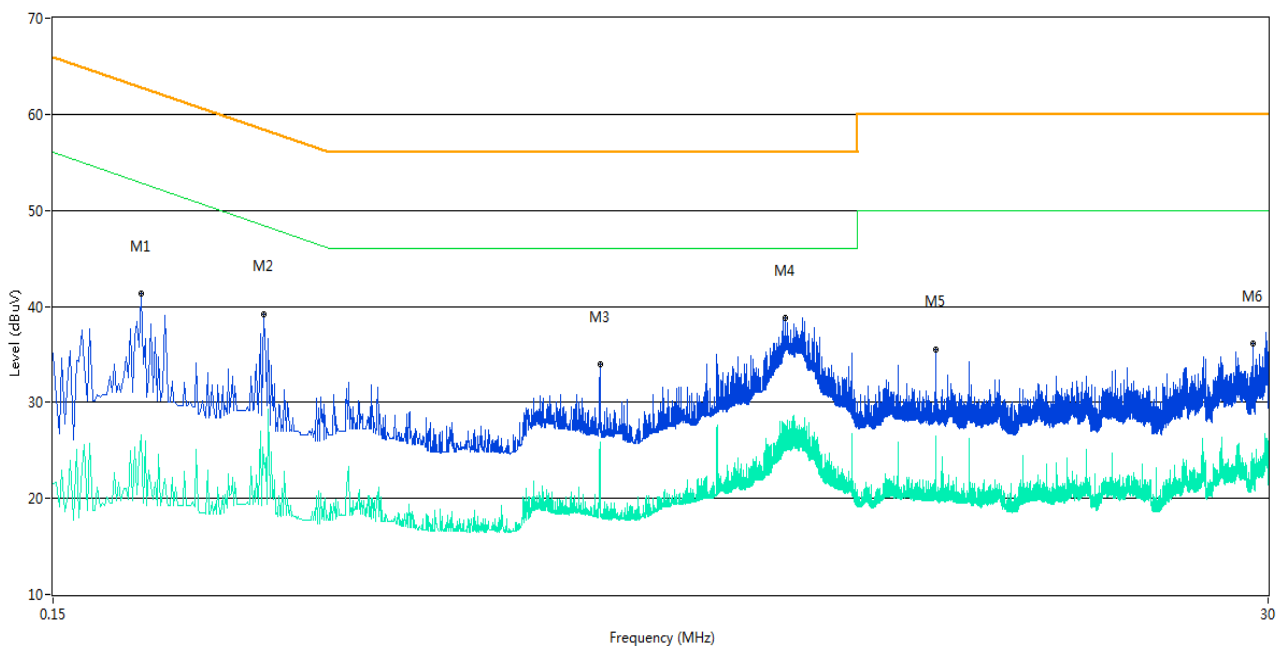

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.220	41.3	11.35	62.8	21.50	Peak	L Line	Pass
1**	0.220	26.6	11.35	52.8	26.20	AV	L Line	Pass
2	0.376	39.2	9.75	58.4	19.20	Peak	L Line	Pass
2**	0.376	23.9	9.75	48.4	24.50	AV	L Line	Pass
3	1.628	34.0	10.13	56.0	22.00	Peak	L Line	Pass
3**	1.628	25.9	10.13	46.0	20.10	AV	L Line	Pass
4	3.654	38.8	10.49	56.0	17.20	Peak	L Line	Pass
4**	3.654	27.3	10.49	46.0	18.70	AV	L Line	Pass
5	7.050	35.5	10.06	60.0	24.50	Peak	L Line	Pass
5**	7.050	26.5	10.06	50.0	23.50	AV	L Line	Pass
6	28.112	36.2	11.68	60.0	23.80	Peak	L Line	Pass
6**	28.112	22.5	11.68	50.0	27.50	AV	L Line	Pass

A.2.2 N Phase

CE Test case_FCC_CE_FCC PART 15_ Class B

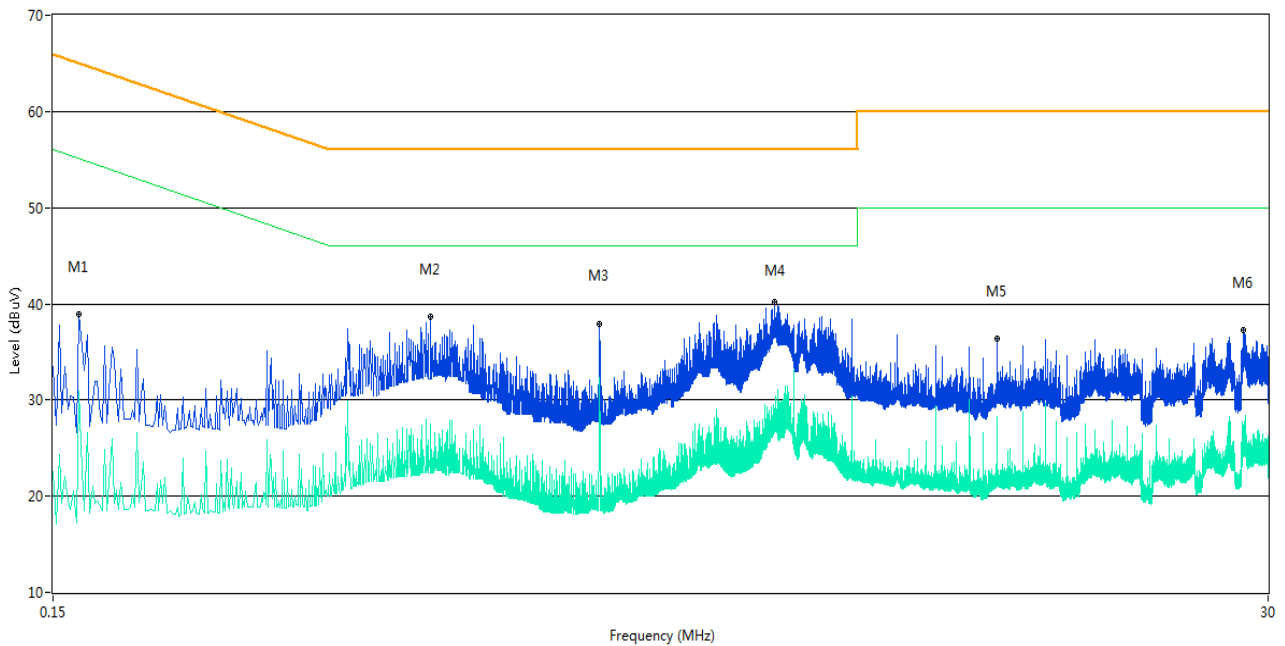

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.168	39.0	9.10	65.1	26.10	Peak	N Line	Pass
1**	0.168	30.9	9.10	55.1	24.20	AV	N Line	Pass
2	0.778	38.7	9.55	56.0	17.30	Peak	N Line	Pass
2**	0.778	27.6	9.55	46.0	18.40	AV	N Line	Pass
3	1.626	37.9	9.99	56.0	18.10	Peak	N Line	Pass
3**	1.626	32.3	9.99	46.0	13.70	AV	N Line	Pass
4	3.480	40.1	10.73	56.0	15.90	Peak	N Line	Pass
4**	3.480	26.4	10.73	46.0	19.60	AV	N Line	Pass
5	9.216	36.4	10.03	60.0	23.60	Peak	N Line	Pass
5**	9.216	27.7	10.03	50.0	22.30	AV	N Line	Pass
6	26.982	37.2	11.74	60.0	22.80	Peak	N Line	Pass
6**	26.982	24.5	11.74	50.0	25.50	AV	N Line	Pass

ANNEX B TEST SETUP PHOTOS

Please refer the document “BL-SZ1750270-AE.PDF”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “BL-SZ1750270-AW.PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “BL-SZ1750270-AI.PDF”.

--END OF REPORT--