

Product ACKNOWLEDG-
EMENT



Specification Number	HG2026011502
Availability date	

Customer name	Zhongli Guanda
Product type	A11 single coil with 12 turns, length L=130mm
Honggui material code	42.5*0.8 Double groove with hole 12 Round back genuine 3M glue
Customer part number	ZLGD-A1-0523

☒ New version released ☐ Version Revision [This specification includes a table of contents spanning 2 pages] [RoHS Compliant Parts]

Authorized strength	Examine and verify	Ratify
Peng Jianji		

Anfu Honggui Electronics Co., Ltd.

Yangmeiling North District New Energy Industrial Park, Zhouhu Town, Anfu County, Ji 'an City, Jiangxi Province 2#Building Peng Jianji:13907060771

This acknowledgment form must be signed and returned within one week after the customer receives it.
Failure to do so will result in production following the standards specified in this acknowledgment.

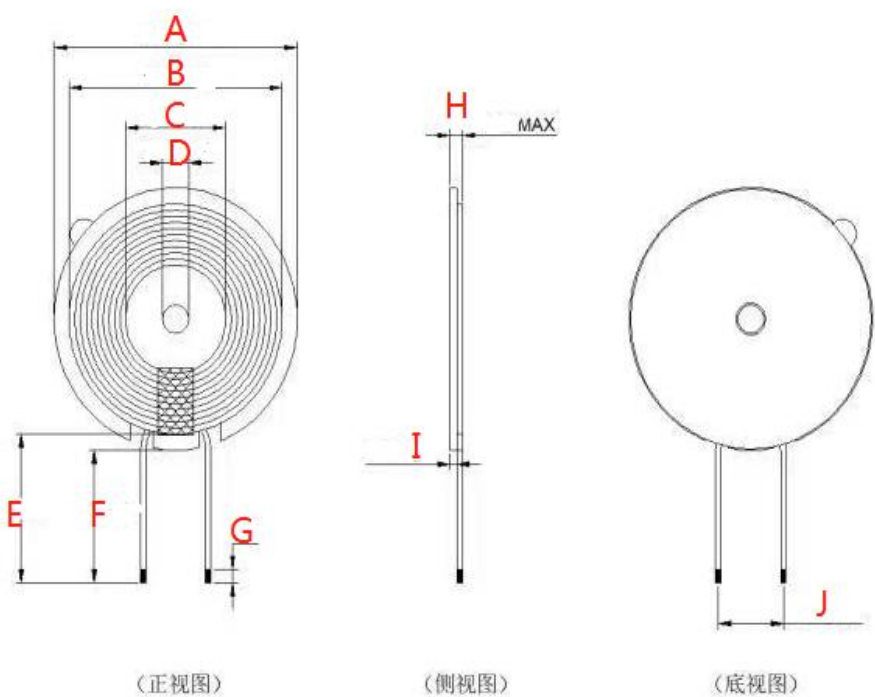
[Customer Approval]

date :

Accept status:☐make a clean breast of☐conditional admission☐disallow

Ratify	Examine and verify	Recheck	Check up

Product SPECIFICATIONS

Customer name	Zhongli Guanda		Customer part number	ZLGD-A1-0523		
Honggui material code	42.5*0.8 Double groove with hole 12 Round back genuine 3M glue		Specification Number	HG2026011502	Edition	01
 (正视图) (侧视图) (底视图)				(unit : mm)		
				A	42.5 ±0.5	
				B	39.0 ±1	
				C	15.0 ±0.5	
				D	5.3	
				E	132.0 ±2	
				F	130.0 ±2	
				G	2.0 ±1	
				H	2.4 ±0.2	
				I	0.8 ±0.1	
				J	8.0	
				(1) Wire diameter:0.08*105P self-adhesive wire pack		
				(2) Number of windings:12TS		
				(3) Do the start and end lines cross: Yes		
				(4) Coil pack 6mm wide high temperature tape		
				(5) The coil and magnetic sheet must be centrally aligned.		
				(6) Spindle back circle 42 genuine 3M glue		
Parameter						
L0	Specifications		Test condition	Measuring and test instruments		
LO	6.8 ±0.3	μH	100KHz/1V	■TH1816B		
Q	>50		100KHz/1V	■TH1816B		
DCR	<70	mΩ	@ 25℃	■CH-502BC		
Service temperature		-40℃~ 125℃				
◆、 bill of material :						
Order number						
1	Name of a part	Material specification	Supplier	Remarks		
2	Magnetic sheet	42.5*0.8 Double groove with holes		PC95 Zinc		
3	Copper line	0.08*105P		Silk-wrapped self-adhesive copper wire		
4	High-temperature tape	6MM		Eco-friendly tape		
5	Tin	High temperature tin ingot		Qian Dao Environmental Protection Tin		
6	Glue	Alban		Eco-friendly glue		
7	Gum	Original 3M adhesive with a diameter of 42				
Authorized strength		Examine and verify			Ratify	
Peng Jianji						