


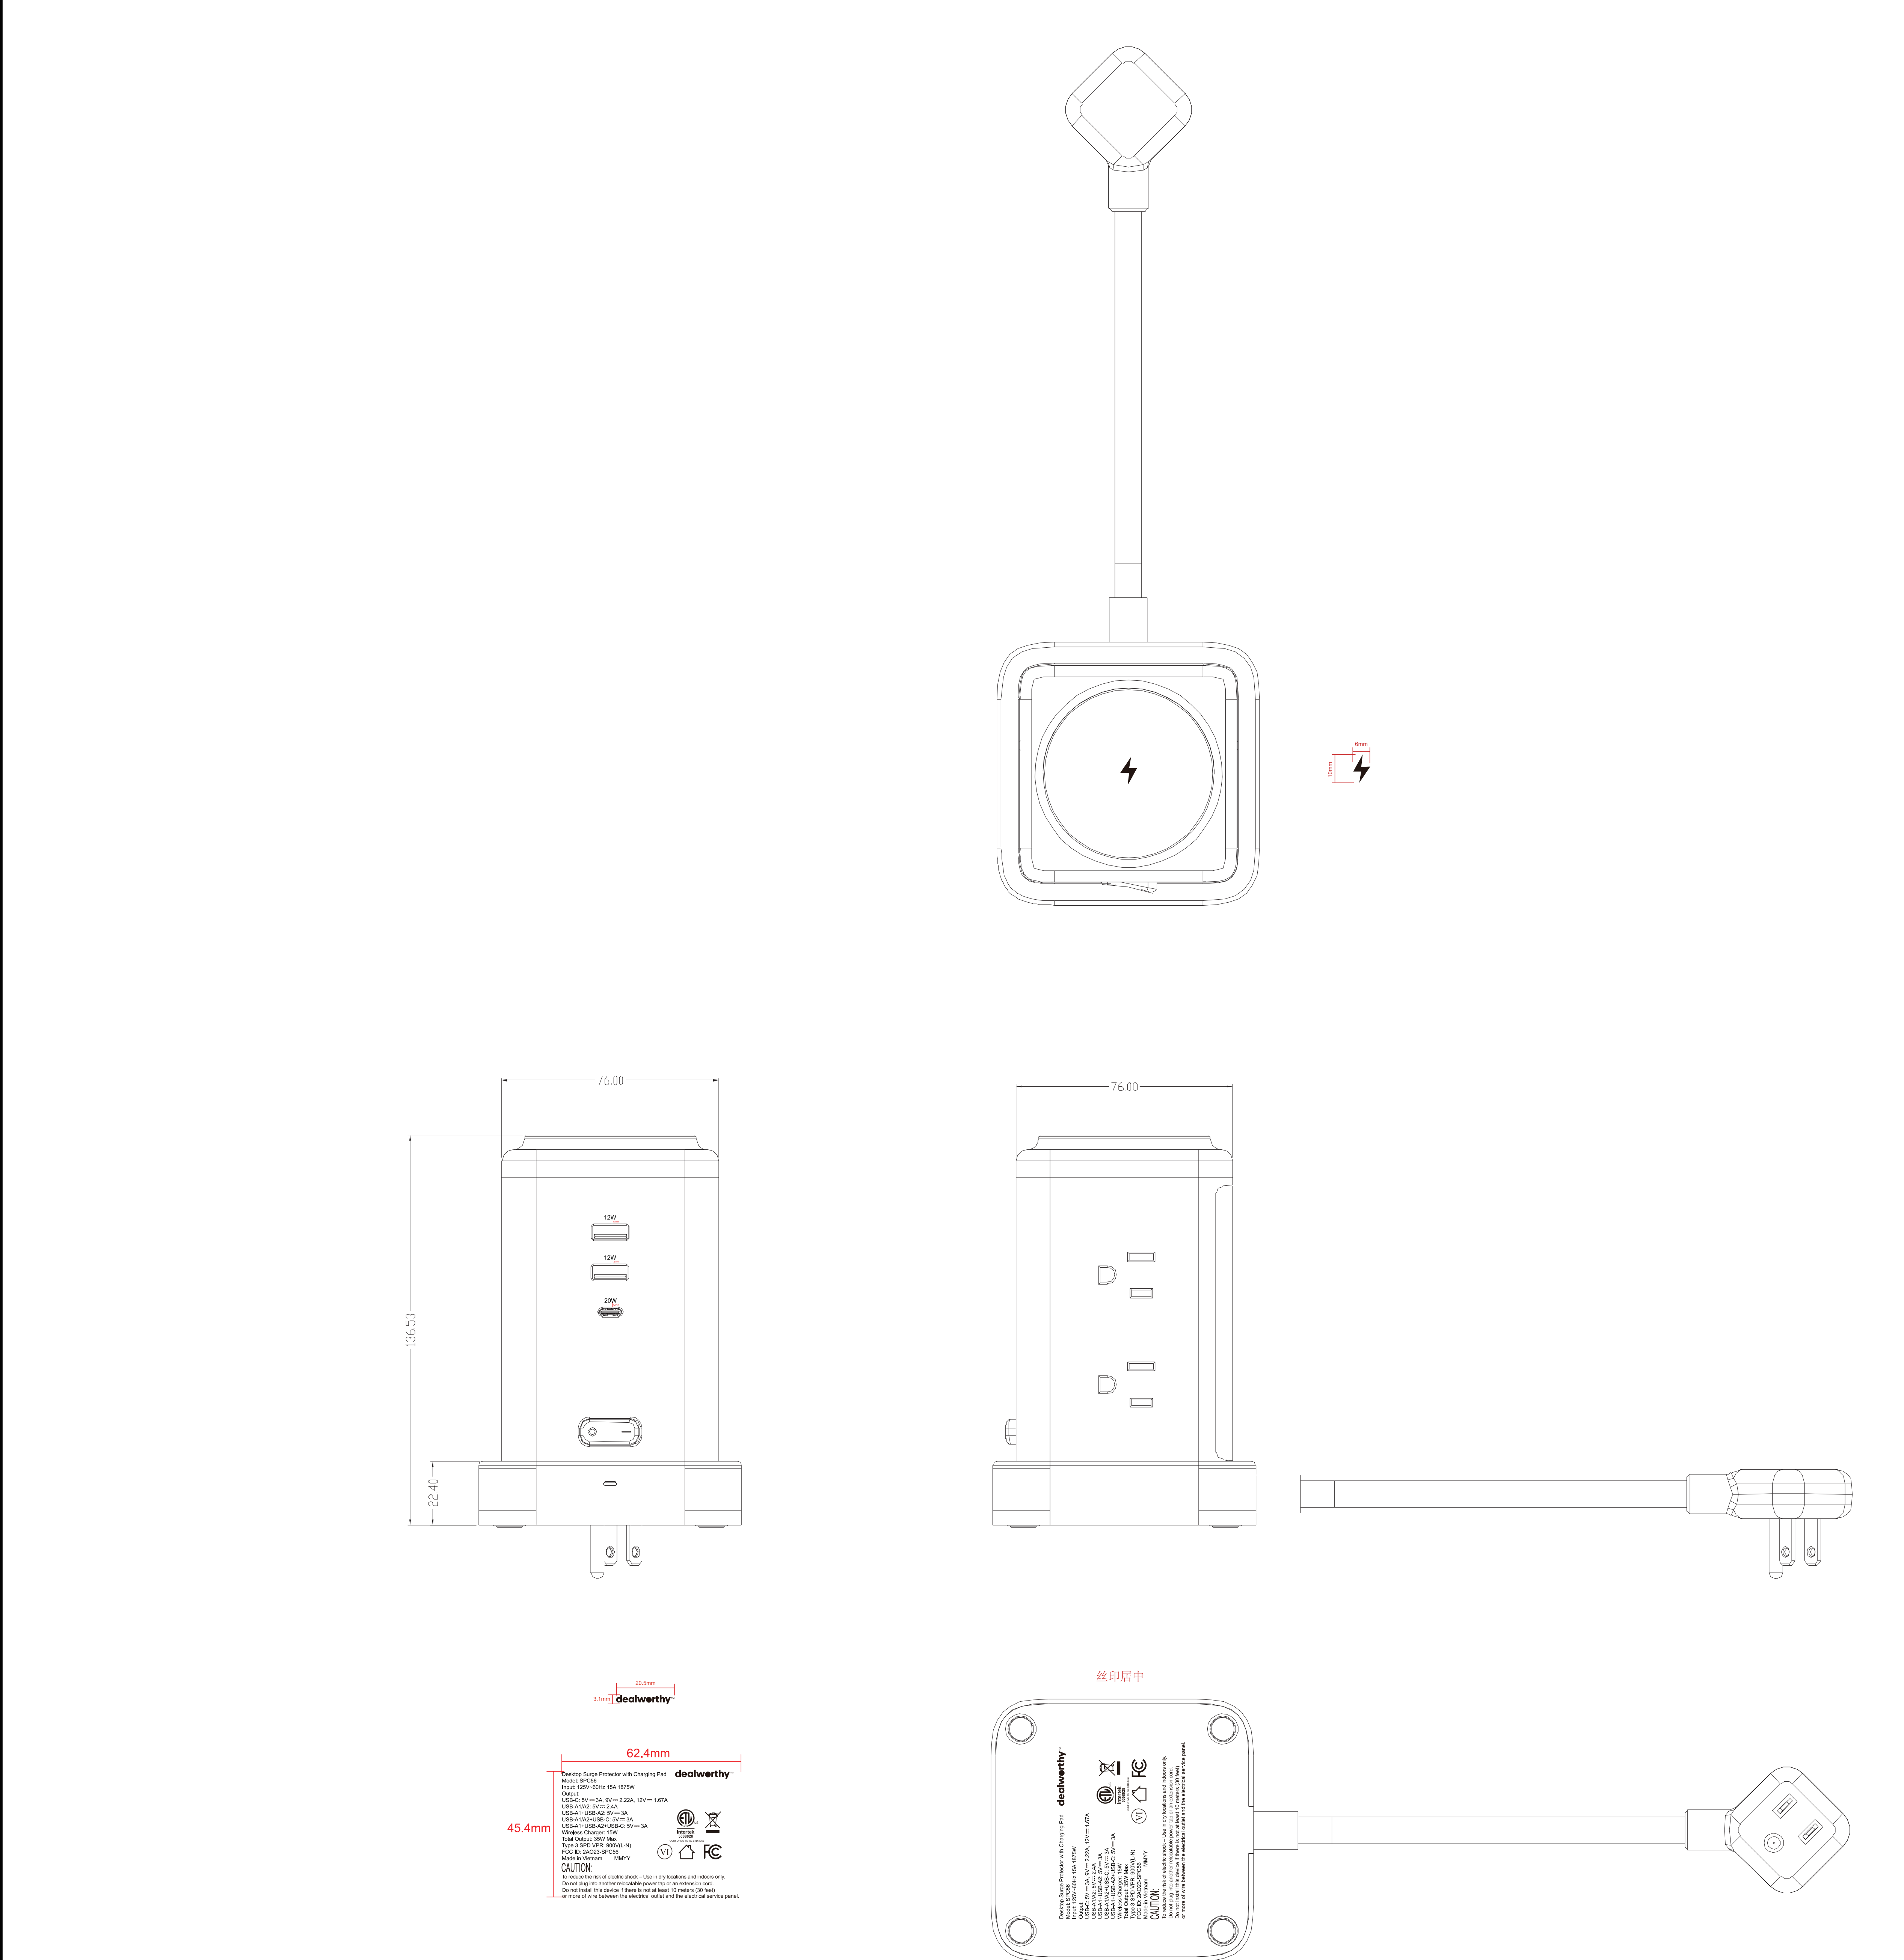

Desktop Surge Protector with Charging Pad
Model: SPC56
Input: 125V~60Hz 15A 1875W
Output:
USB-C: 5V --- 3A, 9V --- 2.22A, 12V --- 1.67A
USB-A1/A2: 5V --- 2.4A
USB-A1+USB-A2: 5V --- 3A
USB-A1/A2+USB-C: 5V --- 3A
USB-A1+USB-A2+USB-C: 5V --- 3A
Wireless Charger: 15W
Total Output: 35W Max
Type 3 SPD VPR: 900V(L-N)
FCC ID: 2AO23-SPC56
Made in Vietnam MMY

dealworthy™

Intertek
5008028
CONFORMS TO UL STD.1363

VI

FC

CAUTION:
To reduce the risk of electric shock – Use in dry locations and indoors only.
Do not plug into another relocatable power tap or an extension cord.
Do not install this device if there is not at least 10 meters (30 feet)
or more of wire between the electrical outlet and the electrical service panel.

MMYY: MM=月份, YY=年份,
每批次由业务或交管提供

放大图

- 技术要求:
- 1.素材颜色为: Black 6C
 - 2.工艺: 丝印冷灰7C (用冷灰9C油墨,丝印后效果为冷灰7C)
 - 3.丝印清晰, 无重影
 - 4.符合ROHS
 - 5.摩擦测试: 用棉布 (专用) 蘸满无水酒精 (浓度≥95%) 施加300g的载荷, 手工擦拭20次, 要求图案内容仍完整且清晰可认。

		变更		
A/1	2024.11.04	发行	新图纸	康志勇
版本	日期	描述	变更内容	变更人

 鹏元晟科技股份有限公司 PYS High Tech Co Ltd			镭雕/丝印图纸		
核准	审核	绘制	内部料号	单位	
		康志勇	PYS-XXXXXXXXX	页数	1/1
			