



承認書 APPROVAL SHEET



客戶/Customer: BeiHai Innotech Technology Co., Ltd
品名/Model: 自粘線圈 Self-bonded coil
發行號碼/Issue No.: AP-DG-1804018
規格/Description: BT-R5010HU-A11S186
版本號/Version: A.0.0
客戶料號/Customer P/N: N/A
製作日期/Issue Date: 2018-04-25

承認說明/Approval Remark:

客戶回簽/Customer Approval Feedback

尊敬的客戶:請確認好此份規格承認書後並及時簽回一份給我司。若未簽回,後續貴司正式下單,視同承認此承認書。謝謝! Dear customer: please confirm this specification and signback for us in time.If not sign back, follow-up your company official order shall be regarded as to recognize it. Thank you!

☐ 深圳市有勵電子有限公司
BTCOIL ELECTRONICS LIMITED
No.55,the Second Industrial Zone, Houting Village, Shajing Town,
Baoan District, Shenzhen City.PRC 518104
深圳市寶安區沙井鎮後亭村第二工業區第55棟 518104
Tel: 86-755-27223880 Fax: 86-755-27223836
E-mail: qc@btcoil.com

☒ 東莞市有勵電子有限公司
BTCOIL ELECTRONICS(Dongguan) LIMITED
No.336,the 3rd Zone Wushiling, Yangwu Village, Dalang Town,
Dongguan City, Guangdong Province.PRC 523789
廣東省東莞市大朗鎮洋烏村烏石嶺三區336號 523789
Tel: 86-769-8923 8020 Fax: 86-769-8310 0273
E-mail: qc-dg@btcoil.com

☐ 中山有匯電子有限公司
BTCOIL ELECTRONICS (Zhongshan) LIMITED
3/F building C, Baishawan Industrial Zone,Yangtze river North
Road,Zhongshan City,Guangdong Province.PRC 528403
中山市東區長江北路北段白沙灣工業園C幢三樓
Tel: 86-760-23889250 Fax: 86-760-23889253
E-mail: qc-zs@btcoil.com

☐ 有勵電子(昆山)有限公司
BTCOIL ELECTRONICS (Kunshan) LIMITED
No. 168, Xinji Road,Bacheng Town,Kunshan City,Jiangsu Province.
PRC 215300
江蘇省昆山市巴城鎮欣基路168號
Tel: 86-512-5706 5767 Fax: 86-512-5706 5769
E-mail: qc-ks@btcoil.com

業務單位/Sales Dep:

核准 APPROVED	審查 CHECKED
黃愛生	叶世麟

工程單位/Engineering Unit


核准 APPROVED	審查 CHECKED	製圖 DRAWN
刘春雨	欧奇林	廖水秀

承認書

APPROVAL SHEET

客戶 Customer	嘉信高	規格 Description	BT-R5010HU-A11S186	發行號碼 Issue No.	AP-DG-1804018
客戶料號 Customer P/N	N/A	客戶圖號 Customer Doc	N/A	版本號 Version	A.0.0

1.尺寸 Dimension(unit: mm):

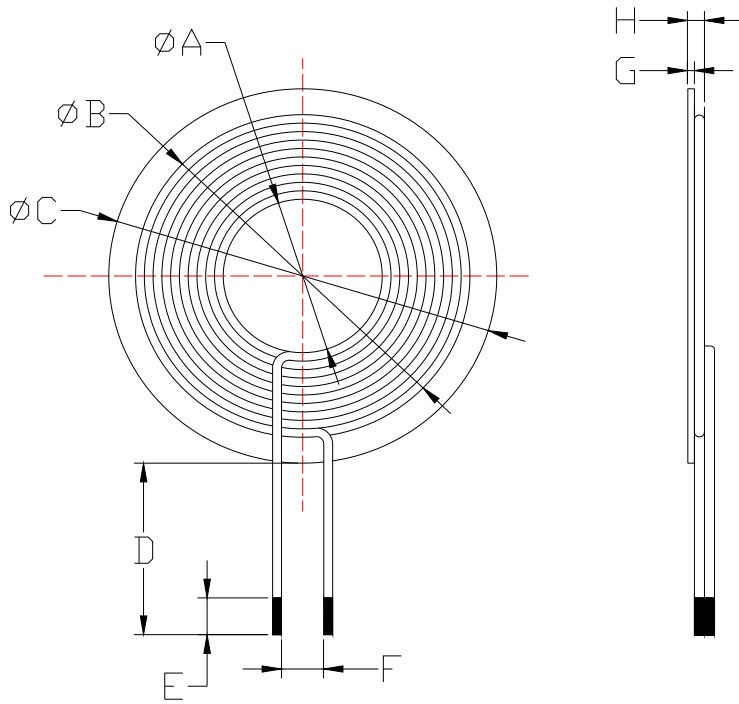

位置 Position	尺寸 Dimension	公差 Tolerance
A	20.5	±0.5
B	43.0	±0.1
C	50.0	±1.0
D	25.0	±2.0
E	4.5	±1.5
F	5.0	±2.0
G	1.0	±0.15
H	2.7	MAX

2.备注 Note:

- (1) Anti-clockwise way of winding. Turns:10TS,single layer.
- (2) Two leads are cross.
- (3) Inductance:6.3uH±10% (100KHz/1V), Resistance:50.0 mΩ MAX (25℃) ;
- (4) Materials meet the RoHS and Reach standard.

3.材料清單 Raw material:

No.	材料 Material	規格型號 DescriptionPart No.	供應商1 Supplier1	供應商2 Supplier2	供應方式 Method of Supply	備註 Note
1	丙酮丝包线 Acetone silk-covered wire	Φ0.08*105P 2UEW-F/BT UDTC/155 (L20.5*0.08*105P*10TS)	BTB-253		自 購 Self-buying	
2	磁片	PC95 50.0*1.0MM	BTB-346	BTB-326	自 購 Self-buying	
3	無鉛錫 Lead-free tin	M20E Sn99.3Cu0.7	BTB-330		自 購 Self-buying	
4	胶水 Glue	AS-1008W 白胶	BTB-326		自 購 Self-buying	
(製圖)DRAWN: 廖水秀 (審查)CHECKED: 欧奇林 (核准) APPROVED: 刘春雨 (客户)Customer:						