

FCC PART 22H, PART 24E
MEASUREMENT AND TEST REPORT

For

Epik One America Corporation

170 Ocean Lane Dr. #705, Key Biscayne, FL 33149, United States

FCC ID: 2AO6ZK500

Report Type: Original Report	Product Type: Smartphone
Report Number: RSZ180322001-00A	
Report Date: 2018-04-09	
Jimmy Xiao <i>Jimmy Xiao</i>	
Reviewed By: RF Engineer	
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government. * This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “*”.

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY	3
MEASUREMENT UNCERTAINTY	4
TEST FACILITY	4
SYSTEM TEST CONFIGURATION	5
DESCRIPTION OF TEST CONFIGURATION	5
EQUIPMENT MODIFICATIONS	5
SUPPORT EQUIPMENT LIST AND DETAILS	5
BLOCK DIAGRAM OF TEST SETUP	5
SUMMARY OF TEST RESULTS	6
TEST EQUIPMENT LIST	7
FCC §1.1307(B) & §2.1093 - RF EXPOSURE INFORMATION.....	8
APPLICABLE STANDARD	8
TEST RESULT	8
FCC §2.1047 - MODULATION CHARACTERISTIC	9
FCC § 2.1046, § 22.913 (A) & § 24.232 (C) - RF OUTPUT POWER.....	10
APPLICABLE STANDARD	10
TEST PROCEDURE	10
TEST DATA	10
FCC §2.1049, §22.917, §22.905 & §24.238 - OCCUPIED BANDWIDTH	15
APPLICABLE STANDARD	15
TEST PROCEDURE	15
TEST DATA	15
FCC §2.1051, §22.917(A) & §24.238(A) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS	21
APPLICABLE STANDARD	21
TEST PROCEDURE	21
TEST DATA	21
FCC § 2.1053; § 22.917 (A);§ 24.238 (A) -SPURIOUS RADIATED EMISSIONS	27
APPLICABLE STANDARD	27
TEST PROCEDURE	27
TEST DATA	27
FCC § 22.917 (A); § 24.238 (A) - BAND EDGES.....	30
APPLICABLE STANDARD	30
TEST PROCEDURE	30
TEST DATA	30
FCC § 2.1055; § 22.355; § 24.235 - FREQUENCY STABILITY	39
APPLICABLE STANDARD	39
TEST PROCEDURE	39
TEST DATA	40

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Epik One America Corporation*'s product, model number: *K500 (FCC ID: 2AO6ZK500)* or the "EUT" in this report was a *Smartphone*, which was measured approximately: 146.3 mm (L) × 73.1 mm (W) × 10.3 mm (H), rated with input voltage: DC 3.8V from rechargeable Li-ion battery or DC 5.0V from adapter.

Adapter Information:

Model: ZHY-QU050100S

Input: AC 100-240V, 50/60Hz, 0.2A

Output: DC 5.0V, 1A

**All measurement and test data in this report was gathered from production sample serial number: 1800363 (Assigned by BACL, Shenzhen). The EUT supplied by the applicant was received on 2018-03-22.*

Objective

This type approval report is prepared on behalf of *Epik One America Corporation* in accordance with Part 2, Part 22-Subpart H, Part 24-Subpart E of the Federal Communication Commission's rules.

The objective is to determine the compliance of EUT with FCC rules for output power, modulation characteristic, occupied bandwidth, and spurious emission at antenna terminal, spurious radiated emission, frequency stability, and band edge.

Related Submittal(s)/Grant(s)

FCC Part 15.247 DSS & DTS submissions with FCC ID: 2AO6ZK500

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-Part J as well as the following parts:

Part 22 Subpart H - Public Mobile Services

Part 24 Subpart E - Personal Communication Services

Applicable Standards: TIA/EIA 603-D.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		$\pm 5\%$
RF output power, conducted		$\pm 1.5\text{dB}$
Unwanted Emission, conducted		$\pm 1.5\text{dB}$
Emissions, radiated	Below 1GHz	$\pm 4.70\text{dB}$
	Above 1GHz	$\pm 4.80\text{dB}$
Temperature		$\pm 1^\circ\text{C}$
Supply voltages		$\pm 0.4\%$

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 342867, the FCC Designation No.: CN1221.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The EUT was configured for testing according to TIA/EIA-603-D.

The final qualification test was performed with the EUT operating at normal mode.


Equipment Modifications

No modification was made to the EUT.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891

Block Diagram of Test Setup

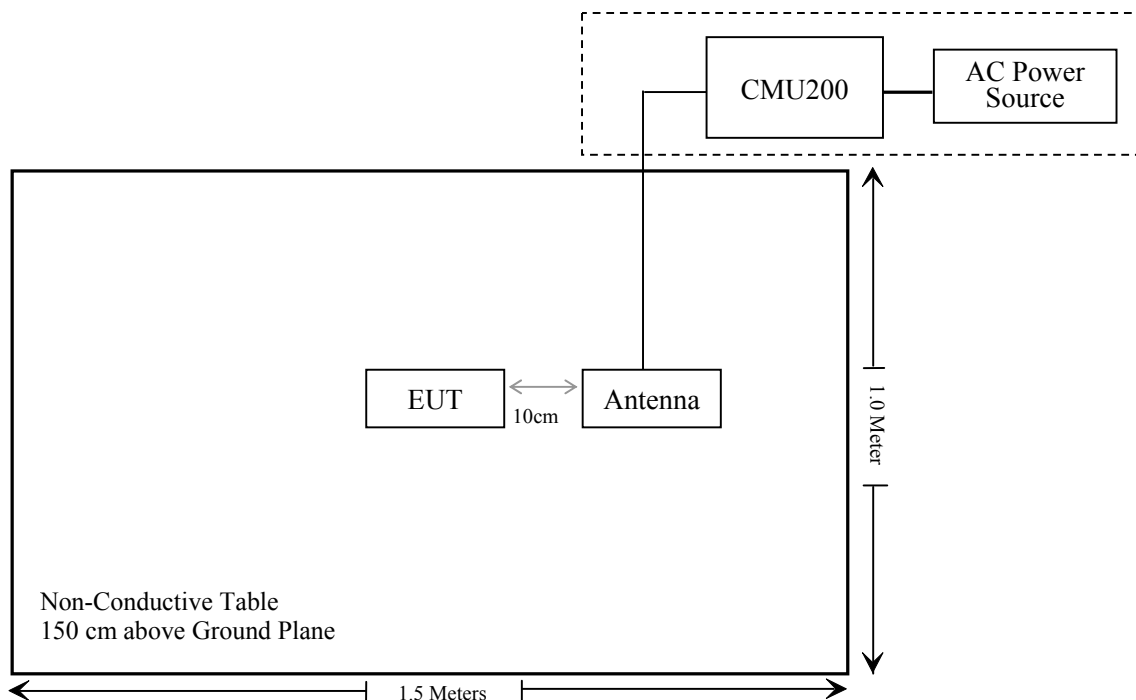

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1307, §2.1093	RF Exposure (SAR)	Compliance*
§2.1046; § 22.913 (a); § 24.232 (c)	RF Output Power	Compliance
§ 2.1047	Modulation Characteristics	Not Applicable
§ 2.1049; § 22.905; § 22.917; § 24.238	Occupied Bandwidth	Compliance
§ 2.1051; § 22.917 (a); § 24.238 (a)	Spurious Emissions at Antenna Terminal	Compliance
§ 2.1053; § 22.917 (a); § 24.238 (a)	Field Strength of Spurious Radiation	Compliance
§ 22.917 (a); § 24.238 (a)	Band Edge	Compliance
§ 2.1055; § 22.355; § 24.235	Frequency stability	Compliance

Compliance*: Please refer to SAR report released by BACL, report number: RSZ180322001-20.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test					
Sunol Sciences	Horn Antenna	DRH-118	A052604	2017-12-22	2020-12-21
Rohde & Schwarz	Signal Analyzer	FSEM	845987/005	2017-04-24	2018-04-24
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2017-12-22	2020-12-21
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2017-05-21	2018-05-21
HP	Amplifier	HP8447E	1937A01046	2017-11-19	2018-05-21
Anritsu	Signal Generator	68369B	004114	2017-12-07	2018-12-07
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2018-01-11	2019-01-11
COM POWER	Dipole Antenna	AD-100	041000	NCR	NCR
A.H. System	Horn Antenna	SAS-200/571	135	2015-08-18	2018-08-17
Ducommun technologies	RF Cable	UFA210A-1-4724-30050U	MFR64369 223410-001	2017-11-19	2018-05-21
Ducommun technologies	RF Cable	104PEA	218124002	2017-11-19	2018-05-21
Ducommun technologies	RF Cable	RG-214	1	2017-11-19	2018-05-21
Ducommun technologies	RF Cable	RG-214	2	2017-11-22	2018-05-22
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-04	2017-12-29	2020-12-28
Ducommun technologies	Horn Antenna	ARH-4223-02	1007726-03	2017-12-29	2020-12-28
Ducommun technologies	Pre-amplifier	ALN-22093530-01	991373-01	2017-08-03	2018-08-03
RF Conducted Test					
Rohde & Schwarz	SPECTRUM ANALYZER	FSU26	200120	2017-12-24	2018-12-24
ESPEC	Temperature & Humidity Chamber	EL-10KA	09107726	2017-12-21	2018-12-21
Long Wei	DC Power Supply	TPR-6420D	398363	NCR	NCR
Rohde & Schwarz	Wideband Radio Communication Tester	CMU200	106891	2017-12-14	2018-12-14
Ducommun technologies	RF Cable	RG-214	3	2017-11-22	2018-05-22
N/A	Power Splitter	N/A	N/A	2017-05-21	2018-05-21

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1307(b) & §2.1093 - RF EXPOSURE INFORMATION

Applicable Standard

FCC§1.1310 and §2.1093.

Test Result

Compliance, please refer to the SAR report: RSZ180322001-20.

FCC §2.1047 - MODULATION CHARACTERISTIC

According to FCC § 2.1047(d), Part 22H, 24E there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

FCC § 2.1046, § 22.913 (a) & § 24.232 (c) - RF OUTPUT POWER**Applicable Standard**


According to FCC §2.1046 and §22.913 (a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

According to FCC §2.1046 and §24.232 (C), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB.

Test Procedure*Conducted method:*

The RF output of the transmitter was connected to the CMU200 through sufficient attenuation.

*Radiated method:*

TIA 603-D section 2.2.17

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Simon Wang on 2018-03-28.

Conducted Power**Cellular Band (Part 22H)**

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)
GSM	128	824.2	31.43	38.45
	190	836.6	31.58	38.45
	251	848.8	31.76	38.45

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	
GPRS	128	824.2	31.43	30.49	28.31	26.89	38.45
	190	836.6	31.58	30.56	28.45	26.92	38.45
	251	848.8	31.67	30.78	28.63	26.87	38.45

Mode	Test Mode	3GPP Sub Test	Average Output Power (dBm)		
			Low Frequency	Middle Frequency	High Frequency
WCDMA (Band V)	RMC		21.76	21.09	22.37
	HSDPA	1	20.86	20.89	21.36
		2	20.62	20.69	21.46
		3	20.74	20.87	21.68
		4	20.98	20.99	21.89
	HSUPA	1	20.90	20.54	21.36
		2	20.54	20.53	21.49
		3	20.86	20.74	20.63
		4	20.48	20.62	20.68
		5	20.83	20.77	20.74

PCS Band (Part 24E)

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)
GSM	512	1850.2	28.49	33
	661	1880.0	28.46	33
	810	1909.8	28.38	33

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	
GPRS	512	1850.2	28.37	27.71	25.58	24.25	33
	661	1880.0	28.29	27.53	25.64	24.65	33
	810	1909.8	28.15	27.32	25.47	24.71	33

Mode	Test Mode	3GPP Sub Test	Average Output Power (dBm)		
			Low Frequency	Middle Frequency	High Frequency
WCDMA (Band II)	RMC		21.57	21.48	21.16
	HSDPA	1	20.47	20.40	20.31
		2	20.52	20.63	20.64
		3	20.63	20.74	20.63
		4	20.67	20.67	20.42
	HSUPA	1	20.52	20.47	20.30
		2	20.53	20.64	20.49
		3	20.69	20.48	20.47
		4	20.58	20.39	20.50
		5	20.63	20.49	20.63

Peak-to-average ratio (PAR)**Cellular Band**

Mode	Channel	PAR (dB)	Limit (dB)
GSM	Low	10.31	13
	Middle	10.28	13
	High	10.21	13

Mode	Channel	PAR (dB)	Limit (dB)
WCDMA (BPSK)	Low	3.32	13
	Middle	3.48	13
	High	3.66	13
HSDPA (16QAM)	Low	3.57	13
	Middle	3.47	13
	High	3.36	13
HSUPA (BPSK)	Low	3.42	13
	Middle	3.24	13
	High	3.57	13

PCS Band

Mode	Channel	PAR (dB)	Limit (dB)
GSM	Low	11.05	13
	Middle	11.14	13
	High	11.25	13

Mode	Channel	PAR (dB)	Limit (dB)
WCDMA (BPSK)	Low	3.43	13
	Middle	3.38	13
	High	3.46	13
HSDPA (16QAM)	Low	3.79	13
	Middle	3.68	13
	High	3.82	13
HSUPA (BPSK)	Low	3.76	13
	Middle	3.91	13
	High	3.86	13

Radiated Power**GSM Mode:**

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	FCC Part 22H/24E	
			Height (m)	Polar (H/V)	Level (dBm)	Cable loss (dB)	Antenna Gain (dB)		Limit (dBm)	Margin (dB)
ERP for Cellular Band (Part 22H), Middle Channel										
836.6	100.89	282	1.0	H	30.9	0.67	0	30.23	38.45	8.22
836.6	99.97	128	2.4	V	30.0	0.67	0	29.33	38.45	9.12
EIRP for PCS Band (Part 24E), Middle Channel										
1880	88.96	258	1.2	H	18.9	1.30	9.40	27.0	33	6.0
1880	88.83	214	1.0	V	18.6	1.30	9.40	26.7	33	6.3

WCDMA Mode:

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	FCC Part 22H/24E	
			Height (m)	Polar (H/V)	Level (dBm)	Cable loss (dB)	Antenna Gain (dB)		Limit (dBm)	Margin (dB)
ERP for WCDMA Band V (Part 22H), Middle Channel										
836.6	93.53	282	1.0	H	23.5	0.67	0	22.83	38.45	15.62
836.6	95.4	128	2.4	V	25.4	0.67	0	24.73	38.45	13.72
EIRP for WCDMA Band II (Part 24E), Middle Channel										
1880	83.79	144	1.2	H	13.7	1.30	9.40	21.8	33	11.2
1880	83.2	217	2.0	V	12.9	1.30	9.40	21.0	33	12.0

Note:

All above data were tested with no amplifier.

Absolute Level = Substituted Level - Cable loss + Antenna Gain

Margin = Limit- Absolute Level


FCC §2.1049, §22.917, §22.905 & §24.238 - OCCUPIED BANDWIDTH**Applicable Standard**

FCC 47 §2.1049, §22.917, §22.905 and §24.238.

Test Procedure

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at 5 kHz (GSM) & 100 kHz (WCDMA) and the 26 dB & 99% bandwidth was recorded.

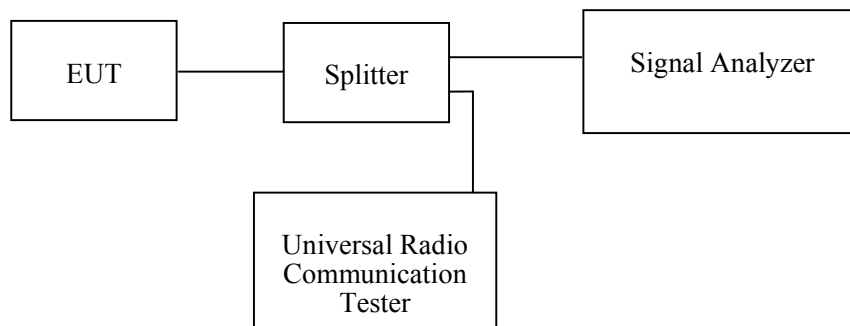**Test Data****Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Simon Wang on 2018-03-28.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to the following tables and plots.

Cellular Band (Part 22H)

Mode	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GSM(GMSK)	836.6	245.2	318.9

Mode	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
RMC (BPSK)	836.6	4.151	4.696
HSUPA (BPSK)	836.6	4.151	4.696
HSDPA (16QAM)	836.6	4.151	4.679


PCS Band (Part 24E)

Mode	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GSM(GMSK)	1880	245.2	320.5

Mode	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
RMC (BPSK)	1880.0	4.167	4.728
HSUPA (BPSK)	1880.0	4.167	4.712
HSDPA (16QAM)	1880.0	4.167	4.728


Cellular Band (Part 22H)

26 dB Emissions & 99% Occupied Bandwidth for GSM (GMSK) Mode

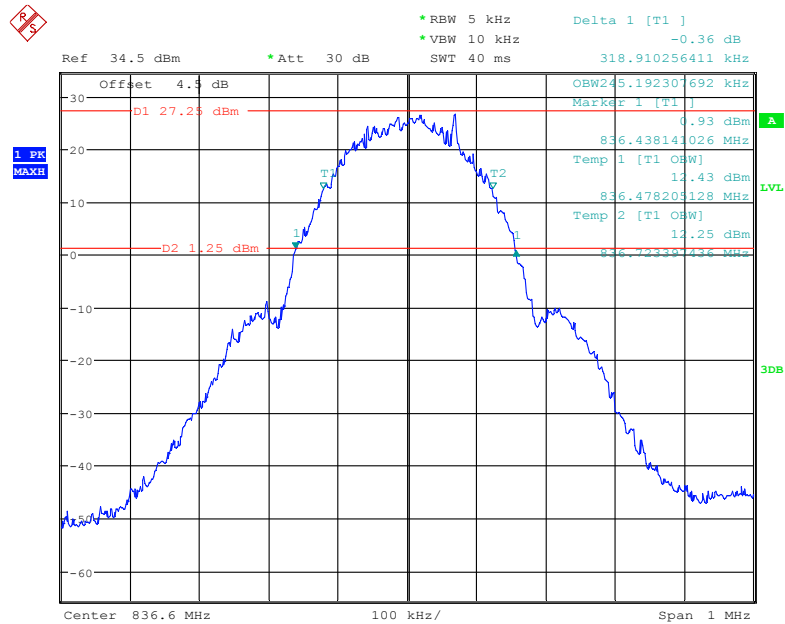


Date: 28.MAR.2018 11:34:19


26 dB Emissions & 99% Occupied Bandwidth for RMC (BPSK) Mode

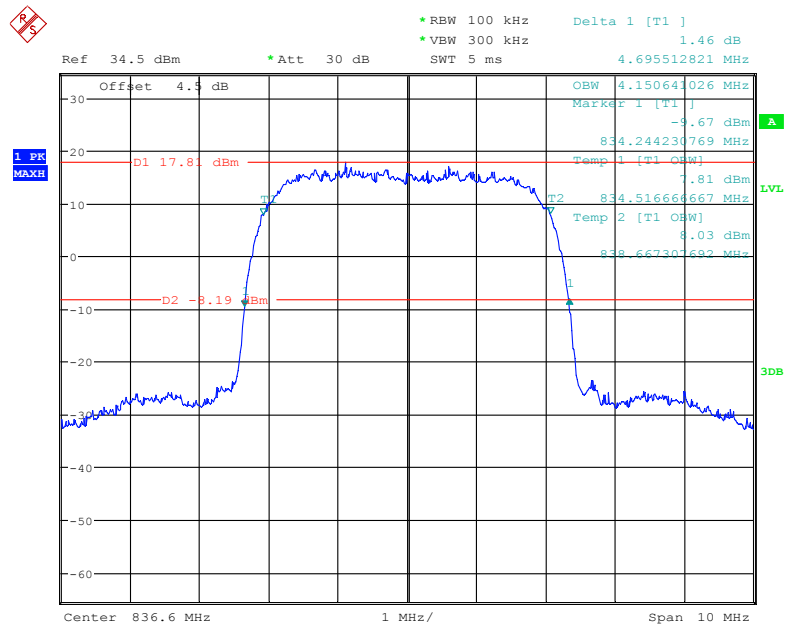

Date: 28.MAR.2018 13:05:02

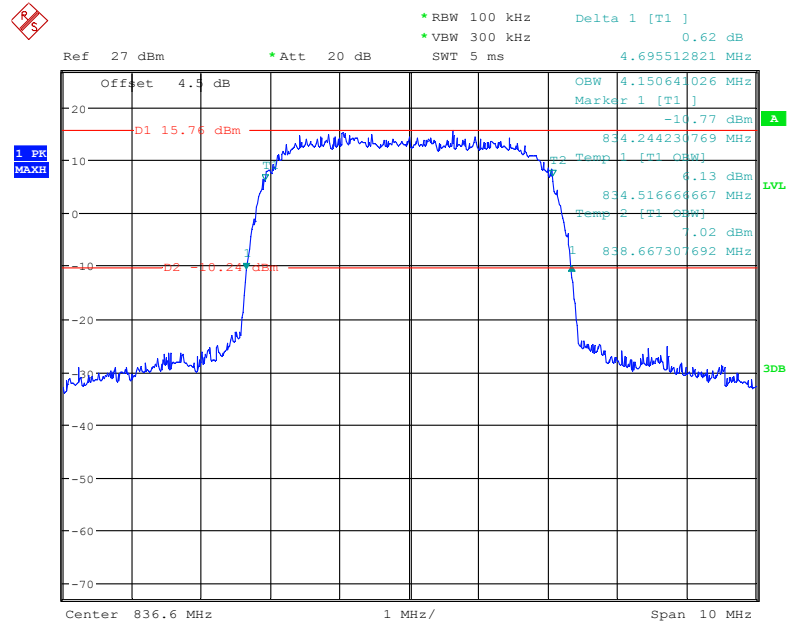26 dB Emissions & 99% Occupied Bandwidth for HSUPA (BPSK) Mode


Date: 28.MAR.2018 13:27:37

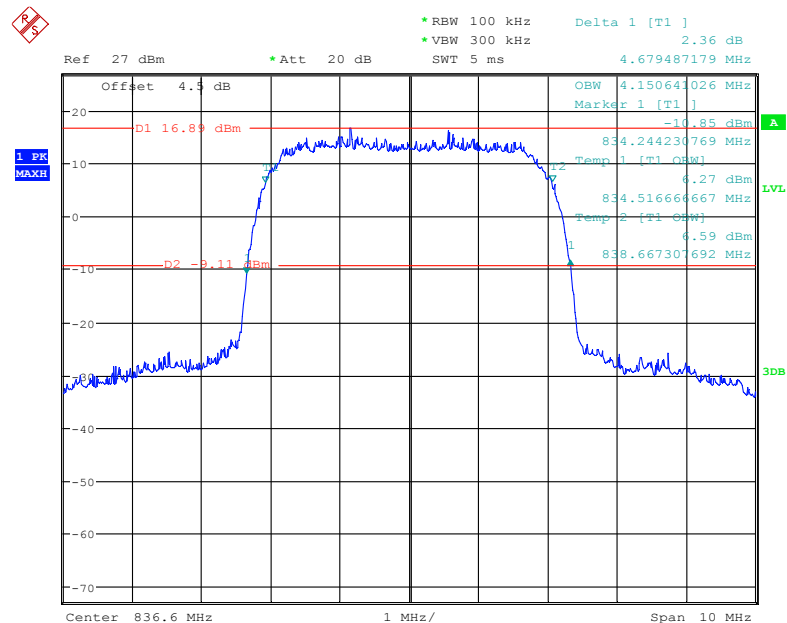26 dB Emissions & 99% Occupied Bandwidth for HSDPA (16QAM) Mode

Date: 28.MAR.2018 13:18:15


PCS Band (Part 24E)

26 dB Emissions & 99% Occupied Bandwidth for GSM (GMSK) Mode

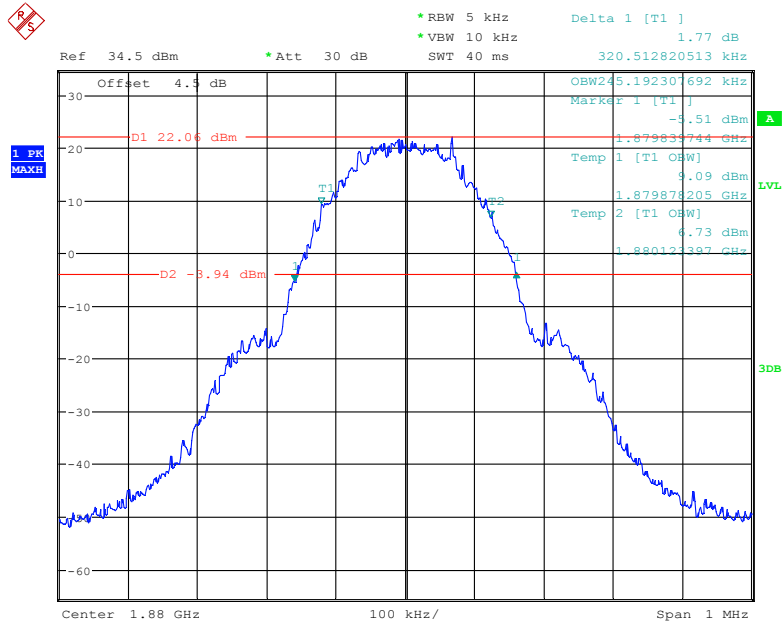


Date: 28.MAR.2018 11:43:10

26 dB Emissions & 99% Occupied Bandwidth for RMC (BPSK) Mode

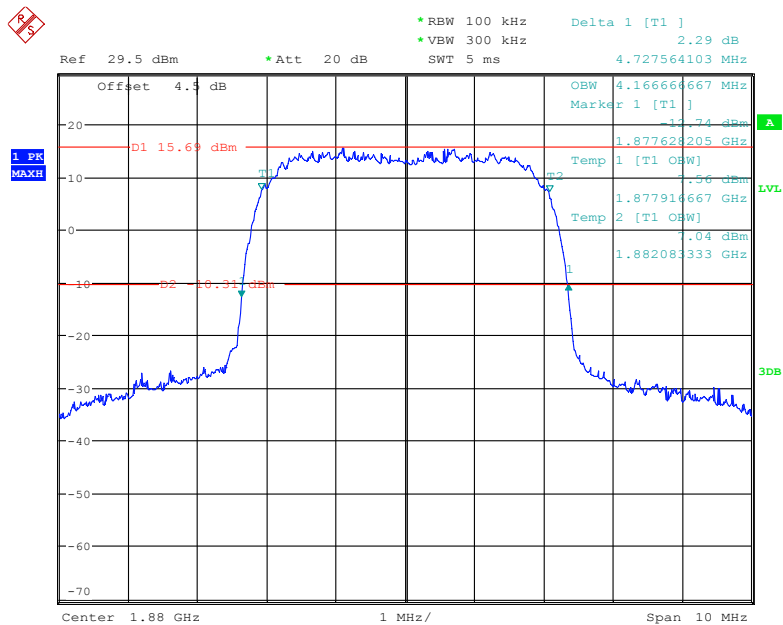


Date: 28.MAR.2018 13:01:50

26 dB Emissions & 99% Occupied Bandwidth for HSUPA (BPSK) Mode

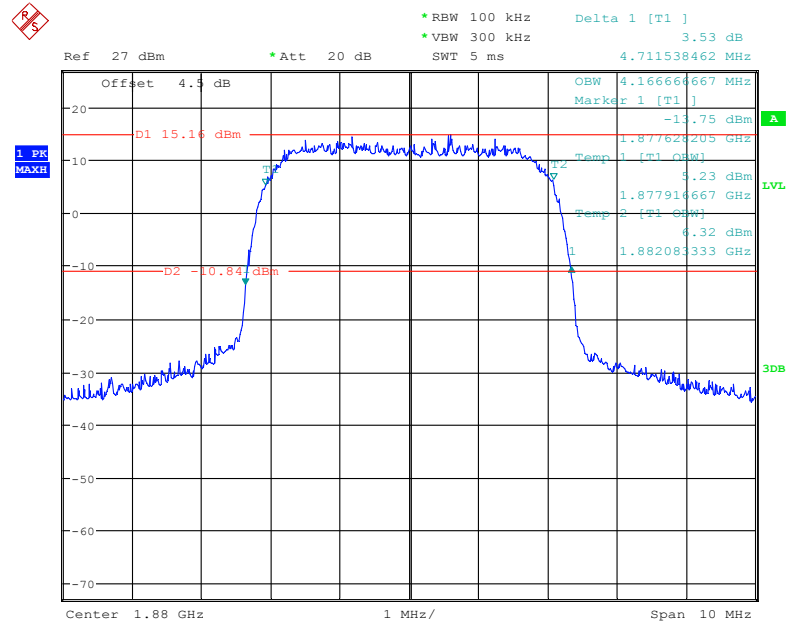

Date: 28.MAR.2018 13:26:31

26 dB Emissions & 99% Occupied Bandwidth for HSDPA (16QAM) Mode

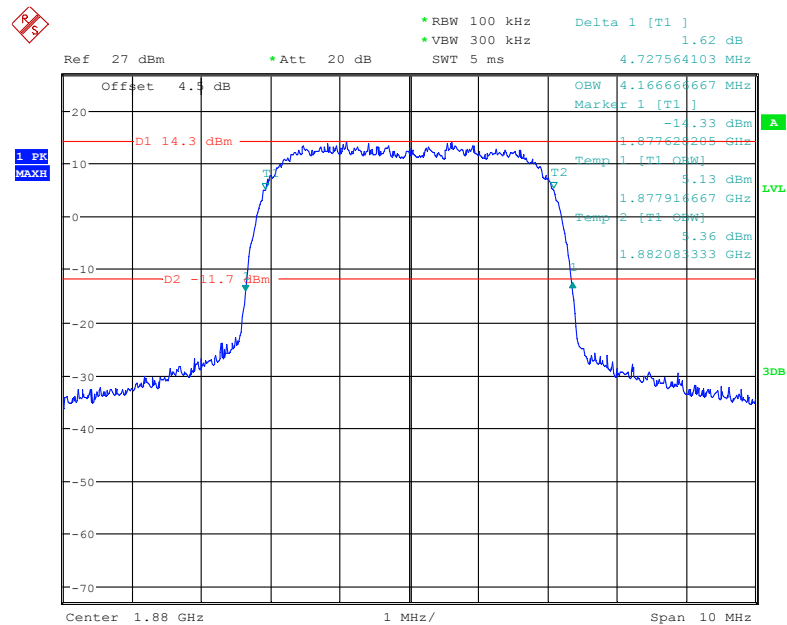

Date: 28.MAR.2018 13:22:24

FCC §2.1051, §22.917(a) & §24.238(a) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS


Applicable Standard

FCC §2.1051, §22.917(a) and §24.238(a).

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1051.

Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100kHz for below 1GHz and 1MHz for above 1GHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

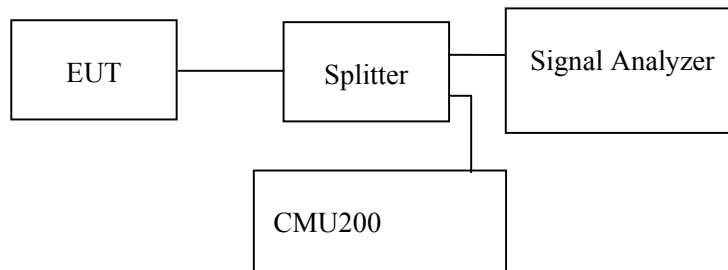

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa


The testing was performed by Simon Wang on 2018-03-28.

EUT operation mode: Transmitting

Test result: Compliance, please refer to the following plots.

Cellular Band (Part 22H)


30 MHz – 1 GHz (GSM Mode)

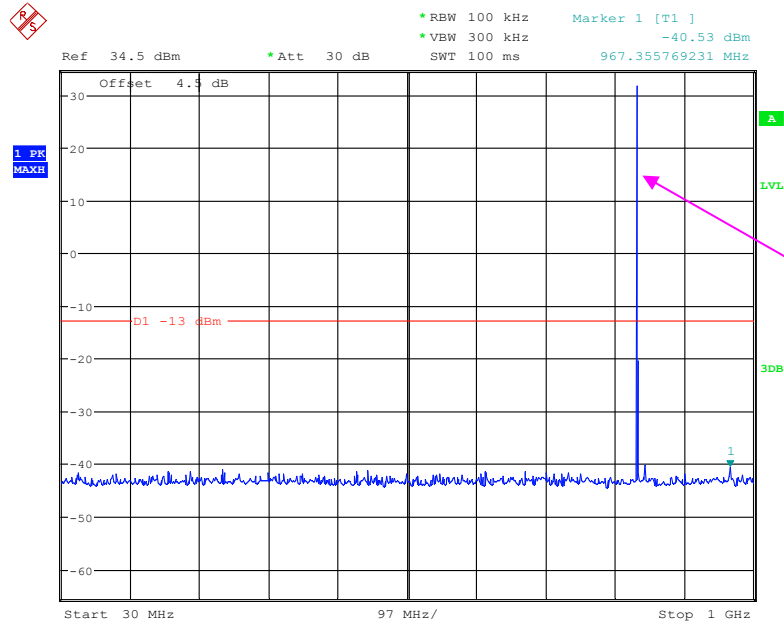

Fundamental test


Date: 28.MAR.2018 11:39:47

1 GHz – 10 GHz (GSM Mode)

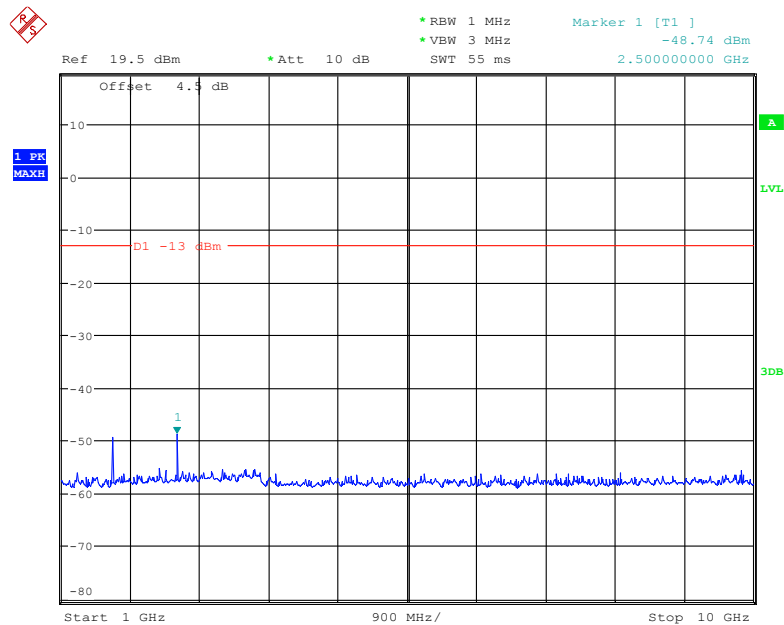


Date: 28.MAR.2018 11:38:36

30 MHz – 1 GHz (WCDMA Mode)

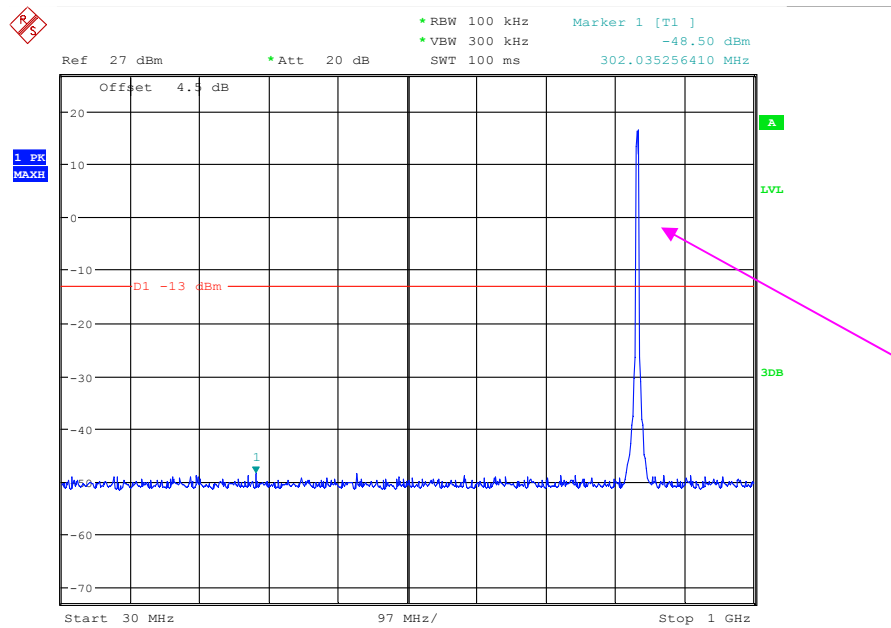

Date: 28.MAR.2018 13:16:48


1 GHz – 10GHz (WCDMA Mode)

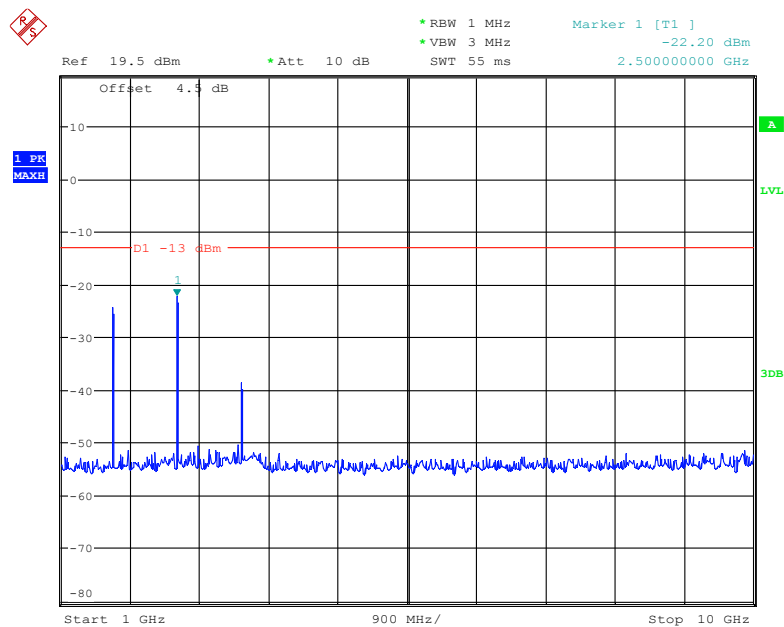

Date: 28.MAR.2018 13:15:42


PCS Band (Part 24E)

30 MHz – 1 GHz (GSM Mode)

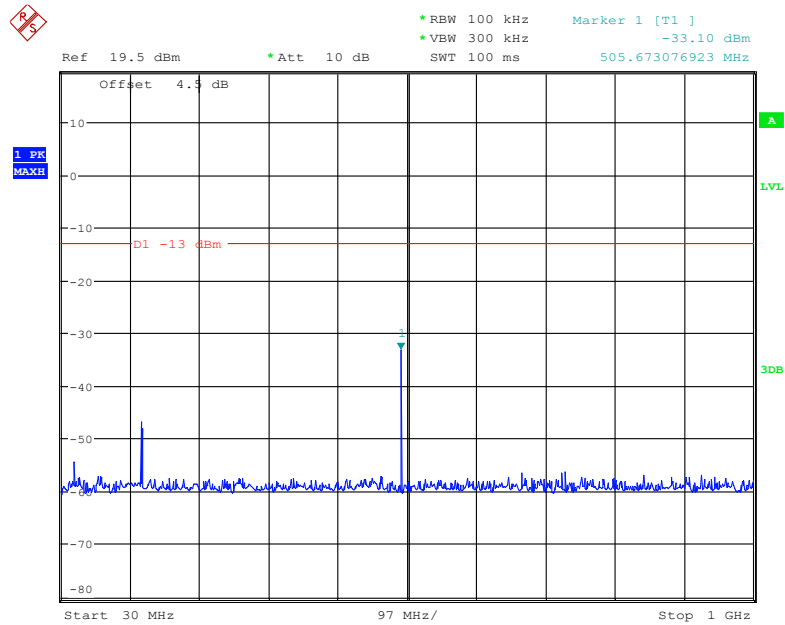

Date: 28.MAR.2018 11:48:49


1 GHz – 2 GHz (GSM Mode)

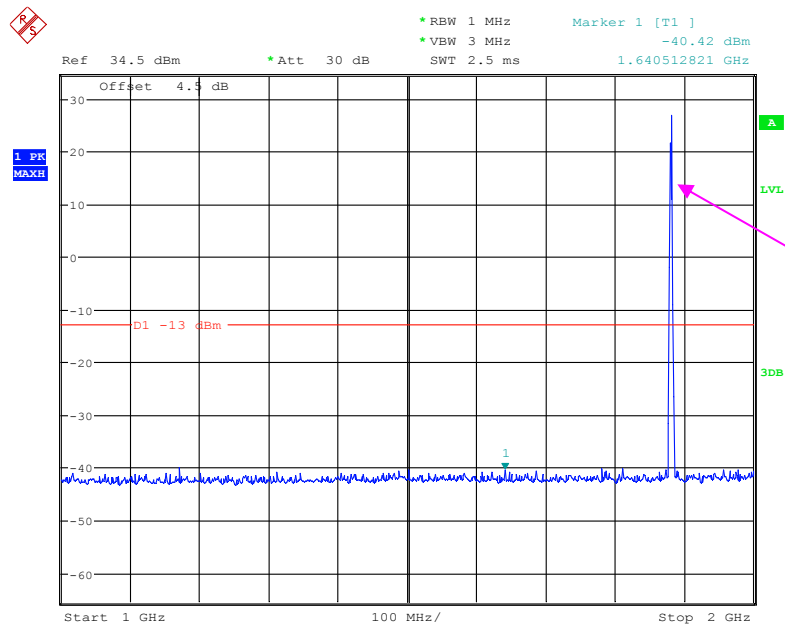

Fundamental test


Date: 28.MAR.2018 11:47:38

2 GHz – 20 GHz (GSM Mode)

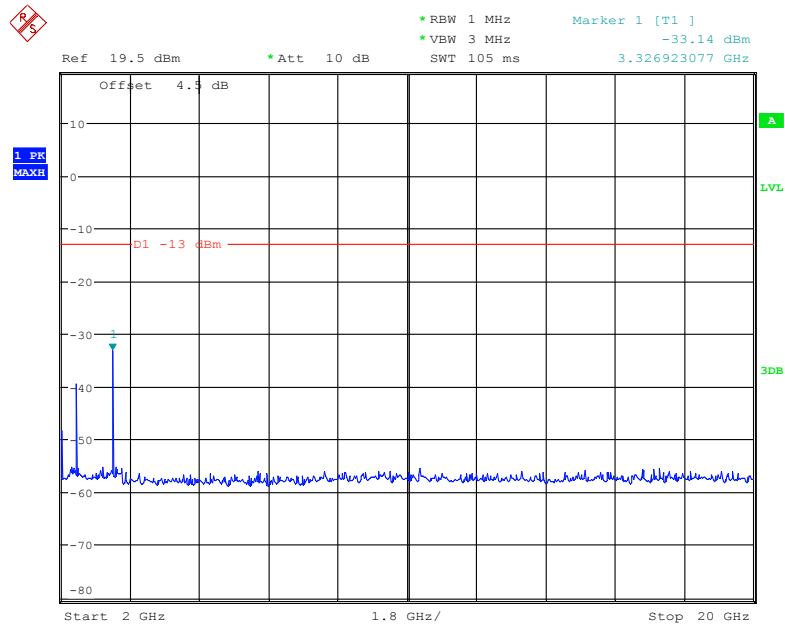


Date: 28.MAR.2018 11:48:22

30 MHz – 1 GHz (WCDMA Mode)

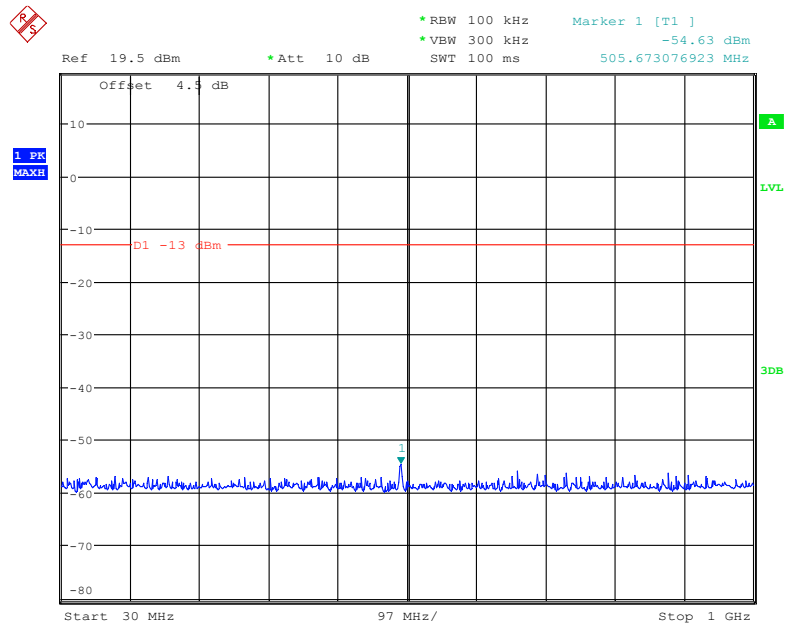

Date: 28.MAR.2018 13:10:42


1 GHz – 2 GHz (WCDMA Mode)

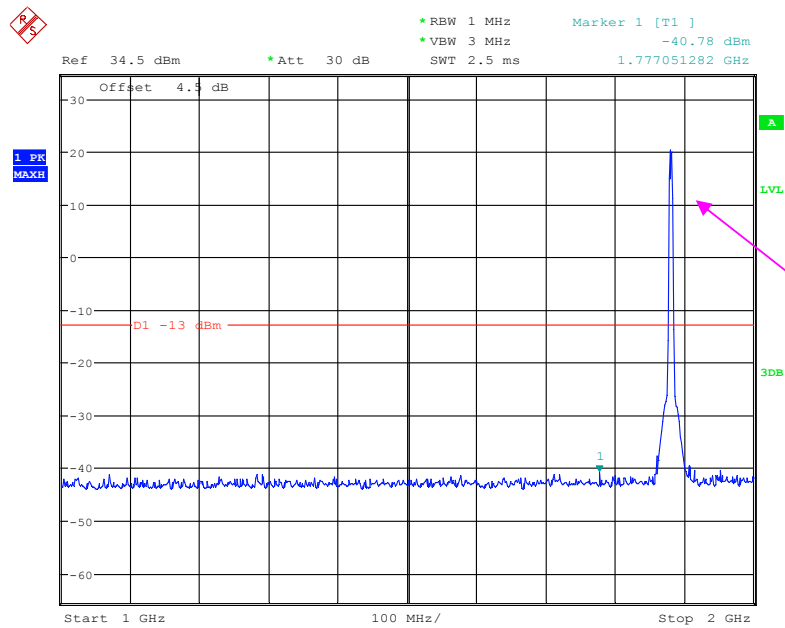

Fundamental test

Date: 28.MAR.2018 13:09:20

2 GHz – 20 GHz (WCDMA Mode)

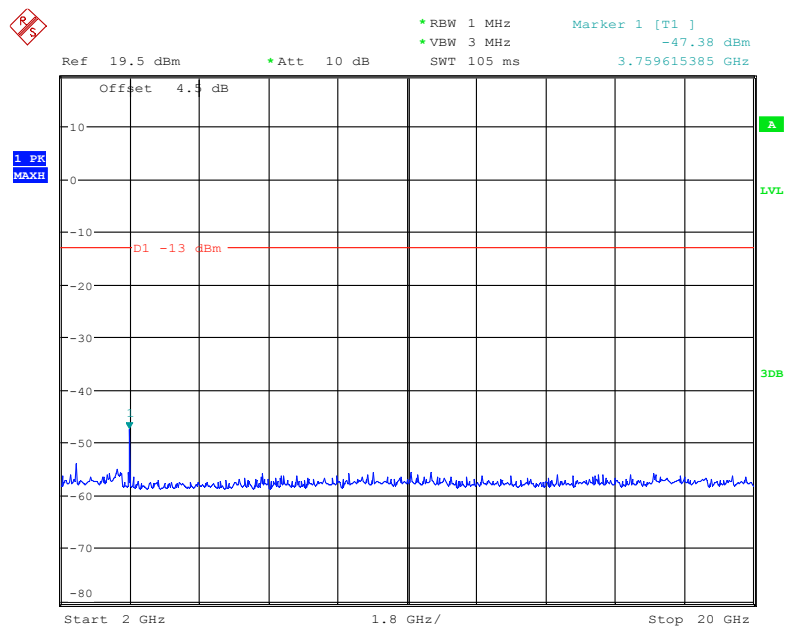

Date: 28.MAR.2018 13:10:10

FCC § 2.1053; § 22.917 (a); § 24.238 (a) -SPURIOUS RADIATED EMISSIONS**Applicable Standard**

FCC § 2.1053, §22.917(a) and § 24.238(a).

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the receiving antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = 10 lg (TX pwr in Watts/0.001) – the absolute level

Spurious attenuation limit in dB = 43 + 10 Log₁₀ (power out in Watts)

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Simon Wang on 2018-03-28.

EUT operation mode: Transmitting

Pre-scan with Low, Middle and High channel, the worst case as below:

30 MHz ~ 10 GHz:

Cellular Band (Part 22H)

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)			
GSM Mode, Middle channel										
962.2	38.69	337	1.2	H	-58.3	0.74	0	-59.04	-13	46.04
962.2	38.17	87	1.3	V	-58.8	0.74	0	-59.54	-13	46.54
1673.2	48.37	245	2.1	H	-58.7	1.30	8.90	-51.10	-13	38.10
1673.2	51.13	321	2.3	V	-55.3	1.30	8.90	-47.70	-13	34.70
2509.8	58.63	171	2.5	H	-44.9	2.60	10.20	-37.30	-13	24.30
2509.8	57.14	223	2.3	V	-45.8	2.60	10.20	-38.20	-13	25.20
3346.4	43.28	88	2.4	H	-57.1	1.50	11.70	-46.90	-13	33.90
3346.4	42.31	331	2.4	V	-58.1	1.50	11.70	-47.90	-13	34.90
WCDMA Mode, Middle channel										
950.3	39.23	83	2.2	H	-57.8	0.74	0	-58.54	-13	45.54
950.3	39.71	10	2.0	V	-57.3	0.74	0	-58.04	-13	45.04
1673.2	67.89	107	2.1	H	-39.2	1.30	8.90	-31.60	-13	18.60
1673.2	68.62	64	1.2	V	-37.9	1.30	8.90	-30.30	-13	17.30
2509.8	70.96	257	1.4	H	-32.6	2.60	10.20	-25.00	-13	12.00
2509.8	69.54	303	2.1	V	-33.4	2.60	10.20	-25.80	-13	12.80
3346.4	42.63	202	2.1	H	-57.7	1.50	11.70	-47.50	-13	34.50
3346.4	42.52	1	2.4	V	-57.9	1.50	11.70	-47.70	-13	34.70

30 MHz ~ 20 GHz:**PCS Band (Part 24E)**

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)			
GSM Mode, Middle channel										
962.2	39.01	259	1.8	H	-58.0	0.74	0	-58.74	-13	45.74
962.2	38.95	18	2.3	V	-58.0	0.74	0	-58.74	-13	45.74
3760	53.45	224	2.0	H	-47.8	1.50	11.80	-37.50	-13	24.50
3760	52.63	106	2.2	V	-48.1	1.50	11.80	-37.80	-13	24.80
WCDMA Mode, Middle channel										
950.3	38.75	63	2.4	H	-58.2	0.74	0	-58.94	-13	45.94
950.3	38.17	245	2.1	V	-58.8	0.74	0	-59.54	-13	46.54
3760	47.96	281	1.9	H	-54.3	1.50	11.80	-44.00	-13	31.00
3760	46.78	212	1.0	V	-55.0	1.50	11.80	-44.70	-13	31.70

Note:

- 1) Absolute Level = Substituted Level - Cable loss + Antenna Gain
- 2) Margin = Limit- Absolute Level

FCC § 22.917 (a); § 24.238 (a) - BAND EDGES**Applicable Standard**


According to § 22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency

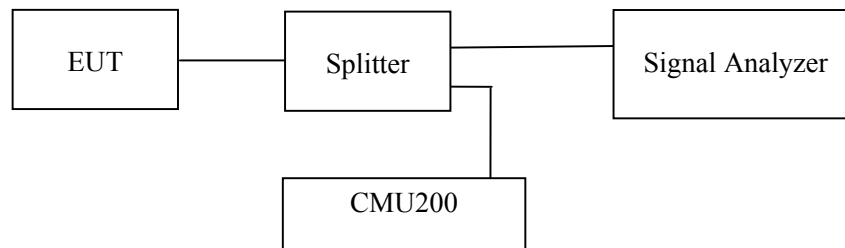**Test Data****Environmental Conditions**


Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Simon Wang on 2018-03-28.

EUT operation mode: Transmitting


Test Result: Compliance. Please refer to the following plots.

Cellular Band, Left Band Edge for GSM (GMSK) Mode

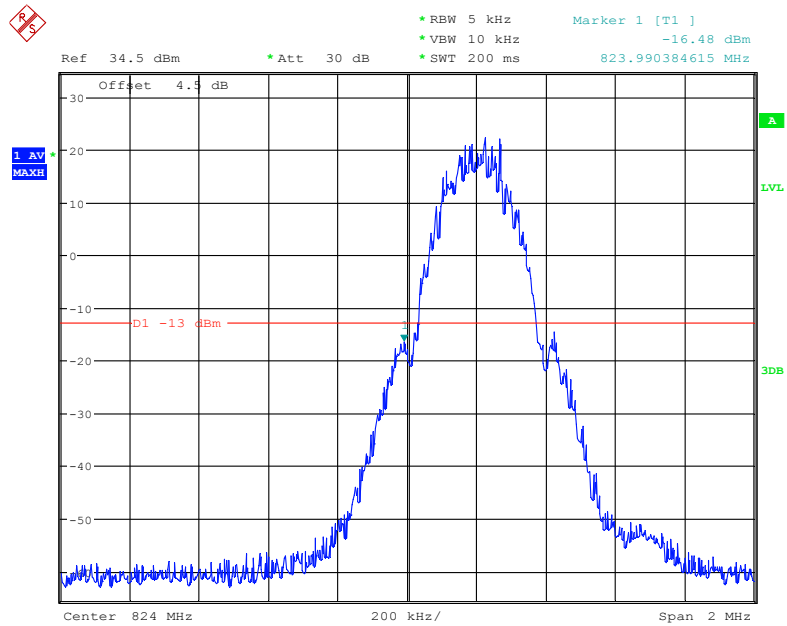


Date: 28.MAR.2018 11:35:53

Cellular Band, Right Band Edge for GSM (GMSK) Mode

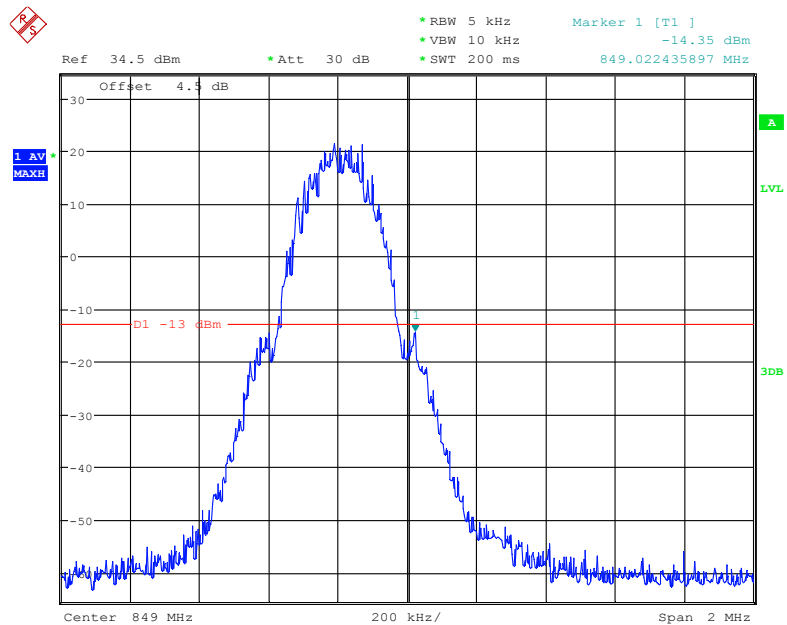


Date: 28.MAR.2018 11:37:07

Cellular Band, Left Band Edge for WCDMA (BPSK) Mode

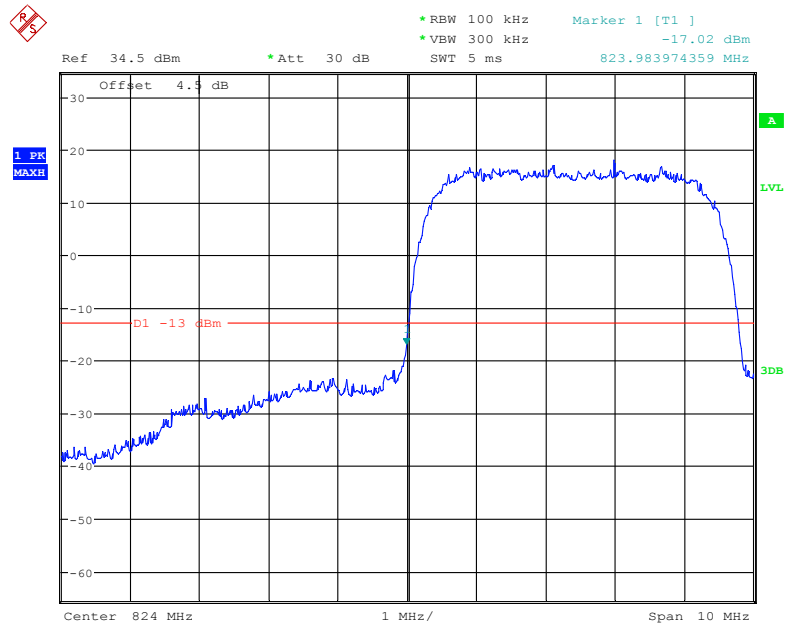


Date: 28.MAR.2018 13:06:05

Cellular Band, Right Band Edge for WCDMA (BPSK) Mode

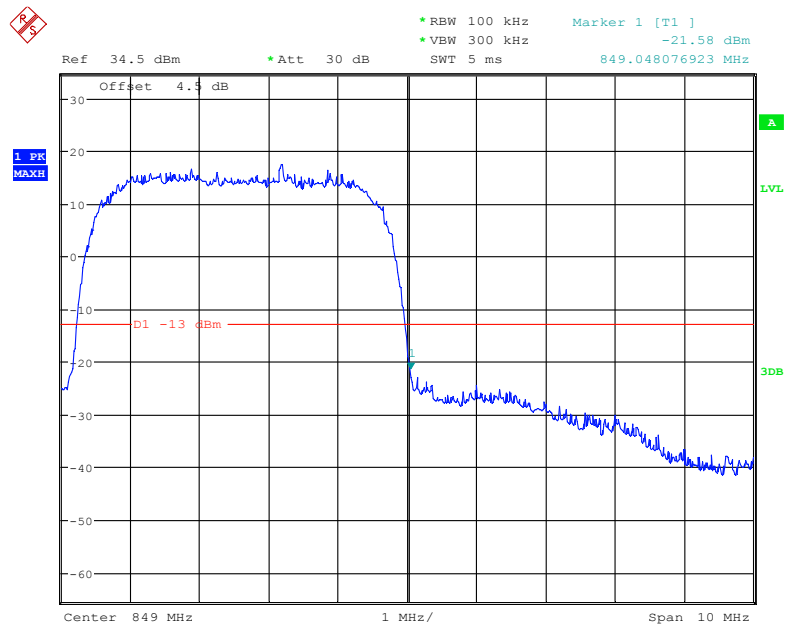


Date: 28.MAR.2018 13:06:55

Cellular Band, Left Band Edge for HSDPA (16QAM) Mode

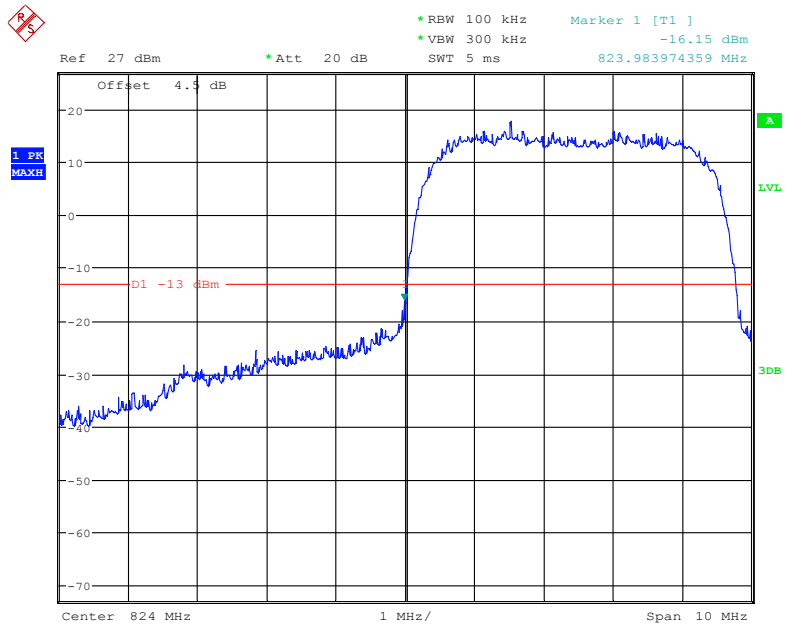


Date: 28.MAR.2018 13:19:22

Cellular Band, Right Band Edge for HSDPA (16QAM) Mode

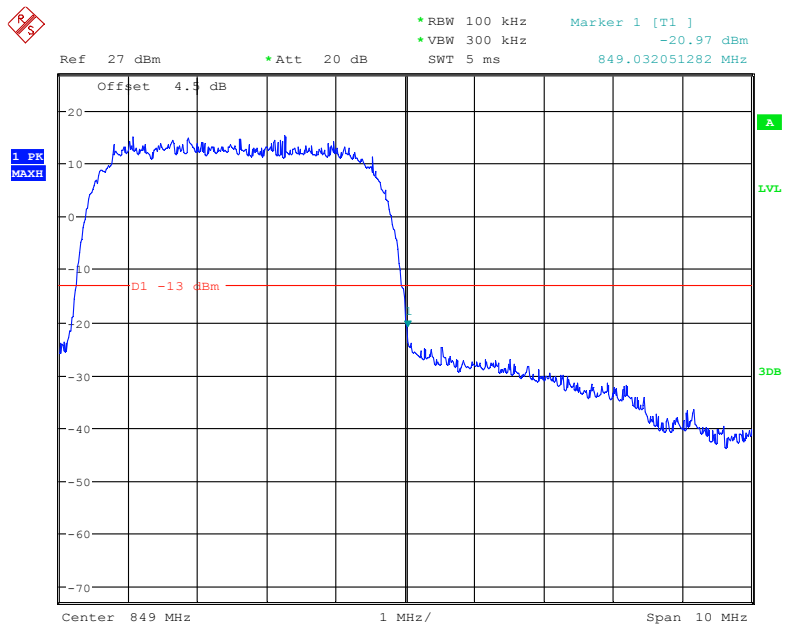


Date: 28.MAR.2018 13:19:51

Cellular Band, Left Band Edge for HSUPA (BPSK) Mode

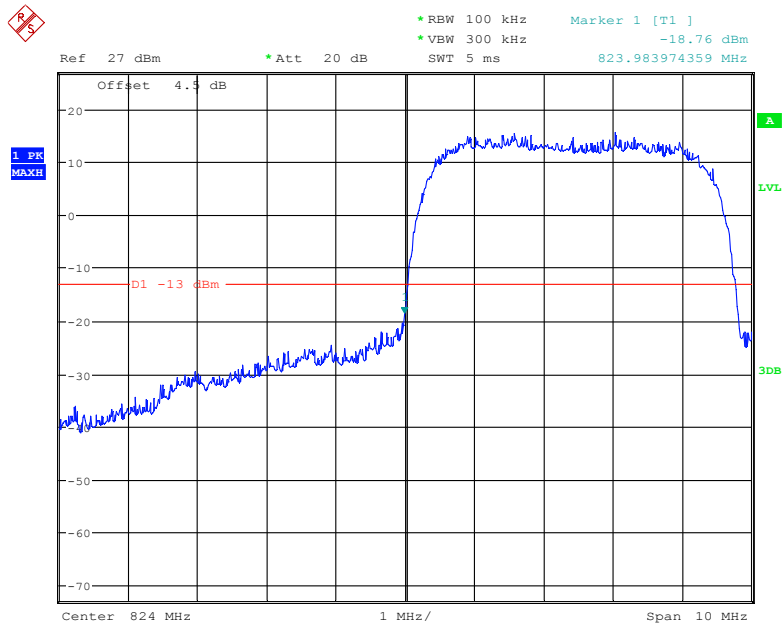


Date: 28.MAR.2018 13:28:18

Cellular Band, Right Band Edge for HSUPA (BPSK) Mode

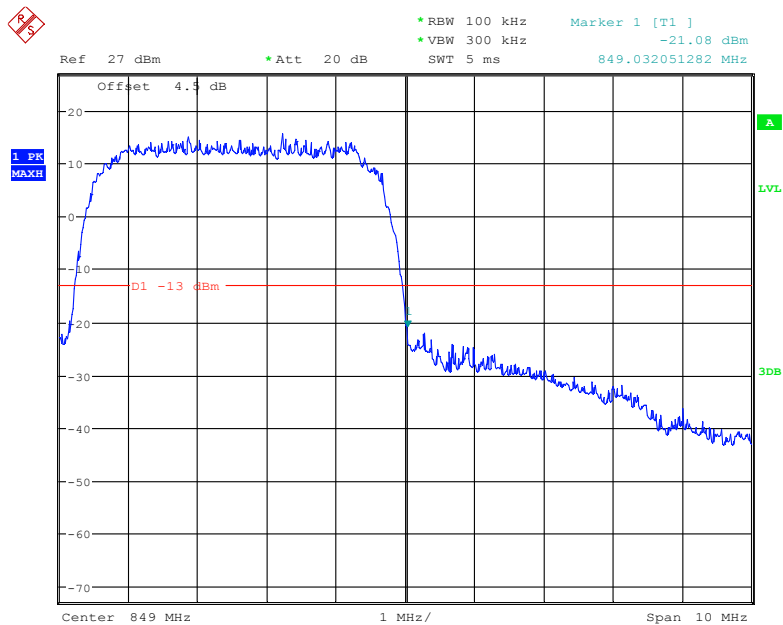


Date: 28.MAR.2018 13:28:45

PCS Band, Left Band Edge for GSM (GMSK) Mode

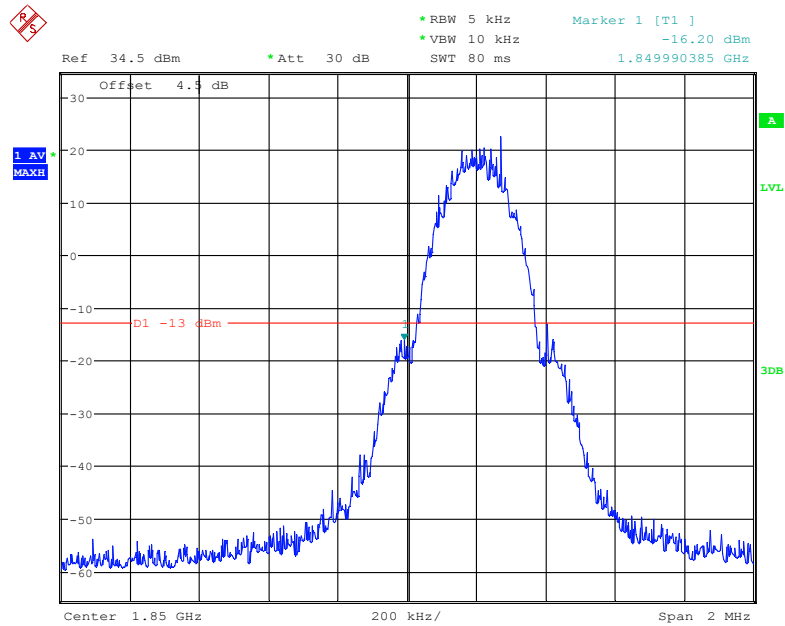


Date: 28.MAR.2018 11:44:39

PCS Band, Right Band Edge for GSM (GMSK) Mode

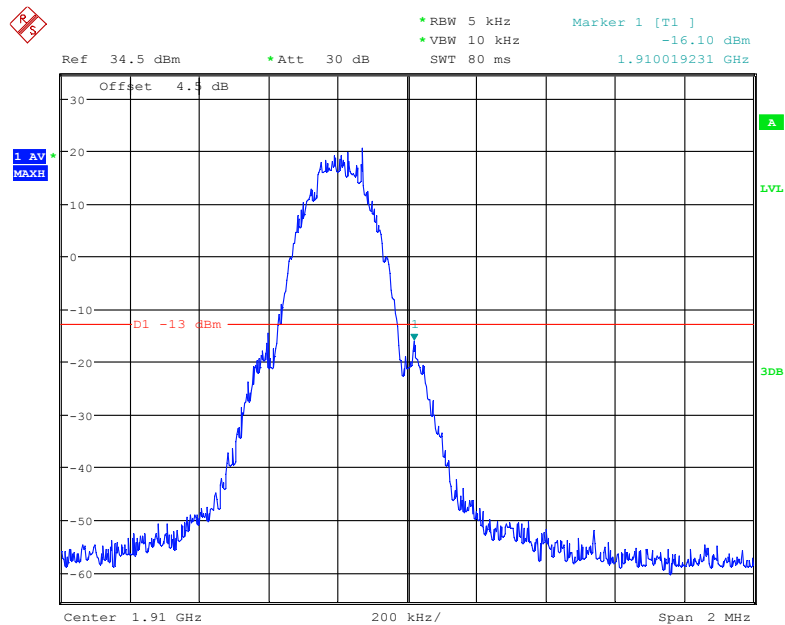


Date: 28.MAR.2018 11:45:43

PCS Band, Left Band Edge for WCDMA (BPSK) Mode

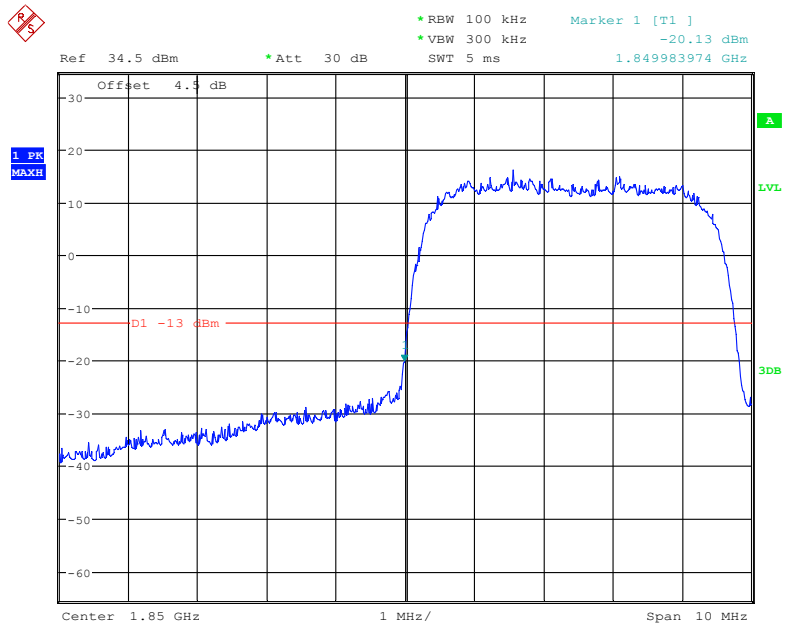


Date: 28.MAR.2018 13:07:44

PCS Band, Right Band Edge for WCDMA (BPSK) Mode

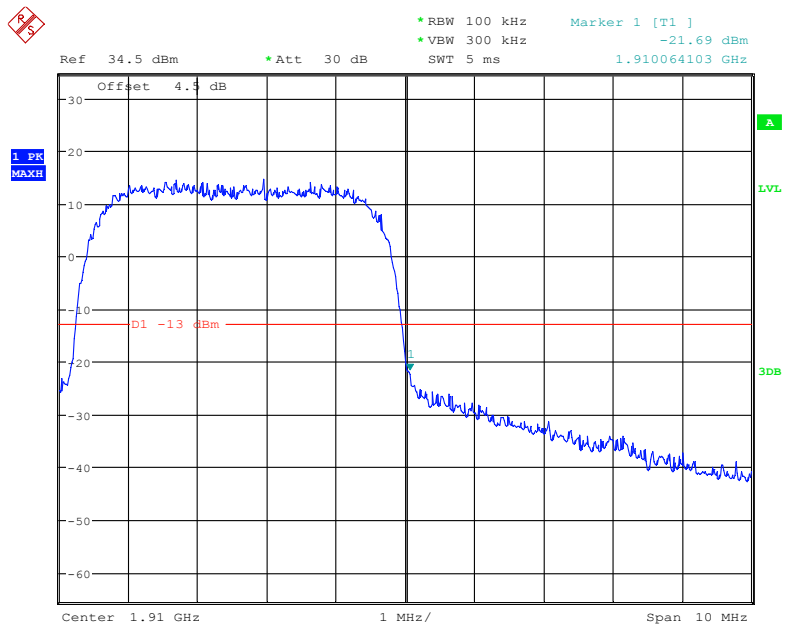


Date: 28.MAR.2018 13:08:21

PCS Band, Left Band Edge for HSDPA (16QAM) Mode

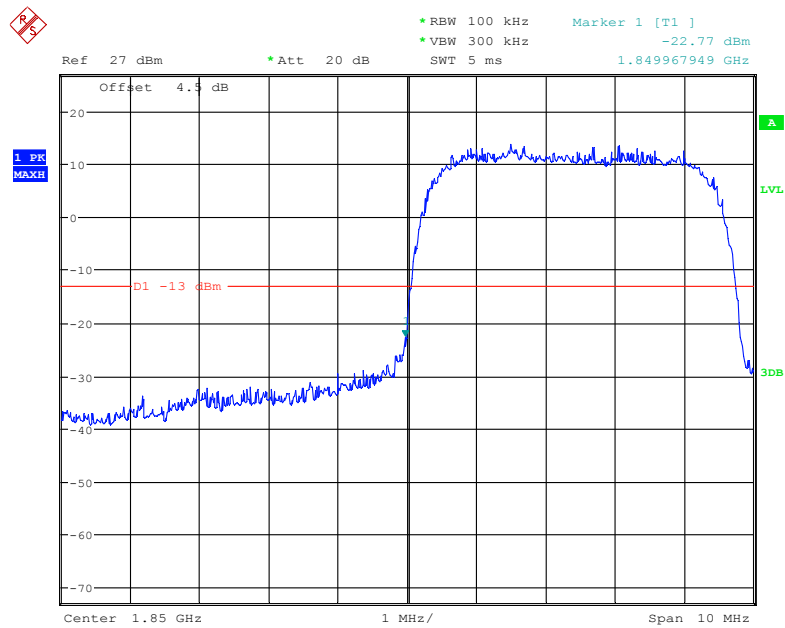


Date: 28.MAR.2018 13:20:49

PCS Band, Right Band Edge for HSDPA (16QAM) Mode

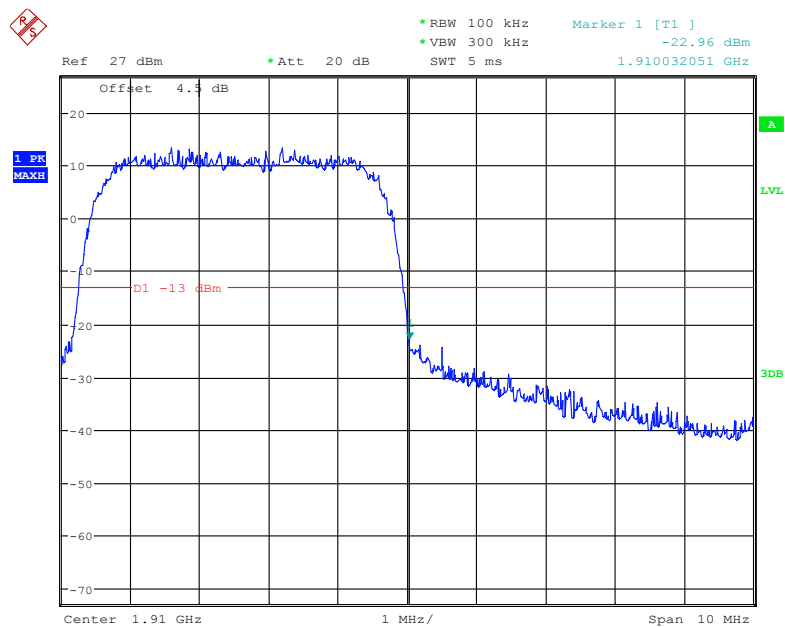


Date: 28.MAR.2018 13:21:21

PCS Band, Left Band Edge for HSUPA (BPSK) Mode

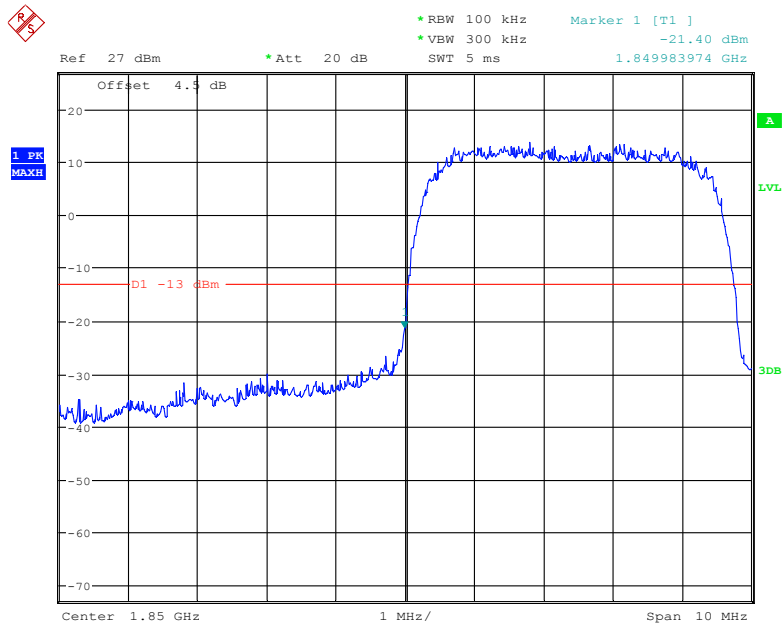

Date: 28.MAR.2018 13:29:32

PCS Band, Right Band Edge for HSUPA (BPSK) Mode

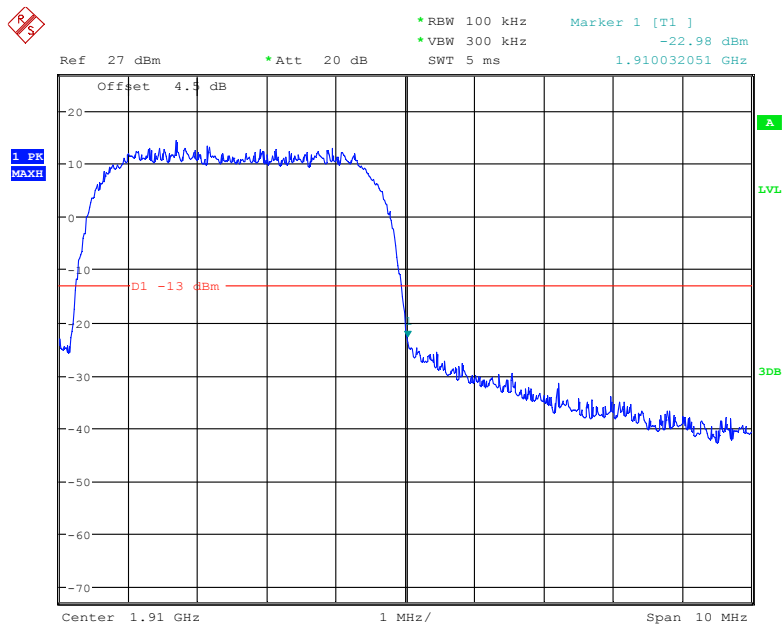

Date: 28.MAR.2018 13:30:04

FCC § 2.1055; § 22.355; § 24.235 - FREQUENCY STABILITY**Applicable Standard**

FCC § 2.1055, §22.355 and §24.235.

According to FCC §2.1055, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency Range (MHz)	Base, fixed (ppm)	Mobile ≤ 3 watts (ppm)	Mobile > 3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929.	5.0	N/A	N/A
929 to 960.	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A


According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stays within the authorized frequency block.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

Frequency Stability vs. Voltage: For hand carried, battery powered equipment; reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

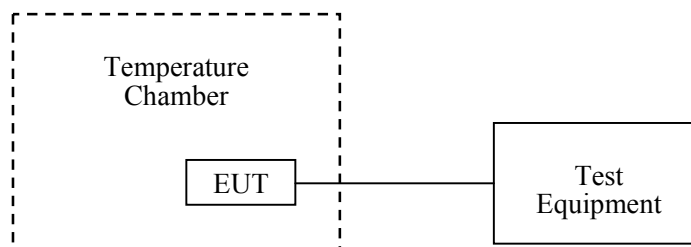

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Simon Wang on 2018-03-28.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to the following tables.

Cellular Band (Part 22H)**GSM Mode**

Middle Channel, $f_0=836.6\text{MHz}$				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.8	11	0.0131	2.5
0		8	0.0096	2.5
10		6	0.0072	2.5
20		-1	-0.0012	2.5
30		3	0.0036	2.5
40		5	0.0060	2.5
50		8	0.0096	2.5
25	V min.= 3.6	7	0.0084	2.5
25	V max.= 4.35	12	0.0143	2.5

WCDMA Mode

Middle Channel, $f_0 = 836.6\text{MHz}$				
Temperature (°C)	Power Supplied (V_{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.8	-2	-0.0024	2.5
0		5	0.0060	2.5
10		3	0.0036	2.5
20		-1	-0.0012	2.5
30		2	0.0024	2.5
40		4	0.0048	2.5
50		2	0.0024	2.5
25	V min.= 3.6	1	0.0012	2.5
25	V max.= 4.35	3	0.0036	2.5

PCS Band (Part 24E)**GSM Mode**

Middle Channel, $f_0 = 1880.0\text{ MHz}$				
Temperature (°C)	Power Supplied (V_{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-10	3.8	8	0.0043	pass
0		10	0.0053	pass
10		8	0.0043	pass
20		15	0.0080	pass
30		16	0.0085	pass
40		14	0.0074	pass
50		13	0.0069	pass
25	V min.= 3.6	20	0.0106	pass
25	V max.= 4.35	14	0.0074	pass

WCDMA Mode

Middle Channel, f_0 =1880.0 MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-10	3.8	3	0.0016	pass
0		4	0.0021	pass
10		-3	-0.0016	pass
20		-2	-0.0011	pass
30		1	0.0005	pass
40		3	0.0016	pass
50		6	0.0032	pass
25	V min.= 3.6	4	0.0021	pass
25	V max.= 4.35	3	0.0016	pass

***** END OF REPORT *****