

Main Antenna Test Result

Project Number: P-CC26060005

Test Time: 2026-07-17_19.49.51

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC


Test Site: 966#2

Test Voltage: 5.2G WIFI 11a CH44 P=17.5

Test Engineer: Liu Yabo

Remark: 数据线: A13 ANT0

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

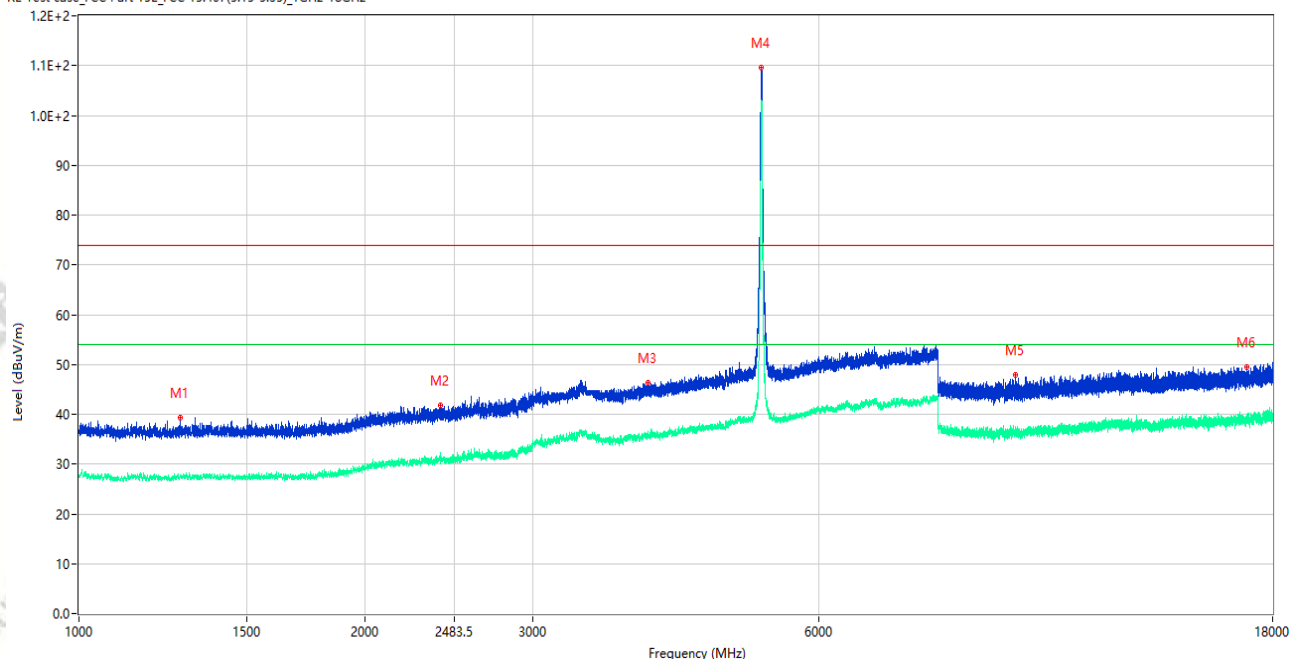

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1278.500	39.37	-15.88	74.0	34.63	Peak	161.00	150	Vertical	Pass
1**	1278.500	27.55	-15.88	54.0	26.45	AV	161.00	150	Vertical	Pass
2	2397.750	41.83	-12.85	74.0	32.17	Peak	49.00	150	Vertical	Pass
2**	2397.750	31.34	-12.85	54.0	22.66	AV	49.00	150	Vertical	Pass
3	3966.000	46.24	-3.84	74.0	27.76	Peak	90.00	150	Vertical	Pass
3**	3966.000	36.39	-3.84	54.0	17.61	AV	90.00	150	Vertical	Pass
4	5218.000	109.67	-2.38	74.0	-35.67	Peak	329.00	150	Vertical	N/A
4**	5218.000	102.74	-2.38	54.0	-48.74	AV	329.00	150	Vertical	N/A
5	9659.175	47.92	-3.22	74.0	26.08	Peak	193.00	150	Vertical	Pass
5**	9659.175	37.03	-3.22	54.0	16.97	AV	193.00	150	Vertical	Pass
6	16894.614	49.45	-0.50	74.0	24.55	Peak	0.00	150	Vertical	Pass
6**	16894.614	39.22	-0.50	54.0	14.78	AV	0.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-17_19.54.30

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC


Test Site: 966#2

Test Voltage: 5.2G WIFI 11a CH44 P=17.5

Test Engineer: Liu Yabo

Remark: 数据线: A13 ANT0

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

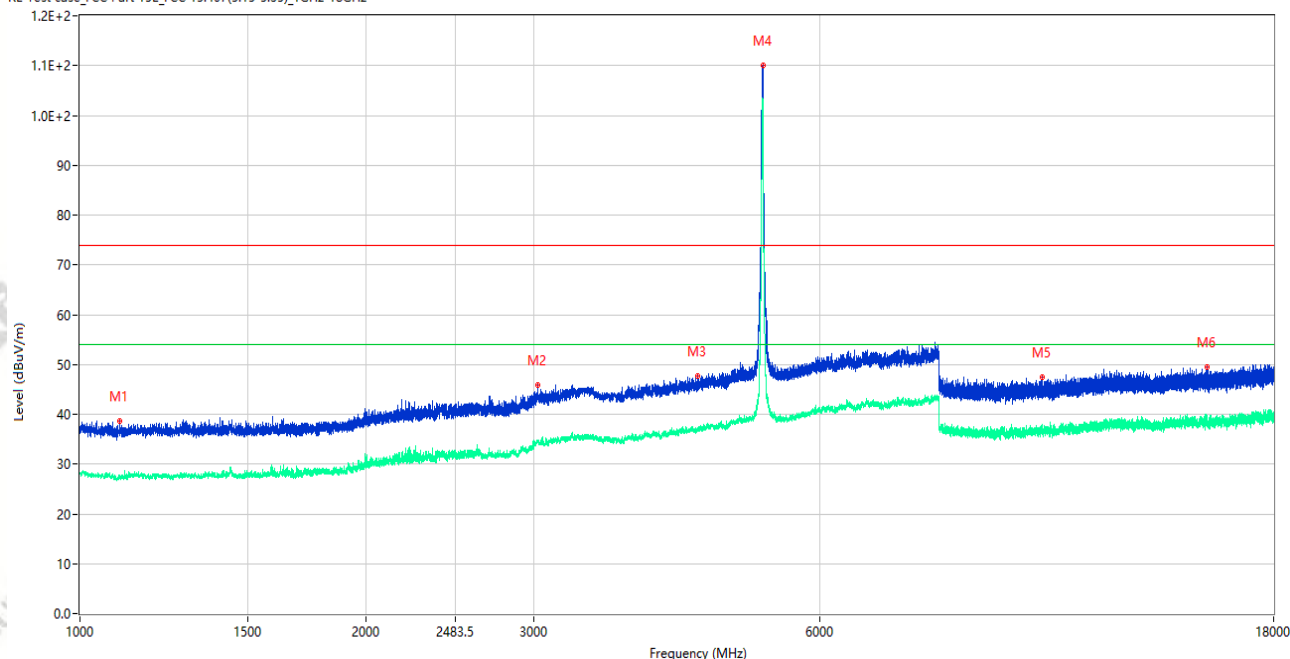

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1102.000	38.59	-15.74	74.0	35.41	Peak	231.00	150	Horizontal	Pass
1**	1102.000	27.07	-15.74	54.0	26.93	AV	231.00	150	Horizontal	Pass
2	3029.500	45.77	-7.69	74.0	28.23	Peak	157.00	150	Horizontal	Pass
2**	3029.500	34.79	-7.69	54.0	19.21	AV	157.00	150	Horizontal	Pass
3	4462.500	47.63	-3.58	74.0	26.37	Peak	167.00	150	Horizontal	Pass
3**	4462.500	36.95	-3.58	54.0	17.05	AV	167.00	150	Horizontal	Pass
4	5226.000	109.96	-2.32	74.0	-35.96	Peak	355.00	150	Horizontal	N/A
4**	5226.000	103.15	-2.32	54.0	-49.15	AV	355.00	150	Horizontal	N/A
5	10277.862	47.35	-3.29	74.0	26.65	Peak	51.00	150	Horizontal	Pass
5**	10277.862	36.92	-3.29	54.0	17.08	AV	51.00	150	Horizontal	Pass
6	15303.338	49.55	-1.88	74.0	24.45	Peak	360.00	150	Horizontal	Pass
6**	15303.338	38.84	-1.88	54.0	15.16	AV	360.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-17_21.04.10

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC


Test Site: 966#2

Test Voltage: 5.2G WIFI 11ac20 CH44 P=17.5

Test Engineer: Liu Yabo

Remark: 数据线: A13 ANT0

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

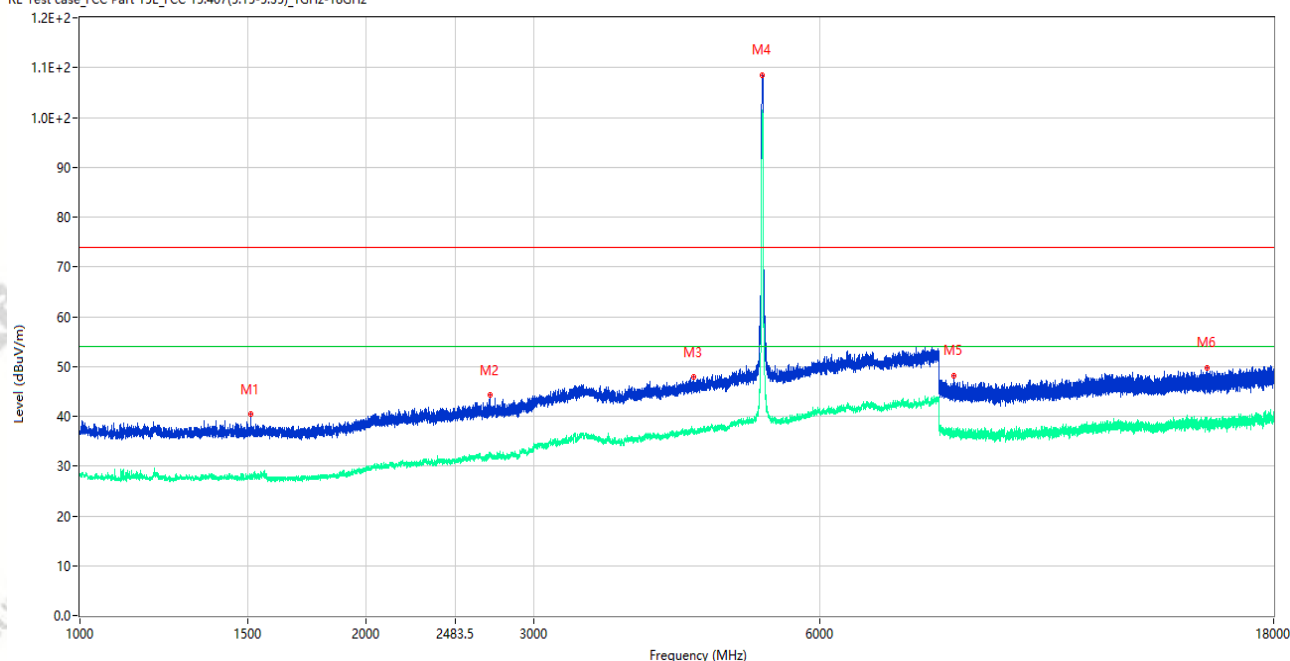

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1513.500	40.35	-16.06	74.0	33.65	Peak	200.00	150	Vertical	Pass
1**	1513.500	27.95	-16.06	54.0	26.05	AV	200.00	150	Vertical	Pass
2	2697.250	44.23	-10.59	74.0	29.77	Peak	360.00	150	Vertical	Pass
2**	2697.250	32.27	-10.59	54.0	21.73	AV	360.00	150	Vertical	Pass
3	4419.000	47.98	-2.83	74.0	26.02	Peak	356.00	150	Vertical	Pass
3**	4419.000	36.85	-2.83	54.0	17.15	AV	356.00	150	Vertical	Pass
4	5216.000	108.58	-2.32	74.0	-34.58	Peak	348.00	150	Vertical	N/A
4**	5216.000	100.98	-2.32	54.0	-46.98	AV	348.00	150	Vertical	N/A
5	8296.400	48.22	-4.79	74.0	25.78	Peak	264.00	150	Vertical	Pass
5**	8296.400	36.56	-4.79	54.0	17.44	AV	264.00	150	Vertical	Pass
6	15317.250	49.82	-2.40	74.0	24.18	Peak	348.00	150	Vertical	Pass
6**	15317.250	39.05	-2.40	54.0	14.95	AV	348.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-17_20.57.23

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC


Test Site: 966#2

Test Voltage: 5.2G WIFI 11ac20 CH44 P=17.5

Test Engineer: Liu Yabo

Remark: 数据线: A13 ANT0

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

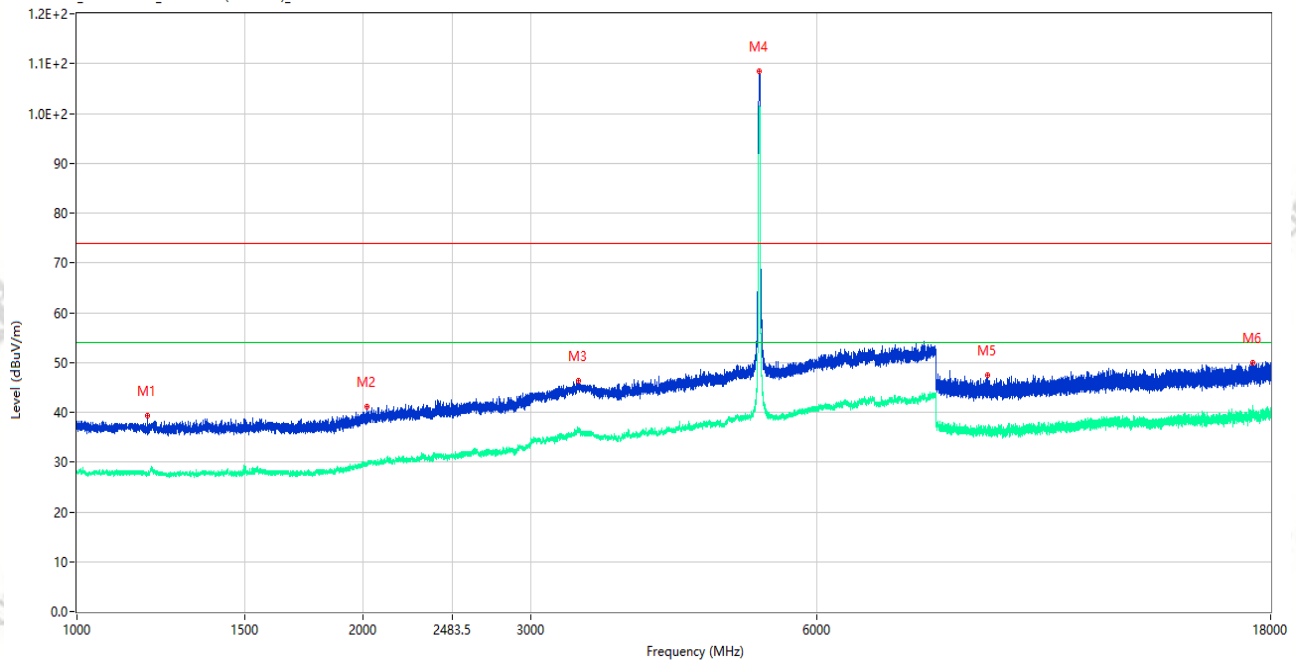

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1185.750	39.21	-15.88	74.0	34.79	Peak	360.00	150	Horizontal	Pass
1**	1185.750	27.51	-15.88	54.0	26.49	AV	360.00	150	Horizontal	Pass
2	2020.500	41.08	-14.14	74.0	32.92	Peak	360.00	150	Horizontal	Pass
2**	2020.500	29.88	-14.14	54.0	24.12	AV	360.00	150	Horizontal	Pass
3	3365.000	46.23	-5.19	74.0	27.77	Peak	335.00	150	Horizontal	Pass
3**	3365.000	36.25	-5.19	54.0	17.75	AV	335.00	150	Horizontal	Pass
4	5216.000	108.40	-2.32	74.0	-34.40	Peak	350.00	150	Horizontal	N/A
4**	5216.000	101.44	-2.32	54.0	-47.44	AV	350.00	150	Horizontal	N/A
5	9063.525	47.37	-4.55	74.0	26.63	Peak	216.00	150	Horizontal	Pass
5**	9063.525	36.61	-4.55	54.0	17.39	AV	216.00	150	Horizontal	Pass
6	17233.762	49.96	-0.47	74.0	24.04	Peak	317.00	150	Horizontal	Pass
6**	17233.762	40.08	-0.47	54.0	13.92	AV	317.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-17_21.14.56

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC


Test Site: 966#2

Test Voltage: 5.2G WIFI 11ac40 CH38 P=16.5

Test Engineer: Liu Yabo

Remark: 数据线: A13 ANT0

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

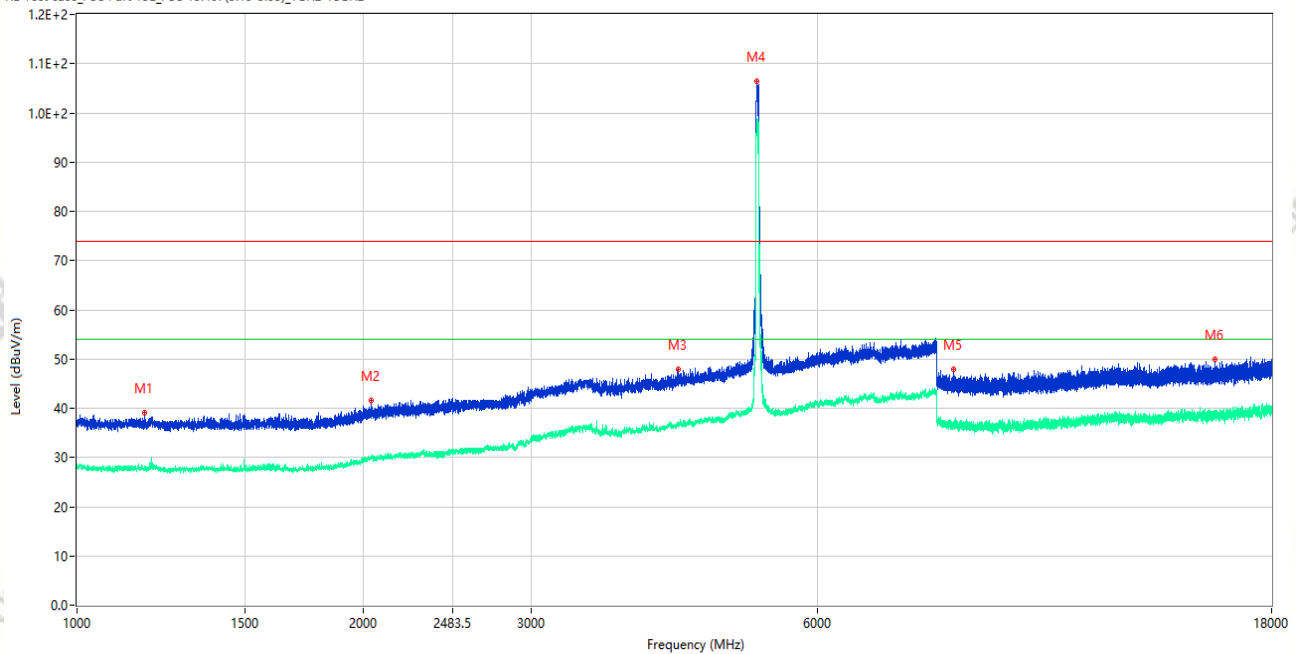

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1177.000	39.18	-15.68	74.0	34.82	Peak	246.00	150	Vertical	Pass
1**	1177.000	28.10	-15.68	54.0	25.90	AV	246.00	150	Vertical	Pass
2	2036.500	41.50	-13.32	74.0	32.50	Peak	35.00	150	Vertical	Pass
2**	2036.500	29.82	-13.32	54.0	24.18	AV	35.00	150	Vertical	Pass
3	4286.000	47.93	-3.87	74.0	26.07	Peak	304.00	150	Vertical	Pass
3**	4286.000	36.50	-3.87	54.0	17.50	AV	304.00	150	Vertical	Pass
4	5185.000	106.50	-2.32	74.0	-32.50	Peak	348.00	150	Vertical	N/A
4**	5185.000	97.92	-2.32	54.0	-43.92	AV	348.00	150	Vertical	N/A
5	8332.025	47.84	-5.05	74.0	26.16	Peak	125.00	150	Vertical	Pass
5**	8332.025	36.82	-5.05	54.0	17.18	AV	125.00	150	Vertical	Pass
6	15697.875	49.88	-2.03	74.0	24.12	Peak	0.00	150	Vertical	Pass
6**	15697.875	38.20	-2.03	54.0	15.80	AV	0.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-17_21.21.42

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC


Test Site: 966#2

Test Voltage: 5.2G WIFI 11ac40 CH38 P=16.5

Test Engineer: Liu Yabo

Remark: 数据线: A13 ANT0

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

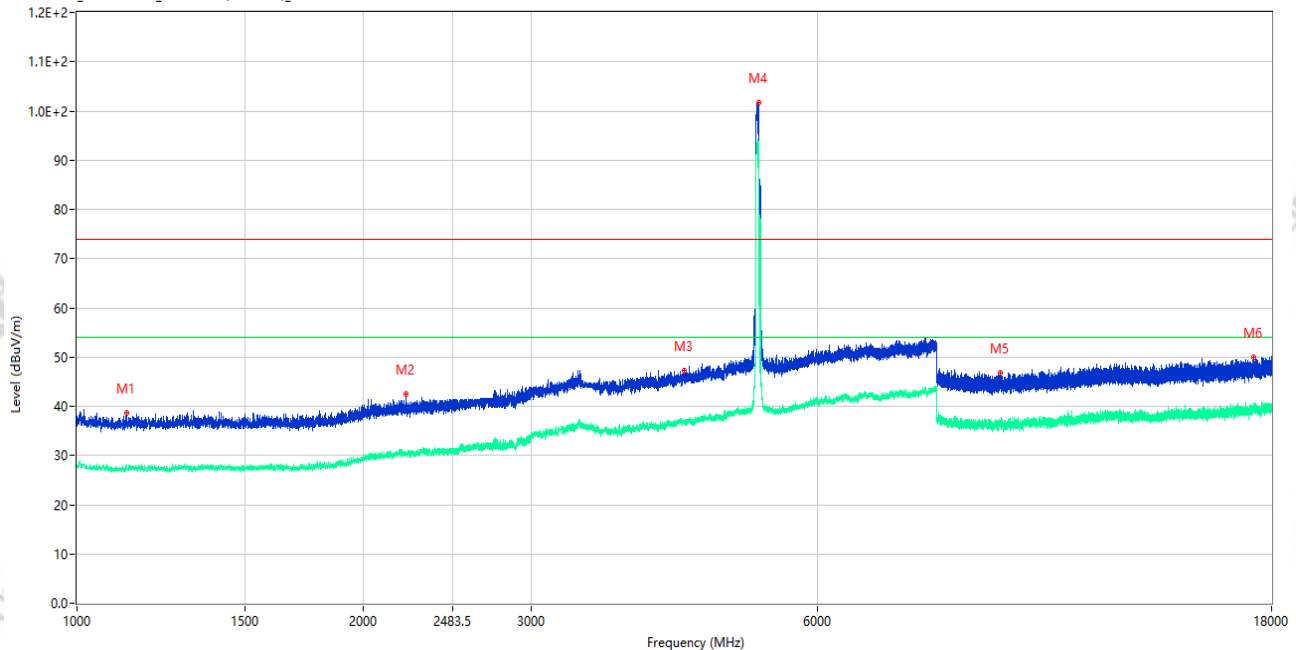

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1127.750	38.67	-15.59	74.0	35.33	Peak	17.00	150	Horizontal	Pass
1**	1127.750	27.26	-15.59	54.0	26.74	AV	17.00	150	Horizontal	Pass
2	2215.250	42.53	-13.16	74.0	31.47	Peak	6.00	150	Horizontal	Pass
2**	2215.250	30.65	-13.16	54.0	23.35	AV	6.00	150	Horizontal	Pass
3	4341.500	47.23	-3.06	74.0	26.77	Peak	69.00	150	Horizontal	Pass
3**	4341.500	37.07	-3.06	54.0	16.93	AV	69.00	150	Horizontal	Pass
4	5203.000	101.59	-2.37	74.0	-27.59	Peak	279.00	150	Horizontal	N/A
4**	5203.000	91.83	-2.37	54.0	-37.83	AV	279.00	150	Horizontal	N/A
5	9340.213	46.81	-5.19	74.0	27.19	Peak	12.00	150	Horizontal	Pass
5**	9340.213	36.62	-5.19	54.0	17.38	AV	12.00	150	Horizontal	Pass
6	17245.575	49.94	-0.69	74.0	24.06	Peak	252.00	150	Horizontal	Pass
6**	17245.575	39.44	-0.69	54.0	14.56	AV	252.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-17_21.40.35

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC


Test Site: 966#2

Test Voltage: 5.2G WIFI 11ac80 CH42 P=16.5

Test Engineer: Liu Yabo

Remark: 数据线: A13 ANT0

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

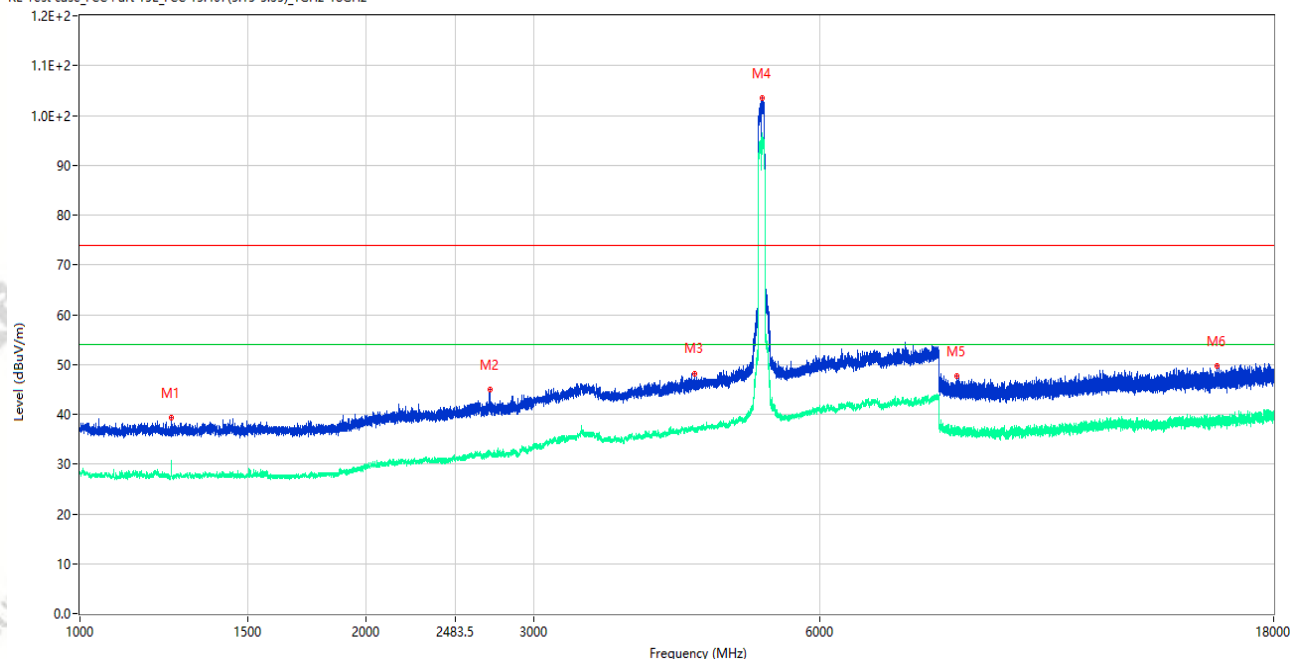

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1246.250	39.43	-16.13	74.0	34.57	Peak	219.00	150	Vertical	Pass
1**	1246.250	27.47	-16.13	54.0	26.53	AV	219.00	150	Vertical	Pass
2	2698.500	44.90	-10.57	74.0	29.10	Peak	200.00	150	Vertical	Pass
2**	2698.500	31.89	-10.57	54.0	22.11	AV	200.00	150	Vertical	Pass
3	4427.000	48.22	-2.92	74.0	25.78	Peak	60.00	150	Vertical	Pass
3**	4427.000	36.54	-2.92	54.0	17.46	AV	60.00	150	Vertical	Pass
4	5216.000	103.51	-2.32	74.0	-29.51	Peak	344.00	150	Vertical	N/A
4**	5216.000	96.04	-2.32	54.0	-42.04	AV	344.00	150	Vertical	N/A
5	8359.813	47.73	-4.73	74.0	26.27	Peak	28.00	150	Vertical	Pass
5**	8359.813	37.34	-4.73	54.0	16.66	AV	28.00	150	Vertical	Pass
6	15710.474	49.79	-1.81	74.0	24.21	Peak	249.00	150	Vertical	Pass
6**	15710.474	38.74	-1.81	54.0	15.26	AV	249.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-17_21.46.07

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC


Test Site: 966#2

Test Voltage: 5.2G WIFI 11ac80 CH42 P=16.5

Test Engineer: Liu Yabo

Remark: 数据线: A13 ANT0

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

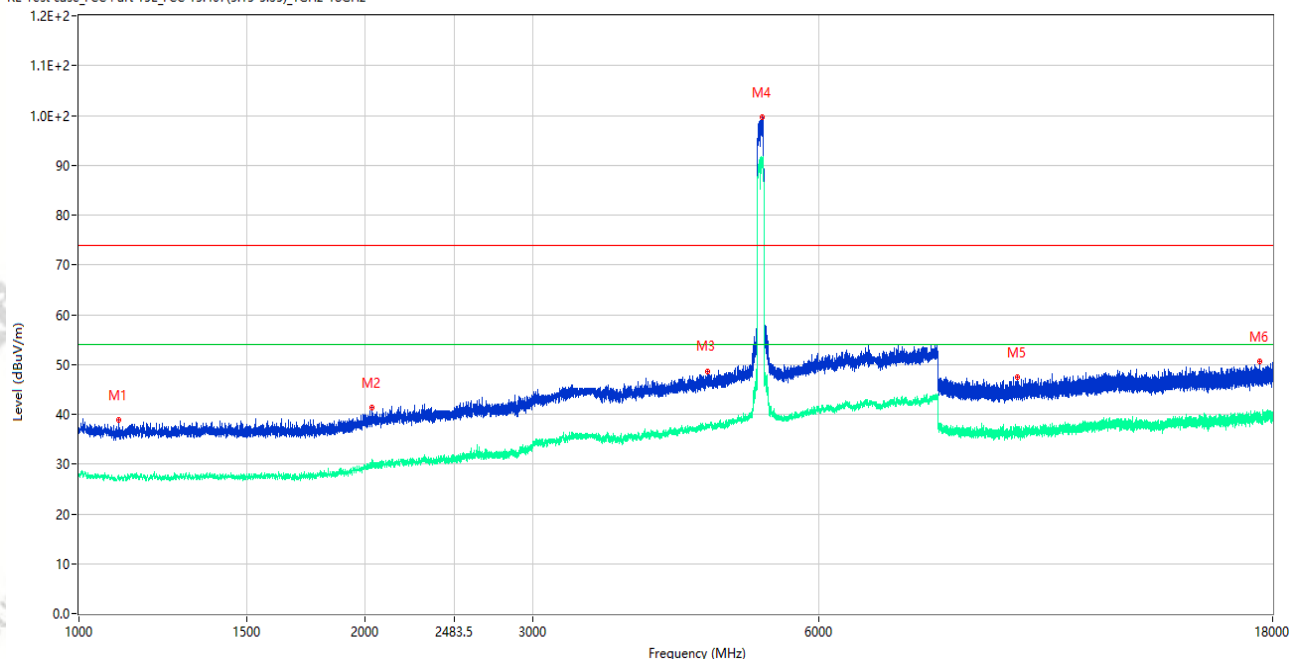

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1100.250	38.79	-15.72	74.0	35.21	Peak	360.00	150	Horizontal	Pass
1**	1100.250	27.20	-15.72	54.0	26.80	AV	360.00	150	Horizontal	Pass
2	2033.750	41.37	-13.44	74.0	32.63	Peak	27.00	150	Horizontal	Pass
2**	2033.750	30.34	-13.44	54.0	23.66	AV	27.00	150	Horizontal	Pass
3	4581.500	48.61	-3.38	74.0	25.39	Peak	187.00	150	Horizontal	Pass
3**	4581.500	37.41	-3.38	54.0	16.59	AV	187.00	150	Horizontal	Pass
4	5228.500	99.58	-2.30	74.0	-25.58	Peak	21.00	150	Horizontal	N/A
4**	5228.500	91.31	-2.30	54.0	-37.31	AV	21.00	150	Horizontal	N/A
5	9704.300	47.52	-3.43	74.0	26.48	Peak	354.00	150	Horizontal	Pass
5**	9704.300	37.23	-3.43	54.0	16.77	AV	354.00	150	Horizontal	Pass
6	17457.150	50.62	0.12	74.0	23.38	Peak	184.00	150	Horizontal	Pass
6**	17457.150	39.67	0.12	54.0	14.33	AV	184.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-17_21.59.09

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC


Test Site: 966#2

Test Voltage: 5.2G WIFI 11aX20 CH44 P=17.5

Test Engineer: Liu Yabo

Remark: 数据线: A13 ANT0

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

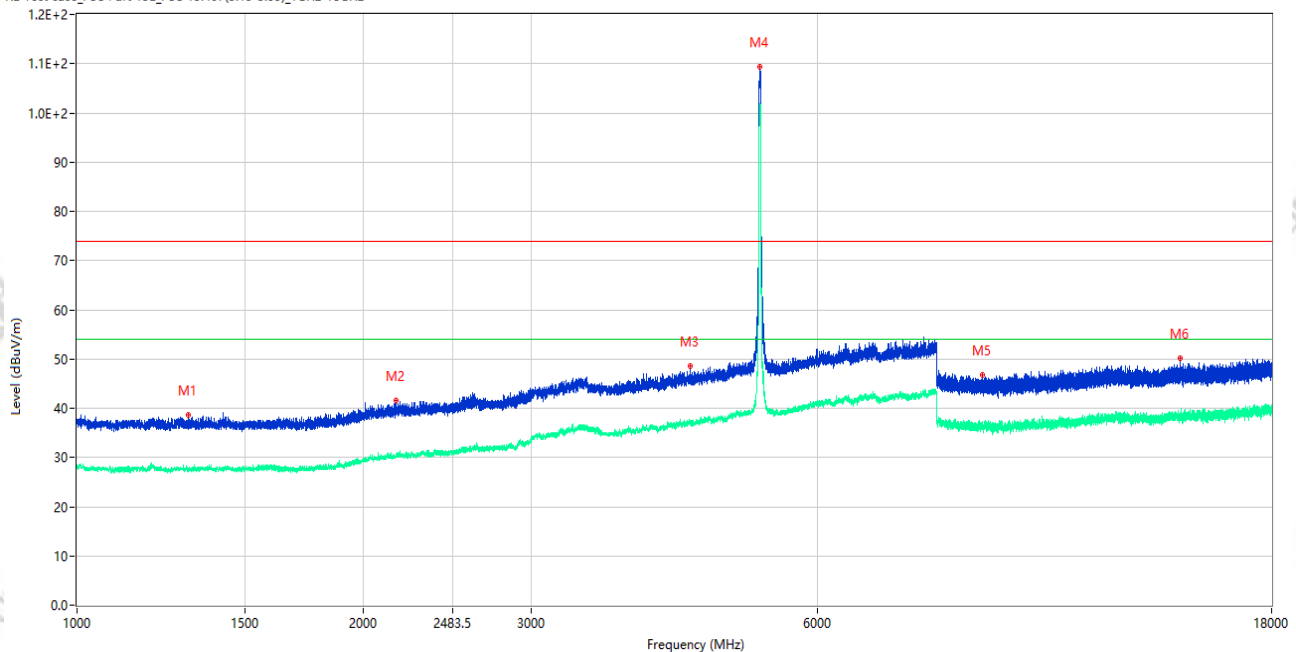

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1310.250	38.66	-15.73	74.0	35.34	Peak	167.00	150	Vertical	Pass
1**	1310.250	27.54	-15.73	54.0	26.46	AV	167.00	150	Vertical	Pass
2	2163.250	41.66	-13.22	74.0	32.34	Peak	304.00	150	Vertical	Pass
2**	2163.250	30.55	-13.22	54.0	23.45	AV	304.00	150	Vertical	Pass
3	4409.500	48.54	-2.89	74.0	25.46	Peak	354.00	150	Vertical	Pass
3**	4409.500	37.24	-2.89	54.0	16.76	AV	354.00	150	Vertical	Pass
4	5217.000	109.38	-2.34	74.0	-35.38	Peak	0.00	150	Vertical	N/A
4**	5217.000	100.49	-2.34	54.0	-46.49	AV	0.00	150	Vertical	N/A
5	8944.775	46.71	-4.52	74.0	27.29	Peak	360.00	150	Vertical	Pass
5**	8944.775	36.53	-4.52	54.0	17.47	AV	360.00	150	Vertical	Pass
6	14416.612	50.18	-2.84	74.0	23.82	Peak	115.00	150	Vertical	Pass
6**	14416.612	38.22	-2.84	54.0	15.78	AV	115.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-17_22.18.18

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC


Test Site: 966#2

Test Voltage: 5.2G WIFI 11aX20 CH44 P=17.5

Test Engineer: Liu Yabo

Remark: 数据线: A13 ANT0

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

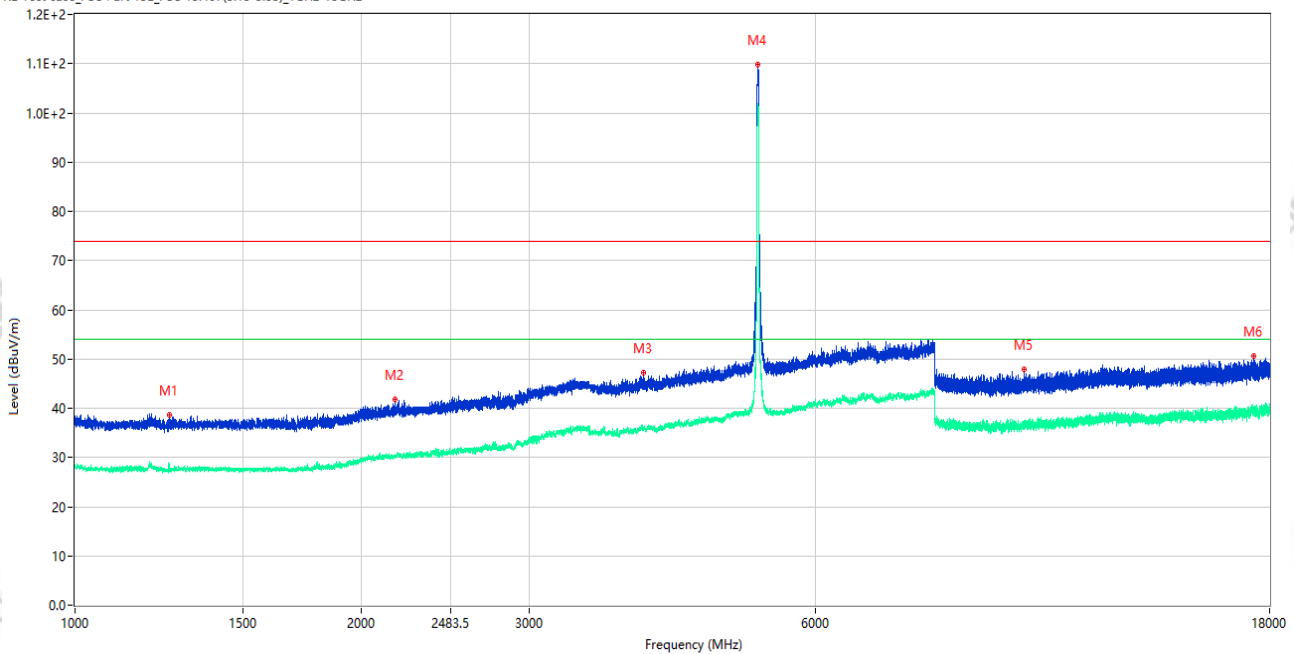

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1257.000	38.73	-16.07	74.0	35.27	Peak	39.00	150	Horizontal	Pass
1**	1257.000	28.77	-16.07	54.0	25.23	AV	39.00	150	Horizontal	Pass
2	2168.500	41.73	-13.05	74.0	32.27	Peak	228.00	150	Horizontal	Pass
2**	2168.500	30.16	-13.05	54.0	23.84	AV	228.00	150	Horizontal	Pass
3	3960.500	47.31	-4.02	74.0	26.69	Peak	296.00	150	Horizontal	Pass
3**	3960.500	36.18	-4.02	54.0	17.82	AV	296.00	150	Horizontal	Pass
4	5218.000	109.74	-2.38	74.0	-35.74	Peak	0.00	150	Horizontal	N/A
4**	5218.000	100.29	-2.38	54.0	-46.29	AV	0.00	150	Horizontal	N/A
5	9930.875	47.98	-4.05	74.0	26.02	Peak	123.00	150	Horizontal	Pass
5**	9930.875	36.55	-4.05	54.0	17.45	AV	123.00	150	Horizontal	Pass
6	17340.600	50.59	0.30	74.0	23.41	Peak	250.00	150	Horizontal	Pass
6**	17340.600	39.82	0.30	54.0	14.18	AV	250.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-17_22.32.18

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC


Test Site: 966#2

Test Voltage: 5.2G WIFI 11ax40 CH38 P=17.5

Test Engineer: Liu Yabo

Remark: 数据线: A13 ANT0

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

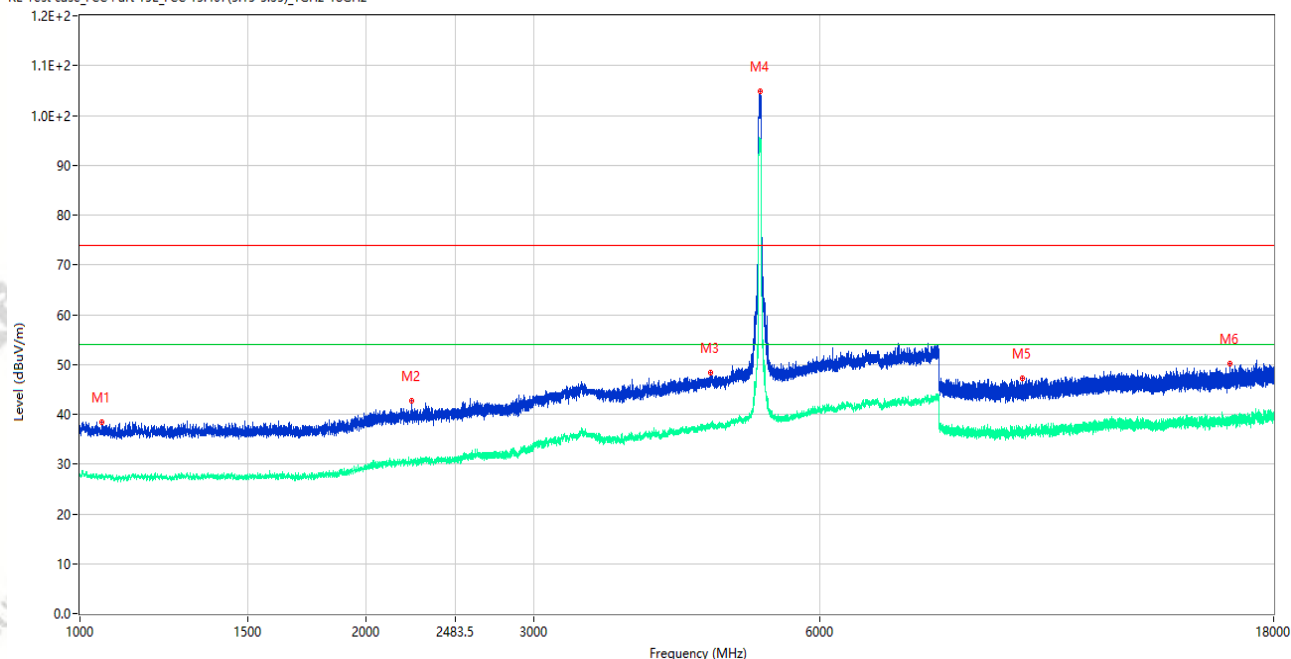

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1055.250	38.48	-15.38	74.0	35.52	Peak	108.00	150	Vertical	Pass
1**	1055.250	27.82	-15.38	54.0	26.18	AV	108.00	150	Vertical	Pass
2	2233.000	42.63	-13.10	74.0	31.37	Peak	360.00	150	Vertical	Pass
2**	2233.000	30.50	-13.10	54.0	23.50	AV	360.00	150	Vertical	Pass
3	4604.000	48.27	-3.64	74.0	25.73	Peak	359.00	150	Vertical	Pass
3**	4604.000	37.22	-3.64	54.0	16.78	AV	359.00	150	Vertical	Pass
4	5197.000	104.78	-2.33	74.0	-30.78	Peak	3.00	150	Vertical	N/A
4**	5197.000	95.05	-2.33	54.0	-41.05	AV	3.00	150	Vertical	N/A
5	9788.375	47.31	-3.86	74.0	26.69	Peak	0.00	150	Vertical	Pass
5**	9788.375	36.53	-3.86	54.0	17.47	AV	0.00	150	Vertical	Pass
6	16173.787	50.12	-0.96	74.0	23.88	Peak	284.00	150	Vertical	Pass
6**	16173.787	39.39	-0.96	54.0	14.61	AV	284.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-17_22.32.18

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC


Test Site: 966#2

Test Voltage: 5.2G WIFI 11ax40 CH38 P=17.5

Test Engineer: Liu Yabo

Remark: 数据线: A13 ANT0

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

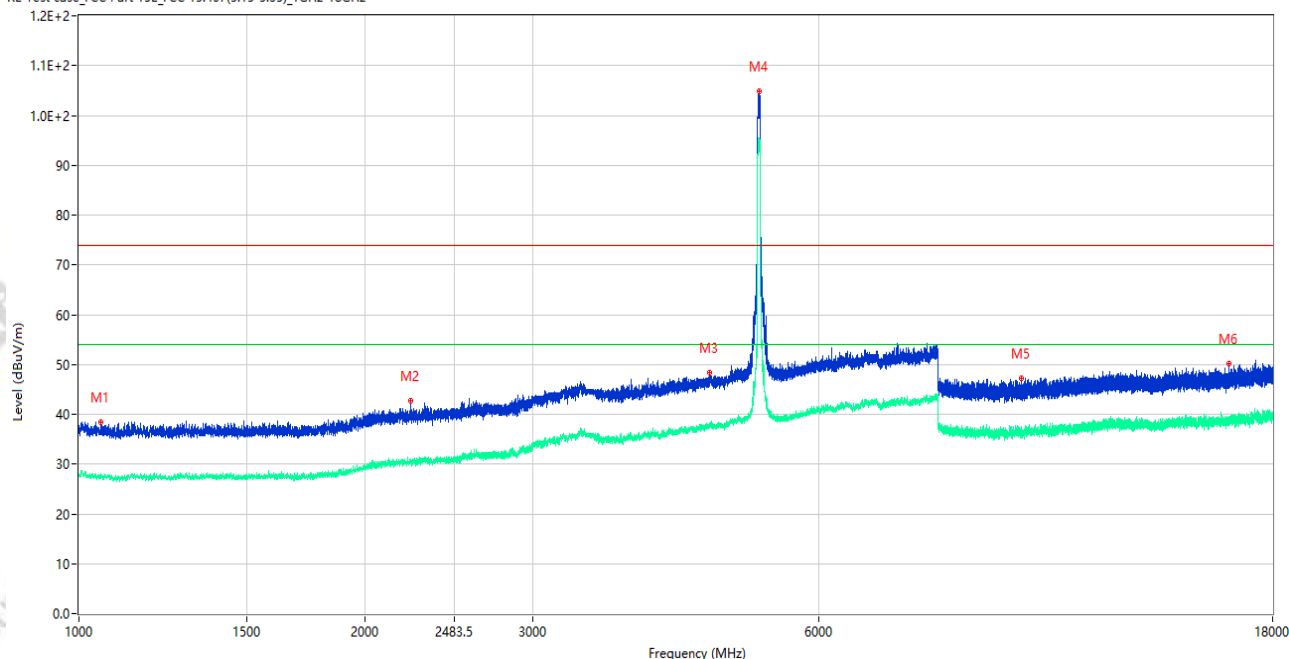

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1055.250	38.48	-15.38	74.0	35.52	Peak	108.00	150	Vertical	Pass
1**	1055.250	27.82	-15.38	54.0	26.18	AV	108.00	150	Vertical	Pass
2	2233.000	42.63	-13.10	74.0	31.37	Peak	360.00	150	Vertical	Pass
2**	2233.000	30.50	-13.10	54.0	23.50	AV	360.00	150	Vertical	Pass
3	4604.000	48.27	-3.64	74.0	25.73	Peak	359.00	150	Vertical	Pass
3**	4604.000	37.22	-3.64	54.0	16.78	AV	359.00	150	Vertical	Pass
4	5197.000	104.78	-2.33	74.0	-30.78	Peak	3.00	150	Vertical	N/A
4**	5197.000	95.05	-2.33	54.0	-41.05	AV	3.00	150	Vertical	N/A
5	9788.375	47.31	-3.86	74.0	26.69	Peak	0.00	150	Vertical	Pass
5**	9788.375	36.53	-3.86	54.0	17.47	AV	0.00	150	Vertical	Pass
6	16173.787	50.12	-0.96	74.0	23.88	Peak	284.00	150	Vertical	Pass
6**	16173.787	39.39	-0.96	54.0	14.61	AV	284.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-17_23.10.54

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC


Test Site: 966#2

Test Voltage: 5.2G WIFI 11ax80 CH42 P=17.5

Test Engineer: Liu Yabo

Remark: 数据线: A13 ANT0

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

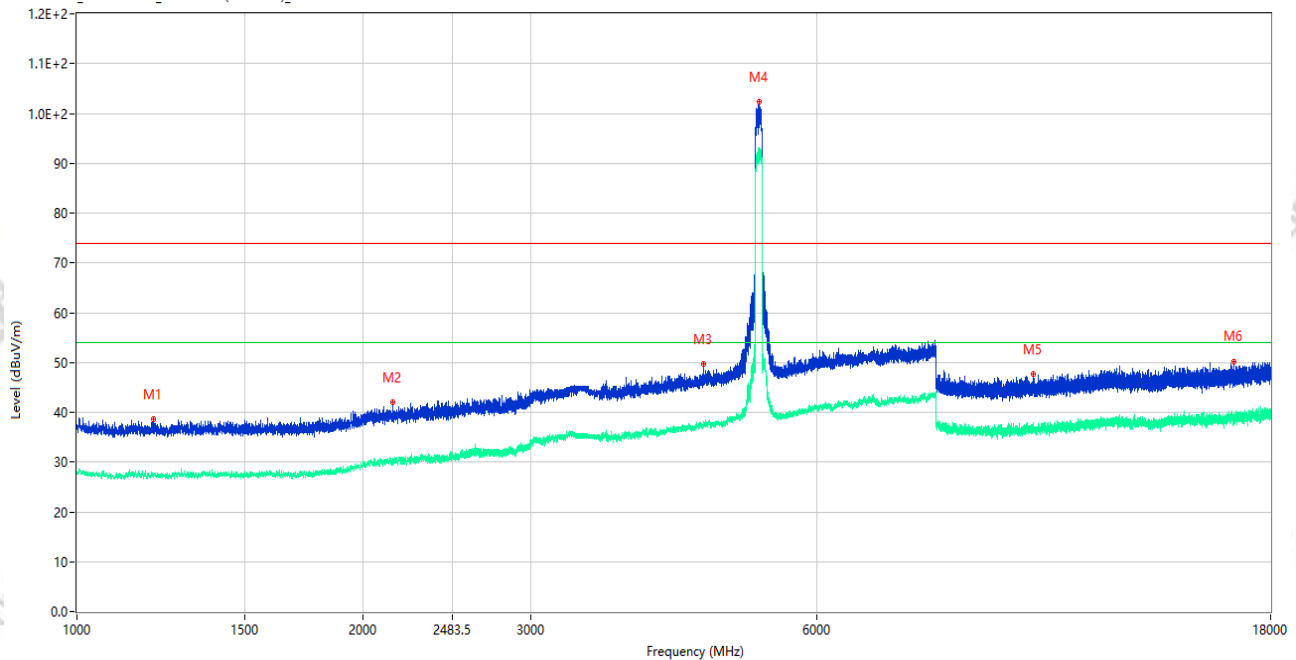

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1203.500	38.67	-15.76	74.0	35.33	Peak	360.00	100	Vertical	Pass
1**	1203.500	27.36	-15.76	54.0	26.64	AV	360.00	100	Vertical	Pass
2	2149.000	41.93	-13.70	74.0	32.07	Peak	259.00	100	Vertical	Pass
2**	2149.000	30.45	-13.70	54.0	23.55	AV	259.00	100	Vertical	Pass
3	4558.500	49.63	-2.72	74.0	24.37	Peak	138.00	100	Vertical	Pass
3**	4558.500	37.45	-2.72	54.0	16.55	AV	138.00	100	Vertical	Pass
4	5216.500	102.31	-2.33	74.0	-28.31	Peak	11.00	100	Vertical	N/A
4**	5216.500	92.26	-2.33	54.0	-38.26	AV	11.00	100	Vertical	N/A
5	10124.200	47.69	-4.07	74.0	26.31	Peak	0.00	100	Vertical	Pass
5**	10124.200	36.53	-4.07	54.0	17.47	AV	0.00	100	Vertical	Pass
6	16465.425	50.27	-1.84	74.0	23.73	Peak	185.00	100	Vertical	Pass
6**	16465.425	38.47	-1.84	54.0	15.53	AV	185.00	100	Vertical	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-17_23.05.57

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC


Test Site: 966#2

Test Voltage: 5.2G WIFI 11ax80 CH42 P=17.5

Test Engineer: Liu Yabo

Remark: 数据线: A13 ANT0

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

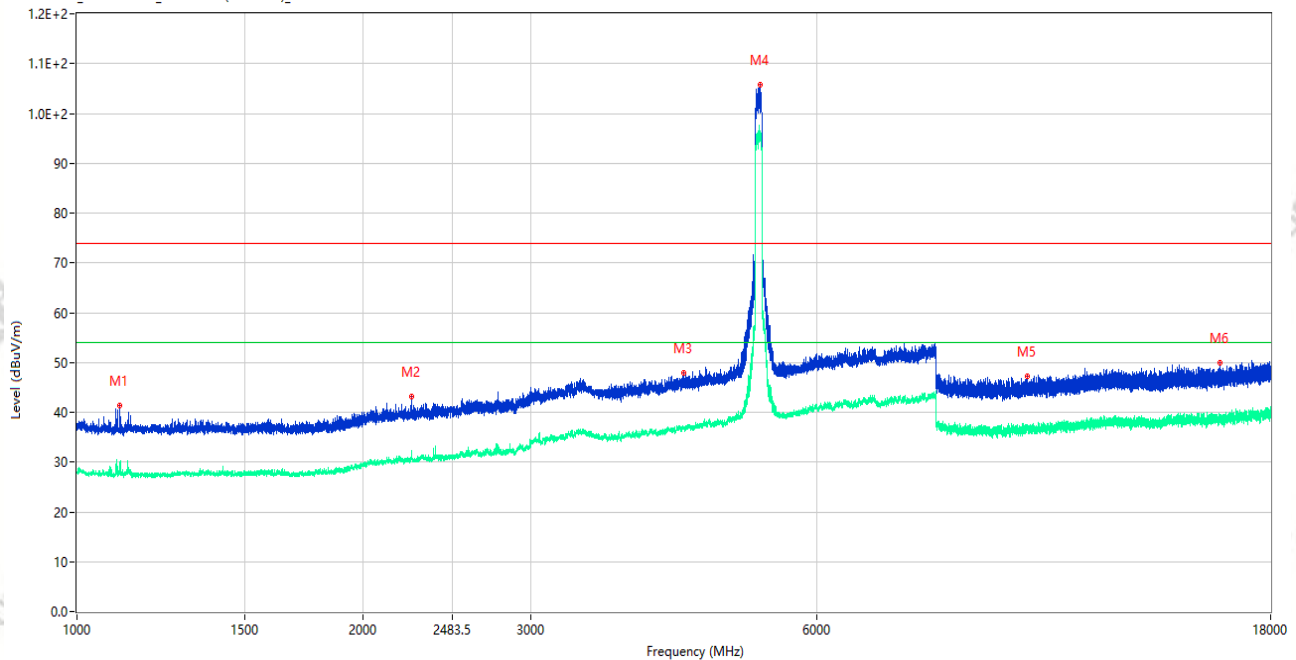

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1108.000	41.30	-15.76	74.0	32.70	Peak	360.00	100	Horizontal	Pass
1**	1108.000	27.60	-15.76	54.0	26.40	AV	360.00	100	Horizontal	Pass
2	2247.250	43.14	-12.84	74.0	30.86	Peak	3.00	100	Horizontal	Pass
2**	2247.250	32.35	-12.84	54.0	21.65	AV	3.00	100	Horizontal	Pass
3	4342.500	47.88	-3.07	74.0	26.12	Peak	169.00	100	Horizontal	Pass
3**	4342.500	36.79	-3.07	54.0	17.21	AV	169.00	100	Horizontal	Pass
4	5226.500	105.72	-2.32	74.0	-31.72	Peak	344.00	100	Horizontal	N/A
4**	5226.500	96.49	-2.32	54.0	-42.49	AV	344.00	100	Horizontal	N/A
5	9987.401	47.19	-3.74	74.0	26.81	Peak	71.00	100	Horizontal	Pass
5**	9987.401	37.29	-3.74	54.0	16.71	AV	71.00	100	Horizontal	Pass
6	15932.026	49.88	-2.34	74.0	24.12	Peak	113.00	100	Horizontal	Pass
6**	15932.026	38.96	-2.34	54.0	15.04	AV	113.00	100	Horizontal	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-19_17.10.13

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E


Work Mode: Normal working Link(5G WIFI)

Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Liu Yabo

Remark: 数据线: A13 ANT0

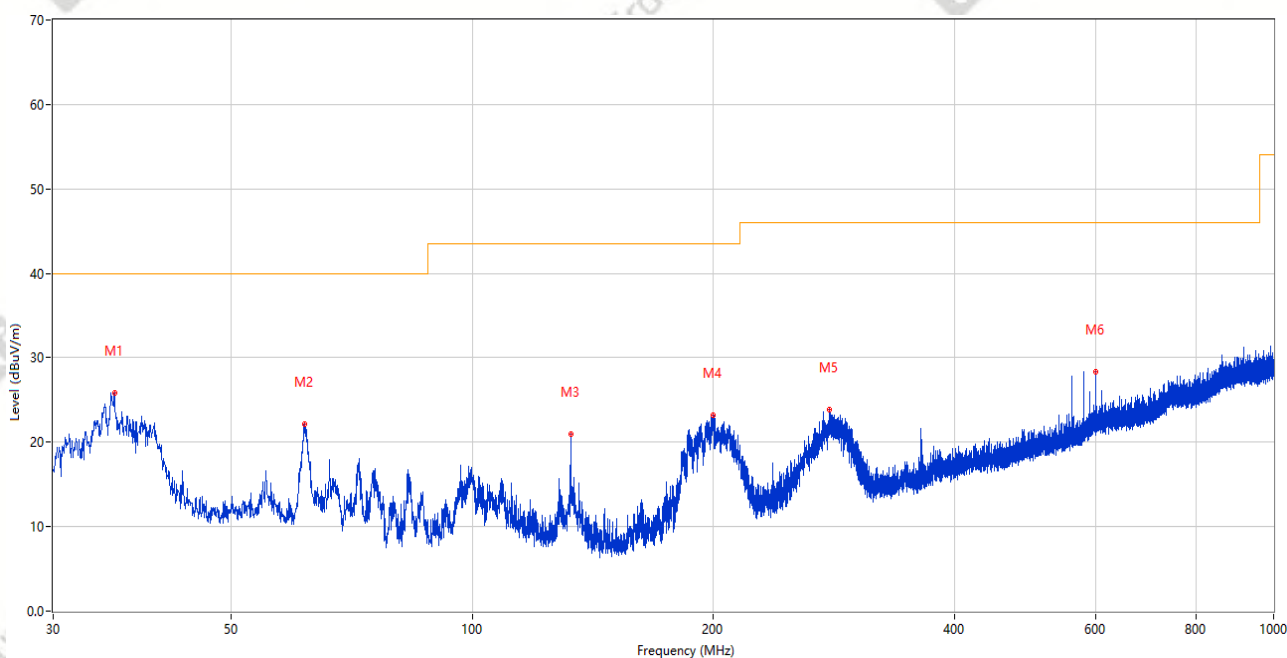


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	35.772	25.88	-27.48	40.0	14.12	Peak	35.00	100	Vertical	Pass
2	61.719	22.16	-26.44	40.0	17.84	Peak	290.00	200	Vertical	Pass
3	132.674	20.94	-29.20	43.5	22.56	Peak	48.00	200	Vertical	Pass
4	199.556	23.17	-25.75	43.5	20.33	Peak	8.00	200	Vertical	Pass
5	279.241	23.82	-23.74	46.0	22.18	Peak	302.00	200	Vertical	Pass
6	600.020	28.40	-14.90	46.0	17.60	Peak	115.00	100	Vertical	Pass

Test Result

Project Number: P-CC26060005
Test Time: 2026-07-19_17.04.26

EUT Name:	Siyata SD7 Ultra E	Temp.(°C):	23.2
Model Number:	SD7 Ultra E	Humidity (%RH):	46
Sample Number:	CC26050143-001-S08	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	Normal working Link(5G WIFI)
Test Site:	966#2	Test Voltage:	DC 5V From PC
Test Engineer:	Liu Yabo	Remark:	数据线: A13 ANT0

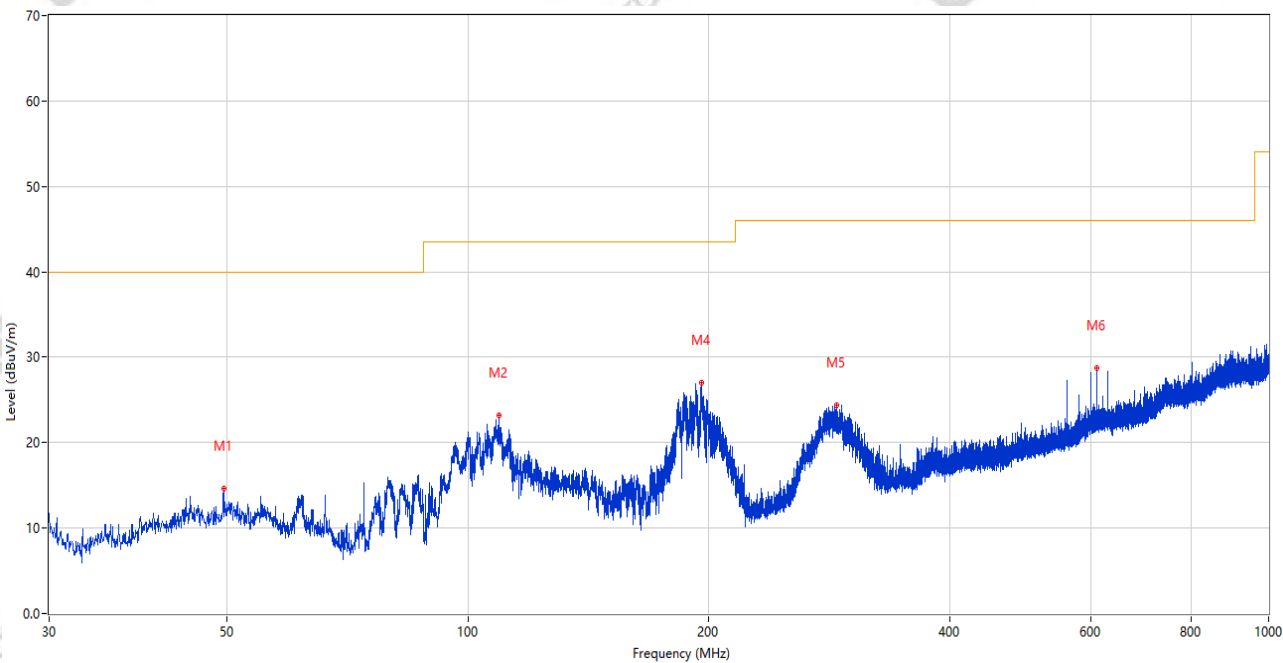

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	49.545	14.59	-24.53	40.0	25.41	Peak	151.00	200	Horizontal	Pass
2	109.395	23.26	-26.53	43.5	20.24	Peak	360.00	200	Horizontal	Pass
3	101.295	17.61	-26.10	43.5	25.89	Peak	14.00	200	Horizontal	Pass
4	195.676	27.06	-25.53	43.5	16.44	Peak	295.00	100	Horizontal	Pass
5	288.651	24.39	-23.22	46.0	21.61	Peak	348.00	200	Horizontal	Pass
6	609.963	28.72	-14.73	46.0	17.28	Peak	351.00	100	Horizontal	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_01.32.38

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC


Test Site: 966#2

Test Voltage: 5.3G WIFI 11a CH60 P=17.5

Test Engineer: Zhou Xu

Remark: 数据线: A13 ANT0

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

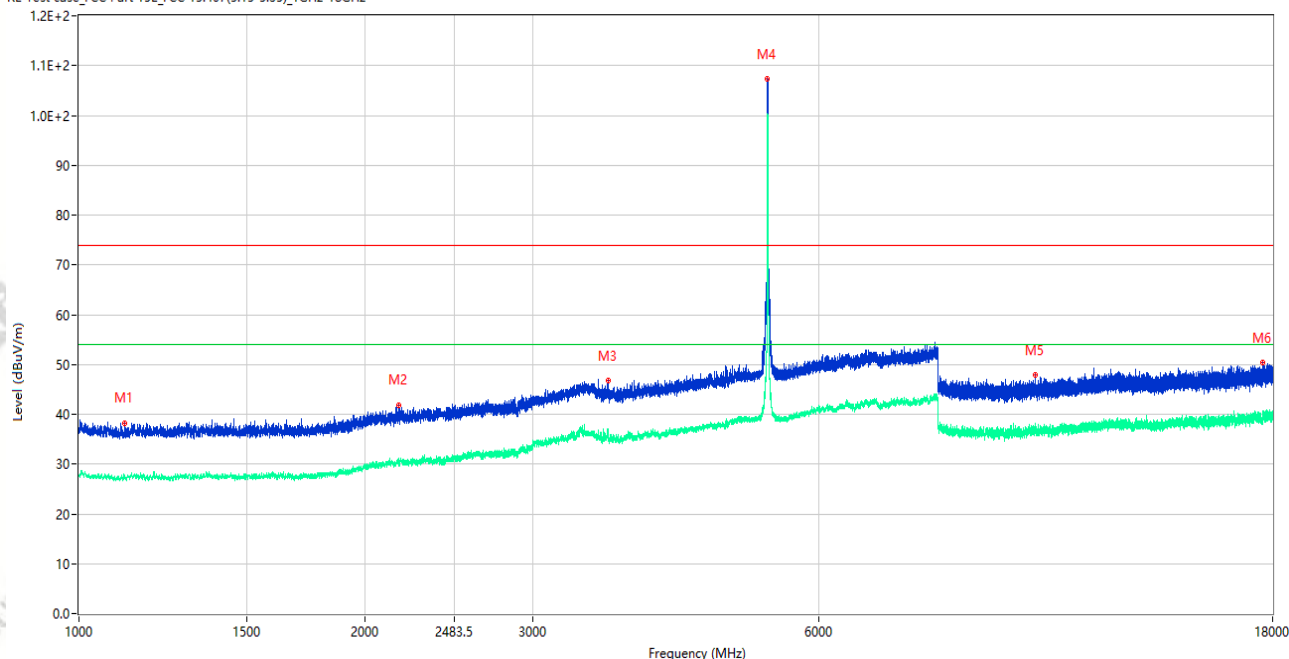

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1116.500	38.18	-15.79	74.0	35.82	Peak	27.00	150	Vertical	Pass
1**	1116.500	27.20	-15.79	54.0	26.80	AV	27.00	150	Vertical	Pass
2	2166.750	41.89	-13.13	74.0	32.11	Peak	329.00	150	Vertical	Pass
2**	2166.750	30.58	-13.13	54.0	23.42	AV	329.00	150	Vertical	Pass
3	3599.500	46.89	-4.99	74.0	27.11	Peak	148.00	150	Vertical	Pass
3**	3599.500	36.97	-4.99	54.0	17.03	AV	148.00	150	Vertical	Pass
4	5298.500	107.27	-2.03	74.0	-33.27	Peak	30.00	150	Vertical	N/A
4**	5298.500	99.01	-2.03	54.0	-45.01	AV	30.00	150	Vertical	N/A
5	10127.287	47.81	-4.03	74.0	26.19	Peak	0.00	150	Vertical	Pass
5**	10127.287	36.99	-4.03	54.0	17.01	AV	0.00	150	Vertical	Pass
6	17589.449	50.31	0.69	74.0	23.69	Peak	48.00	150	Vertical	Pass
6**	17589.449	39.82	0.69	54.0	14.18	AV	48.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_01.27.49

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC


Test Site: 966#2

Test Voltage: 5.3G WIFI 11a CH60 P=17.5

Test Engineer: Zhou Xu

Remark: 数据线: A13 ANT0

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

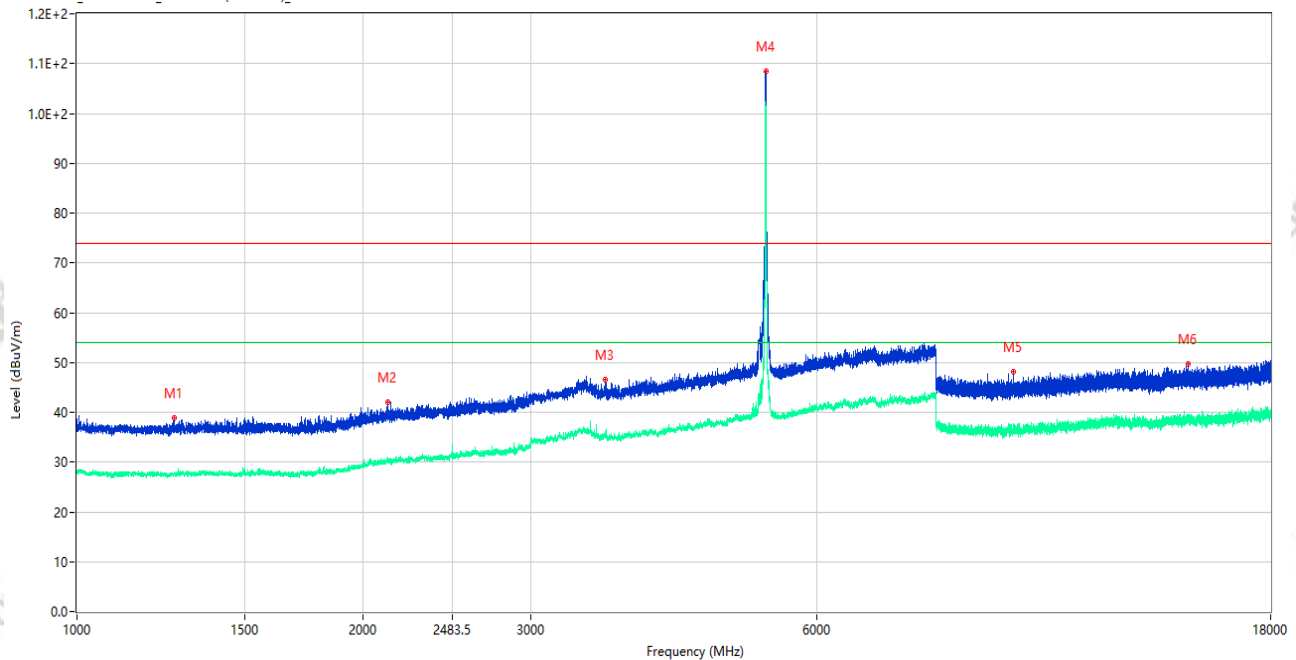

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1266.250	38.85	-15.94	74.0	35.15	Peak	230.00	150	Horizontal	Pass
1**	1266.250	27.94	-15.94	54.0	26.06	AV	230.00	150	Horizontal	Pass
2	2120.500	42.10	-13.35	74.0	31.90	Peak	355.00	150	Horizontal	Pass
2**	2120.500	30.64	-13.35	54.0	23.36	AV	355.00	150	Horizontal	Pass
3	3596.500	46.61	-5.11	74.0	27.39	Peak	139.00	150	Horizontal	Pass
3**	3596.500	35.82	-5.11	54.0	18.18	AV	139.00	150	Horizontal	Pass
4	5307.500	108.48	-2.00	74.0	-34.48	Peak	344.00	150	Horizontal	N/A
4**	5307.500	101.43	-2.00	54.0	-47.43	AV	344.00	150	Horizontal	N/A
5	9663.213	48.16	-3.26	74.0	25.84	Peak	193.00	150	Horizontal	Pass
5**	9663.213	37.42	-3.26	54.0	16.58	AV	193.00	150	Horizontal	Pass
6	14748.675	49.62	-1.73	74.0	24.38	Peak	0.00	150	Horizontal	Pass
6**	14748.675	38.08	-1.73	54.0	15.92	AV	0.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_01.40.19

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC


Test Site: 966#2

Test Voltage: 5.3G WIFI 11ac20 CH60 P=16.5

Test Engineer: Zhou Xu

Remark: 数据线: A13 ANT0

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

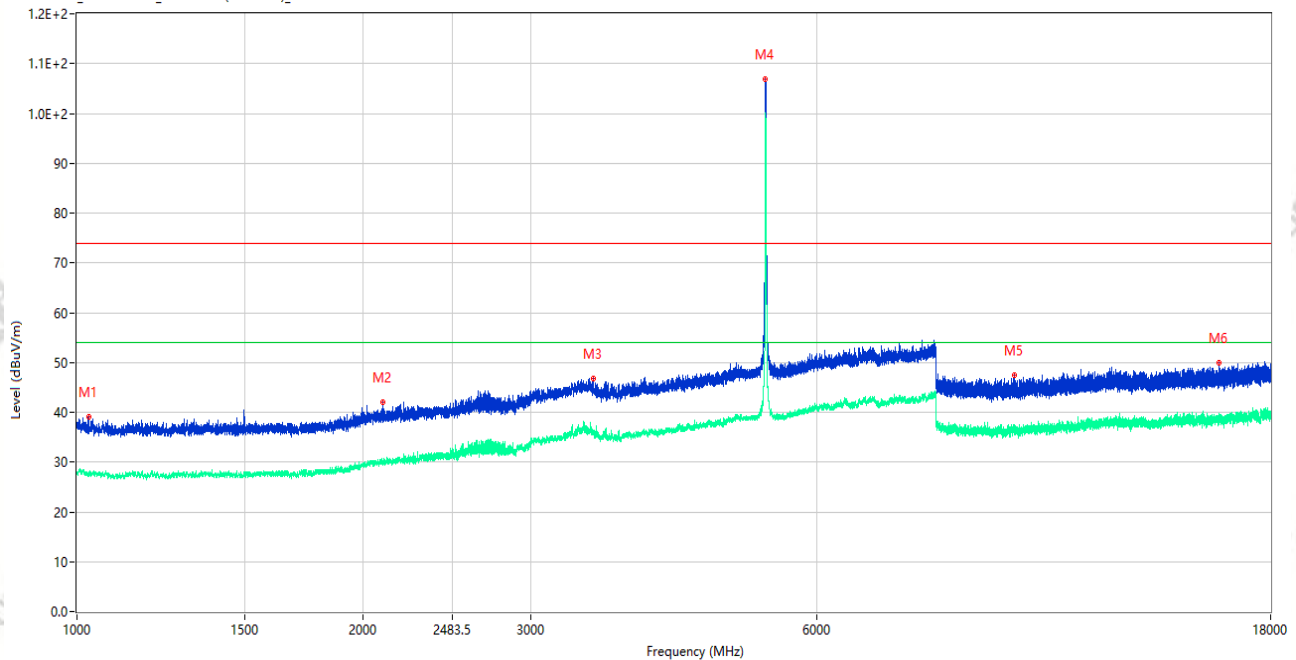

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1030.250	39.11	-15.37	74.0	34.89	Peak	131.00	150	Vertical	Pass
1**	1030.250	27.44	-15.37	54.0	26.56	AV	131.00	150	Vertical	Pass
2	2095.750	42.08	-13.59	74.0	31.92	Peak	252.00	150	Vertical	Pass
2**	2095.750	29.49	-13.59	54.0	24.51	AV	252.00	150	Vertical	Pass
3	3492.000	46.78	-5.83	74.0	27.22	Peak	137.00	150	Vertical	Pass
3**	3492.000	36.36	-5.83	54.0	17.64	AV	137.00	150	Vertical	Pass
4	5298.500	106.84	-2.03	74.0	-32.84	Peak	20.00	150	Vertical	N/A
4**	5298.500	99.77	-2.03	54.0	-45.77	AV	20.00	150	Vertical	N/A
5	9671.050	47.39	-3.52	74.0	26.61	Peak	168.00	150	Vertical	Pass
5**	9671.050	36.16	-3.52	54.0	17.84	AV	168.00	150	Vertical	Pass
6	15893.437	49.87	-1.63	74.0	24.13	Peak	250.00	150	Vertical	Pass
6**	15893.437	38.45	-1.63	54.0	15.55	AV	250.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_01.45.05

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC


Test Site: 966#2

Test Voltage: 5.3G WIFI 11ac20 CH60 P=16.5

Test Engineer: Zhou Xu

Remark: 数据线: A13 ANT0

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

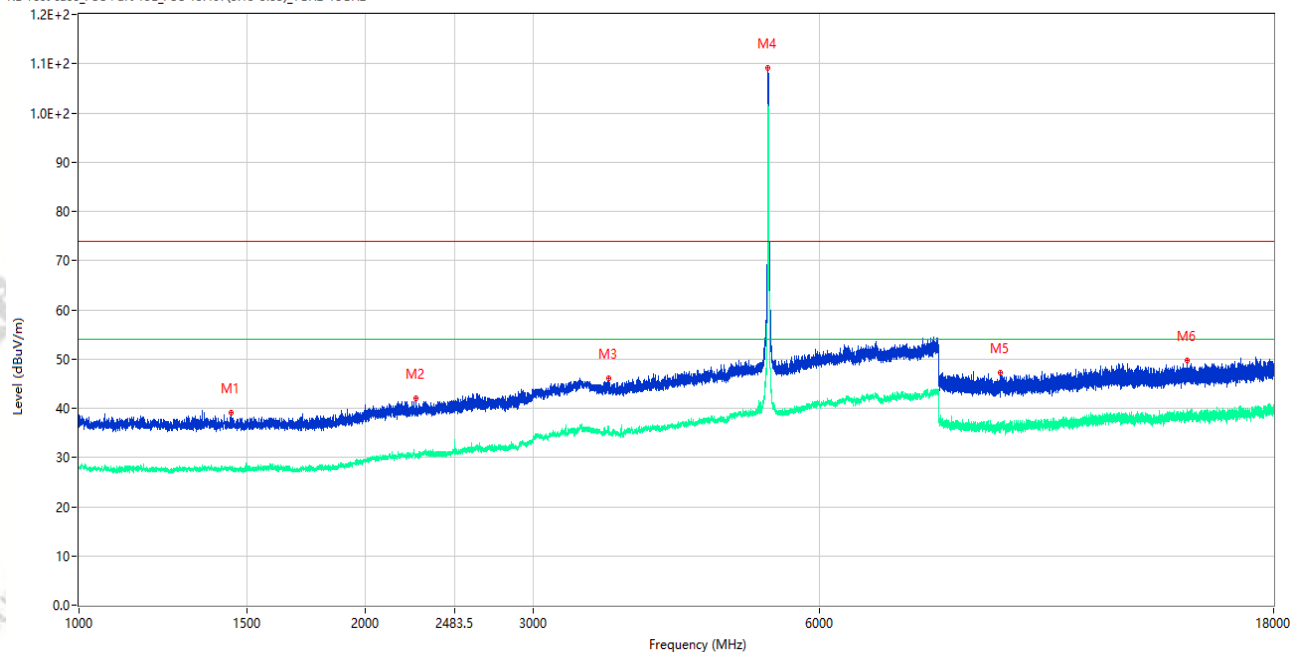

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1445.250	39.12	-15.92	74.0	34.88	Peak	237.00	150	Horizontal	Pass
1**	1445.250	27.53	-15.92	54.0	26.47	AV	237.00	150	Horizontal	Pass
2	2257.500	42.12	-13.17	74.0	31.88	Peak	2.00	150	Horizontal	Pass
2**	2257.500	30.07	-13.17	54.0	23.93	AV	2.00	150	Horizontal	Pass
3	3599.000	46.02	-5.03	74.0	27.98	Peak	168.00	150	Horizontal	Pass
3**	3599.000	36.09	-5.03	54.0	17.91	AV	168.00	150	Horizontal	Pass
4	5296.000	107.70	-2.00	74.0	-33.70	Peak	108.00	150	Horizontal	N/A
4**	5296.000	100.50	-2.00	54.0	-46.50	AV	108.00	150	Horizontal	N/A
5	9297.463	47.24	-5.46	74.0	26.76	Peak	214.00	150	Horizontal	Pass
5**	9297.463	35.97	-5.46	54.0	18.03	AV	214.00	150	Horizontal	Pass
6	14595.375	49.66	-2.22	74.0	24.34	Peak	48.00	150	Horizontal	Pass
6**	14595.375	38.81	-2.22	54.0	15.19	AV	48.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_01.56.41

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC


Test Site: 966#2

Test Voltage: 5.3G WIFI 11ac40 CH54 P=16.5

Test Engineer: Zhou Xu

Remark: 数据线: A13 ANT0

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

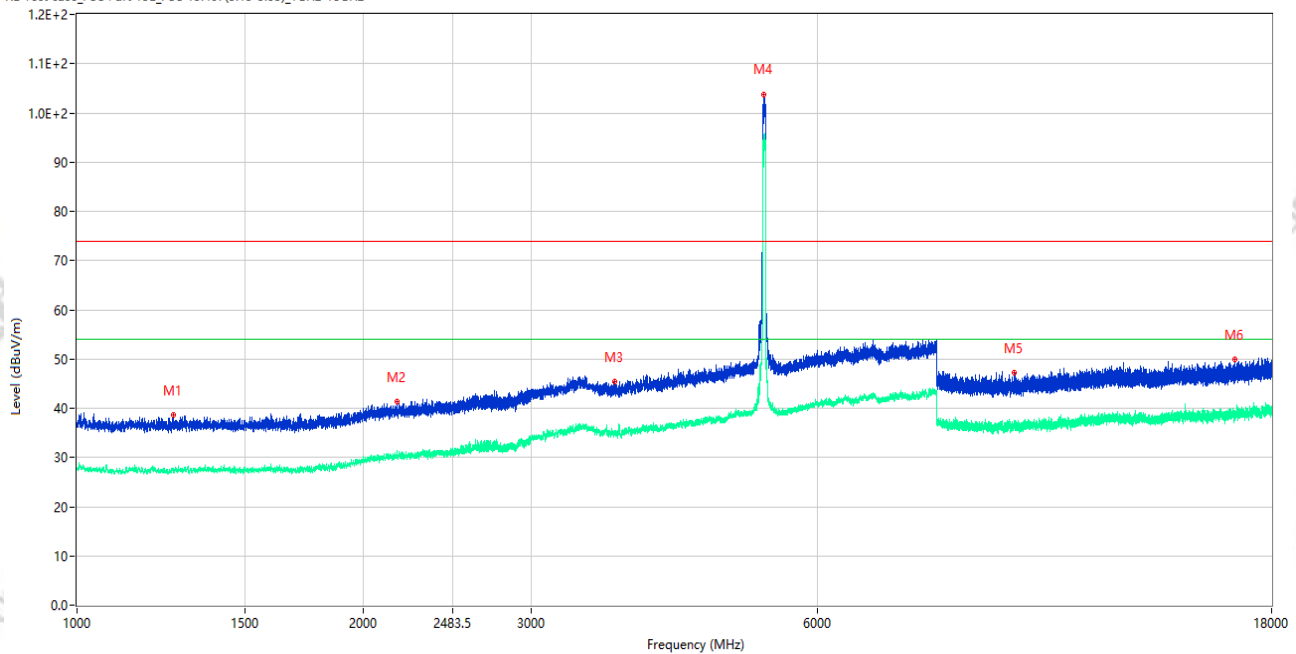

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1262.250	38.68	-15.99	74.0	35.32	Peak	360.00	150	Vertical	Pass
1**	1262.250	27.70	-15.99	54.0	26.30	AV	360.00	150	Vertical	Pass
2	2167.750	41.31	-13.06	74.0	32.69	Peak	64.00	150	Vertical	Pass
2**	2167.750	30.57	-13.06	54.0	23.43	AV	64.00	150	Vertical	Pass
3	3674.500	45.47	-5.24	74.0	28.53	Peak	138.00	150	Vertical	Pass
3**	3674.500	34.99	-5.24	54.0	19.01	AV	138.00	150	Vertical	Pass
4	5267.500	103.83	-2.40	74.0	-29.83	Peak	30.00	150	Vertical	N/A
4**	5267.500	95.57	-2.40	54.0	-41.57	AV	30.00	150	Vertical	N/A
5	9657.987	47.31	-3.24	74.0	26.69	Peak	96.00	150	Vertical	Pass
5**	9657.987	36.66	-3.24	54.0	17.34	AV	96.00	150	Vertical	Pass
6	16461.225	49.84	-1.70	74.0	24.16	Peak	184.00	150	Vertical	Pass
6**	16461.225	39.18	-1.70	54.0	14.82	AV	184.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_01.51.33

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC


Test Site: 966#2

Test Voltage: 5.3G WIFI 11ac40 CH54 P=16.5

Test Engineer: Zhou Xu

Remark: 数据线: A13 ANT0

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

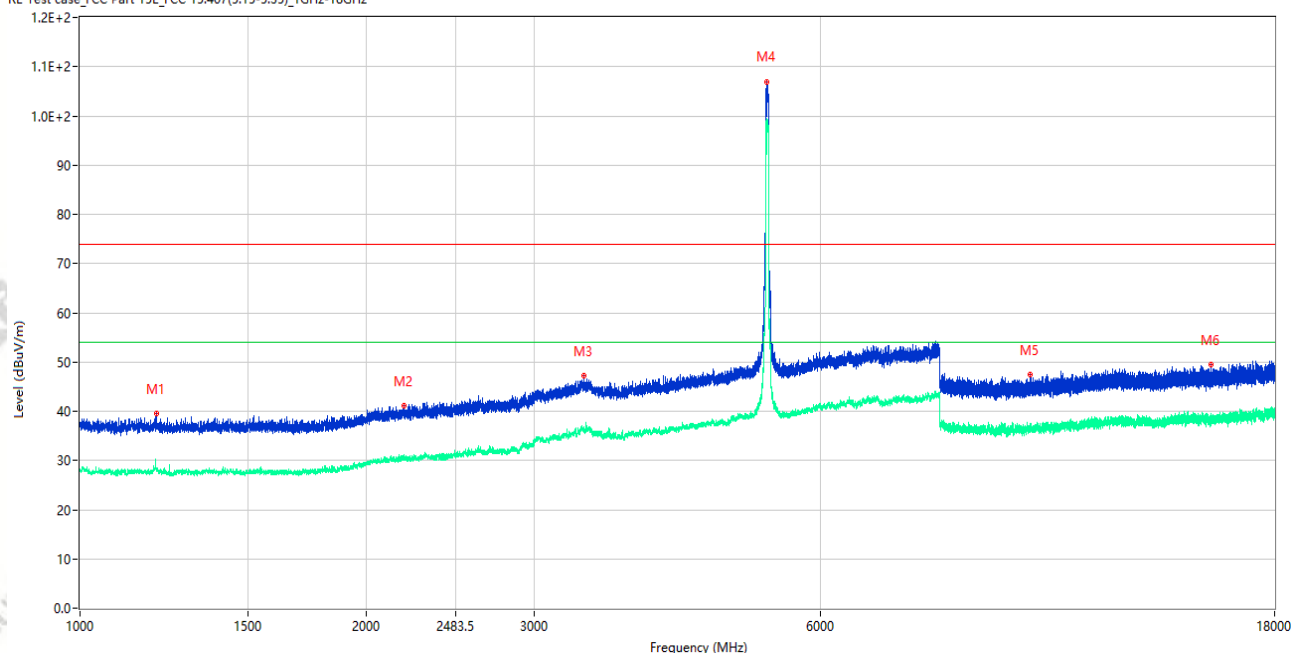

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1202.250	39.55	-15.74	74.0	34.45	Peak	249.00	150	Horizontal	Pass
1**	1202.250	27.77	-15.74	54.0	26.23	AV	249.00	150	Horizontal	Pass
2	2191.250	41.12	-13.36	74.0	32.88	Peak	95.00	150	Horizontal	Pass
2**	2191.250	30.10	-13.36	54.0	23.90	AV	95.00	150	Horizontal	Pass
3	3385.000	47.12	-5.43	74.0	26.88	Peak	178.00	150	Horizontal	Pass
3**	3385.000	36.01	-5.43	54.0	17.99	AV	178.00	150	Horizontal	Pass
4	5265.000	106.99	-2.37	74.0	-32.99	Peak	343.00	150	Horizontal	N/A
4**	5265.000	99.25	-2.37	54.0	-45.25	AV	343.00	150	Horizontal	N/A
5	9971.724	47.38	-3.83	74.0	26.62	Peak	353.00	150	Horizontal	Pass
5**	9971.724	36.91	-3.83	54.0	17.09	AV	353.00	150	Horizontal	Pass
6	15445.349	49.53	-1.74	74.0	24.47	Peak	359.00	150	Horizontal	Pass
6**	15445.349	38.76	-1.74	54.0	15.24	AV	359.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_02.05.08

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC


Test Site: 966#2

Test Voltage: 5.3G WIFI 11ac80 CH58 P=16.5

Test Engineer: Zhou Xu

Remark: 数据线: A13 ANT0

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

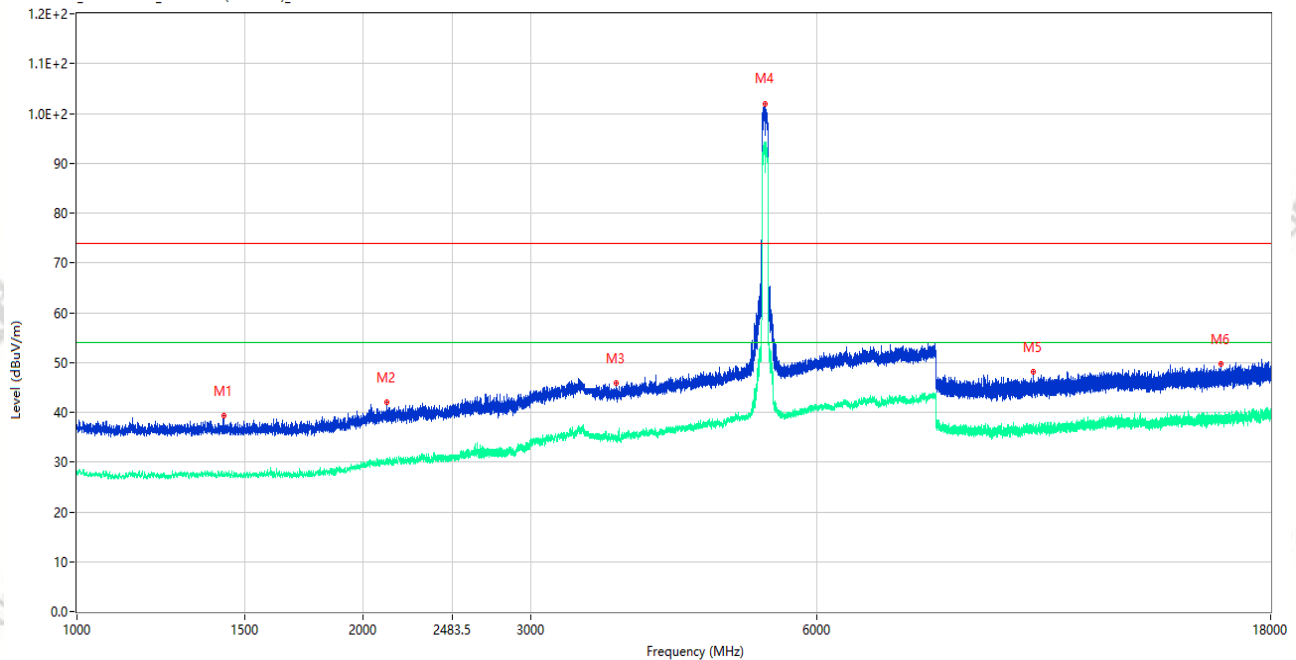

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1427.250	39.27	-15.97	74.0	34.73	Peak	297.00	150	Vertical	Pass
1**	1427.250	27.58	-15.97	54.0	26.42	AV	297.00	150	Vertical	Pass
2	2118.250	41.94	-13.44	74.0	32.06	Peak	130.00	150	Vertical	Pass
2**	2118.250	29.98	-13.44	54.0	24.02	AV	130.00	150	Vertical	Pass
3	3688.000	45.78	-5.79	74.0	28.22	Peak	144.00	150	Vertical	Pass
3**	3688.000	34.91	-5.79	54.0	19.09	AV	144.00	150	Vertical	Pass
4	5299.000	102.03	-2.01	74.0	-28.03	Peak	20.00	150	Vertical	N/A
4**	5299.000	94.08	-2.01	54.0	-40.08	AV	20.00	150	Vertical	N/A
5	10133.463	48.09	-3.93	74.0	25.91	Peak	310.00	150	Vertical	Pass
5**	10133.463	37.47	-3.93	54.0	16.53	AV	310.00	150	Vertical	Pass
6	15951.450	49.81	-2.71	74.0	24.19	Peak	182.00	150	Vertical	Pass
6**	15951.450	38.49	-2.71	54.0	15.51	AV	182.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_02.11.56

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC


Test Site: 966#2

Test Voltage: 5.3G WIFI 11ac80 CH58 P=16.5

Test Engineer: Zhou Xu

Remark: 数据线: A13 ANT0

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

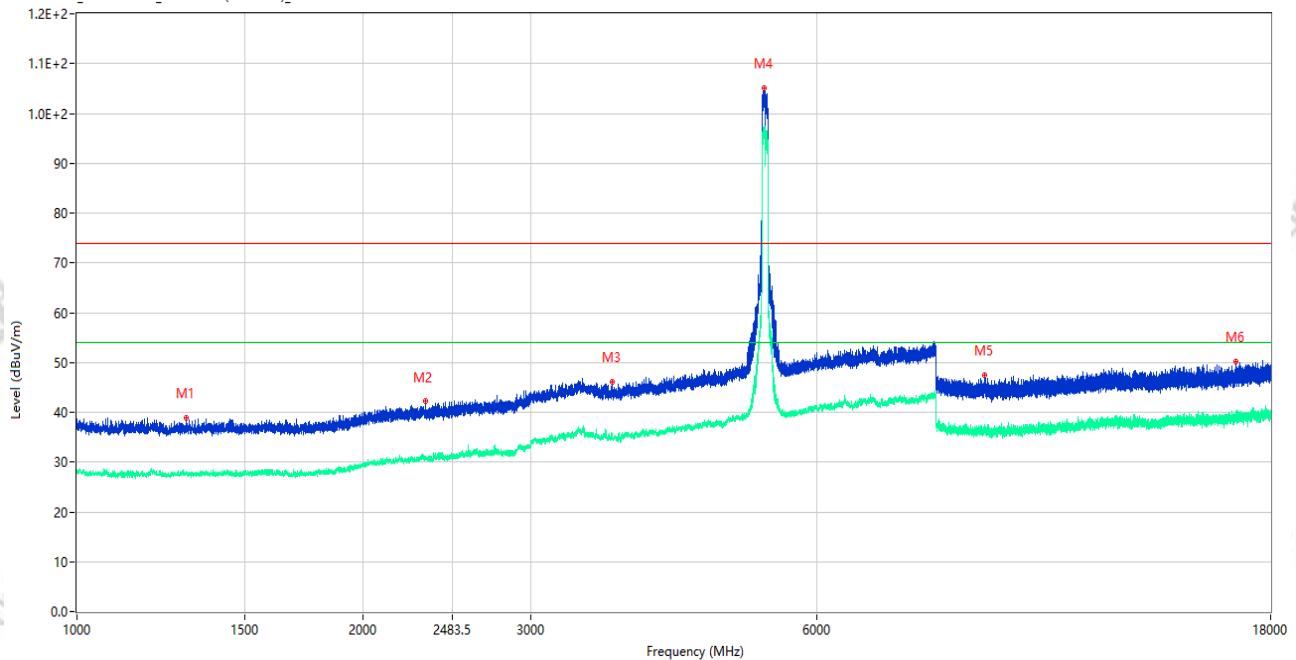


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1304.000	38.90	-15.59	74.0	35.10	Peak	5.00	150	Horizontal	Pass
1**	1304.000	27.85	-15.59	54.0	26.15	AV	5.00	150	Horizontal	Pass
2	2325.250	42.15	-12.19	74.0	31.85	Peak	2.00	150	Horizontal	Pass
2**	2325.250	30.94	-12.19	54.0	23.06	AV	2.00	150	Horizontal	Pass
3	3653.500	46.20	-5.16	74.0	27.80	Peak	139.00	150	Horizontal	Pass
3**	3653.500	35.07	-5.16	54.0	18.93	AV	139.00	150	Horizontal	Pass
4	5286.000	105.06	-2.12	74.0	-31.06	Peak	342.00	150	Horizontal	N/A
4**	5286.000	97.43	-2.12	54.0	-43.43	AV	342.00	150	Horizontal	N/A
5	8999.638	47.42	-4.50	74.0	26.58	Peak	145.00	150	Horizontal	Pass
5**	8999.638	36.53	-4.50	54.0	17.47	AV	145.00	150	Horizontal	Pass
6	16549.426	50.17	-1.11	74.0	23.83	Peak	117.00	150	Horizontal	Pass
6**	16549.426	39.14	-1.11	54.0	14.86	AV	117.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060005
Test Time: 2026-07-18_02.22.23

EUT Name:	Siyata SD7 Ultra E	Temp.(°C):	23.2
Model Number:	SD7 Ultra E	Humidity (%RH):	46
Sample Number:	CC26050143-001-S08	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	DC 5V From PC
Test Site:	966#2	Test Voltage:	5.3G WIFI 11ac160 CH50
		P=16.5	
Test Engineer:	Zhou Xu	Remark:	数据线: A13 ANT0

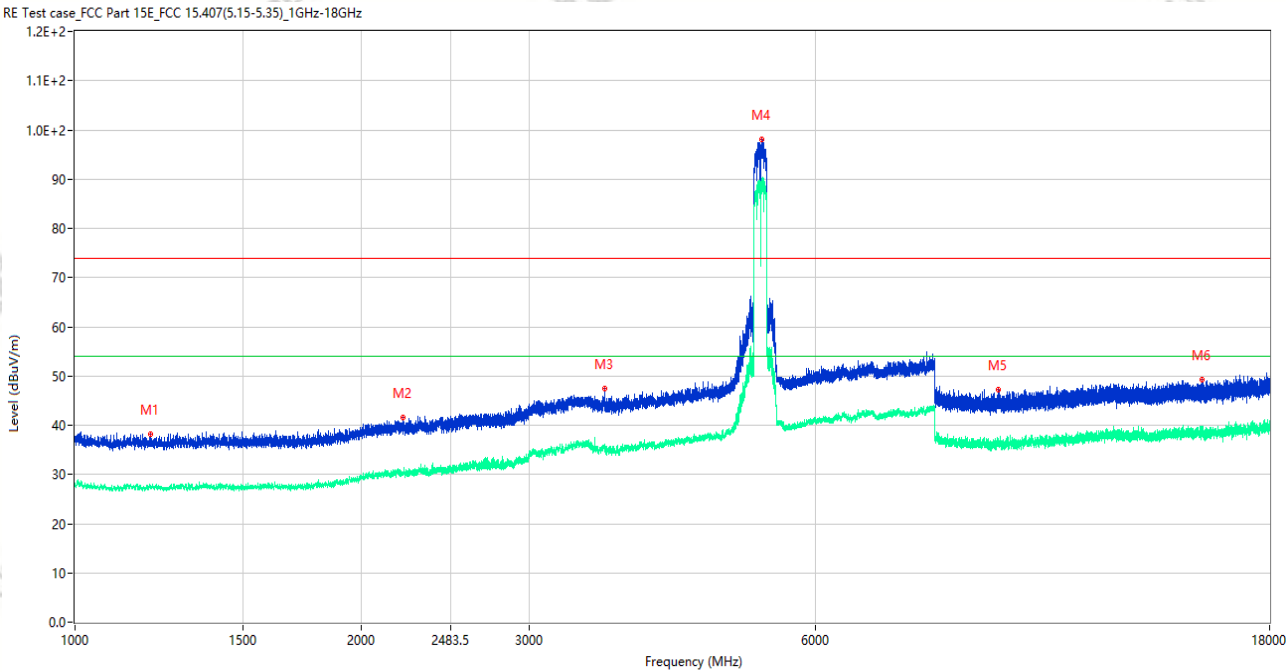

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1199.500	38.09	-15.75	74.0	35.91	Peak	108.00	150	Vertical	Pass
1**	1199.500	27.86	-15.75	54.0	26.14	AV	108.00	150	Vertical	Pass
2	2210.250	41.48	-13.31	74.0	32.52	Peak	217.00	150	Vertical	Pass
2**	2210.250	29.99	-13.31	54.0	24.01	AV	217.00	150	Vertical	Pass
3	3599.500	47.45	-4.99	74.0	26.55	Peak	196.00	150	Vertical	Pass
3**	3599.500	36.15	-4.99	54.0	17.85	AV	196.00	150	Vertical	Pass
4	5267.500	98.03	-2.40	74.0	-24.03	Peak	29.00	150	Vertical	N/A
4**	5267.500	89.79	-2.40	54.0	-35.79	AV	29.00	150	Vertical	N/A
5	9326.675	47.13	-5.19	74.0	26.87	Peak	360.00	150	Vertical	Pass
5**	9326.675	36.45	-5.19	54.0	17.55	AV	360.00	150	Vertical	Pass
6	15296.513	49.20	-1.82	74.0	24.80	Peak	15.00	150	Vertical	Pass
6**	15296.513	38.13	-1.82	54.0	15.87	AV	15.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_02.18.05

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC

Test Site: 966#2


Test Voltage: 5.3G WIFI 11ac160 CH50

P=16.5

Test Engineer: Zhou Xu

Remark: 数据线: A13 ANT0

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

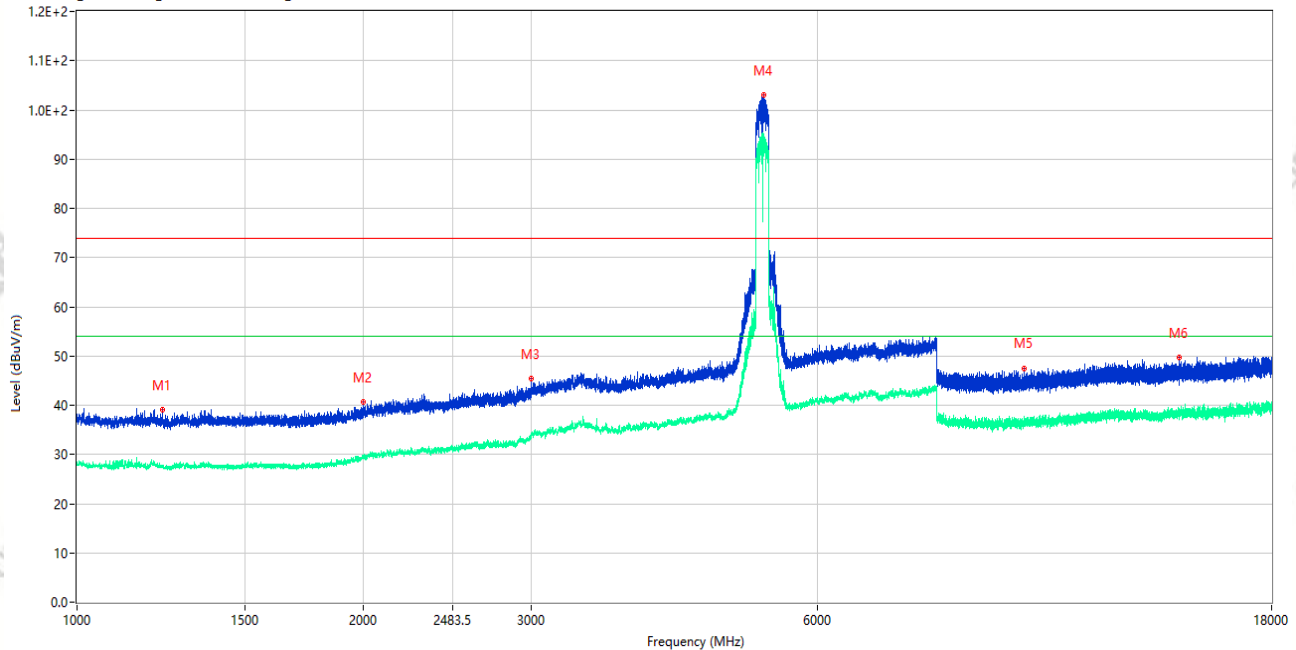

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1229.500	39.01	-15.98	74.0	34.99	Peak	360.00	150	Horizontal	Pass
1**	1229.500	27.44	-15.98	54.0	26.56	AV	360.00	150	Horizontal	Pass
2	1999.250	40.64	-14.33	74.0	33.36	Peak	64.00	150	Horizontal	Pass
2**	1999.250	29.31	-14.33	54.0	24.69	AV	64.00	150	Horizontal	Pass
3	3001.500	45.39	-7.92	74.0	28.61	Peak	0.00	150	Horizontal	Pass
3**	3001.500	33.83	-7.92	54.0	20.17	AV	0.00	150	Horizontal	Pass
4	5265.500	103.14	-2.38	74.0	-29.14	Peak	342.00	150	Horizontal	N/A
4**	5265.500	94.99	-2.38	54.0	-40.99	AV	342.00	150	Horizontal	N/A
5	9891.450	47.57	-4.26	74.0	26.43	Peak	360.00	150	Horizontal	Pass
5**	9891.450	36.77	-4.26	54.0	17.23	AV	360.00	150	Horizontal	Pass
6	14378.287	49.61	-2.05	74.0	24.39	Peak	47.00	150	Horizontal	Pass
6**	14378.287	37.95	-2.05	54.0	16.05	AV	47.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_02.28.59

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC


Test Site: 966#2

Test Voltage: 5.3G WIFI 11ax20 CH60 P=17.5

Test Engineer: Zhou Xu

Remark: 数据线: A13 ANT0

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

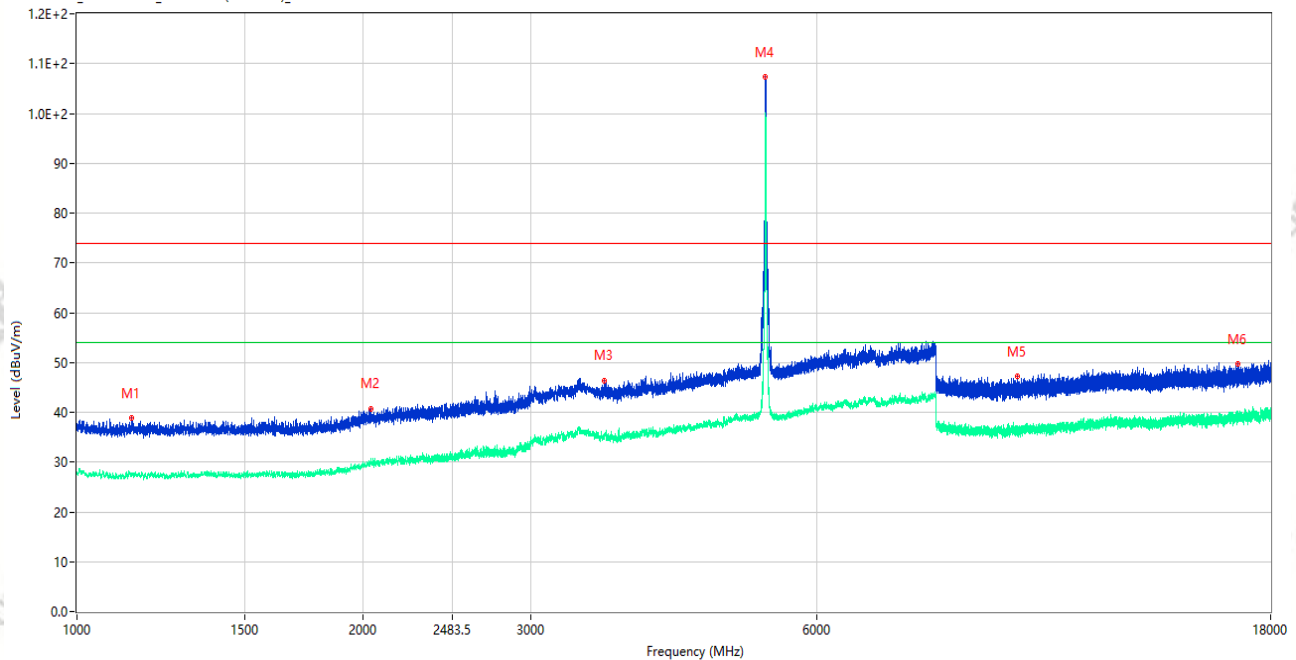

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1140.750	38.91	-15.59	74.0	35.09	Peak	360.00	150	Vertical	Pass
1**	1140.750	27.55	-15.59	54.0	26.45	AV	360.00	150	Vertical	Pass
2	2036.750	40.68	-13.32	74.0	33.32	Peak	132.00	150	Vertical	Pass
2**	2036.750	30.17	-13.32	54.0	23.83	AV	132.00	150	Vertical	Pass
3	3582.500	46.30	-6.34	74.0	27.70	Peak	77.00	150	Vertical	Pass
3**	3582.500	35.59	-6.34	54.0	18.41	AV	77.00	150	Vertical	Pass
4	5299.000	107.42	-2.01	74.0	-33.42	Peak	359.00	150	Vertical	N/A
4**	5299.000	100.01	-2.01	54.0	-46.01	AV	359.00	150	Vertical	N/A
5	9748.000	47.17	-3.78	74.0	26.83	Peak	360.00	150	Vertical	Pass
5**	9748.000	36.43	-3.78	54.0	17.57	AV	360.00	150	Vertical	Pass
6	16641.563	49.79	-1.02	74.0	24.21	Peak	218.00	150	Vertical	Pass
6**	16641.563	39.21	-1.02	54.0	14.79	AV	218.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_02.33.13

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC


Test Site: 966#2

Test Voltage: 5.3G WIFI 11ax20 CH60 P=17.5

Test Engineer: Zhou Xu

Remark: 数据线: A13 ANT0

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

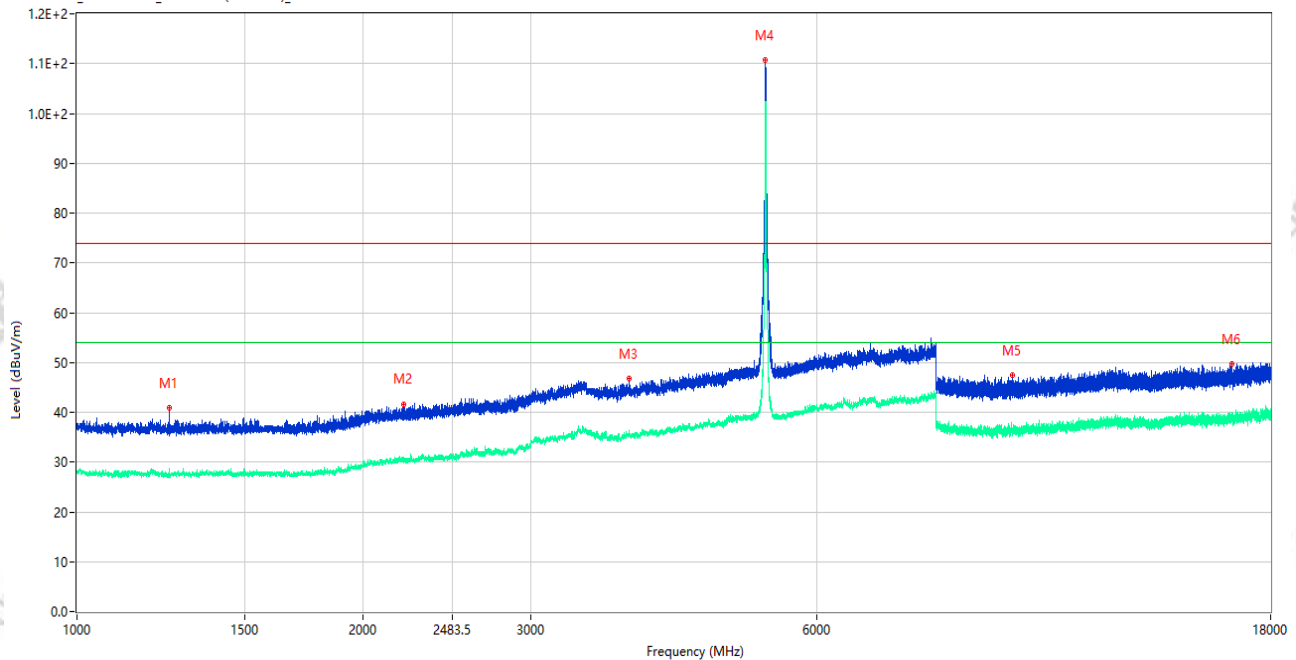

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1250.250	40.98	-16.18	74.0	33.02	Peak	352.00	150	Horizontal	Pass
1**	1250.250	27.68	-16.18	54.0	26.32	AV	352.00	150	Horizontal	Pass
2	2204.000	41.61	-13.32	74.0	32.39	Peak	147.00	150	Horizontal	Pass
2**	2204.000	30.28	-13.32	54.0	23.72	AV	147.00	150	Horizontal	Pass
3	3803.500	46.84	-4.41	74.0	27.16	Peak	357.00	150	Horizontal	Pass
3**	3803.500	35.51	-4.41	54.0	18.49	AV	357.00	150	Horizontal	Pass
4	5295.500	110.69	-2.00	74.0	-36.69	Peak	344.00	150	Horizontal	N/A
4**	5295.500	102.14	-2.00	54.0	-48.14	AV	344.00	150	Horizontal	N/A
5	9644.213	47.55	-3.34	74.0	26.45	Peak	360.00	150	Horizontal	Pass
5**	9644.213	36.25	-3.34	54.0	17.75	AV	360.00	150	Horizontal	Pass
6	16393.239	49.78	-1.14	74.0	24.22	Peak	0.00	150	Horizontal	Pass
6**	16393.239	39.12	-1.14	54.0	14.88	AV	0.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_02.44.57

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC


Test Site: 966#2

Test Voltage: 5.3G WIFI 11ax40 CH54 P=17.5

Test Engineer: Zhou Xu

Remark: 数据线: A13 ANT0

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

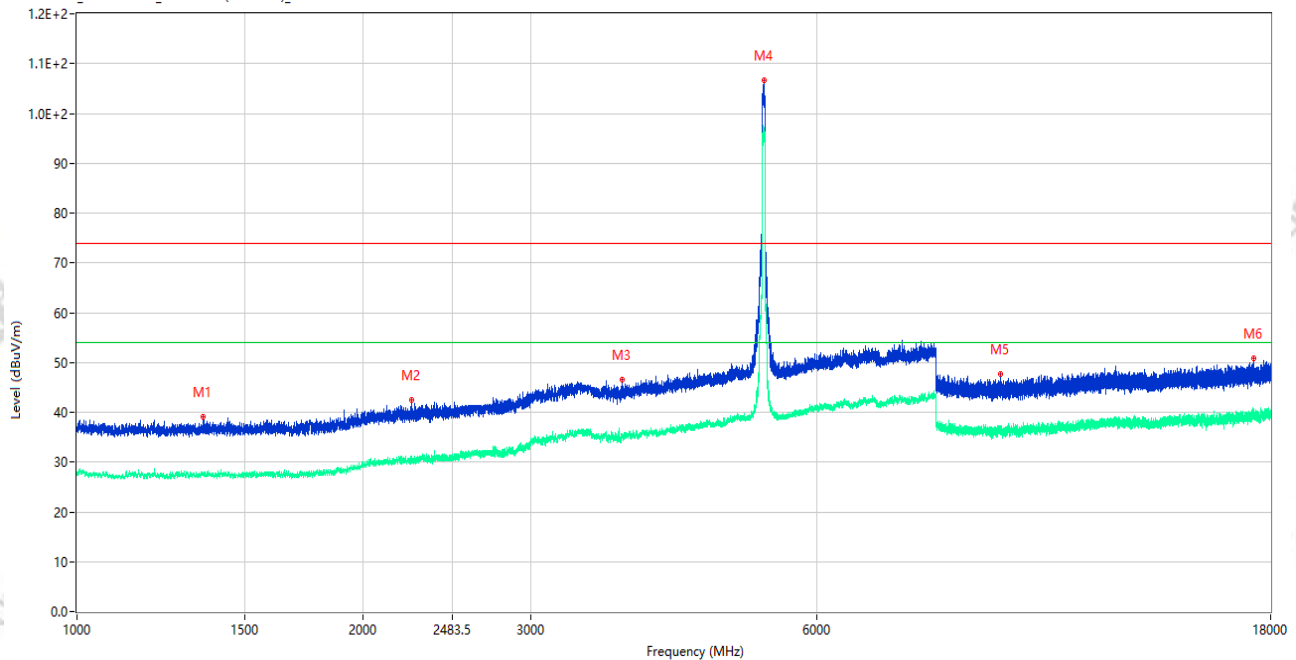

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1358.250	39.14	-15.84	74.0	34.86	Peak	360.00	150	Vertical	Pass
1**	1358.250	27.27	-15.84	54.0	26.73	AV	360.00	150	Vertical	Pass
2	2248.250	42.42	-12.86	74.0	31.58	Peak	93.00	150	Vertical	Pass
2**	2248.250	30.46	-12.86	54.0	23.54	AV	93.00	150	Vertical	Pass
3	3744.000	46.58	-4.65	74.0	27.42	Peak	147.00	150	Vertical	Pass
3**	3744.000	35.62	-4.65	54.0	18.38	AV	147.00	150	Vertical	Pass
4	5279.000	106.61	-2.33	74.0	-32.61	Peak	28.00	150	Vertical	N/A
4**	5279.000	96.93	-2.33	54.0	-42.93	AV	28.00	150	Vertical	N/A
5	9368.713	47.62	-4.99	74.0	26.38	Peak	334.00	150	Vertical	Pass
5**	9368.713	36.69	-4.99	54.0	17.31	AV	334.00	150	Vertical	Pass
6	17293.613	50.77	-0.88	74.0	23.23	Peak	150.00	150	Vertical	Pass
6**	17293.613	39.29	-0.88	54.0	14.71	AV	150.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_02.40.21

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC


Test Site: 966#2

Test Voltage: 5.3G WIFI 11ax40 CH54 P=17.5

Test Engineer: Zhou Xu

Remark: 数据线: A13 ANT0

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

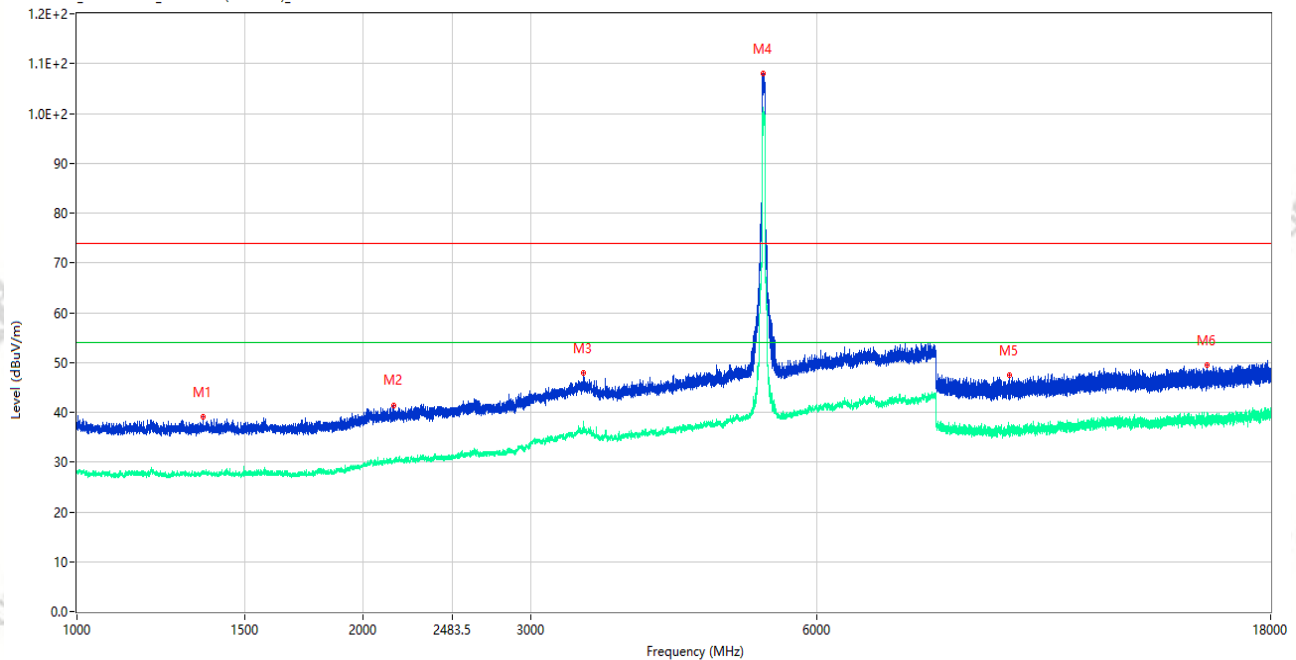

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1357.250	39.03	-15.83	74.0	34.97	Peak	360.00	150	Horizontal	Pass
1**	1357.250	27.94	-15.83	54.0	26.06	AV	360.00	150	Horizontal	Pass
2	2154.250	41.43	-13.53	74.0	32.57	Peak	63.00	150	Horizontal	Pass
2**	2154.250	30.38	-13.53	54.0	23.62	AV	63.00	150	Horizontal	Pass
3	3411.000	47.83	-5.30	74.0	26.17	Peak	267.00	150	Horizontal	Pass
3**	3411.000	37.09	-5.30	54.0	16.91	AV	267.00	150	Horizontal	Pass
4	5263.500	107.92	-2.28	74.0	-33.92	Peak	343.00	150	Horizontal	N/A
4**	5263.500	99.33	-2.28	54.0	-45.33	AV	343.00	150	Horizontal	N/A
5	9557.287	47.54	-2.82	74.0	26.46	Peak	125.00	150	Horizontal	Pass
5**	9557.287	36.66	-2.82	54.0	17.34	AV	125.00	150	Horizontal	Pass
6	15446.662	49.51	-1.75	74.0	24.49	Peak	83.00	150	Horizontal	Pass
6**	15446.662	38.98	-1.75	54.0	15.02	AV	83.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_02.50.50

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC


Test Site: 966#2

Test Voltage: 5.3G WIFI 11ax80 CH58 P=17.5

Test Engineer: Zhou Xu

Remark: 数据线: A13 ANT0

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

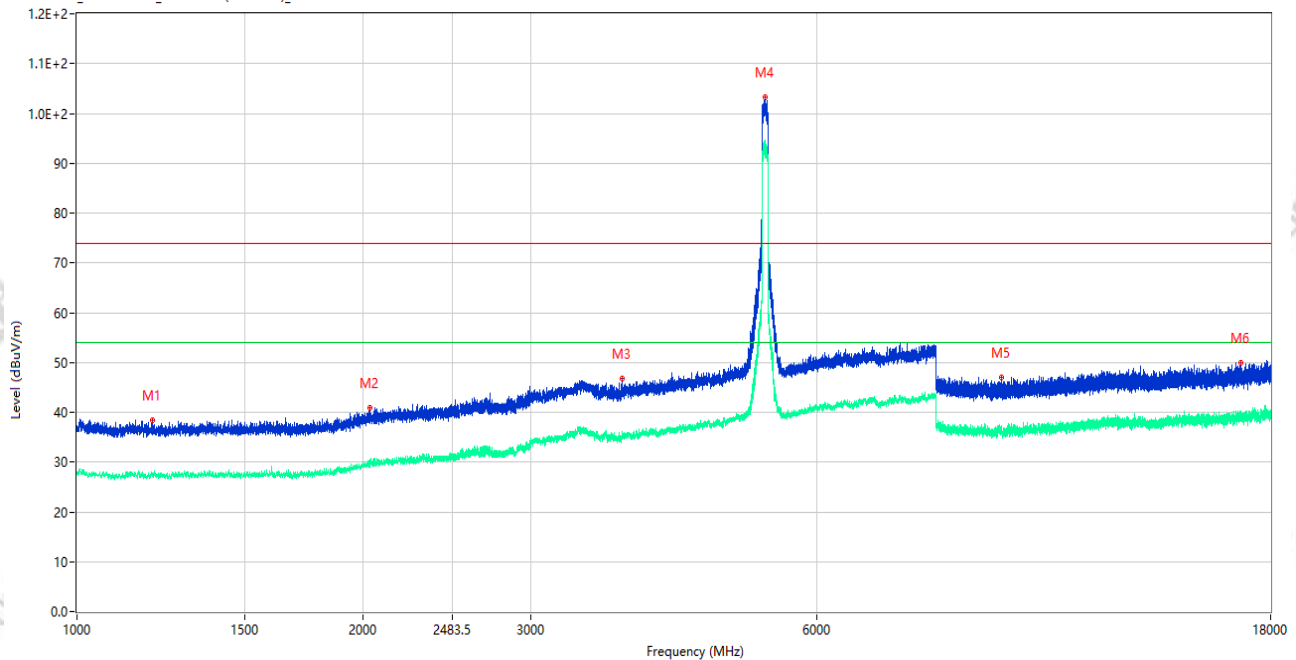

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1199.250	38.34	-15.75	74.0	35.66	Peak	270.00	150	Vertical	Pass
1**	1199.250	27.89	-15.75	54.0	26.11	AV	270.00	150	Vertical	Pass
2	2034.500	40.87	-13.41	74.0	33.13	Peak	154.00	150	Vertical	Pass
2**	2034.500	30.42	-13.41	54.0	23.58	AV	154.00	150	Vertical	Pass
3	3744.000	46.73	-4.65	74.0	27.27	Peak	50.00	150	Vertical	Pass
3**	3744.000	35.45	-4.65	54.0	18.55	AV	50.00	150	Vertical	Pass
4	5288.000	103.30	-2.05	74.0	-29.30	Peak	359.00	150	Vertical	N/A
4**	5288.000	93.90	-2.05	54.0	-39.90	AV	359.00	150	Vertical	N/A
5	9377.500	46.91	-4.68	74.0	27.09	Peak	29.00	150	Vertical	Pass
5**	9377.500	36.99	-4.68	54.0	17.01	AV	29.00	150	Vertical	Pass
6	16727.400	49.99	-1.80	74.0	24.01	Peak	217.00	150	Vertical	Pass
6**	16727.400	38.95	-1.80	54.0	15.05	AV	217.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_02.56.48

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC


Test Site: 966#2

Test Voltage: 5.3G WIFI 11ax80 CH58 P=17.5

Test Engineer: Zhou Xu

Remark: 数据线: A13 ANT0

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

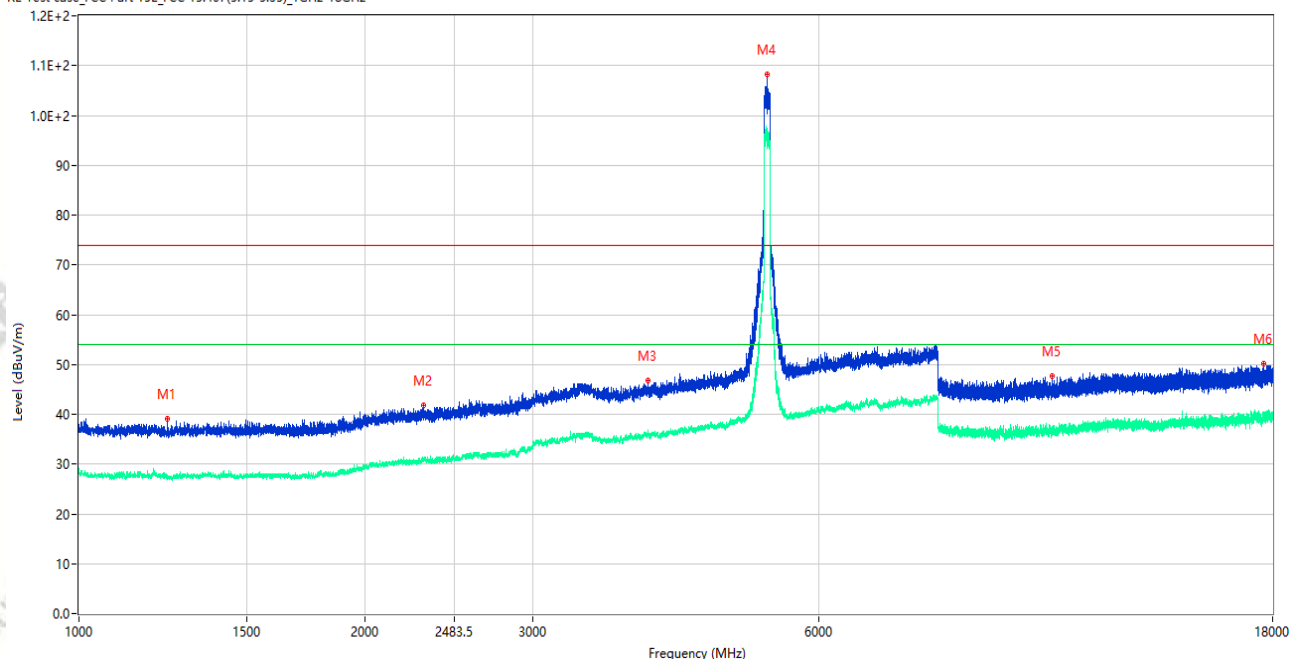

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1239.500	39.10	-16.03	74.0	34.90	Peak	261.00	150	Horizontal	Pass
1**	1239.500	27.30	-16.03	54.0	26.70	AV	261.00	150	Horizontal	Pass
2	2304.000	41.80	-12.83	74.0	32.20	Peak	118.00	150	Horizontal	Pass
2**	2304.000	30.88	-12.83	54.0	23.12	AV	118.00	150	Horizontal	Pass
3	3967.500	46.85	-3.89	74.0	27.15	Peak	246.00	150	Horizontal	Pass
3**	3967.500	35.92	-3.89	54.0	18.08	AV	246.00	150	Horizontal	Pass
4	5293.500	108.29	-1.96	74.0	-34.29	Peak	148.00	150	Horizontal	N/A
4**	5293.500	97.00	-1.96	54.0	-43.00	AV	148.00	150	Horizontal	N/A
5	10565.238	47.76	-3.21	74.0	26.24	Peak	76.00	150	Horizontal	Pass
5**	10565.238	36.83	-3.21	54.0	17.17	AV	76.00	150	Horizontal	Pass
6	17602.050	50.14	0.06	74.0	23.86	Peak	317.00	150	Horizontal	Pass
6**	17602.050	39.18	0.06	54.0	14.82	AV	317.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_03.09.14

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC

Test Site: 966#2


Test Voltage: 5.3G WIFI 11ax160 CH50

P=15.5

Test Engineer: Zhou Xu

Remark: 数据线: A13 ANT0

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

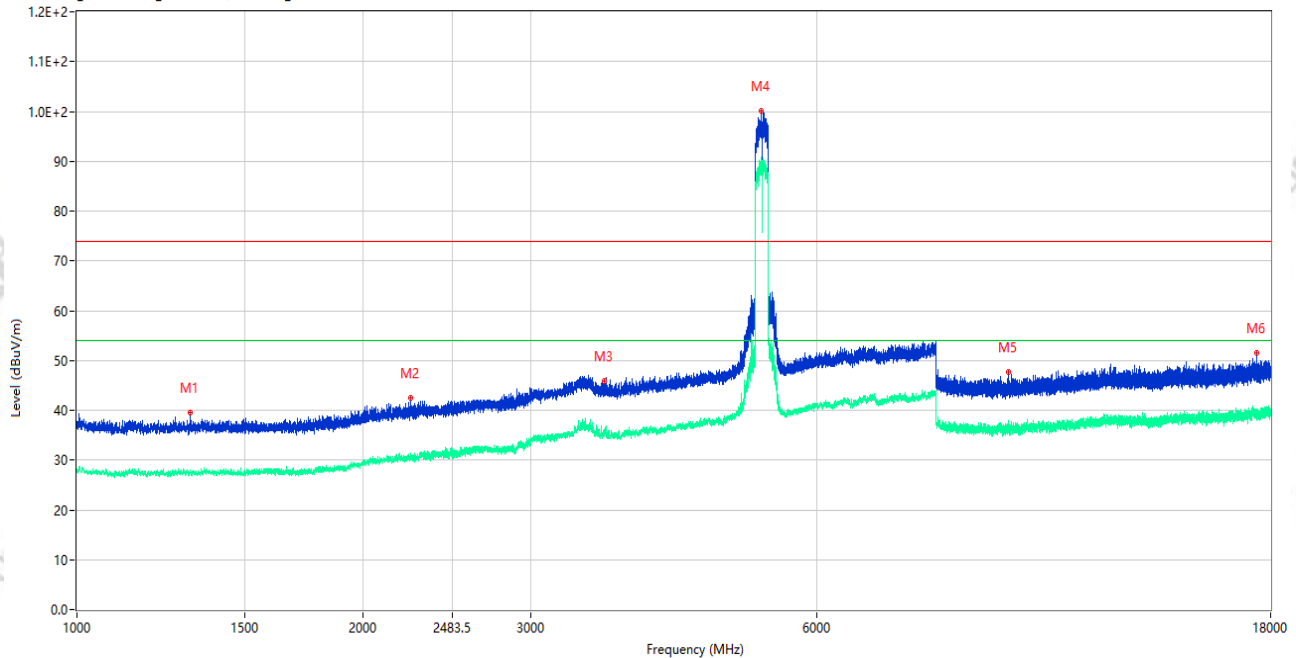

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1315.250	39.50	-15.88	74.0	34.50	Peak	120.00	150	Vertical	Pass
1**	1315.250	27.66	-15.88	54.0	26.34	AV	120.00	150	Vertical	Pass
2	2245.250	42.43	-12.84	74.0	31.57	Peak	294.00	150	Vertical	Pass
2**	2245.250	30.89	-12.84	54.0	23.11	AV	294.00	150	Vertical	Pass
3	3585.000	45.85	-6.28	74.0	28.15	Peak	0.00	150	Vertical	Pass
3**	3585.000	34.70	-6.28	54.0	19.30	AV	0.00	150	Vertical	Pass
4	5237.500	100.14	-2.25	74.0	-26.14	Peak	31.00	150	Vertical	N/A
4**	5237.500	90.42	-2.25	54.0	-36.42	AV	31.00	150	Vertical	N/A
5	9547.312	47.71	-2.53	74.0	26.29	Peak	360.00	150	Vertical	Pass
5**	9547.312	36.42	-2.53	54.0	17.58	AV	360.00	150	Vertical	Pass
6	17409.374	51.42	0.29	74.0	22.58	Peak	114.00	150	Vertical	Pass
6**	17409.374	39.61	0.29	54.0	14.39	AV	114.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_03.04.04

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC

Test Site: 966#2


Test Voltage: 5.3G WIFI 11ax160 CH50

P=15.5

Test Engineer: Zhou Xu

Remark: 数据线: A13 ANT0

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

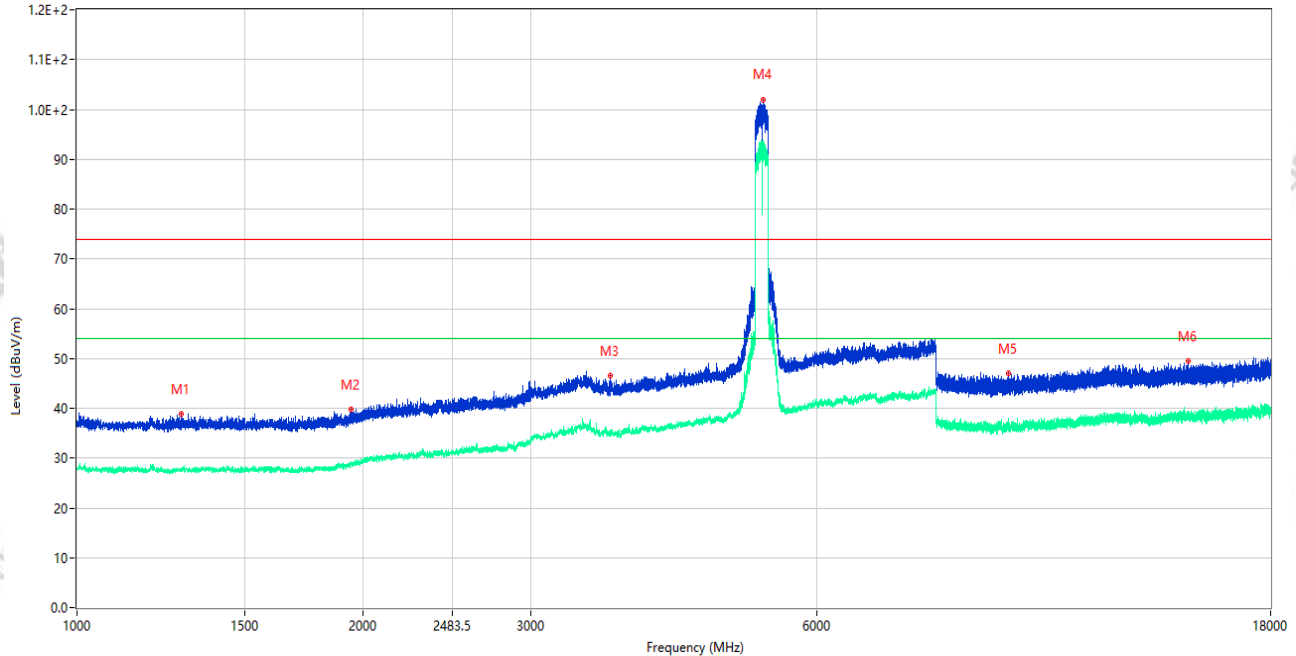

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1287.250	38.83	-15.93	74.0	35.17	Peak	360.00	150	Horizontal	Pass
1**	1287.250	27.77	-15.93	54.0	26.23	AV	360.00	150	Horizontal	Pass
2	1943.750	39.78	-14.87	74.0	34.22	Peak	225.00	150	Horizontal	Pass
2**	1943.750	29.12	-14.87	54.0	24.88	AV	225.00	150	Horizontal	Pass
3	3638.500	46.56	-5.79	74.0	27.44	Peak	345.00	150	Horizontal	Pass
3**	3638.500	34.41	-5.79	54.0	19.59	AV	345.00	150	Horizontal	Pass
4	5263.000	101.94	-2.26	74.0	-27.94	Peak	338.00	150	Horizontal	N/A
4**	5263.000	92.22	-2.26	54.0	-38.22	AV	338.00	150	Horizontal	N/A
5	9530.925	46.95	-3.26	74.0	27.05	Peak	360.00	150	Horizontal	Pass
5**	9530.925	36.58	-3.26	54.0	17.42	AV	360.00	150	Horizontal	Pass
6	14730.037	49.42	-1.71	74.0	24.58	Peak	184.00	150	Horizontal	Pass
6**	14730.037	38.11	-1.71	54.0	15.89	AV	184.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_05.07.08

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC


Test Site: 966#2

Test Voltage: 5.6G WIFI 11a CH116 P=17.5

Test Engineer: Zhou Xu

Remark: 数据线: A13 ANT0

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

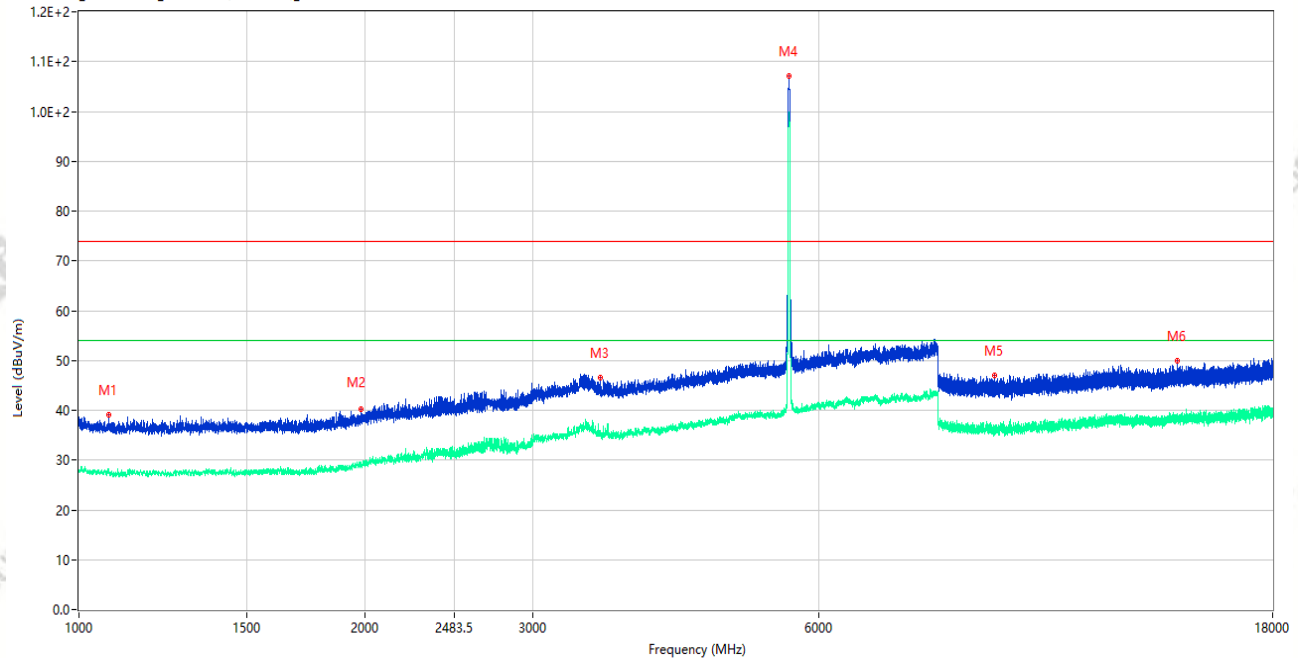

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1075.000	39.17	-15.37	74.0	34.83	Peak	80.00	150	Vertical	Pass
1**	1075.000	27.34	-15.37	54.0	26.66	AV	80.00	150	Vertical	Pass
2	1979.000	40.24	-14.79	74.0	33.76	Peak	117.00	150	Vertical	Pass
2**	1979.000	28.94	-14.79	54.0	25.06	AV	117.00	150	Vertical	Pass
3	3537.500	46.56	-6.07	74.0	27.44	Peak	241.00	150	Vertical	Pass
3**	3537.500	35.33	-6.07	54.0	18.67	AV	241.00	150	Vertical	Pass
4	5585.500	107.10	-2.83	74.0	-33.10	Peak	0.00	150	Vertical	N/A
4**	5585.500	99.34	-2.83	54.0	-45.34	AV	0.00	150	Vertical	N/A
5	9189.162	46.90	-5.46	74.0	27.10	Peak	353.00	150	Vertical	Pass
5**	9189.162	35.80	-5.46	54.0	18.20	AV	353.00	150	Vertical	Pass
6	14299.013	49.98	-2.66	74.0	24.02	Peak	0.00	150	Vertical	Pass
6**	14299.013	39.29	-2.66	54.0	14.71	AV	0.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_05.11.16

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC


Test Site: 966#2

Test Voltage: 5.6G WIFI 11a CH116 P=17.5

Test Engineer: Zhou Xu

Remark: 数据线: A13 ANT0

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

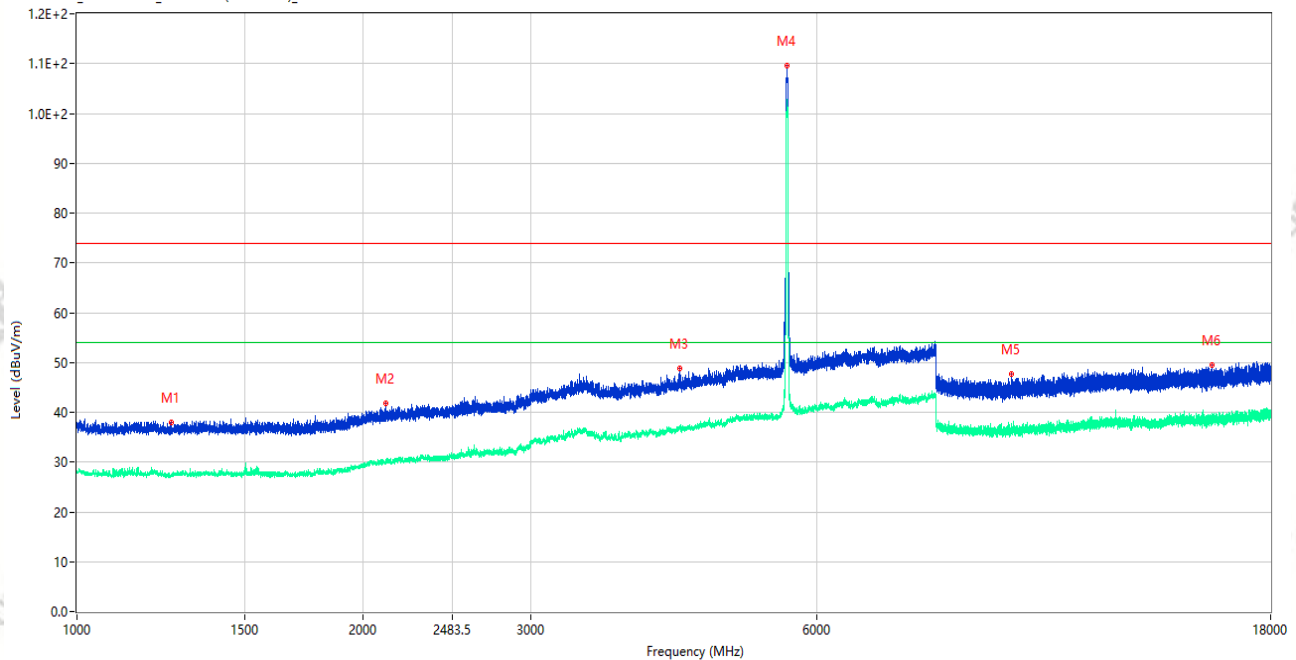

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1257.750	37.90	-16.05	74.0	36.10	Peak	344.00	150	Horizontal	Pass
1**	1257.750	27.65	-16.05	54.0	26.35	AV	344.00	150	Horizontal	Pass
2	2110.750	41.88	-13.59	74.0	32.12	Peak	212.00	150	Horizontal	Pass
2**	2110.750	30.07	-13.59	54.0	23.93	AV	212.00	150	Horizontal	Pass
3	4301.000	48.74	-3.61	74.0	25.26	Peak	81.00	150	Horizontal	Pass
3**	4301.000	36.99	-3.61	54.0	17.01	AV	81.00	150	Horizontal	Pass
4	5586.000	109.64	-2.81	74.0	-35.64	Peak	0.00	150	Horizontal	N/A
4**	5586.000	102.72	-2.81	54.0	-48.72	AV	0.00	150	Horizontal	N/A
5	9616.187	47.72	-3.41	74.0	26.28	Peak	286.00	150	Horizontal	Pass
5**	9616.187	36.92	-3.41	54.0	17.08	AV	286.00	150	Horizontal	Pass
6	15620.700	49.43	-1.83	74.0	24.57	Peak	45.00	150	Horizontal	Pass
6**	15620.700	39.04	-1.83	54.0	14.96	AV	45.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_05.22.02

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC

Test Site: 966#2


Test Voltage: 5.6G WIFI 11ac20 CH116

P=16.5

Test Engineer: Zhou Xu

Remark: 数据线: A13 ANT0

RE Test case FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

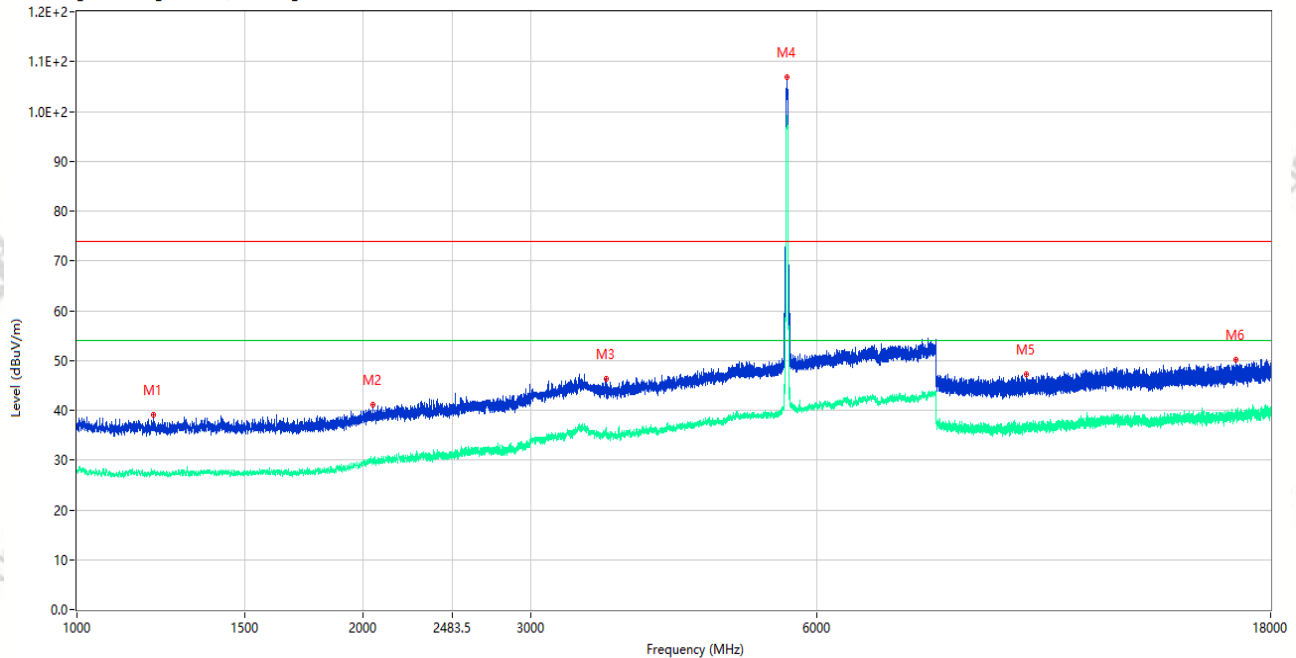

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1203.500	39.05	-15.76	74.0	34.95	Peak	346.00	150	Vertical	Pass
1**	1203.500	27.02	-15.76	54.0	26.98	AV	346.00	150	Vertical	Pass
2	2047.500	41.08	-13.55	74.0	32.92	Peak	150.00	150	Vertical	Pass
2**	2047.500	30.01	-13.55	54.0	23.99	AV	150.00	150	Vertical	Pass
3	3601.500	46.28	-4.96	74.0	27.72	Peak	206.00	150	Vertical	Pass
3**	3601.500	35.26	-4.96	54.0	18.74	AV	206.00	150	Vertical	Pass
4	5585.500	106.82	-2.83	74.0	-32.82	Peak	0.00	150	Vertical	N/A
4**	5585.500	99.14	-2.83	54.0	-45.14	AV	0.00	150	Vertical	N/A
5	9964.363	47.24	-3.86	74.0	26.76	Peak	31.00	150	Vertical	Pass
5**	9964.363	36.46	-3.86	54.0	17.54	AV	31.00	150	Vertical	Pass
6	16552.051	50.24	-0.97	74.0	23.76	Peak	284.00	150	Vertical	Pass
6**	16552.051	39.19	-0.97	54.0	14.81	AV	284.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_05.17.42

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC

Test Site: 966#2


Test Voltage: 5.6G WIFI 11ac20 CH116

P=16.5

Test Engineer: Zhou Xu

Remark: 数据线: A13 ANT0

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

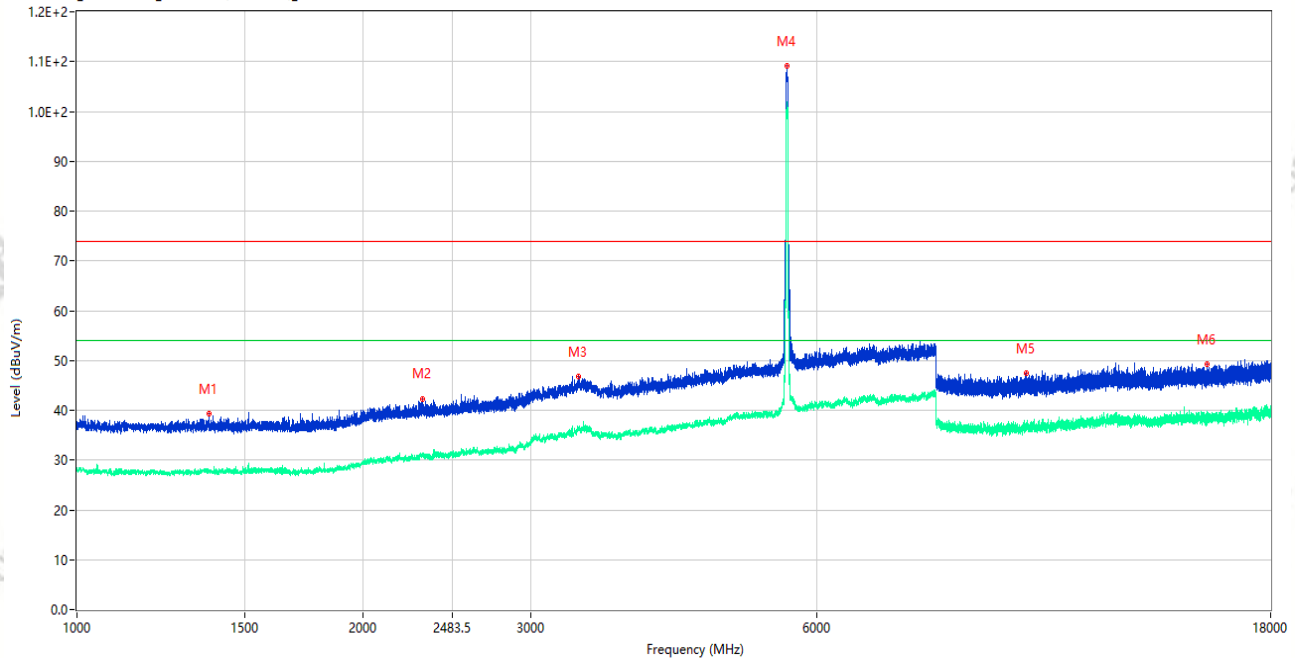

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1375.250	39.25	-16.00	74.0	34.75	Peak	230.00	150	Horizontal	Pass
1**	1375.250	27.62	-16.00	54.0	26.38	AV	230.00	150	Horizontal	Pass
2	2308.250	42.18	-12.54	74.0	31.82	Peak	131.00	150	Horizontal	Pass
2**	2308.250	31.01	-12.54	54.0	22.99	AV	131.00	150	Horizontal	Pass
3	3364.500	46.78	-5.23	74.0	27.22	Peak	247.00	150	Horizontal	Pass
3**	3364.500	36.16	-5.23	54.0	17.84	AV	247.00	150	Horizontal	Pass
4	5585.000	109.07	-2.84	74.0	-35.07	Peak	358.00	150	Horizontal	N/A
4**	5585.000	100.95	-2.84	54.0	-46.95	AV	358.00	150	Horizontal	N/A
5	9973.862	47.51	-3.66	74.0	26.49	Peak	309.00	150	Horizontal	Pass
5**	9973.862	36.61	-3.66	54.0	17.39	AV	309.00	150	Horizontal	Pass
6	15442.201	49.23	-1.89	74.0	24.77	Peak	348.00	150	Horizontal	Pass
6**	15442.201	38.94	-1.89	54.0	15.06	AV	348.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_05.27.39

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC

Test Site: 966#2


Test Voltage: 5.6G WIFI 11ac40 CH118

P=16.5

Test Engineer: Zhou Xu

Remark: 数据线: A13 ANT0

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

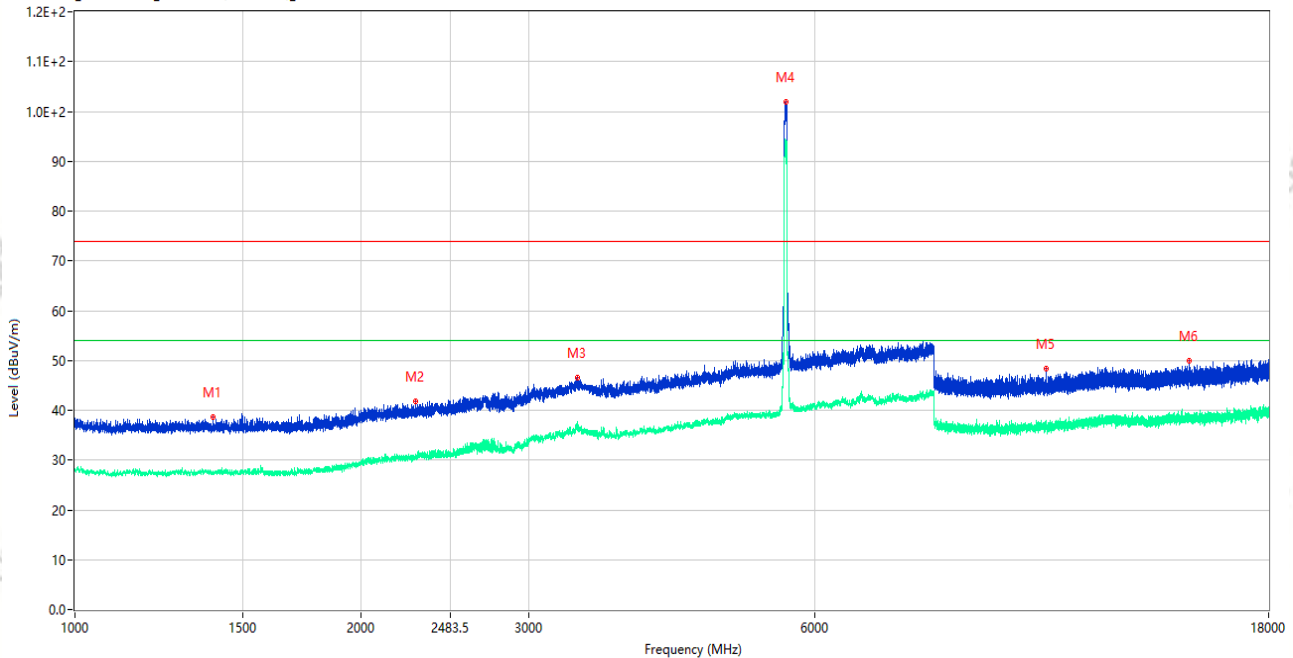

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1395.500	38.66	-16.01	74.0	35.34	Peak	360.00	150	Vertical	Pass
1**	1395.500	27.40	-16.01	54.0	26.60	AV	360.00	150	Vertical	Pass
2	2280.500	41.86	-12.73	74.0	32.14	Peak	272.00	150	Vertical	Pass
2**	2280.500	30.75	-12.73	54.0	23.25	AV	272.00	150	Vertical	Pass
3	3372.500	46.66	-4.81	74.0	27.34	Peak	315.00	150	Vertical	Pass
3**	3372.500	36.83	-4.81	54.0	17.17	AV	315.00	150	Vertical	Pass
4	5592.000	101.96	-2.80	74.0	-27.96	Peak	0.00	150	Vertical	N/A
4**	5592.000	94.25	-2.80	54.0	-40.25	AV	0.00	150	Vertical	N/A
5	10506.575	48.36	-3.32	74.0	25.64	Peak	48.00	150	Vertical	Pass
5**	10506.575	37.12	-3.32	54.0	16.88	AV	48.00	150	Vertical	Pass
6	14842.651	49.98	-0.45	74.0	24.02	Peak	353.00	150	Vertical	Pass
6**	14842.651	38.64	-0.45	54.0	15.36	AV	353.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_05.33.17

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC

Test Site: 966#2


Test Voltage: 5.6G WIFI 11ac40 CH118

P=16.5

Test Engineer: Zhou Xu

Remark: 数据线: A13 ANT0

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

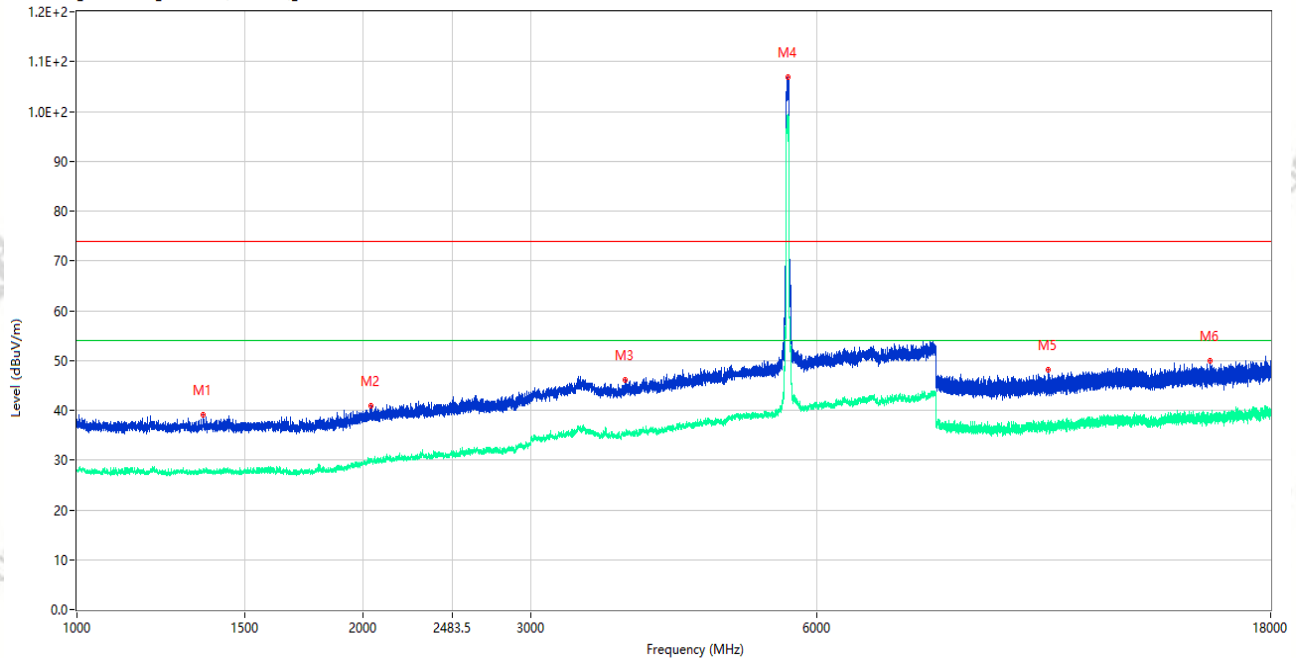

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1356.250	39.11	-15.83	74.0	34.89	Peak	54.00	150	Horizontal	Pass
1**	1356.250	27.91	-15.83	54.0	26.09	AV	54.00	150	Horizontal	Pass
2	2038.000	40.91	-13.29	74.0	33.09	Peak	360.00	150	Horizontal	Pass
2**	2038.000	29.77	-13.29	54.0	24.23	AV	360.00	150	Horizontal	Pass
3	3770.000	46.04	-4.84	74.0	27.96	Peak	70.00	150	Horizontal	Pass
3**	3770.000	35.05	-4.84	54.0	18.95	AV	70.00	150	Horizontal	Pass
4	5591.500	106.80	-2.79	74.0	-32.80	Peak	0.00	150	Horizontal	N/A
4**	5591.500	98.80	-2.79	54.0	-44.80	AV	0.00	150	Horizontal	N/A
5	10498.263	48.11	-3.11	74.0	25.89	Peak	215.00	150	Horizontal	Pass
5**	10498.263	37.05	-3.11	54.0	16.95	AV	215.00	150	Horizontal	Pass
6	15550.088	49.92	-2.64	74.0	24.08	Peak	317.00	150	Horizontal	Pass
6**	15550.088	38.49	-2.64	54.0	15.51	AV	317.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_05.44.08

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC

Test Site: 966#2


Test Voltage: 5.6G WIFI 11ac80 CH106

P=16.5

Test Engineer: Zhou Xu

Remark: 数据线: A13 ANT0

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

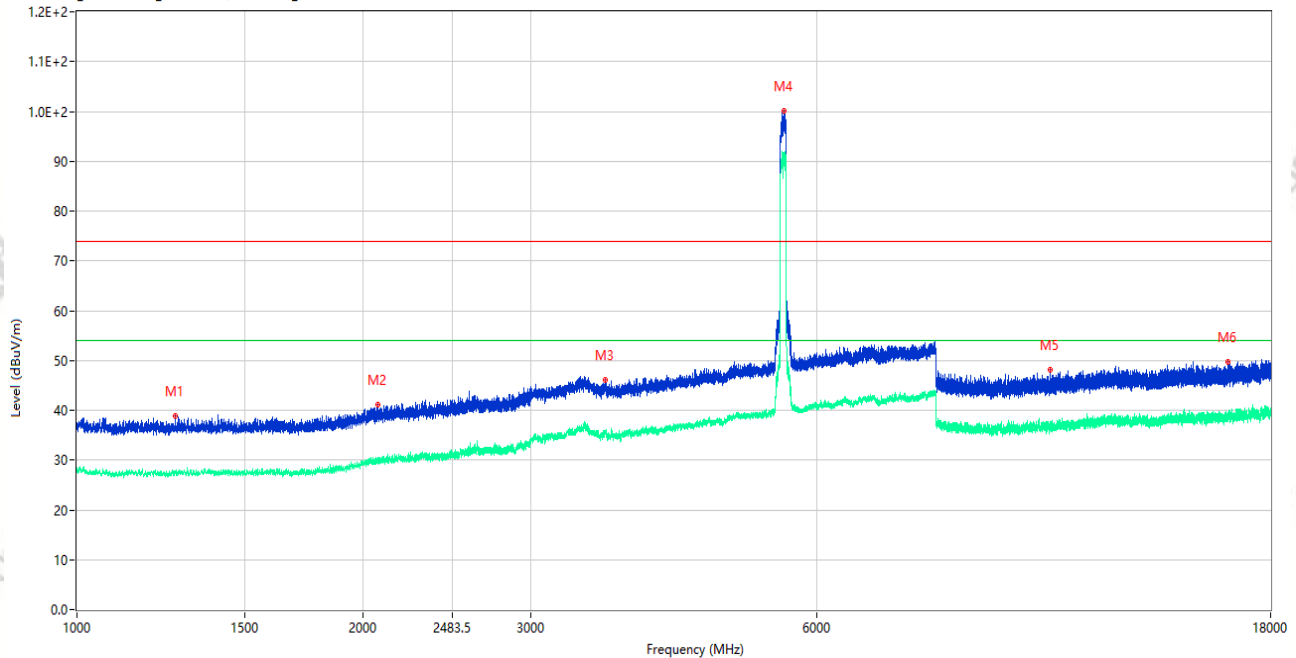

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1268.500	38.92	-15.91	74.0	35.08	Peak	277.00	150	Vertical	Pass
1**	1268.500	27.43	-15.91	54.0	26.57	AV	277.00	150	Vertical	Pass
2	2073.500	41.18	-13.75	74.0	32.82	Peak	157.00	150	Vertical	Pass
2**	2073.500	30.18	-13.75	54.0	23.82	AV	157.00	150	Vertical	Pass
3	3592.500	46.00	-6.18	74.0	28.00	Peak	350.00	150	Vertical	Pass
3**	3592.500	35.66	-6.18	54.0	18.34	AV	350.00	150	Vertical	Pass
4	5538.500	100.02	-2.67	74.0	-26.02	Peak	11.00	150	Vertical	N/A
4**	5538.500	91.13	-2.67	54.0	-37.13	AV	11.00	150	Vertical	N/A
5	10566.425	48.12	-3.22	74.0	25.88	Peak	262.00	150	Vertical	Pass
5**	10566.425	37.25	-3.22	54.0	16.75	AV	262.00	150	Vertical	Pass
6	16242.300	49.62	-1.41	74.0	24.38	Peak	0.00	150	Vertical	Pass
6**	16242.300	37.65	-1.41	54.0	16.35	AV	0.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_05.39.34

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC

Test Site: 966#2


Test Voltage: 5.6G WIFI 11ac80 CH106

P=16.5

Test Engineer: Zhou Xu

Remark: 数据线: A13 ANT0

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

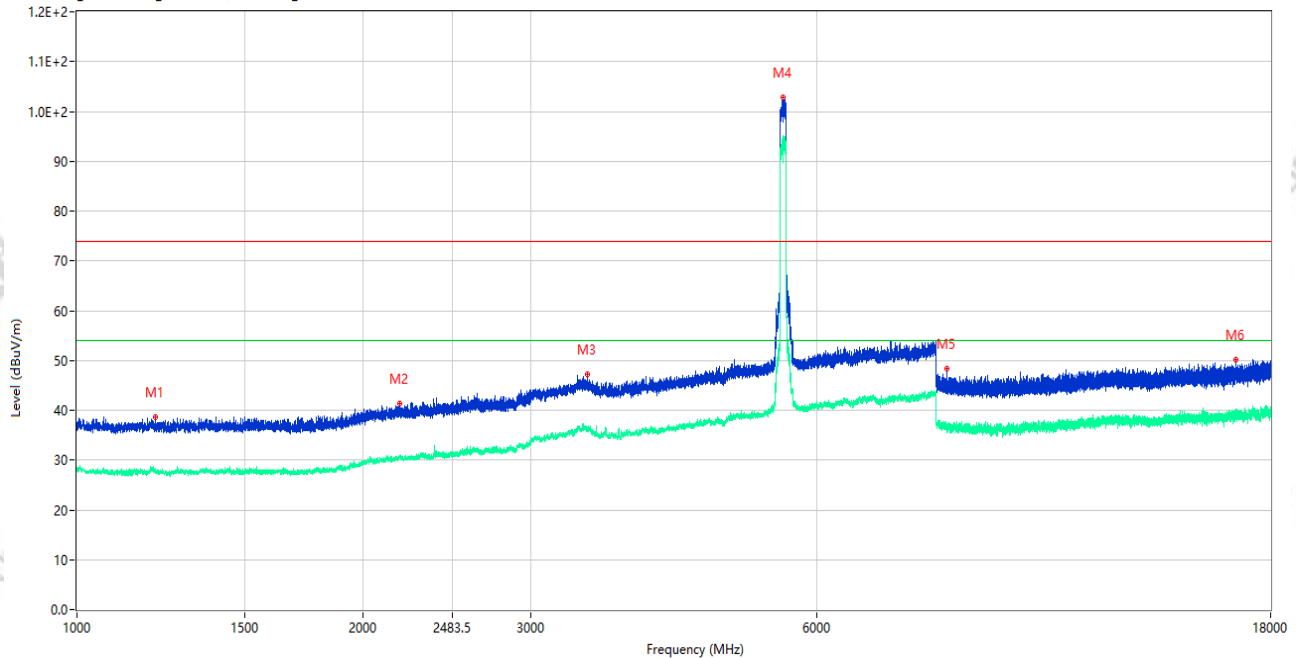

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1208.000	38.67	-15.87	74.0	35.33	Peak	246.00	150	Horizontal	Pass
1**	1208.000	27.48	-15.87	54.0	26.52	AV	246.00	150	Horizontal	Pass
2	2185.500	41.44	-13.18	74.0	32.56	Peak	297.00	150	Horizontal	Pass
2**	2185.500	30.64	-13.18	54.0	23.36	AV	297.00	150	Horizontal	Pass
3	3443.500	47.18	-5.27	74.0	26.82	Peak	259.00	150	Horizontal	Pass
3**	3443.500	36.41	-5.27	54.0	17.59	AV	259.00	150	Horizontal	Pass
4	5521.500	102.86	-2.47	74.0	-28.86	Peak	0.00	150	Horizontal	N/A
4**	5521.500	94.94	-2.47	54.0	-40.94	AV	0.00	150	Horizontal	N/A
5	8217.075	48.31	-5.03	74.0	25.69	Peak	261.00	150	Horizontal	Pass
5**	8217.075	36.15	-5.03	54.0	17.85	AV	261.00	150	Horizontal	Pass
6	16557.301	50.06	-0.91	74.0	23.94	Peak	117.00	150	Horizontal	Pass
6**	16557.301	39.22	-0.91	54.0	14.78	AV	117.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_06.00.24

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC

Test Site: 966#2


Test Voltage: 5.6G WIFI 11ac160 CH114

P=16.5

Test Engineer: Zhou Xu

Remark: 数据线: A13 ANT0

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

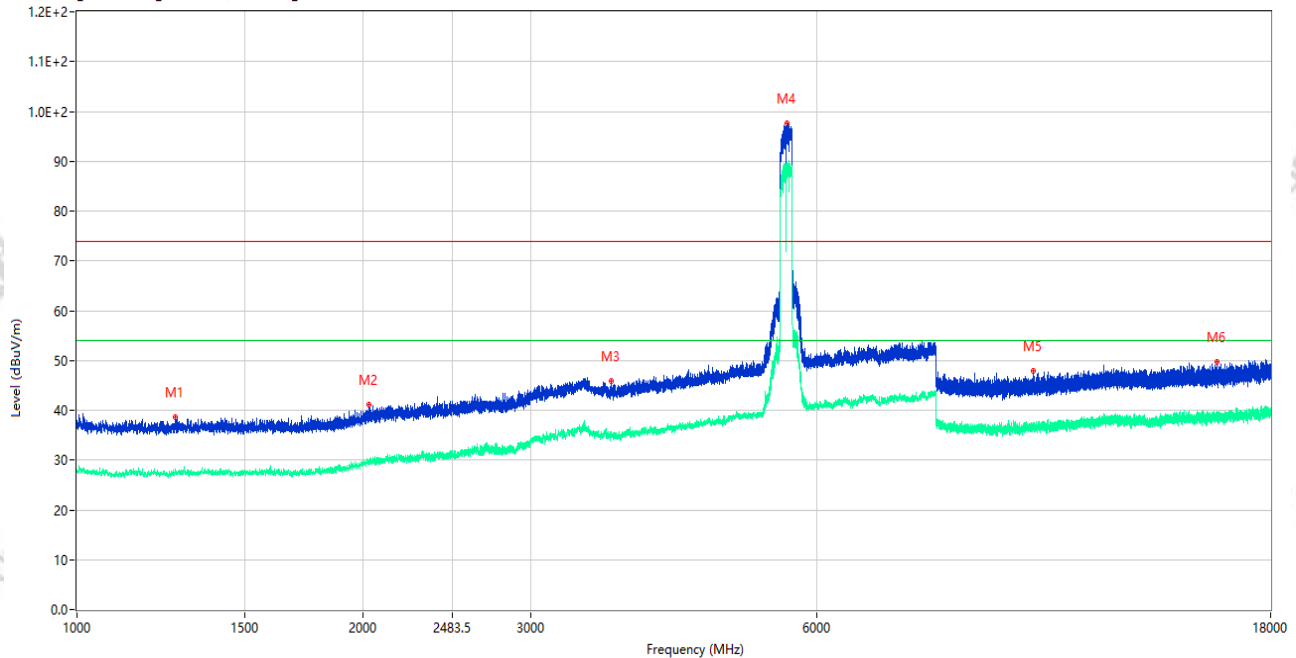

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1267.500	38.64	-15.96	74.0	35.36	Peak	77.00	150	Vertical	Pass
1**	1267.500	27.34	-15.96	54.0	26.66	AV	77.00	150	Vertical	Pass
2	2027.250	41.10	-13.82	74.0	32.90	Peak	35.00	150	Vertical	Pass
2**	2027.250	30.03	-13.82	54.0	23.97	AV	35.00	150	Vertical	Pass
3	3644.500	45.77	-5.37	74.0	28.23	Peak	297.00	150	Vertical	Pass
3**	3644.500	34.63	-5.37	54.0	19.37	AV	297.00	150	Vertical	Pass
4	5583.500	97.63	-2.83	74.0	-23.63	Peak	0.00	150	Vertical	N/A
4**	5583.500	89.57	-2.83	54.0	-35.57	AV	0.00	150	Vertical	N/A
5	10133.701	47.83	-3.92	74.0	26.17	Peak	332.00	150	Vertical	Pass
5**	10133.701	36.66	-3.92	54.0	17.34	AV	332.00	150	Vertical	Pass
6	15796.838	49.61	-1.60	74.0	24.39	Peak	348.00	150	Vertical	Pass
6**	15796.838	39.72	-1.60	54.0	14.28	AV	348.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_05.55.21

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC

Test Site: 966#2


Test Voltage: 5.6G WIFI 11ac160 CH114

P=16.5

Test Engineer: Zhou Xu

Remark: 数据线: A13 ANT0

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

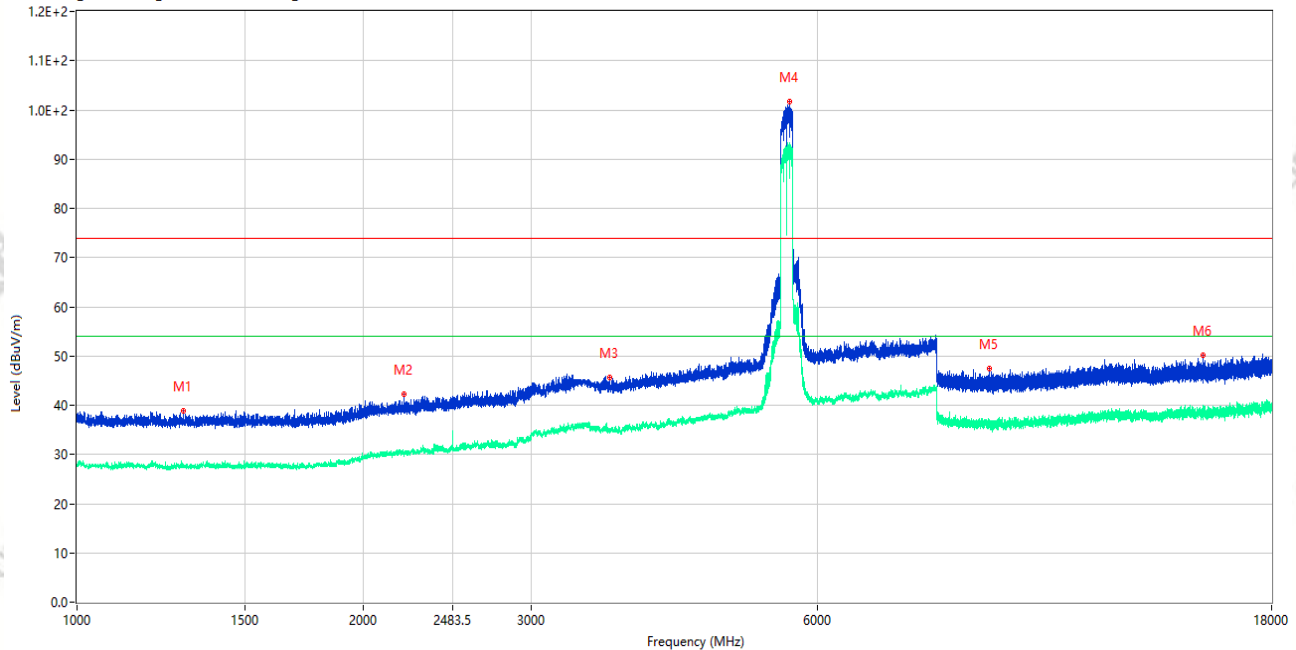

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1294.000	38.81	-15.75	74.0	35.19	Peak	112.00	150	Horizontal	Pass
1**	1294.000	27.75	-15.75	54.0	26.25	AV	112.00	150	Horizontal	Pass
2	2207.750	42.25	-13.31	74.0	31.75	Peak	348.00	150	Horizontal	Pass
2**	2207.750	29.71	-13.31	54.0	24.29	AV	348.00	150	Horizontal	Pass
3	3628.000	45.57	-5.47	74.0	28.43	Peak	0.00	150	Horizontal	Pass
3**	3628.000	35.06	-5.47	54.0	18.94	AV	0.00	150	Horizontal	Pass
4	5612.500	101.69	-2.40	74.0	-27.69	Peak	358.00	150	Horizontal	N/A
4**	5612.500	93.01	-2.40	54.0	-39.01	AV	358.00	150	Horizontal	N/A
5	9102.238	47.41	-4.97	74.0	26.59	Peak	333.00	150	Horizontal	Pass
5**	9102.238	36.08	-4.97	54.0	17.92	AV	333.00	150	Horizontal	Pass
6	15263.438	50.25	-1.04	74.0	23.75	Peak	117.00	150	Horizontal	Pass
6**	15263.438	38.90	-1.04	54.0	15.10	AV	117.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_06.17.11

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC

Test Site: 966#2


Test Voltage: 5.6G WIFI 11ax20 CH116

P=17.5

Test Engineer: Zhou Xu

Remark: 数据线: A13 ANT0

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

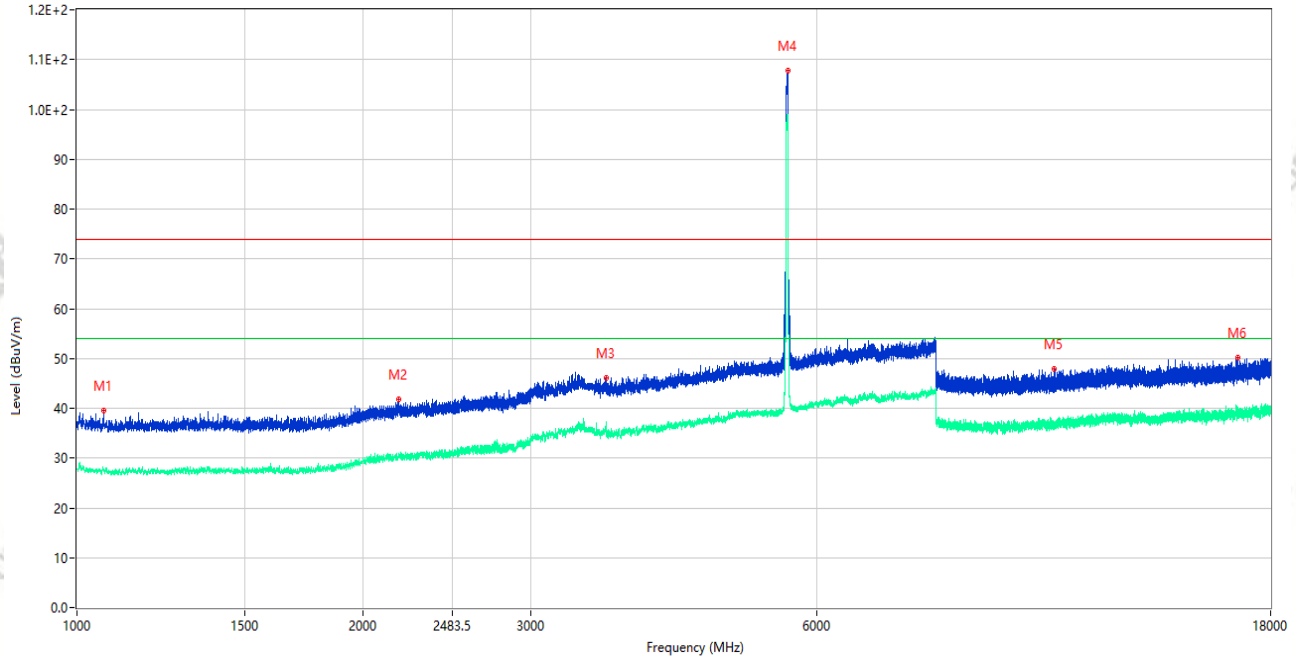

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1067.000	39.45	-15.17	74.0	34.55	Peak	144.00	150	Vertical	Pass
1**	1067.000	27.79	-15.17	54.0	26.21	AV	144.00	150	Vertical	Pass
2	2179.000	41.89	-12.88	74.0	32.11	Peak	81.00	150	Vertical	Pass
2**	2179.000	30.84	-12.88	54.0	23.16	AV	81.00	150	Vertical	Pass
3	3601.500	46.10	-4.96	74.0	27.90	Peak	360.00	150	Vertical	Pass
3**	3601.500	35.09	-4.96	54.0	18.91	AV	360.00	150	Vertical	Pass
4	5589.000	107.80	-2.79	74.0	-33.80	Peak	205.00	150	Vertical	N/A
4**	5589.000	99.05	-2.79	54.0	-45.05	AV	205.00	150	Vertical	N/A
5	10654.537	47.86	-3.98	74.0	26.14	Peak	335.00	150	Vertical	Pass
5**	10654.537	36.66	-3.98	54.0	17.34	AV	335.00	150	Vertical	Pass
6	16644.975	50.20	-1.16	74.0	23.80	Peak	11.00	150	Vertical	Pass
6**	16644.975	39.08	-1.16	54.0	14.92	AV	11.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_06.12.54

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC

Test Site: 966#2


Test Voltage: 5.6G WIFI 11ax20 CH116

P=17.5

Test Engineer: Zhou Xu

Remark: 数据线: A13 ANT0

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

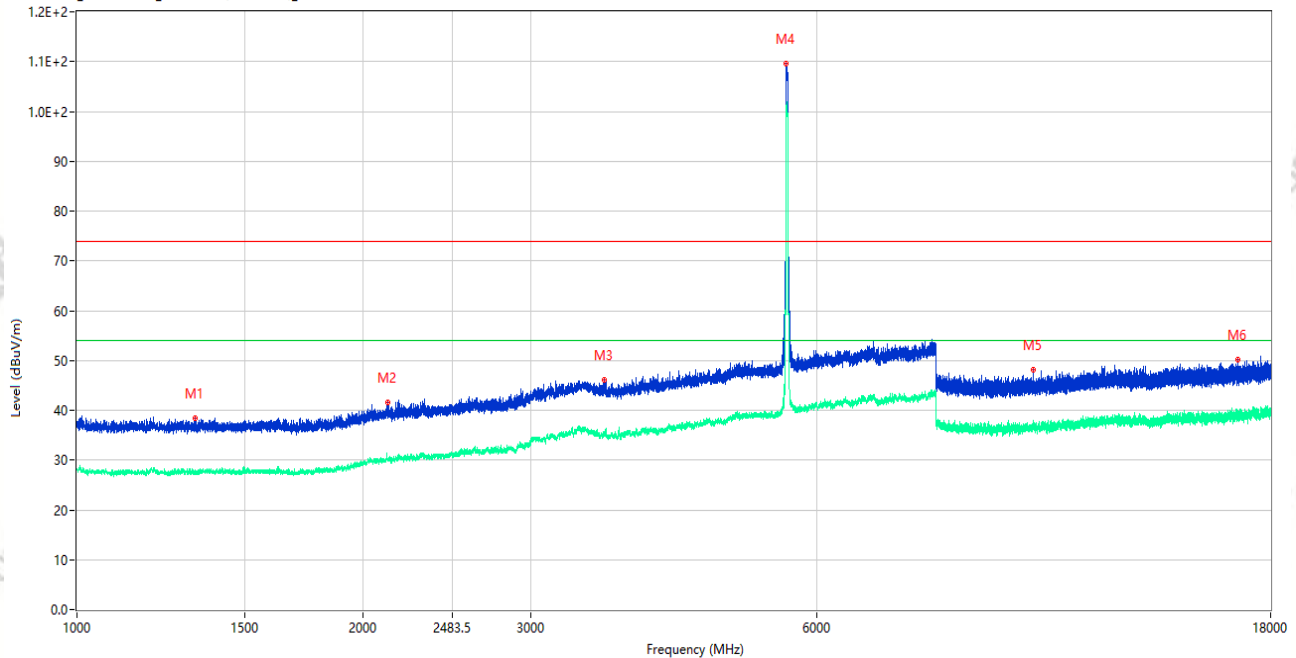

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1330.000	38.49	-15.97	74.0	35.51	Peak	329.00	150	Horizontal	Pass
1**	1330.000	27.44	-15.97	54.0	26.56	AV	329.00	150	Horizontal	Pass
2	2121.000	41.66	-13.33	74.0	32.34	Peak	43.00	150	Horizontal	Pass
2**	2121.000	30.15	-13.33	54.0	23.85	AV	43.00	150	Horizontal	Pass
3	3588.000	45.99	-6.25	74.0	28.01	Peak	76.00	150	Horizontal	Pass
3**	3588.000	35.49	-6.25	54.0	18.51	AV	76.00	150	Horizontal	Pass
4	5571.500	109.67	-2.94	74.0	-35.67	Peak	360.00	150	Horizontal	N/A
4**	5571.500	100.47	-2.94	54.0	-46.47	AV	360.00	150	Horizontal	N/A
5	10127.050	48.09	-4.03	74.0	25.91	Peak	170.00	150	Horizontal	Pass
5**	10127.050	36.63	-4.03	54.0	17.37	AV	170.00	150	Horizontal	Pass
6	16637.625	50.18	-1.07	74.0	23.82	Peak	360.00	150	Horizontal	Pass
6**	16637.625	38.47	-1.07	54.0	15.53	AV	360.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_06.23.21

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC

Test Site: 966#2


Test Voltage: 5.6G WIFI 11ax40 CH118

P=17.5

Test Engineer: Zhou Xu

Remark: 数据线: A13 ANT0

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

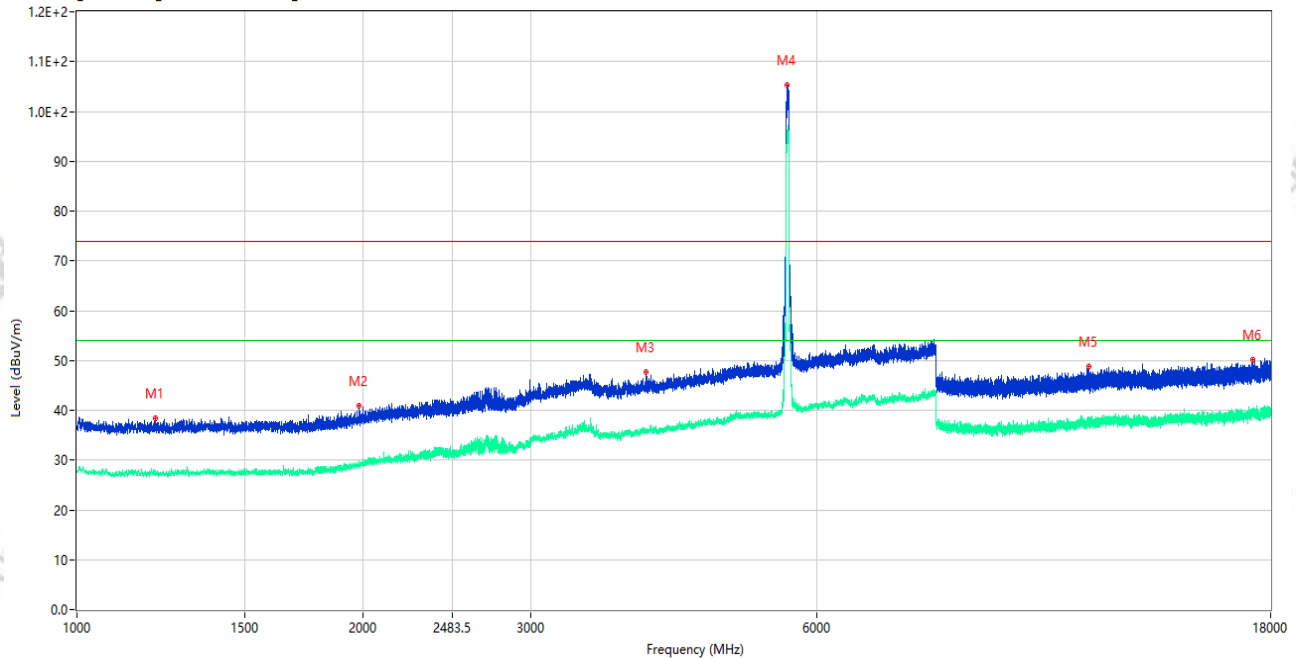


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1209.250	38.42	-15.85	74.0	35.58	Peak	85.00	150	Vertical	Pass
1**	1209.250	27.40	-15.85	54.0	26.60	AV	85.00	150	Vertical	Pass
2	1979.250	40.82	-14.80	74.0	33.18	Peak	0.00	150	Vertical	Pass
2**	1979.250	29.42	-14.80	54.0	24.58	AV	0.00	150	Vertical	Pass
3	3964.500	47.76	-3.82	74.0	26.24	Peak	95.00	150	Vertical	Pass
3**	3964.500	35.88	-3.82	54.0	18.12	AV	95.00	150	Vertical	Pass
4	5582.000	105.39	-2.85	74.0	-31.39	Peak	360.00	150	Vertical	N/A
4**	5582.000	95.36	-2.85	54.0	-41.36	AV	360.00	150	Vertical	N/A
5	11604.537	48.72	-2.42	74.0	25.28	Peak	27.00	150	Vertical	Pass
5**	11604.537	37.79	-2.42	54.0	16.21	AV	27.00	150	Vertical	Pass
6	17251.875	50.14	-0.66	74.0	23.86	Peak	345.00	150	Vertical	Pass
6**	17251.875	39.76	-0.66	54.0	14.24	AV	345.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060005
Test Time: 2026-07-18_06.29.41

EUT Name:	Siyata SD7 Ultra E	Temp.(°C):	23.2
Model Number:	SD7 Ultra E	Humidity (%RH):	46
Sample Number:	CC26050143-001-S08	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	DC 5V From PC
Test Site:	966#2	Test Voltage:	5.6G WIFI 11ax40 CH118
			P=17.5
Test Engineer:	Zhou Xu	Remark:	数据线: A13 ANT0

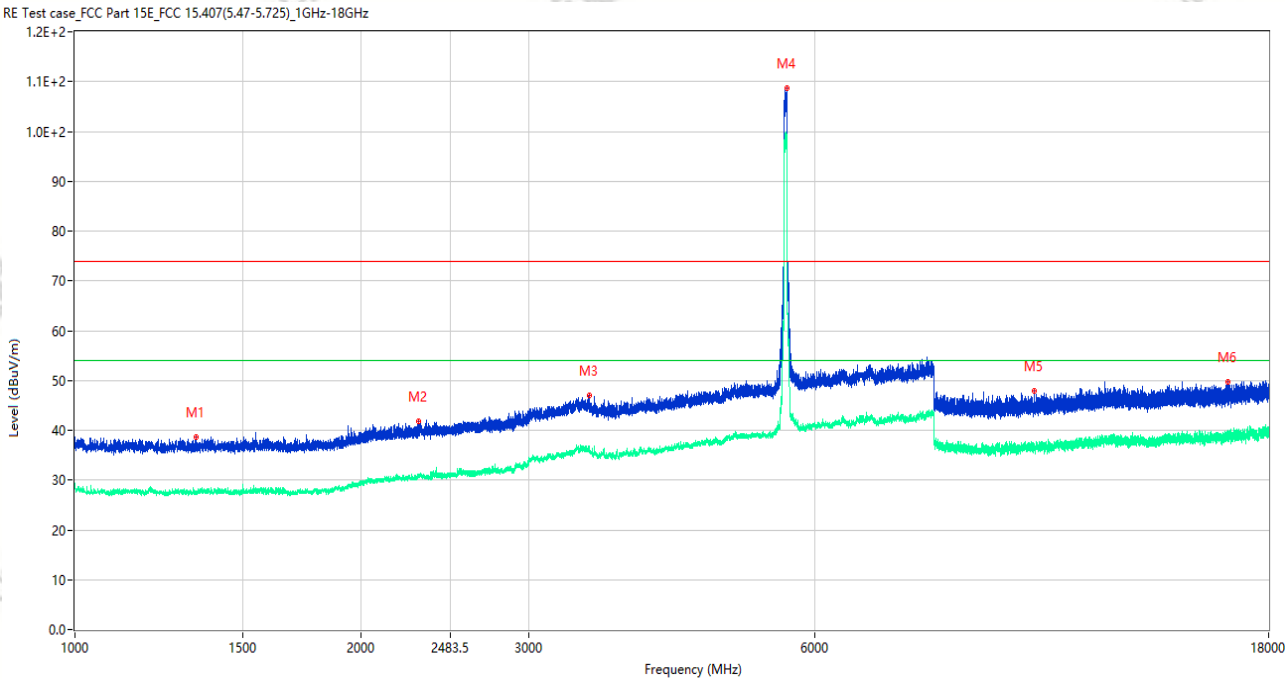

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1342.500	38.61	-16.09	74.0	35.39	Peak	250.00	150	Horizontal	Pass
1**	1342.500	27.23	-16.09	54.0	26.77	AV	250.00	150	Horizontal	Pass
2	2295.250	41.83	-13.19	74.0	32.17	Peak	172.00	150	Horizontal	Pass
2**	2295.250	30.83	-13.19	54.0	23.17	AV	172.00	150	Horizontal	Pass
3	3471.000	46.93	-5.65	74.0	27.07	Peak	162.00	150	Horizontal	Pass
3**	3471.000	36.10	-5.65	54.0	17.90	AV	162.00	150	Horizontal	Pass
4	5601.000	108.76	-2.81	74.0	-34.76	Peak	348.00	150	Horizontal	N/A
4**	5601.000	98.88	-2.81	54.0	-44.88	AV	348.00	150	Horizontal	N/A
5	10203.525	47.85	-3.36	74.0	26.15	Peak	118.00	150	Horizontal	Pass
5**	10203.525	36.30	-3.36	54.0	17.70	AV	118.00	150	Horizontal	Pass
6	16299.000	49.61	-1.50	74.0	24.39	Peak	211.00	150	Horizontal	Pass
6**	16299.000	39.09	-1.50	54.0	14.91	AV	211.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_06.39.46

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC

Test Site: 966#2


Test Voltage: 5.6G WIFI 11ax80 CH106

P=17.5

Test Engineer: Zhou Xu

Remark: 数据线: A13 ANT0

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

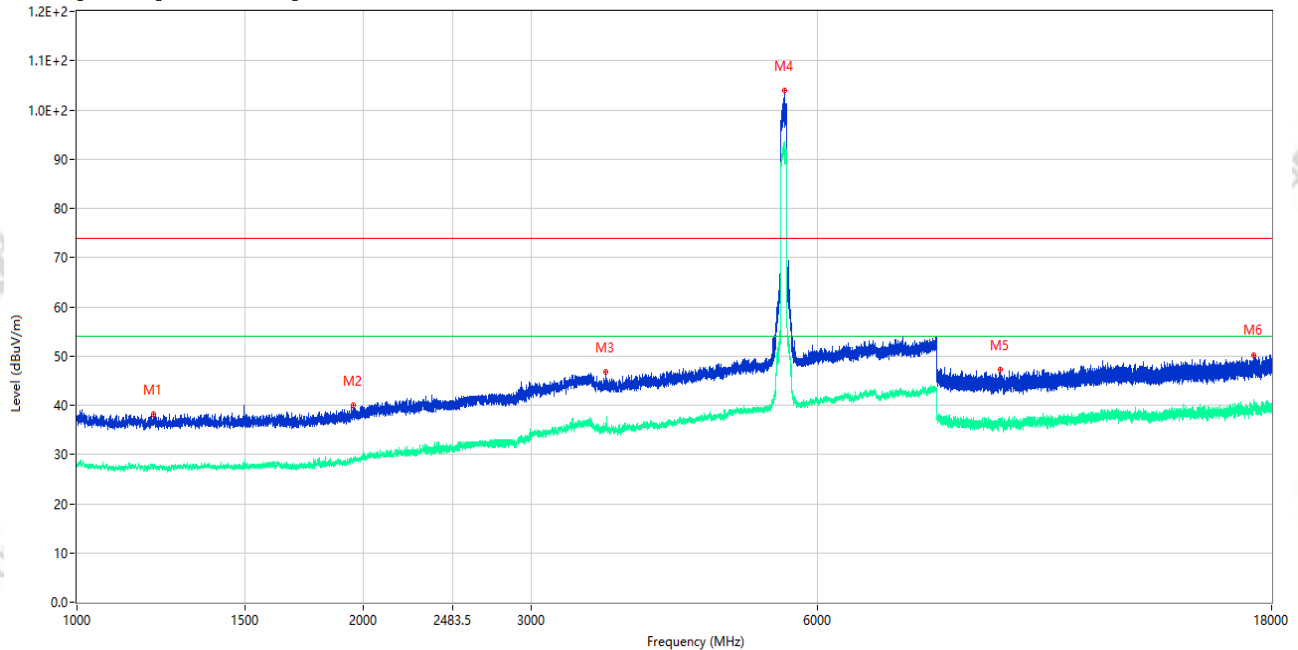

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1204.500	38.18	-15.78	74.0	35.82	Peak	314.00	150	Vertical	Pass
1**	1204.500	27.67	-15.78	54.0	26.33	AV	314.00	150	Vertical	Pass
2	1951.250	40.06	-14.84	74.0	33.94	Peak	309.00	150	Vertical	Pass
2**	1951.250	28.97	-14.84	54.0	25.03	AV	309.00	150	Vertical	Pass
3	3596.500	46.80	-5.11	74.0	27.20	Peak	191.00	150	Vertical	Pass
3**	3596.500	36.03	-5.11	54.0	17.97	AV	191.00	150	Vertical	Pass
4	5537.500	103.99	-2.66	74.0	-29.99	Peak	9.00	150	Vertical	N/A
4**	5537.500	91.93	-2.66	54.0	-37.93	AV	9.00	150	Vertical	N/A
5	9334.750	47.28	-5.01	74.0	26.72	Peak	217.00	150	Vertical	Pass
5**	9334.750	36.31	-5.01	54.0	17.69	AV	217.00	150	Vertical	Pass
6	17234.024	50.22	-0.46	74.0	23.78	Peak	280.00	150	Vertical	Pass
6**	17234.024	40.25	-0.46	54.0	13.75	AV	280.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_06.35.38

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC

Test Site: 966#2


Test Voltage: 5.6G WIFI 11ax80 CH106

P=17.5

Test Engineer: Zhou Xu

Remark: 数据线: A13 ANT0

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

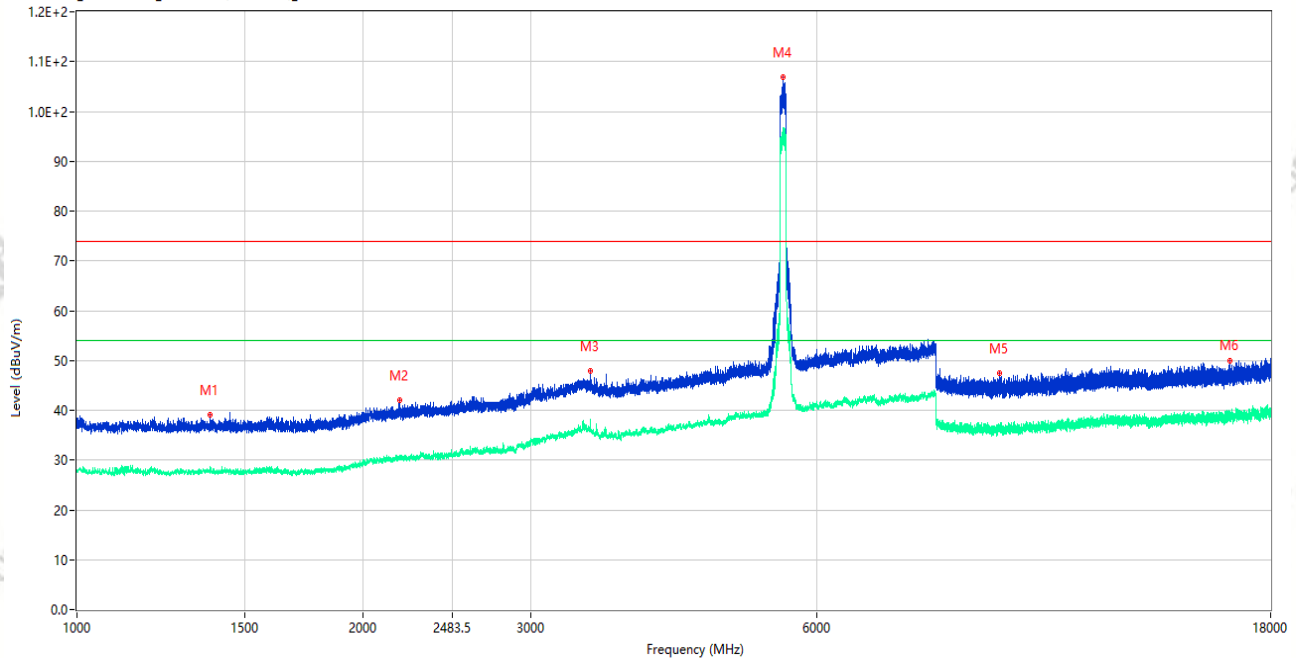

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1381.250	39.09	-15.99	74.0	34.91	Peak	126.00	150	Horizontal	Pass
1**	1381.250	27.92	-15.99	54.0	26.08	AV	126.00	150	Horizontal	Pass
2	2184.750	42.02	-13.12	74.0	31.98	Peak	196.00	150	Horizontal	Pass
2**	2184.750	31.02	-13.12	54.0	22.98	AV	196.00	150	Horizontal	Pass
3	3464.500	47.84	-5.08	74.0	26.16	Peak	302.00	150	Horizontal	Pass
3**	3464.500	36.40	-5.08	54.0	17.60	AV	302.00	150	Horizontal	Pass
4	5532.000	106.97	-2.54	74.0	-32.97	Peak	360.00	150	Horizontal	N/A
4**	5532.000	96.08	-2.54	54.0	-42.08	AV	360.00	150	Horizontal	N/A
5	9326.200	47.39	-5.22	74.0	26.61	Peak	289.00	150	Horizontal	Pass
5**	9326.200	36.11	-5.22	54.0	17.89	AV	289.00	150	Horizontal	Pass
6	16293.488	49.94	-1.43	74.0	24.06	Peak	40.00	150	Horizontal	Pass
6**	16293.488	39.01	-1.43	54.0	14.99	AV	40.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_06.54.26

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC

Test Site: 966#2


Test Voltage: 5.6G WIFI 11ax160 CH114

P=15.5

Test Engineer: Zhou Xu

Remark: 数据线: A13 ANT0

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

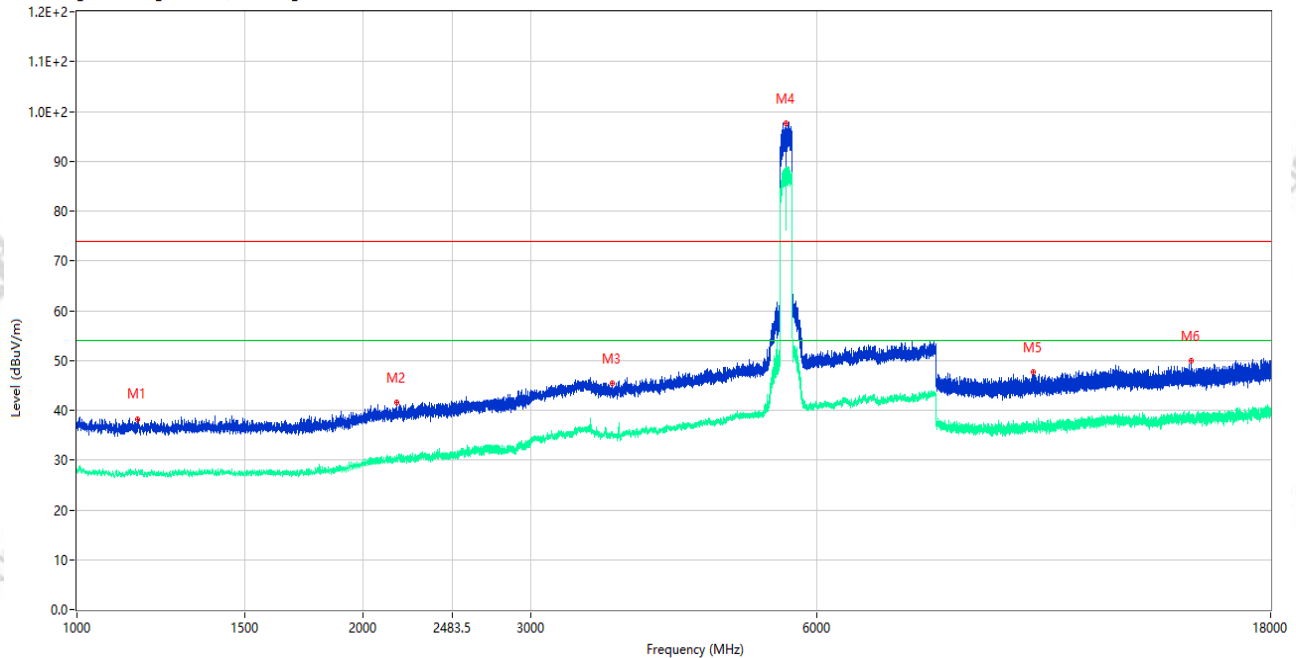

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1158.500	38.29	-15.53	74.0	35.71	Peak	333.00	150	Vertical	Pass
1**	1158.500	27.16	-15.53	54.0	26.84	AV	333.00	150	Vertical	Pass
2	2166.500	41.53	-13.15	74.0	32.47	Peak	215.00	150	Vertical	Pass
2**	2166.500	30.47	-13.15	54.0	23.53	AV	215.00	150	Vertical	Pass
3	3651.500	45.32	-5.07	74.0	28.68	Peak	82.00	150	Vertical	Pass
3**	3651.500	34.96	-5.07	54.0	19.04	AV	82.00	150	Vertical	Pass
4	5563.000	97.61	-2.87	74.0	-23.61	Peak	360.00	150	Vertical	N/A
4**	5563.000	87.34	-2.87	54.0	-33.34	AV	360.00	150	Vertical	N/A
5	10123.487	47.59	-4.07	74.0	26.41	Peak	191.00	150	Vertical	Pass
5**	10123.487	36.55	-4.07	54.0	17.45	AV	191.00	150	Vertical	Pass
6	14842.125	49.85	-0.40	74.0	24.15	Peak	360.00	150	Vertical	Pass
6**	14842.125	38.04	-0.40	54.0	15.96	AV	360.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_06.49.25

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC

Test Site: 966#2


Test Voltage: 5.6G WIFI 11ax160 CH114

P=15.5

Test Engineer: Zhou Xu

Remark: 数据线: A13 ANT0

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

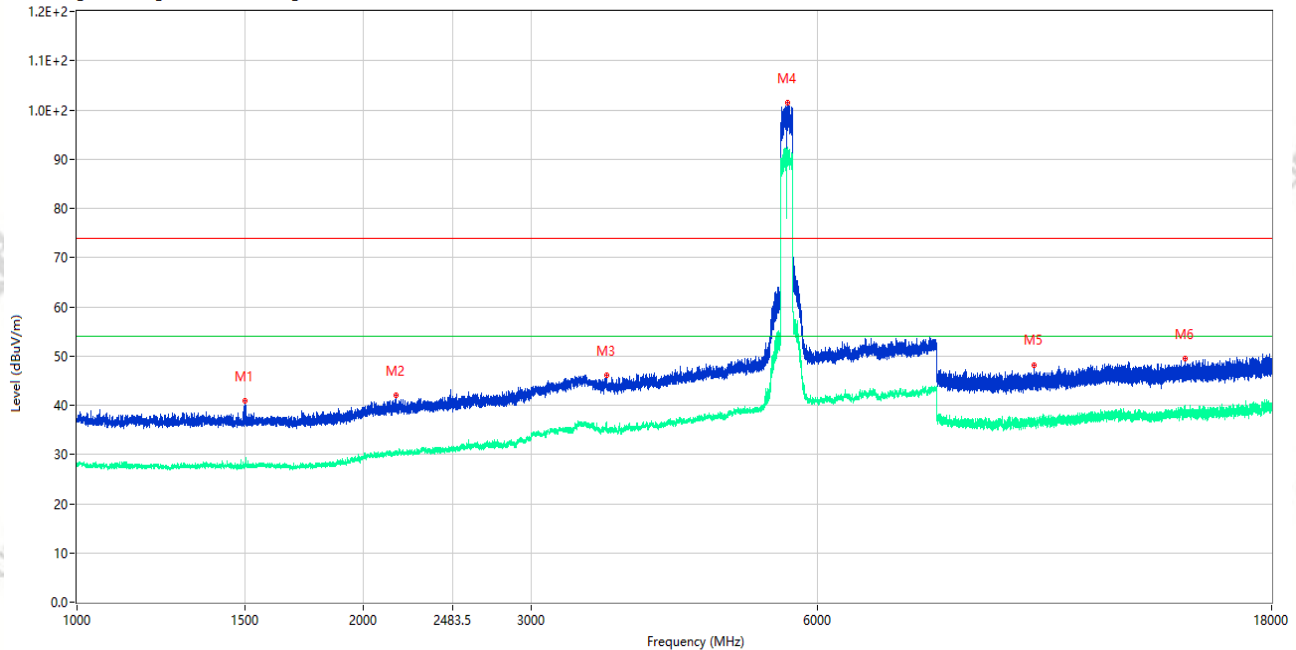

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1500.250	40.82	-16.13	74.0	33.18	Peak	79.00	150	Horizontal	Pass
1**	1500.250	27.30	-16.13	54.0	26.70	AV	79.00	150	Horizontal	Pass
2	2164.250	42.02	-13.19	74.0	31.98	Peak	313.00	150	Horizontal	Pass
2**	2164.250	30.36	-13.19	54.0	23.64	AV	313.00	150	Horizontal	Pass
3	3599.500	46.03	-4.99	74.0	27.97	Peak	270.00	150	Horizontal	Pass
3**	3599.500	35.91	-4.99	54.0	18.09	AV	270.00	150	Horizontal	Pass
4	5581.500	101.44	-2.85	74.0	-27.44	Peak	355.00	150	Horizontal	N/A
4**	5581.500	91.05	-2.85	54.0	-37.05	AV	355.00	150	Horizontal	N/A
5	10127.050	48.22	-4.03	74.0	25.78	Peak	239.00	150	Horizontal	Pass
5**	10127.050	36.55	-4.03	54.0	17.45	AV	239.00	150	Horizontal	Pass
6	14593.275	49.42	-2.12	74.0	24.58	Peak	243.00	150	Horizontal	Pass
6**	14593.275	38.80	-2.12	54.0	15.20	AV	243.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-19_13.39.18

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC


Test Site: 966#2

Test Voltage: 5.8G WIFI 11a CH157 P=17.5

Test Engineer: Liu Yabo

Remark: 数据线: A13 ANT0

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

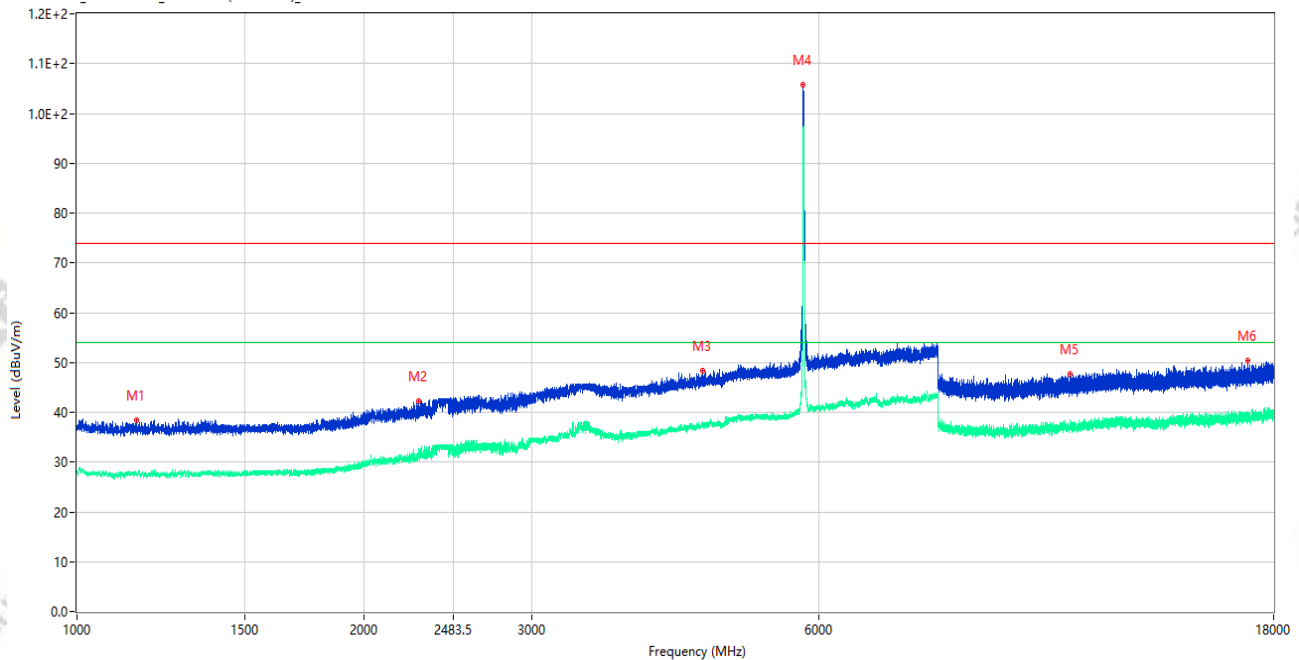

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1154.750	38.41	-15.61	74.0	35.59	Peak	203.00	150	Vertical	Pass
1**	1154.750	27.56	-15.61	54.0	26.44	AV	203.00	150	Vertical	Pass
2	2280.500	42.17	-12.73	74.0	31.83	Peak	254.00	150	Vertical	Pass
2**	2280.500	31.21	-12.73	54.0	22.79	AV	254.00	150	Vertical	Pass
3	4527.500	48.29	-2.37	74.0	25.71	Peak	359.00	150	Vertical	Pass
3**	4527.500	37.58	-2.37	54.0	16.42	AV	359.00	150	Vertical	Pass
4	5780.000	105.72	-1.51	74.0	-31.72	Peak	181.00	150	Vertical	N/A
4**	5780.000	97.09	-1.51	54.0	-43.09	AV	181.00	150	Vertical	N/A
5	10999.862	47.77	-2.70	74.0	26.23	Peak	360.00	150	Vertical	Pass
5**	10999.862	37.32	-2.70	54.0	16.68	AV	360.00	150	Vertical	Pass
6	16894.349	50.42	-0.51	74.0	23.58	Peak	184.00	150	Vertical	Pass
6**	16894.349	39.41	-0.51	54.0	14.59	AV	184.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-19_13.33.48

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC


Test Site: 966#2

Test Voltage: 5.8G WIFI 11a CH157 P=17.5

Test Engineer: Liu Yabo

Remark: 数据线: A13 ANT0

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

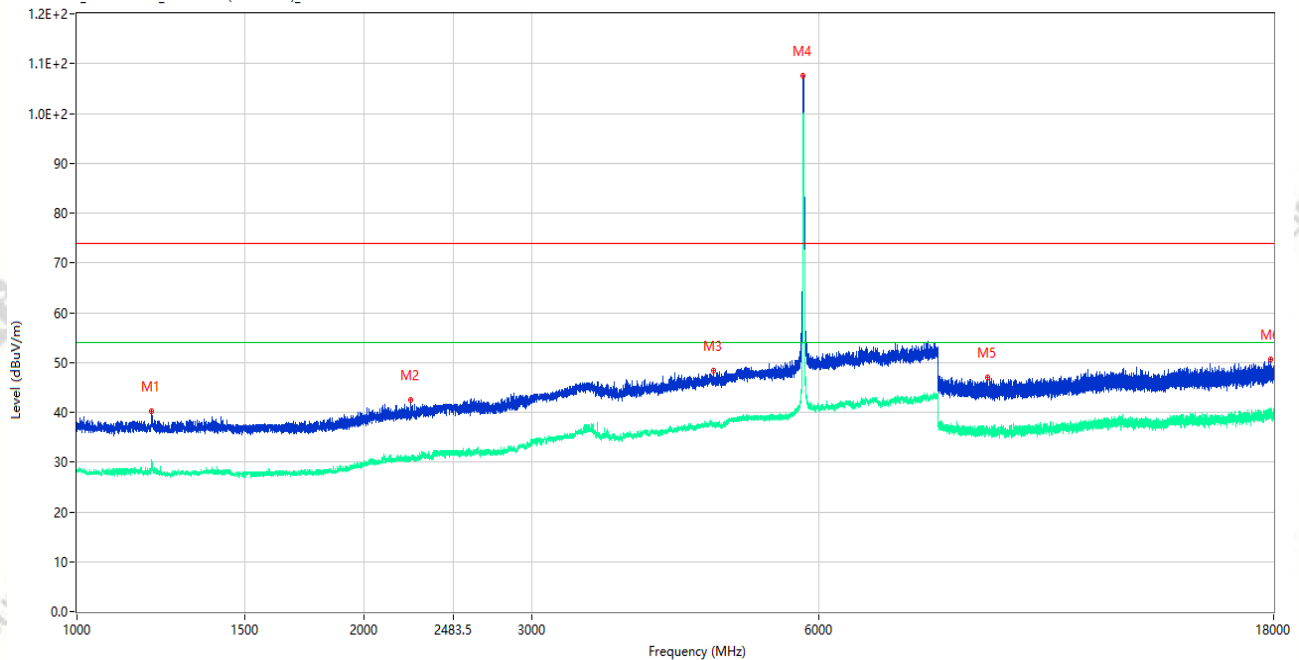

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1197.000	40.17	-15.71	74.0	33.83	Peak	226.00	150	Horizontal	Pass
1**	1197.000	29.02	-15.71	54.0	24.98	AV	226.00	150	Horizontal	Pass
2	2241.500	42.45	-12.97	74.0	31.55	Peak	28.00	150	Horizontal	Pass
2**	2241.500	30.70	-12.97	54.0	23.30	AV	28.00	150	Horizontal	Pass
3	4650.000	48.35	-3.30	74.0	25.65	Peak	0.00	150	Horizontal	Pass
3**	4650.000	37.39	-3.30	54.0	16.61	AV	0.00	150	Horizontal	Pass
4	5781.000	107.49	-1.51	74.0	-33.49	Peak	0.00	150	Horizontal	N/A
4**	5781.000	99.95	-1.51	54.0	-45.95	AV	0.00	150	Horizontal	N/A
5	9021.725	47.02	-4.41	74.0	26.98	Peak	51.00	150	Horizontal	Pass
5**	9021.725	36.62	-4.41	54.0	17.38	AV	51.00	150	Horizontal	Pass
6	17876.099	50.51	0.49	74.0	23.49	Peak	216.00	150	Horizontal	Pass
6**	17876.099	39.43	0.49	54.0	14.57	AV	216.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-19_13.24.29

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC

Test Site: 966#2


Test Voltage: 5.8G WIFI 11ac20 CH157

P=16.5

Test Engineer: Liu Yabo

Remark: 数据线: A13 ANT0

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

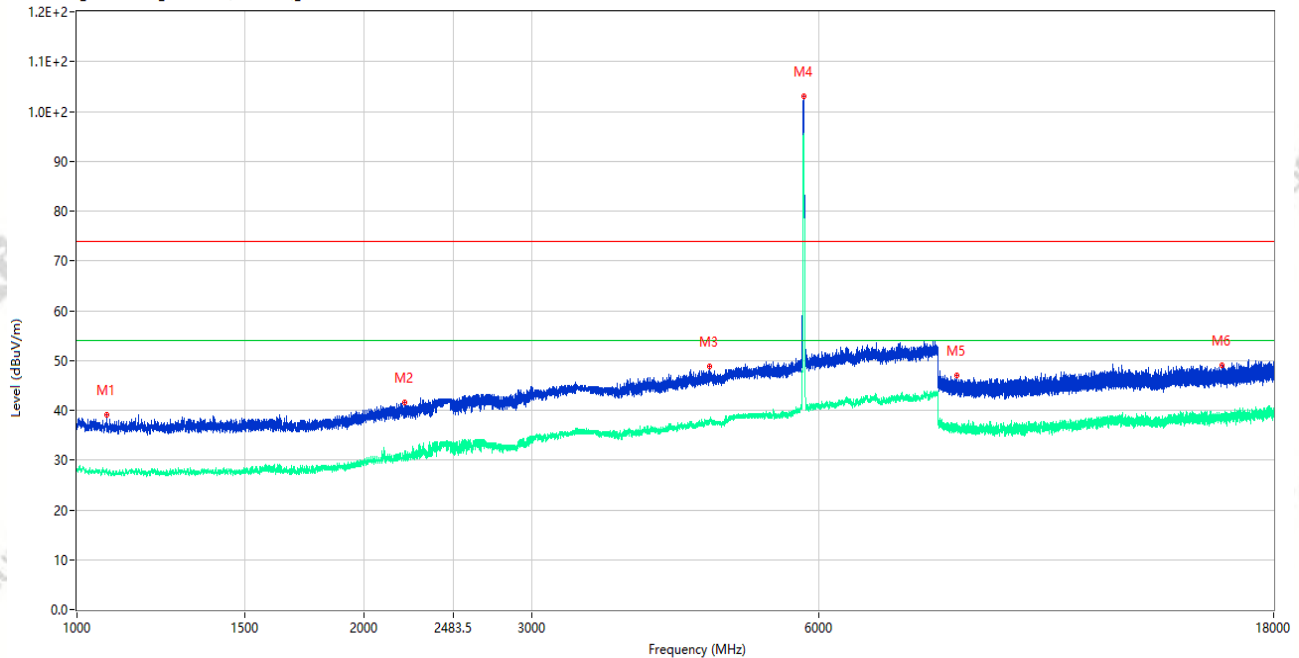

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1075.500	39.11	-15.39	74.0	34.89	Peak	320.00	150	Vertical	Pass
1**	1075.500	27.65	-15.39	54.0	26.35	AV	320.00	150	Vertical	Pass
2	2204.250	41.53	-13.32	74.0	32.47	Peak	302.00	150	Vertical	Pass
2**	2204.250	30.60	-13.32	54.0	23.40	AV	302.00	150	Vertical	Pass
3	4613.500	48.89	-3.29	74.0	25.11	Peak	168.00	150	Vertical	Pass
3**	4613.500	38.06	-3.29	54.0	15.94	AV	168.00	150	Vertical	Pass
4	5784.000	102.97	-1.54	74.0	-28.97	Peak	178.00	150	Vertical	N/A
4**	5784.000	95.16	-1.54	54.0	-41.16	AV	178.00	150	Vertical	N/A
5	8372.875	46.98	-4.42	74.0	27.02	Peak	0.00	150	Vertical	Pass
5**	8372.875	37.49	-4.42	54.0	16.51	AV	0.00	150	Vertical	Pass
6	15896.588	48.97	-1.74	74.0	25.03	Peak	0.00	150	Vertical	Pass
6**	15896.588	38.66	-1.74	54.0	15.34	AV	0.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-19_13.29.22

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC

Test Site: 966#2


Test Voltage: 5.8G WIFI 11ac20 CH157

P=16.5

Test Engineer: Liu Yabo

Remark: 数据线: A13 ANT0

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

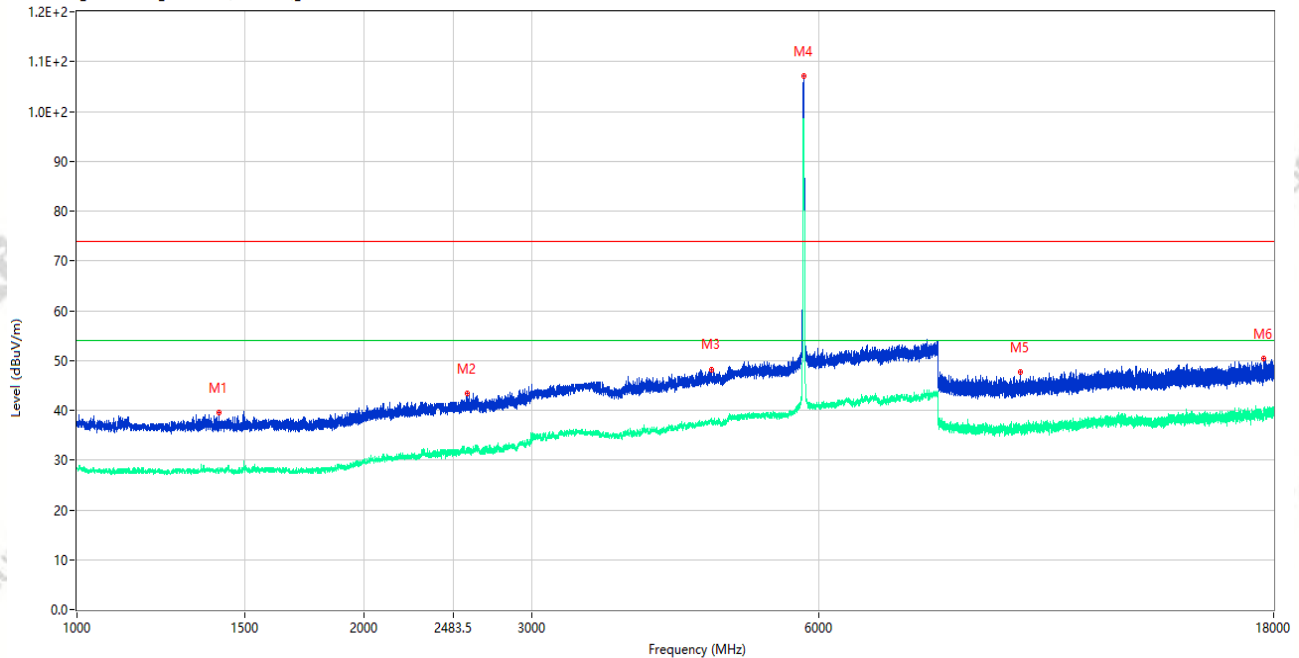

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1408.000	39.47	-15.98	74.0	34.53	Peak	197.00	150	Horizontal	Pass
1**	1408.000	27.34	-15.98	54.0	26.66	AV	197.00	150	Horizontal	Pass
2	2568.250	43.32	-11.04	74.0	30.68	Peak	302.00	150	Horizontal	Pass
2**	2568.250	32.13	-11.04	54.0	21.87	AV	302.00	150	Horizontal	Pass
3	4628.000	48.03	-2.58	74.0	25.97	Peak	328.00	150	Horizontal	Pass
3**	4628.000	38.03	-2.58	54.0	15.97	AV	328.00	150	Horizontal	Pass
4	5787.000	107.16	-1.54	74.0	-33.16	Peak	359.00	150	Horizontal	N/A
4**	5787.000	98.34	-1.54	54.0	-44.34	AV	359.00	150	Horizontal	N/A
5	9760.349	47.62	-3.65	74.0	26.38	Peak	240.00	150	Horizontal	Pass
5**	9760.349	35.87	-3.65	54.0	18.13	AV	240.00	150	Horizontal	Pass
6	17577.900	50.41	0.06	74.0	23.59	Peak	328.00	150	Horizontal	Pass
6**	17577.900	39.25	0.06	54.0	14.75	AV	328.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-19_10.15.25

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC

Test Site: 966#2


Test Voltage: 5.8G WIFI 11ac40 CH151

P=16.5

Test Engineer: Liu Yabo

Remark: 数据线: A13 ANT0

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

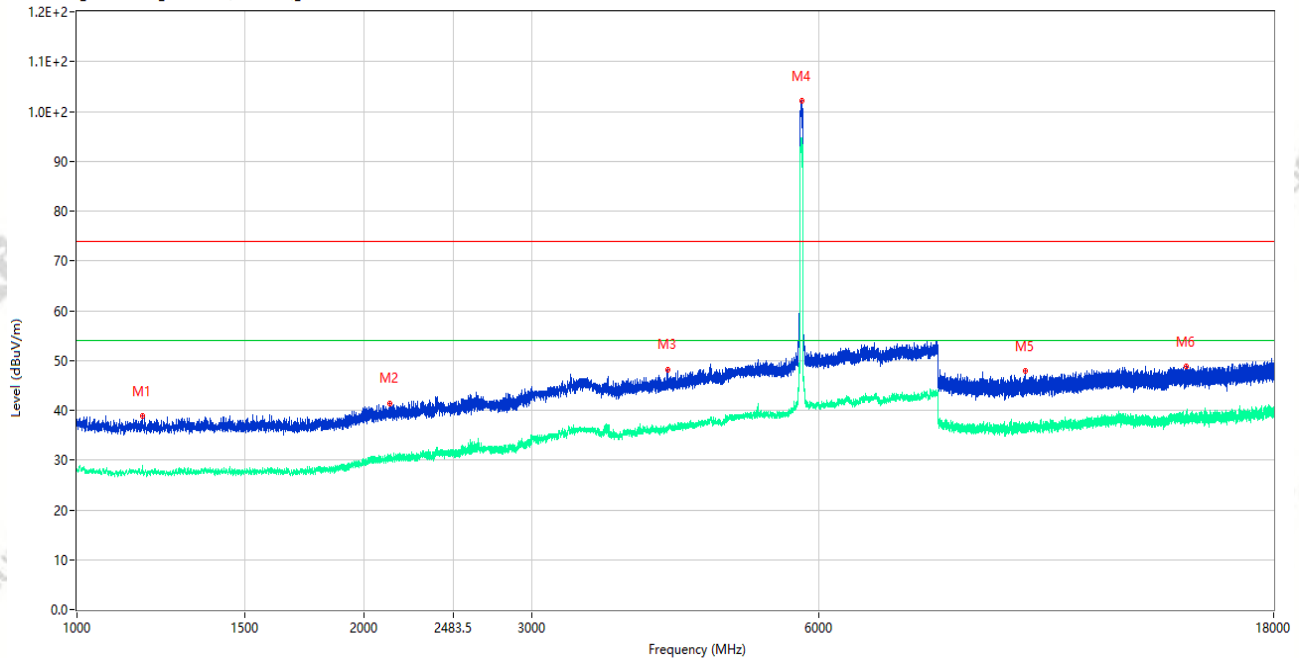

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1170.250	38.76	-15.52	74.0	35.24	Peak	334.00	100	Vertical	Pass
1**	1170.250	27.95	-15.52	54.0	26.05	AV	334.00	100	Vertical	Pass
2	2127.000	41.45	-13.27	74.0	32.55	Peak	199.00	100	Vertical	Pass
2**	2127.000	29.89	-13.27	54.0	24.11	AV	199.00	100	Vertical	Pass
3	4169.000	48.23	-4.42	74.0	25.77	Peak	172.00	100	Vertical	Pass
3**	4169.000	36.35	-4.42	54.0	17.65	AV	172.00	100	Vertical	Pass
4	5764.000	102.10	-1.85	74.0	-28.10	Peak	172.00	100	Vertical	N/A
4**	5764.000	94.29	-1.85	54.0	-40.29	AV	172.00	100	Vertical	N/A
5	9890.500	47.98	-4.20	74.0	26.02	Peak	96.00	100	Vertical	Pass
5**	9890.500	37.23	-4.20	54.0	16.77	AV	96.00	100	Vertical	Pass
6	14591.963	48.87	-2.04	74.0	25.13	Peak	74.00	100	Vertical	Pass
6**	14591.963	39.50	-2.04	54.0	14.50	AV	74.00	100	Vertical	Pass

Test Result

Project Number: P-CC26060005

Test Time: 26-07-19_10.01.30.

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC

Test Site: 966#2


Test Voltage: 5.8G WIFI 11ac40 CH151

P=16.5

Test Engineer: Liu Yabo

Remark: 数据线: A13 ANT0

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

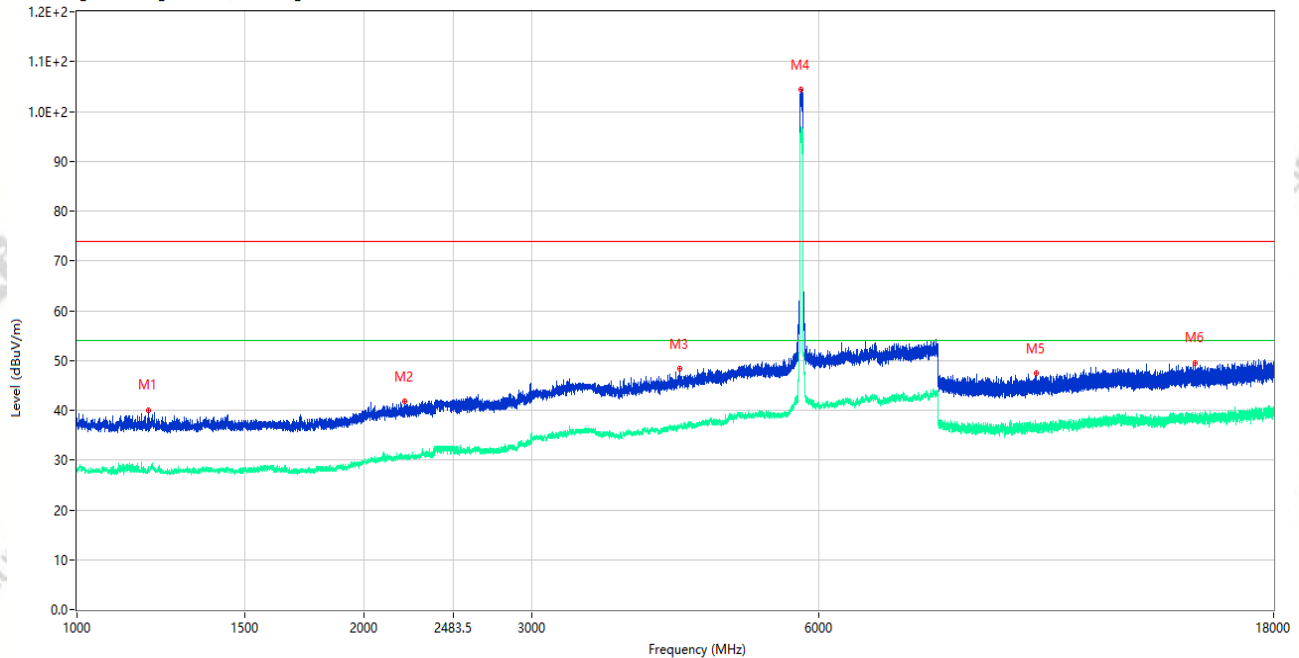

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1189.000	40.11	-15.89	74.0	33.89	Peak	0.00	100	Horizontal	Pass
1**	1189.000	27.86	-15.89	54.0	26.14	AV	0.00	100	Horizontal	Pass
2	2206.250	41.76	-13.34	74.0	32.24	Peak	351.00	100	Horizontal	Pass
2**	2206.250	30.18	-13.34	54.0	23.82	AV	351.00	100	Horizontal	Pass
3	4292.000	48.35	-4.00	74.0	25.65	Peak	11.00	100	Horizontal	Pass
3**	4292.000	36.86	-4.00	54.0	17.14	AV	11.00	100	Horizontal	Pass
4	5747.500	104.41	-2.14	74.0	-30.41	Peak	360.00	100	Horizontal	N/A
4**	5747.500	96.79	-2.14	54.0	-42.79	AV	360.00	100	Horizontal	N/A
5	10136.549	47.43	-3.95	74.0	26.57	Peak	313.00	100	Horizontal	Pass
5**	10136.549	37.24	-3.95	54.0	16.76	AV	313.00	100	Horizontal	Pass
6	14902.500	49.60	-1.66	74.0	24.40	Peak	210.00	100	Horizontal	Pass
6**	14902.500	38.92	-1.66	54.0	15.08	AV	210.00	100	Horizontal	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-19_10.44.21

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC

Test Site: 966#2


Test Voltage: 5.8G WIFI 11ac80 CH155

P=16.5

Test Engineer: Liu Yabo

Remark: 数据线: A13 ANT0

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

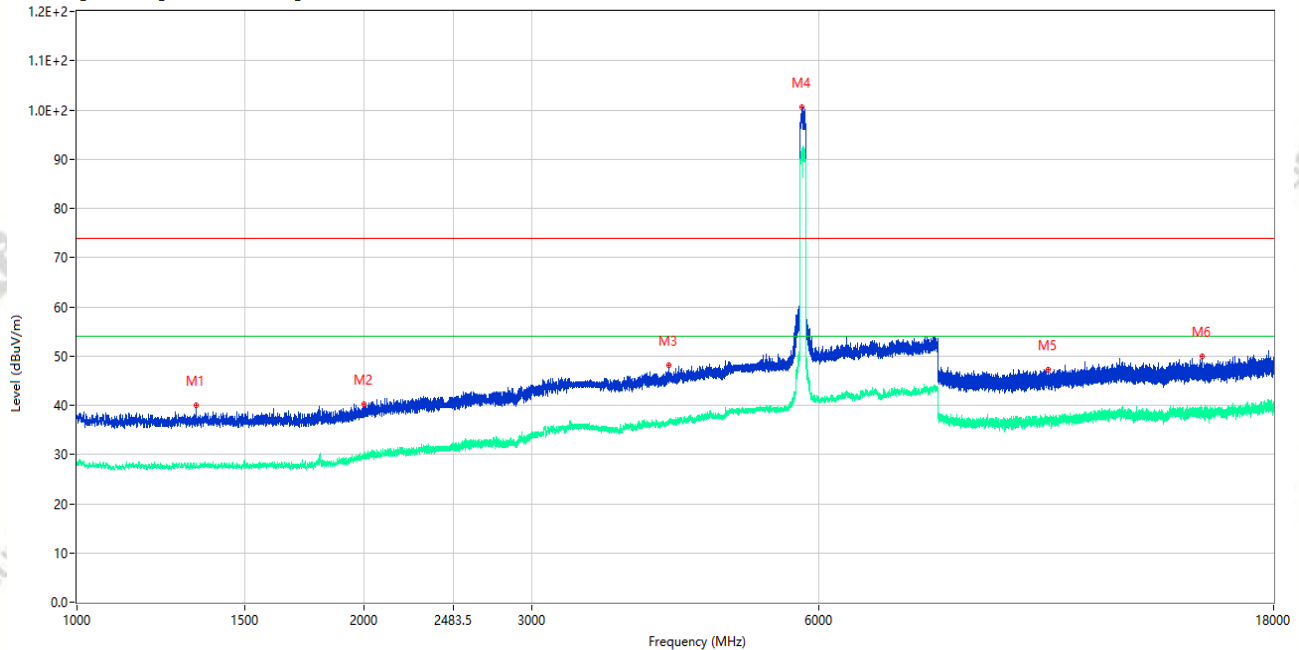

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1334.250	40.08	-16.03	74.0	33.92	Peak	158.00	150	Vertical	Pass
1**	1334.250	28.14	-16.03	54.0	25.86	AV	158.00	150	Vertical	Pass
2	1999.000	40.27	-14.34	74.0	33.73	Peak	0.00	150	Vertical	Pass
2**	1999.000	29.81	-14.34	54.0	24.19	AV	0.00	150	Vertical	Pass
3	4177.000	48.19	-4.07	74.0	25.81	Peak	4.00	150	Vertical	Pass
3**	4177.000	36.66	-4.07	54.0	17.34	AV	4.00	150	Vertical	Pass
4	5763.500	100.50	-1.87	74.0	-26.50	Peak	170.00	150	Vertical	N/A
4**	5763.500	92.26	-1.87	54.0	-38.26	AV	170.00	150	Vertical	N/A
5	10438.175	47.21	-3.37	74.0	26.79	Peak	241.00	150	Vertical	Pass
5**	10438.175	37.19	-3.37	54.0	16.81	AV	241.00	150	Vertical	Pass
6	15135.075	49.85	-2.47	74.0	24.15	Peak	75.00	150	Vertical	Pass
6**	15135.075	38.75	-2.47	54.0	15.25	AV	75.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-19_10.48.36

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC

Test Site: 966#2


Test Voltage: 5.8G WIFI 11ac80 CH155

P=16.5

Test Engineer: Liu Yabo

Remark: 数据线: A13 ANT0

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

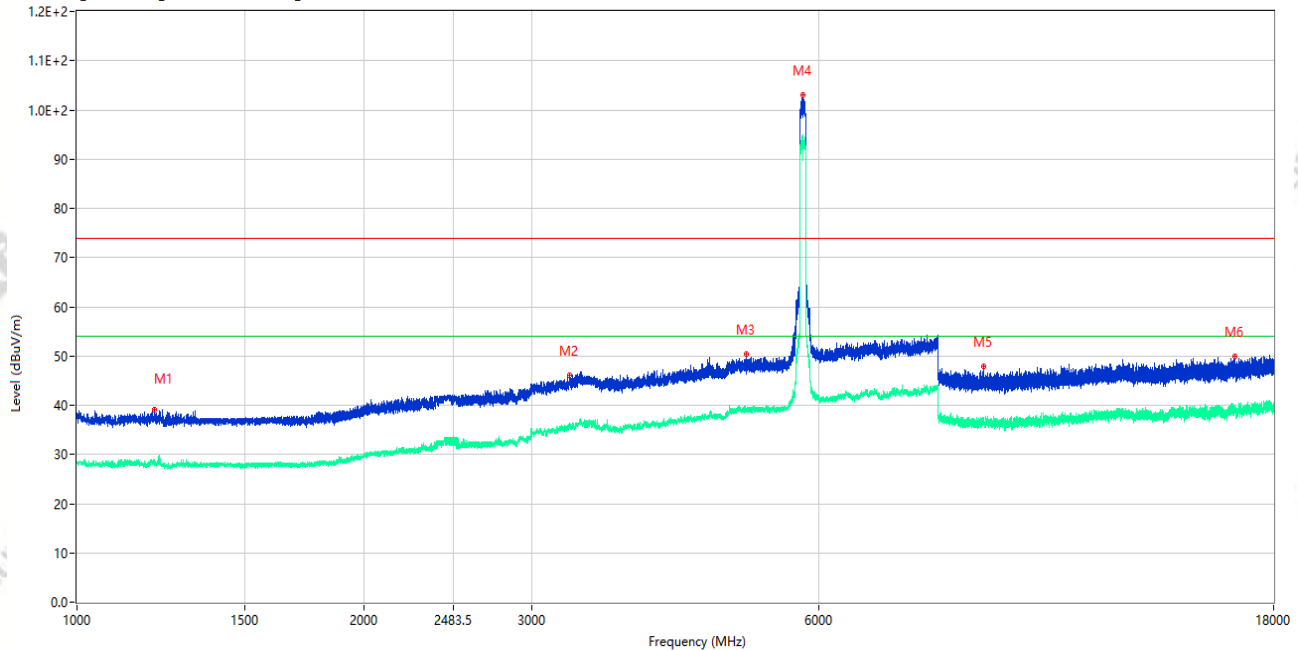

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1205.750	39.04	-15.78	74.0	34.96	Peak	0.00	150	Horizontal	Pass
1**	1205.750	28.56	-15.78	54.0	25.44	AV	0.00	150	Horizontal	Pass
2	3285.500	45.99	-6.81	74.0	28.01	Peak	1.00	150	Horizontal	Pass
2**	3285.500	36.04	-6.81	54.0	17.96	AV	1.00	150	Horizontal	Pass
3	5042.000	50.34	-2.44	74.0	23.66	Peak	251.00	150	Horizontal	Pass
3**	5042.000	38.86	-2.44	54.0	15.14	AV	251.00	150	Horizontal	Pass
4	5777.500	103.07	-1.52	74.0	-29.07	Peak	360.00	150	Horizontal	N/A
4**	5777.500	94.73	-1.52	54.0	-40.73	AV	360.00	150	Horizontal	N/A
5	8928.151	47.87	-4.40	74.0	26.13	Peak	329.00	150	Horizontal	Pass
5**	8928.151	36.86	-4.40	54.0	17.14	AV	329.00	150	Horizontal	Pass
6	16378.537	49.93	-1.61	74.0	24.07	Peak	211.00	150	Horizontal	Pass
6**	16378.537	38.96	-1.61	54.0	15.04	AV	211.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-19_11.59.10

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC

Test Site: 966#2


Test Voltage: 5.8G WIFI 11ax20 CH157

P=17.5

Test Engineer: Liu Yabo

Remark: 数据线: A13 ANT0

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

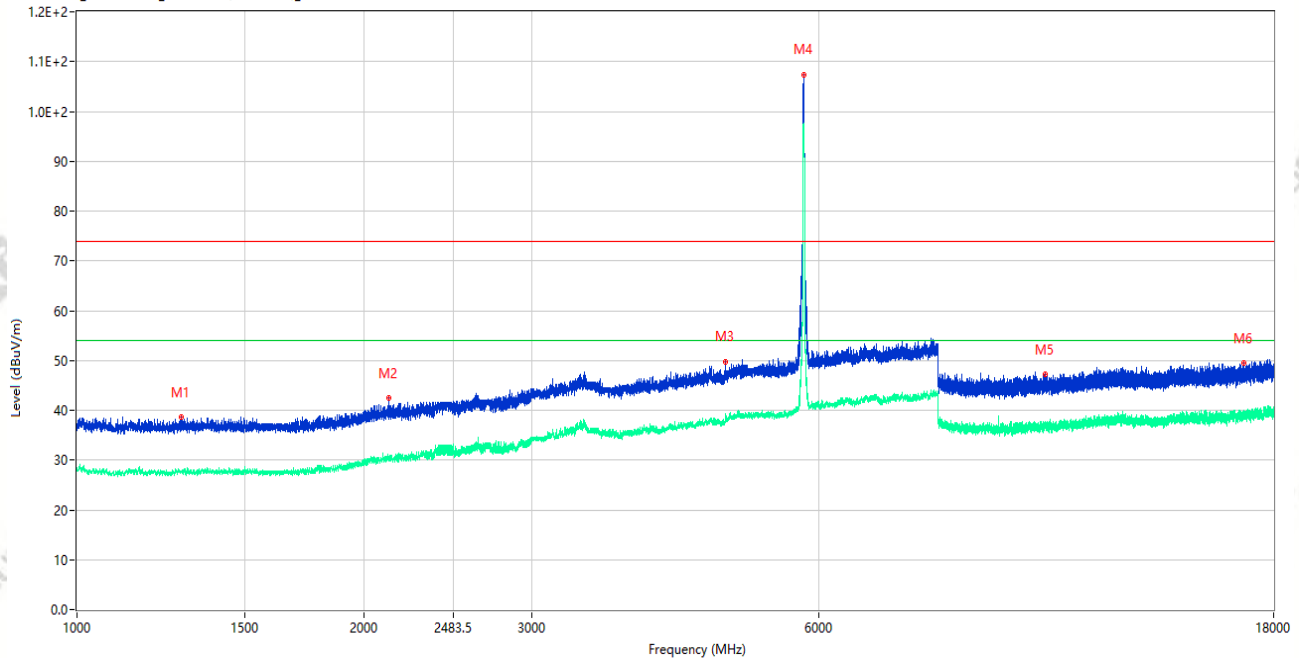

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1285.000	38.63	-15.92	74.0	35.37	Peak	360.00	150	Vertical	Pass
1**	1285.000	27.55	-15.92	54.0	26.45	AV	360.00	150	Vertical	Pass
2	2121.250	42.47	-13.33	74.0	31.53	Peak	329.00	150	Vertical	Pass
2**	2121.250	30.65	-13.33	54.0	23.35	AV	329.00	150	Vertical	Pass
3	4788.500	49.82	-3.06	74.0	24.18	Peak	249.00	150	Vertical	Pass
3**	4788.500	37.93	-3.06	54.0	16.07	AV	249.00	150	Vertical	Pass
4	5783.000	107.44	-1.53	74.0	-33.44	Peak	181.00	150	Vertical	N/A
4**	5783.000	96.52	-1.53	54.0	-42.52	AV	181.00	150	Vertical	N/A
5	10375.713	47.19	-3.41	74.0	26.81	Peak	216.00	150	Vertical	Pass
5**	10375.713	37.09	-3.41	54.0	16.91	AV	216.00	150	Vertical	Pass
6	16736.062	49.51	-1.51	74.0	24.49	Peak	185.00	150	Vertical	Pass
6**	16736.062	39.29	-1.51	54.0	14.71	AV	185.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-19_11.52.49

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC

Test Site: 966#2


Test Voltage: 5.8G WIFI 11ax20 CH157

P=17.5

Test Engineer: Liu Yabo

Remark: 数据线: A13 ANT0

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

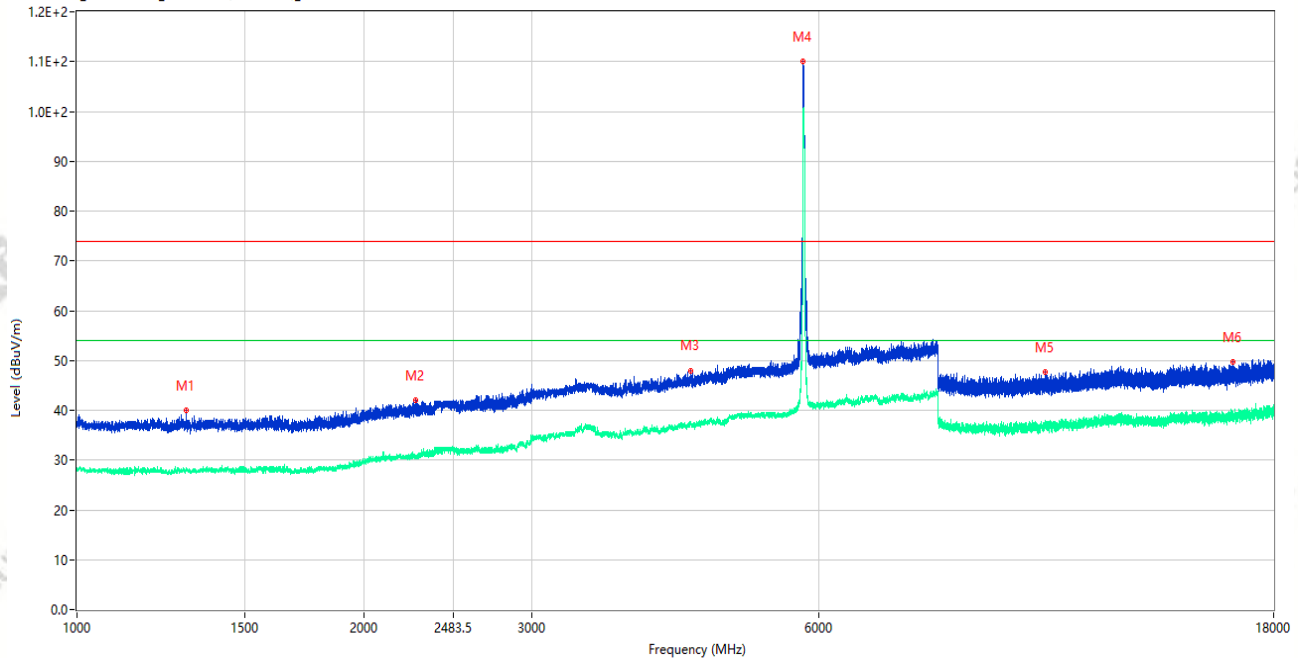

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1301.000	39.99	-15.58	74.0	34.01	Peak	279.00	150	Horizontal	Pass
1**	1301.000	27.85	-15.58	54.0	26.15	AV	279.00	150	Horizontal	Pass
2	2266.000	42.05	-13.21	74.0	31.95	Peak	1.00	150	Horizontal	Pass
2**	2266.000	30.96	-13.21	54.0	23.04	AV	1.00	150	Horizontal	Pass
3	4400.000	48.02	-3.14	74.0	25.98	Peak	335.00	150	Horizontal	Pass
3**	4400.000	37.17	-3.14	54.0	16.83	AV	335.00	150	Horizontal	Pass
4	5777.500	110.05	-1.52	74.0	-36.05	Peak	359.00	150	Horizontal	N/A
4**	5777.500	100.64	-1.52	54.0	-46.64	AV	359.00	150	Horizontal	N/A
5	10363.837	47.64	-3.17	74.0	26.36	Peak	123.00	150	Horizontal	Pass
5**	10363.837	37.27	-3.17	54.0	16.73	AV	123.00	150	Horizontal	Pass
6	16306.088	49.64	-1.54	74.0	24.36	Peak	360.00	150	Horizontal	Pass
6**	16306.088	38.60	-1.54	54.0	15.40	AV	360.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-19_12.52.11

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC

Test Site: 966#2


Test Voltage: 5.8G WIFI 11ax40 CH151

P=17.5

Test Engineer: Liu Yabo

Remark: 数据线: A13 ANT0

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

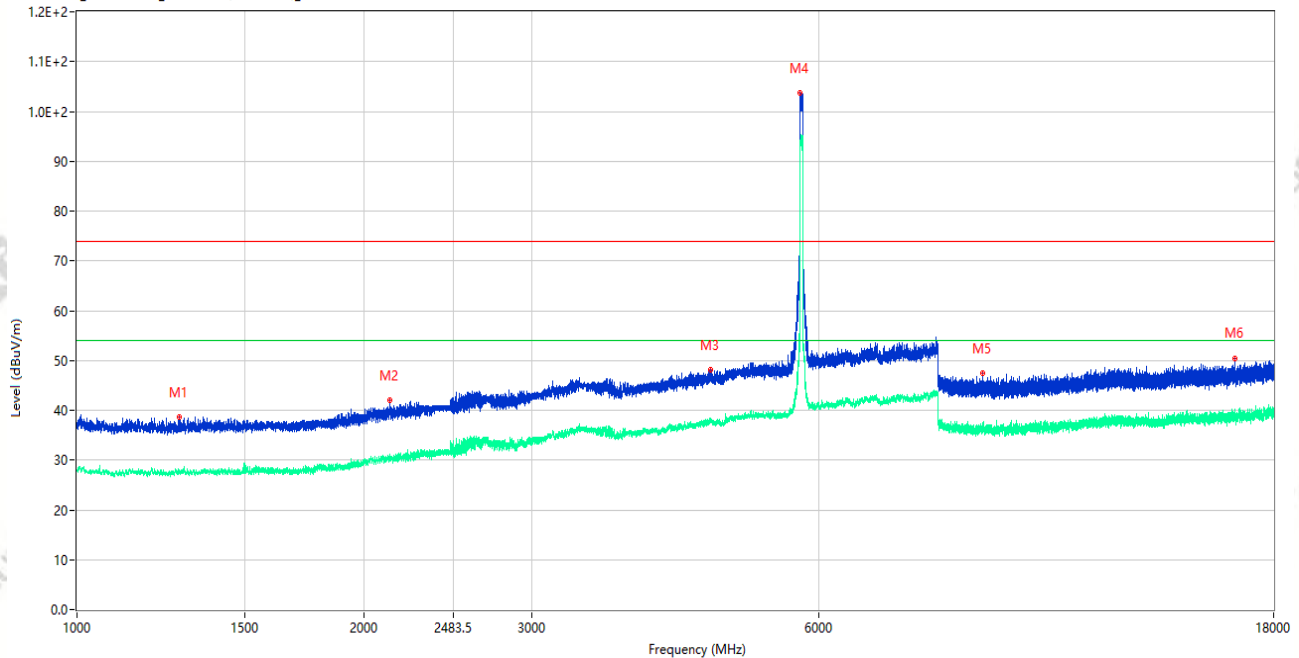

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1279.250	38.68	-15.88	74.0	35.32	Peak	278.00	150	Vertical	Pass
1**	1279.250	27.99	-15.88	54.0	26.01	AV	278.00	150	Vertical	Pass
2	2128.000	41.94	-13.25	74.0	32.06	Peak	319.00	150	Vertical	Pass
2**	2128.000	30.37	-13.25	54.0	23.63	AV	319.00	150	Vertical	Pass
3	4620.000	48.09	-2.87	74.0	25.91	Peak	0.00	150	Vertical	Pass
3**	4620.000	37.94	-2.87	54.0	16.06	AV	0.00	150	Vertical	Pass
4	5738.500	103.78	-2.25	74.0	-29.78	Peak	10.00	150	Vertical	N/A
4**	5738.500	94.21	-2.25	54.0	-40.21	AV	10.00	150	Vertical	N/A
5	8923.162	47.36	-4.69	74.0	26.64	Peak	0.00	150	Vertical	Pass
5**	8923.162	36.11	-4.69	54.0	17.89	AV	0.00	150	Vertical	Pass
6	16393.762	50.48	-1.09	74.0	23.52	Peak	347.00	150	Vertical	Pass
6**	16393.762	38.96	-1.09	54.0	15.04	AV	347.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-19_12.57.56

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC

Test Site: 966#2


Test Voltage: 5.8G WIFI 11ax40 CH151

P=17.5

Test Engineer: Liu Yabo

Remark: 数据线: A13 ANT0

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

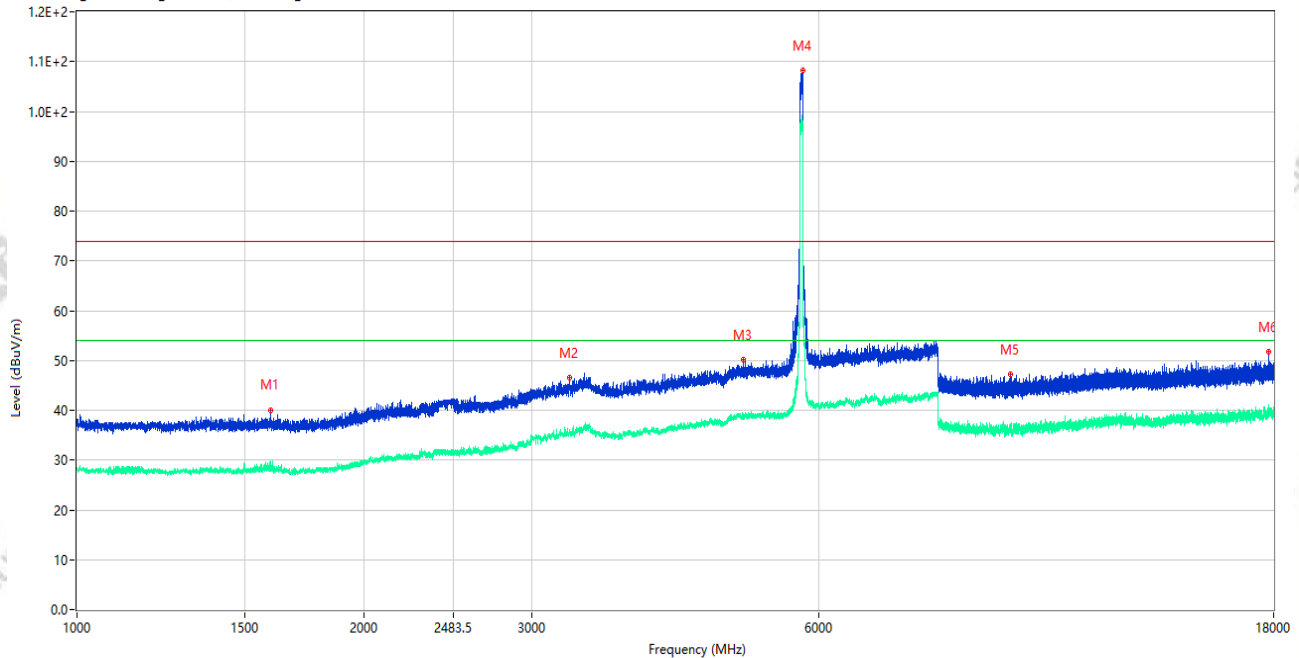

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1597.750	40.09	-16.21	74.0	33.91	Peak	268.00	150	Horizontal	Pass
1**	1597.750	28.19	-16.21	54.0	25.81	AV	268.00	150	Horizontal	Pass
2	3289.500	46.44	-6.77	74.0	27.56	Peak	131.00	150	Horizontal	Pass
2**	3289.500	36.15	-6.77	54.0	17.85	AV	131.00	150	Horizontal	Pass
3	4997.500	50.11	-2.23	74.0	23.89	Peak	142.00	150	Horizontal	Pass
3**	4997.500	38.58	-2.23	54.0	15.42	AV	142.00	150	Horizontal	Pass
4	5767.500	108.20	-1.72	74.0	-34.20	Peak	359.00	150	Horizontal	N/A
4**	5767.500	98.03	-1.72	54.0	-44.03	AV	359.00	150	Horizontal	N/A
5	9528.313	47.27	-3.16	74.0	26.73	Peak	239.00	150	Horizontal	Pass
5**	9528.313	36.55	-3.16	54.0	17.45	AV	239.00	150	Horizontal	Pass
6	17804.175	51.70	0.98	74.0	22.30	Peak	250.00	150	Horizontal	Pass
6**	17804.175	39.72	0.98	54.0	14.28	AV	250.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-19_11.15.44

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC

Test Site: 966#2


Test Voltage: 5.8G WIFI 11ax80 CH155

P=17.5

Test Engineer: Liu Yabo

Remark: 数据线: A13 ANT0

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

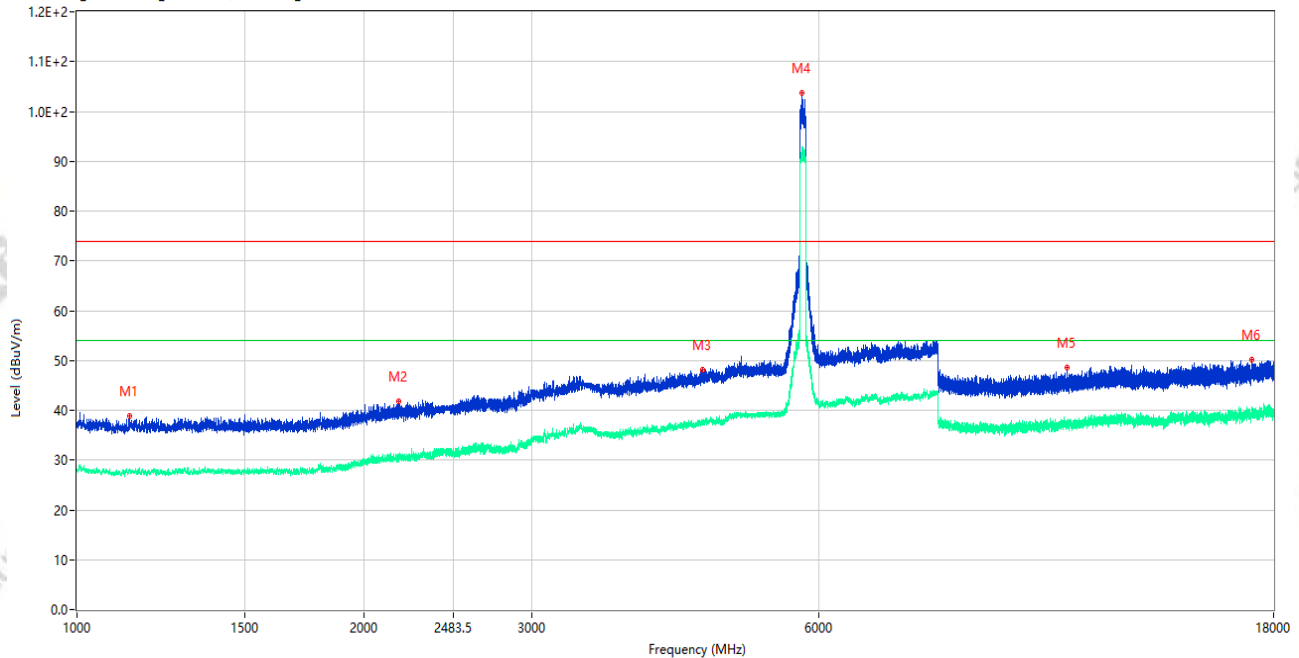

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1134.250	38.78	-15.55	74.0	35.22	Peak	115.00	150	Vertical	Pass
1**	1134.250	27.81	-15.55	54.0	26.19	AV	115.00	150	Vertical	Pass
2	2177.750	41.81	-12.84	74.0	32.19	Peak	126.00	150	Vertical	Pass
2**	2177.750	31.30	-12.84	54.0	22.70	AV	126.00	150	Vertical	Pass
3	4530.500	48.08	-2.42	74.0	25.92	Peak	84.00	150	Vertical	Pass
3**	4530.500	37.54	-2.42	54.0	16.46	AV	84.00	150	Vertical	Pass
4	5763.500	103.65	-1.87	74.0	-29.65	Peak	173.00	150	Vertical	N/A
4**	5763.500	92.51	-1.87	54.0	-38.51	AV	173.00	150	Vertical	N/A
5	10932.412	48.57	-3.29	74.0	25.43	Peak	74.00	150	Vertical	Pass
5**	10932.412	37.57	-3.29	54.0	16.43	AV	74.00	150	Vertical	Pass
6	17090.699	50.07	-0.69	74.0	23.93	Peak	277.00	150	Vertical	Pass
6**	17090.699	40.09	-0.69	54.0	13.91	AV	277.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-19_11.11.21

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC

Test Site: 966#2


Test Voltage: 5.8G WIFI 11ax80 CH155

P=17.5

Test Engineer: Liu Yabo

Remark: 数据线: A13 ANT0

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

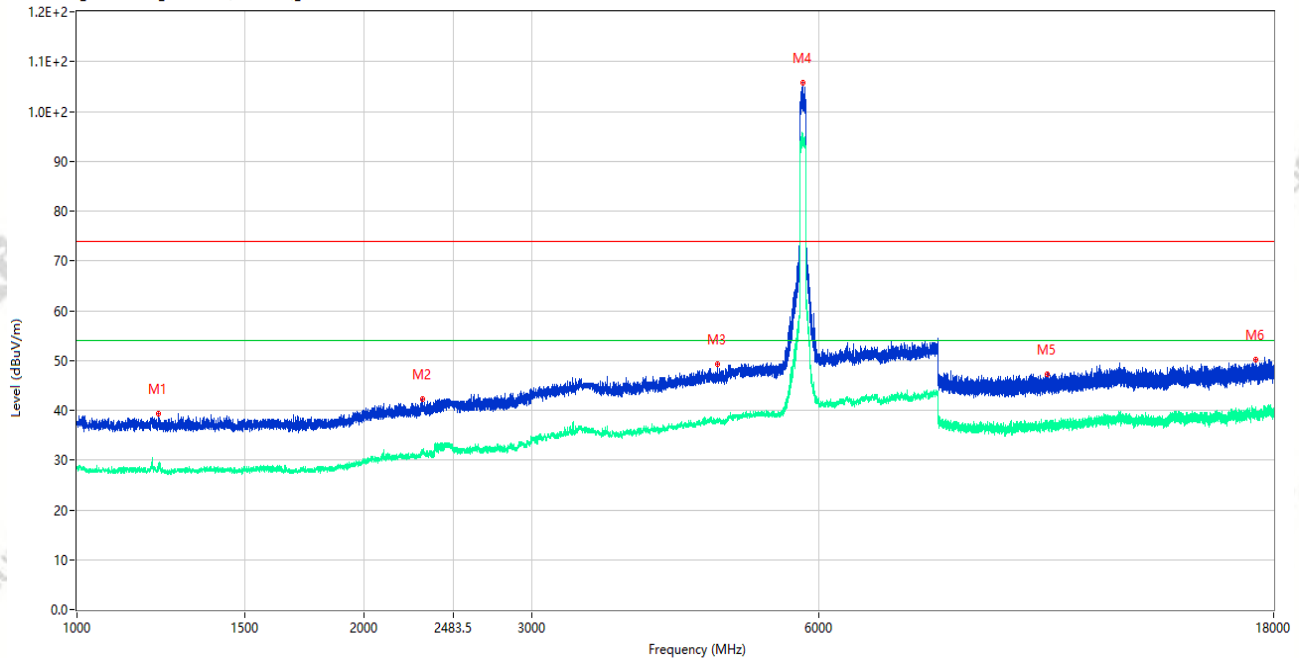

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1218.750	39.39	-15.96	74.0	34.61	Peak	276.00	150	Horizontal	Pass
1**	1218.750	29.41	-15.96	54.0	24.59	AV	276.00	150	Horizontal	Pass
2	2304.250	42.18	-12.80	74.0	31.82	Peak	155.00	150	Horizontal	Pass
2**	2304.250	31.12	-12.80	54.0	22.88	AV	155.00	150	Horizontal	Pass
3	4700.000	49.29	-3.99	74.0	24.71	Peak	184.00	150	Horizontal	Pass
3**	4700.000	37.70	-3.99	54.0	16.30	AV	184.00	150	Horizontal	Pass
4	5778.000	105.78	-1.53	74.0	-31.78	Peak	360.00	150	Horizontal	N/A
4**	5778.000	95.58	-1.53	54.0	-41.58	AV	360.00	150	Horizontal	N/A
5	10411.338	47.30	-3.28	74.0	26.70	Peak	0.00	150	Horizontal	Pass
5**	10411.338	36.97	-3.28	54.0	17.03	AV	0.00	150	Horizontal	Pass
6	17250.300	50.22	-0.58	74.0	23.78	Peak	211.00	150	Horizontal	Pass
6**	17250.300	39.26	-0.58	54.0	14.74	AV	211.00	150	Horizontal	Pass

Aux. Antenna Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_15.51.33

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 22.8

Model Number: SD7 Ultra E

Humidity (%RH): 51

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC


Test Site: 966#2

Test Voltage: 5.2G WIFI 11a CH44 P=17.5

Test Engineer: Zhang Mingyue

Remark: 数据线: A13 ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

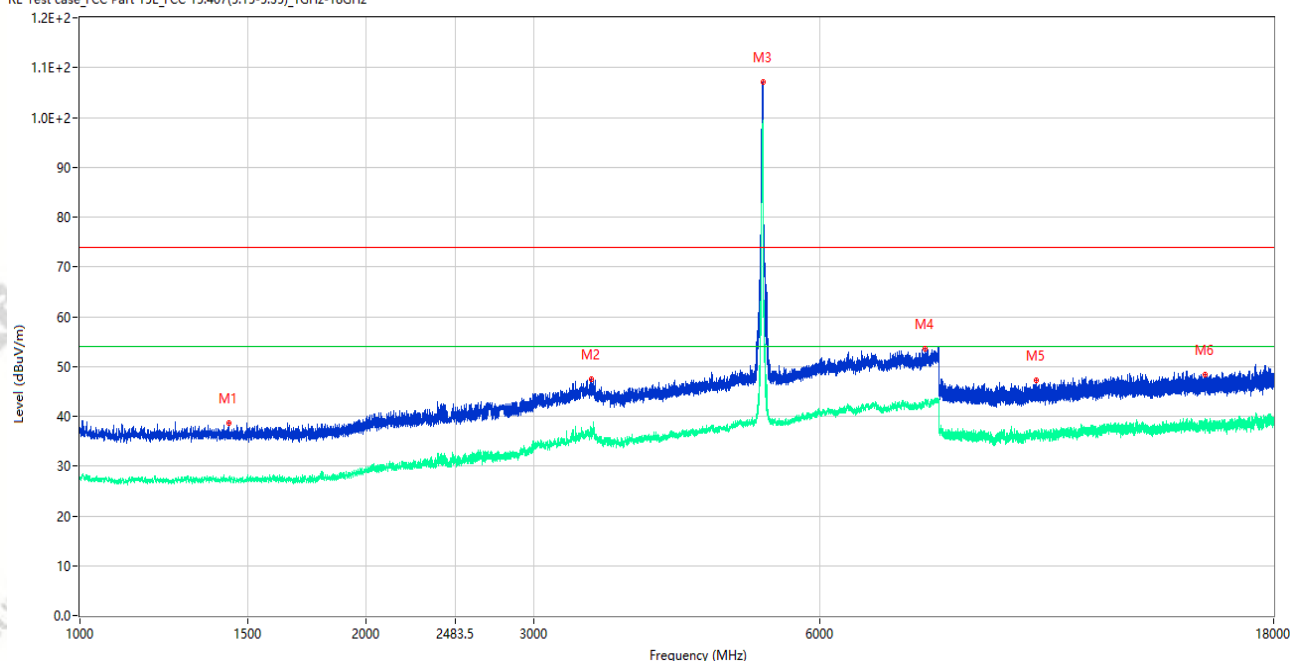

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1434.250	38.57	-16.01	74.0	35.43	Peak	248.00	150	Vertical	Pass
1**	1434.250	27.67	-16.01	54.0	26.33	AV	248.00	150	Vertical	Pass
2	3448.500	47.40	-5.09	74.0	26.60	Peak	343.00	150	Vertical	Pass
2**	3448.500	37.34	-5.09	54.0	16.66	AV	343.00	150	Vertical	Pass
3	5224.000	107.13	-2.34	74.0	-33.13	Peak	29.00	150	Vertical	N/A
3**	5224.000	98.89	-2.34	54.0	-44.89	AV	29.00	150	Vertical	N/A
4	7746.500	53.47	1.42	74.0	20.53	Peak	244.00	150	Vertical	Pass
4**	7746.500	42.64	1.42	54.0	11.36	AV	244.00	150	Vertical	Pass
5	10139.638	47.28	-4.05	74.0	26.72	Peak	50.00	150	Vertical	Pass
5**	10139.638	36.51	-4.05	54.0	17.49	AV	50.00	150	Vertical	Pass
6	15259.763	48.41	-0.95	74.0	25.59	Peak	0.00	150	Vertical	Pass
6**	15259.763	37.92	-0.95	54.0	16.08	AV	0.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_15.47.36

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 22.8

Model Number: SD7 Ultra E

Humidity (%RH): 51

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC


Test Site: 966#2

Test Voltage: 5.2G WIFI 11a CH44 P=17.5

Test Engineer: Zhang Mingyue

Remark: 数据线: A13 ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

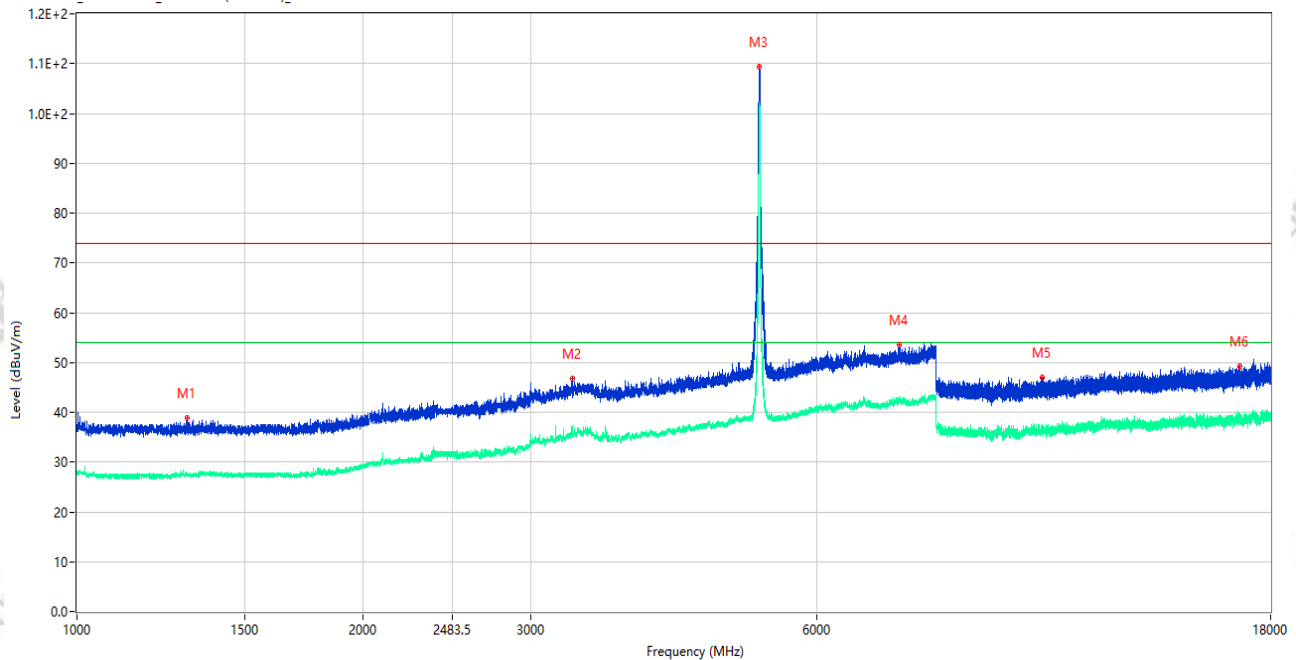

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1304.750	38.90	-15.59	74.0	35.10	Peak	108.00	150	Horizontal	Pass
1**	1304.750	27.55	-15.59	54.0	26.45	AV	108.00	150	Horizontal	Pass
2	3317.000	46.76	-6.38	74.0	27.24	Peak	357.00	150	Horizontal	Pass
2**	3317.000	37.35	-6.38	54.0	16.65	AV	357.00	150	Horizontal	Pass
3	5217.000	109.44	-2.34	74.0	-35.44	Peak	343.00	150	Horizontal	N/A
3**	5217.000	100.55	-2.34	54.0	-46.55	AV	343.00	150	Horizontal	N/A
4	7317.000	53.47	0.68	74.0	20.53	Peak	326.00	150	Horizontal	Pass
4**	7317.000	42.55	0.68	54.0	11.45	AV	326.00	150	Horizontal	Pass
5	10360.750	46.99	-3.13	74.0	27.01	Peak	309.00	150	Horizontal	Pass
5**	10360.750	36.10	-3.13	54.0	17.90	AV	309.00	150	Horizontal	Pass
6	16701.412	49.17	-1.80	74.0	24.83	Peak	81.00	150	Horizontal	Pass
6**	16701.412	38.66	-1.80	54.0	15.34	AV	81.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_16.03.40

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 22.8

Model Number: SD7 Ultra E

Humidity (%RH): 51

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC


Test Site: 966#2

Test Voltage: 5.2G WIFI 11n20 CH44 P=16.5

Test Engineer: Zhang Mingyue

Remark: 数据线: A13 ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

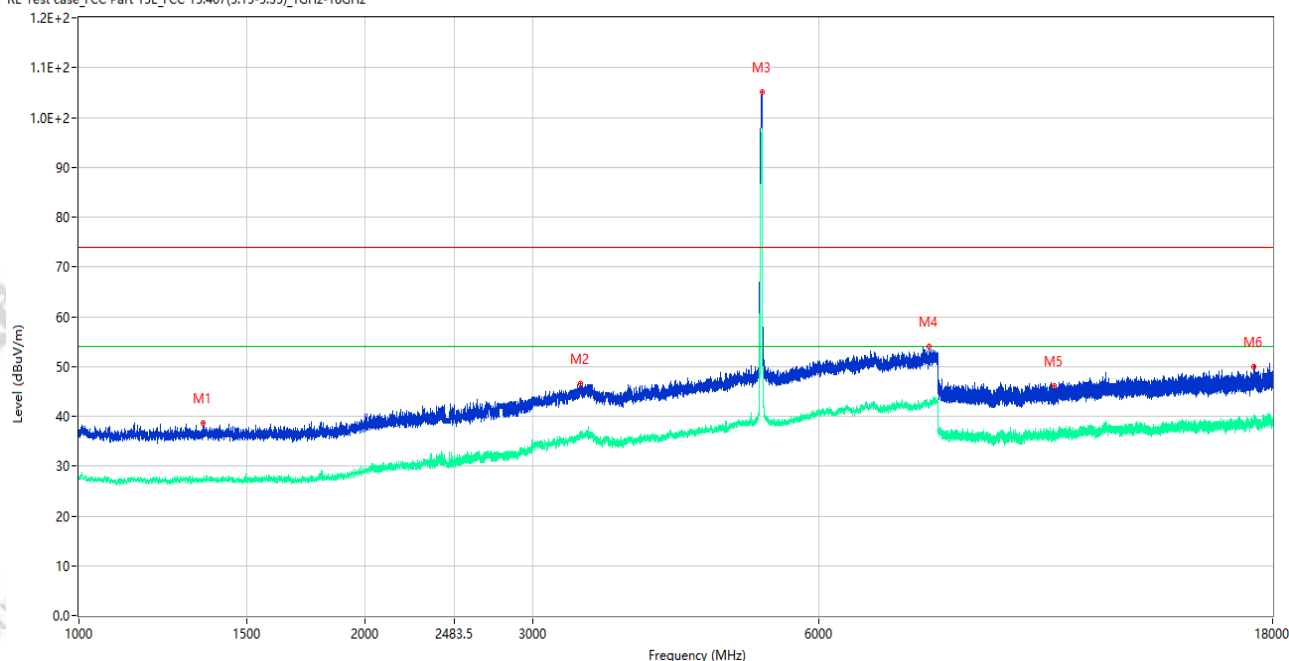

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1352.250	38.61	-15.91	74.0	35.39	Peak	360.00	150	Vertical	Pass
1**	1352.250	27.44	-15.91	54.0	26.56	AV	360.00	150	Vertical	Pass
2	3365.500	46.56	-5.13	74.0	27.44	Peak	170.00	150	Vertical	Pass
2**	3365.500	36.57	-5.13	54.0	17.43	AV	170.00	150	Vertical	Pass
3	5226.500	105.03	-2.32	74.0	-31.03	Peak	11.00	150	Vertical	N/A
3**	5226.500	97.38	-2.32	54.0	-43.38	AV	11.00	150	Vertical	N/A
4	7828.000	54.02	1.58	74.0	19.98	Peak	100.00	150	Vertical	Pass
4**	7828.000	41.78	1.58	54.0	12.22	AV	100.00	150	Vertical	Pass
5	10593.025	46.04	-3.55	74.0	27.96	Peak	333.00	150	Vertical	Pass
5**	10593.025	36.29	-3.55	54.0	17.71	AV	333.00	150	Vertical	Pass
6	17190.187	49.99	0.13	74.0	24.01	Peak	0.00	150	Vertical	Pass
6**	17190.187	38.70	0.13	54.0	15.30	AV	0.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_15.59.39

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 22.8

Model Number: SD7 Ultra E

Humidity (%RH): 51

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC


Test Site: 966#2

Test Voltage: 5.2G WIFI 11n20 CH44 P=16.5

Test Engineer: Zhang Mingyue

Remark: 数据线: A13 ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

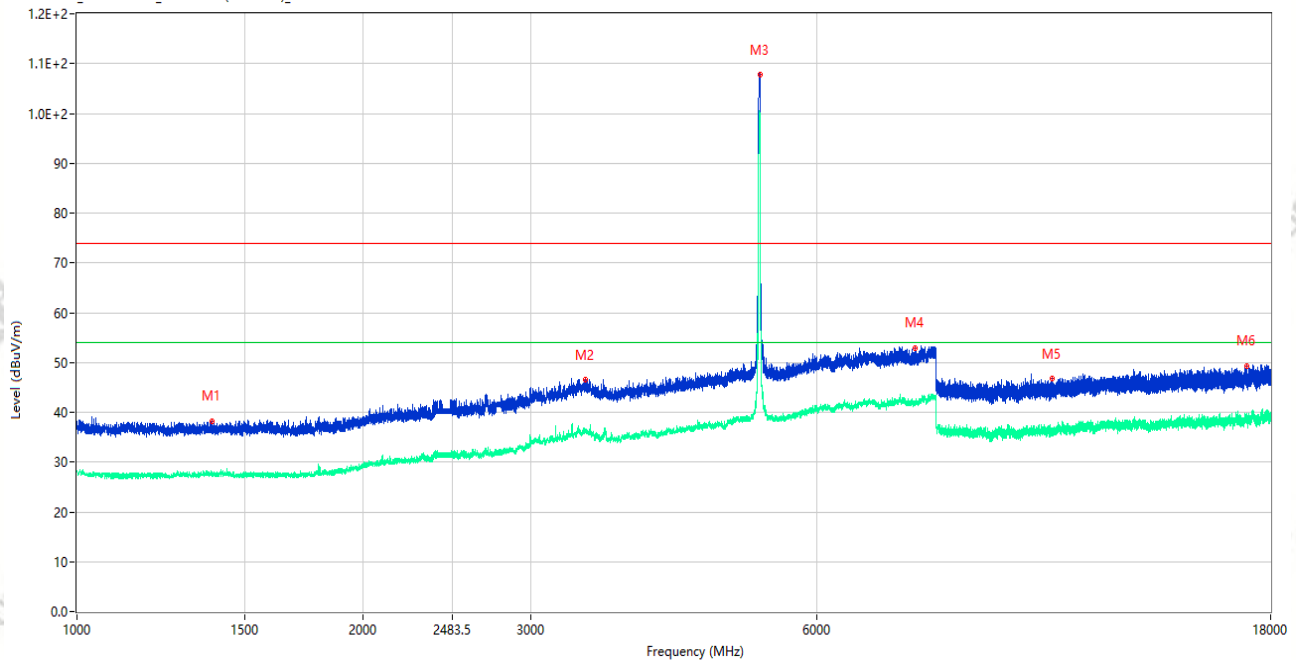

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1388.500	38.28	-15.97	74.0	35.72	Peak	206.00	150	Horizontal	Pass
1**	1388.500	27.14	-15.97	54.0	26.86	AV	206.00	150	Horizontal	Pass
2	3423.000	46.46	-4.91	74.0	27.54	Peak	3.00	150	Horizontal	Pass
2**	3423.000	35.84	-4.91	54.0	18.16	AV	3.00	150	Horizontal	Pass
3	5224.500	107.79	-2.35	74.0	-33.79	Peak	109.00	150	Horizontal	N/A
3**	5224.500	99.80	-2.35	54.0	-45.80	AV	109.00	150	Horizontal	N/A
4	7619.000	52.77	0.41	74.0	21.23	Peak	0.00	150	Horizontal	Pass
4**	7619.000	42.30	0.41	54.0	11.70	AV	0.00	150	Horizontal	Pass
5	10607.037	46.84	-3.70	74.0	27.16	Peak	96.00	150	Horizontal	Pass
5**	10607.037	36.02	-3.70	54.0	17.98	AV	96.00	150	Horizontal	Pass
6	16980.449	49.37	-1.14	74.0	24.63	Peak	0.00	150	Horizontal	Pass
6**	16980.449	38.80	-1.14	54.0	15.20	AV	0.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_16.07.38

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 22.8

Model Number: SD7 Ultra E

Humidity (%RH): 51

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC


Test Site: 966#2

Test Voltage: 5.2G WIFI 11n40 CH38 P=16.5

Test Engineer: Zhang Mingyue

Remark: 数据线: A13 ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

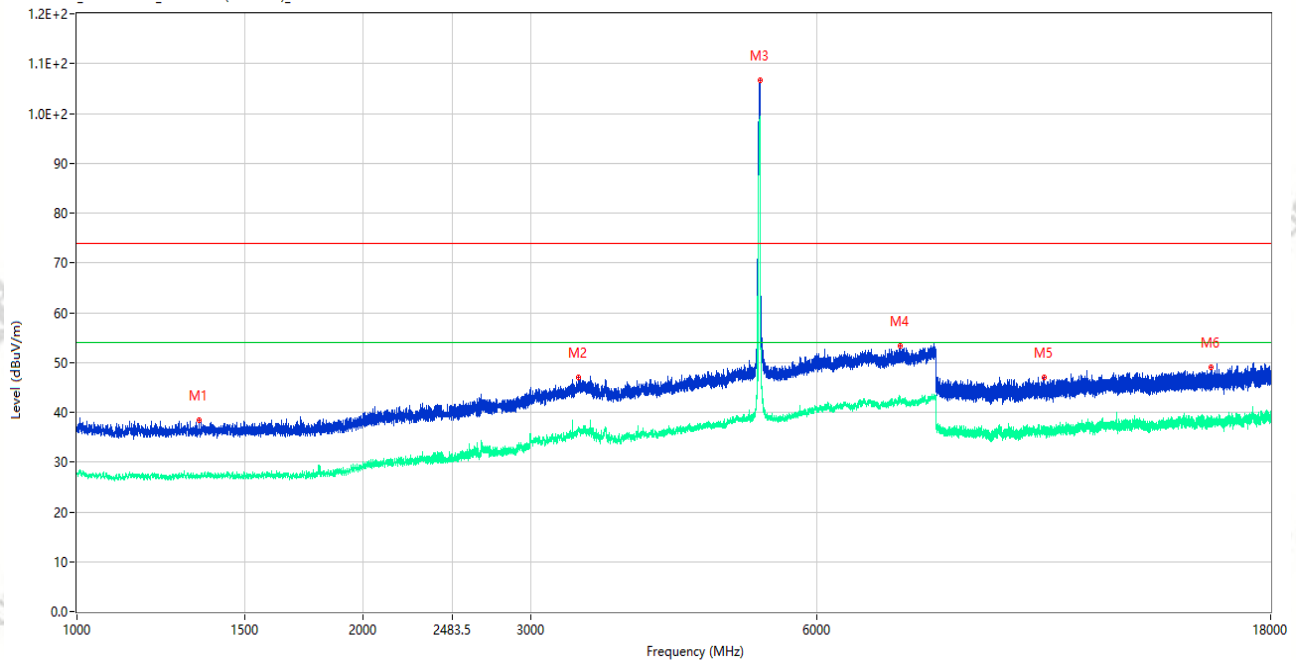

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1344.250	38.31	-16.05	74.0	35.69	Peak	360.00	150	Vertical	Pass
1**	1344.250	27.32	-16.05	54.0	26.68	AV	360.00	150	Vertical	Pass
2	3365.500	46.96	-5.13	74.0	27.04	Peak	288.00	150	Vertical	Pass
2**	3365.500	36.60	-5.13	54.0	17.40	AV	288.00	150	Vertical	Pass
3	5225.000	106.59	-2.35	74.0	-32.59	Peak	11.00	150	Vertical	N/A
3**	5225.000	98.45	-2.35	54.0	-44.45	AV	11.00	150	Vertical	N/A
4	7333.000	53.31	0.98	74.0	20.69	Peak	247.00	150	Vertical	Pass
4**	7333.000	42.78	0.98	54.0	11.22	AV	247.00	150	Vertical	Pass
5	10403.025	47.08	-3.40	74.0	26.92	Peak	216.00	150	Vertical	Pass
5**	10403.025	35.98	-3.40	54.0	18.02	AV	216.00	150	Vertical	Pass
6	15582.113	48.94	-2.22	74.0	25.06	Peak	118.00	150	Vertical	Pass
6**	15582.113	37.89	-2.22	54.0	16.11	AV	118.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_16.11.40

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 22.8

Model Number: SD7 Ultra E

Humidity (%RH): 51

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC


Test Site: 966#2

Test Voltage: 5.2G WIFI 11n40 CH38 P=16.5

Test Engineer: Zhang Mingyue

Remark: 数据线: A13 ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

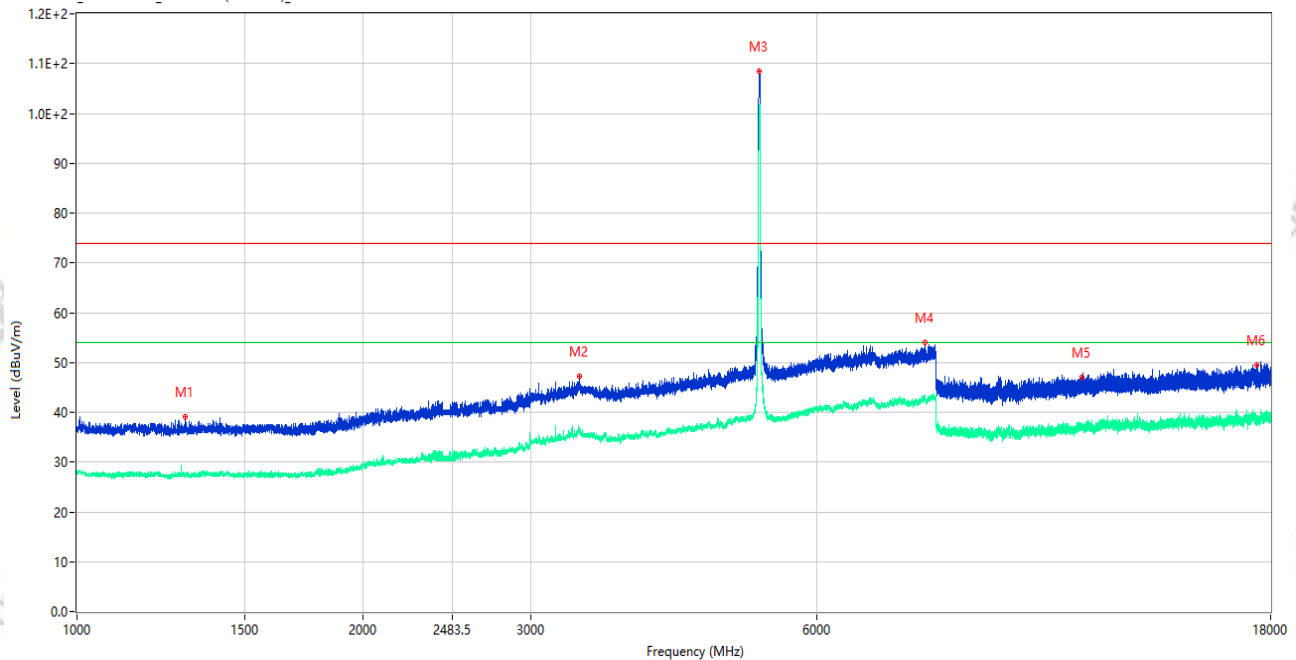

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1300.500	39.13	-15.59	74.0	34.87	Peak	9.00	150	Horizontal	Pass
1**	1300.500	27.31	-15.59	54.0	26.69	AV	9.00	150	Horizontal	Pass
2	3375.500	47.31	-4.84	74.0	26.69	Peak	249.00	150	Horizontal	Pass
2**	3375.500	36.86	-4.84	54.0	17.14	AV	249.00	150	Horizontal	Pass
3	5216.000	108.41	-2.32	74.0	-34.41	Peak	344.00	150	Horizontal	N/A
3**	5216.000	101.64	-2.32	54.0	-47.64	AV	344.00	150	Horizontal	N/A
4	7792.000	53.94	1.63	74.0	20.06	Peak	40.00	150	Horizontal	Pass
4**	7792.000	42.93	1.63	54.0	11.07	AV	40.00	150	Horizontal	Pass
5	11404.325	47.08	-3.41	74.0	26.92	Peak	237.00	150	Horizontal	Pass
5**	11404.325	36.69	-3.41	54.0	17.31	AV	237.00	150	Horizontal	Pass
6	17409.901	49.55	0.29	74.0	24.45	Peak	83.00	150	Horizontal	Pass
6**	17409.901	38.40	0.29	54.0	15.60	AV	83.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_16.20.04

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 22.8

Model Number: SD7 Ultra E

Humidity (%RH): 51

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC


Test Site: 966#2

Test Voltage: 5.2G WIFI 11ac80 CH42 P=16.5

Test Engineer: Zhang Mingyue

Remark: 数据线: A13 ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

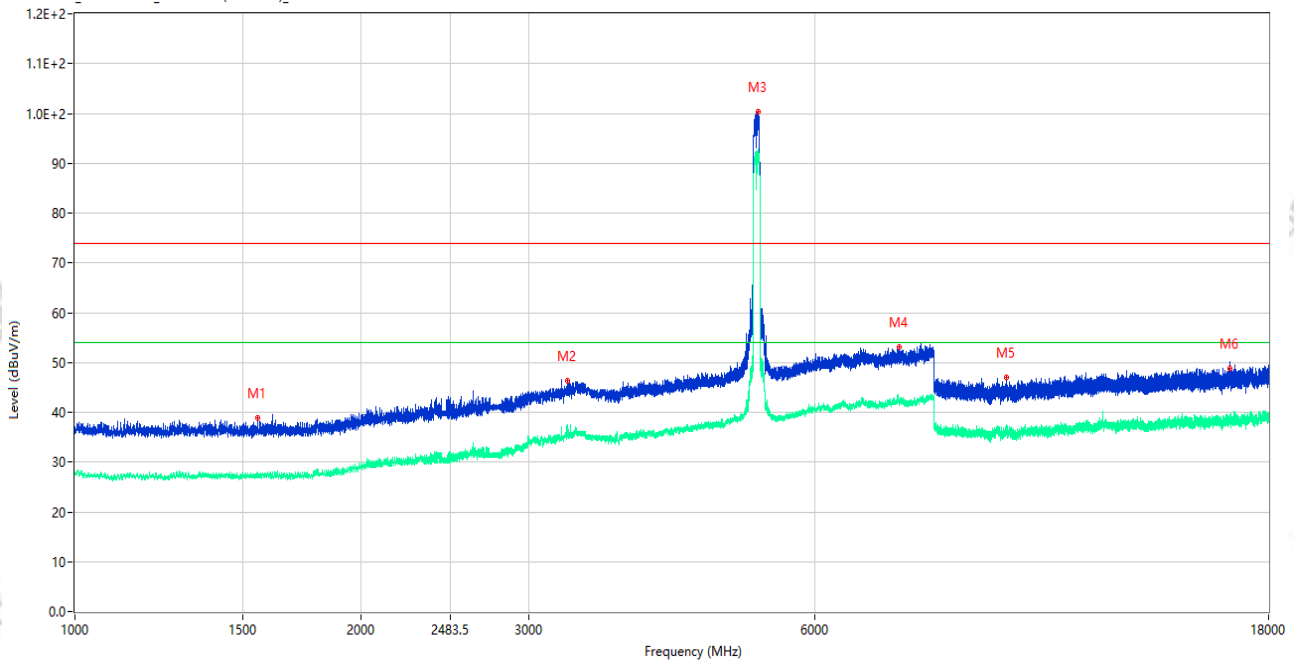

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1557.250	38.80	-16.03	74.0	35.20	Peak	46.00	150	Vertical	Pass
1**	1557.250	27.38	-16.03	54.0	26.62	AV	46.00	150	Vertical	Pass
2	3299.500	46.24	-6.90	74.0	27.76	Peak	118.00	150	Vertical	Pass
2**	3299.500	36.05	-6.90	54.0	17.95	AV	118.00	150	Vertical	Pass
3	5227.500	100.34	-2.32	74.0	-26.34	Peak	4.00	150	Vertical	N/A
3**	5227.500	92.43	-2.32	54.0	-38.43	AV	4.00	150	Vertical	N/A
4	7366.500	53.09	0.78	74.0	20.91	Peak	178.00	150	Vertical	Pass
4**	7366.500	42.44	0.78	54.0	11.56	AV	178.00	150	Vertical	Pass
5	9543.276	46.92	-2.79	74.0	27.08	Peak	99.00	150	Vertical	Pass
5**	9543.276	36.75	-2.79	54.0	17.25	AV	99.00	150	Vertical	Pass
6	16389.562	48.83	-1.36	74.0	25.17	Peak	16.00	150	Vertical	Pass
6**	16389.562	38.80	-1.36	54.0	15.20	AV	16.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_16.16.01

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 22.8

Model Number: SD7 Ultra E

Humidity (%RH): 51

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC


Test Site: 966#2

Test Voltage: 5.2G WIFI 11ac80 CH42 P=16.5

Test Engineer: Zhang Mingyue

Remark: 数据线: A13 ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

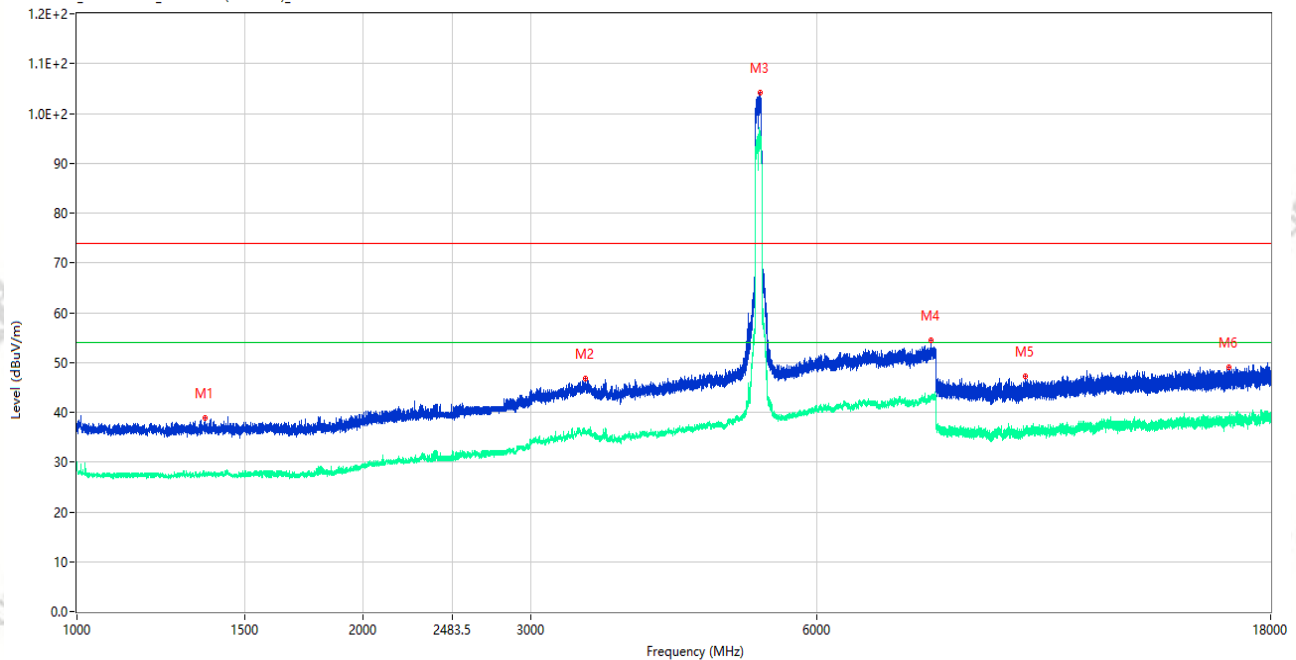

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1363.250	38.89	-15.84	74.0	35.11	Peak	181.00	150	Horizontal	Pass
1**	1363.250	27.58	-15.84	54.0	26.42	AV	181.00	150	Horizontal	Pass
2	3424.000	46.84	-4.92	74.0	27.16	Peak	359.00	150	Horizontal	Pass
2**	3424.000	35.89	-4.92	54.0	18.11	AV	359.00	150	Horizontal	Pass
3	5226.000	104.07	-2.32	74.0	-30.07	Peak	339.00	150	Horizontal	N/A
3**	5226.000	96.36	-2.32	54.0	-42.36	AV	339.00	150	Horizontal	N/A
4	7911.500	54.49	1.69	74.0	19.51	Peak	211.00	150	Horizontal	Pass
4**	7911.500	42.80	1.69	54.0	11.20	AV	211.00	150	Horizontal	Pass
5	9944.412	47.19	-4.08	74.0	26.81	Peak	284.00	150	Horizontal	Pass
5**	9944.412	36.09	-4.08	54.0	17.91	AV	284.00	150	Horizontal	Pass
6	16255.425	49.12	-1.47	74.0	24.88	Peak	48.00	150	Horizontal	Pass
6**	16255.425	38.73	-1.47	54.0	15.27	AV	48.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_16.24.11

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 22.8

Model Number: SD7 Ultra E

Humidity (%RH): 51

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC


Test Site: 966#2

Test Voltage: 5.2G WIFI 11ax20 CH44 P=17.5

Test Engineer: Zhang Mingyue

Remark: 数据线: A13 ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

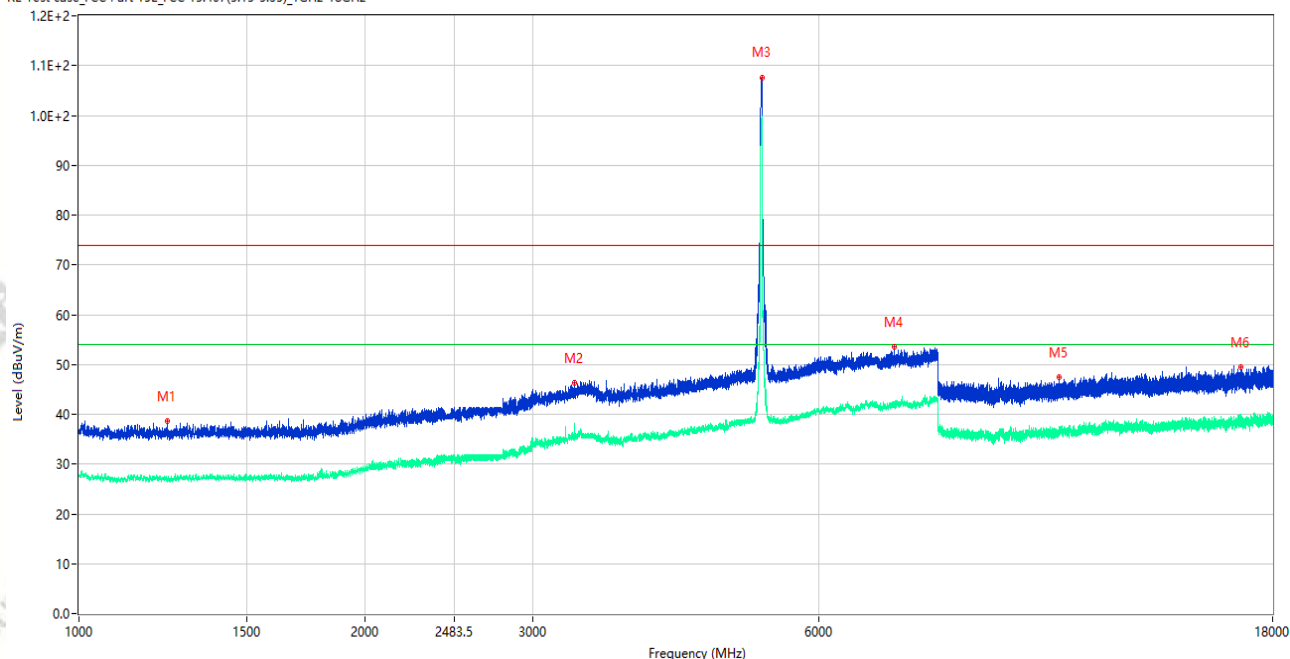

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1239.750	38.59	-16.04	74.0	35.41	Peak	326.00	150	Vertical	Pass
1**	1239.750	26.57	-16.04	54.0	27.43	AV	326.00	150	Vertical	Pass
2	3316.500	46.24	-6.38	74.0	27.76	Peak	4.00	150	Vertical	Pass
2**	3316.500	37.18	-6.38	54.0	16.82	AV	4.00	150	Vertical	Pass
3	5225.000	107.68	-2.35	74.0	-33.68	Peak	345.00	150	Vertical	N/A
3**	5225.000	98.96	-2.35	54.0	-44.96	AV	345.00	150	Vertical	N/A
4	7195.000	53.57	-0.04	74.0	20.43	Peak	297.00	150	Vertical	Pass
4**	7195.000	42.08	-0.04	54.0	11.92	AV	297.00	150	Vertical	Pass
5	10744.313	47.36	-3.56	74.0	26.64	Peak	51.00	150	Vertical	Pass
5**	10744.313	37.37	-3.56	54.0	16.63	AV	51.00	150	Vertical	Pass
6	16663.349	49.53	-1.41	74.0	24.47	Peak	50.00	150	Vertical	Pass
6**	16663.349	38.87	-1.41	54.0	15.13	AV	50.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_16.28.09

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 22.8

Model Number: SD7 Ultra E

Humidity (%RH): 51

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC


Test Site: 966#2

Test Voltage: 5.2G WIFI 11ax20 CH44 P=17.5

Test Engineer: Zhang Mingyue

Remark: 数据线: A13 ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

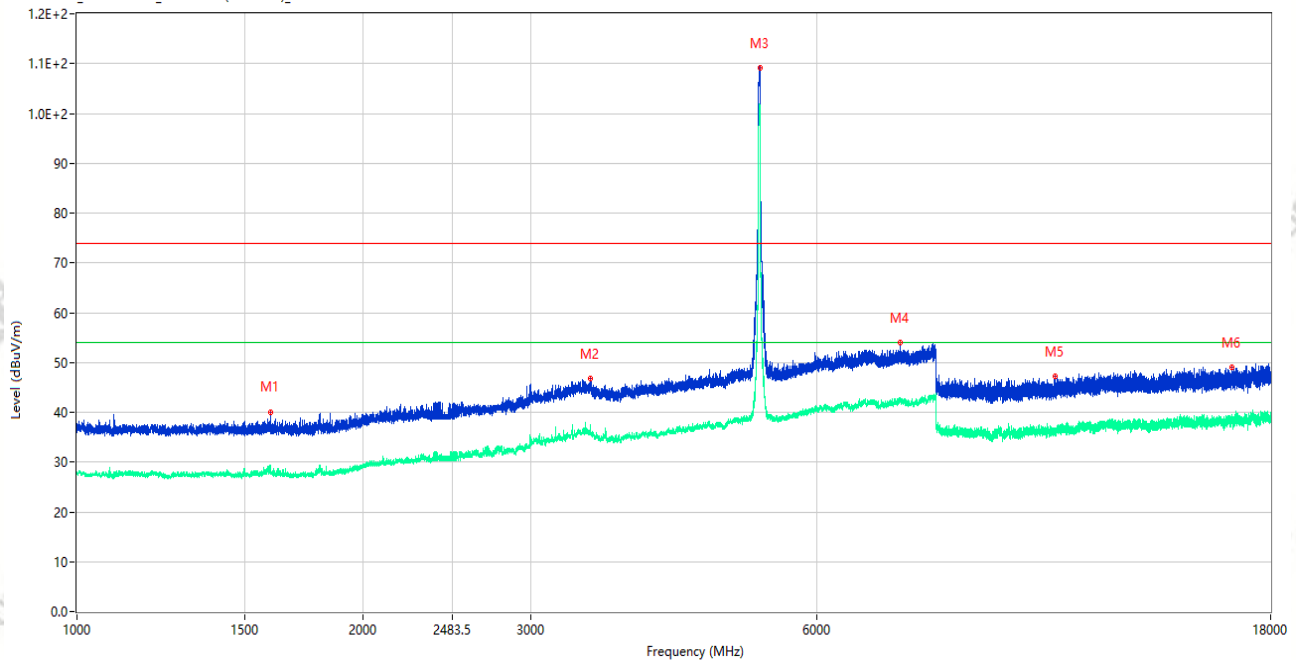

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1599.250	40.11	-16.24	74.0	33.89	Peak	296.00	150	Horizontal	Pass
1**	1599.250	27.60	-16.24	54.0	26.40	AV	296.00	150	Horizontal	Pass
2	3469.500	46.72	-5.48	74.0	27.28	Peak	108.00	150	Horizontal	Pass
2**	3469.500	35.49	-5.48	54.0	18.51	AV	108.00	150	Horizontal	Pass
3	5226.000	109.20	-2.32	74.0	-35.20	Peak	98.00	150	Horizontal	N/A
3**	5226.000	100.98	-2.32	54.0	-46.98	AV	98.00	150	Horizontal	N/A
4	7337.000	53.92	1.08	74.0	20.08	Peak	169.00	150	Horizontal	Pass
4**	7337.000	42.67	1.08	54.0	11.33	AV	169.00	150	Horizontal	Pass
5	10679.238	47.17	-4.17	74.0	26.83	Peak	263.00	150	Horizontal	Pass
5**	10679.238	35.74	-4.17	54.0	18.26	AV	263.00	150	Horizontal	Pass
6	16384.312	49.10	-1.44	74.0	24.90	Peak	115.00	150	Horizontal	Pass
6**	16384.312	38.25	-1.44	54.0	15.75	AV	115.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_16.36.24

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 22.8

Model Number: SD7 Ultra E

Humidity (%RH): 51

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC


Test Site: 966#2

Test Voltage: 5.2G WIFI 11ax80 CH42 P=17.5

Test Engineer: Zhang Mingyue

Remark: 数据线: A13 ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

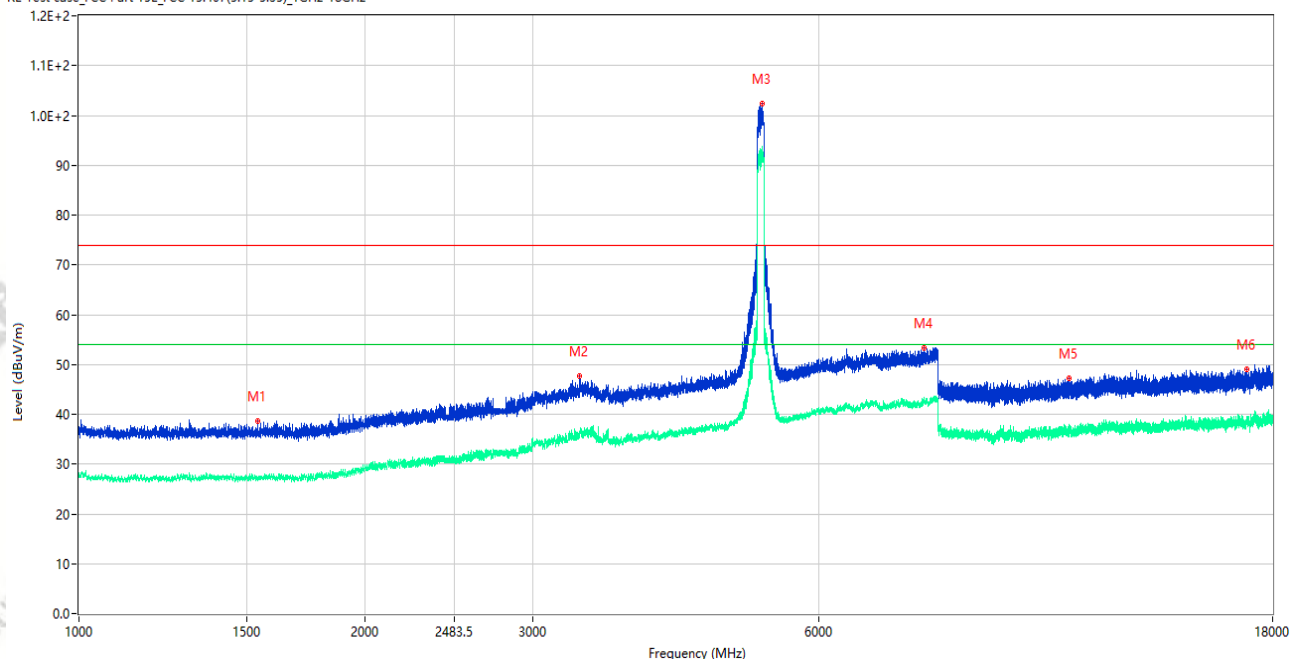

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1541.250	38.71	-16.06	74.0	35.29	Peak	5.00	150	Vertical	Pass
1**	1541.250	27.36	-16.06	54.0	26.64	AV	5.00	150	Vertical	Pass
2	3362.500	47.78	-5.50	74.0	26.22	Peak	315.00	150	Vertical	Pass
2**	3362.500	35.92	-5.50	54.0	18.08	AV	315.00	150	Vertical	Pass
3	5226.000	102.31	-2.32	74.0	-28.31	Peak	5.00	150	Vertical	N/A
3**	5226.000	93.78	-2.32	54.0	-39.78	AV	5.00	150	Vertical	N/A
4	7733.000	53.35	1.08	74.0	20.65	Peak	359.00	150	Vertical	Pass
4**	7733.000	42.62	1.08	54.0	11.38	AV	359.00	150	Vertical	Pass
5	11005.325	47.13	-3.03	74.0	26.87	Peak	309.00	150	Vertical	Pass
5**	11005.325	37.08	-3.03	54.0	16.92	AV	309.00	150	Vertical	Pass
6	16892.250	49.10	-0.45	74.0	24.90	Peak	217.00	150	Vertical	Pass
6**	16892.250	38.84	-0.45	54.0	15.16	AV	217.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_16.32.25

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 22.8

Model Number: SD7 Ultra E

Humidity (%RH): 51

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC


Test Site: 966#2

Test Voltage: 5.2G WIFI 11ax80 CH42 P=17.5

Test Engineer: Zhang Mingyue

Remark: 数据线: A13 ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

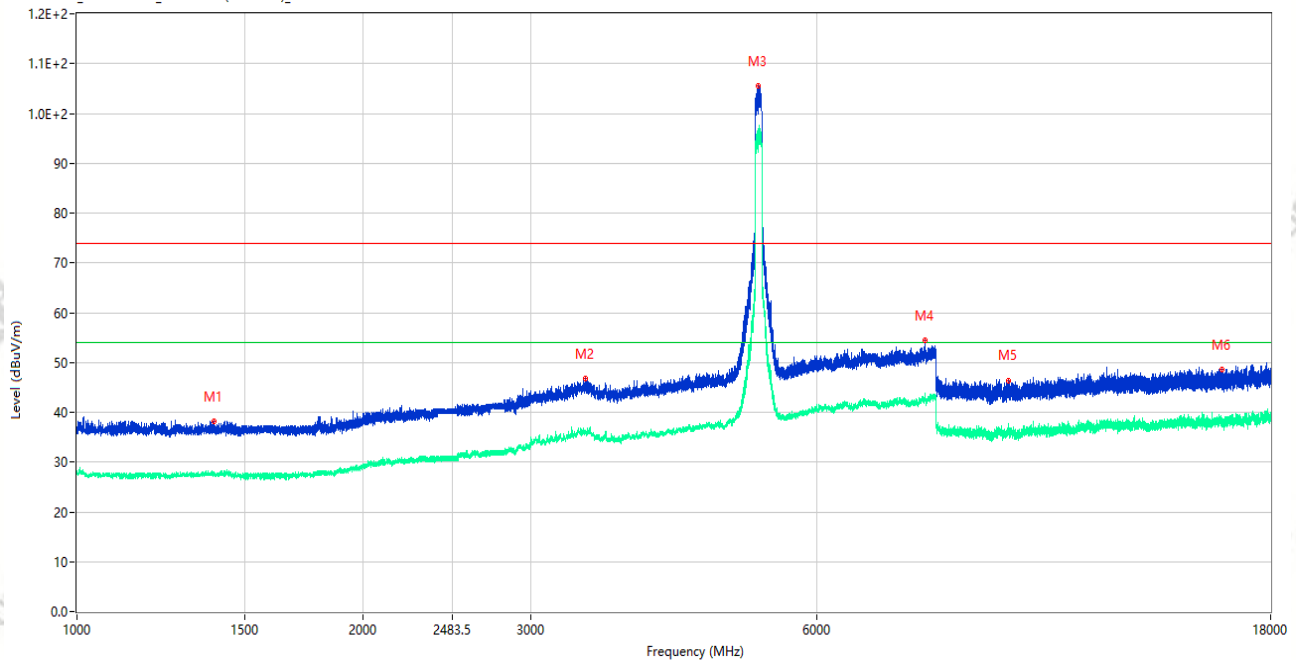

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1392.000	38.09	-16.00	74.0	35.91	Peak	360.00	150	Horizontal	Pass
1**	1392.000	28.04	-16.00	54.0	25.96	AV	360.00	150	Horizontal	Pass
2	3428.000	46.72	-4.91	74.0	27.28	Peak	197.00	150	Horizontal	Pass
2**	3428.000	36.11	-4.91	54.0	17.89	AV	197.00	150	Horizontal	Pass
3	5204.000	105.58	-2.41	74.0	-31.58	Peak	118.00	150	Horizontal	N/A
3**	5204.000	96.18	-2.41	54.0	-42.18	AV	118.00	150	Horizontal	N/A
4	7791.500	54.36	1.62	74.0	19.64	Peak	168.00	150	Horizontal	Pass
4**	7791.500	42.96	1.62	54.0	11.04	AV	168.00	150	Horizontal	Pass
5	9548.026	46.42	-2.54	74.0	27.58	Peak	355.00	150	Horizontal	Pass
5**	9548.026	35.98	-2.54	54.0	18.02	AV	355.00	150	Horizontal	Pass
6	16014.975	48.69	-2.34	74.0	25.31	Peak	186.00	150	Horizontal	Pass
6**	16014.975	37.90	-2.34	54.0	16.10	AV	186.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-19_17.12.34

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E


Work Mode: Normal working Link(5G WIFI)

Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Liu Yabo

Remark: 数据线: A13 ANT1

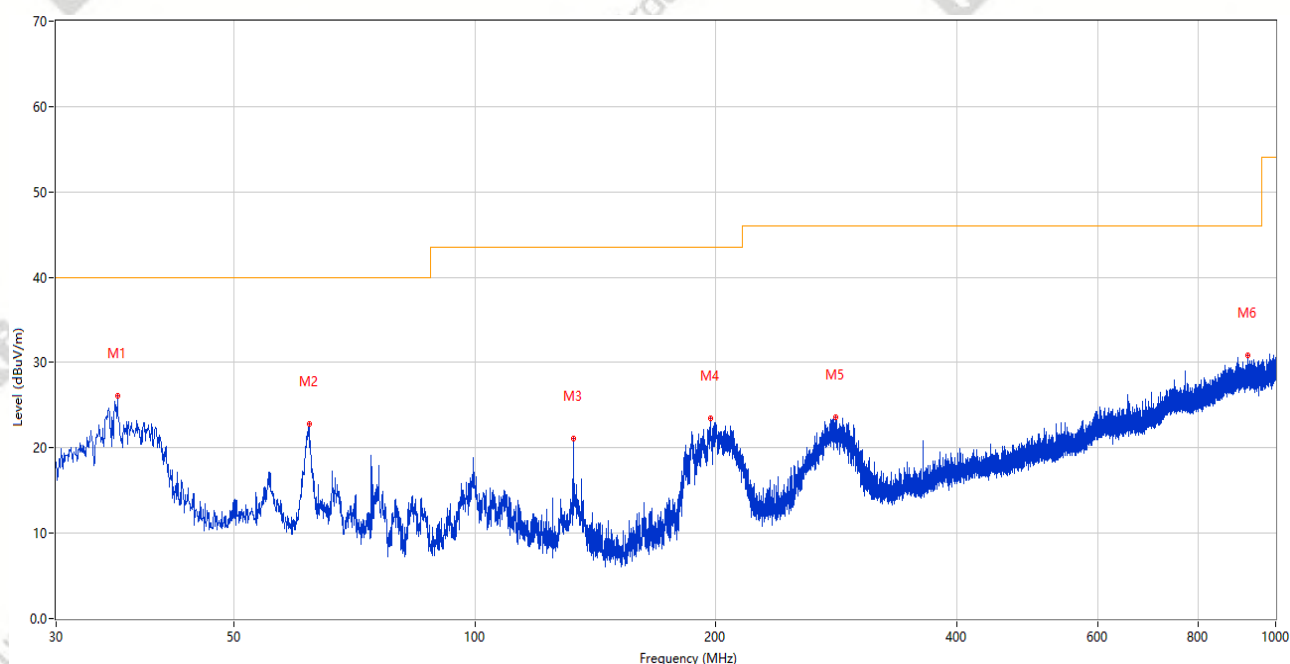

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	35.772	26.07	-27.48	40.0	13.93	Peak	217.00	100	Vertical	Pass
2	62.059	22.78	-26.52	40.0	17.22	Peak	49.00	200	Vertical	Pass
3	132.723	21.10	-29.20	43.5	22.40	Peak	193.00	200	Vertical	Pass
4	196.937	23.52	-25.55	43.5	19.98	Peak	360.00	200	Vertical	Pass
5	282.491	23.64	-23.52	46.0	22.36	Peak	284.00	200	Vertical	Pass
6	923.758	30.88	-9.02	46.0	15.12	Peak	340.00	100	Vertical	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-19_17.07.27

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E


Work Mode: Normal working Link(5G WIFI)

Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Liu Yabo

Remark: 数据线: A13 ANT1

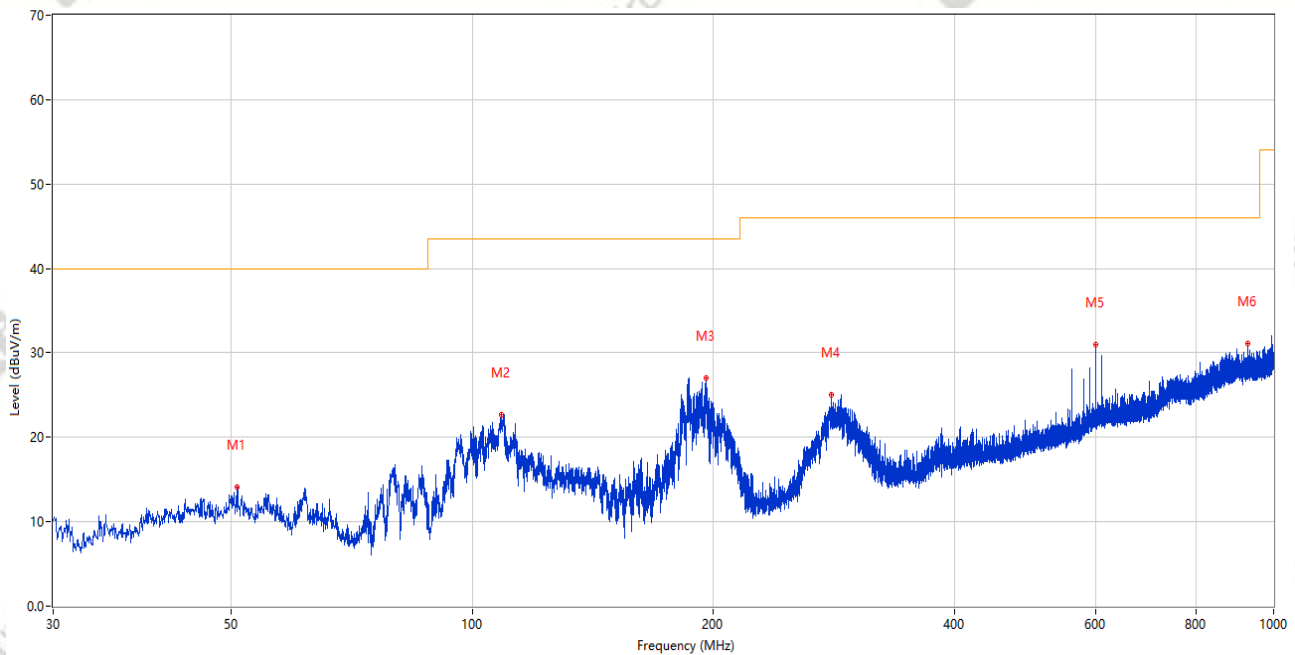

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	50.952	14.13	-24.59	40.0	25.87	Peak	271.00	200	Horizontal	Pass
2	108.861	22.71	-26.52	43.5	20.79	Peak	360.00	200	Horizontal	Pass
3	196.064	27.04	-25.50	43.5	16.46	Peak	307.00	100	Horizontal	Pass
4	280.745	25.09	-23.63	46.0	20.91	Peak	360.00	200	Horizontal	Pass
5	600.020	30.99	-14.90	46.0	15.01	Peak	325.00	100	Horizontal	Pass
6	928.414	31.16	-8.89	46.0	14.84	Peak	163.00	200	Horizontal	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_18.53.42

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 22.8

Model Number: SD7 Ultra E

Humidity (%RH): 51

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC


Test Site: 966#2

Test Voltage: 5.3G WIFI 11a CH60 P=17.5

Test Engineer: Zhang Mingyue

Remark: 数据线: A13 ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

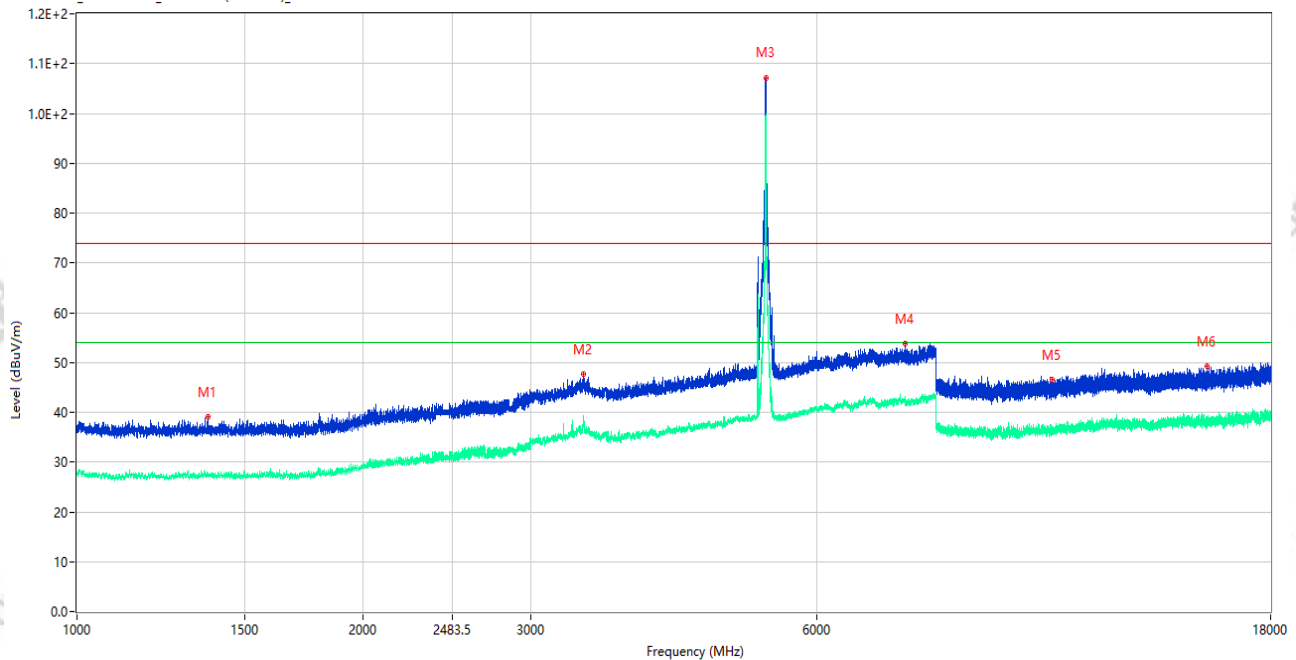

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1372.500	39.08	-15.96	74.0	34.92	Peak	0.00	150	Vertical	Pass
1**	1372.500	27.75	-15.96	54.0	26.25	AV	0.00	150	Vertical	Pass
2	3408.000	47.77	-5.34	74.0	26.23	Peak	223.00	150	Vertical	Pass
2**	3408.000	39.29	-5.34	54.0	14.71	AV	223.00	150	Vertical	Pass
3	5303.000	107.22	-2.03	74.0	-33.22	Peak	280.00	150	Vertical	N/A
3**	5303.000	97.33	-2.03	54.0	-43.33	AV	280.00	150	Vertical	N/A
4	7422.000	53.78	1.03	74.0	20.22	Peak	174.00	150	Vertical	Pass
4**	7422.000	42.08	1.03	54.0	11.92	AV	174.00	150	Vertical	Pass
5	10605.850	46.56	-3.64	74.0	27.44	Peak	0.00	150	Vertical	Pass
5**	10605.850	35.96	-3.64	54.0	18.04	AV	0.00	150	Vertical	Pass
6	15448.500	49.30	-1.85	74.0	24.70	Peak	360.00	150	Vertical	Pass
6**	15448.500	38.70	-1.85	54.0	15.30	AV	360.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_18.49.46

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 22.8

Model Number: SD7 Ultra E

Humidity (%RH): 51

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC


Test Site: 966#2

Test Voltage: 5.3G WIFI 11a CH60 P=17.5

Test Engineer: Zhang Mingyue

Remark: 数据线: A13 ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

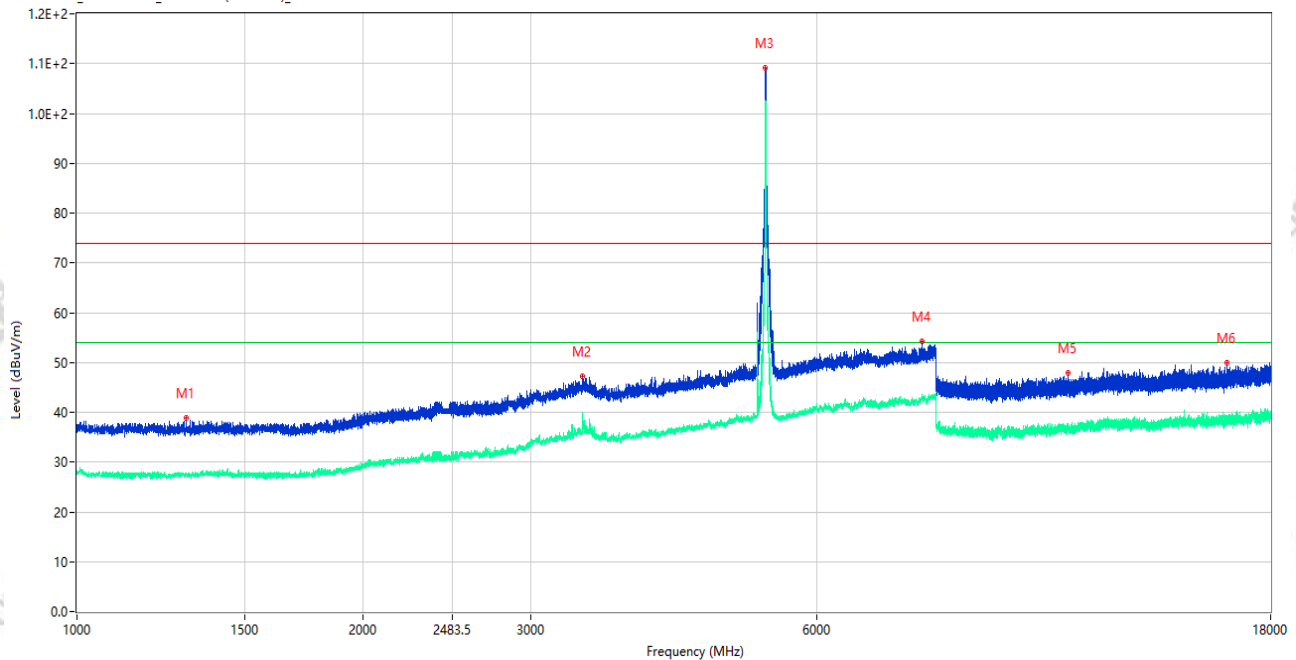

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1303.500	38.98	-15.59	74.0	35.02	Peak	111.00	150	Horizontal	Pass
1**	1303.500	27.66	-15.59	54.0	26.34	AV	111.00	150	Horizontal	Pass
2	3402.000	47.30	-5.58	74.0	26.70	Peak	1.00	150	Horizontal	Pass
2**	3402.000	39.32	-5.58	54.0	14.68	AV	1.00	150	Horizontal	Pass
3	5293.000	109.14	-1.96	74.0	-35.14	Peak	106.00	150	Horizontal	N/A
3**	5293.000	102.08	-1.96	54.0	-48.08	AV	106.00	150	Horizontal	N/A
4	7730.500	54.21	0.92	74.0	19.79	Peak	163.00	150	Horizontal	Pass
4**	7730.500	42.65	0.92	54.0	11.35	AV	163.00	150	Horizontal	Pass
5	11027.888	47.88	-3.05	74.0	26.12	Peak	0.00	150	Horizontal	Pass
5**	11027.888	36.71	-3.05	54.0	17.29	AV	0.00	150	Horizontal	Pass
6	16174.838	49.87	-0.99	74.0	24.13	Peak	107.00	150	Horizontal	Pass
6**	16174.838	38.70	-0.99	54.0	15.30	AV	107.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_18.57.53

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 22.8

Model Number: SD7 Ultra E

Humidity (%RH): 51

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC


Test Site: 966#2

Test Voltage: 5.3G WIFI 11n20 CH60 P=16.5

Test Engineer: Zhang Mingyue

Remark: 数据线: A13 ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

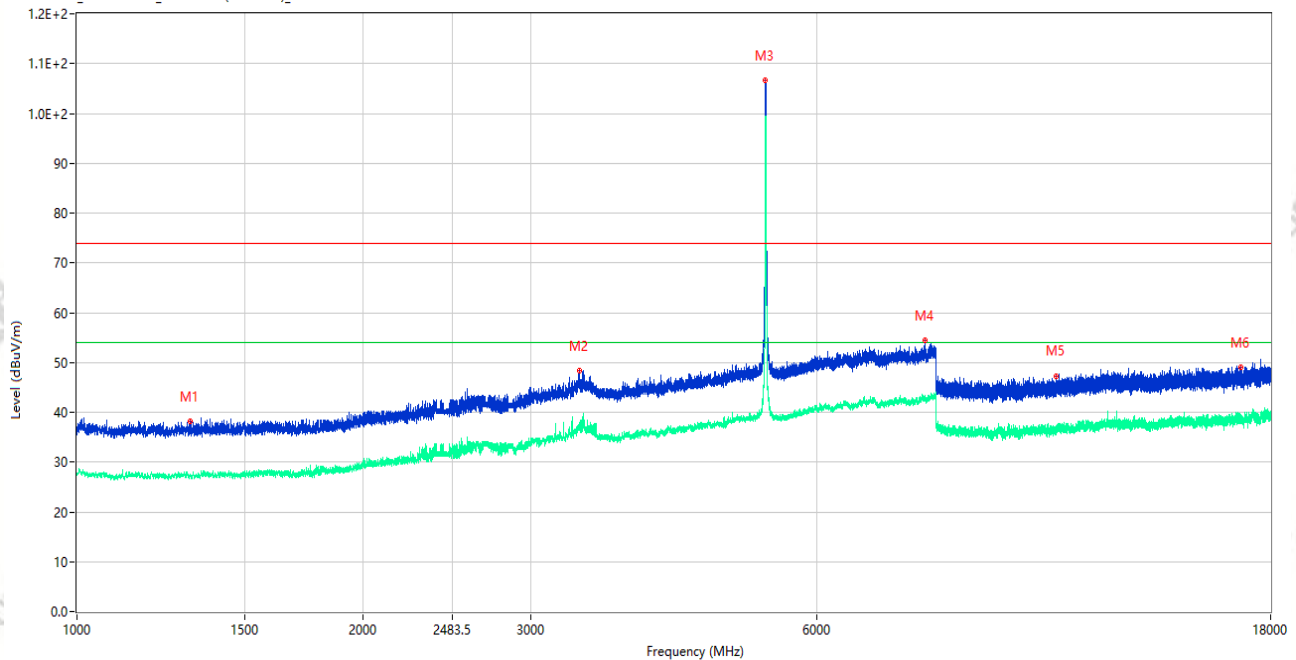

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1314.250	38.24	-15.87	74.0	35.76	Peak	207.00	150	Vertical	Pass
1**	1314.250	27.49	-15.87	54.0	26.51	AV	207.00	150	Vertical	Pass
2	3375.500	48.39	-4.84	74.0	25.61	Peak	291.00	150	Vertical	Pass
2**	3375.500	36.70	-4.84	54.0	17.30	AV	291.00	150	Vertical	Pass
3	5298.500	105.59	-2.03	74.0	-31.59	Peak	350.00	150	Vertical	N/A
3**	5298.500	98.49	-2.03	54.0	-44.49	AV	350.00	150	Vertical	N/A
4	7798.000	54.43	1.67	74.0	19.57	Peak	176.00	150	Vertical	Pass
4**	7798.000	43.21	1.67	54.0	10.79	AV	176.00	150	Vertical	Pass
5	10710.112	47.33	-3.99	74.0	26.67	Peak	0.00	150	Vertical	Pass
5**	10710.112	35.91	-3.99	54.0	18.09	AV	0.00	150	Vertical	Pass
6	16742.625	49.09	-1.87	74.0	24.91	Peak	360.00	150	Vertical	Pass
6**	16742.625	37.78	-1.87	54.0	16.22	AV	360.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_19.01.50

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 22.8

Model Number: SD7 Ultra E

Humidity (%RH): 51

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC


Test Site: 966#2

Test Voltage: 5.3G WIFI 11n20 CH60 P=16.5

Test Engineer: Zhang Mingyue

Remark: 数据线: A13 ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

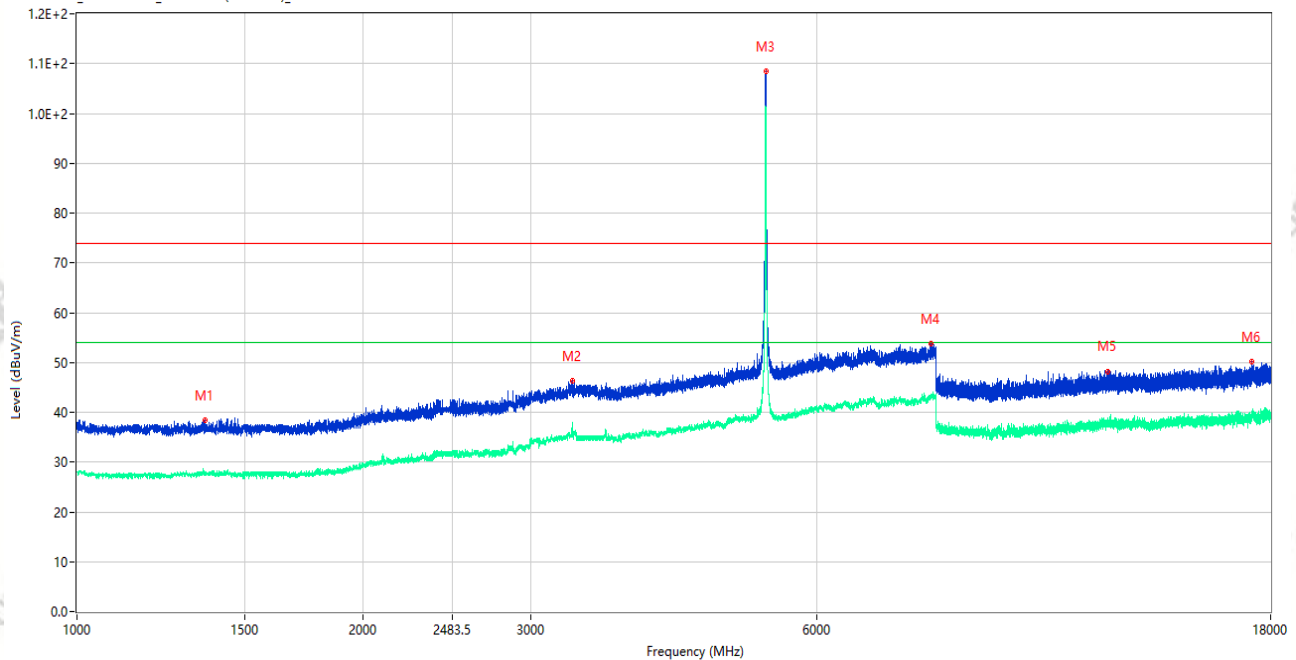

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1363.500	38.36	-15.85	74.0	35.64	Peak	3.00	150	Horizontal	Pass
1**	1363.500	27.97	-15.85	54.0	26.03	AV	3.00	150	Horizontal	Pass
2	3316.000	46.28	-6.39	74.0	27.72	Peak	283.00	150	Horizontal	Pass
2**	3316.000	35.88	-6.39	54.0	18.12	AV	283.00	150	Horizontal	Pass
3	5305.000	108.53	-2.03	74.0	-34.53	Peak	340.00	150	Horizontal	N/A
3**	5305.000	100.79	-2.03	54.0	-46.79	AV	340.00	150	Horizontal	N/A
4	7911.000	53.83	1.67	74.0	20.17	Peak	252.00	150	Horizontal	Pass
4**	7911.000	42.76	1.67	54.0	11.24	AV	252.00	150	Horizontal	Pass
5	12145.325	48.23	-2.97	74.0	25.77	Peak	121.00	150	Horizontal	Pass
5**	12145.325	37.40	-2.97	54.0	16.60	AV	121.00	150	Horizontal	Pass
6	17186.775	50.15	0.15	74.0	23.85	Peak	211.00	150	Horizontal	Pass
6**	17186.775	39.11	0.15	54.0	14.89	AV	211.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-28_16.28.23

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.6

Model Number: SD7 Ultra E

Humidity (%RH): 50

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 5.3G WIFI 11n40 CH54 P=16.5


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Liu Yabo

Remark: 数据线: A13

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

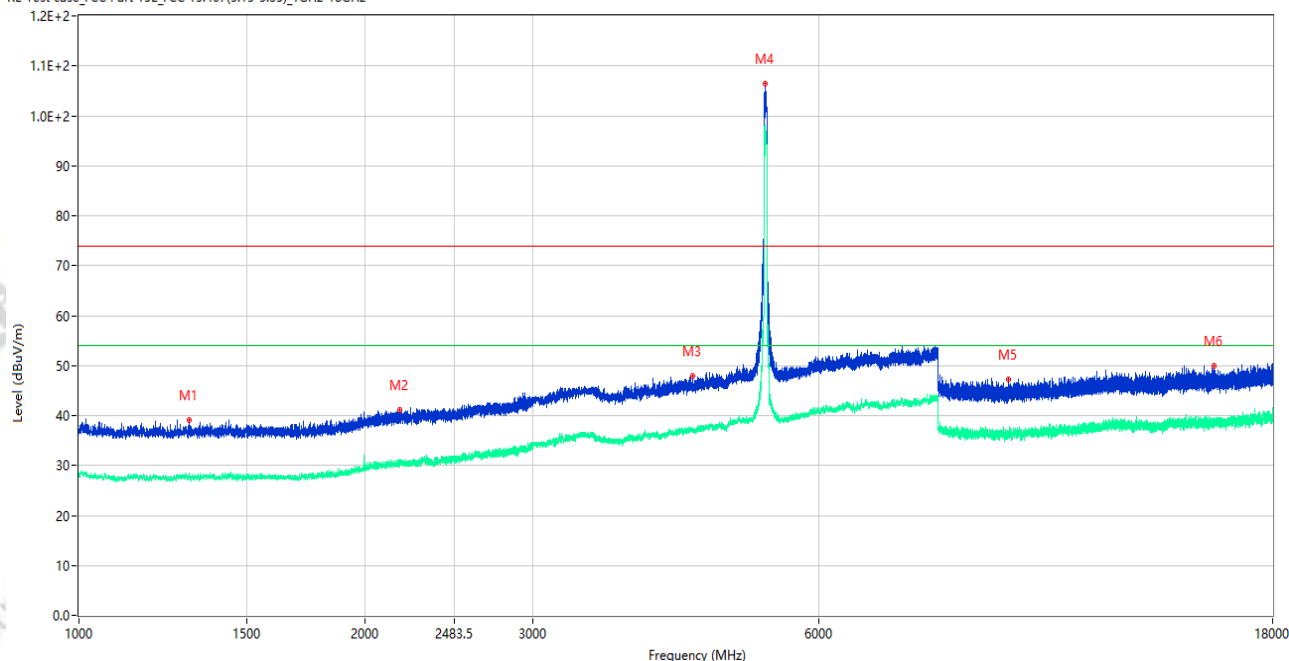

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1306.750	39.09	-15.64	74.0	34.91	Peak	246.00	150	Vertical	Pass
1**	1306.750	27.76	-15.64	54.0	26.24	AV	246.00	150	Vertical	Pass
2	2175.500	41.13	-12.92	74.0	32.87	Peak	308.00	150	Vertical	Pass
2**	2175.500	30.51	-12.92	54.0	23.49	AV	308.00	150	Vertical	Pass
3	4423.000	47.91	-2.87	74.0	26.09	Peak	123.00	150	Vertical	Pass
3**	4423.000	37.03	-2.87	54.0	16.97	AV	123.00	150	Vertical	Pass
4	5261.500	106.40	-2.20	74.0	-32.40	Peak	34.00	150	Vertical	N/A
4**	5261.500	97.96	-2.20	54.0	-43.96	AV	34.00	150	Vertical	N/A
5	9496.250	47.20	-3.62	74.0	26.80	Peak	28.00	150	Vertical	Pass
5**	9496.250	35.71	-3.62	54.0	18.29	AV	28.00	150	Vertical	Pass
6	15625.687	49.96	-1.57	74.0	24.04	Peak	360.00	150	Vertical	Pass
6**	15625.687	38.63	-1.57	54.0	15.37	AV	360.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-28_16.24.17

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.6

Model Number: SD7 Ultra E

Humidity (%RH): 50

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 5.3G WIFI 11n40 CH54 P=16.5


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Liu Yabo

Remark: 数据线: A13

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

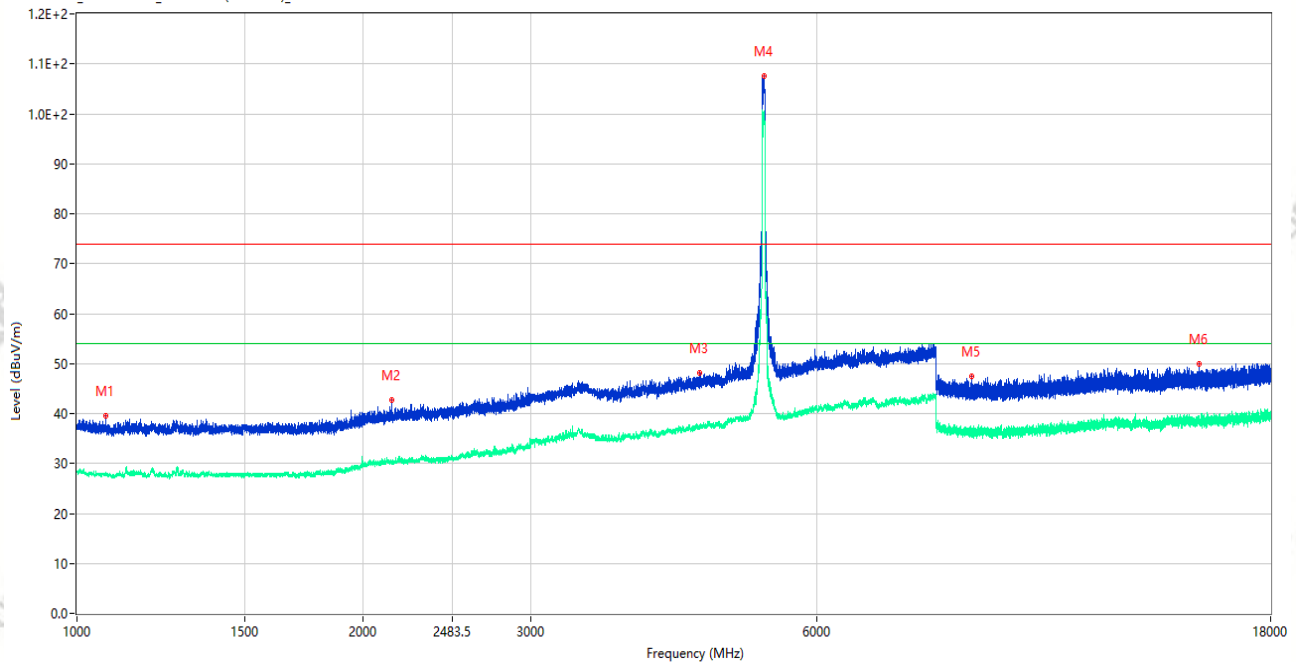

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1073.000	39.54	-15.26	74.0	34.46	Peak	3.00	150	Horizontal	Pass
1**	1073.000	28.34	-15.26	54.0	25.66	AV	3.00	150	Horizontal	Pass
2	2141.750	42.62	-13.83	74.0	31.38	Peak	69.00	150	Horizontal	Pass
2**	2141.750	30.08	-13.83	54.0	23.92	AV	69.00	150	Horizontal	Pass
3	4520.000	48.20	-2.78	74.0	25.80	Peak	75.00	150	Horizontal	Pass
3**	4520.000	37.18	-2.78	54.0	16.82	AV	75.00	150	Horizontal	Pass
4	5281.500	107.60	-2.26	74.0	-33.60	Peak	252.00	150	Horizontal	N/A
4**	5281.500	100.52	-2.26	54.0	-46.52	AV	252.00	150	Horizontal	N/A
5	8723.425	47.51	-5.21	74.0	26.49	Peak	7.00	150	Horizontal	Pass
5**	8723.425	36.78	-5.21	54.0	17.22	AV	7.00	150	Horizontal	Pass
6	15131.924	49.92	-2.35	74.0	24.08	Peak	41.00	150	Horizontal	Pass
6**	15131.924	38.47	-2.35	54.0	15.53	AV	41.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_19.14.26

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 22.8

Model Number: SD7 Ultra E

Humidity (%RH): 51

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC


Test Site: 966#2

Test Voltage: 5.3G WIFI 11ac80 CH58 P=16.5

Test Engineer: Zhang Mingyue

Remark: 数据线: A13 ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

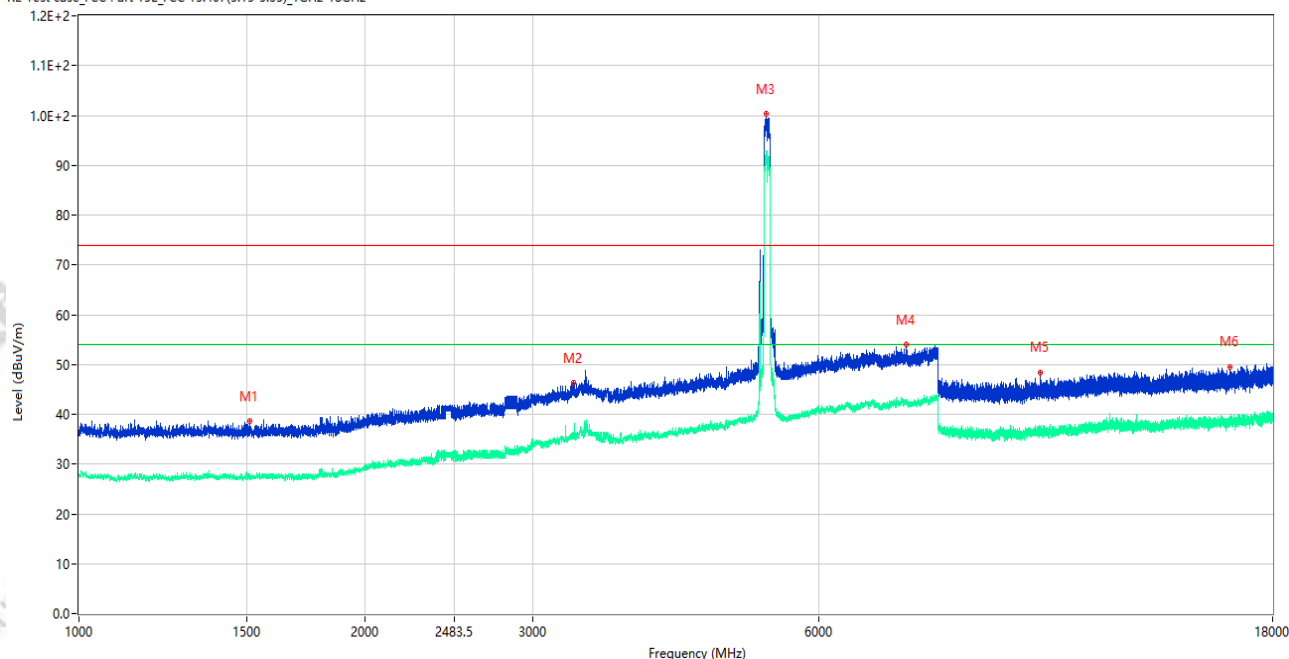

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1510.750	38.70	-16.07	74.0	35.30	Peak	282.00	150	Vertical	Pass
1**	1510.750	27.72	-16.07	54.0	26.28	AV	282.00	150	Vertical	Pass
2	3314.500	46.24	-6.45	74.0	27.76	Peak	162.00	150	Vertical	Pass
2**	3314.500	35.86	-6.45	54.0	18.14	AV	162.00	150	Vertical	Pass
3	5277.500	100.24	-2.36	74.0	-26.24	Peak	35.00	150	Vertical	N/A
3**	5277.500	92.02	-2.36	54.0	-38.02	AV	35.00	150	Vertical	N/A
4	7419.000	53.92	0.97	74.0	20.08	Peak	271.00	150	Vertical	Pass
4**	7419.000	42.68	0.97	54.0	11.32	AV	271.00	150	Vertical	Pass
5	10260.763	48.45	-3.16	74.0	25.55	Peak	0.00	150	Vertical	Pass
5**	10260.763	36.88	-3.16	54.0	17.12	AV	0.00	150	Vertical	Pass
6	16238.099	49.58	-1.17	74.0	24.42	Peak	312.00	150	Vertical	Pass
6**	16238.099	39.49	-1.17	54.0	14.51	AV	312.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_19.19.50

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 22.8

Model Number: SD7 Ultra E

Humidity (%RH): 51

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC


Test Site: 966#2

Test Voltage: 5.3G WIFI 11ac80 CH58 P=16.5

Test Engineer: Zhang Mingyue

Remark: 数据线: A13 ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

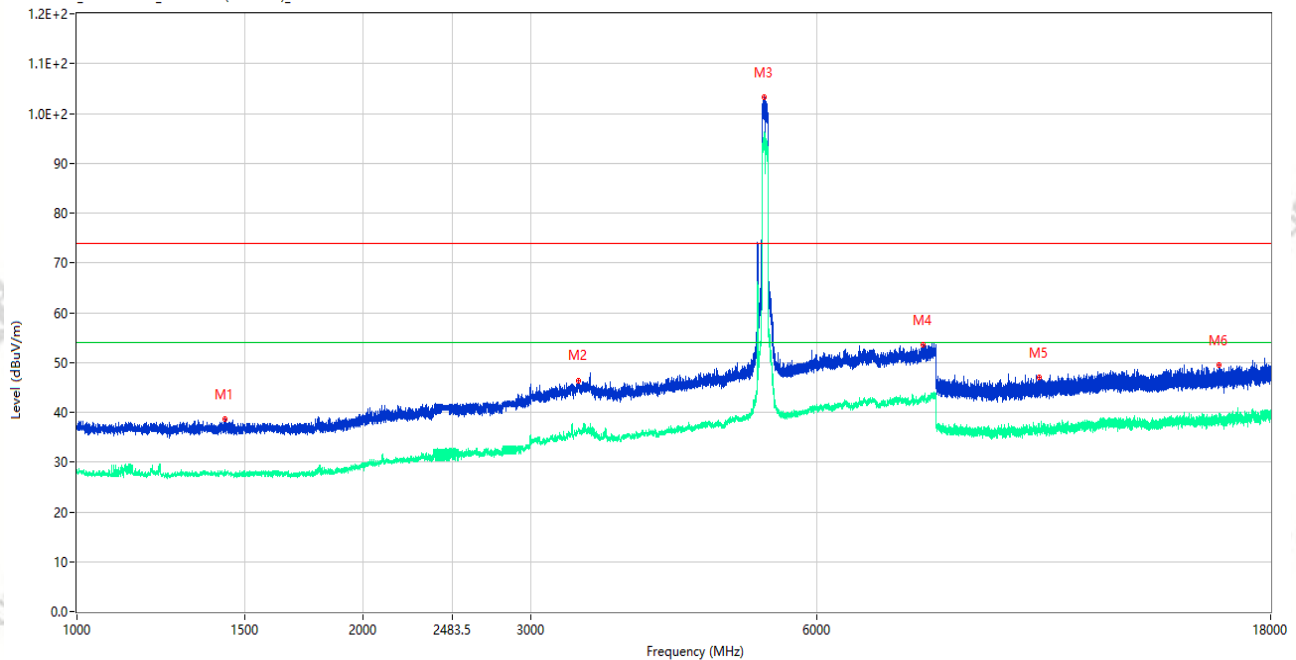

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1431.250	38.67	-15.99	74.0	35.33	Peak	87.00	150	Horizontal	Pass
1**	1431.250	27.68	-15.99	54.0	26.32	AV	87.00	150	Horizontal	Pass
2	3364.500	46.42	-5.23	74.0	27.58	Peak	360.00	150	Horizontal	Pass
2**	3364.500	36.06	-5.23	54.0	17.94	AV	360.00	150	Horizontal	Pass
3	5284.500	103.30	-2.16	74.0	-29.30	Peak	332.00	150	Horizontal	N/A
3**	5284.500	95.36	-2.16	54.0	-41.36	AV	332.00	150	Horizontal	N/A
4	7765.000	53.46	1.32	74.0	20.54	Peak	360.00	150	Horizontal	Pass
4**	7765.000	42.53	1.32	54.0	11.47	AV	360.00	150	Horizontal	Pass
5	10275.013	46.92	-3.20	74.0	27.08	Peak	5.00	150	Horizontal	Pass
5**	10275.013	36.01	-3.20	54.0	17.99	AV	5.00	150	Horizontal	Pass
6	15892.650	49.47	-1.58	74.0	24.53	Peak	178.00	150	Horizontal	Pass
6**	15892.650	39.13	-1.58	54.0	14.87	AV	178.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_19.30.33

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 22.8

Model Number: SD7 Ultra E

Humidity (%RH): 51

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC

Test Site: 966#2


Test Voltage: 5.3G WIFI 11ac160 CH50

P=16.5

Test Engineer: Zhang Mingyue

Remark: 数据线: A13 ANT1

RE Test case FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

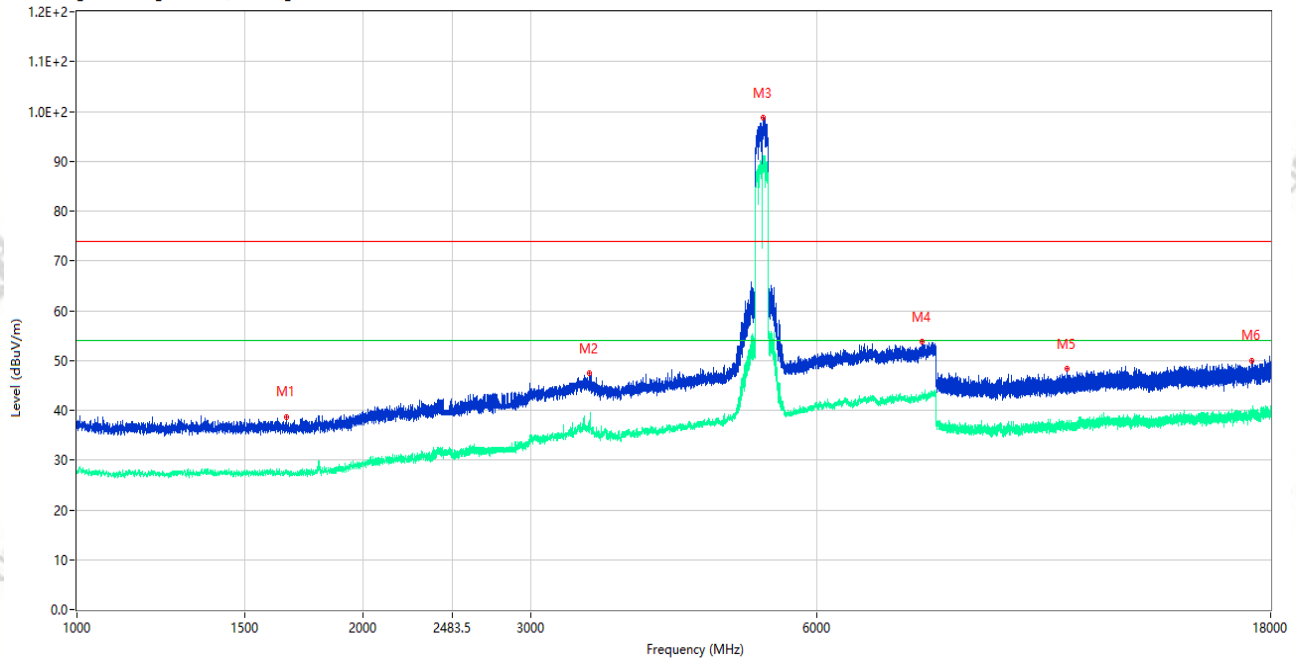

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1660.000	38.76	-16.20	74.0	35.24	Peak	342.00	150	Vertical	Pass
1**	1660.000	28.04	-16.20	54.0	25.96	AV	342.00	150	Vertical	Pass
2	3459.000	47.37	-4.94	74.0	26.63	Peak	133.00	150	Vertical	Pass
2**	3459.000	36.84	-4.94	54.0	17.16	AV	133.00	150	Vertical	Pass
3	5268.000	98.70	-2.42	74.0	-24.70	Peak	35.00	150	Vertical	N/A
3**	5268.000	90.22	-2.42	54.0	-36.22	AV	35.00	150	Vertical	N/A
4	7737.500	53.83	1.29	74.0	20.17	Peak	3.00	150	Vertical	Pass
4**	7737.500	42.99	1.29	54.0	11.01	AV	3.00	150	Vertical	Pass
5	11006.987	48.33	-3.07	74.0	25.67	Peak	192.00	150	Vertical	Pass
5**	11006.987	37.29	-3.07	54.0	16.71	AV	192.00	150	Vertical	Pass
6	17205.938	50.05	0.14	74.0	23.95	Peak	246.00	150	Vertical	Pass
6**	17205.938	39.54	0.14	54.0	14.46	AV	246.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_19.24.37

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 22.8

Model Number: SD7 Ultra E

Humidity (%RH): 51

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC

Test Site: 966#2


Test Voltage: 5.3G WIFI 11ac160 CH50

P=16.5

Test Engineer: Zhang Mingyue

Remark: 数据线: A13 ANT1

RE Test case FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

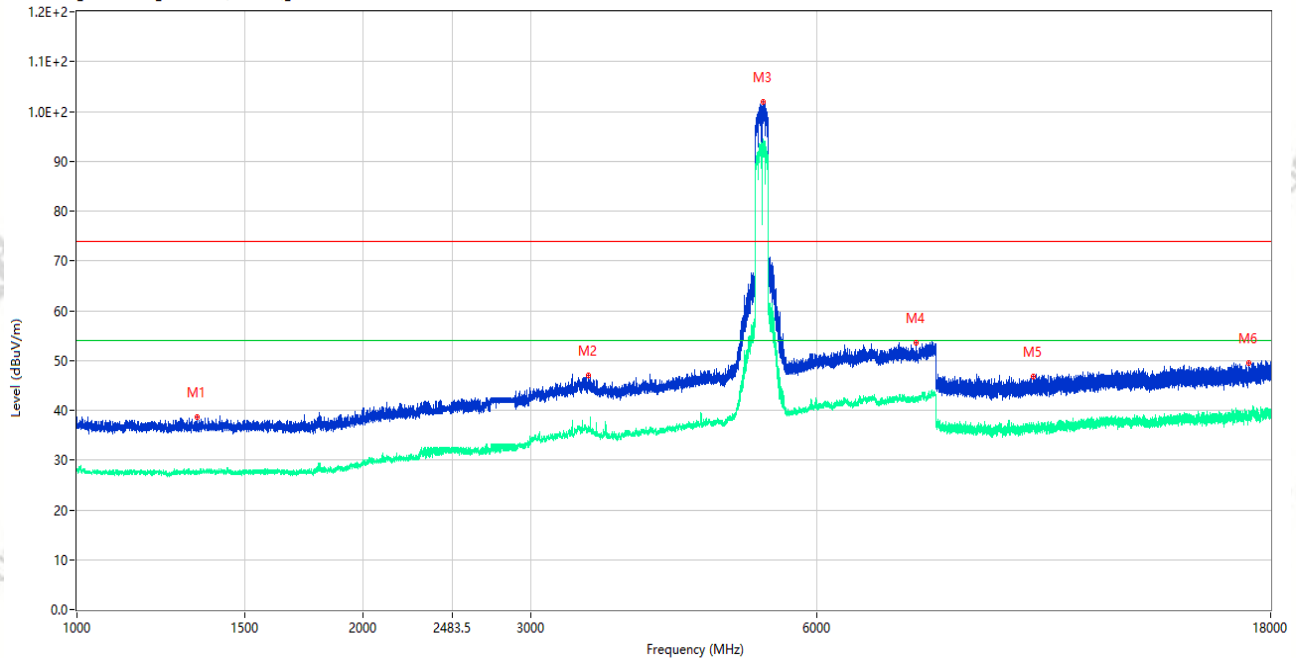

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1338.500	38.60	-16.09	74.0	35.40	Peak	350.00	150	Horizontal	Pass
1**	1338.500	27.29	-16.09	54.0	26.71	AV	350.00	150	Horizontal	Pass
2	3452.500	46.91	-4.95	74.0	27.09	Peak	96.00	150	Horizontal	Pass
2**	3452.500	35.94	-4.95	54.0	18.06	AV	96.00	150	Horizontal	Pass
3	5265.000	101.87	-2.37	74.0	-27.87	Peak	331.00	150	Horizontal	N/A
3**	5265.000	93.68	-2.37	54.0	-39.68	AV	331.00	150	Horizontal	N/A
4	7626.000	53.47	0.62	74.0	20.53	Peak	68.00	150	Horizontal	Pass
4**	7626.000	42.63	0.62	54.0	11.37	AV	68.00	150	Horizontal	Pass
5	10124.200	46.69	-4.07	74.0	27.31	Peak	0.00	150	Horizontal	Pass
5**	10124.200	36.69	-4.07	54.0	17.31	AV	0.00	150	Horizontal	Pass
6	17086.762	49.45	-0.90	74.0	24.55	Peak	345.00	150	Horizontal	Pass
6**	17086.762	38.73	-0.90	54.0	15.27	AV	345.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_19.34.49

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 22.8

Model Number: SD7 Ultra E

Humidity (%RH): 51

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC


Test Site: 966#2

Test Voltage: 5.3G WIFI 11ax20 CH60 P=17.5

Test Engineer: Zhang Mingyue

Remark: 数据线: A13 ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

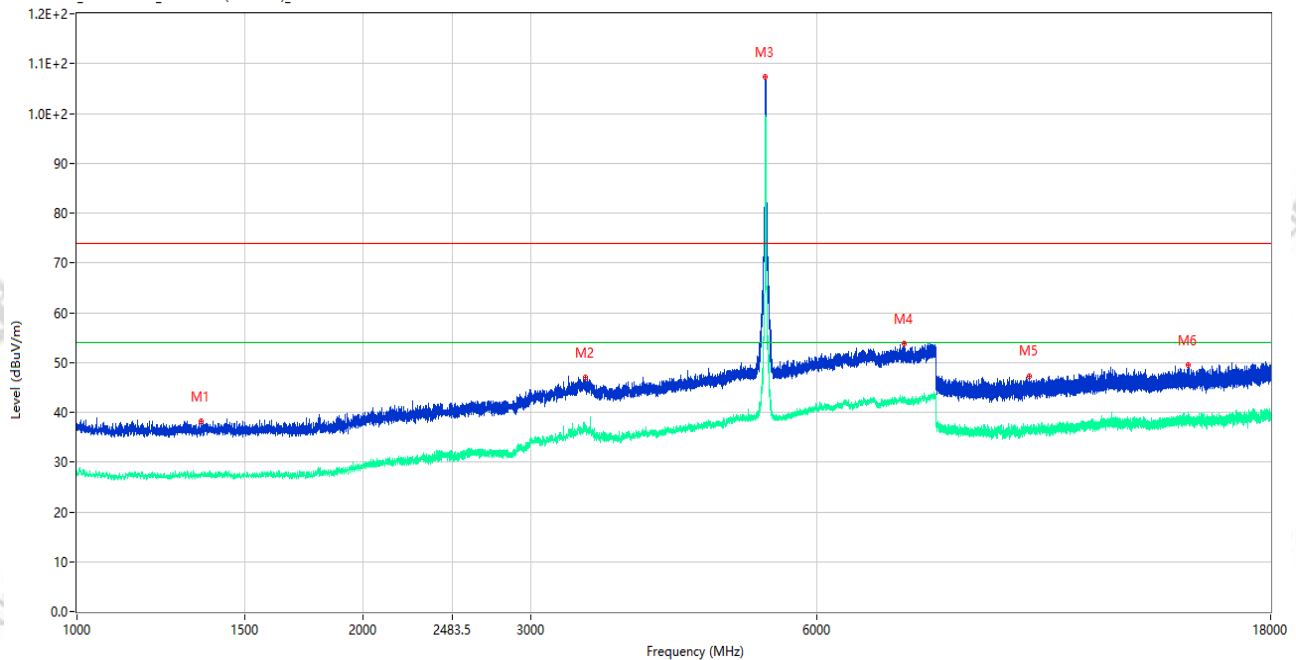

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1352.000	38.22	-15.91	74.0	35.78	Peak	83.00	150	Vertical	Pass
1**	1352.000	27.65	-15.91	54.0	26.35	AV	83.00	150	Vertical	Pass
2	3421.500	46.92	-4.93	74.0	27.08	Peak	4.00	150	Vertical	Pass
2**	3421.500	36.95	-4.93	54.0	17.05	AV	4.00	150	Vertical	Pass
3	5296.000	107.26	-2.00	74.0	-33.26	Peak	105.00	150	Vertical	N/A
3**	5296.000	98.63	-2.00	54.0	-44.63	AV	105.00	150	Vertical	N/A
4	7413.500	53.77	0.74	74.0	20.23	Peak	261.00	150	Vertical	Pass
4**	7413.500	42.45	0.74	54.0	11.55	AV	261.00	150	Vertical	Pass
5	10041.075	47.34	-3.97	74.0	26.66	Peak	51.00	150	Vertical	Pass
5**	10041.075	36.44	-3.97	54.0	17.56	AV	51.00	150	Vertical	Pass
6	14758.651	49.46	-1.67	74.0	24.54	Peak	246.00	150	Vertical	Pass
6**	14758.651	38.44	-1.67	54.0	15.56	AV	246.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_19.39.14

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 22.8

Model Number: SD7 Ultra E

Humidity (%RH): 51

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC


Test Site: 966#2

Test Voltage: 5.3G WIFI 11ax20 CH60 P=17.5

Test Engineer: Zhang Mingyue

Remark: 数据线: A13 ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

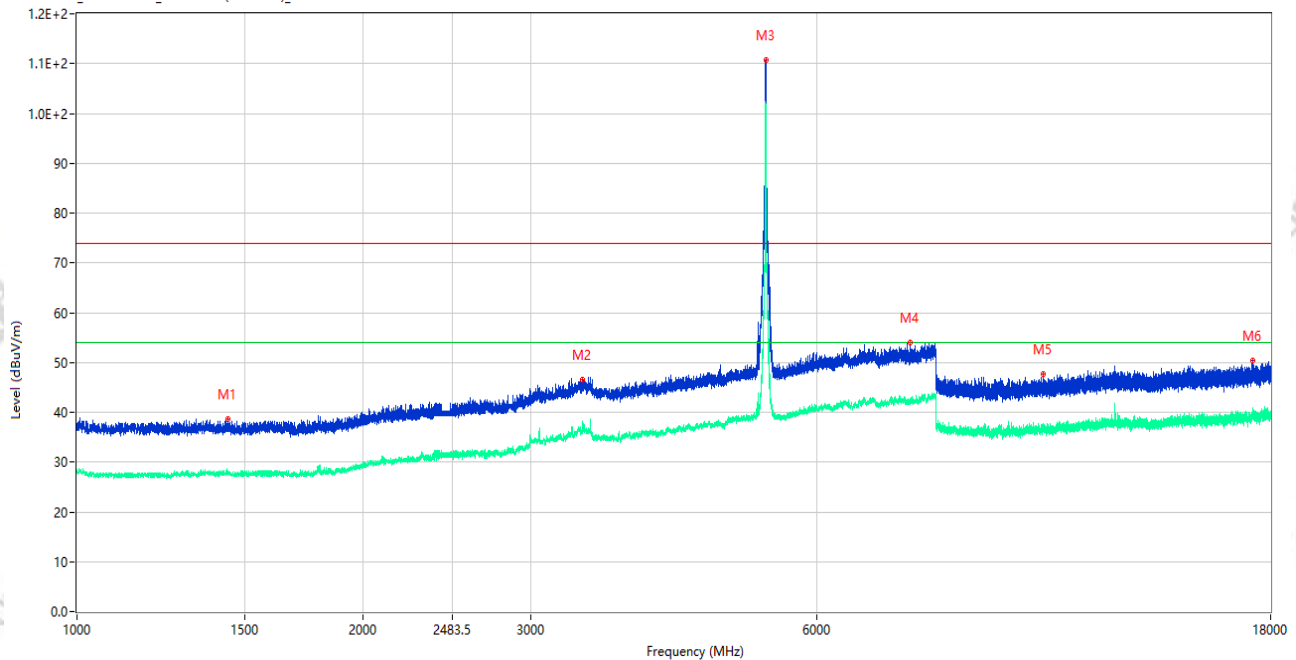

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1440.000	38.61	-15.95	74.0	35.39	Peak	152.00	150	Horizontal	Pass
1**	1440.000	28.03	-15.95	54.0	25.97	AV	152.00	150	Horizontal	Pass
2	3403.000	46.30	-5.54	74.0	27.70	Peak	360.00	150	Horizontal	Pass
2**	3403.000	36.73	-5.54	54.0	17.27	AV	360.00	150	Horizontal	Pass
3	5304.000	110.71	-2.02	74.0	-36.71	Peak	331.00	150	Horizontal	N/A
3**	5304.000	101.57	-2.02	54.0	-47.57	AV	331.00	150	Horizontal	N/A
4	7524.000	54.06	0.56	74.0	19.94	Peak	74.00	150	Horizontal	Pass
4**	7524.000	42.67	0.56	54.0	11.33	AV	74.00	150	Horizontal	Pass
5	10369.776	47.58	-3.38	74.0	26.42	Peak	0.00	150	Horizontal	Pass
5**	10369.776	36.57	-3.38	54.0	17.43	AV	0.00	150	Horizontal	Pass
6	17250.824	50.42	-0.61	74.0	23.58	Peak	360.00	150	Horizontal	Pass
6**	17250.824	39.68	-0.61	54.0	14.32	AV	360.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-28_16.14.42

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.6

Model Number: SD7 Ultra E

Humidity (%RH): 50

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 5.3G WIFI 11ax40 CH54 P=17.5


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Liu Yabo

Remark: 数据线: A13

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

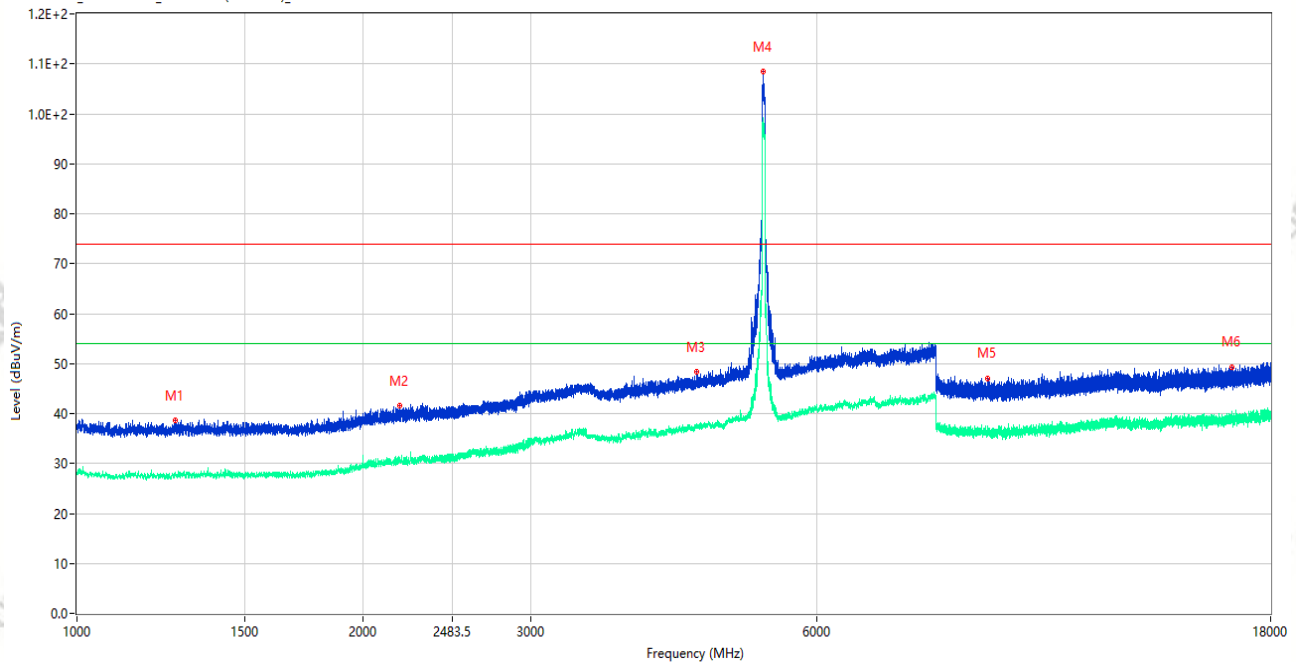

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1269.250	38.67	-15.91	74.0	35.33	Peak	221.00	150	Vertical	Pass
1**	1269.250	27.97	-15.91	54.0	26.03	AV	221.00	150	Vertical	Pass
2	2182.750	41.62	-13.03	74.0	32.38	Peak	197.00	150	Vertical	Pass
2**	2182.750	30.71	-13.03	54.0	23.29	AV	197.00	150	Vertical	Pass
3	4483.500	48.27	-3.50	74.0	25.73	Peak	360.00	150	Vertical	Pass
3**	4483.500	37.38	-3.50	54.0	16.62	AV	360.00	150	Vertical	Pass
4	5263.000	108.45	-2.26	74.0	-34.45	Peak	34.00	150	Vertical	N/A
4**	5263.000	98.68	-2.26	54.0	-44.68	AV	34.00	150	Vertical	N/A
5	9071.126	47.10	-4.58	74.0	26.90	Peak	309.00	150	Vertical	Pass
5**	9071.126	36.59	-4.58	54.0	17.41	AV	309.00	150	Vertical	Pass
6	16393.762	49.36	-1.09	74.0	24.64	Peak	178.00	150	Vertical	Pass
6**	16393.762	39.57	-1.09	54.0	14.43	AV	178.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-28_16.19.00

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.6

Model Number: SD7 Ultra E

Humidity (%RH): 50

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 5.3G WIFI 11ax40 CH54 P=17.5


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Liu Yabo

Remark: 数据线: A13

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

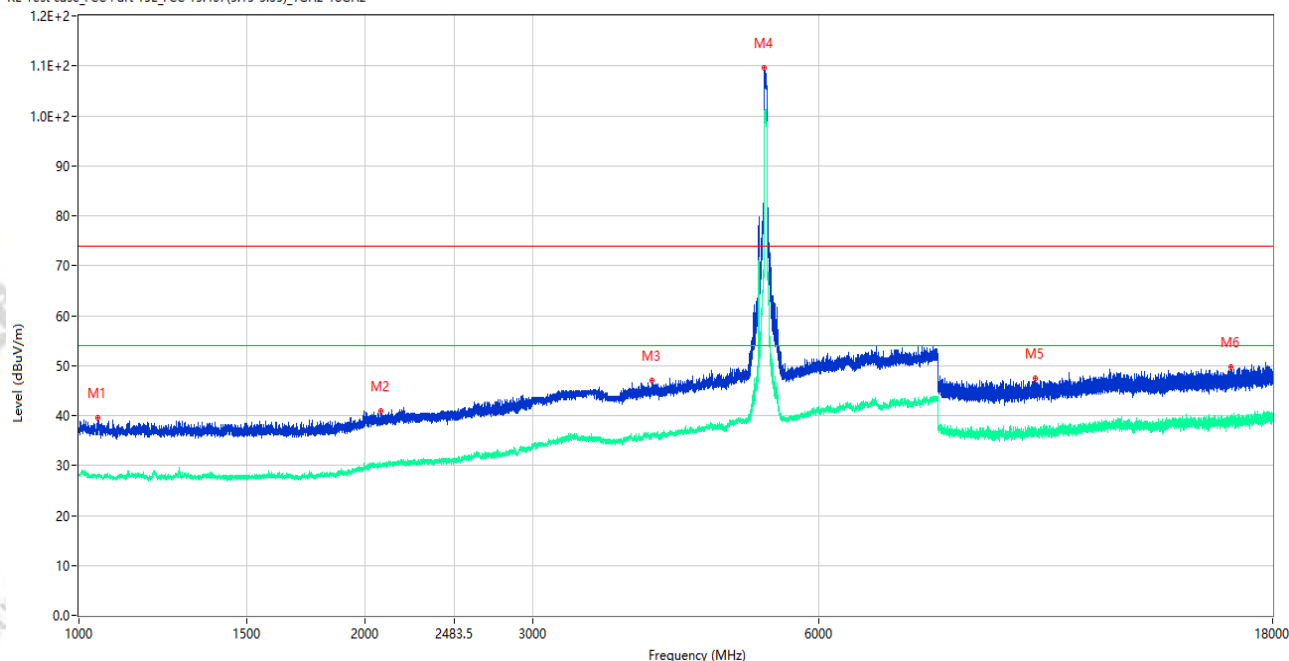

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1047.000	39.45	-15.39	74.0	34.55	Peak	186.00	150	Horizontal	Pass
1**	1047.000	27.89	-15.39	54.0	26.11	AV	186.00	150	Horizontal	Pass
2	2076.500	40.85	-13.77	74.0	33.15	Peak	66.00	150	Horizontal	Pass
2**	2076.500	29.76	-13.77	54.0	24.24	AV	66.00	150	Horizontal	Pass
3	4005.000	46.95	-4.77	74.0	27.05	Peak	360.00	150	Horizontal	Pass
3**	4005.000	35.57	-4.77	54.0	18.43	AV	360.00	150	Horizontal	Pass
4	5260.000	109.63	-2.16	74.0	-35.63	Peak	245.00	150	Horizontal	N/A
4**	5260.000	100.20	-2.16	54.0	-46.20	AV	245.00	150	Horizontal	N/A
5	10121.588	47.39	-4.03	74.0	26.61	Peak	0.00	150	Horizontal	Pass
5**	10121.588	37.67	-4.03	54.0	16.33	AV	0.00	150	Horizontal	Pass
6	16283.513	49.74	-1.47	74.0	24.26	Peak	360.00	150	Horizontal	Pass
6**	16283.513	39.21	-1.47	54.0	14.79	AV	360.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_19.47.52

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 22.8

Model Number: SD7 Ultra E

Humidity (%RH): 51

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC


Test Site: 966#2

Test Voltage: 5.3G WIFI 11ax80 CH58 P=17.5

Test Engineer: Zhang Mingyue

Remark: 数据线: A13 ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

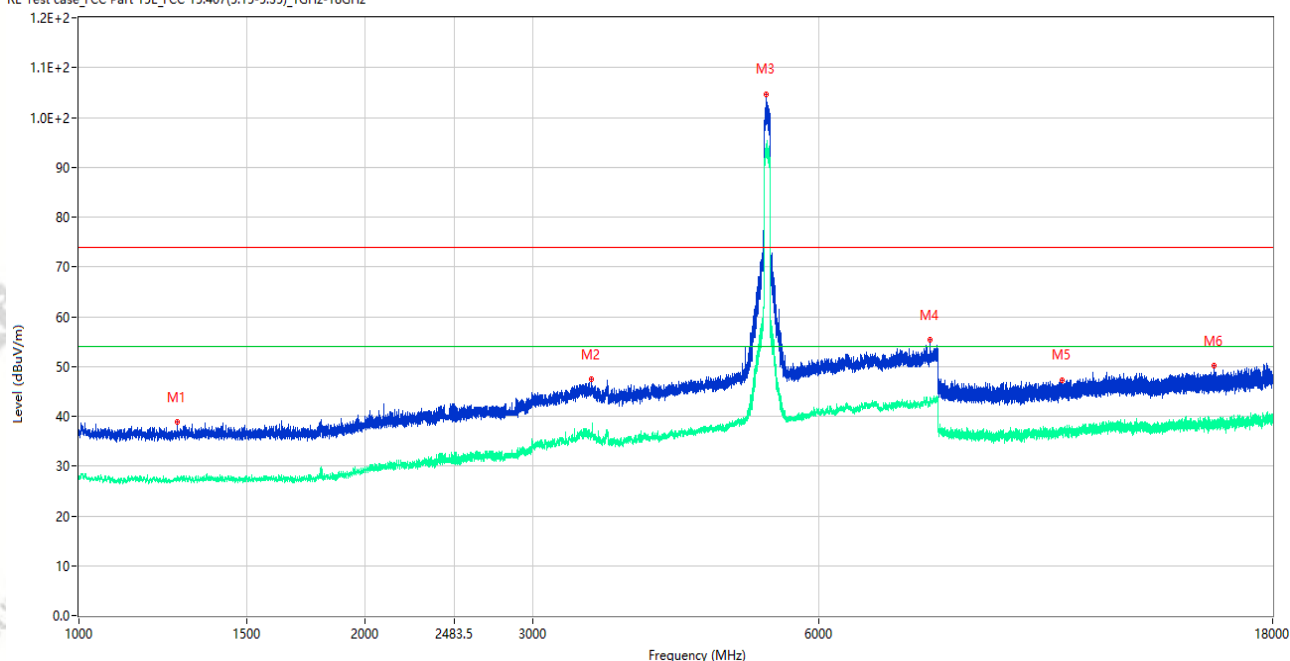

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1269.000	38.87	-15.91	74.0	35.13	Peak	347.00	150	Vertical	Pass
1**	1269.000	27.79	-15.91	54.0	26.21	AV	347.00	150	Vertical	Pass
2	3461.500	47.49	-5.00	74.0	26.51	Peak	28.00	150	Vertical	Pass
2**	3461.500	36.35	-5.00	54.0	17.65	AV	28.00	150	Vertical	Pass
3	5284.500	104.74	-2.16	74.0	-30.74	Peak	148.00	150	Vertical	N/A
3**	5284.500	92.55	-2.16	54.0	-38.55	AV	148.00	150	Vertical	N/A
4	7860.000	55.33	1.64	74.0	18.67	Peak	206.00	150	Vertical	Pass
4**	7860.000	42.61	1.64	54.0	11.39	AV	206.00	150	Vertical	Pass
5	10802.263	47.34	-3.27	74.0	26.66	Peak	50.00	150	Vertical	Pass
5**	10802.263	36.98	-3.27	54.0	17.02	AV	50.00	150	Vertical	Pass
6	15633.037	50.08	-1.84	74.0	23.92	Peak	360.00	150	Vertical	Pass
6**	15633.037	38.39	-1.84	54.0	15.61	AV	360.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_19.43.59

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 22.8

Model Number: SD7 Ultra E

Humidity (%RH): 51

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC


Test Site: 966#2

Test Voltage: 5.3G WIFI 11ax80 CH58 P=17.5

Test Engineer: Zhang Mingyue

Remark: 数据线: A13 ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

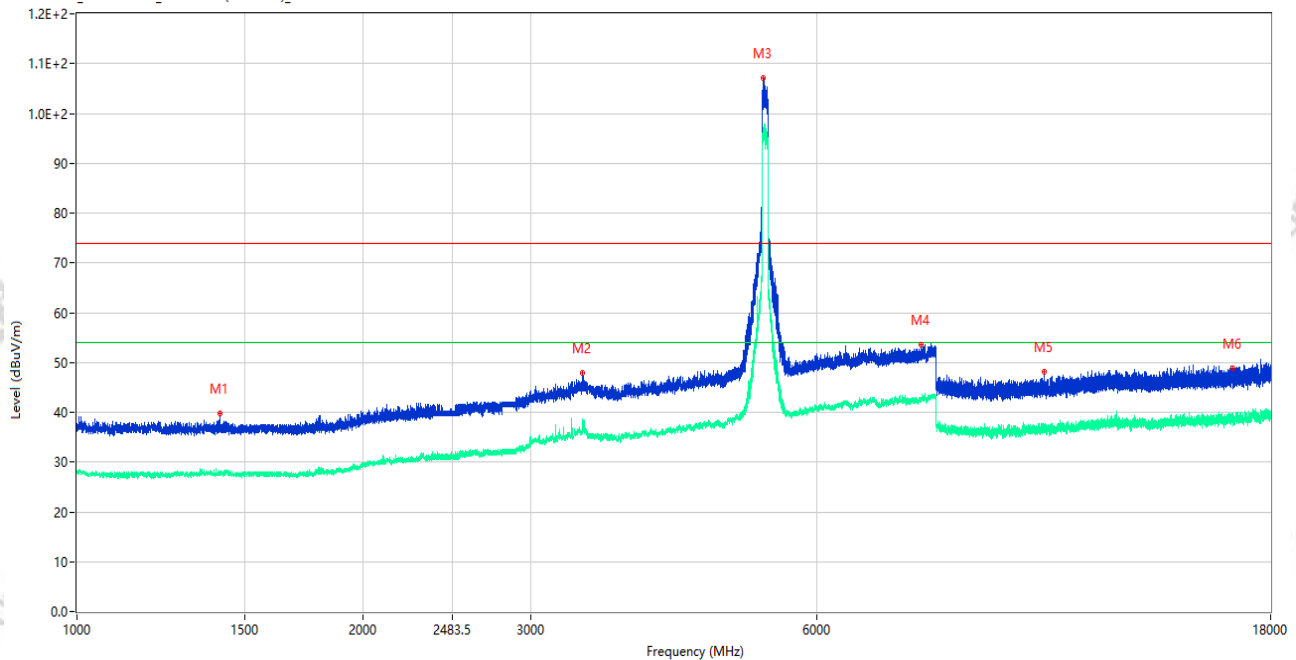

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1412.250	39.70	-15.96	74.0	34.30	Peak	358.00	150	Horizontal	Pass
1**	1412.250	27.39	-15.96	54.0	26.61	AV	358.00	150	Horizontal	Pass
2	3403.000	47.84	-5.54	74.0	26.16	Peak	224.00	150	Horizontal	Pass
2**	3403.000	38.63	-5.54	54.0	15.37	AV	224.00	150	Horizontal	Pass
3	5261.500	107.20	-2.20	74.0	-33.20	Peak	144.00	150	Horizontal	N/A
3**	5261.500	95.12	-2.20	54.0	-41.12	AV	144.00	150	Horizontal	N/A
4	7719.500	53.57	0.96	74.0	20.43	Peak	1.00	150	Horizontal	Pass
4**	7719.500	42.38	0.96	54.0	11.62	AV	1.00	150	Horizontal	Pass
5	10405.162	48.02	-3.35	74.0	25.98	Peak	27.00	150	Horizontal	Pass
5**	10405.162	36.36	-3.35	54.0	17.64	AV	27.00	150	Horizontal	Pass
6	16413.712	48.81	-1.57	74.0	25.19	Peak	360.00	150	Horizontal	Pass
6**	16413.712	38.48	-1.57	54.0	15.52	AV	360.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_19.52.09

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 22.8

Model Number: SD7 Ultra E

Humidity (%RH): 51

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC

Test Site: 966#2


Test Voltage: 5.3G WIFI 11ax160 CH50

P=15.5

Test Engineer: Zhang Mingyue

Remark: 数据线: A13 ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

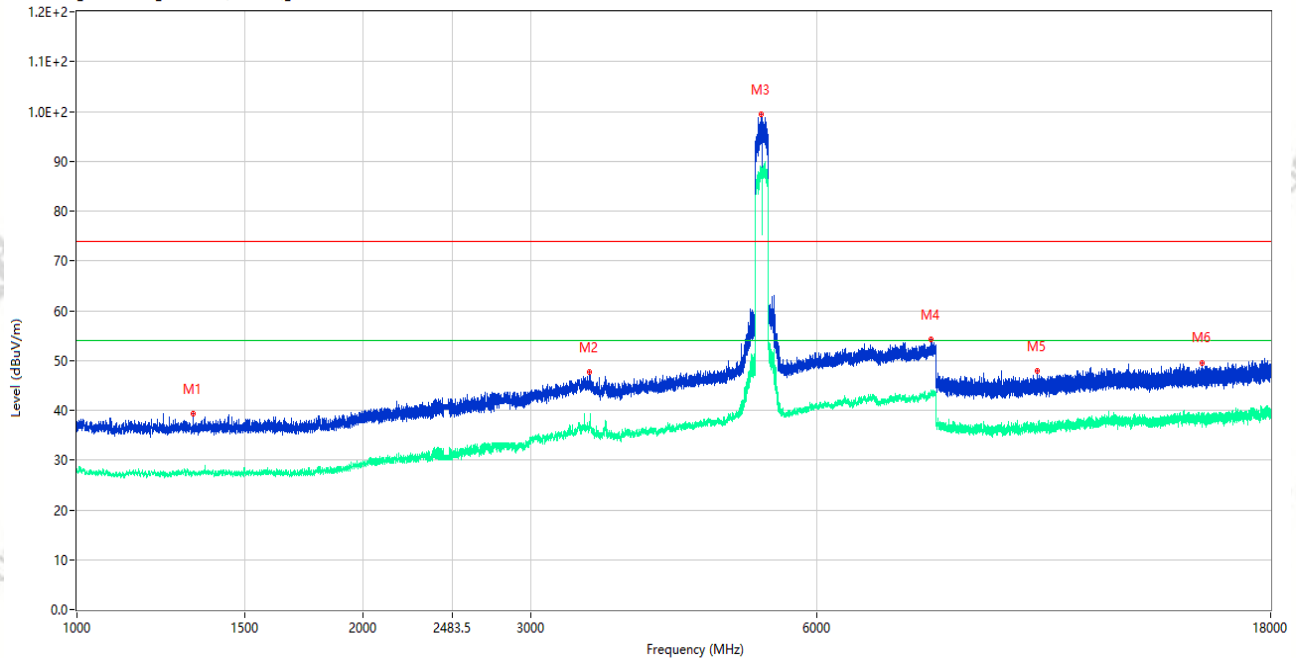

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1324.500	39.32	-15.89	74.0	34.68	Peak	15.00	150	Vertical	Pass
1**	1324.500	27.44	-15.89	54.0	26.56	AV	15.00	150	Vertical	Pass
2	3461.000	47.74	-4.96	74.0	26.26	Peak	271.00	150	Vertical	Pass
2**	3461.000	36.65	-4.96	54.0	17.35	AV	271.00	150	Vertical	Pass
3	5248.500	99.51	-2.10	74.0	-25.51	Peak	35.00	150	Vertical	N/A
3**	5248.500	88.91	-2.10	54.0	-34.91	AV	35.00	150	Vertical	N/A
4	7917.000	54.15	1.90	74.0	19.85	Peak	54.00	150	Vertical	Pass
4**	7917.000	43.26	1.90	54.0	10.74	AV	54.00	150	Vertical	Pass
5	10240.338	47.92	-3.41	74.0	26.08	Peak	213.00	150	Vertical	Pass
5**	10240.338	36.02	-3.41	54.0	17.98	AV	213.00	150	Vertical	Pass
6	15261.338	49.60	-1.07	74.0	24.40	Peak	313.00	150	Vertical	Pass
6**	15261.338	39.01	-1.07	54.0	14.99	AV	313.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_19.57.36

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 22.8

Model Number: SD7 Ultra E

Humidity (%RH): 51

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC

Test Site: 966#2


Test Voltage: 5.3G WIFI 11ax160 CH50

P=15.5

Test Engineer: Zhang Mingyue

Remark: 数据线: A13 ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

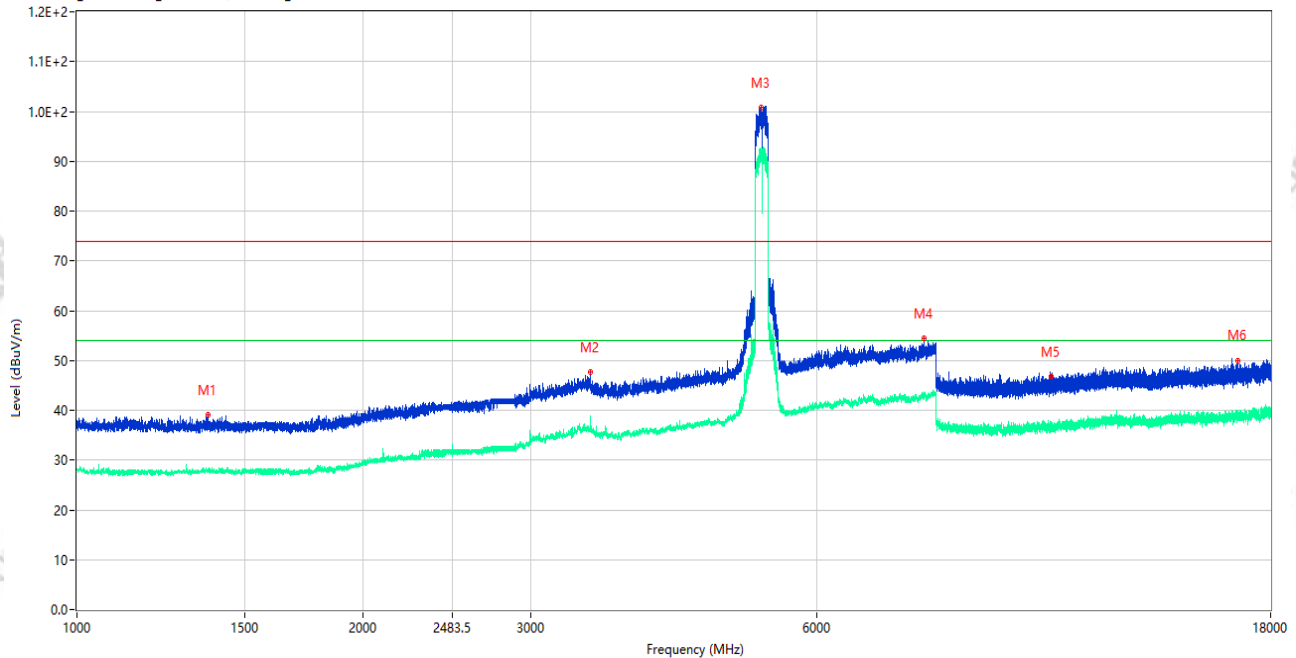

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1373.000	39.06	-15.97	74.0	34.94	Peak	0.00	150	Horizontal	Pass
1**	1373.000	27.73	-15.97	54.0	26.27	AV	0.00	150	Horizontal	Pass
2	3465.000	47.71	-5.10	74.0	26.29	Peak	65.00	150	Horizontal	Pass
2**	3465.000	38.01	-5.10	54.0	15.99	AV	65.00	150	Horizontal	Pass
3	5243.000	100.78	-2.15	74.0	-26.78	Peak	331.00	150	Horizontal	N/A
3**	5243.000	91.50	-2.15	54.0	-37.50	AV	331.00	150	Horizontal	N/A
4	7773.000	54.41	1.16	74.0	19.59	Peak	349.00	150	Horizontal	Pass
4**	7773.000	42.63	1.16	54.0	11.37	AV	349.00	150	Horizontal	Pass
5	10570.700	46.76	-3.25	74.0	27.24	Peak	27.00	150	Horizontal	Pass
5**	10570.700	36.44	-3.25	54.0	17.56	AV	27.00	150	Horizontal	Pass
6	16639.199	50.05	-0.95	74.0	23.95	Peak	360.00	150	Horizontal	Pass
6**	16639.199	38.70	-0.95	54.0	15.30	AV	360.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_13.38.45

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 22.8

Model Number: SD7 Ultra E

Humidity (%RH): 51

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC


Test Site: 966#2

Test Voltage: 5.6G WIFI 11a CH116 P=17.5

Test Engineer: Zhang Mingyue

Remark: 数据线: A13 ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

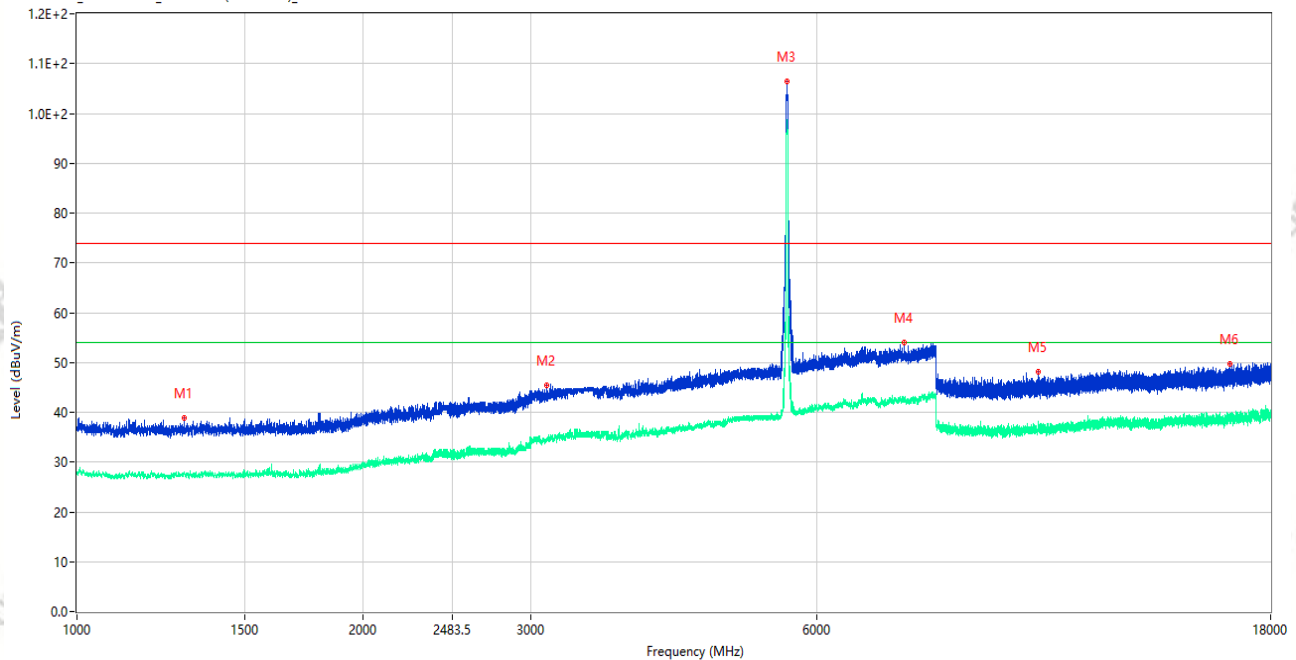

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1296.500	38.92	-15.68	74.0	35.08	Peak	212.00	150	Vertical	Pass
1**	1296.500	27.70	-15.68	54.0	26.30	AV	212.00	150	Vertical	Pass
2	3118.000	45.35	-7.77	74.0	28.65	Peak	163.00	150	Vertical	Pass
2**	3118.000	34.90	-7.77	54.0	19.10	AV	163.00	150	Vertical	Pass
3	5585.500	106.42	-2.83	74.0	-32.42	Peak	26.00	150	Vertical	N/A
3**	5585.500	98.13	-2.83	54.0	-44.13	AV	26.00	150	Vertical	N/A
4	7414.500	53.98	0.78	74.0	20.02	Peak	348.00	150	Vertical	Pass
4**	7414.500	42.86	0.78	54.0	11.14	AV	348.00	150	Vertical	Pass
5	10253.875	48.22	-3.20	74.0	25.78	Peak	309.00	150	Vertical	Pass
5**	10253.875	36.70	-3.20	54.0	17.30	AV	309.00	150	Vertical	Pass
6	16312.912	49.75	-1.85	74.0	24.25	Peak	13.00	150	Vertical	Pass
6**	16312.912	38.37	-1.85	54.0	15.63	AV	13.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_13.34.43

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 22.8

Model Number: SD7 Ultra E

Humidity (%RH): 51

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC


Test Site: 966#2

Test Voltage: 5.6G WIFI 11a CH116 P=17.5

Test Engineer: Zhang Mingyue

Remark: 数据线: A13 ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

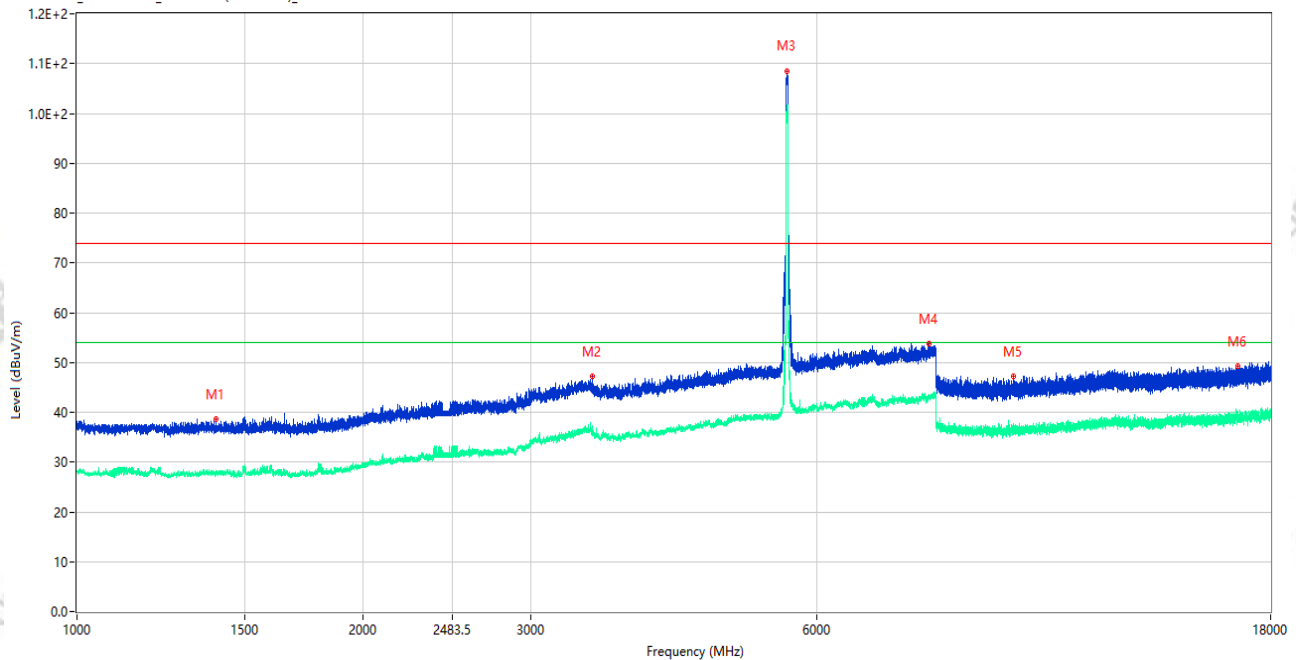

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1400.250	38.66	-15.98	74.0	35.34	Peak	264.00	150	Horizontal	Pass
1**	1400.250	27.34	-15.98	54.0	26.66	AV	264.00	150	Horizontal	Pass
2	3486.000	47.29	-6.04	74.0	26.71	Peak	11.00	150	Horizontal	Pass
2**	3486.000	35.68	-6.04	54.0	18.32	AV	11.00	150	Horizontal	Pass
3	5585.500	108.56	-2.83	74.0	-34.56	Peak	0.00	150	Horizontal	N/A
3**	5585.500	100.50	-2.83	54.0	-46.50	AV	0.00	150	Horizontal	N/A
4	7869.000	53.72	1.79	74.0	20.28	Peak	224.00	150	Horizontal	Pass
4**	7869.000	43.13	1.79	54.0	10.87	AV	224.00	150	Horizontal	Pass
5	9656.325	47.30	-3.13	74.0	26.70	Peak	100.00	150	Horizontal	Pass
5**	9656.325	37.23	-3.13	54.0	16.77	AV	100.00	150	Horizontal	Pass
6	16639.462	49.24	-0.95	74.0	24.76	Peak	82.00	150	Horizontal	Pass
6**	16639.462	39.03	-0.95	54.0	14.97	AV	82.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_13.43.10

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 22.8

Model Number: SD7 Ultra E

Humidity (%RH): 51

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC


Test Site: 966#2

Test Voltage: 5.6G WIFI 11n20 CH116 P=16.5

Test Engineer: Zhang Mingyue

Remark: 数据线: A13 ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

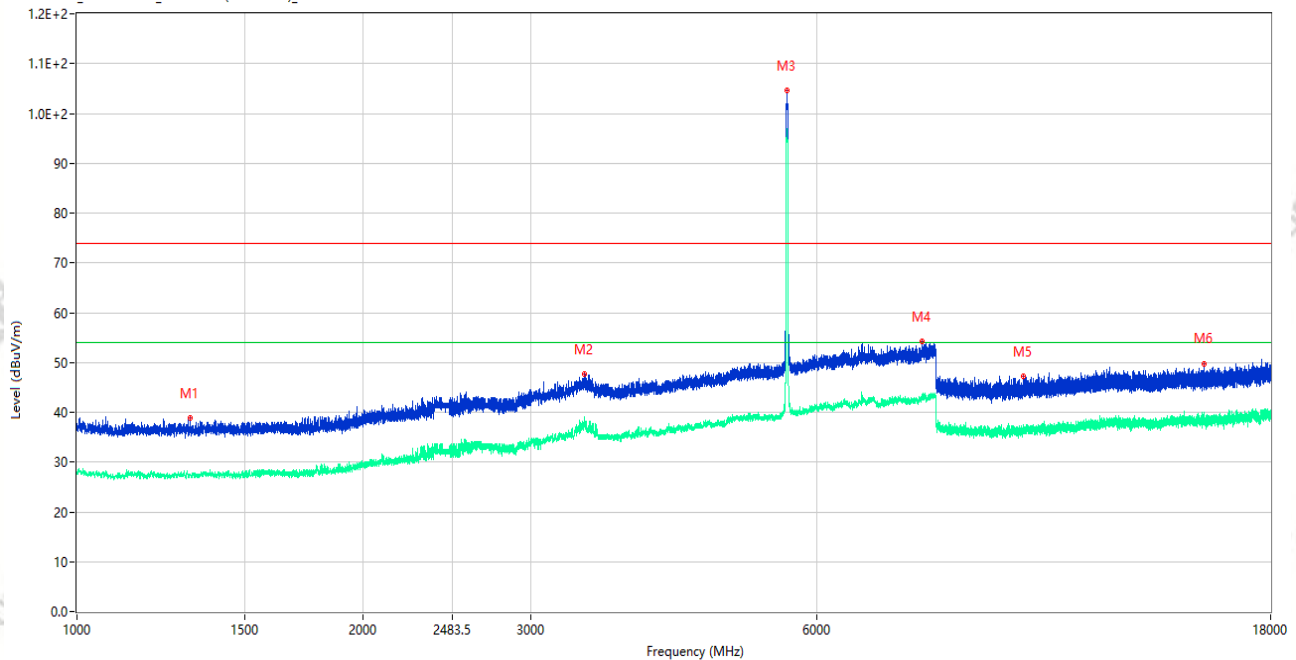

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1314.750	38.82	-15.88	74.0	35.18	Peak	27.00	150	Vertical	Pass
1**	1314.750	27.54	-15.88	54.0	26.46	AV	27.00	150	Vertical	Pass
2	3413.000	47.64	-5.27	74.0	26.36	Peak	314.00	150	Vertical	Pass
2**	3413.000	38.19	-5.27	54.0	15.81	AV	314.00	150	Vertical	Pass
3	5580.000	104.52	-2.85	74.0	-30.52	Peak	29.00	150	Vertical	N/A
3**	5580.000	95.79	-2.85	54.0	-41.79	AV	29.00	150	Vertical	N/A
4	7736.000	54.20	1.21	74.0	19.80	Peak	227.00	150	Vertical	Pass
4**	7736.000	43.06	1.21	54.0	10.94	AV	227.00	150	Vertical	Pass
5	9902.375	47.32	-4.42	74.0	26.68	Peak	288.00	150	Vertical	Pass
5**	9902.375	36.48	-4.42	54.0	17.52	AV	288.00	150	Vertical	Pass
6	15304.912	49.81	-1.83	74.0	24.19	Peak	114.00	150	Vertical	Pass
6**	15304.912	38.85	-1.83	54.0	15.15	AV	114.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_13.47.06

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 22.8

Model Number: SD7 Ultra E

Humidity (%RH): 51

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC


Test Site: 966#2

Test Voltage: 5.6G WIFI 11n20 CH116 P=16.5

Test Engineer: Zhang Mingyue

Remark: 数据线: A13 ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

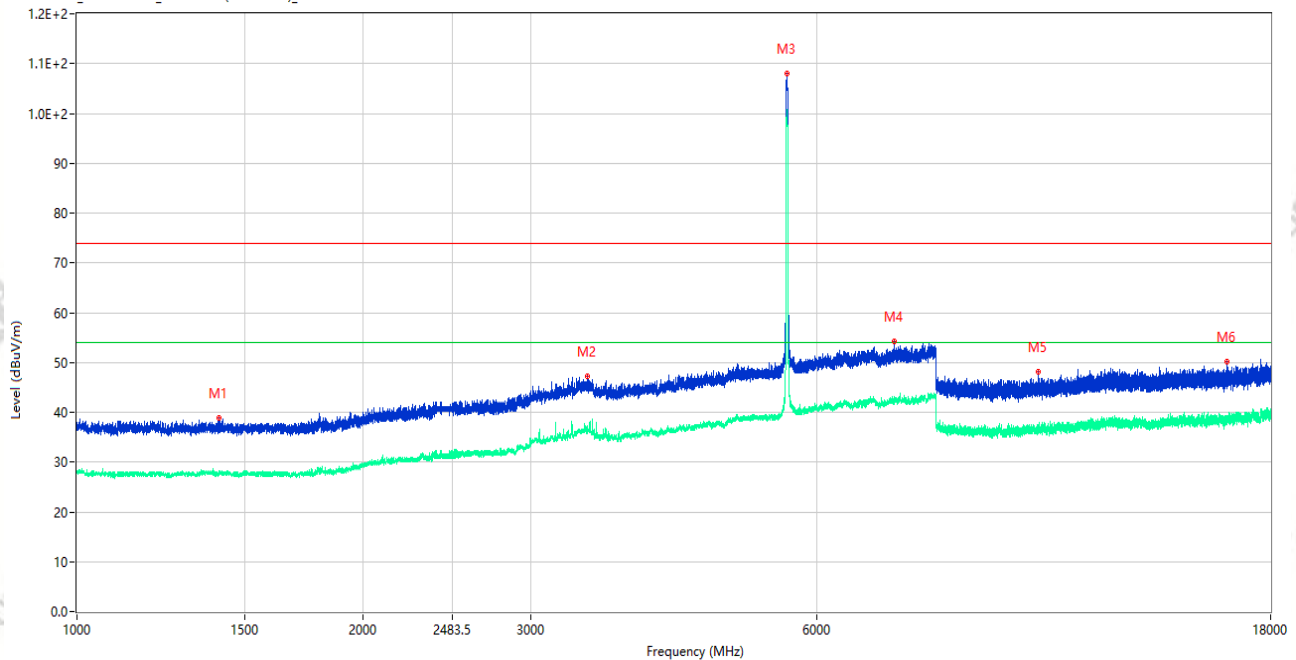

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1409.750	38.78	-15.98	74.0	35.22	Peak	251.00	150	Horizontal	Pass
1**	1409.750	27.74	-15.98	54.0	26.26	AV	251.00	150	Horizontal	Pass
2	3445.000	47.27	-5.26	74.0	26.73	Peak	0.00	150	Horizontal	Pass
2**	3445.000	36.51	-5.26	54.0	17.49	AV	0.00	150	Horizontal	Pass
3	5582.000	108.05	-2.85	74.0	-34.05	Peak	205.00	150	Horizontal	N/A
3**	5582.000	100.82	-2.85	54.0	-46.82	AV	205.00	150	Horizontal	N/A
4	7234.500	54.13	0.92	74.0	19.87	Peak	236.00	150	Horizontal	Pass
4**	7234.500	42.83	0.92	54.0	11.17	AV	236.00	150	Horizontal	Pass
5	10242.475	48.07	-3.32	74.0	25.93	Peak	360.00	150	Horizontal	Pass
5**	10242.475	36.04	-3.32	54.0	17.96	AV	360.00	150	Horizontal	Pass
6	16176.412	50.11	-1.06	74.0	23.89	Peak	14.00	150	Horizontal	Pass
6**	16176.412	38.36	-1.06	54.0	15.64	AV	14.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_13.55.21

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 22.8

Model Number: SD7 Ultra E

Humidity (%RH): 51

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC


Test Site: 966#2

Test Voltage: 5.6G WIFI 11n40 CH118 P=16.5

Test Engineer: Zhang Mingyue

Remark: 数据线: A13 ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

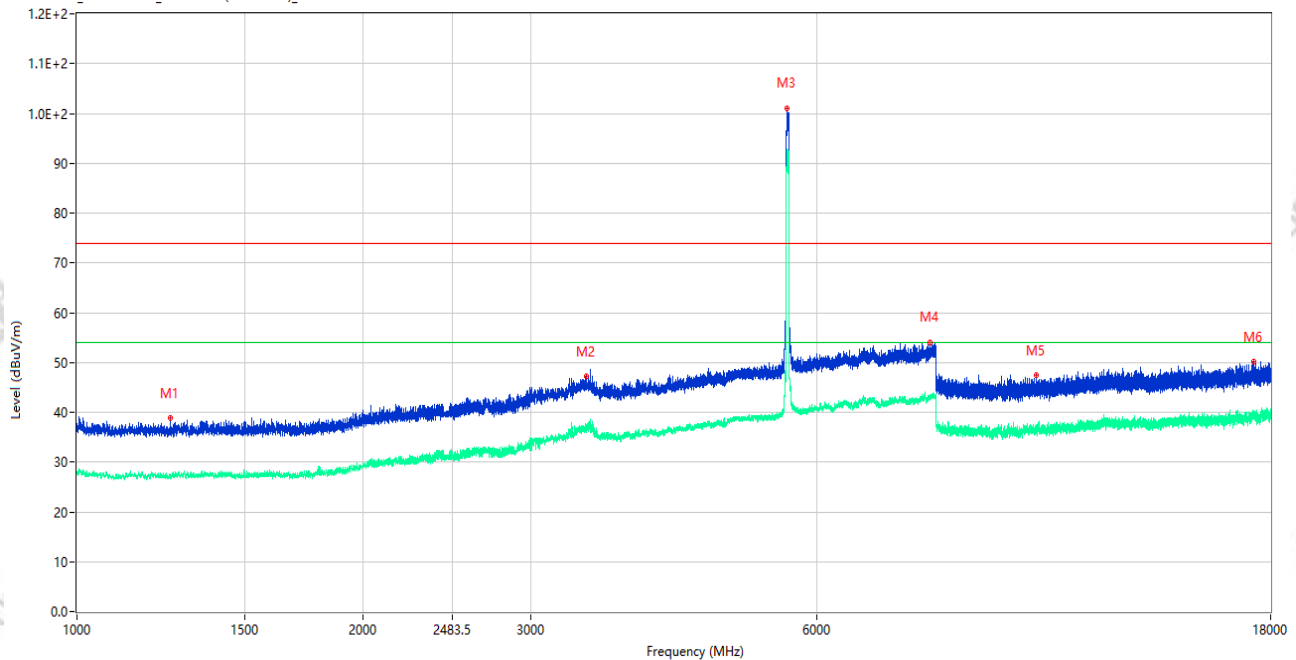

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1254.500	38.94	-16.15	74.0	35.06	Peak	164.00	150	Vertical	Pass
1**	1254.500	26.79	-16.15	54.0	27.21	AV	164.00	150	Vertical	Pass
2	3435.000	47.26	-5.19	74.0	26.74	Peak	117.00	150	Vertical	Pass
2**	3435.000	35.37	-5.19	54.0	18.63	AV	117.00	150	Vertical	Pass
3	5580.000	101.12	-2.85	74.0	-27.12	Peak	28.00	150	Vertical	N/A
3**	5580.000	92.21	-2.85	54.0	-38.21	AV	28.00	150	Vertical	N/A
4	7895.500	54.12	1.51	74.0	19.88	Peak	106.00	150	Vertical	Pass
4**	7895.500	42.74	1.51	54.0	11.26	AV	106.00	150	Vertical	Pass
5	10201.388	47.43	-3.38	74.0	26.57	Peak	193.00	150	Vertical	Pass
5**	10201.388	36.36	-3.38	54.0	17.64	AV	193.00	150	Vertical	Pass
6	17275.238	50.09	-0.92	74.0	23.91	Peak	0.00	150	Vertical	Pass
6**	17275.238	39.09	-0.92	54.0	14.91	AV	0.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_13.51.24

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 22.8

Model Number: SD7 Ultra E

Humidity (%RH): 51

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC


Test Site: 966#2

Test Voltage: 5.6G WIFI 11n40 CH118 P=16.5

Test Engineer: Zhang Mingyue

Remark: 数据线: A13 ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

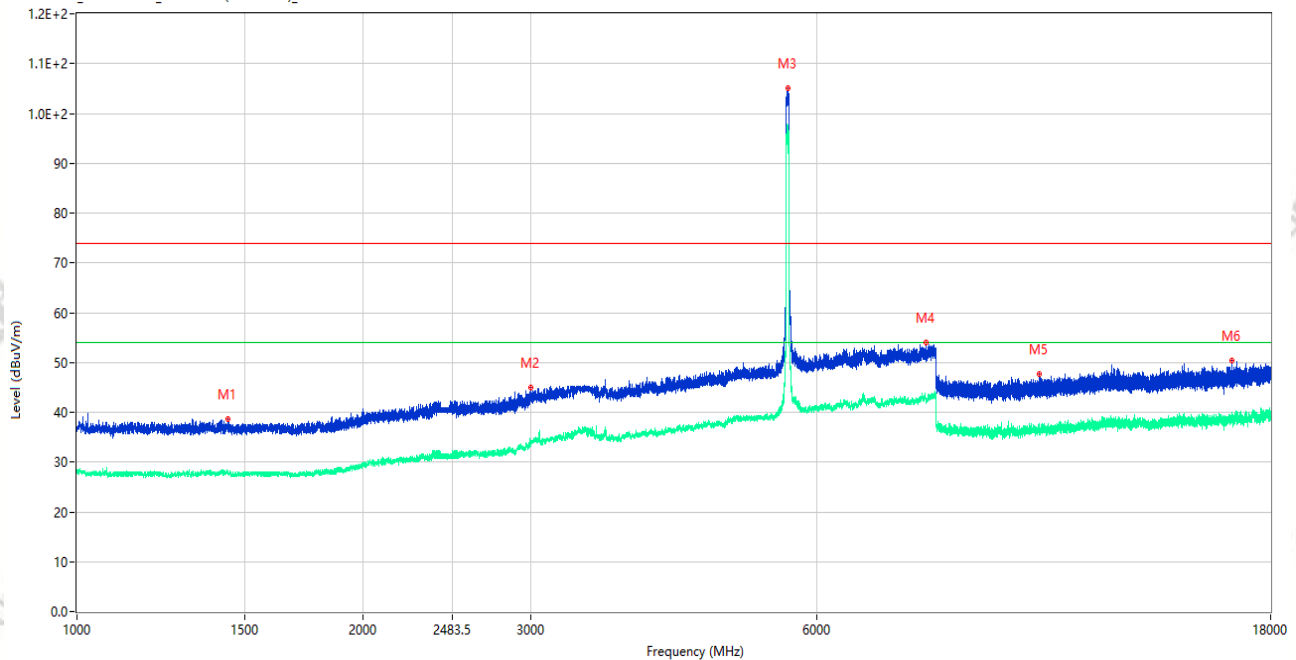

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1441.750	38.60	-15.93	74.0	35.40	Peak	222.00	150	Horizontal	Pass
1**	1441.750	28.03	-15.93	54.0	25.97	AV	222.00	150	Horizontal	Pass
2	2999.250	45.07	-8.74	74.0	28.93	Peak	240.00	150	Horizontal	Pass
2**	2999.250	33.30	-8.74	54.0	20.70	AV	240.00	150	Horizontal	Pass
3	5592.500	105.16	-2.81	74.0	-31.16	Peak	205.00	150	Horizontal	N/A
3**	5592.500	97.37	-2.81	54.0	-43.37	AV	205.00	150	Horizontal	N/A
4	7821.500	53.97	1.41	74.0	20.03	Peak	138.00	150	Horizontal	Pass
4**	7821.500	42.52	1.41	54.0	11.48	AV	138.00	150	Horizontal	Pass
5	10275.963	47.65	-3.29	74.0	26.35	Peak	26.00	150	Horizontal	Pass
5**	10275.963	36.99	-3.29	54.0	17.01	AV	26.00	150	Horizontal	Pass
6	16398.750	50.36	-1.42	74.0	23.64	Peak	0.00	150	Horizontal	Pass
6**	16398.750	38.91	-1.42	54.0	15.09	AV	0.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-28_16.58.26

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.6

Model Number: SD7 Ultra E

Humidity (%RH): 50

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 5.6G WIFI 11ac80 CH122

P=17.5


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Liu Yabo

Remark: 数据线: A13

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

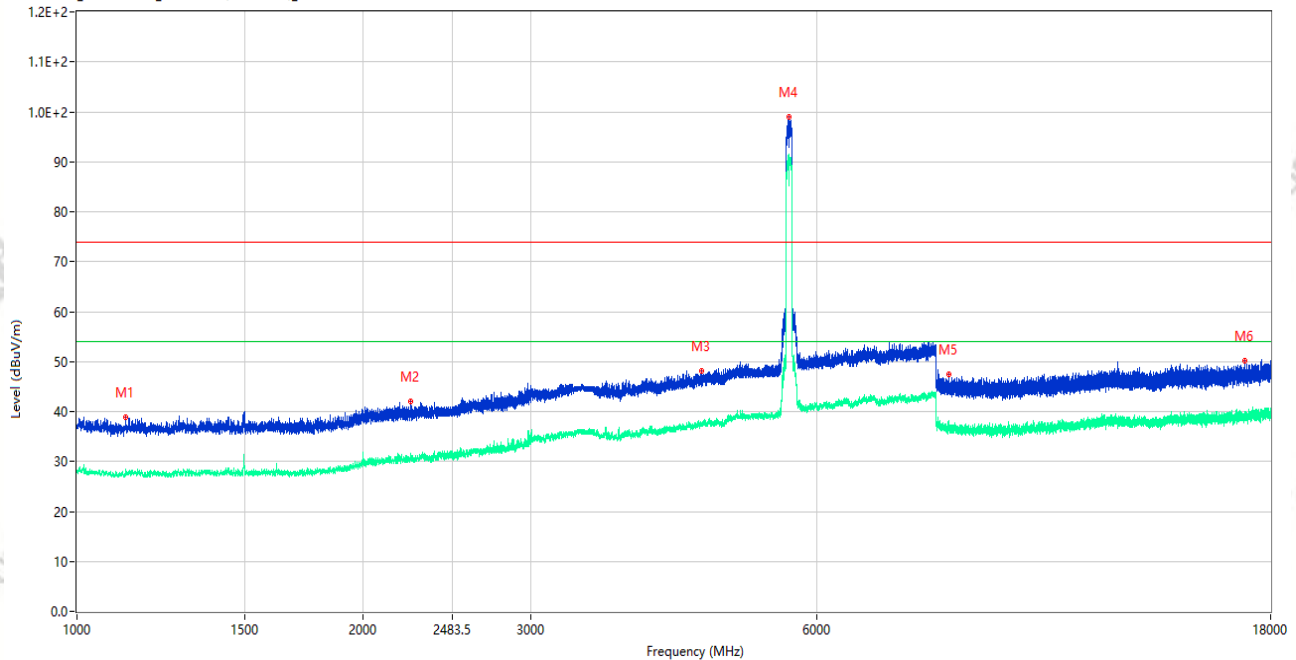

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1126.000	38.81	-15.62	74.0	35.19	Peak	273.00	150	Vertical	Pass
1**	1126.000	27.82	-15.62	54.0	26.18	AV	273.00	150	Vertical	Pass
2	2245.750	41.95	-12.83	74.0	32.05	Peak	352.00	150	Vertical	Pass
2**	2245.750	30.73	-12.83	54.0	23.27	AV	352.00	150	Vertical	Pass
3	4536.000	48.14	-2.82	74.0	25.86	Peak	332.00	150	Vertical	Pass
3**	4536.000	37.45	-2.82	54.0	16.55	AV	332.00	150	Vertical	Pass
4	5602.000	99.00	-2.80	74.0	-25.00	Peak	46.00	150	Vertical	N/A
4**	5602.000	91.43	-2.80	54.0	-37.43	AV	46.00	150	Vertical	N/A
5	8255.787	47.34	-4.51	74.0	26.66	Peak	194.00	150	Vertical	Pass
5**	8255.787	37.93	-4.51	54.0	16.07	AV	194.00	150	Vertical	Pass
6	16912.988	50.08	-0.64	74.0	23.92	Peak	43.00	150	Vertical	Pass
6**	16912.988	38.94	-0.64	54.0	15.06	AV	43.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-28_16.53.45

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.6

Model Number: SD7 Ultra E

Humidity (%RH): 50

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 5.6G WIFI 11ac80 CH122

P=17.5


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Liu Yabo

Remark: 数据线: A13

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

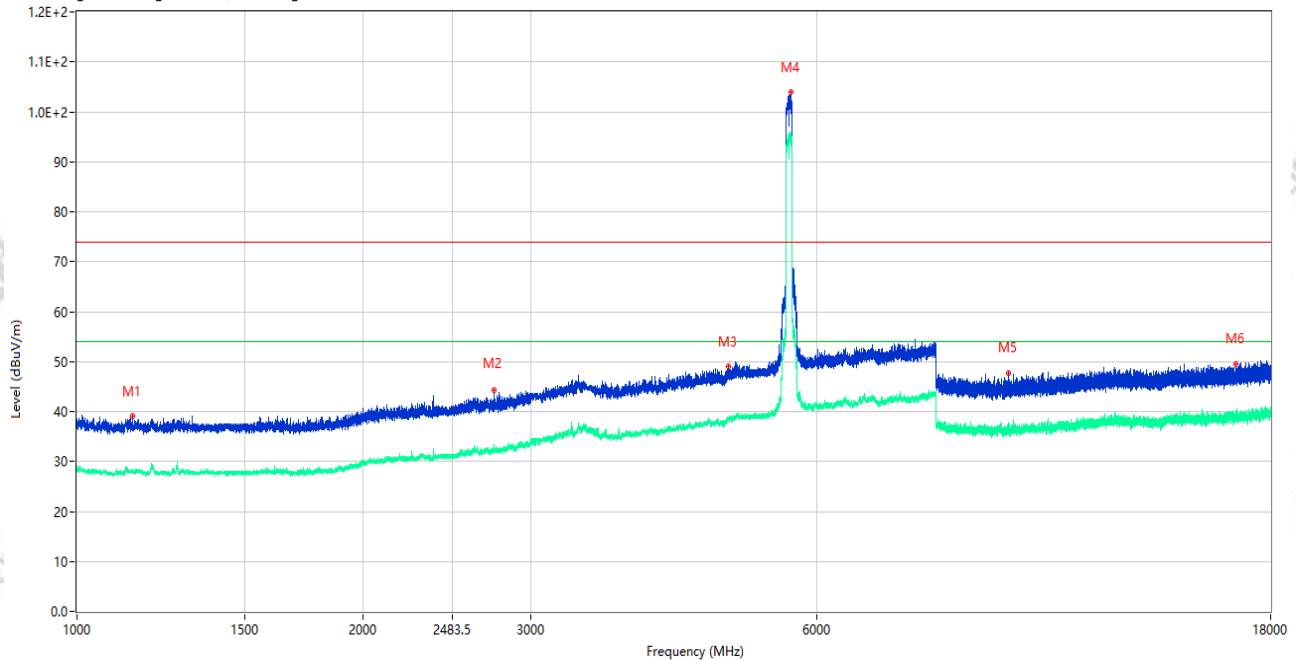

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1145.250	39.14	-15.62	74.0	34.86	Peak	149.00	150	Horizontal	Pass
1**	1145.250	27.87	-15.62	54.0	26.13	AV	149.00	150	Horizontal	Pass
2	2746.500	44.22	-10.52	74.0	29.78	Peak	176.00	150	Horizontal	Pass
2**	2746.500	32.70	-10.52	54.0	21.30	AV	176.00	150	Horizontal	Pass
3	4839.000	48.94	-1.96	74.0	25.06	Peak	44.00	150	Horizontal	Pass
3**	4839.000	38.58	-1.96	54.0	15.42	AV	44.00	150	Horizontal	Pass
4	5632.000	103.91	-2.61	74.0	-29.91	Peak	260.00	150	Horizontal	N/A
4**	5632.000	95.46	-2.61	54.0	-41.46	AV	260.00	150	Horizontal	N/A
5	9545.888	47.79	-2.54	74.0	26.21	Peak	193.00	150	Horizontal	Pass
5**	9545.888	36.92	-2.54	54.0	17.08	AV	193.00	150	Horizontal	Pass
6	16546.275	49.59	-1.28	74.0	24.41	Peak	278.00	150	Horizontal	Pass
6**	16546.275	39.51	-1.28	54.0	14.49	AV	278.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_14.15.51

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 22.8

Model Number: SD7 Ultra E

Humidity (%RH): 51

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC

Test Site: 966#2


Test Voltage: 5.6G WIFI 11ac160 CH114

P=16.5

Test Engineer: Zhang Mingyue

Remark: 数据线: A13 ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

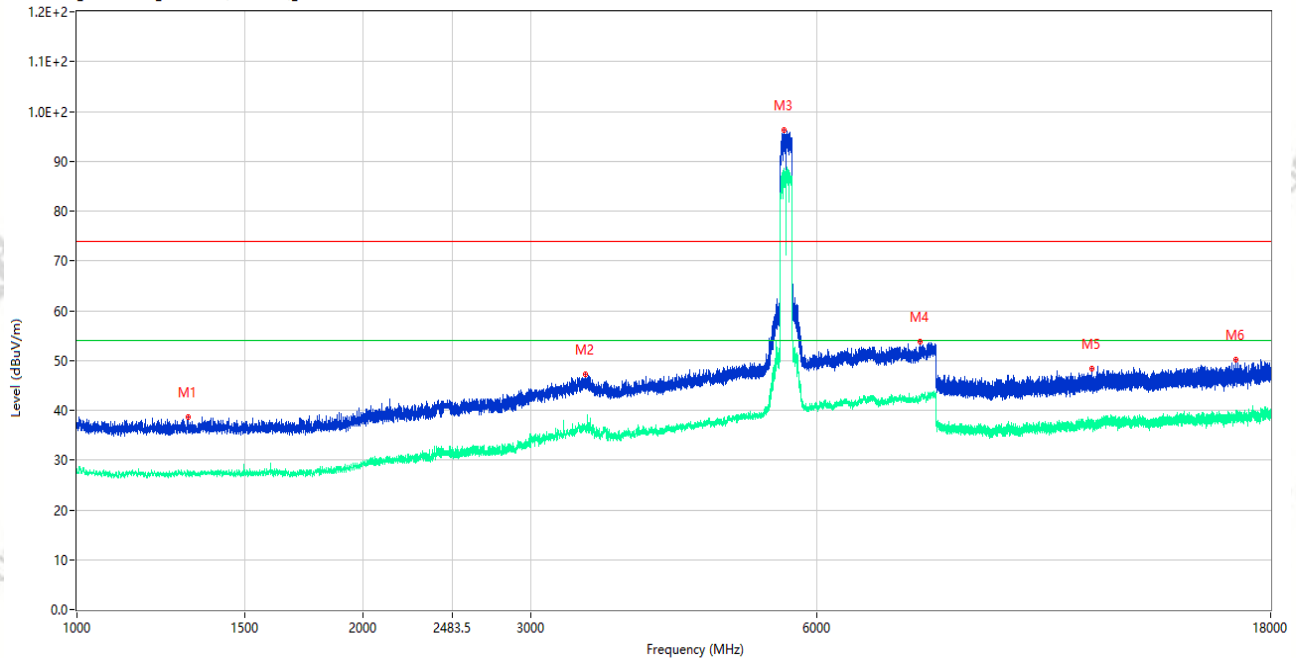

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1308.500	38.64	-15.69	74.0	35.36	Peak	360.00	150	Vertical	Pass
1**	1308.500	27.18	-15.69	54.0	26.82	AV	360.00	150	Vertical	Pass
2	3426.500	47.28	-4.93	74.0	26.72	Peak	157.00	150	Vertical	Pass
2**	3426.500	35.83	-4.93	54.0	18.17	AV	157.00	150	Vertical	Pass
3	5540.000	96.26	-2.67	74.0	-22.26	Peak	31.00	150	Vertical	N/A
3**	5540.000	88.58	-2.67	54.0	-34.58	AV	31.00	150	Vertical	N/A
4	7708.500	53.78	1.34	74.0	20.22	Peak	0.00	150	Vertical	Pass
4**	7708.500	42.36	1.34	54.0	11.64	AV	0.00	150	Vertical	Pass
5	11681.963	48.34	-2.73	74.0	25.66	Peak	360.00	150	Vertical	Pass
5**	11681.963	36.87	-2.73	54.0	17.13	AV	360.00	150	Vertical	Pass
6	16562.551	50.27	-1.09	74.0	23.73	Peak	184.00	150	Vertical	Pass
6**	16562.551	38.83	-1.09	54.0	15.17	AV	184.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_14.19.42

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 22.8

Model Number: SD7 Ultra E

Humidity (%RH): 51

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC

Test Site: 966#2


Test Voltage: 5.6G WIFI 11ac160 CH114

P=16.5

Test Engineer: Zhang Mingyue

Remark: 数据线: A13 ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

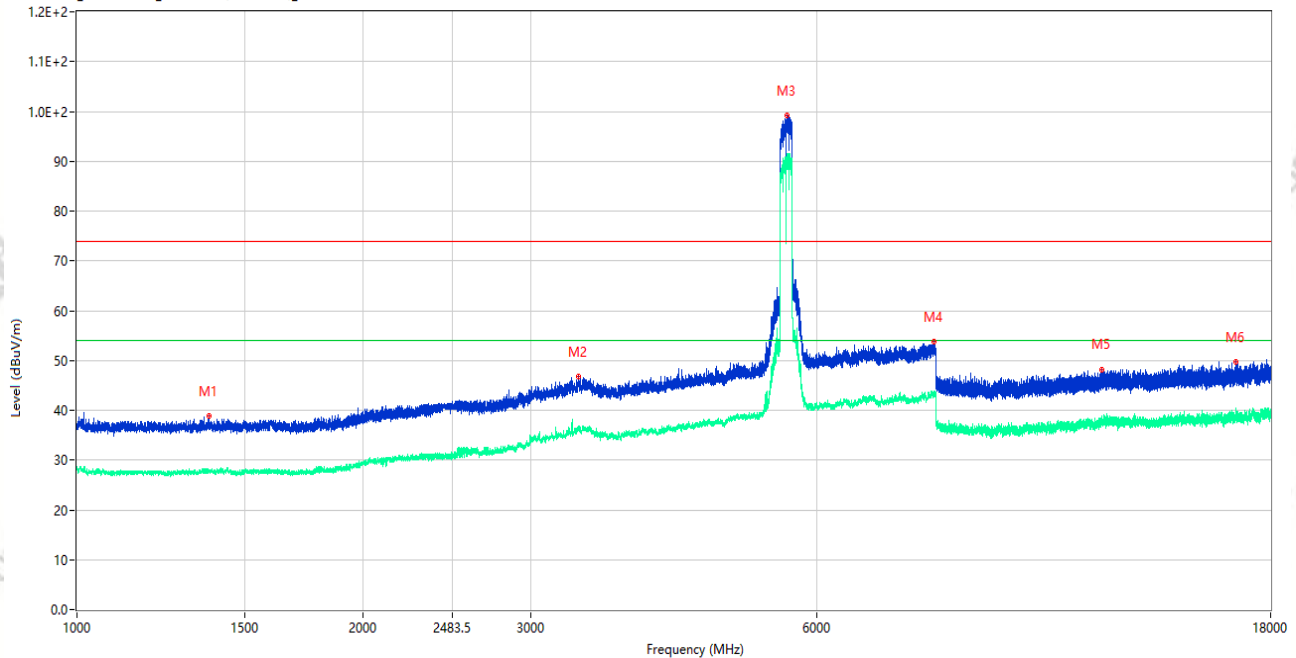

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1377.750	38.83	-16.00	74.0	35.17	Peak	216.00	150	Horizontal	Pass
1**	1377.750	27.55	-16.00	54.0	26.45	AV	216.00	150	Horizontal	Pass
2	3365.500	46.82	-5.13	74.0	27.18	Peak	256.00	150	Horizontal	Pass
2**	3365.500	36.59	-5.13	54.0	17.41	AV	256.00	150	Horizontal	Pass
3	5584.000	99.27	-2.84	74.0	-25.27	Peak	0.00	150	Horizontal	N/A
3**	5584.000	91.03	-2.84	54.0	-37.03	AV	0.00	150	Horizontal	N/A
4	7960.500	53.69	2.35	74.0	20.31	Peak	295.00	150	Horizontal	Pass
4**	7960.500	43.50	2.35	54.0	10.50	AV	295.00	150	Horizontal	Pass
5	11972.187	48.23	-3.14	74.0	25.77	Peak	360.00	150	Horizontal	Pass
5**	11972.187	38.21	-3.14	54.0	15.79	AV	360.00	150	Horizontal	Pass
6	16557.038	49.76	-0.90	74.0	24.24	Peak	319.00	150	Horizontal	Pass
6**	16557.038	39.18	-0.90	54.0	14.82	AV	319.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_14.27.50

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 22.8

Model Number: SD7 Ultra E

Humidity (%RH): 51

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC

Test Site: 966#2


Test Voltage: 5.6G WIFI 11ax20 CH116

P=17.5

Test Engineer: Zhang Mingyue

Remark: 数据线: A13 ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

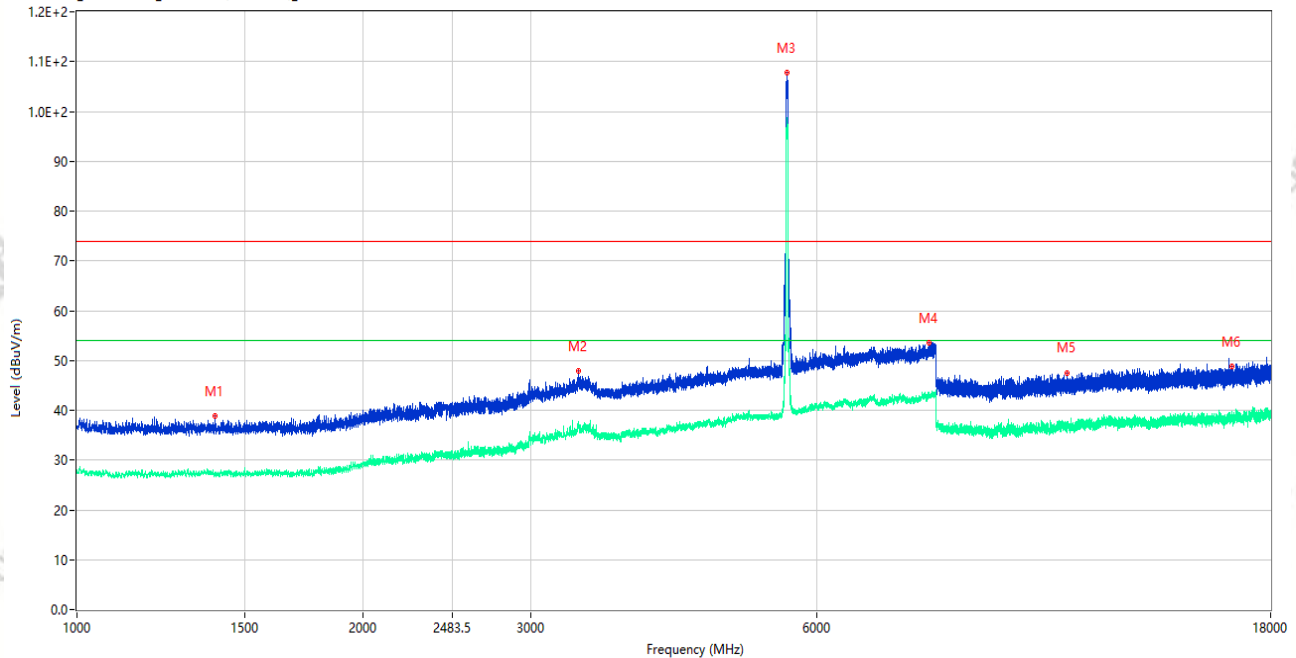

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1396.250	38.87	-16.03	74.0	35.13	Peak	161.00	150	Vertical	Pass
1**	1396.250	27.18	-16.03	54.0	26.82	AV	161.00	150	Vertical	Pass
2	3366.000	47.84	-5.08	74.0	26.16	Peak	303.00	150	Vertical	Pass
2**	3366.000	37.02	-5.08	54.0	16.98	AV	303.00	150	Vertical	Pass
3	5578.500	107.79	-2.88	74.0	-33.79	Peak	20.00	150	Vertical	N/A
3**	5578.500	97.87	-2.88	54.0	-43.87	AV	20.00	150	Vertical	N/A
4	7866.500	53.61	1.78	74.0	20.39	Peak	10.00	150	Vertical	Pass
4**	7866.500	43.16	1.78	54.0	10.84	AV	10.00	150	Vertical	Pass
5	10992.263	47.56	-3.12	74.0	26.44	Peak	171.00	150	Vertical	Pass
5**	10992.263	37.02	-3.12	54.0	16.98	AV	171.00	150	Vertical	Pass
6	16390.875	48.81	-1.31	74.0	25.19	Peak	47.00	150	Vertical	Pass
6**	16390.875	38.75	-1.31	54.0	15.25	AV	47.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_14.23.50

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 22.8

Model Number: SD7 Ultra E

Humidity (%RH): 51

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC

Test Site: 966#2


Test Voltage: 5.6G WIFI 11ax20 CH116

P=17.5

Test Engineer: Zhang Mingyue

Remark: 数据线: A13 ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

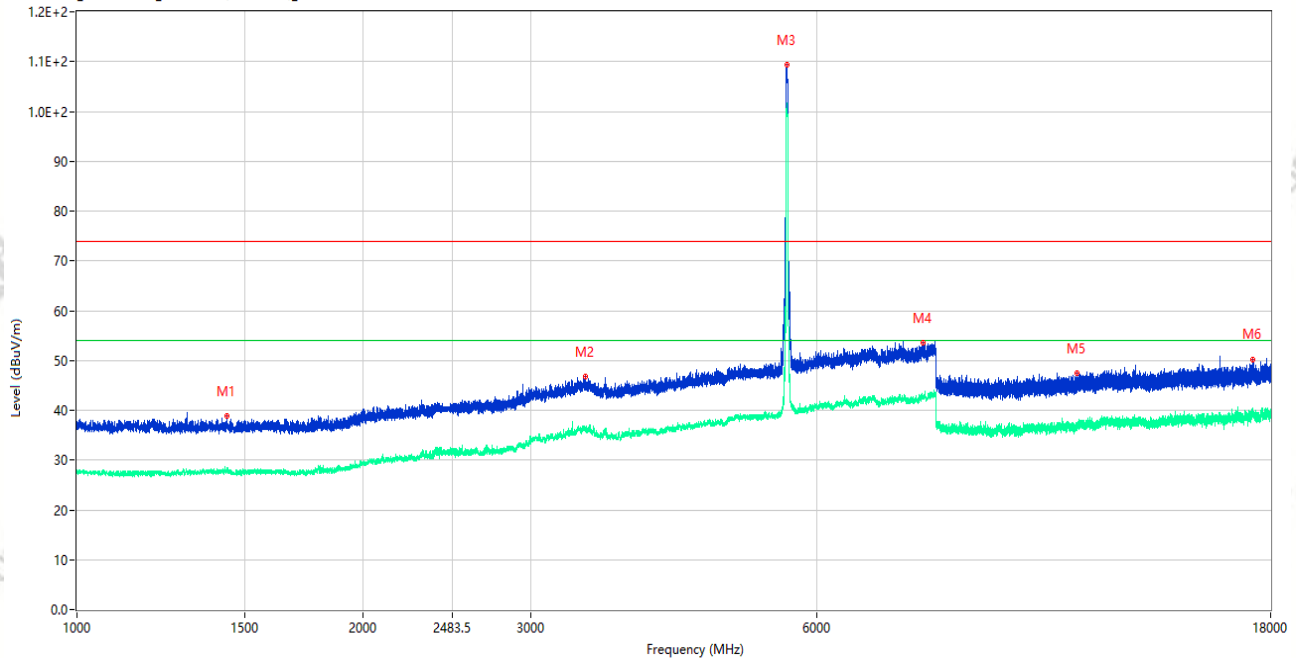

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1437.250	38.84	-15.97	74.0	35.16	Peak	217.00	150	Horizontal	Pass
1**	1437.250	27.68	-15.97	54.0	26.32	AV	217.00	150	Horizontal	Pass
2	3427.500	46.76	-4.93	74.0	27.24	Peak	198.00	150	Horizontal	Pass
2**	3427.500	36.34	-4.93	54.0	17.66	AV	198.00	150	Horizontal	Pass
3	5576.000	109.37	-2.94	74.0	-35.37	Peak	138.00	150	Horizontal	N/A
3**	5576.000	100.52	-2.94	54.0	-46.52	AV	138.00	150	Horizontal	N/A
4	7753.500	53.65	1.51	74.0	20.35	Peak	0.00	150	Horizontal	Pass
4**	7753.500	42.63	1.51	54.0	11.37	AV	0.00	150	Horizontal	Pass
5	11258.738	47.41	-4.35	74.0	26.59	Peak	169.00	150	Horizontal	Pass
5**	11258.738	36.18	-4.35	54.0	17.82	AV	169.00	150	Horizontal	Pass
6	17239.276	50.26	-0.93	74.0	23.74	Peak	0.00	150	Horizontal	Pass
6**	17239.276	39.23	-0.93	54.0	14.77	AV	0.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_14.31.50

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 22.8

Model Number: SD7 Ultra E

Humidity (%RH): 51

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC

Test Site: 966#2


Test Voltage: 5.6G WIFI 11ax40 CH118

P=17.5

Test Engineer: Zhang Mingyue

Remark: 数据线: A13 ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

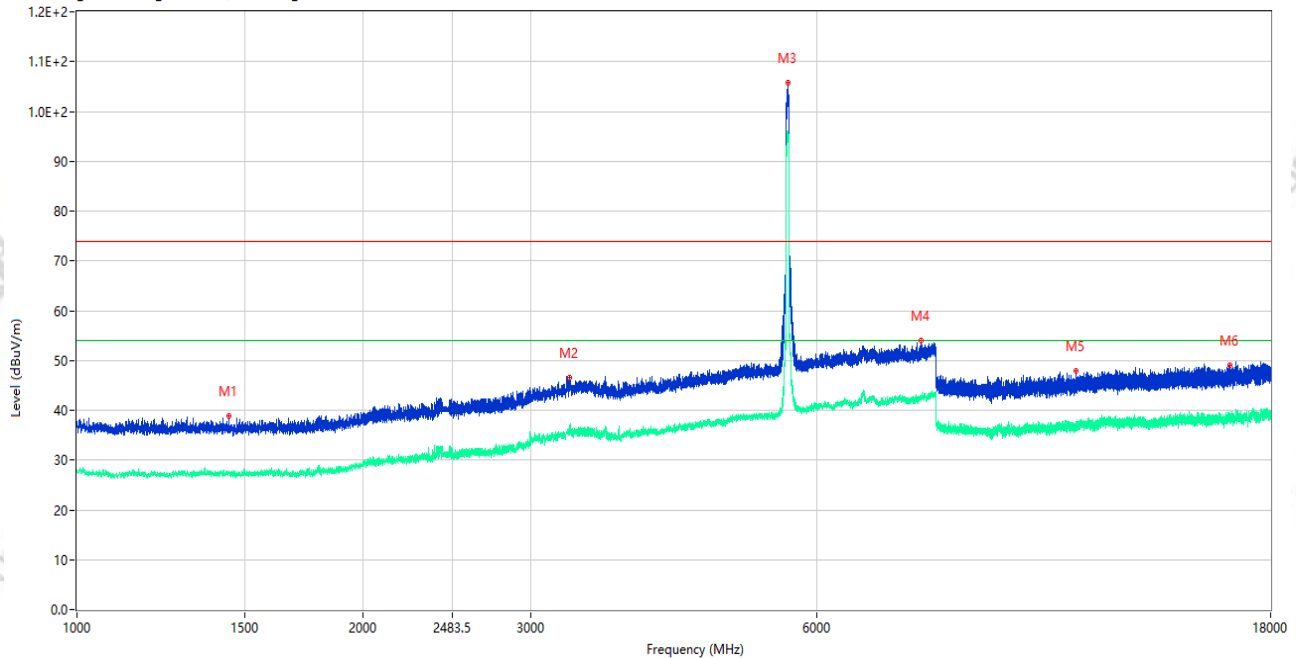

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1443.250	38.85	-15.93	74.0	35.15	Peak	62.00	150	Vertical	Pass
1**	1443.250	27.32	-15.93	54.0	26.68	AV	62.00	150	Vertical	Pass
2	3299.000	46.49	-6.88	74.0	27.51	Peak	314.00	150	Vertical	Pass
2**	3299.000	37.12	-6.88	54.0	16.88	AV	314.00	150	Vertical	Pass
3	5588.000	105.67	-2.82	74.0	-31.67	Peak	185.00	150	Vertical	N/A
3**	5588.000	95.27	-2.82	54.0	-41.27	AV	185.00	150	Vertical	N/A
4	7730.000	53.91	0.89	74.0	20.09	Peak	225.00	150	Vertical	Pass
4**	7730.000	42.44	0.89	54.0	11.56	AV	225.00	150	Vertical	Pass
5	11228.100	47.94	-4.20	74.0	26.06	Peak	2.00	150	Vertical	Pass
5**	11228.100	36.86	-4.20	54.0	17.14	AV	2.00	150	Vertical	Pass
6	16302.151	49.08	-1.48	74.0	24.92	Peak	0.00	150	Vertical	Pass
6**	16302.151	38.44	-1.48	54.0	15.56	AV	0.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_14.35.49

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 22.8

Model Number: SD7 Ultra E

Humidity (%RH): 51

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC

Test Site: 966#2


Test Voltage: 5.6G WIFI 11ax40 CH118

P=17.5

Test Engineer: Zhang Mingyue

Remark: 数据线: A13 ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

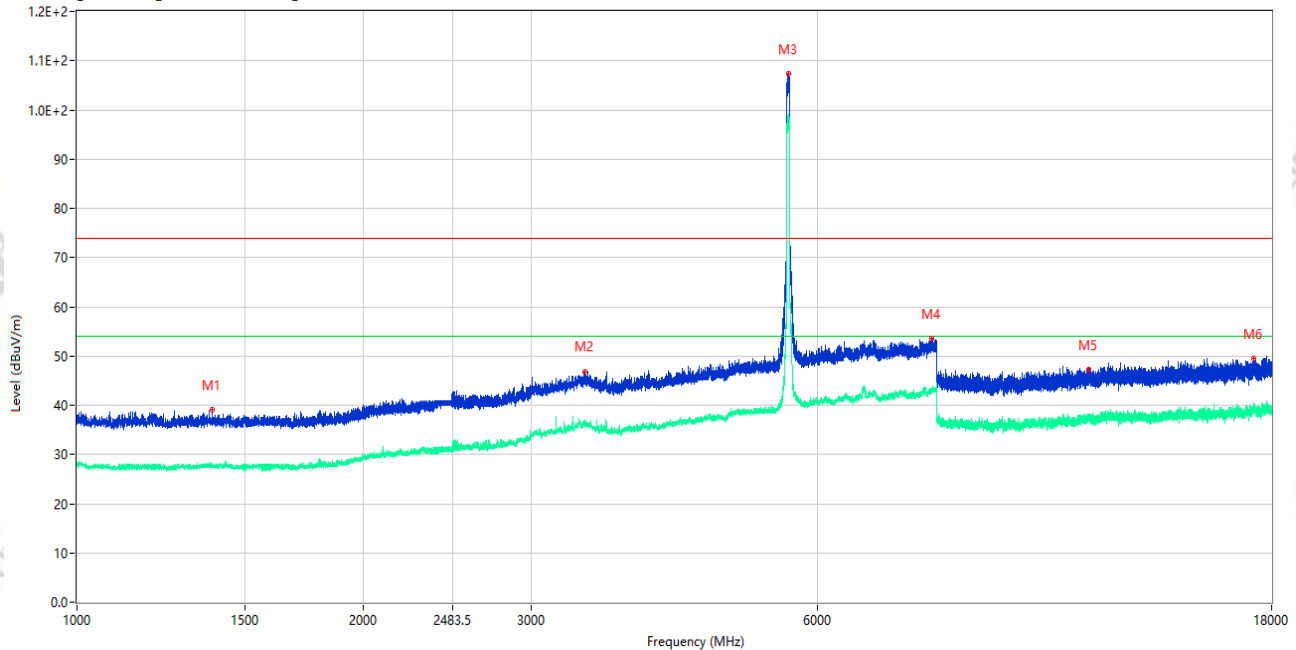

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1386.000	39.05	-16.00	74.0	34.95	Peak	360.00	150	Horizontal	Pass
1**	1386.000	27.63	-16.00	54.0	26.37	AV	360.00	150	Horizontal	Pass
2	3415.500	46.88	-5.15	74.0	27.12	Peak	129.00	150	Horizontal	Pass
2**	3415.500	36.24	-5.15	54.0	17.76	AV	129.00	150	Horizontal	Pass
3	5596.000	107.23	-2.82	74.0	-33.23	Peak	140.00	150	Horizontal	N/A
3**	5596.000	97.88	-2.82	54.0	-43.88	AV	140.00	150	Horizontal	N/A
4	7915.000	53.52	1.84	74.0	20.48	Peak	285.00	150	Horizontal	Pass
4**	7915.000	42.87	1.84	54.0	11.13	AV	285.00	150	Horizontal	Pass
5	11577.224	47.23	-2.49	74.0	26.77	Peak	360.00	150	Horizontal	Pass
5**	11577.224	36.38	-2.49	54.0	17.62	AV	360.00	150	Horizontal	Pass
6	17235.337	49.53	-0.55	74.0	24.47	Peak	14.00	150	Horizontal	Pass
6**	17235.337	39.55	-0.55	54.0	14.45	AV	14.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-28_16.43.08

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.6

Model Number: SD7 Ultra E

Humidity (%RH): 50

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 5.6G WIFI 11ax80 CH122

P=17.5


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Liu Yabo

Remark: 数据线: A13

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

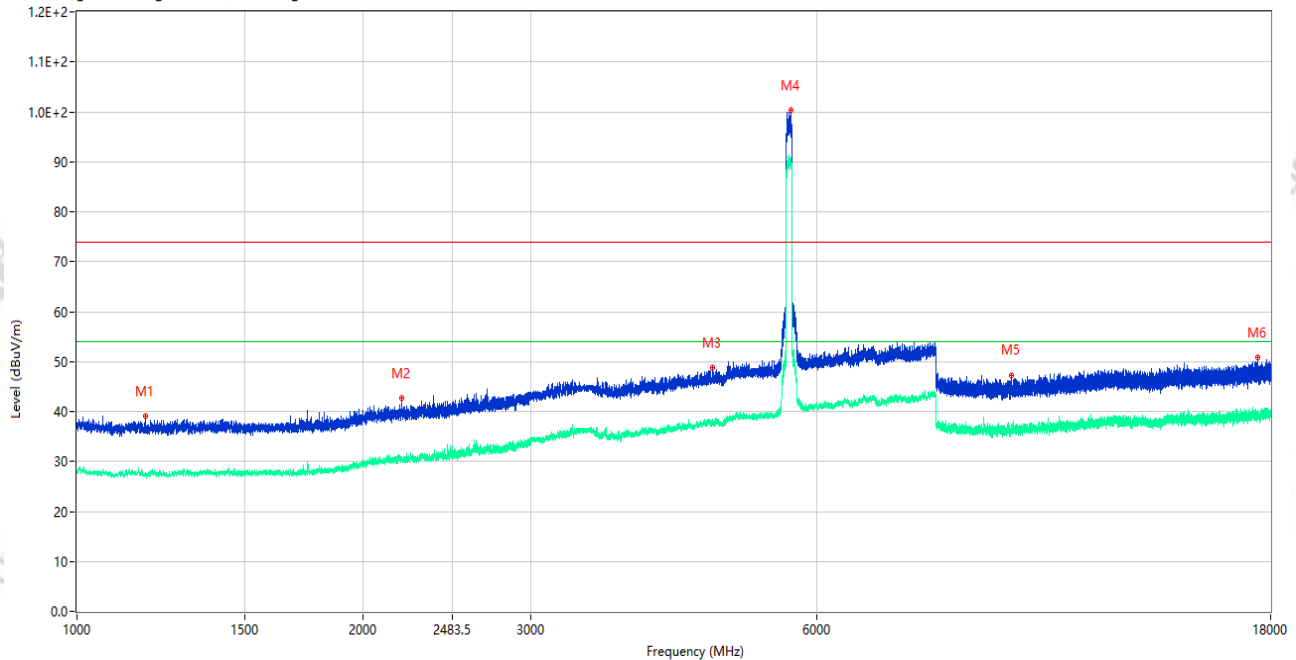

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1181.000	39.06	-15.79	74.0	34.94	Peak	0.00	150	Vertical	Pass
1**	1181.000	27.06	-15.79	54.0	26.94	AV	0.00	150	Vertical	Pass
2	2194.000	42.62	-13.32	74.0	31.38	Peak	83.00	150	Vertical	Pass
2**	2194.000	30.49	-13.32	54.0	23.51	AV	83.00	150	Vertical	Pass
3	4660.000	48.75	-3.35	74.0	25.25	Peak	320.00	150	Vertical	Pass
3**	4660.000	38.07	-3.35	54.0	15.93	AV	320.00	150	Vertical	Pass
4	5639.000	100.39	-2.83	74.0	-26.39	Peak	161.00	150	Vertical	N/A
4**	5639.000	90.25	-2.83	54.0	-36.25	AV	161.00	150	Vertical	N/A
5	9606.925	47.34	-3.24	74.0	26.66	Peak	360.00	150	Vertical	Pass
5**	9606.925	36.22	-3.24	54.0	17.78	AV	360.00	150	Vertical	Pass
6	17447.963	50.75	0.16	74.0	23.25	Peak	211.00	150	Vertical	Pass
6**	17447.963	39.24	0.16	54.0	14.76	AV	211.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-28_16.47.35

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.6

Model Number: SD7 Ultra E

Humidity (%RH): 50

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 5.6G WIFI 11ax80 CH122

P=17.5


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Liu Yabo

Remark: 数据线: A13

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

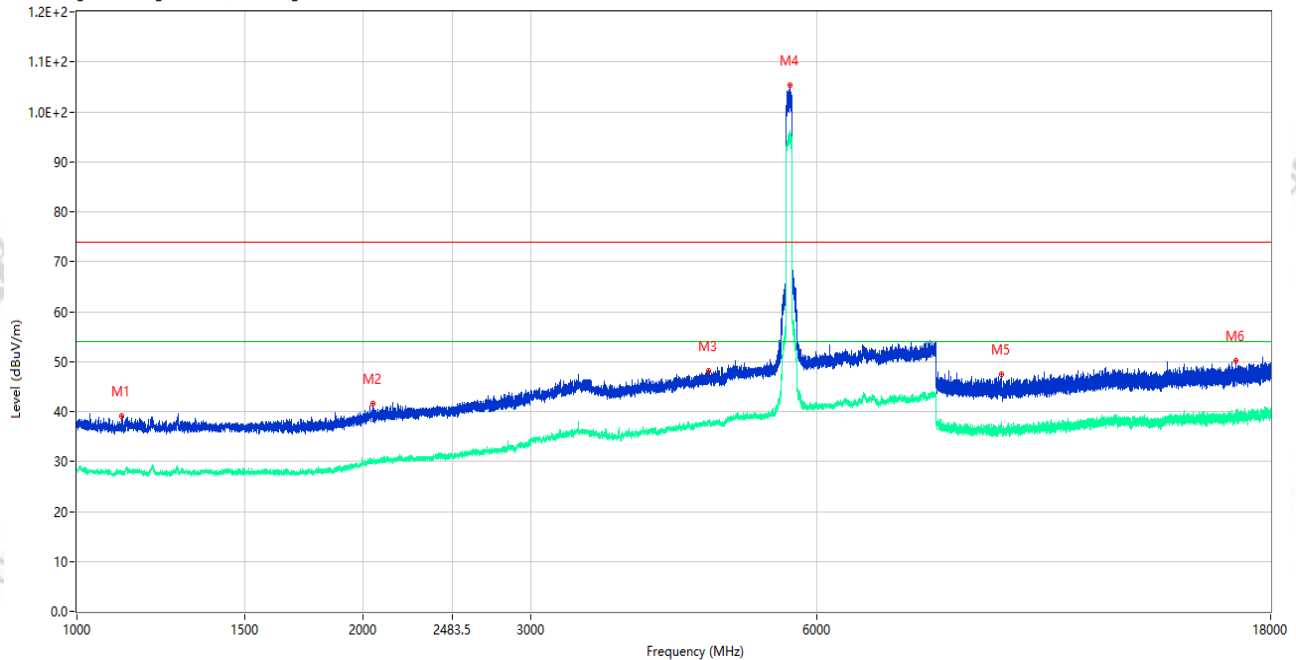

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1113.500	39.05	-15.77	74.0	34.95	Peak	194.00	150	Horizontal	Pass
1**	1113.500	27.67	-15.77	54.0	26.33	AV	194.00	150	Horizontal	Pass
2	2046.000	41.67	-13.44	74.0	32.33	Peak	58.00	150	Horizontal	Pass
2**	2046.000	30.11	-13.44	54.0	23.89	AV	58.00	150	Horizontal	Pass
3	4611.000	48.08	-3.43	74.0	25.92	Peak	22.00	150	Horizontal	Pass
3**	4611.000	37.83	-3.43	54.0	16.17	AV	22.00	150	Horizontal	Pass
4	5622.500	105.24	-2.33	74.0	-31.24	Peak	251.00	150	Horizontal	N/A
4**	5622.500	95.81	-2.33	54.0	-41.81	AV	251.00	150	Horizontal	N/A
5	9383.200	47.40	-4.57	74.0	26.60	Peak	189.00	150	Horizontal	Pass
5**	9383.200	36.71	-4.57	54.0	17.29	AV	189.00	150	Horizontal	Pass
6	16562.551	50.16	-1.09	74.0	23.84	Peak	313.00	150	Horizontal	Pass
6**	16562.551	39.60	-1.09	54.0	14.40	AV	313.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_14.44.08

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 22.8

Model Number: SD7 Ultra E

Humidity (%RH): 51

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC

Test Site: 966#2


Test Voltage: 5.6G WIFI 11ax160 CH114

P=15.5

Test Engineer: Zhang Mingyue

Remark: 数据线: A13 ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

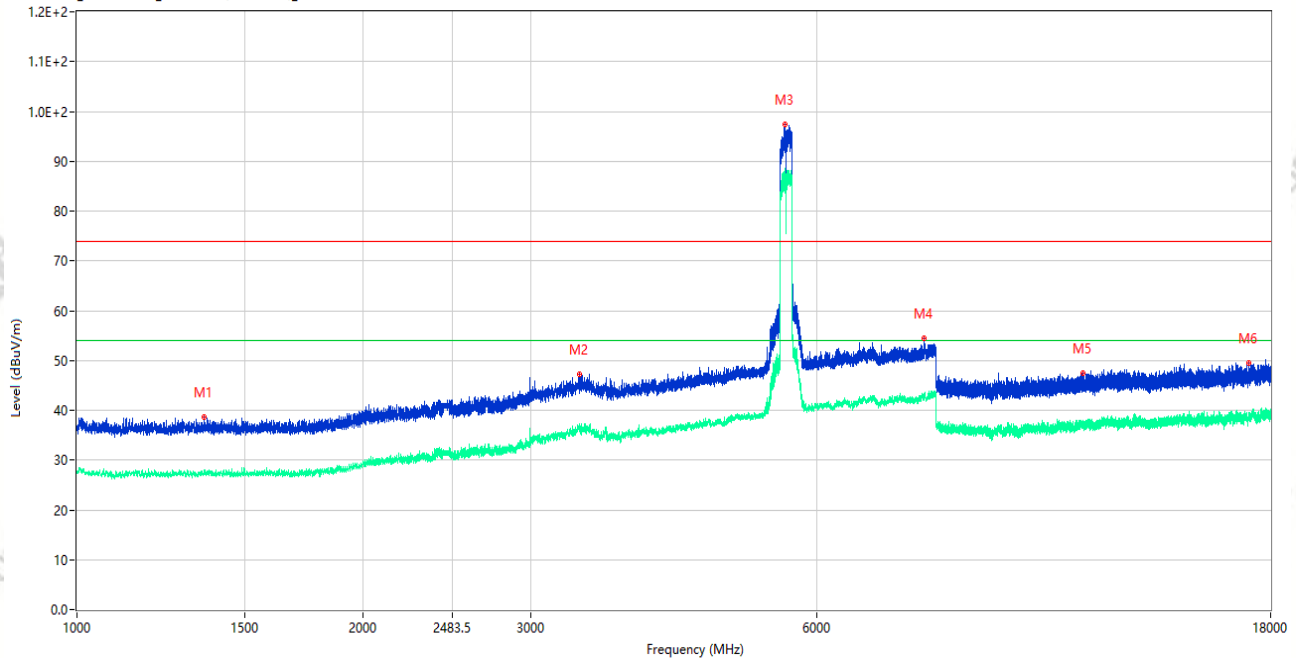

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1361.250	38.62	-15.83	74.0	35.38	Peak	78.00	150	Vertical	Pass
1**	1361.250	27.68	-15.83	54.0	26.32	AV	78.00	150	Vertical	Pass
2	3373.000	47.16	-4.79	74.0	26.84	Peak	78.00	150	Vertical	Pass
2**	3373.000	36.54	-4.79	54.0	17.46	AV	78.00	150	Vertical	Pass
3	5551.500	97.35	-2.72	74.0	-23.35	Peak	209.00	150	Vertical	N/A
3**	5551.500	88.59	-2.72	54.0	-34.59	AV	209.00	150	Vertical	N/A
4	7783.000	54.37	1.45	74.0	19.63	Peak	3.00	150	Vertical	Pass
4**	7783.000	42.72	1.45	54.0	11.28	AV	3.00	150	Vertical	Pass
5	11434.250	47.53	-3.19	74.0	26.47	Peak	75.00	150	Vertical	Pass
5**	11434.250	37.60	-3.19	54.0	16.40	AV	75.00	150	Vertical	Pass
6	17092.012	49.46	-0.66	74.0	24.54	Peak	149.00	150	Vertical	Pass
6**	17092.012	38.91	-0.66	54.0	15.09	AV	149.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-18_14.40.08

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 22.8

Model Number: SD7 Ultra E

Humidity (%RH): 51

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC

Test Site: 966#2


Test Voltage: 5.6G WIFI 11ax160 CH114

P=15.5

Test Engineer: Zhang Mingyue

Remark: 数据线: A13 ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

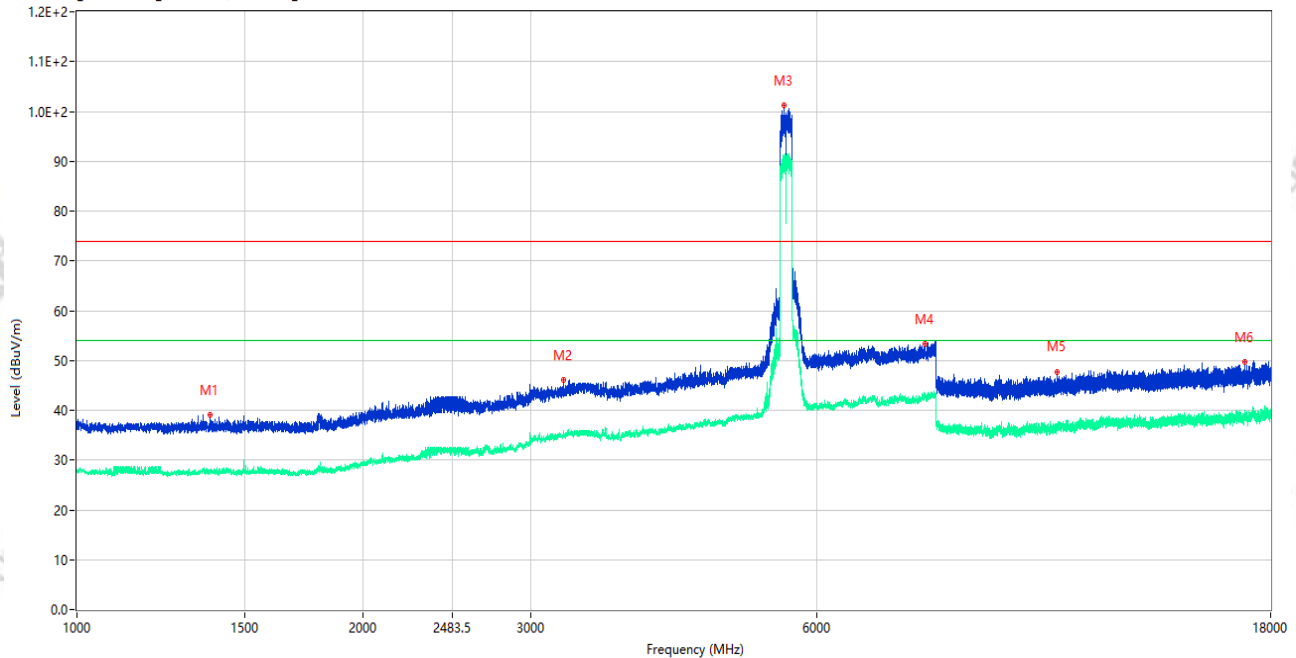

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1379.250	39.14	-16.00	74.0	34.86	Peak	12.00	150	Horizontal	Pass
1**	1379.250	27.58	-16.00	54.0	26.42	AV	12.00	150	Horizontal	Pass
2	3250.500	46.12	-7.43	74.0	27.88	Peak	127.00	150	Horizontal	Pass
2**	3250.500	35.99	-7.43	54.0	18.01	AV	127.00	150	Horizontal	Pass
3	5544.000	101.22	-2.69	74.0	-27.22	Peak	194.00	150	Horizontal	N/A
3**	5544.000	90.18	-2.69	54.0	-36.18	AV	194.00	150	Horizontal	N/A
4	7788.000	53.33	1.59	74.0	20.67	Peak	204.00	150	Horizontal	Pass
4**	7788.000	42.80	1.59	54.0	11.20	AV	204.00	150	Horizontal	Pass
5	10732.438	47.77	-3.82	74.0	26.23	Peak	192.00	150	Horizontal	Pass
5**	10732.438	36.02	-3.82	54.0	17.98	AV	192.00	150	Horizontal	Pass
6	16902.225	49.62	-0.94	74.0	24.38	Peak	46.00	150	Horizontal	Pass
6**	16902.225	38.32	-0.94	54.0	15.68	AV	46.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-19_08:58:59

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101


Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11a CH157 P=17.5

Test Engineer: Liu Yabo

Remark: 数据线: A13 ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

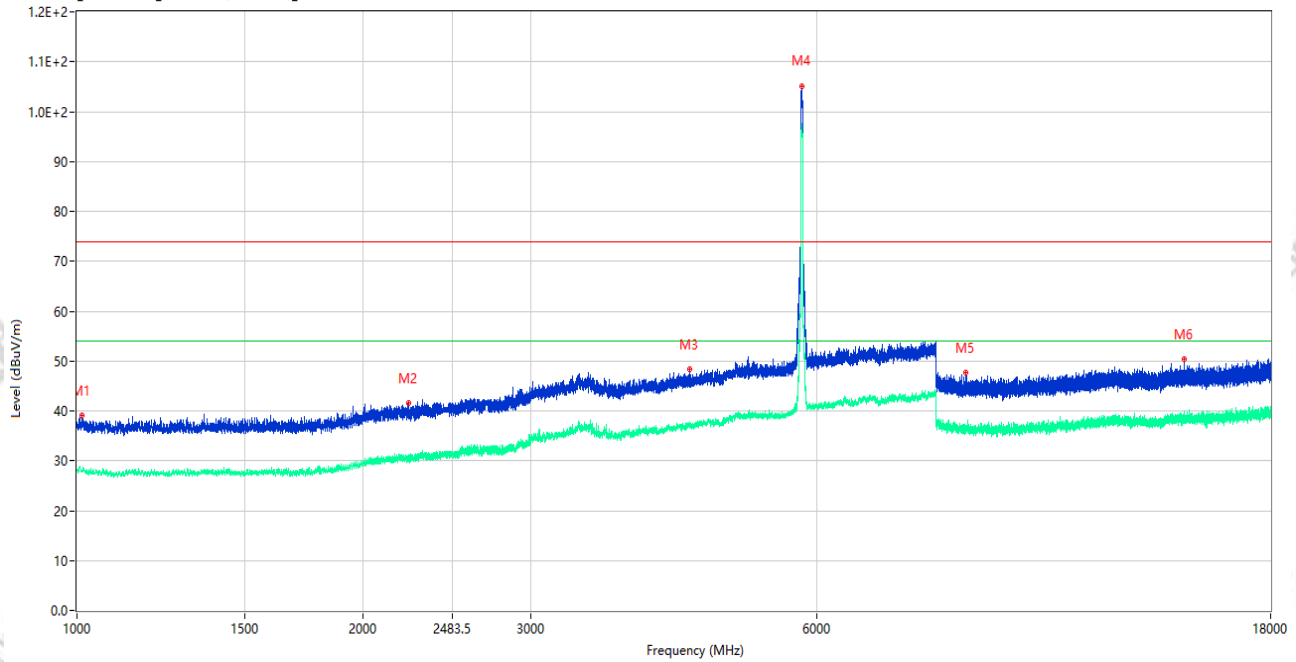

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1012.750	38.99	-14.44	74.0	35.01	Peak	10.00	150	Vertical	Pass
1**	1012.750	27.84	-14.44	54.0	26.16	AV	10.00	150	Vertical	Pass
2	2234.750	41.62	-13.10	74.0	32.38	Peak	72.00	150	Vertical	Pass
2**	2234.750	30.99	-13.10	54.0	23.01	AV	72.00	150	Vertical	Pass
3	4406.000	48.28	-3.01	74.0	25.72	Peak	202.00	150	Vertical	Pass
3**	4406.000	37.30	-3.01	54.0	16.70	AV	202.00	150	Vertical	Pass
4	5780.000	105.19	-1.51	74.0	-31.19	Peak	173.00	150	Vertical	N/A
4**	5780.000	97.49	-1.51	54.0	-43.49	AV	173.00	150	Vertical	N/A
5	8605.150	47.68	-5.24	74.0	26.32	Peak	360.00	150	Vertical	Pass
5**	8605.150	36.26	-5.24	54.0	17.74	AV	360.00	150	Vertical	Pass
6	14585.138	50.44	-2.45	74.0	23.56	Peak	176.00	150	Vertical	Pass
6**	14585.138	39.19	-2.45	54.0	14.81	AV	176.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-19_08.54.49

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC


Test Site: 966#2

Test Voltage: 5.8G WIFI 11a CH157 P=17.5

Test Engineer: Liu Yabo

Remark: 数据线: A13 ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

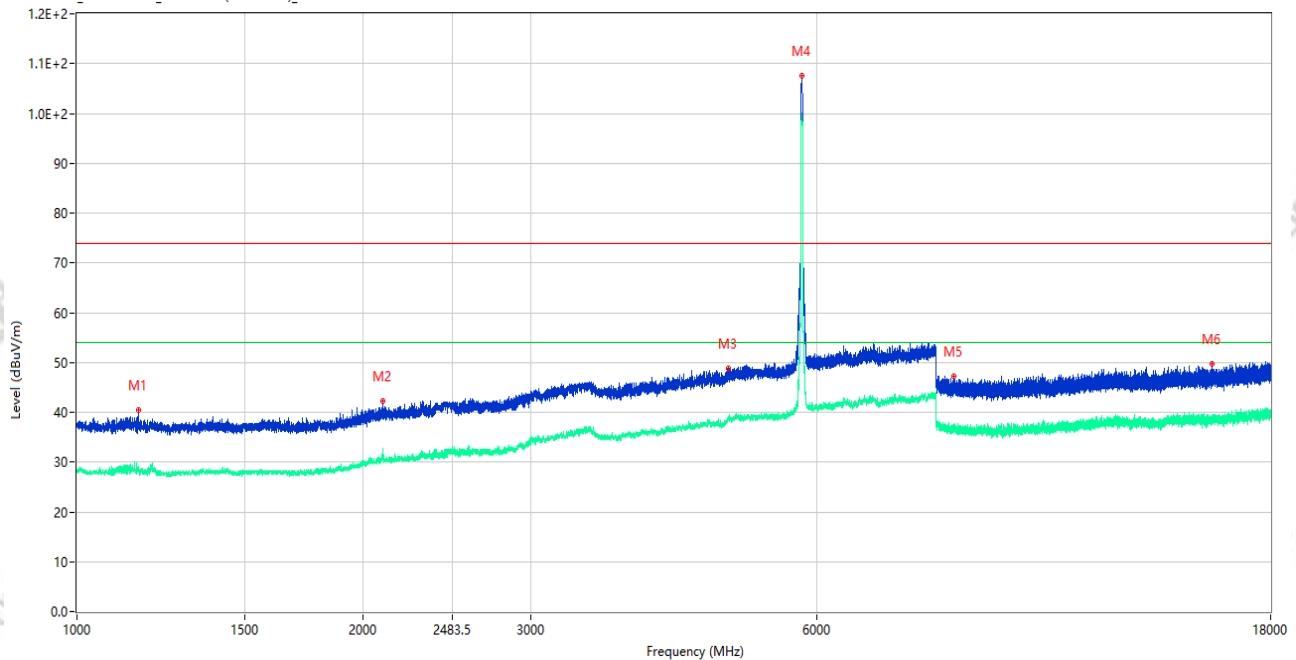

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1160.000	40.35	-15.50	74.0	33.65	Peak	0.00	150	Horizontal	Pass
1**	1160.000	28.45	-15.50	54.0	25.55	AV	0.00	150	Horizontal	Pass
2	2095.000	42.17	-13.62	74.0	31.83	Peak	239.00	150	Horizontal	Pass
2**	2095.000	31.48	-13.62	54.0	22.52	AV	239.00	150	Horizontal	Pass
3	4842.500	48.79	-1.87	74.0	25.21	Peak	95.00	150	Horizontal	Pass
3**	4842.500	38.95	-1.87	54.0	15.05	AV	95.00	150	Horizontal	Pass
4	5781.500	107.59	-1.53	74.0	-33.59	Peak	1.00	150	Horizontal	N/A
4**	5781.500	100.11	-1.53	54.0	-46.11	AV	1.00	150	Horizontal	N/A
5	8367.650	47.17	-4.53	74.0	26.83	Peak	0.00	150	Horizontal	Pass
5**	8367.650	36.89	-4.53	54.0	17.11	AV	0.00	150	Horizontal	Pass
6	15629.100	49.77	-1.70	74.0	24.23	Peak	178.00	150	Horizontal	Pass
6**	15629.100	39.16	-1.70	54.0	14.84	AV	178.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-19_09.46.55

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC

Test Site: 966#2


Test Voltage: 5.8G WIFI 11ac20 CH157

P=16.5

Test Engineer: Liu Yabo

Remark: 数据线: A13 ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

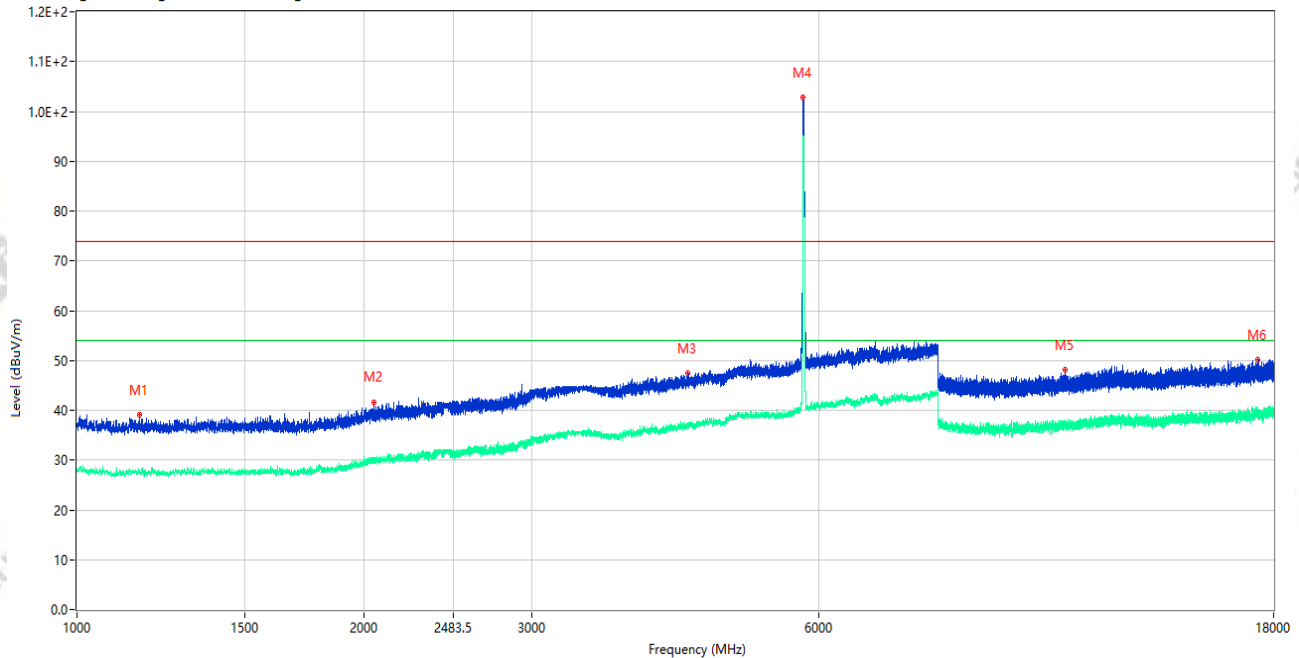

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1163.250	39.02	-15.48	74.0	34.98	Peak	330.00	150	Vertical	Pass
1**	1163.250	28.00	-15.48	54.0	26.00	AV	330.00	150	Vertical	Pass
2	2046.500	41.68	-13.46	74.0	32.32	Peak	228.00	150	Vertical	Pass
2**	2046.500	30.38	-13.46	54.0	23.62	AV	228.00	150	Vertical	Pass
3	4367.500	47.46	-3.27	74.0	26.54	Peak	243.00	150	Vertical	Pass
3**	4367.500	36.97	-3.27	54.0	17.03	AV	243.00	150	Vertical	Pass
4	5779.500	102.88	-1.51	74.0	-28.88	Peak	7.00	150	Vertical	N/A
4**	5779.500	94.61	-1.51	54.0	-40.61	AV	7.00	150	Vertical	N/A
5	10883.488	48.18	-3.19	74.0	25.82	Peak	52.00	150	Vertical	Pass
5**	10883.488	37.40	-3.19	54.0	16.60	AV	52.00	150	Vertical	Pass
6	17301.750	50.22	-0.87	74.0	23.78	Peak	0.00	150	Vertical	Pass
6**	17301.750	38.79	-0.87	54.0	15.21	AV	0.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-19_09.34.03

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC

Test Site: 966#2


Test Voltage: 5.8G WIFI 11ac20 CH157

P=16.5

Test Engineer: Liu Yabo

Remark: 数据线: A13 ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

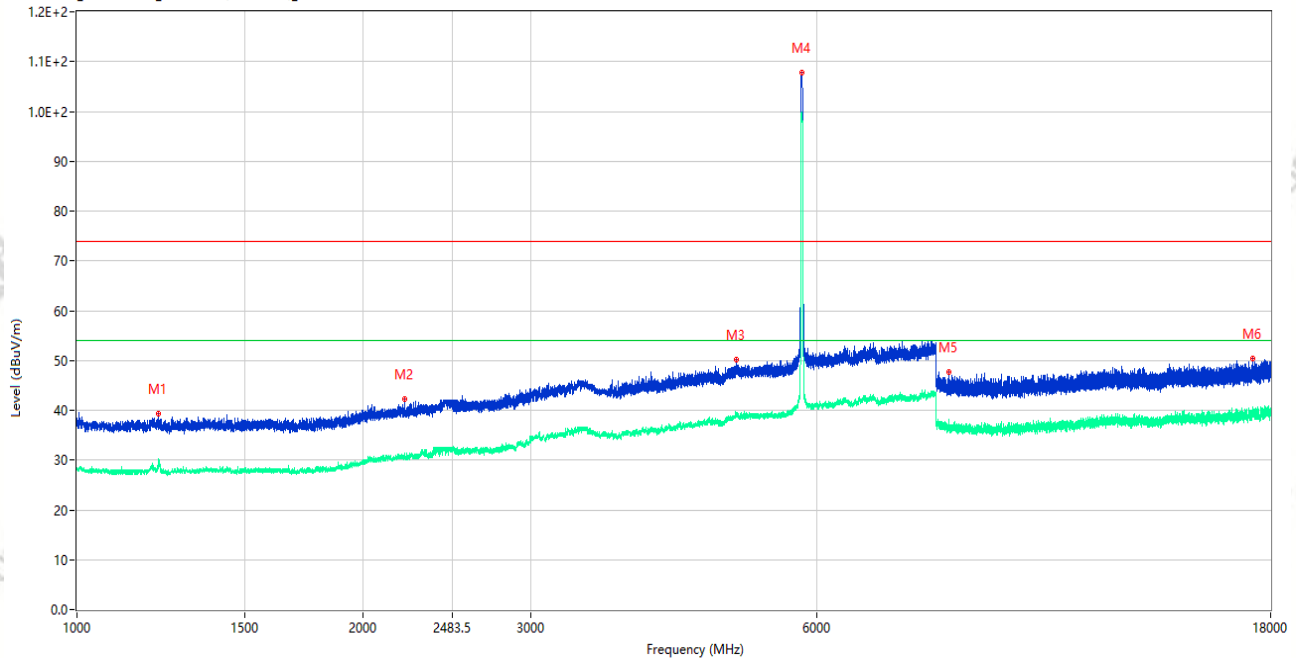


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1218.750	39.24	-15.96	74.0	34.76	Peak	89.00	150	Horizontal	Pass
1**	1218.750	29.54	-15.96	54.0	24.46	AV	89.00	150	Horizontal	Pass
2	2210.000	42.22	-13.32	74.0	31.78	Peak	288.00	150	Horizontal	Pass
2**	2210.000	30.40	-13.32	54.0	23.60	AV	288.00	150	Horizontal	Pass
3	4939.500	50.26	-1.84	74.0	23.74	Peak	92.00	150	Horizontal	Pass
3**	4939.500	38.92	-1.84	54.0	15.08	AV	92.00	150	Horizontal	Pass
4	5787.000	107.84	-1.54	74.0	-33.84	Peak	1.00	150	Horizontal	N/A
4**	5787.000	99.72	-1.54	54.0	-45.72	AV	1.00	150	Horizontal	N/A
5	8256.737	47.60	-4.50	74.0	26.40	Peak	192.00	150	Horizontal	Pass
5**	8256.737	36.88	-4.50	54.0	17.12	AV	192.00	150	Horizontal	Pass
6	17230.875	50.42	-0.38	74.0	23.58	Peak	175.00	150	Horizontal	Pass
6**	17230.875	39.76	-0.38	54.0	14.24	AV	175.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060005
Test Time: 2026-07-19_09.51.40

EUT Name:	Siyata SD7 Ultra E	Temp.(°C):	23.2
Model Number:	SD7 Ultra E	Humidity (%RH):	46
Sample Number:	CC26050143-001-S08	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	DC 5V From PC
Test Site:	966#2	Test Voltage:	5.8G WIFI 11ac40 CH151
		P=16.5	
Test Engineer:	Liu Yabo	Remark:	数据线: A13 ANT1

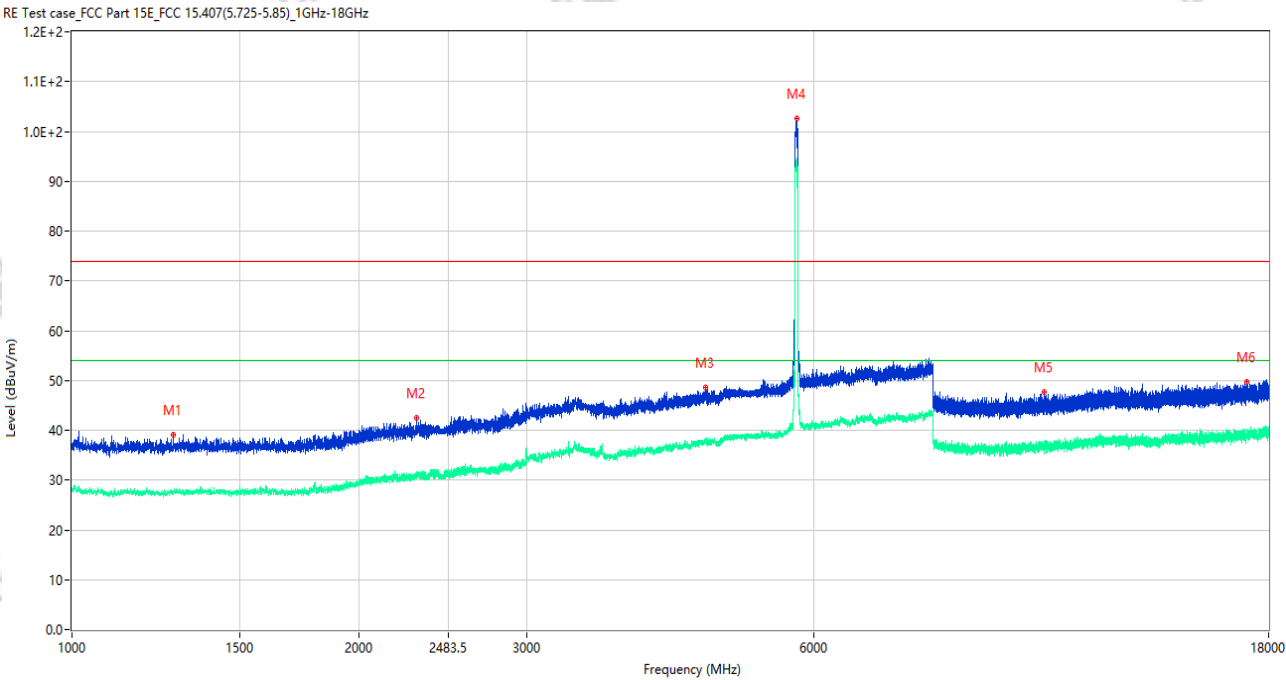

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1278.250	39.00	-15.88	74.0	35.00	Peak	99.00	150	Vertical	Pass
1**	1278.250	27.50	-15.88	54.0	26.50	AV	99.00	150	Vertical	Pass
2	2300.000	42.47	-13.07	74.0	31.53	Peak	290.00	150	Vertical	Pass
2**	2300.000	31.03	-13.07	54.0	22.97	AV	290.00	150	Vertical	Pass
3	4619.000	48.66	-2.93	74.0	25.34	Peak	185.00	150	Vertical	Pass
3**	4619.000	37.58	-2.93	54.0	16.42	AV	185.00	150	Vertical	Pass
4	5764.500	102.53	-1.83	74.0	-28.53	Peak	173.00	150	Vertical	N/A
4**	5764.500	94.65	-1.83	54.0	-40.65	AV	173.00	150	Vertical	N/A
5	10479.025	47.62	-3.36	74.0	26.38	Peak	265.00	150	Vertical	Pass
5**	10479.025	36.87	-3.36	54.0	17.13	AV	265.00	150	Vertical	Pass
6	17073.113	49.77	-0.66	74.0	24.23	Peak	74.00	150	Vertical	Pass
6**	17073.113	39.75	-0.66	54.0	14.25	AV	74.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-19_09.55.44

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC

Test Site: 966#2


Test Voltage: 5.8G WIFI 11ac40 CH151

P=16.5

Test Engineer: Liu Yabo

Remark: 数据线: A13 ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

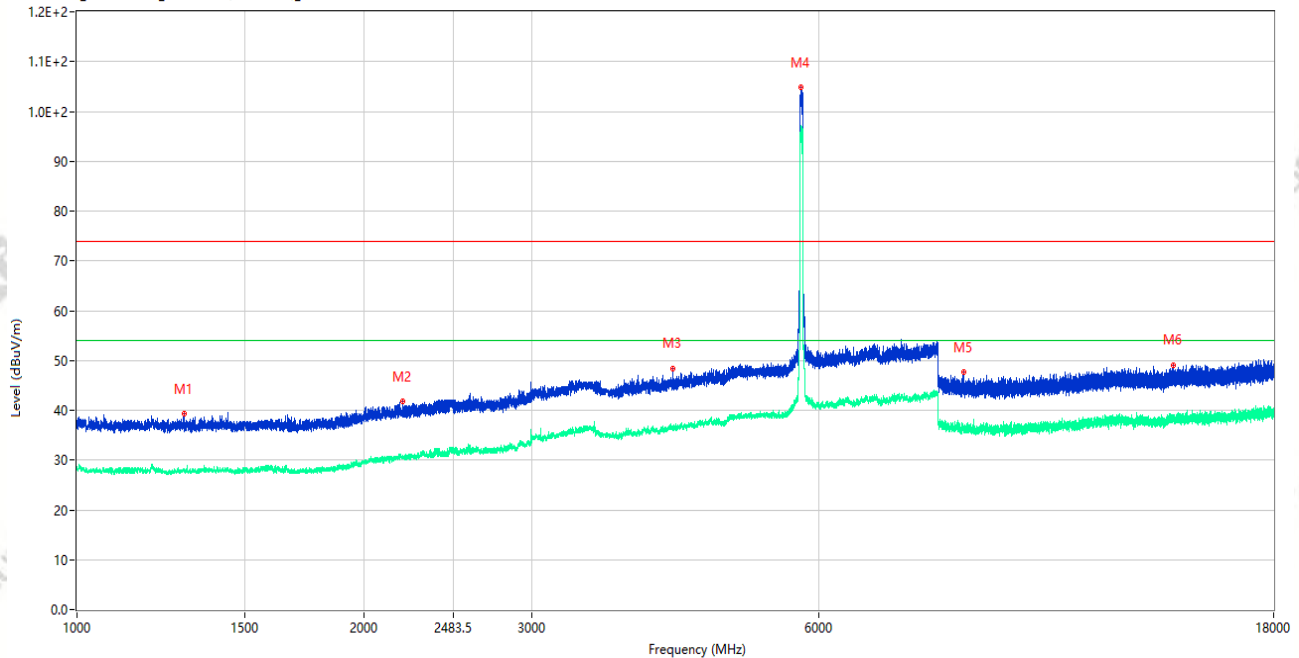

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1296.250	39.34	-15.68	74.0	34.66	Peak	0.00	150	Horizontal	Pass
1**	1296.250	27.94	-15.68	54.0	26.06	AV	0.00	150	Horizontal	Pass
2	2194.250	41.78	-13.32	74.0	32.22	Peak	0.00	150	Horizontal	Pass
2**	2194.250	30.66	-13.32	54.0	23.34	AV	0.00	150	Horizontal	Pass
3	4214.500	48.45	-3.63	74.0	25.55	Peak	212.00	150	Horizontal	Pass
3**	4214.500	36.17	-3.63	54.0	17.83	AV	212.00	150	Horizontal	Pass
4	5746.000	104.87	-2.15	74.0	-30.87	Peak	360.00	150	Horizontal	N/A
4**	5746.000	96.54	-2.15	54.0	-42.54	AV	360.00	150	Horizontal	N/A
5	8506.588	47.58	-4.70	74.0	26.42	Peak	74.00	150	Horizontal	Pass
5**	8506.588	35.73	-4.70	54.0	18.27	AV	74.00	150	Horizontal	Pass
6	14111.849	49.14	-1.16	74.0	24.86	Peak	360.00	150	Horizontal	Pass
6**	14111.849	38.01	-1.16	54.0	15.99	AV	360.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-19_10.39.21

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC

Test Site: 966#2


Test Voltage: 5.8G WIFI 11ac80 CH155

P=16.5

Test Engineer: Liu Yabo

Remark: 数据线: A13 ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

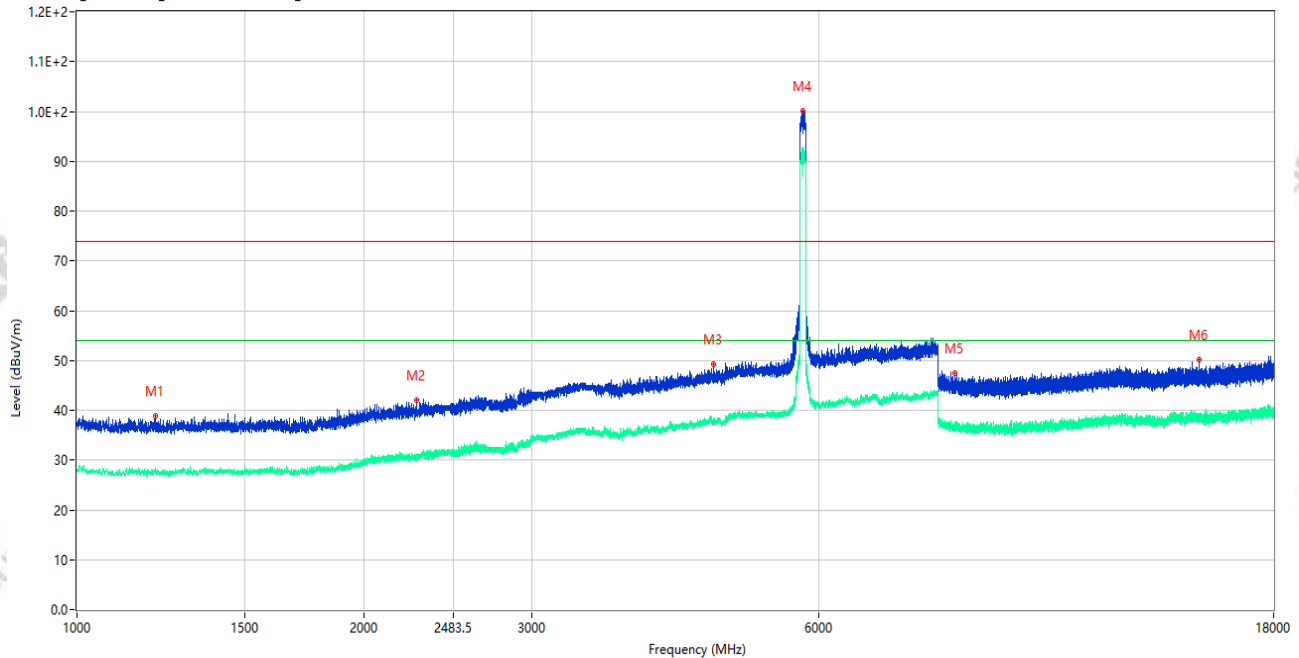

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1207.500	38.86	-15.83	74.0	35.14	Peak	228.00	150	Vertical	Pass
1**	1207.500	28.46	-15.83	54.0	25.54	AV	228.00	150	Vertical	Pass
2	2273.000	41.98	-12.93	74.0	32.02	Peak	253.00	150	Vertical	Pass
2**	2273.000	31.06	-12.93	54.0	22.94	AV	253.00	150	Vertical	Pass
3	4656.500	49.27	-3.31	74.0	24.73	Peak	302.00	150	Vertical	Pass
3**	4656.500	37.65	-3.31	54.0	16.35	AV	302.00	150	Vertical	Pass
4	5773.000	100.12	-1.61	74.0	-26.12	Peak	173.00	150	Vertical	N/A
4**	5773.000	92.20	-1.61	54.0	-38.20	AV	173.00	150	Vertical	N/A
5	8339.625	47.35	-4.76	74.0	26.65	Peak	28.00	150	Vertical	Pass
5**	8339.625	36.28	-4.76	54.0	17.72	AV	28.00	150	Vertical	Pass
6	15027.450	50.10	-2.68	74.0	23.90	Peak	314.00	150	Vertical	Pass
6**	15027.450	38.50	-2.68	54.0	15.50	AV	314.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-19_10.34.29

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC

Test Site: 966#2


Test Voltage: 5.8G WIFI 11ac80 CH155

P=16.5

Test Engineer: Liu Yabo

Remark: 数据线: A13 ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

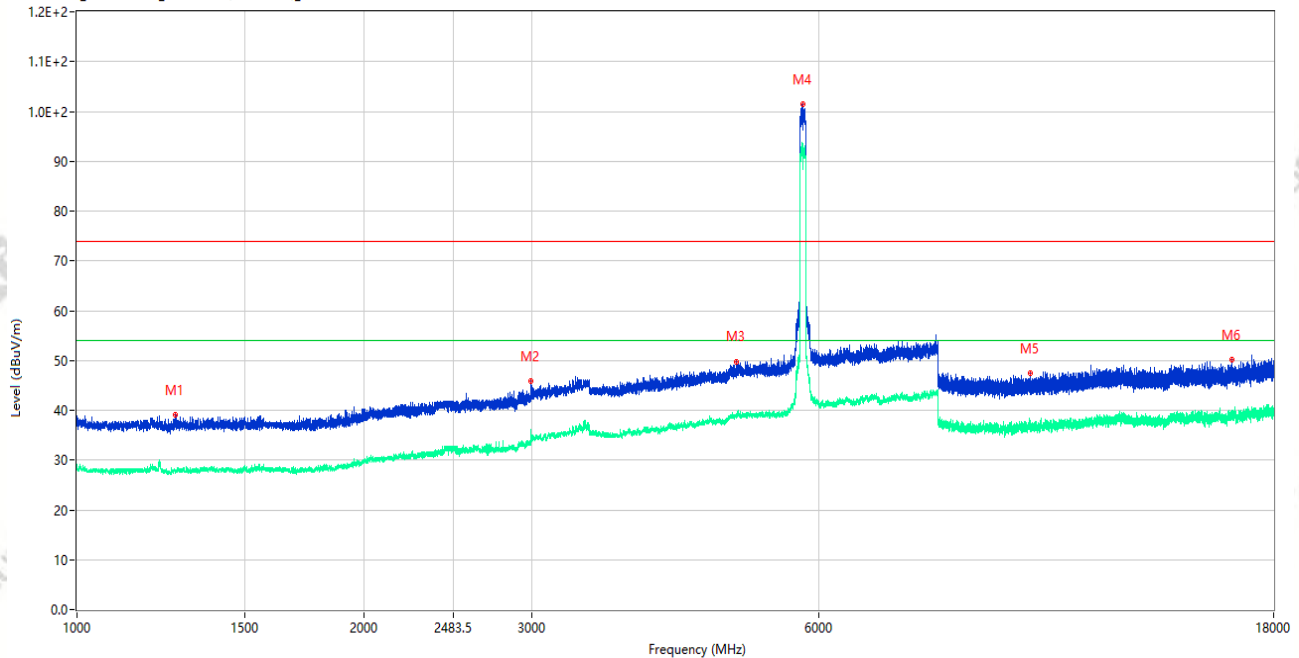


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1267.250	39.10	-15.96	74.0	34.90	Peak	149.00	150	Horizontal	Pass
1**	1267.250	27.44	-15.96	54.0	26.56	AV	149.00	150	Horizontal	Pass
2	2991.500	45.78	-9.09	74.0	28.22	Peak	358.00	150	Horizontal	Pass
2**	2991.500	34.58	-9.09	54.0	19.42	AV	358.00	150	Horizontal	Pass
3	4916.500	49.65	-2.45	74.0	24.35	Peak	14.00	150	Horizontal	Pass
3**	4916.500	38.78	-2.45	54.0	15.22	AV	14.00	150	Horizontal	Pass
4	5767.500	101.36	-1.72	74.0	-27.36	Peak	349.00	150	Horizontal	N/A
4**	5767.500	93.50	-1.72	54.0	-39.50	AV	349.00	150	Horizontal	N/A
5	10006.875	47.36	-4.24	74.0	26.64	Peak	170.00	150	Horizontal	Pass
5**	10006.875	36.14	-4.24	54.0	17.86	AV	170.00	150	Horizontal	Pass
6	16288.238	50.07	-1.46	74.0	23.93	Peak	360.00	150	Horizontal	Pass
6**	16288.238	39.19	-1.46	54.0	14.81	AV	360.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-19_11.43.49

EUT Name:	Siyata SD7 Ultra E	Temp.(°C):	23.2
Model Number:	SD7 Ultra E	Humidity (%RH):	46
Sample Number:	CC26050143-001-S08	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	DC 5V From PC
Test Site:	966#2	Test Voltage:	5.8G WIFI 11ax20 CH157
		P=17.5	
Test Engineer:	Liu Yabo	Remark:	数据线: A13 ANT1

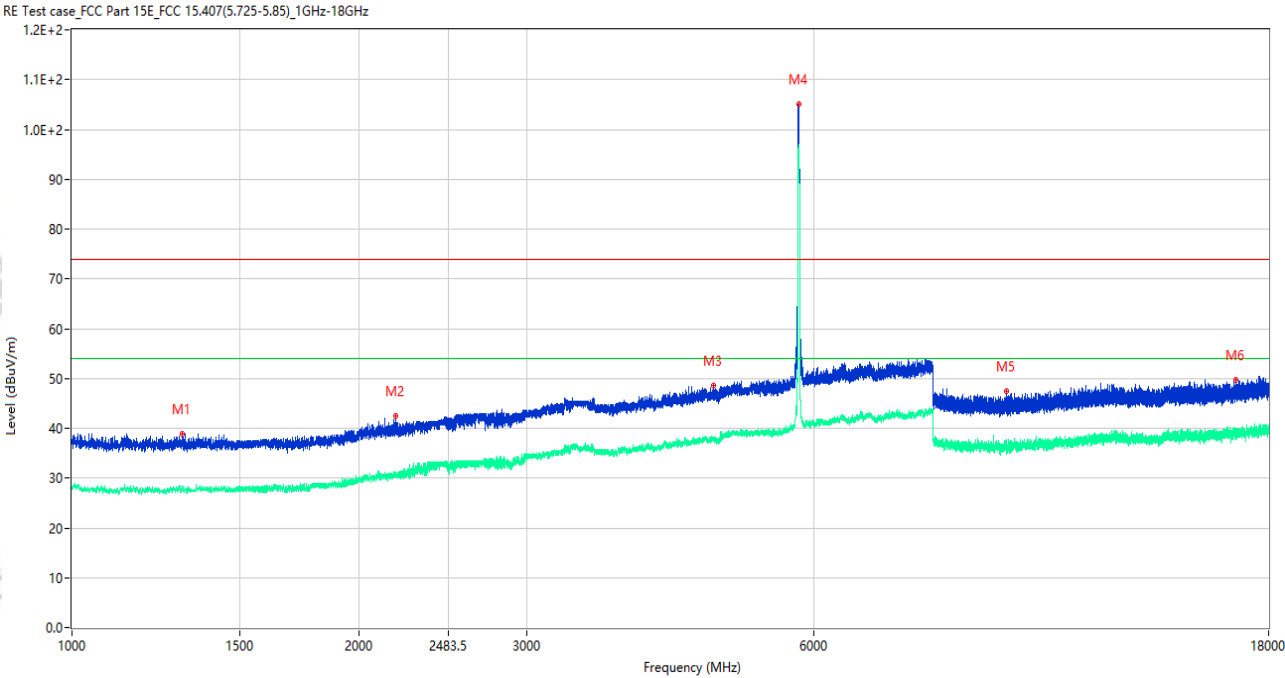

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1306.000	38.86	-15.62	74.0	35.14	Peak	152.00	150	Vertical	Pass
1**	1306.000	28.35	-15.62	54.0	25.65	AV	152.00	150	Vertical	Pass
2	2185.250	42.56	-13.16	74.0	31.44	Peak	161.00	150	Vertical	Pass
2**	2185.250	31.01	-13.16	54.0	22.99	AV	161.00	150	Vertical	Pass
3	4711.000	48.48	-3.80	74.0	25.52	Peak	167.00	150	Vertical	Pass
3**	4711.000	37.69	-3.80	54.0	16.31	AV	167.00	150	Vertical	Pass
4	5789.500	105.07	-1.52	74.0	-31.07	Peak	217.00	150	Vertical	N/A
4**	5789.500	96.11	-1.52	54.0	-42.11	AV	217.00	150	Vertical	N/A
5	9546.362	47.41	-2.52	74.0	26.59	Peak	310.00	150	Vertical	Pass
5**	9546.362	37.70	-2.52	54.0	16.30	AV	310.00	150	Vertical	Pass
6	16620.037	49.68	-1.05	74.0	24.32	Peak	360.00	150	Vertical	Pass
6**	16620.037	38.67	-1.05	54.0	15.33	AV	360.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-19_11.48.31

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC

Test Site: 966#2


Test Voltage: 5.8G WIFI 11ax20 CH157

P=17.5

Test Engineer: Liu Yabo

Remark: 数据线: A13 ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

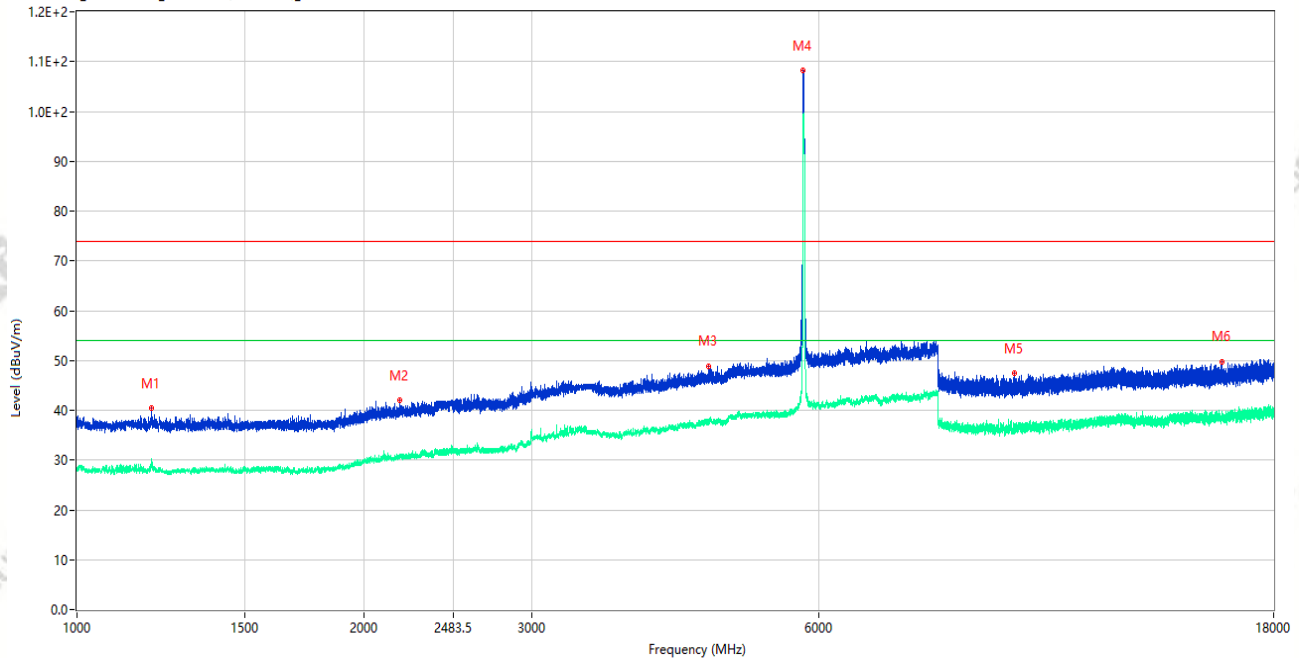

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1197.000	40.52	-15.71	74.0	33.48	Peak	235.00	150	Horizontal	Pass
1**	1197.000	29.25	-15.71	54.0	24.75	AV	235.00	150	Horizontal	Pass
2	2178.500	42.02	-12.86	74.0	31.98	Peak	229.00	150	Horizontal	Pass
2**	2178.500	30.53	-12.86	54.0	23.47	AV	229.00	150	Horizontal	Pass
3	4602.500	48.93	-3.65	74.0	25.07	Peak	77.00	150	Horizontal	Pass
3**	4602.500	37.36	-3.65	54.0	16.64	AV	77.00	150	Horizontal	Pass
4	5776.500	108.19	-1.54	74.0	-34.19	Peak	0.00	150	Horizontal	N/A
4**	5776.500	98.96	-1.54	54.0	-44.96	AV	0.00	150	Horizontal	N/A
5	9625.450	47.52	-3.72	74.0	26.48	Peak	27.00	150	Horizontal	Pass
5**	9625.450	36.02	-3.72	54.0	17.98	AV	27.00	150	Horizontal	Pass
6	15898.162	49.81	-1.79	74.0	24.19	Peak	115.00	150	Horizontal	Pass
6**	15898.162	38.36	-1.79	54.0	15.64	AV	115.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-19_13.17.22

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC

Test Site: 966#2


Test Voltage: 5.8G WIFI 11ax40 CH151

P=17.5

Test Engineer: Liu Yabo

Remark: 数据线: A13 ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

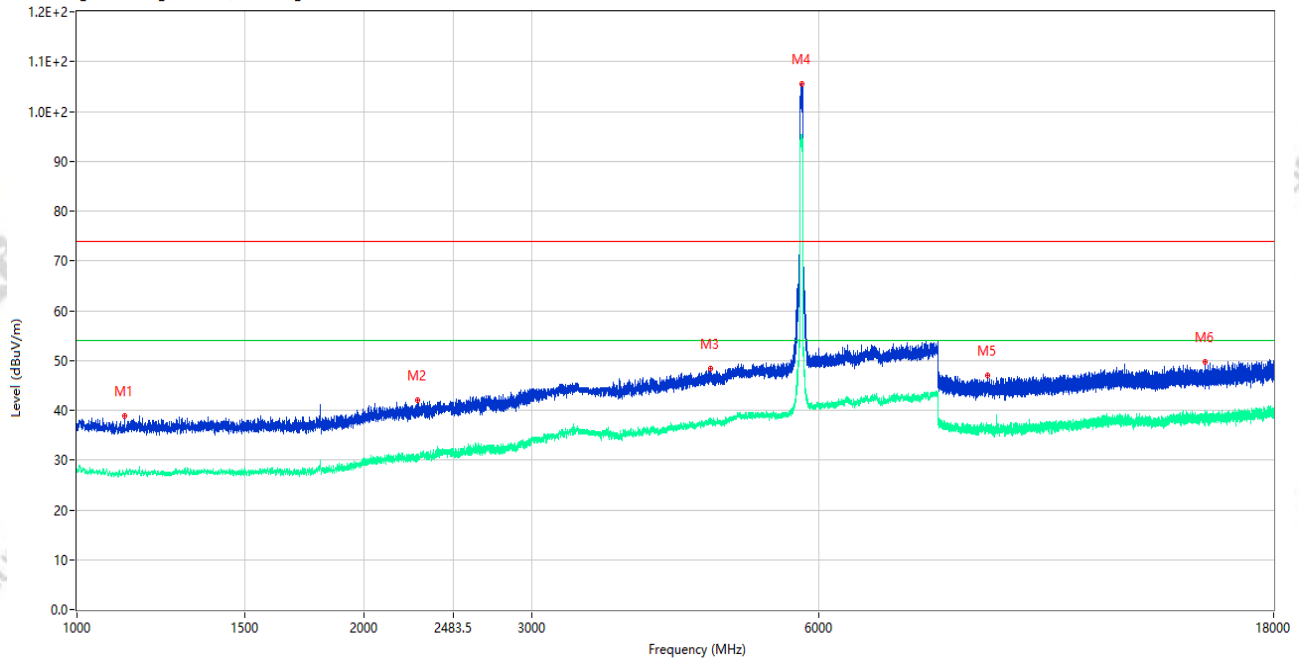

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1123.000	38.91	-15.69	74.0	35.09	Peak	270.00	150	Vertical	Pass
1**	1123.000	26.89	-15.69	54.0	27.11	AV	270.00	150	Vertical	Pass
2	2274.000	41.94	-12.90	74.0	32.06	Peak	265.00	150	Vertical	Pass
2**	2274.000	30.88	-12.90	54.0	23.12	AV	265.00	150	Vertical	Pass
3	4615.000	48.42	-3.15	74.0	25.58	Peak	0.00	150	Vertical	Pass
3**	4615.000	37.76	-3.15	54.0	16.24	AV	0.00	150	Vertical	Pass
4	5765.000	105.52	-1.82	74.0	-31.52	Peak	178.00	150	Vertical	N/A
4**	5765.000	93.89	-1.82	54.0	-39.89	AV	178.00	150	Vertical	N/A
5	9025.762	46.93	-4.25	74.0	27.07	Peak	237.00	150	Vertical	Pass
5**	9025.762	36.26	-4.25	54.0	17.74	AV	237.00	150	Vertical	Pass
6	15272.625	49.75	-1.37	74.0	24.25	Peak	360.00	150	Vertical	Pass
6**	15272.625	39.68	-1.37	54.0	14.32	AV	360.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-19_13.11.51

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC

Test Site: 966#2


Test Voltage: 5.8G WIFI 11ax40 CH151

P=17.5

Test Engineer: Liu Yabo

Remark: 数据线: A13 ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

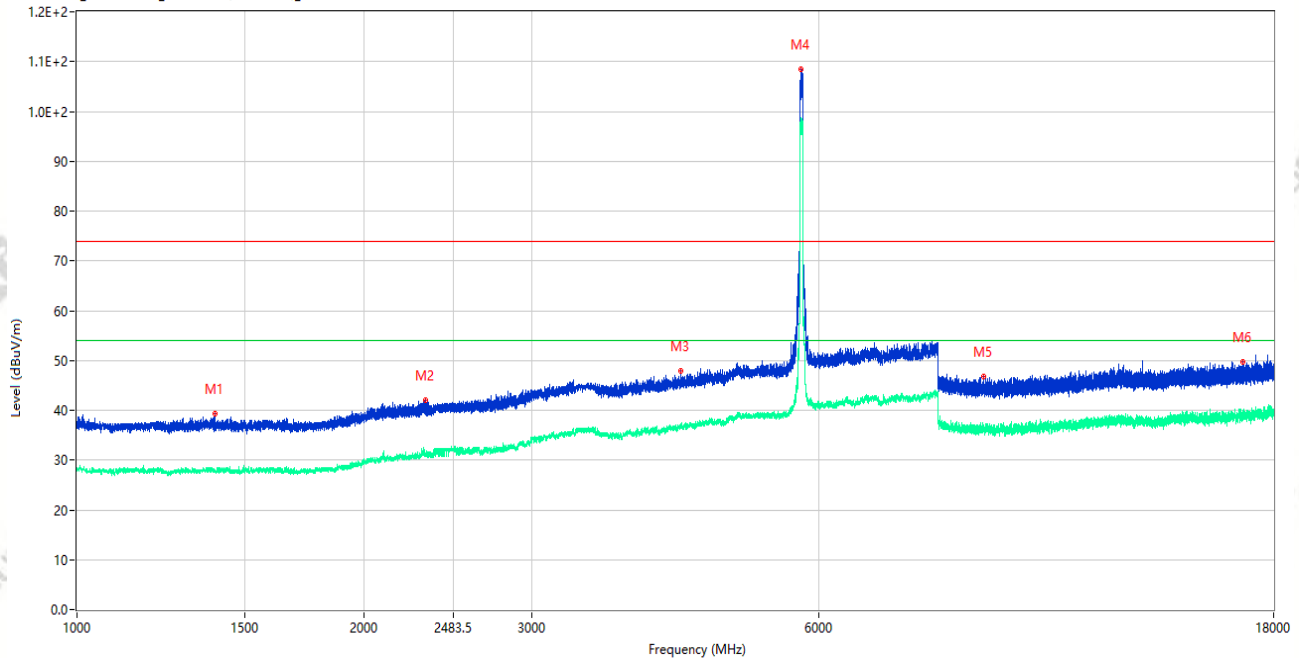

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1394.750	39.34	-16.01	74.0	34.66	Peak	4.00	150	Horizontal	Pass
1**	1394.750	27.57	-16.01	54.0	26.43	AV	4.00	150	Horizontal	Pass
2	2319.750	42.04	-12.39	74.0	31.96	Peak	17.00	150	Horizontal	Pass
2**	2319.750	30.93	-12.39	54.0	23.07	AV	17.00	150	Horizontal	Pass
3	4297.000	47.91	-3.79	74.0	26.09	Peak	101.00	150	Horizontal	Pass
3**	4297.000	36.63	-3.79	54.0	17.37	AV	101.00	150	Horizontal	Pass
4	5747.000	108.47	-2.14	74.0	-34.47	Peak	0.00	150	Horizontal	N/A
4**	5747.000	98.45	-2.14	54.0	-44.45	AV	0.00	150	Horizontal	N/A
5	8941.924	46.73	-4.57	74.0	27.27	Peak	217.00	150	Horizontal	Pass
5**	8941.924	36.17	-4.57	54.0	17.83	AV	217.00	150	Horizontal	Pass
6	16709.287	49.69	-1.54	74.0	24.31	Peak	15.00	150	Horizontal	Pass
6**	16709.287	38.95	-1.54	54.0	15.05	AV	15.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-19_11.33.04

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC

Test Site: 966#2


Test Voltage: 5.8G WIFI 11ax80 CH155

P=17.5

Test Engineer: Liu Yabo

Remark: 数据线: A13 ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

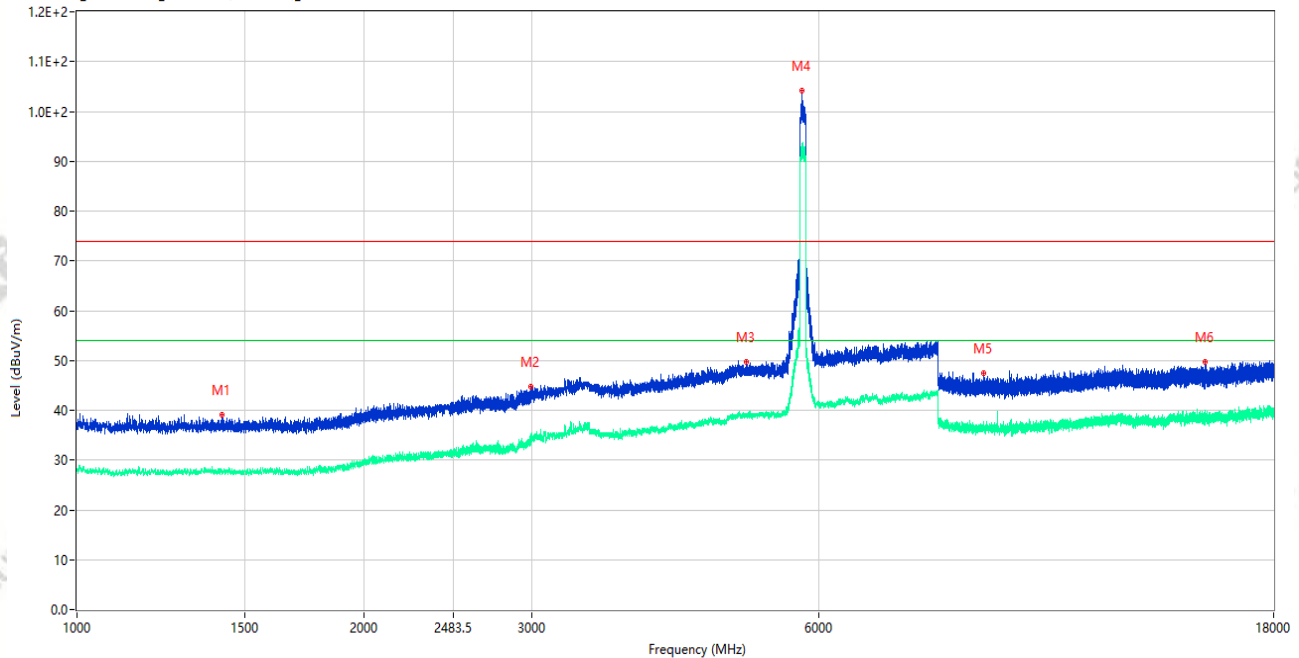

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1421.000	39.13	-15.94	74.0	34.87	Peak	358.00	150	Vertical	Pass
1**	1421.000	27.73	-15.94	54.0	26.27	AV	358.00	150	Vertical	Pass
2	2992.000	44.79	-9.06	74.0	29.21	Peak	335.00	150	Vertical	Pass
2**	2992.000	34.00	-9.06	54.0	20.00	AV	335.00	150	Vertical	Pass
3	5033.000	49.68	-2.20	74.0	24.32	Peak	10.00	150	Vertical	Pass
3**	5033.000	39.31	-2.20	54.0	14.69	AV	10.00	150	Vertical	Pass
4	5763.000	104.11	-1.88	74.0	-30.11	Peak	170.00	150	Vertical	N/A
4**	5763.000	92.80	-1.88	54.0	-38.80	AV	170.00	150	Vertical	N/A
5	8932.901	47.46	-4.24	74.0	26.54	Peak	28.00	150	Vertical	Pass
5**	8932.901	36.70	-4.24	54.0	17.30	AV	28.00	150	Vertical	Pass
6	15263.700	49.81	-1.03	74.0	24.19	Peak	279.00	150	Vertical	Pass
6**	15263.700	39.04	-1.03	54.0	14.96	AV	279.00	150	Vertical	Pass

Test Result

Project Number: P-CC26060005

Test Time: 2026-07-19_11.28.25

EUT Name: Siyata SD7 Ultra E

Temp.(°C): 23.2

Model Number: SD7 Ultra E

Humidity (%RH): 46

Sample Number: CC26050143-001-S08

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: DC 5V From PC

Test Site: 966#2


Test Voltage: 5.8G WIFI 11ax80 CH155

P=17.5

Test Engineer: Liu Yabo

Remark: 数据线: A13 ANT1

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

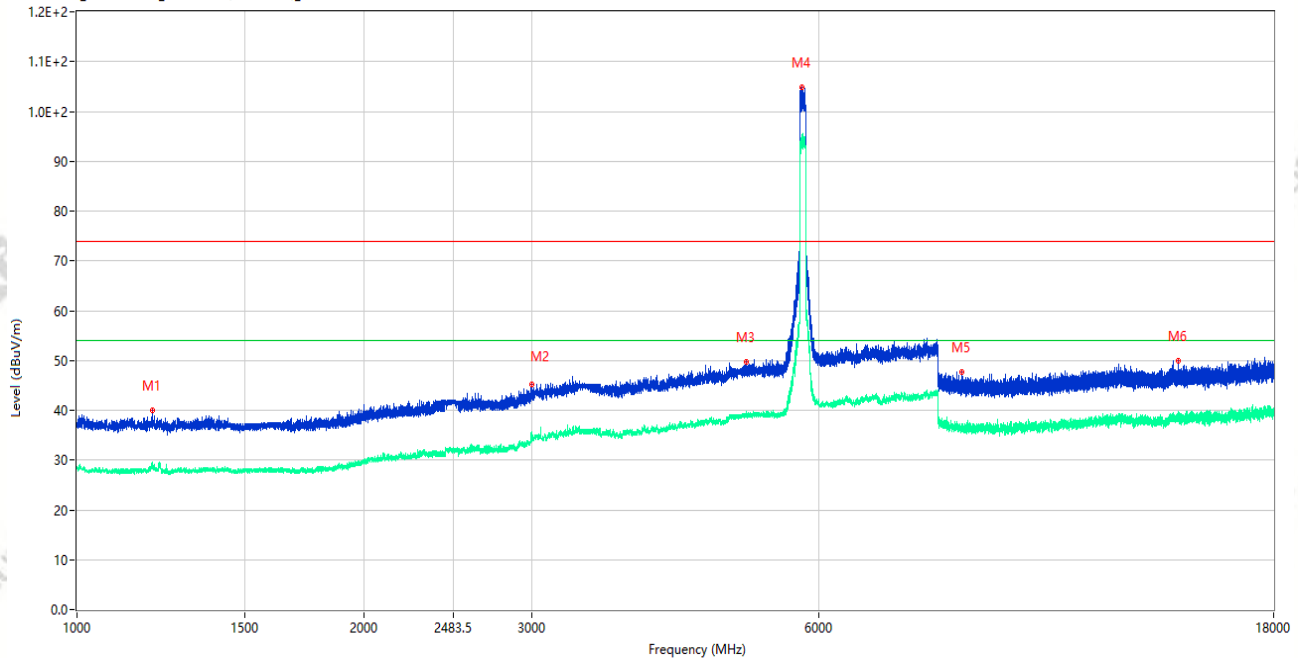

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1198.750	40.00	-15.75	74.0	34.00	Peak	227.00	150	Horizontal	Pass
1**	1198.750	28.93	-15.75	54.0	25.07	AV	227.00	150	Horizontal	Pass
2	3000.500	45.21	-7.89	74.0	28.79	Peak	360.00	150	Horizontal	Pass
2**	3000.500	35.71	-7.89	54.0	18.29	AV	360.00	150	Horizontal	Pass
3	5040.000	49.82	-2.41	74.0	24.18	Peak	104.00	150	Horizontal	Pass
3**	5040.000	38.98	-2.41	54.0	15.02	AV	104.00	150	Horizontal	Pass
4	5766.000	104.79	-1.78	74.0	-30.79	Peak	360.00	150	Horizontal	N/A
4**	5766.000	95.02	-1.78	54.0	-41.02	AV	360.00	150	Horizontal	N/A
5	8478.800	47.61	-4.84	74.0	26.39	Peak	334.00	150	Horizontal	Pass
5**	8478.800	36.08	-4.84	54.0	17.92	AV	334.00	150	Horizontal	Pass
6	14297.437	49.85	-2.67	74.0	24.15	Peak	1.00	150	Horizontal	Pass
6**	14297.437	38.45	-2.67	54.0	15.55	AV	1.00	150	Horizontal	Pass